


NET 621 Week 9 Practical - Wireless Configuration

Student: Bradley Ramaphakela Date:27/09/2026

Task 79: AP Security Configuration - WPA2-PSK

Access Point configured with SSID CORP-WIFI-V30, Authentication WPA2-PSK, Encryption AES, and secure passphrase Limpopo2026!Secure. Port 1 must be On.

SSID = CORP-WIFI-V30, Authentication = WPA2-PSK, Encryption = AES, PSK = Limpopo2026!Secure

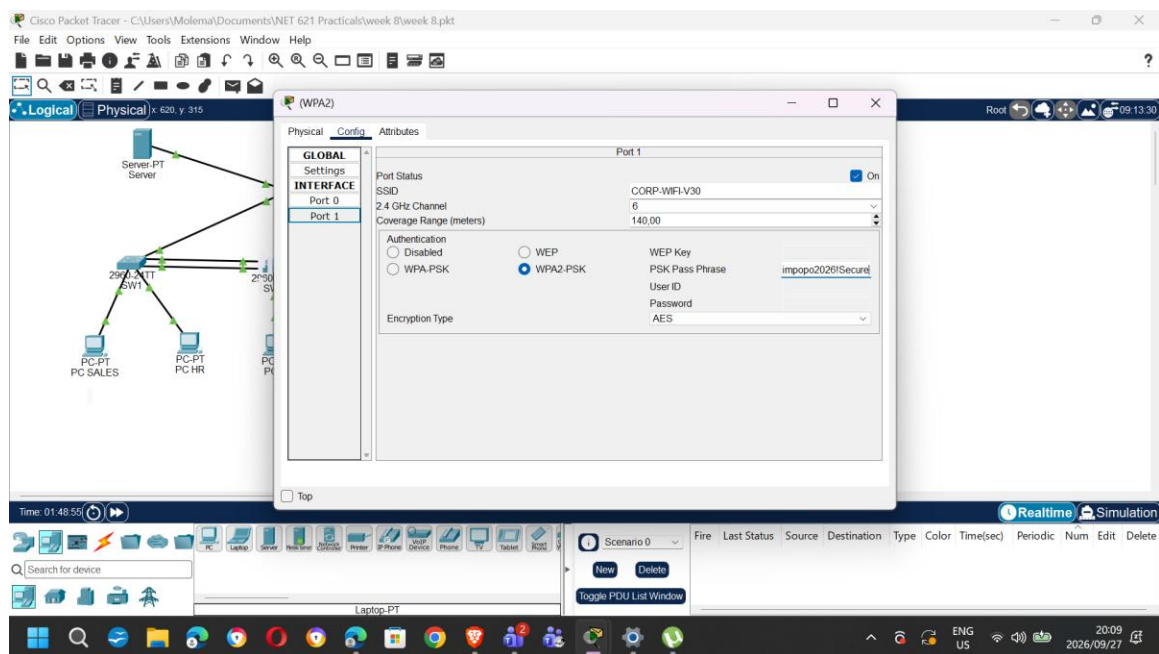

Task 79b: SW2 - VLAN 30 Access & DHCP Pool

SW2 Fa0/5 configured as access port in VLAN 30 for the AP, with DHCP pool VLAN30-WIFI providing addresses for wireless clients.

interface fa0/5 switchport access vlan 30, ip dhcp pool VLAN30-WIFI, network 192.168.30.0/24, default-router 192.168.30.1, dns-server 8.8.8.8

CTU laptop > Desktop > PC Wireless > Profiles tab showing CORP-WIFI-V30 with Security WPA2-Personal - CORRECT PROFILE

After creating, click CORP-WIFI-V30 > Connect to associate.

Task 80: IP Verification - DHCP Success

After successful WPA2 authentication, CTU laptop receives IP address from SW2 DHCP pool VLAN30-WIFI.

Command Prompt > ipconfig should show:


IPv4: 192.168.30.4 (or other .2-.254)

Subnet: 255.255.255.0

Gateway: 192.168.30.1

DHCP Server: 192.168.30.1

DNS: 8.8.8.8

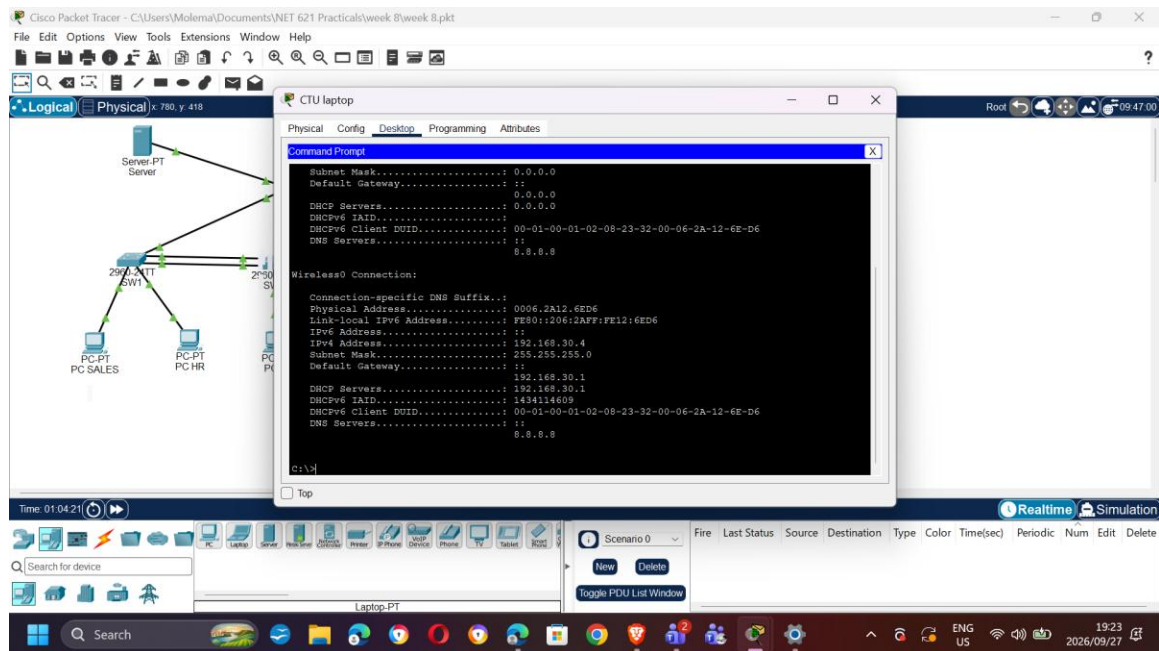

Task 81: Misconfiguration / Failure Documentation

Documentation of failure when using incorrect security settings or wrong passphrase.

Laptop shows No association with access point and Adapter is Active but not connected.

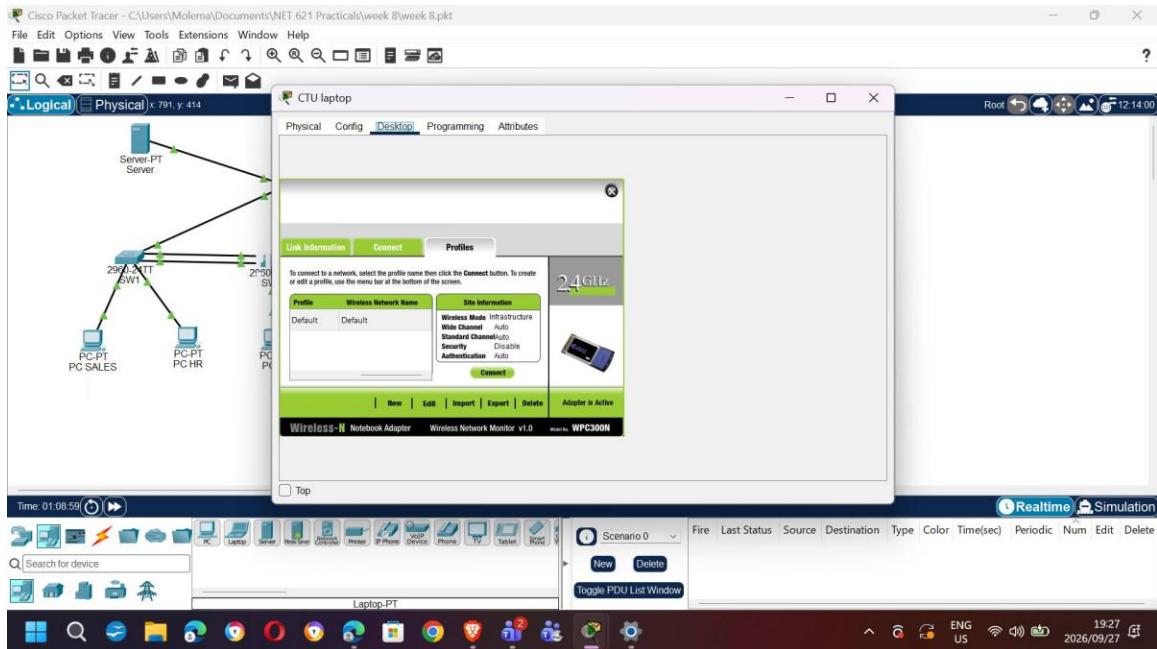


Figure 4: Failure state - Profile set to Default / Security Disable while AP requires WPA2 - results in No Association (or after entering Wrong1234)

To generate this: Profiles > Delete CORP-WIFI-V30 > try Default, or enter wrong PSK Limpopo2026!Wrong. Capture No association screen.