

Poppr: An R package for genetic analysis of populations with mixed (clonal/sexual) reproduction

Zhian N. Kamvar¹ and Niklaus J. Grünwald^{1,2}

1) Department of Botany and Plant Pathology, Oregon State University, Corvallis, OR

2) Horticultural Crops Research Laboratory, USDA-ARS, Corvallis, OR

February 26, 2013

Abstract

Poppr provides open-source, cross-platform tools for quick analysis of population genetic data enabling focus on data analysis and interpretation. While there are a plethora of packages for population genetic analysis, few are able to offer quick and easy analysis of populations with mixed reproductive modes. *Poppr*'s main advantage is the ease of use and integration with other packages such as *adegenet* and *vegan*, including support for novel methods such as clone correction, multilocus genotype analysis, calculation of Bruvo's distance and the index of association.



Contents

| | | |
|----------|---|-----------|
| 1 | Introduction | 3 |
| 1.1 | Purpose | 3 |
| 1.2 | Installation | 3 |
| 1.3 | Quick start | 3 |
| 1.4 | Get out of my dreams and into my R {importing data into poppr} | 6 |
| 1.4.1 | Function: getfile | 6 |
| 1.4.2 | Function: read.genalex | 9 |
| 1.4.3 | Other ways of importing data | 10 |
| 1.4.4 | Function: genind2genalex | 10 |
| 1.5 | Getting to know adegenet's genind object | 11 |
| 1.5.1 | The other slot | 11 |
| 1.5.2 | Setting the population factor {adegenet's function: pop} | 13 |
| 2 | Data Manipulation | 14 |
| 2.1 | Inside the golden days of missing data {replace or remove missing data} | 15 |
| 2.1.1 | Function: missingno | 15 |
| 2.2 | Can you take me hier(archy)? {population hierarchy construction} | 18 |
| 2.2.1 | Function: splitcombine | 18 |
| 2.3 | Divide (populations) and conquer (your analysis) {extract populations} | 21 |
| 2.3.1 | Function: popsub | 21 |
| 2.4 | Attack of the clone correction {clone-censor data sets} | 23 |
| 2.4.1 | Function: clonecorrect | 23 |
| 2.5 | Every day I'm shuffling (data sets) {permutations and bootstrap resampling} | 24 |
| 2.5.1 | Function: shufflepop | 24 |
| 3 | Multilocus Genotype Analysis | 26 |
| 3.1 | Just a peek {How many multilocus genotypes are in our data set?} | 26 |
| 3.1.1 | Function: mlg | 26 |
| 3.2 | Clone-ing around {MLGs across populations} | 26 |
| 3.2.1 | Function: mlg.crosspop | 27 |
| 3.3 | Bringing something to the table {producing MLG tables and graphs} | 28 |
| 3.3.1 | Function: mlg.table | 28 |
| 3.4 | Getting into the mix {combining MLG functions} | 30 |
| 3.4.1 | Function: mlg.vector | 31 |
| 3.5 | Do you see what I see? {alternative data visualization} | 33 |
| 4 | Index and Distance Calculations | 34 |
| 4.1 | The missing linkage disequilibrium {calculating the index of association, I_A and \bar{r}_d } | 34 |
| 4.1.1 | Function: ia | 34 |
| 4.2 | Going the distance {Bruvo's distance} | 36 |
| 4.2.1 | Function: bruvo.dist | 37 |
| 4.2.2 | Function: bruvo.boot | 39 |
| 4.2.3 | Function: bruvo.msn | 40 |
| 5 | I know what you did last summary table {diversity table} | 41 |
| 5.1 | poppr | 41 |

| | | |
|----------|---------------------------------|-----------|
| 6 | Appendix | 45 |
| 6.1 | Algorithmic Details | 45 |
| 6.1.1 | I_A and \bar{r}_d | 45 |
| 6.1.2 | Bruvo's distance | 46 |
| 6.2 | Function calls | 47 |

1 Introduction

1.1 Purpose

Poppr is an R package with convenient functions for analysis of genetic data with mixed modes of reproduction including sexual and clonal reproduction. While there are many R packages in CRAN and other repositories with tools for population genetic analyses, few are appropriate for populations with mixed modes of reproduction. There are several stand alone programs that can handle these types of data sets, but they are often platform specific and often only accept specific data types. Furthermore, a typical analysis often involves switching between many programs, and converting data to each specific format.

Poppr is designed to make analysis of populations with mixed reproductive modes more streamlined and user friendly so that the researcher using it can focus on data analysis and interpretation. *Poppr* allows analysis of haploid and diploid dominant/co-dominant marker data including microsatellites, Single Nucleotide Polymorphisms (SNP), and Amplified Fragment Length Polymorphisms (AFLP). To avoid creating yet another file format that is specific to a program, *poppr* was created on the backbone of the popular R package *adegenet* and can take all the file formats that *adegenet* can take (Genpop, Gentix, Fstat, and Structure) and newly introduces compatibility with GenALEX formatted files (exported to CSV). This means that anything you can analyze in *adegenet* can be further analyzed with *poppr*.

The real power of *poppr* is in the data manipulation and analytic tools. *Poppr* has the ability to define multiple population hierarchies, clone-censor, and subset data sets. With *poppr* you can also quickly calculate Bruvo's distance, the index of association, and easily determine which multilocus genotypes are shared across populations.

1.2 Installation

This manual assumes that you have already installed R. If you do not, please refer to The CRAN home page at <http://cran.r-project.org/>. The author also recommends utilizing an R gui such as Rstudio (<http://www.rstudio.com/>) for a better R experience. To install *poppr* from CRAN is as simple as selecting "Package Installer" from the menu "Packages & Data" in the gui or by typing in your command line:

```
> install.packages("poppr", dependencies=TRUE)
```

If everything is working perfectly, all the dependencies (*adegenet*, *pegas*, *vegan*, *ggplot2*, *phangorn*, and *ape*) should be installed. In the unfortunate case this does not work, consult <http://cran.r-project.org/doc/manuals/R-admin.html#Installing-packages>. If you choose to install *poppr* from a source file, you should first make sure to install all of the dependencies with the following command:

```
> install.packages(c("adegenet", "pegas", "vegan", "ggplot2", "phangorn", "ape"), dependencies=TRUE)
```

After that, you can install the package with:

```
> install.packages("/path/to/poppr.tar.gz", type="source", repos=NULL)
```

1.3 Quick start

The author assumes that if you have reached this point in the manual, then you have successfully installed R and *poppr*. Before proceeding, you should be aware that R is case sensitive. This means that the words "Case" and "case" are different from R's perspective. You should also know where your R package Library is located.

WHAT OR WHERE IS MY R PACKAGE LIBRARY?

R is as powerful as it is through a community of people who submit extra code called “Packages” to help it do specific things. These packages live in a certain place on your computer called an R library. You can find out where this library is by typing `.libPaths()`

Importing a file into R involves you knowing the path to your file and then typing that into R’s console. `getfile()` will help provide a point and click interface for selecting a file. There are two steps: Before you do anything, you’ll want to tell your computer to search R’s library to find the *poppr* and load the package:


```
> library(poppr)
```

After that, you can use `getfile()`

```
> x <- getfile()
```

At this point, a pop up window will appear like this¹:

Figure 1: A popup window as it appears in OSX (Mountain Lion).

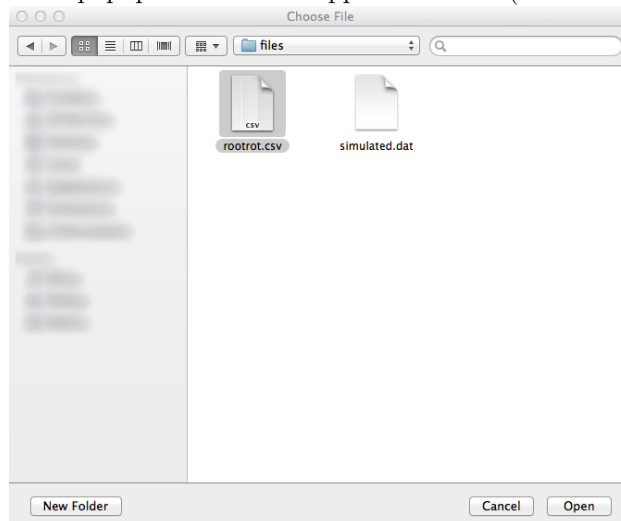

HEY! MY WINDOW DOESN'T LOOK LIKE THAT!

Now, this window will not match up to your window on your computer because you will probably not be in the right directory. Remember the first path in `.libPaths()`? Move to a folder called **poppr** in that path. In that folder, you will find another folder called **files**. Move there and your window will match the one displayed.

¹This window sometimes appears behind your current session of R, depending on the GUI and you will have to toggle to this window

We can navigate throughout your entire computer through this little window and tell R where to go. The example I'm using goes to your R library directory. If you don't know where that is, you can find it by typing `.libPaths()` into the R command line. Once we select a file, the file name and its path will be stored in the variable, `x`. We can confirm what we selected by simply typing `x` into R's command line.

```
> x
```

```
$files
[1] "rootrot.csv"

$path
[1] "/path/to/R/poppr/files"
```

Here we can see that `x` is a list with two entries: `$files` giving you the files you selected and `$path` giving you the path to those files.

NOT SURE WHAT I MEAN BY PATH OR WORKING DIRECTORY?

For anyone who has never used a command line, this is a new concept. You can think of the path as an address. So instead of `"/path/to/R"`, you could have `"/USA/Oregon/Corvallis"`. Or on your computer, it could be `"C:/users/poppr-user/R/win-library/2.15"` on Windows (where "poppr-user" is your username) or `"/Library/Frameworks/R.framework/Versions/2.15/Resources/library"` on OSX. Each slash represents a folder that you would click through when you are using the mouse.

A working directory is simply the folder that R is working in. It is where you can access and write files. When you tell R to read a file, it will only look for that file in your working directory. Note that you will not endanger your files by reading them into R. R works by making a copy of the file into memory. This means that you can manipulate the data in any way that you want without ever losing the content.

To find out your current working directory, type `getwd()` into the R console. Usually, you will start off a session in your "home" directory, which will look like this: `"~/."`. The command `setwd()` will change your working directory to any place of your choice on your computer as indicated by the path that you provide. For more information, see Quick R at <http://www.statmethods.net>.

Now we can set our working directory. That is, we can tell R to go to the folder that contains all of our data with the `setwd` command.

```
> setwd(x$path)
```

We can now use `x$files` to access the file. The `poppr()` function provides a quick and convenient first analysis of your data directly from the file on the your disk (For information on importing your data into R, see the section *Get out of my dreams and into my R*).

```
> popdata <- poppr(x$files)
```

```
| Athena_1
| Athena_2
| Athena_3
| Athena_4
| Athena_5
| Athena_6
| Athena_7
| Athena_8
| Athena_9
| Athena_10
| Mt. Vernon_1
| Mt. Vernon_2
| Mt. Vernon_3
| Mt. Vernon_4
| Mt. Vernon_5
| Mt. Vernon_6
| Mt. Vernon_7
| Mt. Vernon_8
| Total
```

The output of `poppr()` was assigned to the variable `popdata`, so let's look at the data.

```
> popdata
```

| | Pop | N | MLG | eMLG | SE | H | G | Hexp | E.5 | Ia | rbarD | File |
|----|--------------|-----|-----|--------|-------|-------|--------|-------|-------|--------|-------|-------------|
| 1 | Athena_1 | 9 | 7 | 7.000 | 0.000 | 1.889 | 6.231 | 0.944 | 0.932 | 2.925 | 0.210 | rootrot.csv |
| 2 | Athena_2 | 12 | 12 | 10.000 | NaN | 2.485 | 12.000 | 1.000 | 1.000 | 4.160 | 0.128 | rootrot.csv |
| 3 | Athena_3 | 10 | 2 | 2.000 | 0.000 | 0.325 | 1.220 | 0.200 | 0.571 | 2.000 | 1.000 | rootrot.csv |
| 4 | Athena_4 | 13 | 9 | 7.154 | 0.769 | 1.946 | 5.121 | 0.872 | 0.687 | 5.495 | 0.372 | rootrot.csv |
| 5 | Athena_5 | 10 | 7 | 7.000 | 0.000 | 1.834 | 5.556 | 0.911 | 0.866 | 4.532 | 0.353 | rootrot.csv |
| 6 | Athena_6 | 5 | 5 | 5.000 | 0.000 | 1.609 | 5.000 | 1.000 | 1.000 | 2.464 | 0.190 | rootrot.csv |
| 7 | Athena_7 | 11 | 10 | 9.182 | 0.386 | 2.272 | 9.308 | 0.982 | 0.955 | 2.129 | 0.086 | rootrot.csv |
| 8 | Athena_8 | 8 | 6 | 6.000 | 0.000 | 1.667 | 4.571 | 0.893 | 0.831 | 3.857 | 0.323 | rootrot.csv |
| 9 | Athena_9 | 10 | 10 | 10.000 | 0.000 | 2.303 | 10.000 | 1.000 | 1.000 | 2.815 | 0.118 | rootrot.csv |
| 10 | Athena_10 | 9 | 8 | 8.000 | 0.000 | 2.043 | 7.364 | 0.972 | 0.948 | 2.849 | 0.137 | rootrot.csv |
| 11 | Mt. Vernon_1 | 10 | 9 | 9.000 | 0.000 | 2.164 | 8.333 | 0.978 | 0.952 | 7.132 | 0.276 | rootrot.csv |
| 12 | Mt. Vernon_2 | 6 | 6 | 6.000 | 0.000 | 1.792 | 6.000 | 1.000 | 1.000 | 20.649 | 0.492 | rootrot.csv |
| 13 | Mt. Vernon_3 | 8 | 6 | 6.000 | 0.000 | 1.667 | 4.571 | 0.893 | 0.831 | 2.117 | 0.106 | rootrot.csv |
| 14 | Mt. Vernon_4 | 12 | 8 | 6.833 | 0.665 | 1.814 | 4.500 | 0.848 | 0.681 | 3.008 | 0.255 | rootrot.csv |
| 15 | Mt. Vernon_5 | 17 | 7 | 5.541 | 0.828 | 1.758 | 5.070 | 0.853 | 0.848 | 2.677 | 0.340 | rootrot.csv |
| 16 | Mt. Vernon_6 | 12 | 11 | 9.318 | 0.466 | 2.369 | 10.286 | 0.985 | 0.958 | 19.498 | 0.467 | rootrot.csv |
| 17 | Mt. Vernon_7 | 12 | 9 | 7.818 | 0.649 | 2.095 | 7.200 | 0.939 | 0.870 | 1.208 | 0.153 | rootrot.csv |
| 18 | Mt. Vernon_8 | 13 | 9 | 7.346 | 0.764 | 2.032 | 6.259 | 0.910 | 0.794 | 1.153 | 0.169 | rootrot.csv |
| 19 | Total | 187 | 119 | 9.612 | 0.612 | 4.558 | 68.972 | 0.991 | 0.720 | 14.371 | 0.271 | rootrot.csv |

The fields you see in the output include:

- Pop - Population name (Note that “Total” also means “Pooled”).
- N - Number of individuals observed.
- MLG - Number of multilocus genotypes (MLG) observed.
- eMLG - The number of expected MLG at the smallest sample size ≥ 10 based on rarefaction. [8]
- SE - Standard error based on eMLG [7]
- H - Shannon-Wiener Index of MLG diversity. [15]
- G - Stoddart and Taylor's Index of MLG diversity. [17]
- Hexp - Nei's 1978 genotypic diversity (corrected for sample size), or Expected Heterozygosity. [11]
- E.5 - Evenness, E_5 . [14][10][4]
- Ia - The index of association, I_A . [2] [16] [1]
- rbarD - The standardized index of association, \bar{r}_d . [1]

These fields are further described in the section *I know what you did last summary table* at the end of this vignette.

1.4 Get out of my dreams and into my R {importing data into poppr}

There are several ways of reading data into R.

1.4.1 Function: getfile

`getfile` gives the user an easy way to point R to the directory in which your data is stored. It is only meant for R GUIs such as Rstudio. Using this on the command line has very little advantage over setting the working directory manually.

Default Command:

```
getfile(multi = FALSE, pattern = NULL)
```

- **multi** - This is normally set to **FALSE**, meaning that it will only grab the file you selected. If it's **TRUE**, it will grab all files within the directory, constrained only by what you type into the **pattern** field.
- **pattern** - A pattern that you want to filter the files you get. This accepts regular expressions, so you must be careful with anything that is not an alphanumeric character.

This method works for a single file, but let's say you had a lot of data sets you wanted to import. You would have to do all of these one by one, right? Not so. **getfile** has a nice little flag called **multi** telling the computer that you want to grab multiple files in the folder. You would use this with **poppr.all** to produce a summary table for all of your files²:

```
> x <- getfile(multi=TRUE)
```

A window would pop up again, and you should navigate to the same directory as you had before, and select any of the files in that directory.

```
> x
```

```
$files
[1] "rootrot.csv"    "simulated.dat"

$path
[1] "/path/to/R/poppr/files"
```

As you can see, now all of the files that existed in that directory are there! Now you can look at all those files at once!

```
> poppr.all(x$files)
```

```
| File: rootrot.csv
| Athena_1
| Athena_2
| Athena_3
| Athena_4
| Athena_5
| Athena_6
| Athena_7
| Athena_8
| Athena_9
| Athena_10
| Mt. Vernon_1
| Mt. Vernon_2
| Mt. Vernon_3
| Mt. Vernon_4
| Mt. Vernon_5
| Mt. Vernon_6
| Mt. Vernon_7
| Mt. Vernon_8
| Total
| File: simulated.dat
| Total
```

| | Pop | N | MLG | eMLG | SE | H | G | Hexp | E.5 | Ia | rbarD | File |
|----|--------------|-----|-----|--------|-------|-------|--------|-------|-------|--------|-------|---------------|
| 1 | Athena_1 | 9 | 7 | 7.000 | 0.000 | 1.889 | 6.231 | 0.944 | 0.932 | 2.925 | 0.210 | rootrot.csv |
| 2 | Athena_2 | 12 | 12 | 10.000 | NaN | 2.485 | 12.000 | 1.000 | 1.000 | 4.160 | 0.128 | rootrot.csv |
| 3 | Athena_3 | 10 | 2 | 2.000 | 0.000 | 0.325 | 1.220 | 0.200 | 0.571 | 2.000 | 1.000 | rootrot.csv |
| 4 | Athena_4 | 13 | 9 | 7.154 | 0.769 | 1.946 | 5.121 | 0.872 | 0.687 | 5.495 | 0.372 | rootrot.csv |
| 5 | Athena_5 | 10 | 7 | 7.000 | 0.000 | 1.834 | 5.556 | 0.911 | 0.866 | 4.532 | 0.353 | rootrot.csv |
| 6 | Athena_6 | 5 | 5 | 5.000 | 0.000 | 1.609 | 5.000 | 1.000 | 1.000 | 2.464 | 0.190 | rootrot.csv |
| 7 | Athena_7 | 11 | 10 | 9.182 | 0.386 | 2.272 | 9.308 | 0.982 | 0.955 | 2.129 | 0.086 | rootrot.csv |
| 8 | Athena_8 | 8 | 6 | 6.000 | 0.000 | 1.667 | 4.571 | 0.893 | 0.831 | 3.857 | 0.323 | rootrot.csv |
| 9 | Athena_9 | 10 | 10 | 10.000 | 0.000 | 2.303 | 10.000 | 1.000 | 1.000 | 2.815 | 0.118 | rootrot.csv |
| 10 | Athena_10 | 9 | 8 | 8.000 | 0.000 | 2.043 | 7.364 | 0.972 | 0.948 | 2.849 | 0.137 | rootrot.csv |
| 11 | Mt. Vernon_1 | 10 | 9 | 9.000 | 0.000 | 2.164 | 8.333 | 0.978 | 0.952 | 7.132 | 0.276 | rootrot.csv |
| 12 | Mt. Vernon_2 | 6 | 6 | 6.000 | 0.000 | 1.792 | 6.000 | 1.000 | 1.000 | 20.649 | 0.492 | rootrot.csv |
| 13 | Mt. Vernon_3 | 8 | 6 | 6.000 | 0.000 | 1.667 | 4.571 | 0.893 | 0.831 | 2.117 | 0.106 | rootrot.csv |
| 14 | Mt. Vernon_4 | 12 | 8 | 6.833 | 0.665 | 1.814 | 4.500 | 0.848 | 0.681 | 3.008 | 0.255 | rootrot.csv |
| 15 | Mt. Vernon_5 | 17 | 7 | 5.541 | 0.828 | 1.758 | 5.070 | 0.853 | 0.848 | 2.677 | 0.340 | rootrot.csv |
| 16 | Mt. Vernon_6 | 12 | 11 | 9.318 | 0.466 | 2.369 | 10.286 | 0.985 | 0.958 | 19.498 | 0.467 | rootrot.csv |
| 17 | Mt. Vernon_7 | 12 | 9 | 7.818 | 0.649 | 2.095 | 7.200 | 0.939 | 0.870 | 1.208 | 0.153 | rootrot.csv |
| 18 | Mt. Vernon_8 | 13 | 9 | 7.346 | 0.764 | 2.032 | 6.259 | 0.910 | 0.794 | 1.153 | 0.169 | rootrot.csv |
| 19 | Total | 187 | 119 | 9.612 | 0.612 | 4.558 | 68.972 | 0.991 | 0.720 | 14.371 | 0.271 | rootrot.csv |
| 20 | Total | 100 | 6 | 6.000 | 0.000 | 1.235 | 2.790 | 0.648 | 0.735 | 0.050 | 0.061 | simulated.dat |

²These files do not need to be similar in any way to do this analysis

You've seen examples of how to use `getfile` to extract a single file and all the files in a directory, but what if you wanted many files, but only wanted ones that were of a certain type or had a certain name? This is what you would use the `pattern` argument for. A perfect use would be the example data contained in the *adeget* package. Let's take a look at the names of these files.

For the rest of this section, remember that every time you invoke `getfile()`, a window will pop up and you should select a file before hitting enter.

```
> getfile(multi=TRUE)
```

Navigate to the *adeget* folder in your R library.

```
$files
[1] "AFLP.txt"          "exampleSnpDat.snp" "mondata1.rda"      "mondata2.rda"
[5] "nancycats.dat"     "nancycats.gen"     "nancycats.gtx"     "nancycats.str"
[9] "pdH1N1-HA.fasta"  "pdH1N1-NA.fasta"  "pdH1N1-data.csv"  "usflu.fasta"

$path
[1] "/path/to/R/adeget/files"
```

We can see that we have a mix of files with different formats. If we tried to run all of these files using `poppr`, we would have a problem because some of the file formats have no direct import into a `genind` object (*.fasta, or *.snp), or just simply are not supported (eg. *.rda files). We want to be able to filter these files out, and we will do so with the `pattern` argument. Let's say we only wanted the files that have the word "nancy" in them.

```
> getfile(multi=TRUE, pattern="nancy")
```

```
$files
[1] "nancycats.dat" "nancycats.gen" "nancycats.gtx" "nancycats.str"

$path
[1] "/path/to/R/adeget/files"
```

Now, let's exclude everything but gentix files (*.gtx).

```
> getfile(multi=TRUE, pattern="gtx")
```

```
$files
[1] "nancycats.gtx"

$path
[1] "/path/to/R/adeget/files"
```

Now, let's only get FSTAT files (*.dat)

```
> getfile(multi=TRUE, pattern="dat")
```

```
$files
[1] "mondata1.rda"      "mondata2.rda"      "nancycats.dat"      "pdH1N1-data.csv"

$path
[1] "/path/to/R/adeget/files"
```

Uh-oh. We've run into a problem. Three out of our four files are not FSTAT files. Why did this happen? It happened because they happen to have "dat" within their name. This problem can be solved, by using regular expressions. If you are unfamiliar with regular expressions, you can think of them as special characters that you can use to make your search pattern more strict or more flexible. Since the topic of regular expressions can take up several lectures, I will spare you the gory details. For this situation, the only one you need to know is "\$". The dollar sign indicates the end of a word or string. If we want specific file extensions all we have to do is add this to the end of the search term like so:

```
> getfile(multi=TRUE, pattern="dat$")
```

```
$files
[1] "nancycats.dat"

$path
[1] "/path/to/R/adeget/files"
```

Now we have our FSTAT file!

1.4.2 Function: read.genalex

A very popular program for population genetics is GenAlEx (<http://biology.anu.edu.au/GenAlEx/Welcome.html>). [13] Genalex runs within the Excel environment and can be very powerful in its analyses. Poppr has added the ability to read CSV files³ produced in the GenAlEx format. It can handle data types containing regions and geographic coordinates, but currently it cannot import allelic frequency data from GenAlEx. All the user has to do is to export a single sheet of GenAlEx data from Excel into a CSV file, and the *poppr* function `read.genalex` will import it into *adegenet*'s `genind` object (more information on that below).

Default Command:

```
read.genalex(genalex, ploidy = 2, geo = FALSE, region = FALSE)
```

- **genalex** - a *.CSV file exported from GenAlEx on your disk (For example: "my_genalex_file.csv").
- **ploidy** - a number indicating the ploidy for the data set (eg 2 for diploids, 1 for haploids).
- **geo** - GenAlEx allows you to have geographic data within your file. See the GenAlEx Manual for details. If you have geographic information in your file, set this to **TRUE** and it will be included within the resulting `genind` object in the `@other` slot. (If you don't know what that is, don't worry. It will be explained later).
- **region** - To format your GenAlEx file to include regions along with your populations, see the GenAlEx manual (http://biology.anu.edu.au/GenAlEx/Download_files/GenAlEx%206.5%20Guide.pdf). If you have your file organized in this manner, select this option and the regional information will be stored in the resulting `genind` object in the `@other` slot.

IF YOU ARE UNFAMILIAR WITH EXPORTING DATA FROM EXCEL

1. Click the Microsoft Office Button in the top left corner of Excel. (Or go to the File menu if you have an older version)
2. Click Save As...
3. In the "Save as type" drop down box, select CSV (comma delimited).

Check our data:

```
> x
```

```
$files
[1] "rootrot.csv"  "simulated.dat"

$path
[1] "/path/to/R/poppr/files"
```

Now import the data into *poppr* like so:

```
> rootrot <- read.genalex(x$files[1])
```

Executing `rootrot` shows that this file is now in `genind` format (ie. the format required by *poppr* and *adegenet*).

```
> rootrot
```

³CSV files are comma separated files that are easily machine readable.

```
#####
### Genind object ###
#####
- genotypes of individuals -

S4 class:  genind
@call: read.genalex(genalex = "rootrot.csv")

@tab: 187 x 56 matrix of genotypes

@ind.names: vector of 187 individual names
@loc.names: vector of 56 locus names
@loc.nall: NULL
@loc.fac: NULL
@all.names: NULL
@ploidy: 2
@type: PA

Optionnal contents:
@pop: factor giving the population of each individual
@pop.names: factor giving the population of each individual

@other: a list containing: population_hierarchy
```

1.4.3 Other ways of importing data

Adegenet already supports the import of FSTAT, Structure, Genpop, and Gentix formatted files, so if you have those formats, you can import them using the function `import2genind`. If you don't have any of these formats handy, you can still import your data using R's `read.table` along with `df2genind` from *adegenet*. For more information, see *adegenet*'s "Getting Started" vignette.

1.4.4 Function: `genind2genalex`

Of course, being able to export data is just as useful as being able to import it, so we have this handy little function that will write a GenAlEx formatted file to wherever you desire.

WARNING: This will overwrite any file that exists with the same name.

Default Command:

```
genind2genalex(pop, filename = "genalex.csv", quiet = FALSE)
```

- `pop` - a `genind` object.
- `filename` - This is where you specify where you want the file to go. If you simply type the file name, it will deposit the file in the directory R is currently in. If you don't know what directory you are in, you can type `getwd()` to find out.
- `quiet` - If this is set to `FALSE`, a message will be printed to the screen.

Note that since missing values are coded in GenAlEx as 0 for co-dominant data and -1 for dominant data, this function attempts to do so, but occasionally will simply print "NA" in the corresponding cell. If this happens, use your favorite text editor or spreadsheet program to replace all "NA"s with the appropriate missing indicators. Make sure to save the file in the appropriate format.

```
> genind2genalex(rootrot, "~/Desktop/rootrot.csv")
```

```
Extracting the table ... Writing the table to ~/Desktop/rootrot.csv ... Done.
```

1.5 Getting to know adegenet's genind object

Since poppr was built around adegenet's framework, it is important to know how *adegenet* stores data in the `genind` object, as that is the object used by *poppr*. To create a `genind` object, *adegenet* takes a data frame of genotypes (rows) across multiple loci (columns) and converts them into a matrix of individual allelic frequencies at each locus. [9]

For example, if you had a data frame with 3 diploid individuals each with 3 loci that had 3, 4, and 5 allelic states respectively, the resulting `genind` object would contain a matrix that has 3 rows and 12 columns. Here's the example data frame:

```
  locus1 locus2 locus3
1 101/101 201/201 301/302
2 102/103 202/203 301/303
3 102/102 203/204 304/305
```

And the resulting matrix after importing to `genind`.

```
  L1.1 L1.2 L1.3 L2.1 L2.2 L2.3 L2.4 L3.1 L3.2 L3.3 L3.4 L3.5
1    1    0    0    1    0    0    0    0.5  0.5  0.0  0.0  0.0
2    0    0.5  0.5    0    0.5  0.5  0.0  0.5  0.0  0.5  0.0  0.0
3    0    1.0  0.0    0    0.0  0.5  0.5  0.0  0.0  0.0  0.5  0.5
```

The first three columns represent the alleles of locus 1, the next four represent locus 2, and the last five represent locus 3.

Do you see what I mean when I say individual allele frequencies at each locus? For a diploid individual, you only have three possible allele frequencies at each locus: 1, 0.5, or 0. Now, this is not the entire `genind` object, but it is the main feature. The object also has various elements associated with it that give you information about the population membership, the names of loci, individuals, and alleles among other things that *poppr* uses to work. [9] If you wish to know more, see the *adegenet* "Getting Started" manual.

1.5.1 The other slot

The element that you as a *poppr* user needs to be concerned with is the "other" slot. No, I'm not trying to be cryptic. If you look at an *adegenet* object, you will see that it has several "slots" (starting with "@"). [9] Let's start by recreating that data frame I showed you earlier.

```
> df <- data.frame(list(locus1=c("101/101", "102/103", "102/102"),
+                         locus2=c("201/201", "202/203", "203/204"),
+                         locus3=c("301/302", "301/303", "304/305")
+                     )
+                  )
> dfg <- df2genind(df, sep="/")
```

Next we will display the contents of the `genind` object `dfg`

```
> dfg
```

```
#####
### Genind object ###
#####
- genotypes of individuals -

S4 class:   genind
@call: df2genind(X = df, sep = "/")

@tab:  3 x 12 matrix of genotypes

@ind.names: vector of  3 individual names
@loc.names: vector of  3 locus names
@loc.nall: number of alleles per locus
@loc.fac: locus factor for the 12 columns of @tab
@all.names: list of  3 components yielding allele names for each locus
@ploidy: 2
@type: codom

Optionnal contents:
@pop: - empty -
@pop.names: - empty -

@other: - empty -
```

The matrix containing our allelic frequencies is located in the `@tab` slot. All of the slots below that have very specific properties related to the matrix in `@tab`, but the `@other` slot is more or less a grab bag, where you can place anything you want, even if it doesn't make sense!

Here, I'll give you an example of placing the `genind` object inside itself. Notice first, that the `@other` slot is empty and pay attention to the commands I use, noting that you can use either "\$" or "@" to access the slots.

```
> # First off, how big is the object?
> print(object.size(dfg), units="auto")
```

8.5 Kb

```
> dfg$other$dfg <- dfg
> dfg # we can now see that the @other slot is now filled.
```

```
#####
### Genind object ###
#####
- genotypes of individuals -

S4 class:  genind
@call: df2genind(X = df, sep = "/")

@tab:  3 x 12 matrix of genotypes

@ind.names: vector of  3 individual names
@loc.names: vector of  3 locus names
@loc.nall: number of alleles per locus
@loc.fac: locus factor for the  12 columns of @tab
@all.names: list of  3 components yielding allele names for each locus
@ploidy:  2
@type:  codom

Optionnal contents:
@pop:  - empty -
@pop.names:  - empty -

@other: a list containing: dfg
```

```
> dfg$other$dfg
```

```
#####
### Genind object ###
#####
- genotypes of individuals -

S4 class:  genind
@call: df2genind(X = df, sep = "/")

@tab:  3 x 12 matrix of genotypes

@ind.names: vector of  3 individual names
@loc.names: vector of  3 locus names
@loc.nall: number of alleles per locus
@loc.fac: locus factor for the  12 columns of @tab
@all.names: list of  3 components yielding allele names for each locus
@ploidy:  2
@type:  codom

Optionnal contents:
@pop:  - empty -
@pop.names:  - empty -

@other: - empty -
```

```
> print(object.size(dfg), units="auto") # How big is it now?
```

17.2 Kb

WHAT IS THE # SIGN FOR?

This is called a comment. If you type something in R with the “#” sign in front of it, R will not interpret it.

And we can continue to do this until we reach the limit of our available memory. Why am I showing this silliness to you? For one thing I want to show you that you can stick anything you want into that slot and the object will not be hurt in any way. It’s also important when considering how you are going to deal with the population structure of your *genind* object. For the *poppr* functions *clonecorrect* and *splitcombine* to work, a data frame of the population hierarchy must be present in the *@other* slot and it must have the same number of rows as individuals in the data set. There are several ways to go about this. If you know how to create a data frame or import data into R, the command is no more difficult than `obj$other$population_hierarchy <- df`. If you do not know how to create a data frame or import data into R, you can visit Quick R at <http://www.statmethods.net/input/importingdata.html>.

1.5.2 Setting the population factor {adegenet’s function: *pop*}

A *genind* object can contain several populations, and, if you have differing population structures, you might want to switch among them for different analyses. The tools you as the user would need, are the slot *@pop.names* and the *adegenet* function *pop()*. I’ll use the H3N2 data set packaged with *adegenet* as an example.

```
> data(H3N2)
> H3N2

#####
### Genind object ###
#####
- genotypes of individuals -

S4 class:   genind
@call:    .local(x = x, i = i, j = j, drop = drop)

@tab:    1903 x 334 matrix of genotypes

@ind.names: vector of 1903 individual names
@loc.names: vector of 125 locus names
@loc.nall: number of alleles per locus
@loc.fac: locus factor for the 334 columns of @tab
@all.names: list of 125 components yielding allele names for each locus
@ploidy: 1
@type: codom

Optionnal contents:
@pop: - empty -
@pop.names: - empty -

@other: a list containing: x xy epid

> pop(H3N2)

NULL

> H3N2$pop.names

NULL
```

Notice how both the *pop* and *pop.names* are empty. This means that the population information needs to be set. Notice, however that there are 1903 individuals in the data set and that the *@other* slot is not empty. Let’s investigate an object in this slot.

```
> head(H3N2$other$x)
```

| | accession | length | host | segment | subtype | country | year | Virus name |
|----------|-----------------------------|----------|--------|---------|---------|------------|---------------|-------------------|
| AB434107 | AB434107 | 1701 | Human | 4 (HA) | H3N2 | Japan | 2002 | Influenza A virus |
| AB434108 | AB434108 | 1701 | Human | 4 (HA) | H3N2 | Japan | 2002 | Influenza A virus |
| AB438242 | AB438242 | 827 | Human | 4 (HA) | H3N2 | Japan | 2002 | Influenza A virus |
| AB438243 | AB438243 | 827 | Human | 4 (HA) | H3N2 | Japan | 2002 | Influenza A virus |
| AB438244 | AB438244 | 827 | Human | 4 (HA) | H3N2 | Japan | 2002 | Influenza A virus |
| AB438245 | AB438245 | 827 | Human | 4 (HA) | H3N2 | Japan | 2002 | Influenza A virus |
| | Misc info | Age | Gender | | | date | usePreciseLoc | localisation |
| AB434107 | (A/Morioka/34/2002(H3N2)) | <NA> | <NA> | | | 2002/02/25 | FALSE | japan |
| AB434108 | (A/Morioka/52/2002(H3N2)) | <NA> | <NA> | | | 2002/03/01 | FALSE | japan |
| AB438242 | (A/Niigata/F11/2002(H3N2)) | <NA> | <NA> | | | 2002/01/22 | FALSE | japan |
| AB438243 | (A/Niigata/F100/2002(H3N2)) | <NA> | <NA> | | | 2002/02/18 | FALSE | japan |
| AB438244 | (A/Niigata/F175/2002(H3N2)) | <NA> | <NA> | | | 2002/02/25 | FALSE | japan |
| AB438245 | (A/Niigata/F245/2002(H3N2)) | <NA> | <NA> | | | 2002/03/04 | FALSE | japan |
| | lon | lat | month | | | | | |
| AB434107 | 137.2155 | 35.58418 | 2 | | | | | |
| AB434108 | 137.2155 | 35.58418 | 3 | | | | | |
| AB438242 | 137.2155 | 35.58418 | 1 | | | | | |
| AB438243 | 137.2155 | 35.58418 | 2 | | | | | |
| AB438244 | 137.2155 | 35.58418 | 2 | | | | | |
| AB438245 | 137.2155 | 35.58418 | 3 | | | | | |

```
> nrow(H3N2$other$x)
```

```
[1] 1903
```

WHAT IS HEAD()?

`head()` is a command that will show you only the top portion of an R object. By default it will show you the first six elements (or rows of a data frame or matrix). This is so that you can quickly check the contents of an object.

We can see that it's a data frame containing a wealth of information that we could use to subset our data. So, let's start by setting the population structure by country. How do we do that? Well, the function `pop()` will allow us to set that structure using a vector that is the same length as the number of individuals in the data set. Since the number of rows in the data frame `x` meets that criteria, we can use any item in that data frame. Let's take a look.

```
> pop(H3N2) <- H3N2$other$x$country
> head(pop(H3N2))
```

```
[1] Japan Japan Japan Japan Japan Japan
37 Levels: Japan USA Finland China South Korea Norway Taiwan France ... Algeria
```

```
> H3N2$pop.names
```

| | | | | |
|--------------------|-----------|------------------|------------------|----------------|
| [1] "Japan" | "USA" | "Finland" | "China" | "South Korea" |
| [6] "Norway" | "Taiwan" | "France" | "Latvia" | "Netherlands" |
| [11] "Bulgaria" | "Turkey" | "United Kingdom" | "Denmark" | "Austria" |
| [16] "Canada" | "Italy" | "Russia" | "Bangladesh" | "Egypt" |
| [21] "Germany" | "Romania" | "Ukraine" | "Czech Republic" | "Greece" |
| [26] "Iceland" | "Ireland" | "Sweden" | "Nepal" | "Saudi Arabia" |
| [31] "Switzerland" | "Iran" | "Mongolia" | "Spain" | "Slovenia" |
| [36] "Croatia" | "Algeria" | | | |

Notice how useful the `@other` slot can be. We now have population structure in the data set and you now know how to set the population factor. The other slot will become useful later on when we are talking about multilocus genotypes.

2 Data Manipulation

One tedious aspect of population genetic analysis is the need for repeated data manipulation. *Adegenet* has some functions for manipulating data that are limited to replacing missing data and dividing data into populations, loci, or by sample size. [9] *Poppr* includes novel functions for clone-censoring your data sets or sub-setting a `genind` object by specific populations.

2.1 Inside the golden days of missing data {replace or remove missing data}

A data set without missing data is always ideal, but often not achievable. Many functions in *adegenet* cannot handle missing data and thus the function `na.replace` exists. [9] It will replace missing data with either “0” representing a mysterious extra allele in the data set resulting in more diversity or the mean of allelic frequencies at the locus. There is no set method, however, for simply removing missing data from analyses, which is why the *poppr* function `missingno` (see below) exists. If the name makes you uneasy it’s because it should. Missing data can mean different things based on your data type. For microsatellites, missing data might represent any source of error that could cause a PCR product to not amplify in gel electrophoresis, which may or may not be biologically relevant. For a DNA alignment, missing data could mean something as simple as an insertion or deletion, which is biologically relevant. The choice to exclude or estimate data has very different implications for the type of data you have.

2.1.1 Function: `missingno`

`missingno` is a function that serves partially as a wrapper for *adegenet*’s `na.replace` to replace missing data and as a way to exclude specific areas that contain systematic missing data.

Default Command:

```
missingno(pop, missing)
```

- `pop` - a *genind* object.
- `missing` - This could be one of four options:
 - “**mean**” This replaces missing data with the mean allele frequencies in the entire data set.
 - “**zero**” or “**0**” This replaces missing data with zero, signifying a new allele.
 - “**loci**” This is to be used for a data set that has systematic problems with certain loci that contain null alleles or simply failed to amplify. This will remove loci with ANY missing data from the data set.
 - “**geno**” This is to be used for genotypes (individuals) in your data set where many null alleles are present. Any individuals with missing data will be removed.
- `quiet` - When this is set to `FALSE`, the number of missing values replaced will be printed to screen if the method is “zero” or “mean”. It will print the number of loci or individuals removed if the method is “loci” or “geno”.

Of course, seeing is believing. Let’s take a look at what this does by focusing in on areas with missing data. Note that I will be using some sub-setting functions here that are described in *adegenet*’s *Getting Started* vignette. First, let’s take a look at what the missing data in R looks like as well as how many loci and individuals the data set *nancycats* contains. We need to first tell R to look in its library for the package *poppr*.

```
> library(poppr)
```

Next, we’ll initialize the *adegenet* data set *nancycats* and load it into memory.

```
> data(nancycats)
```

Now, we’ll take a quick look at the *nancycats* data set using *adegenet*’s `summary()` function:

```
> summary(nancycats)
```

```

# Total number of genotypes: 237

# Population sample sizes:
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
10 22 12 23 15 11 14 10 9 11 20 14 13 17 11 12 13

# Number of alleles per locus:
L1 L2 L3 L4 L5 L6 L7 L8 L9
16 11 10 9 12 8 12 12 18

# Number of alleles per population:
01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17
36 53 50 67 48 56 42 54 43 46 70 52 44 61 42 40 35

# Percentage of missing data:
[1] 2.344116

# Observed heterozygosity:
L1 L2 L3 L4 L5 L6 L7 L8 L9
0.6682028 0.6666667 0.6793249 0.7083333 0.6329114 0.5654008 0.6497890 0.6184211 0.4514768

# Expected heterozygosity:
L1 L2 L3 L4 L5 L6 L7 L8 L9
0.8657224 0.7928751 0.7953319 0.7603095 0.8702576 0.6884669 0.8157881 0.7603493 0.6062686

```

We can see here a lot of summary statistics about nancycats. Here we can see that there are 17 populations, 237 individuals, and 9 loci. Nancycats also has a little over 2.3% missing data. Let's take a look at the names of the loci and the structure of the data. In order to save space, I will only show you the first five individuals (rows) and a portion of the alleles in the first locus (columns).

```

> nancycats$loc.names # Names of the loci

L1 L2 L3 L4 L5 L6 L7 L8 L9
"fca8" "fca23" "fca43" "fca45" "fca77" "fca78" "fca90" "fca96" "fca37"

```

```

> nancycats$tab[1:5, 8:13]

L1.08 L1.09 L1.10 L1.11 L1.12 L1.13
001 NA NA NA NA NA NA
002 NA NA NA NA NA NA
003 0.0 0.5 0 0 0 0.5
004 0.5 0.5 0 0 0 0.0
005 0.5 0.5 0 0 0 0.0

```

When looking at this data set, recall how a `genind` object is formatted. You have a matrix of 0's, 1's and 0.5's. For diploids, if you see 0.5, that means it is heterozygous at that allele, and a 1 means it's homozygous. Here we see three heterozygotes and two individuals with missing data (indicated by NA). Now, there are more places with missing data in the data set, but I'm only showing a little bit at one locus so it's easier to digest. Let's first replace it by zero and mean, respectively.

```

> nanzero <- missingno(nancycats, "zero")

```

```

Replaced 617 missing values

```

```

> nanmean <- missingno(nancycats, "mean")

```

```

Replaced 617 missing values

```

```

> nanzero$tab[1:5, 8:13]

L1.08 L1.09 L1.10 L1.11 L1.12 L1.13
001 0.0 0.0 0 0 0 0.0
002 0.0 0.0 0 0 0 0.0
003 0.0 0.5 0 0 0 0.5
004 0.5 0.5 0 0 0 0.0
005 0.5 0.5 0 0 0 0.0

```



```
> nanmean$tab[1:5, 8:13]
```

```
      L1.08    L1.09    L1.10    L1.11    L1.12    L1.13
001 0.07603687 0.2419355 0.1912442 0.06221198 0.09447005 0.1013825
002 0.07603687 0.2419355 0.1912442 0.06221198 0.09447005 0.1013825
003 0.00000000 0.5000000 0.0000000 0.00000000 0.00000000 0.5000000
004 0.50000000 0.5000000 0.0000000 0.00000000 0.00000000 0.0000000
005 0.50000000 0.5000000 0.0000000 0.00000000 0.00000000 0.0000000
```

You notice how the values of NA changed, yet the basic structure stayed the same. These are the replacement options from adegenet. Let's look at the same example with the exclusion options.

```
> nanloci <- missingno(nancycats, "loci")
```

```
Found 617 missing values.
Removing 3 loci: fca8 fca45 fca96
```

```
> nangenos <- missingno(nancycats, "geno")
```

```
Found 617 missing values.
Removing 38 genotypes
```

```
> nanloci$tab[1:5, 8:13]
```

```
      L1.08 L1.09 L1.10 L1.11 L2.01 L2.02
001      0   0.5    0     0     0     0
002      0   1.0    0     0     0     0
003      0   0.5    0     0     0     0
004      0   0.0    0     0     0     0
005      0   0.5    0     0     0     0
```

Notice how we now see columns named "L2.01" and "L2.02". This is showing us another locus because we have removed the first. Recall from the summary table that the first locus had 16 alleles, and the second had 11. Now that we've removed loci containing missing data, all others have shifted over. This is why you see column 4 has "L1.11".

Let's look at the loci names and number of individuals.

```
> length(nanloci$ind.names) # Individuals
```

```
[1] 237
```

```
> nanloci$loc.names # Names of the loci
```

```
      L1      L2      L3      L4      L5      L6
"fca23" "fca43" "fca77" "fca78" "fca90" "fca37"
```

You can see that the number of individuals stayed the same but the loci "fca8", "fca45", and "fca96" were removed.

Let's look at what happened when we removed individuals.

```
> nangenos$tab[1:5, 8:13]
```

```
      L1.08 L1.09 L1.10 L1.11 L1.12 L1.13
001      0   0.5    0     0     0   0.5
002      0.5   0.5    0     0     0   0.0
003      0.5   0.5    0     0     0   0.0
004      0.0   0.5    0     0     0   0.5
005      0.0   1.0    0     0     0   0.0
```

```
> length(nangeno$ind.names) # Individuals
```

```
[1] 199
```

```
> nangeno$loc.names # Names of the loci
```

```
      L1      L2      L3      L4      L5      L6      L7      L8      L9
"fca8" "fca23" "fca43" "fca45" "fca77" "fca78" "fca90" "fca96" "fca37"
```

We can see here that the number of individuals decreased, yet we have the same number of loci. Notice how the frequency matrix changes in both scenarios? In the scenario with “loci”, we removed several columns of the data set, and so with our sub-setting, we see alleles from the second locus. In the scenario with “geno”, we removed several rows of the data set so we see other individuals in our sub-setting.

2.2 Can you take me hier(archy)? {population hierarchy construction}

Remember all that fuss we made about the `@other` slot above in discussing the `genind` object? The way you can achieve hierarchical analysis in *poppr* is through a data frame in that slot. Many of the file formats that *adeget* and *poppr* can import do not allow for more than two hierarchies. If you need more levels, you have a couple of choices:

1. Import them into R as a data frame with each column being a separate hierarchical element.
2. Collapse them into a single population factor so that you can trick these file formats into taking multiple population hierarchies (eg. instead of “Pop1”, “Subpop1”, “subsubpop1”, you would have “Pop1_Subpop1_subsubpop1”).

Whichever choice you make, The *poppr* function `splitcombine` can help you divide and combine those factors in any way you can think of.

2.2.1 Function: `splitcombine`

This function will allow you to combine your population hierarchies in ways meaningful to your data without needing to know R programming. It can either split a vector of combined population hierarchies or it can combine columns of a data frame containing population hierarchies.

Default Command:

```
splitcombine(pop, method = 1, dfname = "population_hierarchy", sep = "_", hier = c(1),
  setpopulation = TRUE, fixed = TRUE)
```

- `pop` - a `genind` object with a data frame in the `@other` slot.
- `method` - What do you want to do on your data frame?
 1. **split** Any populations combined using a common separator in your data frame. So, a population hierarchy of “Pop1_Subpop1_subsubpop1” would be split into a data frame containing the columns “Pop1”, “Subpop1”, “subsubpop1”. Since it will split the population factor, it needs only to be used once.
 2. **combine** If you have your population hierarchy split into a data frame, you can do the exact opposite of method 1 and combine separate elements into one.
- `dfname` - This is the name of the data frame containing your population factor. Note that you are not limited to one data frame in your `genind` object. If you do not have that data frame in the `@other` slot, a warning will be returned and nothing will happen.

- **sep** - A separation factor you want to separate your populations with. Note, that you can choose whatever you want, but be careful because some characters have special meanings (regular expressions) in R and could give you incorrect results (“_” is the suggested default).
- **hier** - This can be a vector of words or numbers referring to what you want to name your population hierarchies in method 1, or specific column names in your data frame in method 2.
- **setpopulation** - if TRUE (default), this will automatically set the population factor to either the highest population factor (with method 1, split) or the combined population hierarchy (with method 2, combine). if this is set to FALSE, the population factor will not be set.
- **fixed** - This is an option to be passed onto the *base* function **strsplit**. For those not familiar with regular expressions, it will tell R whether or not the character in **split** should be treated as a special character or not. If you don’t know regular expressions, don’t touch it.

Let’s give an example using AFLP data of different populations of *A. euteiches* collected in Washington and Oregon. [5]

```
> Aeut <- read.genalex(system.file("files/rootrot.csv", package="poppr"))
> summary(Aeut)

# Total number of genotypes: 187

# Population sample sizes:
  Athena_1  Athena_2  Athena_3  Athena_4  Athena_5  Athena_6
    9         12         10         13         10         5
  Athena_7  Athena_8  Athena_9  Athena_10 Mt. Vernon_1 Mt. Vernon_2
   11         8         10         9         10         6
Mt. Vernon_3 Mt. Vernon_4 Mt. Vernon_5 Mt. Vernon_6 Mt. Vernon_7 Mt. Vernon_8
    8         12         17         12         12         13

# Percentage of missing data:
[1] 0
```

DOES THIS SUMMARY SEEM A LITTLE LACKING?

The data that we have here is presence absence data. This means that many of the functions that *adegenet* uses to calculate heterozygosity and number of alleles are slightly useless in this regard.

Notice that we have 18 different “populations” here, but they are really a hierarchy. Let’s say we want to analyze the diversity statistics of the two overall populations. Take a look at how the combined population factor is kept in the data frame.

```
> head(Aeut$other$population_hierarchy)
```

```
      Pop
1 Athena_1
2 Athena_1
3 Athena_1
4 Athena_1
5 Athena_1
6 Athena_1
```

We’ll use **splitcombine** to split that into a population and sub-population and set the population factor to the population.

IMPORTANT POINT ABOUT SPLITCOMBINE

Ideally, method split should only be used once after you read in your data. The reason for this is that when you select this method, it will look in the first column of your data frame to choose the combined population factor to split. If you do not name your hierarchy or if you attempt to give your hierarchy too many names, it will automatically name the columns “h1”, “h2”, etc.

```
> Aeut.pop <- splitcombine(Aeut, method=1, dfname="population_hierarchy", hier=c("Pop", "Subpop"), setpopulation=TRUE)
> head(Aeut.pop$other$population_hierarchy)
```

```
Pop_Subpop Pop Subpop
1 Athena_1 Athena 1
2 Athena_1 Athena 1
3 Athena_1 Athena 1
4 Athena_1 Athena 1
5 Athena_1 Athena 1
6 Athena_1 Athena 1
```

```
> summary(Aeut.pop)
```

```
# Total number of genotypes: 187

# Population sample sizes:
  Athena Mt. Vernon
    97      90

# Percentage of missing data:
[1] 0
```

Now we can see that we have a data frame with all of our population factors separated, and we still have our original combined hierarchy, but it is now called “Pop_Subpop”. This allows you to keep track of what you named your population hierarchies. We can now run the function `poppr` to get a diversity analysis.

```
> poppr(Aeut.pop, quiet=TRUE)
```

```
Pop N MLG eMLG SE H G Hexp E.5 Ia rbarD File
1 Athena 97 70 65.981 1.246 4.063 42.193 0.986 0.721 2.906 0.072 rootrot.csv
2 Mt. Vernon 90 50 50.000 0.000 3.668 28.723 0.976 0.726 13.302 0.282 rootrot.csv
3 Total 187 119 68.453 2.989 4.558 68.972 0.991 0.720 14.371 0.271 rootrot.csv
```

It’s as simple as that. We can reverse it by simply changing the method.

THE AMAZING DISAPPEARING OPTIONS!

Notice that I’m not writing in many of the options? This is because they have defaults. Since the data frame in my `@other` slot is called “population_hierarchy”, I don’t have to specify that every time I do the function call, and that saves a lot of typing! Also, since the hierarchy has already been split into its components, I can now index the data frame by column number. So, since I want to combine the “Pop” and “Subpop” components, I will tell the function to use columns 2 through 3.

```
> Aeut.subpop <- splitcombine(Aeut.pop, method=2, hier=2:3)
> head(Aeut.subpop$other$population_hierarchy)
```

```
Pop_Subpop Pop Subpop 2_3
1 Athena_1 Athena 1 Athena_1
2 Athena_1 Athena 1 Athena_1
3 Athena_1 Athena 1 Athena_1
4 Athena_1 Athena 1 Athena_1
5 Athena_1 Athena 1 Athena_1
6 Athena_1 Athena 1 Athena_1
```

```
> summary(Aeut.subpop)
```

```
# Total number of genotypes: 187

# Population sample sizes:
  Athena_1 Athena_2 Athena_3 Athena_4 Athena_5 Athena_6
    9      12      10      13      10      5
  Athena_7 Athena_8 Athena_9 Athena_10 Mt. Vernon_1 Mt. Vernon_2
  11      8      10      9      10      6
Mt. Vernon_3 Mt. Vernon_4 Mt. Vernon_5 Mt. Vernon_6 Mt. Vernon_7 Mt. Vernon_8
  8      12      17      12      12      13

# Percentage of missing data:
[1] 0
```

Let's imagine for a second that these "hierarchies" are not actually hierarchical, but rather they represent independent observations (For example: the "Subpop" factor could represent months of the year). In this case, we would want to only analyze the "Subpop" factor. We can do this by using `splitcombine` with only one hierarchical level.

```
> Aeut.subpop <- splitcombine(Aeut.pop, method=2, hier="Subpop")
> summary(Aeut.subpop)

# Total number of genotypes: 187

# Population sample sizes:
 1  2  3  4  5  6  7  8  9 10
19 18 18 25 27 17 23 21 10  9

# Percentage of missing data:
[1] 0

> poppr(Aeut.subpop)

| 1
| 2
| 3
| 4
| 5
| 6
| 7
| 8
| 9
| 10
| Total
| Pop  N  MLG  eMLG  SE  H  G  Hexp  E.5  Ia  rbarD  File
1  1  19  16  9.211 0.701 2.726 14.440 0.982 0.942 14.229 0.313 rootrot.csv
2  2  18  18 10.000 0.000 2.890 18.000 1.000 1.000  9.143 0.194 rootrot.csv
3  3  18   8  5.265 1.009 1.609  3.375 0.745 0.594 22.843 0.573 rootrot.csv
4  4  25  17  7.887 1.124 2.575  9.615 0.933 0.710 18.488 0.415 rootrot.csv
5  5  27  14  7.511 1.057 2.446  9.720 0.932 0.828 23.002 0.520 rootrot.csv
6  6  17  15  9.338 0.633 2.670 13.762 0.985 0.949 17.778 0.410 rootrot.csv
7  7  23  19  9.178 0.764 2.872 16.030 0.980 0.902 19.162 0.405 rootrot.csv
8  8  21  15  8.273 0.981 2.558 10.756 0.952 0.820 24.313 0.543 rootrot.csv
9  9  10  10 10.000 0.000 2.303 10.000 1.000 1.000  2.815 0.118 rootrot.csv
10 10  9  8  8.000 0.000 2.043  7.364 0.972 0.948  2.849 0.137 rootrot.csv
11 Total 187 119  9.612 0.612 4.558 68.972 0.991 0.720 14.371 0.271 rootrot.csv
```

Having these hierarchies in your data set is important when it comes to clone-censoring your data set (see section 2.4 *Attack of the Clone Correction*).

2.3 Divide (populations) and conquer (your analysis) {extract populations}

As I've mentioned before, *adegenet* has many ways of sub-setting the data, but you cannot easily subset a `genind` object by population in an efficient way. *Poppr* allows sub-setting a population from a `genind` object with one command.

2.3.1 Function: popsub

The command `popsub` is powerful in that it allows you to choose exactly what populations you choose to include or exclude from your analyses. As with many R functions, you can easily use this within a function to avoid creating a new variable to keep track of.

Default Command:

```
popsub(pop, sublist = "ALL", blacklist = NULL, mat = NULL)
```

- `pop` - a `genind` object.
- `sublist` - The vector of populations or integers representing the populations in your data set you wish to retain. For example: `sublist = c("pop_z", "pop_y")` or `sublist = 1:2`.

- **blacklist** - The vector of populations or integers representing the populations in your data set you wish to exclude. This can take the same type of arguments as **sublist**, and can be used in conjunction with **sublist** for when you want a range of populations, but know that there is one in there that you do not want to analyze. For example: **sublist = 1:15**, **blacklist = "pop_x"**. One very useful thing about the blacklist is that it allows the user to be extremely paranoid about the data. You can set the blacklist to contain populations that are not even in your data set and it will still work!
- **mat** - (see section 3, *Multilocus Genotype Analysis* for more information) This is where you would put a matrix that's produced by **mlg.table** to be subsetted instead of the **genind** object. If you do this, the matrix will return with only the rows equal to your populations and only the multilocus genotypes (columns) pertaining to those populations.

To demonstrate this tool, let's revisit the H3N2 data set. Let's say we wanted to analyze only the data in North America. To make sure we are all on the same page, we will reset the population factor to "country". Remember that this is located in a data frame in the **@other** slot called "x".

```
> data(H3N2)
> pop(H3N2) <- H3N2$other$x$country
> H3N2$pop.names # Only two countries from North America.
```

| | | | | |
|--------------------|-----------|------------------|------------------|----------------|
| [1] "Japan" | "USA" | "Finland" | "China" | "South Korea" |
| [6] "Norway" | "Taiwan" | "France" | "Latvia" | "Netherlands" |
| [11] "Bulgaria" | "Turkey" | "United Kingdom" | "Denmark" | "Austria" |
| [16] "Canada" | "Italy" | "Russia" | "Bangladesh" | "Egypt" |
| [21] "Germany" | "Romania" | "Ukraine" | "Czech Republic" | "Greece" |
| [26] "Iceland" | "Ireland" | "Sweden" | "Nepal" | "Saudi Arabia" |
| [31] "Switzerland" | "Iran" | "Mongolia" | "Spain" | "Slovenia" |
| [36] "Croatia" | "Algeria" | | | |

```
> H.na <- popsub(H3N2, sublist=c("USA", "Canada"))
> H.na$pop.names
```

| | P1 | P2 |
|-------|----------|----|
| "USA" | "Canada" | |

Since this is a larger data set, running the **summary** function might take a few seconds longer than we want it to. If we want to see the population size, we can use the *adegenet* function **nInd()**:

```
> nInd(H.na)
```

```
[1] 665
```

```
> nInd(H3N2)
```

```
[1] 1903
```

You can see that the population factors are correct and that the size of the data set is considerably smaller. Let's see the data set without the North American countries.

```
> H.minus.na <- popsub(H3N2, blacklist=c("USA", "Canada"))
> H.minus.na$pop.names
```

| | P01 | P02 | P03 | P04 | P05 |
|------------|------------------|----------------|---------------|------------|-----|
| "Japan" | "Finland" | "China" | "South Korea" | "Norway" | |
| P06 | P07 | P08 | P09 | P10 | |
| "Taiwan" | "France" | "Latvia" | "Netherlands" | "Bulgaria" | |
| P11 | P12 | P13 | P14 | P15 | |
| "Turkey" | "United Kingdom" | "Denmark" | "Austria" | "Italy" | |
| P16 | P17 | P18 | P19 | P20 | |
| "Russia" | "Bangladesh" | "Egypt" | "Germany" | "Romania" | |
| P21 | P22 | P23 | P24 | P25 | |
| "Ukraine" | "Czech Republic" | "Greece" | "Iceland" | "Ireland" | |
| P26 | P27 | P28 | P29 | P30 | |
| "Sweden" | "Nepal" | "Saudi Arabia" | "Switzerland" | "Iran" | |
| P31 | P32 | P33 | P34 | P35 | |
| "Mongolia" | "Spain" | "Slovenia" | "Croatia" | "Algeria" | |

Let's make sure that the number of individuals in both data sets added up equals the number of individuals in our original data set:

```
> (nInd(H.minus.na) + nInd(H.na)) == nInd(H3N2)
```

```
[1] TRUE
```

Now we have data sets with and without North America. Let's try something a bit more challenging. Let's say that we want The first 10 populations in alphabetical order, but we know that we still don't want any countries in North America. We can easily do this by using the *base* function `sort`.

```
> Hsort <- sort(H3N2$pop.names)[1:10]
> Hsort
```

```
[1] "Algeria"      "Austria"      "Bangladesh"   "Bulgaria"     "Canada"
[6] "China"        "Croatia"      "Czech Republic" "Denmark"      "Egypt"
```

```
> H.alph <- popsub(H3N2, sublist=Hsort, blacklist=c("USA", "Canada"))
> H.alph$pop.names
```

```
      P1      P2      P3      P4      P5
"China"  "Bulgaria"  "Denmark"  "Austria"  "Bangladesh"
      P6      P7      P8      P9
"Egypt" "Czech Republic" "Croatia" "Algeria"
```

And that, is how you subset your data with `poppr`!

2.4 Attack of the clone correction {clone-censor data sets}

Clone correction refers to the ability of keeping one observation per clone in a given population (or sub-population). Clone correcting can be hazardous if its done by hand (even on small data sets) and it requires a defined population hierarchy to get relevant results. *Poppr* has a clone correcting function that is able to correct at the lowest level of any defined population hierarchy. Note that clone correction in *poppr* is sensitive to missing data, as it treats all missing data as a single extra allele.

2.4.1 Function: `clonecorrect`

This function will return a clone corrected data set corrected for the lowest population level. Population levels are specified with the `hier` flag. You can choose to combine the population hierarchy to analyze at the lowest population level by choosing `combine = TRUE`.

Default Command:

```
clonecorrect(pop, hier=c(1), dfname="population_hierarchy", combine=FALSE)
```

- **pop** - a `genind` object that has a population hierarchy data frame in the `@other` slot. Note, the `genind` object does not necessarily require a population factor to begin with.
- **hier** - This can be a vector of words or numbers referring to specific column names in your data frame in the `@other` slot.
- **dfname** - The name of a data frame you have in the `@other` slot with the population factors.
- **combine** - Do you want to combine the population hierarchy? If it's set to `FALSE`, you will be returned a `genind` object with the top most hierarchical level as a population factor.

Let's look at ways to clone-correct our data. We'll look at our *A. euteichies* data since that data set is known to include clonal populations. [5]

```
> data(Aeut)
> A.cc <- clonecorrect(Aeut, hier=c("Pop", "Subpop"), dfname="population_hierarchy", combine=FALSE)
> poppr(A.cc, quiet=TRUE)
```

| | Pop | N | MLG | eMLG | SE | H | G | Hexp | E.5 | Ia | rbarD | File |
|---|------------|-----|-----|--------|-------|-------|--------|-------|-------|--------|-------|-------------|
| 1 | Athena | 76 | 70 | 60.621 | 1.017 | 4.221 | 65.636 | 0.998 | 0.963 | 2.535 | 0.062 | rootrot.csv |
| 2 | Mt. Vernon | 65 | 50 | 50.000 | 0.000 | 3.796 | 36.739 | 0.988 | 0.821 | 14.310 | 0.298 | rootrot.csv |
| 3 | Total | 141 | 119 | 59.629 | 1.854 | 4.705 | 96.980 | 0.997 | 0.876 | 13.802 | 0.260 | rootrot.csv |

Now let's compare the clone corrected analysis to the uncorrected data set:

```
> poppr(Aeut, quiet=TRUE)
```

| | Pop | N | MLG | eMLG | SE | H | G | Hexp | E.5 | Ia | rbarD | File |
|---|------------|-----|-----|--------|-------|-------|--------|-------|-------|--------|-------|-------------|
| 1 | Athena | 97 | 70 | 65.981 | 1.246 | 4.063 | 42.193 | 0.986 | 0.721 | 2.906 | 0.072 | rootrot.csv |
| 2 | Mt. Vernon | 90 | 50 | 50.000 | 0.000 | 3.668 | 28.723 | 0.976 | 0.726 | 13.302 | 0.282 | rootrot.csv |
| 3 | Total | 187 | 119 | 68.453 | 2.989 | 4.558 | 68.972 | 0.991 | 0.720 | 14.371 | 0.271 | rootrot.csv |

As you can see from the summary tables, everything all sub-populations have been clone censored to the sub population level with respect to the population hierarchy. Notice how the observed number of individuals (N) decreases in the clone corrected data set.

2.5 Every day I'm shuffling (data sets) {permutations and bootstrap resampling}

A common null hypothesis for populations with mixed reproductive modes is panmixia, or to put it simply: lots of sex. A handy way to test for that is permutation analysis to assess random linkage among loci whereupon you randomly shuffle your data. *Poppr* uses randomly shuffled data sets in order to calculate P-values for the index of association (I_A and \bar{r}_d) [1]. Since there might be other tests where a permutation analysis would be pertinent, a shuffler for *genind* objects was created with four shuffling schemes: two schemes shuffling without replacement and two shuffling with replacement. Details below.

2.5.1 Function: shufflepop

Default Command:

```
shufflepop(pop, method = 1)
```

- **pop** - a *genind* object.
- **method** - a number indicating the method of sampling you wish to use. The following methods are available for use:

1. **Multilocus permutation** This is called Multilocus permutation because it does the same thing as the permutation analysis in the program *multilocus* by Paul Agapow and Austin Burt. [1] This will shuffle the genotypes at each locus. For example, a single diploid locus with four alleles (1, 2, 3, 4) with the frequencies of 0.1, 0.2, 0.3, and 0.4, respectively:

| | [,1] | [,2] |
|------|------|------|
| [1,] | 4 | 4 |
| [2,] | 4 | 1 |
| [3,] | 4 | 3 |
| [4,] | 2 | 2 |
| [5,] | 3 | 3 |

might become:

| | [,1] | [,2] |
|------|------|------|
| [1,] | 3 | 3 |
| [2,] | 4 | 1 |
| [3,] | 2 | 2 |
| [4,] | 4 | 4 |
| [5,] | 4 | 3 |

Note that you have the same genotypes after shuffling, so at each locus, you will maintain the same allelic frequencies and heterozygosity. So, in this sample, you will only see a homozygote with allele 2. This also ensures that the P-values associated with I_A and \bar{r}_d are exactly the same (for an explanation, see the end of section 4.1.1 of this manual). Unfortunately, if you are trying to simulate a sexual population, this does not make much biological sense as it assumes that alleles are not independently assorting within individuals.

2. **Permute Alleles** This is a sampling scheme that will permute alleles within the locus. So, using our example above, our resampling might become:

```

      [,1] [,2]
[1,]    3    2
[2,]    2    4
[3,]    1    3
[4,]    4    3
[5,]    4    4

```

As you can see, The heterozygosity has changed, yet the allelic frequencies remain the same. Overall this would show you, for example, what would happen if the sample you had underwent panmixis within this sample itself.

3. **Parametric Bootstrap** The previous two schemes reshuffled the observed sample, but the parametric bootstrap uses the allelic frequencies as estimates of what the true allelic frequencies are and uses those as probabilities for each allele when resampling the data with replacement. Here are two samples to show you what I mean.

First Sample

```

      [,1] [,2]
[1,]    1    3
[2,]    3    3
[3,]    3    2
[4,]    4    4
[5,]    4    2

```

Second Sample

```

      [,1] [,2]
[1,]    3    4
[2,]    2    3
[3,]    4    2
[4,]    4    4
[5,]    4    2

```

Notice how the heterozygosity has changed along with the allelic frequencies. The frequencies for alleles 3 and 4 have switched in the first data set, and we've lost allele 1 in the second data set purely by chance! This type of sampling scheme attempts to show you what the true population would look like if it were panmictic and your original sample gave you a basis for estimating expected allele frequencies. Since estimates are made from the observed allele frequencies, small samples will produce skewed results.

4. **Non-Parametric Bootstrap** The final method is sampling with replacement, but with no assumption about the distribution of the alleles.

```

      [,1] [,2]
[1,]    1    3
[2,]    3    3
[3,]    3    1
[4,]    2    2
[5,]    3    1

```

Again, heterozygosity and allele frequencies are not maintained, but now all of the alleles have a 1 in 4 chance of being chosen.

These shuffling schemes have been implemented for the index of association, but there may be other summary statistics you can use `shufflepop` for. All you have to do is use the function `replicate`. Let's use I_A as an example:

```

> data(nancycats)
> nan1 <- popsub(nancycats, 1)
> ia(nan1)

```

```
Ia      rbarD
0.16564272 0.02105965
```

```
> replicate(10, ia(shufflepop(nan1, method = 3), quiet=TRUE))
```

```
      [,1]      [,2]      [,3]      [,4]      [,5]      [,6]      [,7]
Ia   -0.29112163 -0.053843659 -0.17996769 0.14010641 0.30063966 0.21221103 -0.22694841
rbarD -0.03681503 -0.006945724 -0.02273945 0.01789136 0.03811873 0.02683328 -0.02906914
      [,8]      [,9]      [,10]
Ia    0.40814607 -0.24815362 -0.40796307
rbarD 0.05292946 -0.03176451 -0.05222284
```

You could use this method to replicate the resampling 999 times and then create a histogram to visualize a distribution of what would happen under different assumptions of panmixia.

3 Multilocus Genotype Analysis

In populations with mixed sexual and clonal reproduction, it is not uncommon to have multiple samples from the same population have the same genotype across multiple loci (multilocus genotype, MLG). Here, we introduce tools for tracking MLGs within and across populations in **genind** objects from the *adegenet* package. We will be using SNP data from isolates of the H3N2 virus from 2002 to 2006.

3.1 Just a peek {How many multilocus genotypes are in our data set?}

First, let's take a quick look at how many Multilocus Genotypes are present within the H3N2 data set using the **mlg** function. This will tell us if any MLG analysis is needed.

3.1.1 Function: mlg

The function **mlg** allows for the counting of the number of MLGs in a **genind** object. This is a very simple command for quick reference to determine if your data set needs further multilocus genotype analysis.

Default Command:

```
mlg(pop, quiet = FALSE)
```

- **pop** - a **genind** object.
- **quiet** - if TRUE, the number of individuals and multilocus genotypes will be printed to the screen, if FALSE, nothing will be printed to the screen and the number of multilocus genotypes will be reported.

```
> data(H3N2)
> mlg(H3N2, quiet=FALSE)
```

```
#####
# Number of Individuals: 1903
# Number of MLG: 752
#####
[1] 752
```

We can see that since the number of individuals exceeds the number of multilocus genotypes, this data set contains clones. Let's take a look at where those clones are with respect to populations.

3.2 Clone-ing around {MLGs across populations}

Since you have the ability to change the population structure of your data set freely, it is quite possible to see some of the same MLGs across different populations. Tracking them by hand can be a nightmare with large data sets. Luckily, **mlg.crosspop** has you covered in that regard.

3.2.1 Function: `mlg.crosspop`

Analyze the MLGs that cross populations within your data set. This has three output modes. The default one gives a list of MLGs, and for each MLG, it gives a named numeric vector indicating the abundance of that MLG in each population. Alternate outputs are described with `indexreturn` and `df`.

Default Command:

```
mlg.crosspop(pop, sublist = "ALL", blacklist = NULL, mlgsub = NULL, indexreturn = FALSE, df = FALSE, quiet = FALSE)
```

- `pop` - a `genind` object.
- `sublist` - see `mlg.table`. Analyze specified populations.
- `blacklist` - see `mlg.table`. Do not include specified populations.
- `mlgsub` - see `mlg.table`. Only analyze specified MLGs. The vector for this flag can be produced by this function as you will see later in this vignette.
- `indexreturn` - return a vector of indices of MLGs. (You can use these in the `mlgsub` flag, or you can use them to subset the columns of an MLG table).
- `df` - return a data frame containing the MLGs, the populations they cross, and the number of copies you find in each population. This is useful for making graphs in `ggplot2`.
- `quiet` - TRUE or FALSE. Should the populations be printed to screen as they are processed? (will print nothing if `indexreturn` is TRUE)

We can see what Multilocus Genotypes cross different populations and then give a vector that shows how many populations each multi-population MLG crosses.

```
> pop(H3N2) <- H3N2$other$x$country
> H.dup <- mlg.crosspop(H3N2, quiet=TRUE)
```

Here is a snippet of what the output looks like when `quiet` is `FALSE`. It will print out the MLG name, the total number of individuals that make up that MLG, and the populations where that MLG can be found.

```
MLG.3: (12 inds) USA Denmark
MLG.9: (16 inds) Japan USA Finland Denmark
MLG.31: (9 inds) Japan Canada
MLG.75: (23 inds) Japan USA Finland Norway Denmark Austria Russia Ireland
MLG.80: (2 inds) USA Denmark
MLG.86: (7 inds) Denmark Austria
MLG.95: (2 inds) USA Bangladesh
MLG.97: (8 inds) USA Austria Bangladesh Romania
MLG.104: (3 inds) USA France
MLG.110: (16 inds) Japan USA China
```

The output of this function is a list of MLGs, each containing a vector indicating the number of copies in each population. We'll count the number of populations each MLG crosses using the function `sapply` with `length`.

```
> head(H.dup)
```

```
$MLG.3
  USA Denmark
    4       8

$MLG.9
  Japan  USA Finland Denmark
    1    13       1       1

$MLG.31
  Japan Canada
    2       7
```

```

$MLG.75
Japan      USA Finland Norway Denmark Austria Russia Ireland
2          8      2      1      6      2      1      1

$MLG.80
USA Denmark
1      1

$MLG.86
Denmark Austria
3      4

```

```

> H.num <- sapply(H.dup, length) # count the number of populations each MLG crosses.
> H.num

```

```

MLG.3  MLG.9  MLG.31  MLG.75  MLG.80  MLG.86  MLG.95  MLG.97  MLG.104  MLG.110  MLG.119
2      4      2      8      2      2      2      4      2      3      2
MLG.149 MLG.158 MLG.163 MLG.205 MLG.206 MLG.207 MLG.210 MLG.213 MLG.221 MLG.224 MLG.227
2      6      2      2      3      2      2      4      2      3      3
MLG.234 MLG.241 MLG.244 MLG.246 MLG.252 MLG.253 MLG.258 MLG.274 MLG.277 MLG.283 MLG.285
6      3      2      10     2      9      2      5      3      3      2
MLG.290 MLG.291 MLG.314 MLG.315 MLG.317 MLG.321 MLG.325 MLG.326 MLG.334 MLG.344 MLG.350
3      2      2      3      3      2      2      2      2      2      2
MLG.368 MLG.370 MLG.381 MLG.401 MLG.405 MLG.417 MLG.439 MLG.453 MLG.461 MLG.471 MLG.508
3      2      3      3      3      5      2      2      2      3      3
MLG.529 MLG.530 MLG.540 MLG.548 MLG.552 MLG.556 MLG.570 MLG.578 MLG.580 MLG.582 MLG.589
5      3      3      2      2      2      2      2      2      2      2
MLG.597 MLG.605 MLG.611 MLG.615 MLG.619 MLG.620 MLG.621
2      3      2      2      2      4      2

```

3.3 Bringing something to the table {producing MLG tables and graphs}

We can also create a table of multilocus genotypes per population as well as bar graphs to give us a visual representation of the data. This is achieved through the function `mlg.table`

3.3.1 Function: `mlg.table`

Produce a matrix containing counts of MLGs (columns) per population (rows). If there is no population structure to your data set, a vector will be produced instead.

Default Command:

```

mlg.table(pop, sublist = "ALL", blacklist = NULL, mlgsub = NULL, bar = TRUE, total
= FALSE, quiet = FALSE)


```

- **pop** - a `genind` object.
- **sublist** - a vector indicating which specific populations you want to produce a table for. This can be a numeric or character vector.
- **blacklist** - a vector indicating which specific populations you do not want to include in your table. This can be a numeric or character vector, and does not necessarily have to be the same type as **sublist**. eg. `sublist=1:10`, `blacklist="USA"`.
- **mlgsub** - a vector containing the indices of MLGs you wish to subset your table with.
- **bar** - TRUE or FALSE. If TRUE, a bar plot will be printed for each population with more than one individual.
- **total** - TRUE or FALSE. Should the entire data set be included in the table? This is equivalent to evoking `colSums` on the table.
- **quiet** - TRUE or FALSE. When **bar** is TRUE, should the populations be printed to screen as they are processed?

```
> H.tab <- mlg.table(H3N2, quiet=TRUE, bar=TRUE)
> H.tab[1:10, 1:10] # Showing the first 10 columns and rows of the table.
```

| | MLG.1 | MLG.2 | MLG.3 | MLG.4 | MLG.5 | MLG.6 | MLG.7 | MLG.8 | MLG.9 | MLG.10 |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| Japan | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 2 | 1 | 0 |
| USA | 0 | 2 | 4 | 1 | 1 | 0 | 0 | 0 | 13 | 0 |
| Finland | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 |
| China | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| South Korea | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |
| Norway | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Taiwan | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| France | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Latvia | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Netherlands | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Figure 2: An example of a bar-chart produced by `mlg.table`. Note that this data set would produce several such charts.

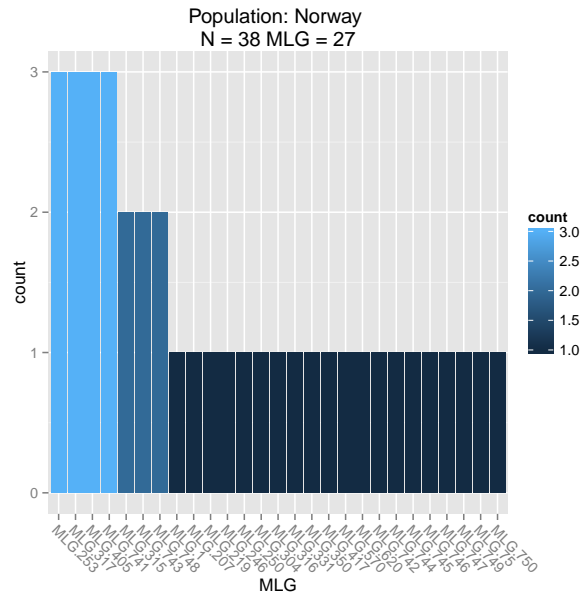

The MLG table is not restricted for use with just *Poppr*. One of the main advantages of the function `mlg.table` is that it allows easy access to diversity functions present in the package *vegan*. [12] One very simple example is to create a rarefaction curve for each population in your data set giving the number of expected MLGs for a given sample size. For more information, see `diversity` in the *vegan* package.

For the sake of a simple example, instead of drawing a curve for each of the 37 countries represented in this sample, let's change the population structure to be the different years of the epidemics.

```
> H.year <- H3N2
> pop(H.year) <- H.year$other$x$year
> summary(H.year) # Check the data to make sure it's correct.
```

```
# Total number of genotypes: 1903

# Population sample sizes:
2002 2003 2004 2005 2006
158 415 399 469 462

# Number of alleles per locus:
L001 L002 L003 L004 L005 L006 L007 L008 L009 L010 L011 L012 L013 L014 L015 L016 L017 L018
3 3 4 2 4 2 3 2 4 3 4 2 4 3 2 2 3 3
L019 L020 L021 L022 L023 L024 L025 L026 L027 L028 L029 L030 L031 L032 L033 L034 L035 L036
2 2 3 3 3 2 2 2 2 2 2 2 2 2 2 4 4 3
L037 L038 L039 L040 L041 L042 L043 L044 L045 L046 L047 L048 L049 L050 L051 L052 L053 L054
```

```

  3   3   4   2   2   2   4   3   2   3   4   2   3   2   3   2   2   2
L055 L056 L057 L058 L059 L060 L061 L062 L063 L064 L065 L066 L067 L068 L069 L070 L071 L072
  4   2   2   2   2   2   2   2   4   4   3   3   2   3   4   3   2   2
L073 L074 L075 L076 L077 L078 L079 L080 L081 L082 L083 L084 L085 L086 L087 L088 L089 L090
  3   3   3   3   2   3   2   4   2   3   2   2   3   3   3   3   2   2
L091 L092 L093 L094 L095 L096 L097 L098 L099 L100 L101 L102 L103 L104 L105 L106 L107 L108
  2   2   3   2   3   2   3   2   3   2   3   2   2   2   2   3   2   2
L109 L110 L111 L112 L113 L114 L115 L116 L117 L118 L119 L120 L121 L122 L123 L124 L125
  2   3   3   3   2   2   3   3   3   3   4   2   3   3   4   3   2

```

```

# Number of alleles per population:
  1   2   3   4   5
203 255 232 262 240

# Percentage of missing data:
[1] 2.363426


# Observed heterozygosity:
[1] 0

# Expected heterozygosity:
[1] 0

> H.year <- mlg.table(H.year, bar=FALSE)
> rarecurve(H.year, ylab="Multilocus genotypes expected", sample=min(rowSums(H.year)))

```

Figure 3: An example of a rarefaction curve produced using a MLG table.

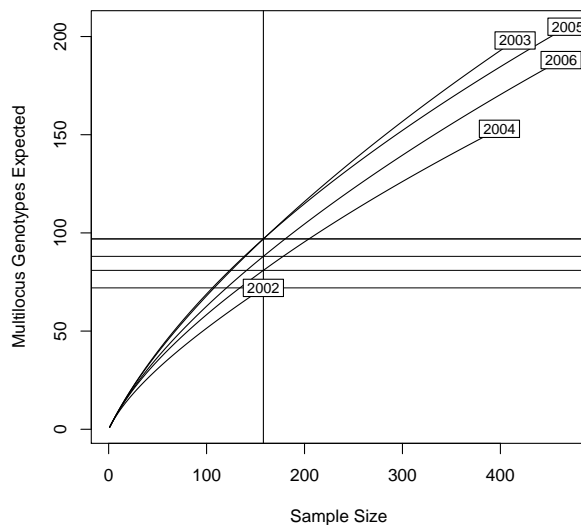

The minimum value from the *base* function `rowSums()` of the table represents the minimum common sample size of all populations. Setting the “sample” flag draws the horizontal and vertical lines you see on the graph. The intersections of these lines correspond to the numbers you would find if you ran the function `poppr` on this data set (under the column “eMLG”).

3.4 Getting into the mix {combining MLG functions}

Alone, the different functionalities are neat. Combined, we can create interesting data sets. Let’s say we wanted to know which MLGs were duplicated across the regions of the United Kingdom, Germany, Netherlands, and Norway. All we have to do is use the `sublist` flag in the function:

```

> UGNN.list <- c("United Kingdom", "Germany", "Netherlands", "Norway")
> UGNN <- mlg.crosspop(H3N2, sublist=UGNN.list, indexreturn=TRUE)

```

OK, the output tells us that there are three MLGs that are crossing between these populations, but we do not know how many are in each. We can easily find that out if we subset our original table, `H.tab`.

```
> UGNN # Note that we have three numbers here. This will index the columns for us.
```

```
MLG.315 MLG.317 MLG.620
315      317      620
```

```
> UGNN.list # And let's not forget that we have the population names.
```

```
[1] "United Kingdom" "Germany"      "Netherlands"   "Norway"
```

```
> H.tab[UGNN.list, UGNN]
```

```
      MLG.315 MLG.317 MLG.620
United Kingdom      1      0      0
Germany             0      1      1
Netherlands         0      0      0
Norway              2      3      1
```

Now we can see that Norway has a higher incidence of nearly all of these MLGs. We can go even further and subset the original data set to only give us those MLGs by utilizing the function `mlg.vector`:

3.4.1 Function: `mlg.vector`

This function is the backbone for `mlg.table` and `mlg.crosspop`, and is The function that determines what your MLGs are. This is quite useful for sub-setting the data set to only contain the MLGs of interest. The numbers in the vector correspond to the number of columns in a matrix produced by `mlg.table`. It is important to remember that this is also sensitive to missing data and will treat it as a single extra allele.

Default Command:

```
mlg.vector(pop)
```

- `pop` - a `genind` object.

```
> H.vec <- mlg.vector(H3N2)
> H.sub <- H3N2[H.vec %in% UGNN, ]
> mlg.table(H.sub, bar=FALSE)
```

```
      MLG.1 MLG.2 MLG.3
Austria      0      0      7
Germany      0      1      1
Greece       0      0      1
Norway       2      3      1
Japan        4      1      0
United Kingdom 1      0      0
```

You can also do the same thing using the `mlgsub` flag.


```
> mlg.table(H3N2, mlgsub=UGNN, bar=TRUE)
```

```
      MLG.315 MLG.317 MLG.620
Japan        4      1      0
Norway       2      3      1
United Kingdom 1      0      0
Austria      0      0      7
Germany      0      1      1
Greece       0      0      1
```

And we can see where exactly these three MLGs fall within our data set.

Now, you might notice that the MLG vector no longer matches up with our data after we subset it.

Figure 4: An example of the same bar-chart as *Figure 1*, but focusing on three MLGs.

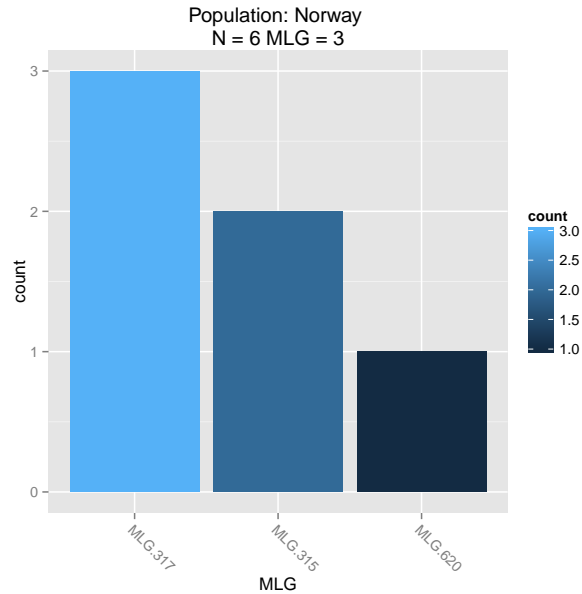

```
> H.vec[1:22]
```

```
[1] 605 605 672 675 674 673 670 671 670 678 678 678 678 582 615 580 581 570 615 582 582
[22] 592
```

```
> mlg.vector(H.sub)
```

```
[1] 3 3 3 3 3 3 3 3 3 3 2 1 1 2 2 1 2 1 1 1 1 2
```

Well, this is unfortunate because it means that we can't compare any subsetted data with non-subsetted data. Luckily, there's a little trick we can do using our old friend, the `@other` slot. If we place the MLG vector in the `@other` slot of our original data set, it will be subsetted along with the data.

```
> H3N2@other$MLG.vector <- H.vec
> H.sub <- H3N2[H.vec %in% UGNN, ]
> H.sub@other$MLG.vector
```

```
[1] 620 620 620 620 620 620 620 620 620 620 317 315 315 317 317 315 317 315 315 315 315
[22] 317
```

Magic!

So, we've gotten this far, yet we haven't actually seen what the genotypes look like! For analyses where the genotypic signature is important, this is a crucial identification step. Lucky for us, the `genind` object retains all of the genotypic information and can be accessed using the `genind2df` function. Let's take a look at the three genotypes we specified above utilizing the vector of MLGs we created above, `H.vec`.

```
> H.df <- genind2df(H3N2)
> H.df[H.vec %in% UGNN, 1:15] # Showing only 15 columns because it is a large dataset.
```



```

      pop 6 17 39 42 45 51 60 72 73 90 108 123 129 134
CY026119 Austria a a g c g c g g c g a g t g
CY026120 Austria a a g c g c g g c g a g t g
CY026121 Austria a a g c g c g g c g a g t g
CY026122 Austria a a g c g c g g c g a g t g
CY026131 Austria a a g c g c g g c g a g t g
CY026132 Austria a a g c g c g g c g a g t g
CY026135 Austria a a g c g c g g c g a g t g
EU502462 Germany a a g c g c g g c g a g t g
EU502463 Greece a a g c g c g g c g a g t g
EU502464 Norway a a g c g c g g c g a g t g
EU501513 Japan a a g c t c a g a g t g t g
AB243868 Japan a a g c t c a g a g t g t g
DQ883618 Norway a a g c t c a g a g t g t g
DQ883619 Norway a a g c t c a g a g t g t g
DQ883620 Norway a a g c t c a g a g t g t g
DQ883628 Norway a a g c t c a g a g t g t g
EU501609 Germany a a g c t c a g a g t g t g
EU501642 Japan a a g c t c a g a g t g t g
EU501643 Japan a a g c t c a g a g t g t g
EU501735 United Kingdom a a g c t c a g a g t g t g
EU501742 Japan a a g c t c a g a g t g t g
EU502513 Norway a a g c t c a g a g t g t g

```

Notice that there seems to be a clear separation between the SNPs of the first 10 isolates and the rest? This is no coincidence. Take a look at the output of our sub-setting.

```

> UGNN

MLG.315 MLG.317 MLG.620
      315      317      620

> H.vec[H.vec %in% UGNN]

[1] 620 620 620 620 620 620 620 620 620 620 317 315 315 317 317 315 317 315 315 315 315
[22] 317

```

We have the MLGs 315, 317, and 620, and the result of the sub-setting shows us that 620 occurs earlier in our data set, and that MLGs 315 and 317 are mixed in together. The reason why we do not see a mixture of three different sets of SNP calls in our little window is because `mlg.vector` creates the MLGs by first concatenating and then sorting the genotypes. This way, the closer two MLG indexes are to each other, the fewer differences they will have between one another.

3.5 Do you see what I see? {alternative data visualization}

The graphs that are output by `poppr` are simply aids for the user to make data analysis easier. We want to better visualize how these MLGs cross populations by MLG or population. We also want to see exactly what MLGs are in which populations, and how prevalent they are. As `ggplot` is based on data frames, we have to give ourselves a data frame to work with. We can do this using the `df = TRUE` flag.

```

> df <- mlg.crosspop(H3N2, df=TRUE, quiet=TRUE)
> names(df)

```

```

[1] "MLG"      "Population" "Count"

```

Now that we have our data frame, we can do a couple of things. We can first see where the most omnipresent MLG occurs. After that, we will plot the top ten MLGs using `ggplot2`.

```

> H.max <- names(sort(H.num, decreasing=TRUE)[1:10])
> # Showing the data frame by the largest MLG complex.
> df[df$MLG %in% H.max[1], ]

```

```


      MLG Population Count
76 MLG.246 Japan      3
77 MLG.246 USA       8
78 MLG.246 China     4
79 MLG.246 Norway    1
80 MLG.246 Austria   6
81 MLG.246 Russia    1
82 MLG.246 Egypt     1
83 MLG.246 Iceland   1
84 MLG.246 Nepal     15
85 MLG.246 Switzerland 1

```

And now we can visualize the largest ten MLG complexes using `ggplot2`'s `qplot` function.

Figure 5: An example of the versatility of the MLG information.

```
> df2 <- df[df$MLG %in% H.max, ]
> library(ggplot2)
> qplot(y=MLG, x=Population, data=df2, color=Count, size=Count) +
+   theme(axis.text.x = element_text(size = 10, angle = -45, hjust = 0))
```

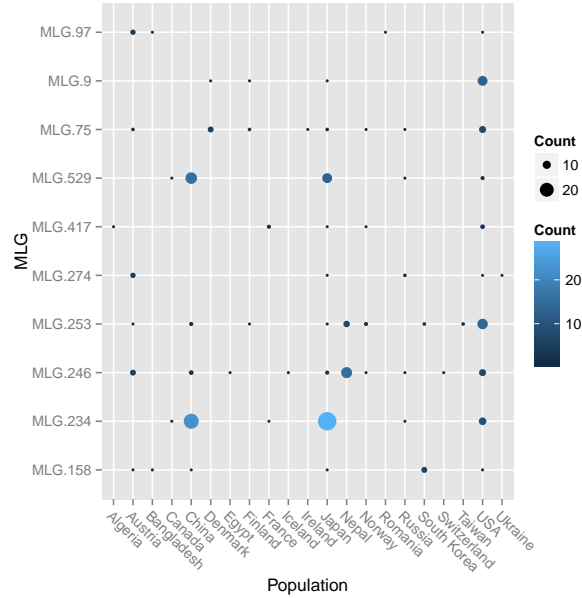

4 Index and Distance Calculations

4.1 The missing linkage disequilibrium {calculating the index of association, I_A and \bar{r}_d }

The index of association has previously been implemented in a couple of programs including *multilocus* [1] and *LIAN* [6], but these are programs that are no longer well supported and can be difficult to install. Besides implementing multilocus functions, now here you can run analysis in batches of multiple populations at once using the function `poppr`.

4.1.1 Function: `ia`

This function is a quick look at a single data set. It can do almost everything that `poppr` can do except for sorting through populations.

Default Command:

```
ia(pop, sample = 0, method = 1, quiet = "minimal", missing = "ignore", hist = TRUE)
```

- `pop` - a `genind` object.
- `sample` - You should use this flag whenever you want to reshuffle your data set. Indicate how many times you want to reshuffle your data set to obtain a P-value.
- `method` - a number from 1 to 4 indicating the sampling method:
 1. *multilocus* style permutation. [1]

2. permutation over alleles.
3. parametric bootstrap.
4. non-parametric bootstrap.

The methods are detailed in section 2.5.1 of this manual.

- **quiet** - This has three settings, **TRUE**, **FALSE**, and **"noisy"**. If set to **TRUE**, nothing will be printed to the screen as the sampling progresses. If **FALSE** and if there is sampling, a single dot for each sampling replicate will be printed to the screen to show the progress of the sampling. Choosing **"noisy"** is not recommended for the average user as it is meant for debugging. It will print the values of I_A and $\bar{\tau}_d$ to the screen as they are produced.
- **missing** - This will preprocess your missing values. It is set to ignore missing data, so that they do not contribute to the distance measure. It can also be set to **"loci"**, **"geno"**, **"zero"**, or **"mean"**. For details, see section 2.1.1 of this manual.
- **hist** - This will produce a pair of histograms for each population showing the distribution of I_A and $\bar{\tau}_d$ across the sampled data sets, and plot the observed value as a single vertical line.

Running the analysis is as simple as this:

```
> ia(nancycats)
```

| Ia | rbarD |
|------------|------------|
| 0.17207262 | 0.02178965 |


We can use `popsub` to subset for specific populations. Here, we'll also demonstrate the sampling flag and show you what the histogram looks like.

```
> set.seed(1001)
> ia(popsb(nancycats, 5), sample=999)
```

| Ia | p.Ia | rbarD | p.rD |
|--------------|-------------|--------------|-------------|
| -0.047539953 | 0.589000000 | -0.006004254 | 0.589000000 |

This analysis produced the histograms you see below. What these histograms represent are 999 resamplings of the data under the null hypothesis (H_0) of sexual reproduction. The way that H_0 is created is determined by the sampling method chosen. In this case, the method was to shuffle genotypes at each locus to simulate unlinked loci. Since the $P = 0.589$, we would fail to reject H_0 and we therefore would conclude that this population is sexually reproducing. [2] [16] [1]

Figure 6: Histograms of 999 resamplings of population 5 from the data set “nancycats”. The observed values of I_A and \bar{r}_d are represented as vertical blue lines overlaid on the distributions.

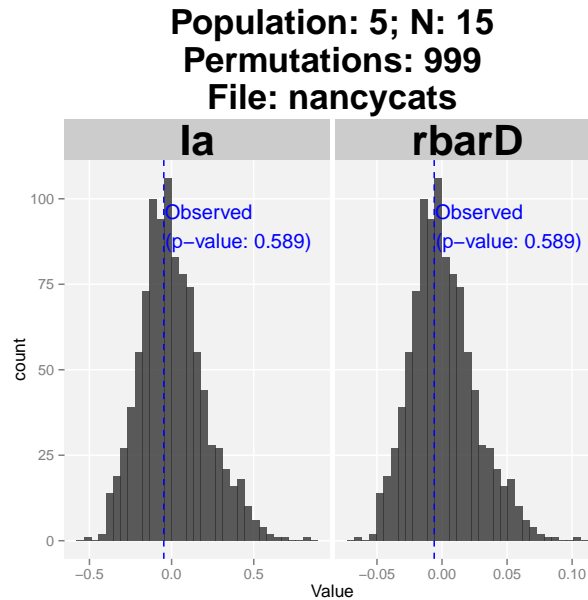

Note that both of the P-values are exactly the same. This is what you would obtain with the default sampling scheme because the variances within loci do not change. When you change the sampling scheme, however, the P-values can end up being different. That’s why there are two fields for P-values. Let’s look at what happens to the P-values once we change the sampling scheme to a parametric bootstrap.

```
> set.seed(1001)
> ia(popsb(nancycats, 5), sample=999, method=3, quiet=TRUE, hist=FALSE)
```

| Ia | p.Ia | rbarD | p.rD |
|--------------|-------------|--------------|-------------|
| -0.047539953 | 0.598000000 | -0.006004254 | 0.596000000 |

There, is, of course one little caveat that needs to be mentioned. The P-values are calculated by comparing how many permuted values are greater than or equal to the observed value. This includes the observed value (which is why setting the randomizations to 999 will give you a round P-value) which means that the lowest P-value you will ever have is $1/(n + 1)$ where n is the number of permutations you select. Take for example this population of a clonal root rot pathogen, *Aphanomyces euteiches*:

```
> data(Aeut)
> set.seed(1001)
> ia(popsb(Aeut, 1), sample=999, method=3, quiet=TRUE, hist=FALSE)
```

| Ia | p.Ia | rbarD | p.rD |
|------------|------------|------------|------------|
| 2.90602921 | 0.00100000 | 0.07237008 | 0.00100000 |

4.2 Going the distance {Bruvo’s distance}

Bruvo’s distance is a genetic distance measure for microsatellite markers that allows for differing ploidy levels. [3] As adegenet’s genind object has an all or none approach to missing data, any genotypes not exhibiting full ploidy will be treated as missing. This means that only non-special cases will be considered for the calculation and missing data will be ignored. [3] It is important to note that this is a distance between individuals, not populations, like Nei 1978. For distances between populations, see the adegenet function `dist.genpop`

4.2.1 Function: bruvo.dist

Bruvo's distance requires knowledge of the repeat lengths of each locus, so take care to read the description below.

Default Command:

```
bruvo.dist(pop, replen = c(2))
```

- **pop** - a **genind** object.
- **replen** - This is a vector of numbers indicating the repeat length for each locus in your sample. If you have two dinucleotide repeats and five tetranucleotide repeats, you would put `c(2,2,4,4,4,4,4)` in this field. If you have imported data where that represents the raw number of steps, all you would have to type is `rep(1, n)`, replacing *n* with the number of loci in your sample. It is important that you place something in this field because this function will attempt to estimate the repeat length based on the minimum difference of the alleles represented; with variability of position calls, relying on this estimation is NOT recommended.

This function will return a distance matrix (displaying the smallest population in the data set “nancycats”):


```
> dist9 <- bruvo.dist(popsb(nancycats, 9), replen=rep(1,9))  
> dist9
```

| | N104 | N105 | N106 | N107 | N108 | N109 | N111 | N112 |
|------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| N105 | 0.5778800 | | | | | | | |
| N106 | 0.4008213 | 0.4563124 | | | | | | |
| N107 | 0.2202691 | 0.5093036 | 0.1805522 | | | | | |
| N108 | 0.3270365 | 0.5533719 | 0.2352431 | 0.2178786 | | | | |
| N109 | 0.4016376 | 0.2760247 | 0.3192139 | 0.3330612 | 0.4294671 | | | |
| N111 | 0.6150004 | 0.8707648 | 0.5533278 | 0.6167331 | 0.5219014 | 0.7330560 | | |
| N112 | 0.5492079 | 0.4086363 | 0.4391785 | 0.3289388 | 0.3886142 | 0.4528936 | 0.8037448 | |
| N113 | 0.5925835 | 0.6227587 | 0.6203071 | 0.6585558 | 0.6186252 | 0.6099514 | 0.5060450 | 0.7026198 |

You can visualize this better with a simple heatmap:

Figure 7: Heatmap representation of Bruvo's distance for population 9 of the data set “nancycats”

```
> heatmap(as.matrix(dist9), symm=TRUE)
```

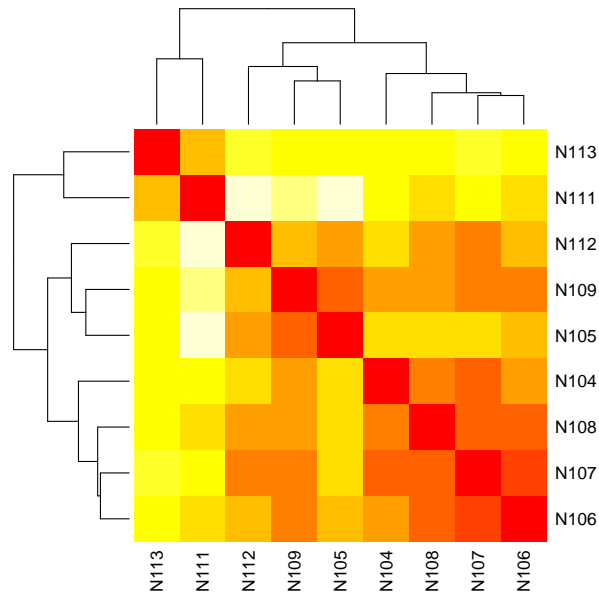

Take a look at the two individuals, N113 and N111. They seem to have large distances between everyone else and themselves. We'll take a look at those two in a little bit. The names and columns of the matrix contain the names of individuals, but not the population information. We can make a comparison of Bruvo's distance across populations easier by editing the “Labels” attribute of the distance object. Let's take a look at the labels attribute using the `attr()` command.

```
> attr(dist9, "Labels")
```

```
"N104" "N105" "N106" "N107" "N108" "N109" "N111" "N112" "N113"
```

Remember that they all came from population 9, so let's append that to each label using the `paste()` command.


```
> dist9.attr <- attr(dist9, "Labels")
> attr(dist9, "Labels") <- paste(rep("P09", 9), dist9.attr)
> dist9
```

```
      P09 N104 P09 N105 P09 N106 P09 N107 P09 N108 P09 N109 P09 N111 P09 N112
P09 N105 0.5778800
P09 N106 0.4008213 0.4563124
P09 N107 0.2202691 0.5093036 0.1805522
P09 N108 0.3270365 0.5533719 0.2352431 0.2178786
P09 N109 0.4016376 0.2760247 0.3192139 0.3330612 0.4294671
P09 N111 0.6150004 0.8707648 0.5533278 0.6167331 0.5219014 0.7330560
P09 N112 0.5492079 0.4086363 0.4391785 0.3289388 0.3886142 0.4528936 0.8037448
P09 N113 0.5925835 0.6227587 0.6203071 0.6585558 0.6186252 0.6099514 0.5060450 0.7026198
```

Now we can see that all of the labels are corresponding to population 9. Let's calculate Bruvo's distance between populations 8 and 9.

```
> dist9to8 <- bruvo.dist(popsb(nancycats, 8:9), replen=rep(1,9))
> dist9to8.attr <- attr(dist9to8, "Labels")
> nan9to8pop <- nancycats@pop[nancycats@pop %in% c("P08", "P09")]
> attr(dist9to8, "Labels") <- paste(nan9to8pop, dist9to8.attr)
> heatmap(as.matrix(dist9to8), symm=TRUE)
```

Figure 8: Heatmap representation of Bruvo's distance for populations 8 and 9 of the data set "nancycats"

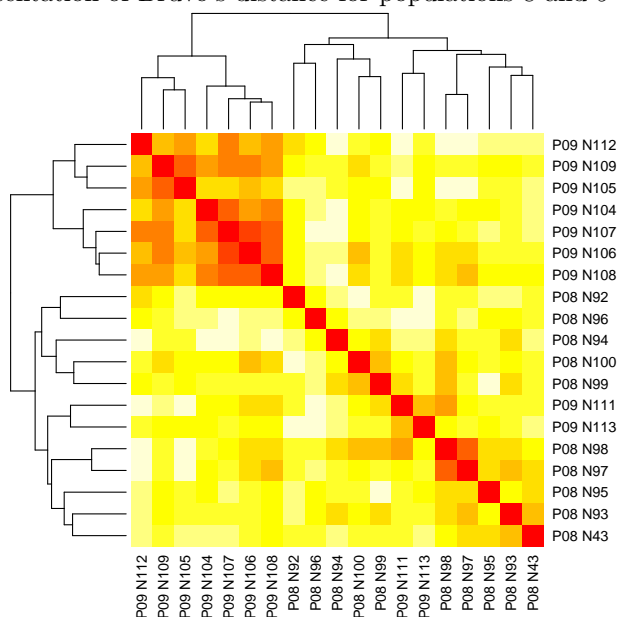

Remember N113 and N111? Take a look at where they fall on the heatmap. They don't cluster together with population 9 anymore, but somewhere in the jumble of population 8 (most likely due to the way nothing in population 8 relates to much anything else).

4.2.2 Function: `bruvo.boot`

This function provides the ability to draw a dendrogram based on Bruvo's distances including bootstrap support.

Default Command:

```
bruvo.boot(pop, replen = c(2), B = 100, tree = "nj", showtree = TRUE)
```


- `pop` - a `genind` object.
- `replen` - see `bruvo.dist`, above.
- `sample` - How many bootstraps do you want to perform?
- `tree` - Two trees are available, Neighbor-Joining "nj" or UPGMA "upgma".
- `showtree` - if `TRUE`, a tree will be plotted automatically.
- `cutoff` - This is a number between 0 and 100 indicating the cutoff value for the bootstrap node labels. If you only wanted to see the bootstrap values for nodes that were present more than 75% of the time, you would use `cutoff = 75`. If you don't put anything for this parameter, all values will be shown.

For this example, let's set the cutoff to 50%.

```
> set.seed(1001)
> nan9tree <- bruvo.boot(popsb(nancycats, 8:9), replen=rep(1,9), sample=1000, tree="upgma", cutoff=50)
```

```
|=====| 100%
```

Figure 9: UPGMA Tree of Bruvo's distance for population 9 of the data set "nancycats" with 1000 Bootstrap Replicates. Node labels represent percentage of bootstrap replicates that contained that node.

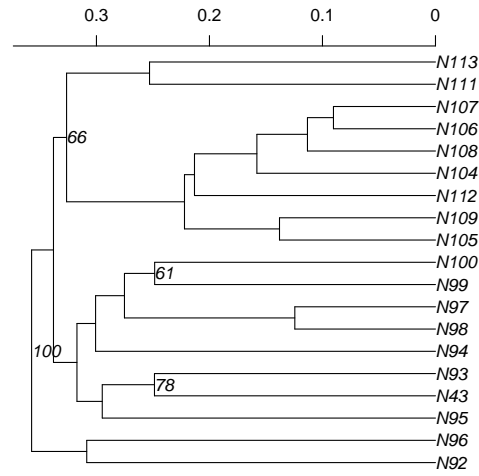

4.2.3 Function: `bruvo.msn`

This function will automatically draw a minimum spanning network of MLGs based on Bruvo's distance. It's important to note that this will recalculate Bruvo's distance each time it is run, but the amount of time it takes to run is on the order of seconds.


Default Command:

```
bruvo.msn(pop, replen = c(1), palette = topo.colors, sublist = "All", blacklist =
NULL, vertex.label = "MLG", ...)
```

- `pop` - a `genind` object.
- `replen` - see `bruvo.dist`, above.
- `palette` - this is a **function** defining a color palette to use. The default is `topo.colors`. There are different palettes, which you can search by typing `?rainbow`. If you want a custom color palette, an easy way is to use the function `colorRampPalette`.
- `sublist` - The populations you wish to analyze. This defaults to "All".
- `blacklist` - Populations you do not want to include in the graph.
- `vertex.label` - This is an option that is passed on to *igraph*'s `plot` function. *Poppr* has added two arguments specific to *poppr*. If you want to label the graph with the multilocus genotypes from the whole data set, use the argument `vertex.label = "mlg"`. If you want to display the representative individual names, you can use the argument `vertex.label = "inds"`. I say representative individual names because, only one representative from each MLG will be present in the clone corrected data set used to calculate the distance. If you wish to use another vector of names, you can choose
- `...` - This is a placeholder for any other arguments that you want to supply to *igraph*. Useful arguments are `vertex.label.cex` to adjust the size of the labels, `vertex.label.dist` to adjust the position of the labels, and `vertex.label.color` to adjust the color of the labels.

Figure 10: Minimum spanning network of Nancycat populations 8 and 9

```
> set.seed(2013)
> bruvo.msn(nancycats, replen=rep(1, 9), vertex.label="inds", sublist=8:9,
+           vertex.label.cex=0.7, vertex.label.dist=0.4, palette=heat.colors)
```

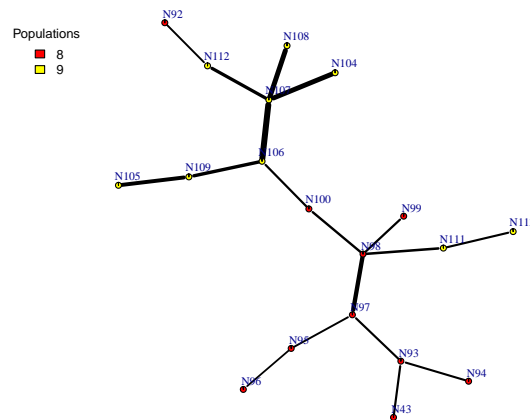

Remember the summary function that you used to get all the diversity statistics in section 1.3? In this section, we will flesh out all that you can do with this function. This was the very first function that was written for poppr to make it easy for the user to manipulate and summarize the data in one function.

This function is quite daunting with all its possibilities. You have the option to subset your data for specific populations, correct for missing data, and clone correct. With each of these possibilities, comes the need to provide all the arguments for their various functions.

```
poppr(pop, total = TRUE, sublist = c("ALL"), blacklist = c(NULL), sample = 0,
  method = 1, missing = "ignore", quiet = "minimal", clonecorrect = FALSE,
  hier = c(1), dfname = "population_hierarchy", hist = TRUE, minsamp = 10)
```

- 41

- *popsb functions*: See section 2.3
 - sublist** - A list of populations you want to include in your analysis.
 - blacklist** - A list of populations you want to exclude from your analysis.
- *shufflepop functions*: See section 2.5
 - Note that this only affects the calculation for I_A and \bar{r}_d .
 - sample** - The number of samples you desire (eg., 999)
 - method** - Which sampling method? 1: multilocus, 2: permute, 3: parametric bootstrap, 4: non-parametric bootstrap.
- **missing** - How to deal with missing data. All analyses in this function ignore missing data by default. For other options, see section 2.1.
- **quiet** - This has three settings, **TRUE**, **FALSE**, and **"noisy"**. If set to **TRUE**, nothing will be printed to the screen as the sampling progresses. If **FALSE** and if there is sampling, a single dot for each sampling replicate will be printed to the screen to show the progress of the sampling. Choosing **"noisy"** is not recommended for the average user as it is meant for debugging. It will print the values of I_A and \bar{r}_d to the screen as they are produced.
- *clonecorrect functions*: See section 2.4
 - clonecorrect** - if this is set to **TRUE**, then you will need to set the next two parameters.
 - hier** - A list of the population hierarchy, or names of columns in the data frame noted below.
 - dfname** - A data frame in the **@other** slot of the **genind** object containing all of the population factors in different columns. For an example, see sections 2.2 and 2.4.
- **hist** - if **TRUE**, a histogram of distributions of I_A and \bar{r}_d will be displayed with each population if there is sampling.
- **minsamp** - The minimum number of individuals you want to use to calculate the expected number of MLGs. The default is set to 10.

This function produces a table that contains the population name, number of individuals observed, number of MLGs observed, number of MLGs expected at the lowest common sampling size within the data set [8] [7], the Shannon-Wiener index [15], Stoddart and Taylor's index for expected MLGs [17], Nei's 1987 genotypic diversity [11], evenness [14][10][4], the index of association [2][16], the standardized index of association [1], and the file name. Most of these indices are calculated by converting the population into an MLG table with **mlg.table** (see section 3.3) and using the *vegan* package's **diversity** function (To see details, type **?vegan::diversity** into the R console).

To begin, let's revisit our example data set of *Aphanomyces euteiches*. [5]

```
> data(Aeut)
> poppr(Aeut)
```

```
| Athena
| Mt. Vernon
| Total
| Pop      N MLG   eMLG   SE    H    G   Hexp   E.5    Ia rbarD      File
1  Athena  97   70  65.981 1.246 4.063 42.193 0.986 0.721  2.906 0.072 rootrot.csv
2 Mt. Vernon 90   50  50.000 0.000 3.668 28.723 0.976 0.726 13.302 0.282 rootrot.csv
3      Total 187  119  68.453 2.989 4.558 68.972 0.991 0.720 14.371 0.271 rootrot.csv
```

OK, so we were able to get a table out of this. Now let's see what happens when we do some sampling to see if this is reproducing clonally or not (for simplicity's sake, we will stick with the default multilocus sampling method). We will turn quiet on and the histogram off to save space.

```
> poppr(Aeut, sample=999, hist=FALSE, quiet=TRUE)
```

```

      Pop      N MLG      eMLG      SE      H      G Hexp      E.5      Ia p.Ia rbarD      p.rD
1   Athena  97   70 65.981  1.246  4.063 42.193 0.986 0.721  2.906 0.001 0.072 0.001
2 Mt. Vernon  90   50 50.000  0.000  3.668 28.723 0.976 0.726 13.302 0.001 0.282 0.001
3      Total 187  119 68.453  2.989  4.558 68.972 0.991 0.720 14.371 0.001 0.271 0.001
      File
1 rootrot.csv
2 rootrot.csv
3 rootrot.csv

```

From now on, we'll set `quiet = TRUE` to save space on our vignette. Let's clone correct at different levels to see if that affects the index of association. First, we'll clone correct at the sub population level.

```
> poppr(Aeut, sample=999, clonecorrect=TRUE, hier=c("Pop","Subpop"),
+       dfname="population_hierarchy", quiet=TRUE, hist=FALSE)
```

```

      Pop      N MLG      eMLG      SE      H      G Hexp      E.5      Ia p.Ia rbarD      p.rD
1   Athena  76   70 60.621  1.017  4.221 65.636 0.998 0.963  2.535 0.001 0.062 0.001
2 Mt. Vernon  65   50 50.000  0.000  3.796 36.739 0.988 0.821 14.310 0.001 0.298 0.001
3      Total 141  119 59.629  1.854  4.705 96.980 0.997 0.876 13.802 0.001 0.260 0.001
      File
1 rootrot.csv
2 rootrot.csv
3 rootrot.csv

```

And at the population level.

```
> poppr(Aeut, sample=999, clonecorrect=TRUE, hier="Pop",
+       dfname="population_hierarchy", quiet=TRUE, hist=FALSE)
```

```

      Pop      N MLG      eMLG      SE      H      G Hexp      E.5      Ia p.Ia rbarD      p.rD
1   Athena  70   70 50.000  0.000  4.248 70.000  1 1.000  2.438 0.001 0.060 0.001
2 Mt. Vernon  50   50 50.000  0.000  3.912 50.000  1 1.000 13.856 0.001 0.285 0.001
3      Total 120  119 49.828  0.377  4.776 118.033  1 0.995 12.497 0.001 0.234 0.001
      File
1 rootrot.csv
2 rootrot.csv
3 rootrot.csv

```

Clone correction doesn't always have to involve creation of new data sets!

You might notice that the P-values for both I_A and \bar{r}_d are often equal to each other. This is due to the default sampling method.^[1] Let's take a look at examples where they are not equal.

```
> set.seed(2001)
> poppr(nancycats, sublist=5:6, total=FALSE, sample=999, method=3, quiet=TRUE, hist=FALSE)
```

```

      Pop      N MLG      eMLG      SE      H      G Hexp      E.5      Ia p.Ia rbarD      p.rD      File
1    5 15 15 11 0 2.708 15  1  1 -0.048 0.599 -0.006 0.599 truenames(nancycats)$tab
2    6 11 11 11 0 2.398 11  1  1  0.334 0.064  0.043 0.065 truenames(nancycats)$tab

```

The reason why the P-values would be different is described at the end of section 4.1.1. The differences in P-values are normally not very far off, and will always be represented in the warning messages and histograms. It's important to note this because of what can happen in extremely clonal populations. You can end up with a large enough sample size consisting of very few MLGs. Upon shuffling, you find that there are very few values of I_A and \bar{r}_d that can be obtained. Observe with this simulated data set:


```
> set.seed(2004)
> poppr(system.file("files/simulated.dat", package="poppr"), sample=999, method=1, quiet=TRUE)
```

```

      Pop      N MLG      eMLG      SE      H      G Hexp      E.5      Ia p.Ia rbarD      p.rD      File
1 Total 100   6   6 0 1.235  2.79 0.648 0.735 0.05 0.09 0.061 0.09 simulated.dat


```

Figure 11: Output of multilocus-style sampling.

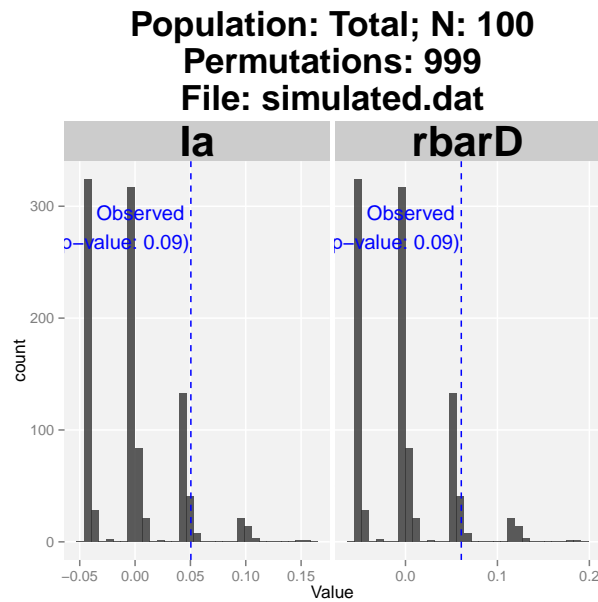

Take a look at these two histograms. The number of ways you can recombine the data with the default sampling method is very small. Other sampling methods could give a more theoretical distribution. Let's try the parametric bootstrap.

Figure 12: Output for parametric bootstrap sampling.

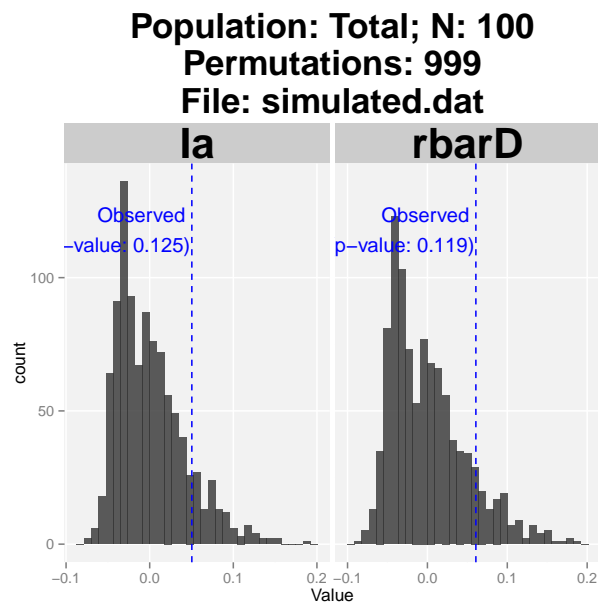

As you can see, the distribution is much closer to a distribution we would expect if this were a small sample of a larger population.

6 Appendix

6.1 Algorithmic Details

6.1.1 I_A and \bar{r}_d

The index of association was originally developed by A.D.H. Brown analyzing population structure of wheat. [2] It has been widely used as a tool to detect high levels of clonal reproduction within populations. [16] Populations whose members are undergoing sexual reproduction, whether it be selfing or out-crossing, will produce gametes via meiosis, and thus have a chance to shuffle alleles in the next generation. Populations whose members are undergoing clonal reproduction, however, generally do so via mitosis. This means that the only chance for a change in genotype is via mutation. The rate of mutation varies from species to species, but it is rarely sufficiently high to mimic a random shuffling of alleles. The index of association is a calculation based on the ratio of the variance of the raw number of differences between individuals and the sum of those variances over each locus. [16] You can also think of it as the observed variance over the expected variance. If they are the same, then the index is zero after subtracting one (from Maynard-Smith, 1993) [16]:

$$I_A = \frac{V_O}{V_E} - 1 \quad (1)$$

Since the distance is more or less a binary distance, any sort of marker can be used for this analysis. In the calculation, phase is not considered, and any difference increases the distance between two individuals. Consider the genotypes of the dummy data frame we created earlier:

```
locus1 locus2 locus3
1 101/101 201/201 301/302
2 102/103 202/203 301/303
3 102/102 203/204 304/305
```

Now, consider the first locus represented in the `genind` object:

```
L1.1 L1.2 L1.3
1    1  0.0  0.0
2    0  0.5  0.5
3    0  1.0  0.0
```

Remember that each column represents a different allele and that each entry in the table represents the fraction of the genotype made up by that allele at that locus. Notice also that the sum of the rows all equal 1. Poppr uses this to calculate distances by simply taking the sum of the absolute values of the differences between rows.

The calculation for the distance between two individuals at a single locus with a allelic states is as follows:

$$d = \sum_{i=1}^a | ind_{Ai} - ind_{Bi} | \quad (2)$$

```
> abs(dfg@tab[1, 1:3] - dfg@tab[2, 1:3])
```

```
L1.1 L1.2 L1.3
1.0  0.5  0.5
```

```
> abs(dfg@tab[1, 1:3] - dfg@tab[3, 1:3])
```

```
L1.1 L1.2 L1.3
1    1    1    0
```

```
> abs(dfg@tab[2, 1:3] - dfg@tab[3, 1:3])
```

```
L1.1 L1.2 L1.3
0.0  0.5  0.5
```

As you can see, these values of d at locus one add up to 2, 2, and 1, respectively.

To find the total number of differences between two individuals over all loci, you just take d over m loci, a value we'll call D :

$$D = \sum_{i=1}^m d_i \quad (3)$$

These values are calculated over all possible combinations of individuals in the data set, $\binom{n}{2}$ after which you end up with $\binom{n}{2} \cdot m$ values of d and $\binom{n}{2}$ values of D . Calculating the observed variances is fairly straightforward (modified from Agapow and Burt, 2001) [1]:

$$V_O = \frac{\sum_{i=1}^{\binom{n}{2}} D_i^2 - \frac{(\sum_{i=1}^{\binom{n}{2}} D_i)^2}{\binom{n}{2}}}{\binom{n}{2}} \quad (4)$$

Calculating the expected variance is the sum of each of the variances of the individual loci. The calculation at a single locus, j is the same as the previous equation, substituting values of D for d (modified from Agapow and Burt, 2001) [1]:

$$var_j = \frac{\sum_{i=1}^{\binom{n}{2}} d_i^2 - \frac{(\sum_{i=1}^{\binom{n}{2}} d_i)^2}{\binom{n}{2}}}{\binom{n}{2}} \quad (5)$$

The expected variance is then the sum of all the variances over all m loci (modified from Agapow and Burt, 2001) [1]:

$$V_E = \sum_{j=1}^m var_j \quad (6)$$

Now you can plug the sums of equations (4) and (6) into equation (1) to get the index of association. Of course, Agapow and Burt showed that this index increases steadily with the number of loci, so they came up with an approximation that is widely used, \bar{r}_d . [1] For the derivation, see the manual for *multilocus*. The equation is as follows, utilizing equations (4), (5), and (6) (modified from Agapow and Burt, 2001) [1]:

$$\bar{r}_d = \frac{V_O - V_E}{2 \sum_{j=1}^m \sum_{\substack{k=1 \\ j < k}}^m \sqrt{var_j \cdot var_k}} \quad (7)$$

6.1.2 Bruvo's distance

Bruvo's distance between two individuals works by calculating the minimum distance across all combinations of possible pairs of alleles at a single locus and then averaging that distance across all loci. [3] The distance between each pair of alleles is calculated as (Bruvo et al., 2004) [3]:

$$m_x = 2^{-|x|} \quad (8)$$

$$d_a = 1 - m_x \quad (9)$$

Where x is the number of steps between each allele. So, let's say we were comparing two haploid ($k = 1$) individuals with alleles 228 and 244 at a locus that had a tetranucleotide repeat pattern (CATG) n . The

number of steps for each of these alleles would be $228/4 = 57$ and $244/4 = 61$, respectively. The number of steps between them is then $|57 - 61| = 4$. Bruvo's distance at this locus between these two individuals is then $1 - 2^{-4} = 0.9375$.

For samples with higher ploidy (k), there would be k such distances of which we would need to take the sum. (Bruvo et al., 2004) [3]

$$s_i = \sum_{a=1}^k d_a \quad (10)$$

Unfortunately, it's not as simple as that since we do not know phase. Because of this, we need to take all possible combinations of alleles. This means that we will have k^2 values of d_a , when we only want k . How do we know which k distances we want? We will have to invoke parsimony for this and attempt to take the minimum sum of the alleles, of which there are $k!$ possibilities (Bruvo et al., 2004) [3]:

$$d_l = \frac{\left(\min_{i \dots k!} s_i \right)}{k} \quad (11)$$

Finally, after all of this, we can get the average distance over all loci (Bruvo et al., 2004).

$$D = \frac{\sum_{i=1}^l d_i}{l} \quad (12)$$

This is calculated over all possible combinations of individuals and results in a lower triangle distance matrix over all individuals.

6.2 Function calls

Here is a list of all the default function calls for *poppr*. Details can be found in the above sections.

- `getfile(multi = FALSE, pattern = NULL)`
- `read.genalex(genalex, ploidy = 2, geo = FALSE, region = FALSE)`
- `genind2genalex(pop, filename = "genalex.csv", quiet = FALSE)`
- `missingno(pop, missing, quiet=FALSE)`
- `splitcombine(pop, method = 1, dfname = "population_hierarchy", sep = "_", hier = c(1), setpopulation = TRUE, fixed = TRUE)`
- `popsub(pop, sublist = "ALL", blacklist = NULL, mat = NULL)`
- `clonecorrect(pop, hier=c(1), dfname="population_hierarchy", combine=FALSE)`
- `shufflepop(pop, method = 1)`
- `mlg(pop, quiet = FALSE)`
- `mlg.crosspop(pop, sublist = "ALL", blacklist = NULL, mlgsub = NULL, indexreturn = FALSE, df = FALSE, quiet = FALSE)`
- `mlg.table(pop, sublist = "ALL", blacklist = NULL, mlgsub = NULL, bar = TRUE, total = FALSE, quiet = FALSE)`
- `mlg.vector(pop)`

- `ia(pop, sample = 0, method = 1, quiet = "minimal", missing = "ignore", hist = TRUE)`
- `bruvo.dist(pop, replen = c(2))`
- `bruvo.boot(pop, replen = c(2), B = 100, tree = "nj", showtree = TRUE, cutoff = NULL)`
- `poppr(pop, total = TRUE, sublist = c("ALL"), blacklist = c(NULL), sample = 0, method = 1, missing = "ignore", quiet = "minimal", clonecorrect = FALSE, hier = c(1), dfname = "population_hierarchy", hist = TRUE, minsamp = 10)`

References

- [1] Paul-Michael Agapow and Austin Burt. Indices of multilocus linkage disequilibrium. *Molecular Ecology Notes*, 1(1-2):101-102, 2001.
- [2] A.H.D. Brown, M.W. Feldman, and E. Nevo. Multilocus structure of natural populations of *hordeum spontaneum*. *Genetics*, 96(2):523-536, 1980.
- [3] Ruzica Bruvo, Nicolaas K. Michiels, Thomas G. D'Souza, and Hinrich Schulenburg. A simple method for the calculation of microsatellite genotype distances irrespective of ploidy level. *Molecular Ecology*, 13(7):2101-2106, 2004.
- [4] Niklaus J. Grünwald, Stephen B. Goodwin, Michael G. Milgroom, and William E. Fry. Analysis of genotypic diversity data for populations of microorganisms. *Phytopathology*, 93(6):738-46, 2003.
- [5] N.J. Grünwald and G. Hoheisel. Hierarchical analysis of diversity, selfing, and genetic differentiation in populations of the oomycete *aphanomyces euteiches*. *Phytopathology*, 96(10):1134-1141, 2006.
- [6] Bernhard Haubold and Richard R. Hudson. Lian 3.0: detecting linkage disequilibrium in multilocus data. *Bioinformatics*, 16(9):847-849, 2000.
- [7] Kenneth L.Jr. Heck, Gerald van Belle, and Daniel Simberloff. Explicit calculation of the rarefaction diversity measurement and the determination of sufficient sample size. *Ecology*, 56(6):pp. 1459-1461, 1975.
- [8] S H Hurlbert. The nonconcept of species diversity: a critique and alternative parameters. *Ecology*, 52(4):577-586, 1971.
- [9] Thibaut Jombart. adegenet: a r package for the multivariate analysis of genetic markers. *Bioinformatics*, 24(11):1403-1405, 2008.
- [10] J.A. Ludwig and J.F. Reynolds. *Statistical Ecology. A Primer on Methods and Computing*. New York USA: John Wiley and Sons, 1988.
- [11] Masatoshi Nei. Estimation of average heterozygosity and genetic distance from a small number of individuals. *Genetics*, 89(3):583-590, 1978.
- [12] Jari Oksanen, F. Guillaume Blanchet, Roeland Kindt, Pierre Legendre, Peter R. Minchin, R. B. O'Hara, Gavin L. Simpson, Peter Solymos, M. Henry H. Stevens, and Helene Wagner. *vegan: Community Ecology Package*, 2012. R package version 2.0-5.
- [13] Rod Peakall and Peter E. Smouse. Genalex 6.5: genetic analysis in excel. population genetic software for teaching and research--an update. *Bioinformatics*, 28(19):2537-2539, 2012.

- [14] E.C. Pielou. *Ecological Diversity*. Wiley, 1975.
- [15] Claude Elwood Shannon. A mathematical theory of communication. *Bell Systems Technical Journal*, 27:379-423,623-656, 1948.
- [16] J M Smith, N H Smith, M O'Rourke, and B G Spratt. How clonal are bacteria? *Proceedings of the National Academy of Sciences*, 90(10):4384-4388, 1993.
- [17] J.A. Stoddart and J.F. Taylor. Genotypic diversity: estimation and prediction in samples. *Genetics*, 118(4):705-11, 1988.