



Cybersecurity Academy: Configuring Small Office Wireless Networks with a FortiGate 40F WLAN Controller

Hunter Zhuang

Contents

Purpose.....	3
Background Information.....	3
Lab Summary.....	3
Network Diagram with IPs	4
Problems	4
Conclusion	5
Lab Configuration.....	5
FortiGate 40F Configuration.....	5
Linux RADIUS Server Configuration	34
Configuration Files	49
FortiGate 40F Configuration.....	49
LAN Switch Configuration.....	317
RADIUS Server Configs.....	323

Purpose

The purpose of this lab is to configure a small office or home office (SOHO) access point with a FortiGate 40F firewall, using its WLC capabilities. This lab will show how to configure a 2.5GHz pre-shared key (PSK) network, a 5GHz PSK network, and 5GHz Enterprise network. In order to configure the enterprise network there needs to be a Remote Authentication Dial-In User Service (RADIUS) server. For this lab, the RADIUS server was hosted on a laptop running Linux.

Background Information

In this lab, the FortiGate 40F is used as a wireless local area network controller (WLC). A WLC is a device that manages access points (APs) that allow wireless devices to connect to the network. WLCs are important in many offices because they often require multiple access points. Having a centralized device managing all of APs in the office is convenient when there are changes that need to be configured for the office's wireless network(s). It is important to note that, generally, WLCs cannot manage third-party access points. For example, a Cisco-branded WLC can't manage Fortinet-branded APs and Fortinet-branded WLC can't manage Cisco-branded APs.

The AP used in this lab is a FortiAP-421E. It broadcasts radio waves at different frequencies, commonly 2.4GHz, 5GHz, and 6GHz are used. Through these radio waves, APs can communicate with other devices and allow them to join the local area network (LAN). Specifically, APs broadcast SSIDs, which can just be thought of as the name of a network. These SSIDs are like human-readable names, so users can connect to the correct network. But under the hood, the devices do not actually use SSIDs to figure out what network they are connected to. Instead, a BSSID is used which acts as a MAC address for the AP, which only the devices will read to communicate with each other.

When securing these wireless networks, usually a pre-shared key (PSK) is used. The PSK just acts as a password that is needed to get into the network. But what if you wanted more security? One way to add more security to a wireless network is by using enterprise authentication. To get into the network, users need a username and password. Once the user logs in, a RADIUS user will authenticate the user and allow them onto the LAN. Furthermore, RADIUS can assign different privileges for different users by putting them on different VLANs and through other methods. Additionally, RADIUS can keep track of when a user logs on and logs off in case something needs to be checked.


The FortiGate 40F, made by Fortinet, Inc., is a small next-generation firewall (NGFW) made for small businesses and organizations. Regarding its physical specifications, it has a console port, a USB port, and five RJ45 ports. One of the RJ45 ports is designated for WAN and the other is designed to be a FortiLink interface. The FortiGate 40F comes with a secure SD-WAN and wireless controller, making it a great device for a small office. Additionally, the FortiGate 40F is integrated with FortiGuard security services, so it ensures that malware and attacks won't penetrate one's networks.

Lab Summary

In this lab, there is a Fortigate 40F, running v7.6.6 build3652 (Mature). There is also FortiAP-421E, running v6.4 build0492,230627 (GA). The switch used in this lab is a Catalyst 3560 Series PoE-48, running Cisco IOS Software, C3560 Software (C3560-

IPSERVICESK9-M), Version 12.2(53)SE1, RELEASE SOFTWARE (fc2). The FortiAP was connected through a trunked port that only allows VLANs intended for wireless networks and the management of AP to go through that port. Additionally, lan3 was designated as a port for the RADIUS server, but it was named the servers LAN, since a SOHO office may be scaled up for the future. The port lan1 is created for the management of the FortiGate 40F

Network Diagram with IPs

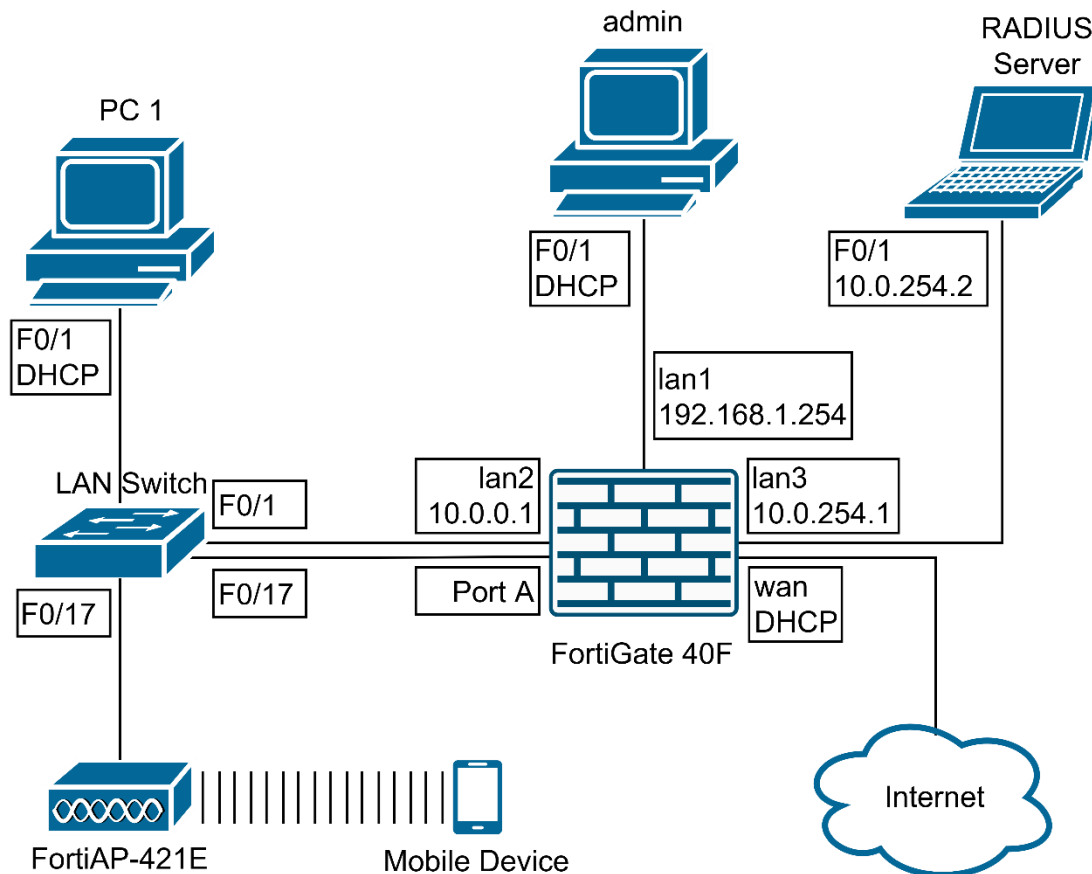

Problems


When configuring the RADIUS server to not sleep when the lid is closed (since a laptop was used to host the server) I filled in the corresponding settings to ignore and no, but I forgot to uncomment the lines. Since the lines were commented, the configuration edits were not applied, which was why I was confused why the laptop would when the lid was closed shut off. After looking at the configuration for a little bit, I finally realized that the lines were commented out and fixed the issue.

Conclusion

The use of a WLC to configure APs is important for even small offices, since they allow for the easy management of APs. By following the guides in this document, anyone can configure A FortiGate 40F to act as a WLC for FortiAPs.

Lab Configuration

FortiGate 40F Configuration

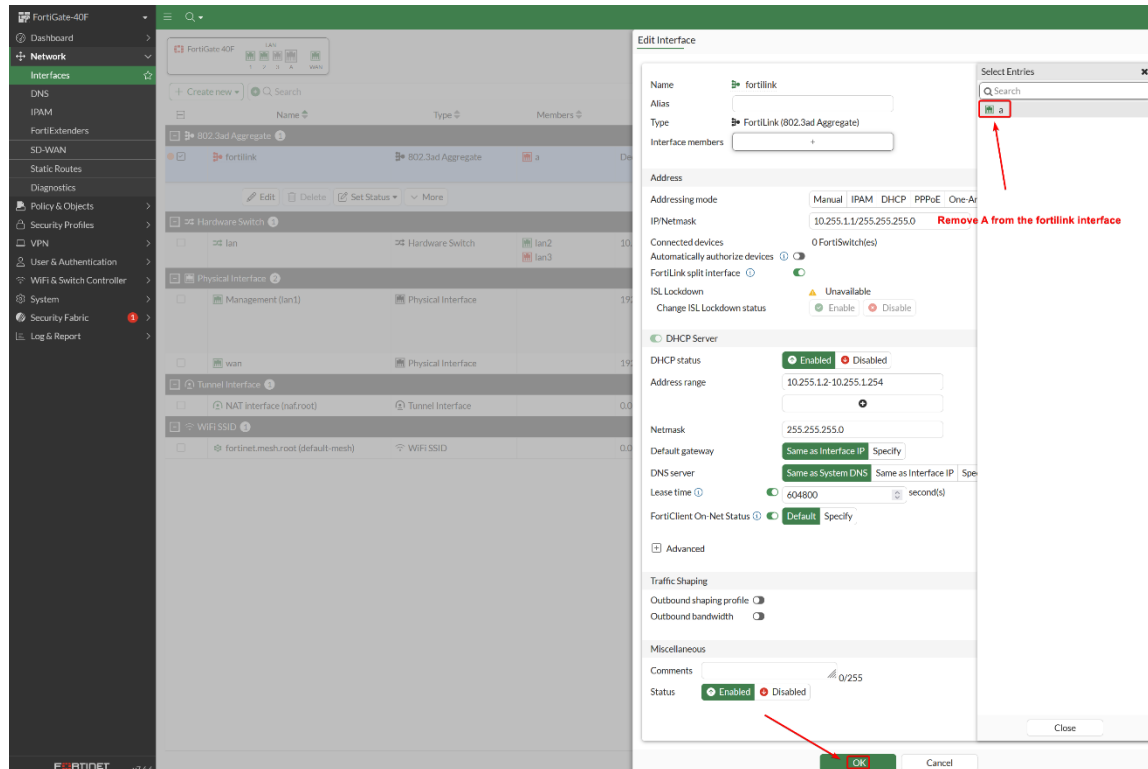

FortiGate 40F

Dashboard

Network

Interfaces

DNS

IPAM

FortiExtenders

SD-WAN

Static Routes

Diagnostics

Policy & Objects

Security Profiles

VPN

User & Authentication

WiFi & Switch Controller

System

Security Fabric

Log & Report

FortiGate 40F

LAN

WAN

Create new

Search

Name

Type

Members

802.3ad Aggregate

fortilink

802.3ad Aggregate

Hardware Switch

lan

lan2

lan3

Physical Interface

a

Management (lan1)

Physical Interface

wan

Physical Interface

Tunnel Interface

NAT interface (natroot)

Tunnel Interface

WiFi SSID

fortinet.mesh.root (default-mesh)

WiFi SSID

Hermes-2.4GHz (Hermes-2.4GHz)

WiFi SSID

Edit

Delete

Set Status

More

Select "interface"

Vlan24

VLAN

802.1Q

a

24

Edit

LAN

Address

Addressing mode

Manual

IPAM

DHCP

PPPoE

IP/Netmask

10.0.24.1/255.255.255.0

Create address object matching subnet

Name

Destination

Vlan24 address

10.0.24.0/24

Secondary IP address

Administrative Access

IPv4

HTTPS

FMG-Access

FTM

HTTP

SSH

RADIUS Accounting

PING

SNMP

Security Fabric Connection

Speed Test

SCIM

Receive LLDP

Use VDOM Setting

Enable

Disable

Transmit LLDP

Use VDOM Setting

Enable

Disable

DHCP Server

DHCP status

Enabled

Disabled

Address range

10.0.24.10-10.0.24.254

Netmask

255.255.255.0

Default gateway

Same as Interface IP

Specify

DNS server

Same as System DNS

Same as Interface IP

Specify

Lease time

604800

second(s)

FortiClient On-Net Status

Advanced

OK

Cancel

Edit Interface

Name

Alias

Type

Physical Interface

Role

LAN

Address

Addressing mode

Manual

IPAM

DHCP

PPPoE

One-Arm Sniffer

IP/Netmask

0.0.0.0/0.0.0.0

Create address object matching subnet

Name

Destination

a address

0.0.0.0/0

Secondary IP address

Administrative Access

IPv4

HTTPS

FMG-Access

FTM

HTTP

SSH

RADIUS Accounting

PING

SNMP

Security Fabric Connection

Speed Test

SCIM

Receive LLDP

Use VDOM Setting

Enable

Disable

Transmit LLDP

Use VDOM Setting

Enable

Disable

DHCP Server

Network

Device detection

Automatically authorize devices

Security mode

Traffic Shaping

Outbound shaping profile

Outbound bandwidth

Miscellaneous

Comments

Status

Enabled

Disabled

OK

Cancel

Advanced

Mode Server Relay

Type Regular IPsec

NTP server Local Same as System NTP Specify

Wireless controllers Same as Interface IP Specify

Time zone Same as System Specify

Next bootstrap server

TFTP server(s)

Additional DHCP Options


+ Create New Edit Delete Search Q		
Code	Type	Value
No results		
0		

IP Address Assignment Rules

+ Create New Edit Delete Search Q Add from DHCP Client List			
Type	Match Criteria	Action	IP
Implicit	Unknown MAC Addresses	Assign IP	

OK

Cancel

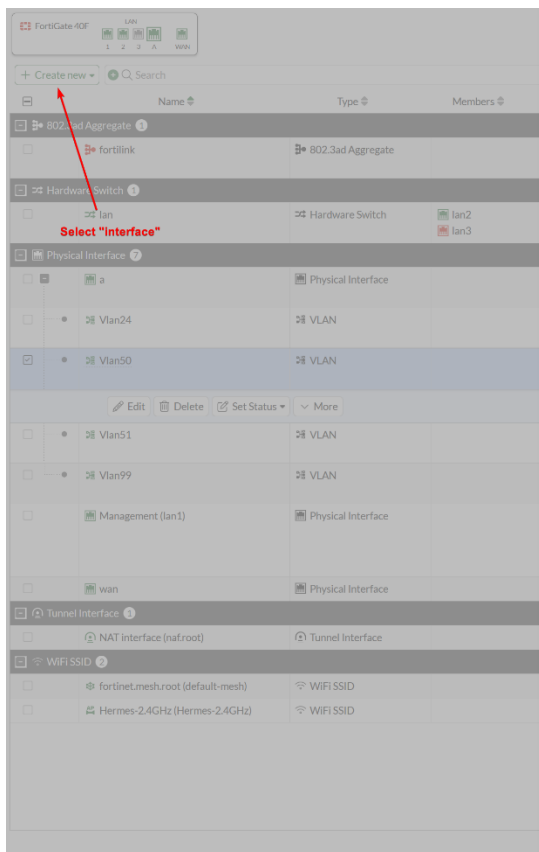

Edit Interface

Name: **Vlan50**
Alias:
Type: **VLAN**
VLAN protocol: 802.1Q
Interface: **a**
VLAN ID: **50** Edit
Role: **LAN**

Address

Addressing mode: **Manual** IPAM DHCP PPPoE One-Arm Sniffer
IP/Netmask: **10.0.50.1/255.255.255.0**
Create address object matching subnet: ☒
Name: Vlan50 address
Destination: 10.0.50.0/24
Secondary IP address: ☐

Administrative Access

IPv4: ☐ HTTPS ☐ HTTP ☒ PING ☐ SNMP
☐ FMG-Access ☐ SSH ☒ Security Fabric Connection ☐
☐ FTM ☐ RADIUS Accounting
☐ Speed Test ☐ SCIM

☒ DHCP Server

DHCP status: **Enabled** Disabled
Address range: **10.0.50.10-10.0.50.254**
Netmask: **255.255.255.0**
Default gateway: **Same as Interface IP** Specify
DNS server: **Same as System DNS** Same as Interface IP Specify
Lease time: **604800** seconds
FortiClient On-Net Status: ☐

Advanced

Network

Device detection: ☒
Automatically authorize Android: ☐

OK Cancel

 Advanced

Mode Server Relay

Type Regular IPsec

NTP server Local Same as System NTP Specify

Wireless controllers Same as Interface IP Specify

Time zone Same as System Specify

Next bootstrap server

TFTP server(s)


Additional DHCP Options

+ Create New Edit Delete Search Q		
Code	Type	Value
No results		
0		

IP Address Assignment Rules

+ Create New Edit Delete Search Q Add from DHCP Client List			
Type	Match Criteria	Action	IP
Implicit	Unknown MAC Addresses	Assign IP	

OK Cancel

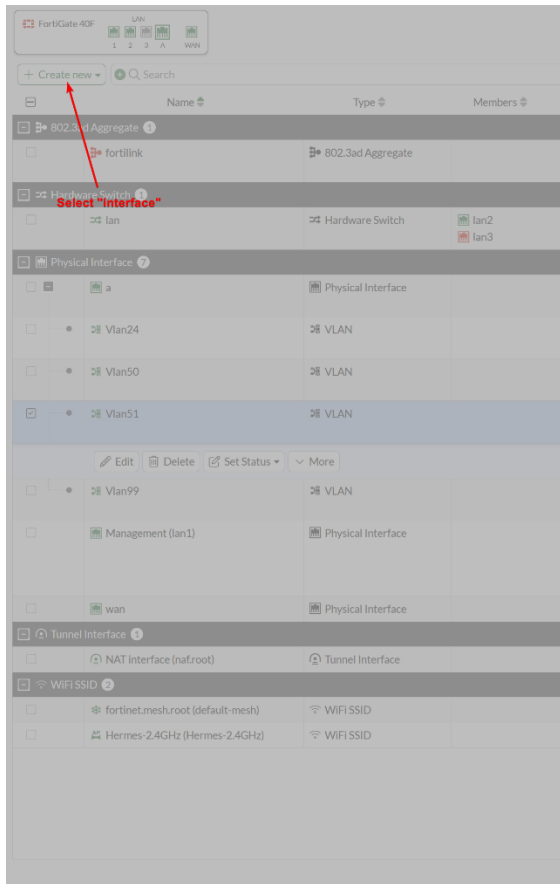

Edit Interface

Name **Vlan51**

Alias

Type **VLAN**

VLAN protocol **802.1Q**

Interface **a**

VLAN ID **51** Edit

Role **LAN**

Address

Addressing mode **Manual** IPAM DHCP PPoE One-Arm Sniffer

IP/Netmask **10.0.51.1/255.255.255.0**

Create address object matching subnet ☒

Name **Vlan51 address**

Destination **10.0.51.0/24**

Secondary IP address ☐

Administrative Access

IPv4 ☐ HTTPS ☐ HTTP ☒ PING

☐ FMG-Access ☐ SSH ☐ SNMP

☐ FTM ☐ RADIUS Accounting ☒ Security Fabric Connection

☐ Speed Test ☐ SCIM

☒ DHCP Server

DHCP status **Enabled** Disabled

Address range **10.0.51.10-10.0.51.254**

Netmask **255.255.255.0**

Default gateway **Same as Interface IP** Specify

DNS server **Same as System DNS** Same as Interface IP Specify

Lease time **604800** second(s)

FortiClient On-Net Status ☐

Advanced

Network

Device detection ☒

Automatically authorize devices ☐

OK Cancel

Advanced

Mode Server Relay

Type Regular IPsec

NTP server Local Same as System NTP Specify

Wireless controllers Same as Interface IP Specify

Time zone Same as System Specify

Next bootstrap server

TFTP server(s)


Additional DHCP Options

+ Create New		 Edit	 Delete	Search	
Code 	Type 		Value 		
No results					
					0

IP Address Assignment Rules

+ Create New	Edit	Delete	Search	Q	Add from DHCP Client List
Type	Match Criteria	Action	IP		
Implicit	Unknown MAC Addresses	Assign IP			

OK Cancel

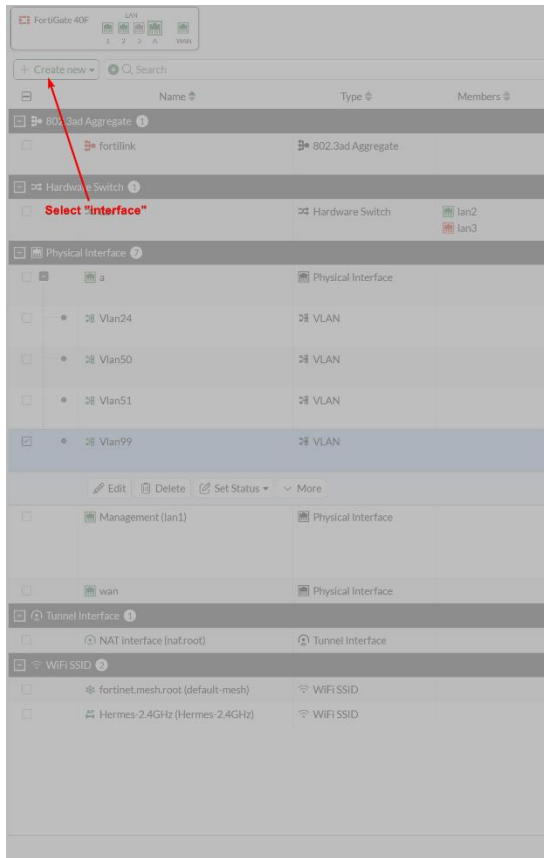

Edit Interface

Name: **Vlan99**

Alias:

Type: **VLAN**

VLAN protocol: **802.1Q**

Interface: **a**

VLAN ID: **99**

Role: **LAN**

Address

Addressing mode: **Manual** IPAM DHCP PPoE One-Arm Sniffer

IP/Netmask: **10.0.99.1/255.255.255.0**

Create address object matching subnet: ☒

Name: Vlan99 address

Destination: 10.0.99.0/24

Secondary IP address: ☐

Administrative Access

IPv4: ☐ HTTPS ☐ HTTP ☒ PING ☐ SNMP

☐ FMG-Access ☐ SSH ☒ Security Fabric Connection

☐ FTM ☐ RADIUS Accounting

☐ Speed Test ☐ SCIM

☒ DHCP Server

DHCP status: **Enabled** Disabled

Address range: **10.0.99.10-10.0.99.254**

Netmask: **255.255.255.0**

Default gateway: **Same as Interface IP** Specify

DNS server: **Same as System DNS** Same as Interface IP Specify

Lease time: **604800** second(s)

FortiClient On-Net Status: ☒

Advanced

Network

Device detection: ☒

Automatically authorize devices: ☐

OK Cancel

☐ Advanced

Mode Server Relay

Type Regular IPsec

NTP server Local Same as System NTP Specify

Wireless controllers Same as Interface IP Specify

Time zone Same as System Specify

Next bootstrap server

TFTP server(s)

Additional DHCP Options

+ Create New Edit Delete Q

Code	Type	Value
No results		

0

IP Address Assignment Rules

+ Create New Edit Delete Q Add from DHCP Client List

Type	Match Criteria	Action	IP
Implicit	Unknown MAC Addresses	Assign IP	

OK Cancel

```
FortiAP-421E login: admin
Password:
Login incorrect
```

```
FortiAP-421E logi 0
Device 1: nand1... is now current device
```

```
Loading from nand1, offset 0x320000
Fit image detected...
FIT description: ARM OpenWrt FIT (Flattened Image Tree)
Image 0 (kernel01)
Description: ARM OpenWrt Linux-4.4.60
Type: Kernel Image
Compression: gzip compressed
Data Start: 0x440000e4
Data Size: 3846975 bytes = 3.7 MiB
Architecture: ARM
OS: Linux
Load Address: 0x42208000
```

You will likely want to factory reset your FortiAP before use. To do so, locate the pinhole sized button usually on the back of the device. On our FortiAP-421E, it was next to the ports. Hold this button for 15-20 seconds and release to factory reset. you should see this configuration dialogue pop up in your CLI.

Starting kernel ...

```
[ 0.000000] Reserved memory: OVERLAP DETECTED!
[ 0.000000] wifi_dump@44000000 (0x44000000--0x44600000) overlaps with wigig_d
ump@44400000 (0x44400000--0x44600000)
[ 0.054672] mem dump base table DT node does not exist
/lib/firmware/qca-nss0.bin 33
[ 8.349214] memory: 0 0 (avl 228294656) items 2
/lib/firmware/qca-nssl.bin 33
[ 8.445607] memory: 0 0 (avl 228560896) items 2
[ 15.680916] spectral_init_netlink 96 NULL SKB
[ 19.635743] spectral_init_netlink 96 NULL SKB
cfg026cb7
```

Mon Jan 1 00:00:00 UTC 2018

```
qcawifi disable radio wifi0
qcawifi disable radio wifi1
qcawifi disable radio wifi0
qcawifi disable radio wifi1
qcawifi disable radio wifi0
qcawifi disable radio wifi1
```

**After your fortiAP resets, it will prompt you to log in again. The default login information is:
Login: admin
Password: [blank]
change your password to something secure.**

FortiAP-421E login: admin

Jan 1 00:00:23 login[2186]: root login on 'ttyMSM0'

Your password does not conform to the password policy. Please input a new password.

New password:

Confirm new password:

New password doesn't conform to the password policy enforced on this device!

New password:*New self-signed cert is generated at Mon Jan 1 00:00:25 2018

Confirm new password:

New password doesn't conform to the password policy enforced on this device!

New password:*****

Confirm new password:*****

FortiAP-421E #

FortiGate-40F

Dashboard

Network

Policy & Objects

Security Profiles

VPN

User & Authentication

WiFi & Switch Controller

Managed FortiAPs

WiFi Clients

WiFi Maps

SSIDs

FortiAP Profiles

WIDS Profiles

WiFi Settings

FortiLink Interface

Managed FortiSwitches

FortiSwitch Clients

FortiSwitch VLANs

FortiSwitch Ports

FortiSwitch Port Policies

NAC Policies

System

Security Fabric

Log & Report

FortiAP-421E

Access Point

Status

SSIDs

FP421E3X17006273

Unauthorized

All Tunnel Mode SSIDs

All Tunnel Mode SSIDs

Edit

Delete

Serial number

FP421E3X17006273

Name

AP1

Location

Comments

Write a comment...

0/255

Status

Authorize

Deauthorize

Reject

Wireless Settings

FortiAP profile

FAP421E-default

Override Radio 1

Band

2.4 GHz 802.11n/g

Channels

(Automatically assigned)

Transmit power mode

100%

SSIDs

(Automatically assign Tunnel mode SSIDs)

Override Radio 2

Band

5 GHz 802.11ac/n/a

Channels

(Automatically assigned)

Transmit power mode

100%

SSIDs

(Automatically assign Tunnel mode SSIDs)

Override LAN Port

Override


Mesh Setup

Override broadcast mesh provisioning SSID

Override AP Login Password

OK

Cancel

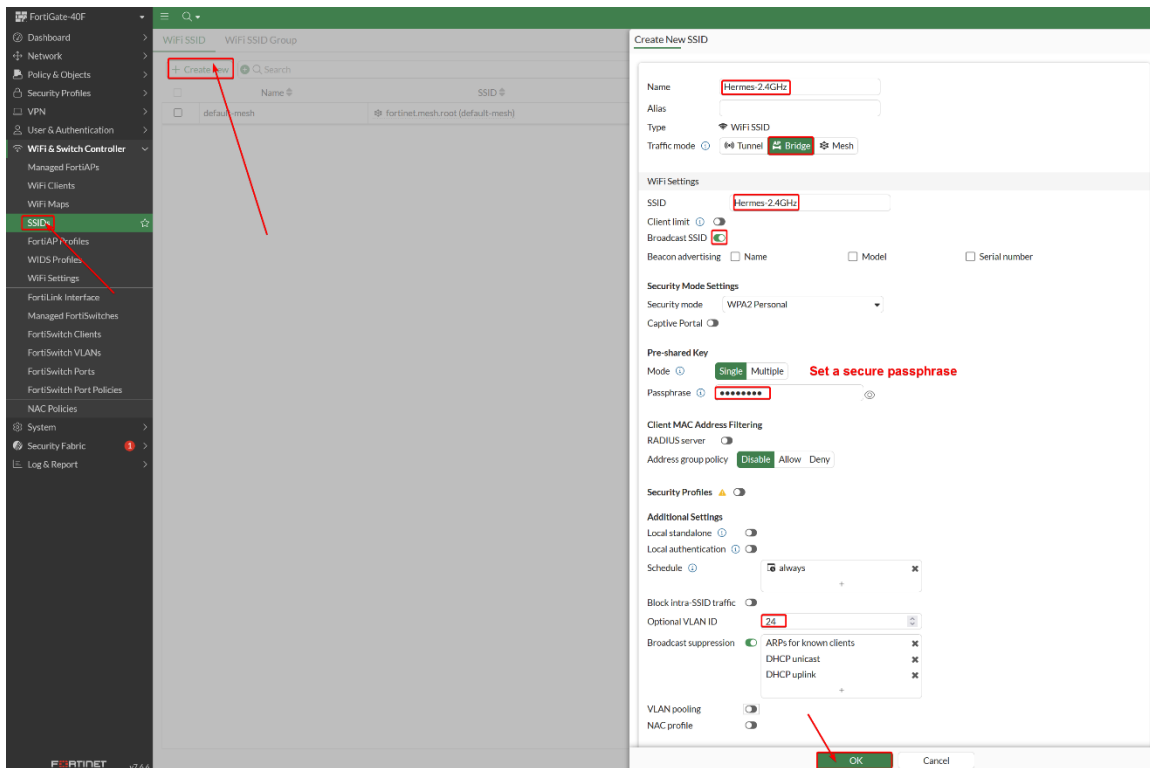

```
FortiAP-421E # cfg -a AP_MGMT_VLAN_ID=99
FortiAP-421E # cfg -c
FortiAP-421E # cw_diag -c vlan
```


WTP daemon VLAN info:

```
vId: 0      Age: 329
vId: 24     Age: 28
      wlan00 (Hermes-2.4GHz)      wlan10 (Hermes-2.4GHz)
vId: 99     Age: 400      <----- management vlan
```

Total VLANs: 3

```
FortiAP-421E # █
```

Console into your FortiAP and enter the following commands. You may have to wait a while before the AP shows as online to your firewall

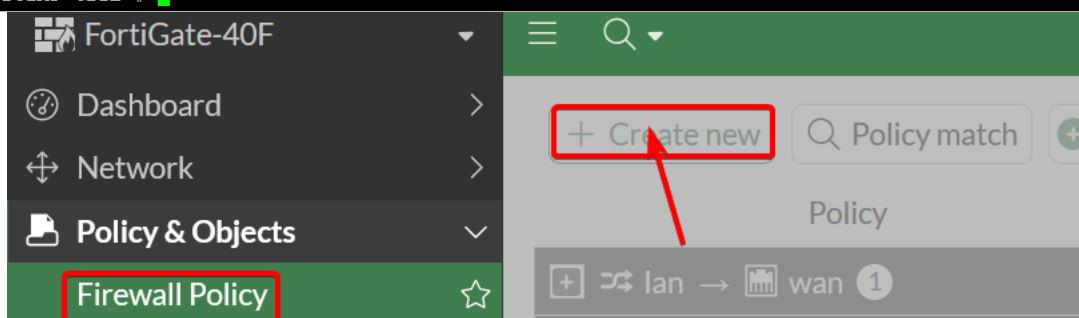

Edit Policy

Name ⓘ
Hermes-2.4GHz to Internet

Schedule
always

Action
✓ ACCEPT ✗ DENY

Incoming interface
Vlan24

Outgoing interface
wan

Source & Destination

Show logic

Source
Vlan24 address

User/group

Destination
all

Service
ALL

Firewall/Network Options

NAT
☒

IP pool configuration
Use Outgoing Interface Address Use Dynamic IP Pool

Source port translation
Always When port conflicts Never

Protocol options
PROT default

Security Profiles

AntiVirus
Web filter
DNS filter
Application control
IPS

SSL inspection
SSL no-inspection



Logging Options

Log allowed traffic
☒ Security events All sessions

Comments

OK

Cancel

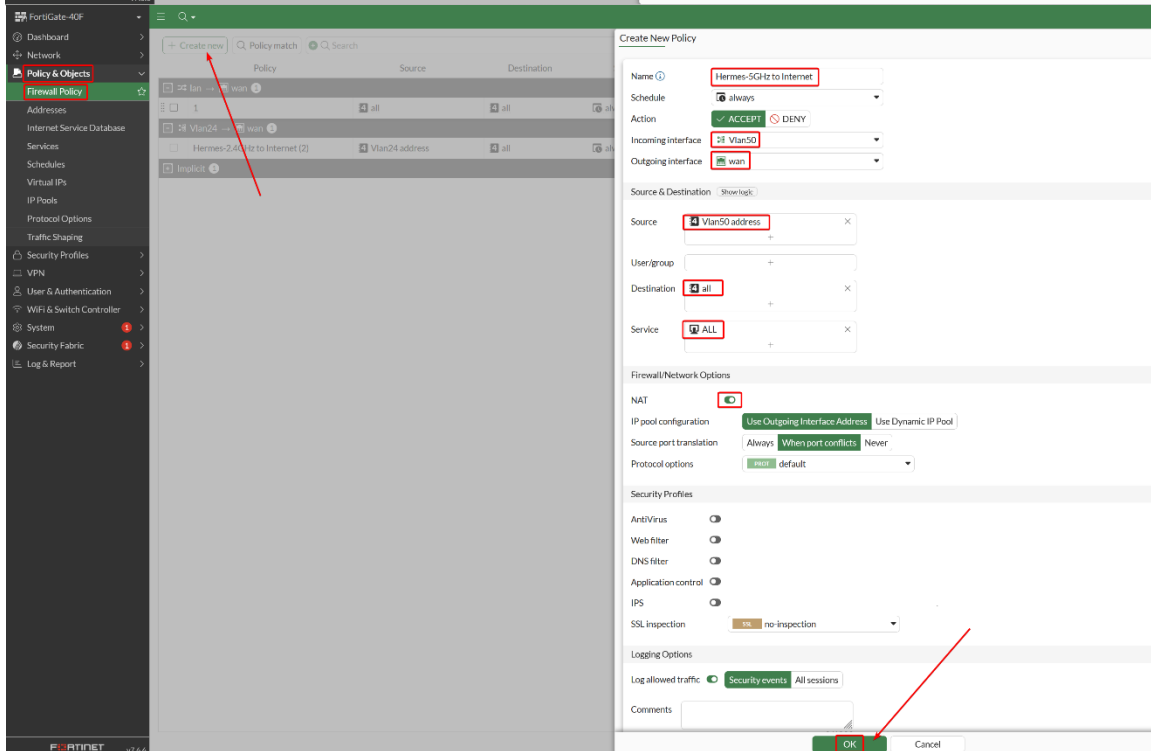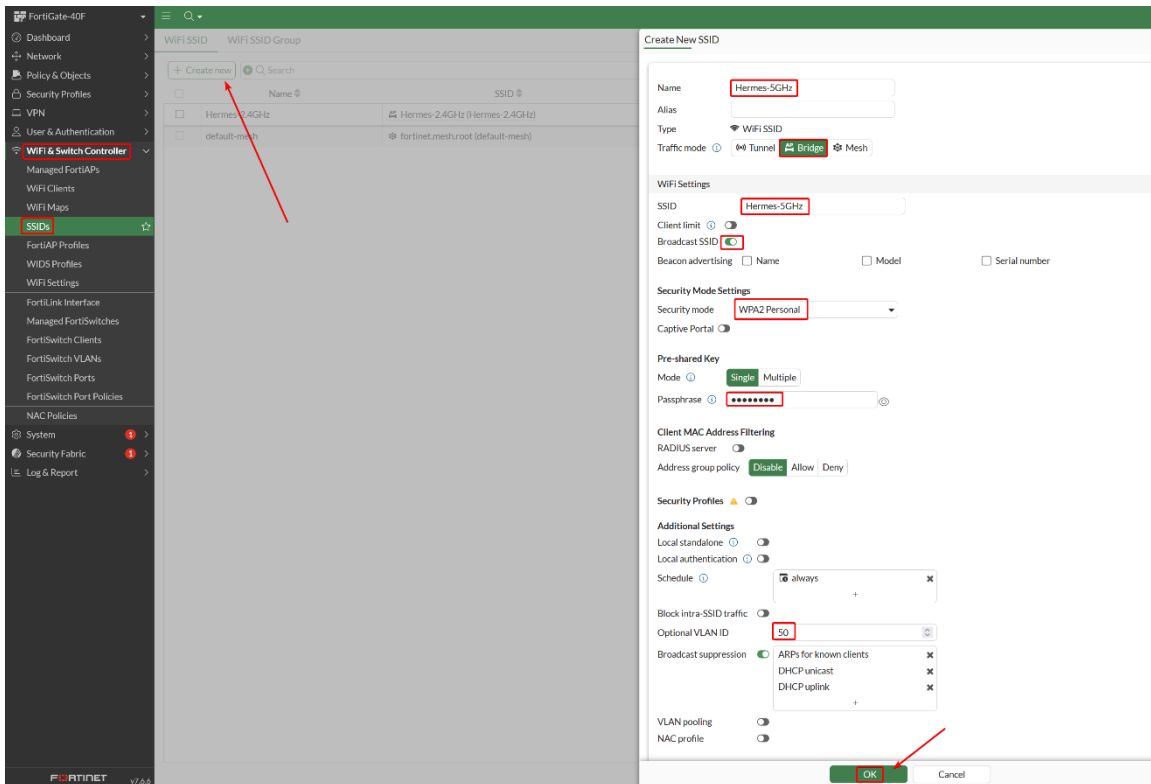

FortiGate-40F

Dashboard

Network

Interfaces

DNS

IPAM

FortiExtenders

SD-WAN

Static Routes

Diagnostics

Policy & Objects

Security Profiles

VPN

User & Authentication

WiFi & Switch Controller

System

Security Fabric

Log & Report

FortiGate-40F

Create new

Search

802.3ad Aggregate

fortiblink

802.3ad Aggregate

Hardware Switch

lan

Hardware Switch

lan2

lan3

Physical Interface

a

Physical Interface

Management (lan1)

Physical Interface

wan

Physical Interface

Tunnel Interface

NAT interface (natroot)

Tunnel Interface

WiFi SSID

fortinet.meshroot (default-mesh)

WiFi SSID

Hermes 2.4GHz (Hermes-2.4GHz)

WiFi SSID

Hermes 5GHz (Hermes-5GHz)

WiFi SSID

Edit Interface

Name: lan

Alias:

Type: Hardware Switch

Interface members: lan2, lan3

Role: LAN

Address

Addressing mode: Manual

IP/Netmask: 10.0.1/255.255.255.0

Create address object matching subnet: lan

Name: lan

Destination: 10.0.0/24

Secondary IP address:

Administrative Access

IPv4: ☐ HTTPS, ☐ HTTP, ☐ PING, ☐ SNMP, ☐ SSH, ☐ Security Fabric Connection, ☐ RADIUS Accounting, ☐ SCIM

Receive LLDP: Use VDOM Setting, Enable, Disable

Transmit LLDP: Use VDOM Setting, Enable, Disable

DHCP Server

DHCP status: Enabled

Address range: 10.0.0.1-10.0.0.253

Netmask: 255.255.255.0

Default gateway: Same as Interface IP

DNS server: Same as System DNS

Lease time: 604800 seconds

Advanced

Network

OK

Cancel

FortiGate-40F

Dashboard

Network

Interfaces

DNS

IPAM

FortiExtenders

SD-WAN

Static Routes

Diagnostics

Policy & Objects

Security Profiles

VPN

User & Authentication

WiFi & Switch Controller

System

Security Fabric

Log & Report

FortiGate-40F

Create new

Search

802.3ad Aggregate

fortiblink

802.3ad Aggregate

Hardware Switch

lan

Hardware Switch

lan2

lan3

Physical Interface

a

Physical Interface

Management (lan1)

Physical Interface

wan

Physical Interface

Tunnel Interface

NAT interface (natroot)

Tunnel Interface

WiFi SSID

fortinet.meshroot (default-mesh)

WiFi SSID

Hermes 2.4GHz (Hermes-2.4GHz)

WiFi SSID

Hermes 5GHz (Hermes-5GHz)

WiFi SSID

New Interface

Name: Server lan

Alias:

Type: Hardware Switch

Interface members: lan3

Role: LAN

Address

Addressing mode: Manual

IP/Netmask: 10.0.254.1/24

Create address object matching subnet: Server lan address

Name: Server lan address

Destination: 10.0.254.0/24

Secondary IP address:

Administrative Access

IPv4: ☐ HTTPS, ☐ HTTP, ☒ PING, ☐ SNMP, ☐ SSH, ☐ Security Fabric Connection, ☐ RADIUS Accounting, ☐ SCIM

DHCP Server

Network

Device detection: ☒

STP: ☒

Security mode: ☒

SPAN (Port Mirroring): ☐

Traffic Shaping

Outbound shaping profile: ☐

Outbound bandwidth: ☐

Miscellaneous

Comments: 0/255

Status: Enabled

OK

Cancel

FortiGate 40F

Dashboard

Network

Policy & Objects

Firewall Policy

Addresses

Internet Service Database

Schedules

Virtual IPs

IP Pools

Protocol Options

Traffic Shaping

Security Profiles

VPN

User & Authentication

WiFi & Switch Controller

System

Security Fabric

Log & Report

Create new Policy match Search

Policy	Source	Destination
1	all	all
2	all	all
3	all	all
4	all	all
5	all	all
6	all	all
7	all	all
8	all	all
9	all	all
10	all	all
11	all	all
12	all	all
13	all	all
14	all	all
15	all	all
16	all	all
17	all	all
18	all	all
19	all	all
20	all	all
21	all	all
22	all	all
23	all	all
24	all	all
25	all	all
26	all	all
27	all	all
28	all	all
29	all	all
30	all	all
31	all	all
32	all	all
33	all	all
34	all	all
35	all	all
36	all	all
37	all	all
38	all	all
39	all	all
40	all	all
41	all	all
42	all	all
43	all	all
44	all	all
45	all	all
46	all	all
47	all	all
48	all	all
49	all	all
50	all	all
51	all	all
52	all	all
53	all	all
54	all	all
55	all	all
56	all	all
57	all	all
58	all	all
59	all	all
60	all	all
61	all	all
62	all	all
63	all	all
64	all	all
65	all	all
66	all	all
67	all	all
68	all	all
69	all	all
70	all	all
71	all	all
72	all	all
73	all	all
74	all	all
75	all	all
76	all	all
77	all	all
78	all	all
79	all	all
80	all	all
81	all	all
82	all	all
83	all	all
84	all	all
85	all	all
86	all	all
87	all	all
88	all	all
89	all	all
90	all	all
91	all	all
92	all	all
93	all	all
94	all	all
95	all	all
96	all	all
97	all	all
98	all	all
99	all	all
100	all	all

Create New Policy

Name: TEMP server to internet

Schedule: always

Action: ACCEPT DENY

Incoming interface: Server lan

Outgoing interface: wan

Source & Destination (show task)

Source: Server lan address

User/group:

Destination: all

Service: ALL

Firewall/Network Options

NAT: Use Outgoing Interface Address Use Dynamic IP Pool

IP pool configuration: Use Outgoing Interface Address Use Dynamic IP Pool

Source port translation: Always When port conflicts Never

Protocol options: default

Security Profiles

AntiVirus: no-inspection

Web filter: no-inspection

DNS filter: no-inspection

Application control: no-inspection

IPS: no-inspection

SSL Inspection: no-inspection

Logging Options

Log allowed traffic: Security events All sessions

Comments:

OK Cancel

FortiGate 40F

Dashboard

Network

Policy & Objects

Addresses

Internet Service Database

Schedules

Virtual IPs

IP Pools

Protocol Options

Traffic Shaping

Security Profiles

VPN

User & Authentication

WiFi & Switch Controller

System

Security Fabric

Log & Report

Create new Address Group Search

Name	Type
FABRIC_DEVICE	Subnet
FIREWALL_AUTH_PORTAL_ADDRESS	Subnet
server lan address	Interface Subnet
lan24 address	Interface Subnet
lan50 address	Interface Subnet
lan51 address	Interface Subnet
lan99 address	Interface Subnet
all	Subnet
email.com	FQDN
lan	Interface Subnet
login.microsoft.com	FQDN
login.microsoftonline.com	FQDN
login.windows.net	FQDN
none	Subnet
wildcard.dropbox.com	FQDN
wildcard.google.com	FQDN

New Address

Name: Management Address

Color: Change

Interface: Management (lan1)


Type: Subnet

IP/Netmask: 192.168.1.0/255.255.255.0

Routing configuration: 0/255

Comments: Write a comment...

OK Cancel

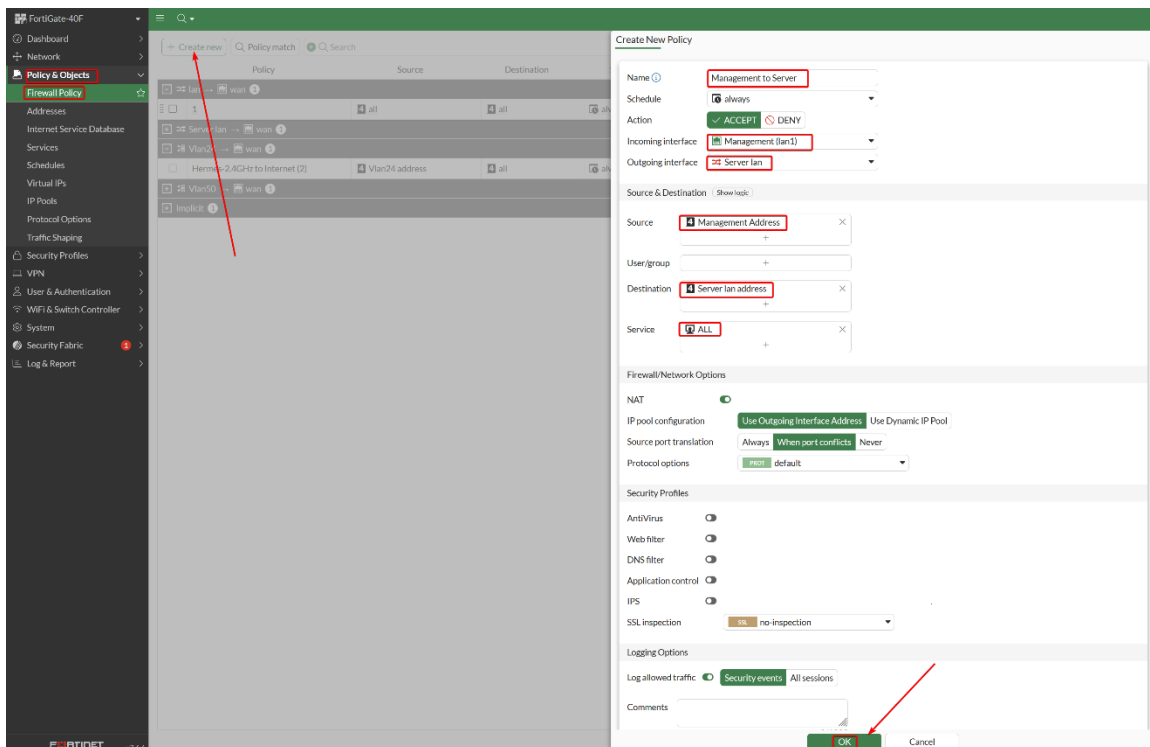

```
PS C:\> ssh management@10.0.254.2
management@10.0.254.2's password:
Welcome to Ubuntu 24.04.4 LTS (GNU/Linux 6.8.0-100-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

System information as of Thu Apr 16 12:17:51 PM UTC 2026

System load:  0.0          Temperature:   41.0 C
Usage of /:   10.8% of 56.88GB Processes:    132
Memory usage: 7%          Users logged in: 1
Swap usage:   0%          IPv4 address for eth0: 10.0.254.2

Expanded Security Maintenance for Applications is not enabled.

0 updates can be applied immediately.

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

Failed to connect to https://changelogs.ubuntu.com/meta-release-lts. Check your Internet connection or proxy settings

Last login: Thu Apr 16 12:16:44 2026 from 192.168.1.1
management@radius-server:~$
```

```
management@radius-server:/$ sudo su -l
[sudo] password for management:
root@radius-server:~# sudo nano /etc/systemd/logind.conf
```

```
# This file is part of systemd.
#
# systemd is free software; you can redistribute it and/or modify it under the
# terms of the GNU Lesser General Public License as published by the Free
# Software Foundation; either version 2.1 of the License, or (at your option)
# any later version.
#
# Entries in this file show the compile time defaults. Local configuration
# should be created by either modifying this file (or a copy of it placed in
# /etc/ if the original file is shipped in /usr/), or by creating "drop-ins" in
# the /etc/systemd/logind.conf.d/ directory. The latter is generally
# recommended. Defaults can be restored by simply deleting the main
# configuration file and all drop-ins located in /etc/.
#
# Use 'systemd-analyze cat-config systemd/logind.conf' to display the full config.
#
# See logind.conf(5) for details.
```

[Login]

```
#NAutoVTs=6
#ReserveVT=6
#KillUserProcesses=no
#KillOnlyUsers=
#KillExcludeUsers=root
#InhibitDelayMaxSec=5
#UserStopDelaySec=10
#HandlePowerKey=poweroff
#HandlePowerKeyLongPress=ignore
#HandleRebootKey=reboot
#HandleRebootKeyLongPress=poweroff
#HandleSuspendKey=suspend
#HandleSuspendKeyLongPress=hibernate
#HandleHibernateKey=hibernate
#HandleHibernateKeyLongPress=ignore
HandleLidSwitch=ignore
HandleLidSwitchExternalPower=ignore
HandleLidSwitchDocked=ignore
#PowerKeyIgnoreInhibited=no
#SuspendKeyIgnoreInhibited=no
#HibernateKeyIgnoreInhibited=no
LidSwitchIgnoreInhibited=no
#RebootKeyIgnoreInhibited=no
#HoldoffTimeoutSec=30s
#IdleAction=ignore
#IdleActionSec=30min
#RuntimeDirectorySize=10%
#RuntimeDirectoryInodesMax=
#RemoveIPC=yes
#InhibitorsMax=8192
#SessionsMax=8192
#StopIdleSessionSec=infinity
```

Use arrow keys to navigate!

Set these to "ignore" and remove "#" to uncomment the line, adding it to config

Set this "no" and remove "#" to uncomment the line, adding it to config

Use CTRL X to exit and make sure to save your changes when prompted

^G Help
^X Exit

^O Write Out
^R Read File

^W Who
^V Re


FortiGate-40F

- Dashboard
- Network
- Policy & Objects
- Security Profiles
- VPN
- User & Authentication
- WiFi & Switch Controller
- System** 1
- Administrators
- Admin Profiles
- Firmware & Registration
- Settings
- HA
- SNMP
- Replacement Messages
- FortiGuard 1
- Feature Visibility** ☆
- Security Fabric 1
- Log & Report

Feature Visibility

Core Features	Security Features	Additional Features
☐ Advanced Routing +	☐ Advanced DLP Features ? +	☐ Advanced Wireless Features +
☒ IPsec VPN +	☒ AntiVirus +	☐ Allow Unnamed Policies +
☐ IPv6 +	☒ Application Control +	☐ Application Detection-Based SD-WAN +
☒ Switch Controller +	☒ DNS Filter +	☐ Certificates +
☒ WiFi Controller +	☐ Email Filter +	☒ DNS Database +
	☐ File Filter +	☐ DoS Policy +
	☒ Intrusion Prevention +	☐ Dynamic Device & OS Identification +
	☐ Virtual Patching +	☐ Email Collection +
	☒ Web Filter +	☒ FortiExtender +
		☐ FortiGate Cloud Sandbox +
		☒ Implicit Firewall Policies +
		☐ Load Balance +
		☐ Local Out Routing +
		☐ Local-In Policy +
		☐ Multicast Policy +
		☐ Multiple Interface Policies +

Click "Apply"

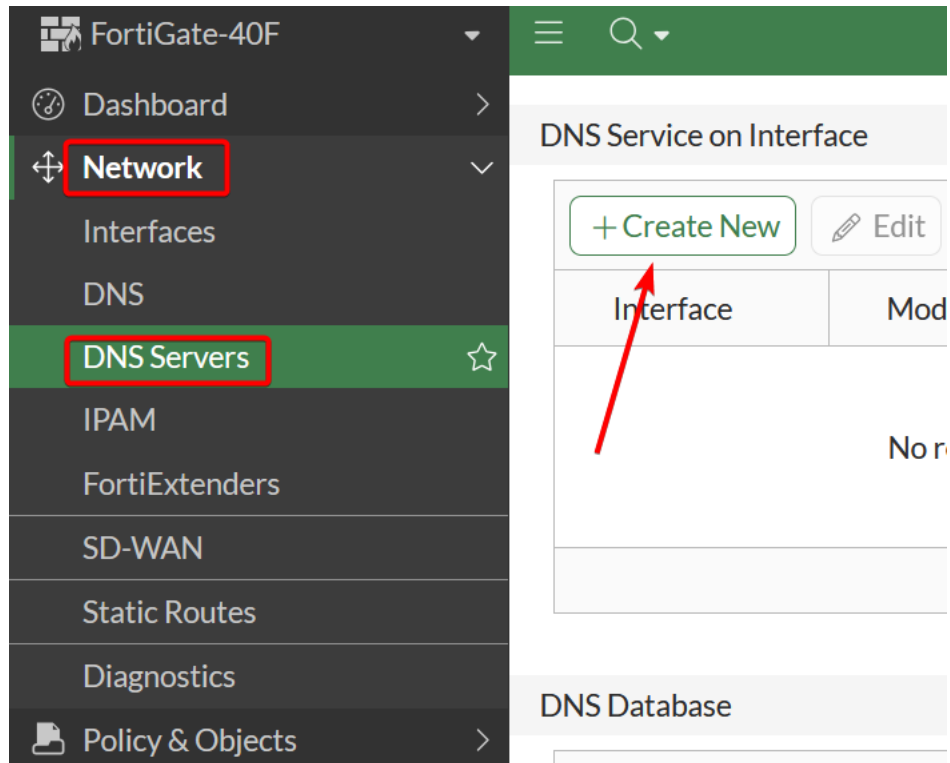

New DNS Service

Interface:

Mode: ☒ Recursive ☐ Non-Recursive ☐ Forward to System DNS ☐ Resolver

DNS Filter: ☐

DNS over HTTPS: ☐

DNS over HTTP3: ☐

DNS over QUIC: ☐

```
root@radius-server: ~  
root@radius-server:~# sudo apt install freeradius  
Reading package lists... Done  
Building dependency tree... Done  
Reading state information... Done  
The following additional packages will be installed:  
  freeradius-common freeradius-config freeradius-utils freetds-common libct4 libdbi-perl libfreeradius3 libtalloc2  
  libwbclient0 make ssl-cert  
Suggested packages:  
  freeradius-krb5 freeradius-ldap freeradius-mysql freeradius-postgresql freeradius-python3 snmp libclone-perl  
  libmldbm-perl libnet-daemon-perl libsql-statement-perl make-doc  
The following NEW packages will be installed:  
  freeradius freeradius-common freeradius-config freeradius-utils freetds-common libct4 libdbi-perl libfreeradius3  
  libtalloc2 libwbclient0 make ssl-cert  
0 upgraded, 12 newly installed, 0 to remove and 0 not upgraded.  
Need to get 2,684 kB of archives.  
After this operation, 9,517 kB of additional disk space will be used.  
Do you want to continue? [Y/n] Y
```

```
management@radius-server:~$ sudo apt update -y && sudo apt upgrade -y
Get:1 http://security.ubuntu.com/ubuntu noble-security InRelease [126 kB]
Hit:2 http://archive.ubuntu.com/ubuntu noble InRelease
Get:3 http://security.ubuntu.com/ubuntu noble-security/main amd64 c-n-f Metadata [11.0 kB]
Hit:4 http://archive.ubuntu.com/ubuntu noble-backports InRelease
Get:5 http://archive.ubuntu.com/ubuntu noble-updates InRelease [126 kB]
Get:6 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 Packages [1,918 kB]
Get:7 http://archive.ubuntu.com/ubuntu noble-updates/main Translation-en [345 kB]
Get:8 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 c-n-f Metadata [17.1 kB]
Get:9 http://archive.ubuntu.com/ubuntu noble-updates/universe amd64 Packages [1,685 kB]
Fetched 4,169 kB in 4s (1,131 kB/s)
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
41 packages can be upgraded. Run 'apt list --upgradable' to see them.
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
Calculating upgrade... Done
The following upgrades have been deferred due to phasing:
  ubuntu-pro-client ubuntu-pro-client-l10n
The following packages will be upgraded:
  apparmor cloud-init coreutils fwupd gir1.2-packagekitlib-1.0 jq libapparmor1 libfwupd2 libjq1 libnetplan1 libnftables1
  packagekit packagekit-tools python3-netplan python3-software-properties rsyslog snapd software-properties-common sosrep
39 upgraded, 0 newly installed, 0 to remove and 2 not upgraded.
6 standard LTS security updates
Need to get 55.1 MB/55.9 MB of archives.
After this operation, 1,705 kB of additional disk space will be used.
Get:1 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 coreutils amd64 9.4-3ubuntu6.2 [1,412 kB]
Get:2 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 libnss-systemd amd64 255.4-1ubuntu8.15 [159 kB]
Get:3 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 systemd-dev all 255.4-1ubuntu8.15 [106 kB]
Get:4 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 systemd-timesyncd amd64 255.4-1ubuntu8.15 [35.3 kB]
Get:5 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 systemd-resolved amd64 255.4-1ubuntu8.15 [296 kB]
Get:6 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 libsystemd-shared amd64 255.4-1ubuntu8.15 [2,076 kB]
Get:7 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 libsystemd0 amd64 255.4-1ubuntu8.15 [435 kB]
Get:8 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 systemd-sysv amd64 255.4-1ubuntu8.15 [11.9 kB]
Get:9 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 libpam-systemd amd64 255.4-1ubuntu8.15 [235 kB]
Get:10 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 systemd amd64 255.4-1ubuntu8.15 [3,475 kB]
16% [10 systemd 13.9 kB/3,475 kB 0%]

management@radius-server:~$ sudo systemctl enable freeradius
Synchronizing state of freeradius.service with SysV service script with /usr/lib/systemd/systemd-sysv-install.
Executing: /usr/lib/systemd/systemd-sysv-install enable freeradius
management@radius-server:~$ |
```

Runs freeradius when the system boots up

```
# -*- text -*-
##
## clients.conf -- client configuration directives
##
##      $Id: 5f39ff120a44e3fb837d1893d54a7ebb31fd8749 $
#####
#
# Define RADIUS clients (usually a NAS, Access Point, etc.).
#
# There are a number of security practices which are critical in the
# modern era.
#
# * don't use RADIUS/UDP or RADIUS/TCP over the Internet. Use RADIUS/TLS.
#
# * If you do send RADIUS over UDP or TCP, don't send MS-CHAPv2.
#   Anyone who can see the MS-CHAPv2 data can crack it in milliseconds.
#
# * use the "radsecret" program to generate secrets. It uses Perl (sorry).
#   Every time you run it, it will generate a new strong secret.
#
# * don't create shared secrets yourself. Anything you create is likely to
#   be in a "cracking" dictionary, and will allow a hobbyist attacker
#   to crack the shared secret in a few minutes.
#
# * Don't trust anyone who tells you to ignore the above recommendations.
#
```

Configures the client

```
client fortigate {
    ipaddr = 10.0.254.1
    secret = securesecret
    proto = *
}
```

Delete default testing configuration

```
#
# Defines a RADIUS client.
#
# '127.0.0.1' is another name for 'localhost'. It is enabled by default,
# to allow testing of the server after an initial installation. If you
# are not going to be permitting RADIUS queries from localhost, we suggest
# that you delete, or comment out, this entry.
#
#
# Each client has a "short name" that is used to distinguish it from
# other clients.
#
# In version 1.x, the string after the word "client" was the IP
# address of the client. In 2.0, the IP address is configured via
# the "ipaddr" or "ipv6addr" fields. For compatibility, the 1.x
# format is still accepted.
#
client localhost {
    # Only *one* of ipaddr, ipv4addr, ipv6addr may be specified for
    # a client.
    #
    # ipaddr will accept IPv4 or IPv6 addresses with optional CIDR
    # notation '/<mask>' to specify ranges.
    #
    # ipaddr will accept domain names e.g. example.org resolving
    # them via DNS.
    #
    # If both A and AAAA records are found, A records will be
    # used in preference to AAAA
```

```

# *- text *-
##
## clients.conf -- client configuration directives
##
##      $Id: 5f39ff120a44e3fb837d1893d54a7ebb31fd8749 $
#####
#
# Define RADIUS clients (usually a NAS, Access Point, etc.).
#
# There are a number of security practices which are critical in the
# modern era.
#
# * don't use RADIUS/UDP or RADIUS/TCP over the Internet. Use RADIUS/TLS.
#
# * If you do send RADIUS over UDP or TCP, don't send MS-CHAPv2.
#   Anyone who can see the MS-CHAPv2 data can crack it in milliseconds.
#
# * use the "radsecret" program to generate secrets. It uses Perl (sorry).
#   Every time you run it, it will generate a new strong secret.
#
# * don't create shared secrets yourself. Anything you create is likely to
#   be in a "cracking" dictionary, and will allow a hobbyist attacker
#   to crack the shared secret in a few minutes.
#
# * Don't trust anyone who tells you to ignore the above recommendations.
#
client fortigate {
    ipaddr = 10.0.254.1
    secret = secretesecret
    proto = *
}

```

Exit and save the file

^G Help	^O Write Out	^W Where Is	^K Cut	^T Execute	^C Location
^X Exit	^R Read File	^N Replace	^U Paste	^J Justify	^/ Go To Line


```
root@radius-server:/# nano /etc/freeradius/3.0/clients.conf
root@radius-server:/# nano /etc/freeradius/3.0/users
root@radius-server:/# |
```



```

# Configuration file for the rlm_files module.
# Please see rlm_files(5) manpage for more information.
#
# This file contains authentication security and configuration
# information for each user. Accounting requests are NOT processed
# through this file. Instead, see 'accounting', in this directory.
#
# The first field is the user's name and can be up to
# 253 characters in length. This is followed (on the same line) with
# the list of authentication requirements for that user. This can
# include password, comm server name, comm server port number, protocol
# type (perhaps set by the "hints" file), and huntgroup name (set by
# the "huntgroups" file).
#
# If you are not sure why a particular reply is being sent by the
# server, then run the server in debugging mode (radiusd -X), and
# you will see which entries in this file are matched.
#
# When an authentication request is received from the comm server,
# these values are tested. Only the first match is used unless the
# "Fall-Through" variable is set to "Yes".
#
# A special user named "DEFAULT" matches on all usernames.
# You can have several DEFAULT entries. All entries are processed
# in the order they appear in this file. The first entry that
# matches the login-request will stop processing unless you use
# the Fall-Through variable.
#
# Indented (with the tab character) lines following the first
# line indicate the configuration values to be passed back to
# the comm server to allow the initiation of a user session.
# This can include things like the PPP configuration values
# or the host to log the user onto.
#
# You can include another 'users' file with '$INCLUDE users.other'
#
# For a list of RADIUS attributes, and links to their definitions,
# see: http://www.freeradius.org/rfc/attributes.html
#
# Entries below this point are examples included in the server for
# educational purposes. They may be deleted from the deployed
# configuration without impacting the operation of the server.
#
user    Cleartext-Password := "password"
        Reply-Message := "Hello"
#
# Deny access for a specific user. Note that this entry MUST
# be before any other 'Auth-Type' attribute which results in the user
# being authenticated.
#
# Note that there is NO 'Fall-Through' attribute, so the user will not
# be given any additional resources.
#
#lameuser    Auth-Type := Reject

```

Exit and save

```
root@radius-server:/# sudo systemctl restart freeradius
root@radius-server:/# journalctl -u freeradius
Apr 20 19:28:06 radius-server systemd[1]: Starting freeradius.service - FreeRADIUS multi-protocol policy server...
Apr 20 19:28:06 radius-server freeradius[2154]: FreeRADIUS Version 3.2.5
Apr 20 19:28:06 radius-server freeradius[2154]: Copyright (C) 1999-2023 The FreeRADIUS server project and contributors
Apr 20 19:28:06 radius-server freeradius[2154]: There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A
Apr 20 19:28:06 radius-server freeradius[2154]: PARTICULAR PURPOSE
Apr 20 19:28:06 radius-server freeradius[2154]: You may redistribute copies of FreeRADIUS under the terms of the
Apr 20 19:28:06 radius-server freeradius[2154]: GNU General Public License
Apr 20 19:28:06 radius-server freeradius[2154]: For more information about these matters, see the file named COPYRIGHT
Apr 20 19:28:06 radius-server freeradius[2154]: Starting - reading configuration files ...
Apr 20 19:28:06 radius-server freeradius[2154]: Debug state unknown (cap_sys_ptrace capability not set)
Apr 20 19:28:06 radius-server freeradius[2154]: Creating attribute Unix-Group
Apr 20 19:28:06 radius-server freeradius[2154]: rlm_mschap (mschap): using internal authentication
Apr 20 19:28:06 radius-server freeradius[2154]: rlm_detail (auth_log): 'User-Password' suppressed, will not appear in detail output
Apr 20 19:28:06 radius-server freeradius[2154]: tls: Using cached TLS configuration from previous invocation
Apr 20 19:28:06 radius-server freeradius[2154]: tls: Using cached TLS configuration from previous invocation
Apr 20 19:28:06 radius-server freeradius[2154]: Compiling Auth-Type PAP for attr Auth-Type
Apr 20 19:28:06 radius-server freeradius[2154]: Compiling Auth-Type CHAP for attr Auth-Type
Apr 20 19:28:06 radius-server freeradius[2154]: Compiling Auth-Type MS-CHAP for attr Auth-Type
Apr 20 19:28:06 radius-server freeradius[2154]: Ignoring "sql" (see raddb/mods-available/README.rst)
Apr 20 19:28:06 radius-server freeradius[2154]: Ignoring "ldap" (see raddb/mods-available/README.rst)
Apr 20 19:28:06 radius-server freeradius[2154]: Compiling Auth-Type New-TLS-Connection for attr Auth-Type
Apr 20 19:28:06 radius-server freeradius[2154]: Compiling Post-Auth-Type REJECT for attr Post-Auth-Type
Apr 20 19:28:06 radius-server freeradius[2154]: Compiling Post-Auth-Type Challenge for attr Post-Auth-Type
Apr 20 19:28:06 radius-server freeradius[2154]: Compiling Post-Auth-Type Client-Lost for attr Post-Auth-Type
Apr 20 19:28:06 radius-server freeradius[2154]: Compiling Auth-Type PAP for attr Auth-Type
Apr 20 19:28:06 radius-server freeradius[2154]: Compiling Auth-Type CHAP for attr Auth-Type
Apr 20 19:28:06 radius-server freeradius[2154]: Compiling Auth-Type MS-CHAP for attr Auth-Type
Apr 20 19:28:06 radius-server freeradius[2154]: # Skipping contents of 'if' as it is always 'false' -- /etc/freeradius/3.0/sites-enabled
Apr 20 19:28:06 radius-server freeradius[2154]: Compiling Post-Auth-Type REJECT for attr Post-Auth-Type
Apr 20 19:28:06 radius-server freeradius[2154]: radiusd: ##### Skipping IP addresses and Ports #####
Apr 20 19:28:06 radius-server freeradius[2154]: Configuration appears to be OK
Apr 20 19:28:06 radius-server systemd[1]: Started freeradius.service - FreeRADIUS multi-protocol policy server.
Apr 22 06:11:12 radius-server systemd[1]: Stopping freeradius.service - FreeRADIUS multi-protocol policy server...
Apr 22 06:11:12 radius-server systemd[1]: freeradius.service: Deactivated successfully.
Apr 22 06:11:12 radius-server systemd[1]: Stopped freeradius.service - FreeRADIUS multi-protocol policy server.
Apr 22 06:11:12 radius-server systemd[1]: freeradius.service: Consumed 1.276s CPU time, 43.3M memory peak, 0B memory swap peak.
Apr 22 06:11:12 radius-server systemd[1]: Starting freeradius.service - FreeRADIUS multi-protocol policy server...
Apr 22 06:11:12 radius-server freeradius[13750]: FreeRADIUS Version 3.2.5
Apr 22 06:11:12 radius-server freeradius[13750]: Copyright (C) 1999-2023 The FreeRADIUS server project and contributors
Apr 22 06:11:12 radius-server freeradius[13750]: There is NO warranty; not even for MERCHANTABILITY or FITNESS FOR A
Apr 22 06:11:12 radius-server freeradius[13750]: PARTICULAR PURPOSE
Apr 22 06:11:12 radius-server freeradius[13750]: You may redistribute copies of FreeRADIUS under the terms of the
Apr 22 06:11:12 radius-server freeradius[13750]: GNU General Public License
Apr 22 06:11:12 radius-server freeradius[13750]: For more information about these matters, see the file named COPYRIGHT
Apr 22 06:11:12 radius-server freeradius[13750]: Starting - reading configuration files ...
Apr 22 06:11:12 radius-server freeradius[13750]: Debug state unknown (cap_sys_ptrace capability not set)
Apr 22 06:11:12 radius-server freeradius[13750]: Creating attribute Unix-Group
Apr 22 06:11:12 radius-server freeradius[13750]: rlm_mschap (mschap): using internal authentication
Apr 22 06:11:12 radius-server freeradius[13750]: rlm_detail (auth_log): 'User-Password' suppressed, will not appear in detail output
Apr 22 06:11:12 radius-server freeradius[13750]: tls: Using cached TLS configuration from previous invocation
Apr 22 06:11:12 radius-server freeradius[13750]: tls: Using cached TLS configuration from previous invocation
Apr 22 06:11:12 radius-server freeradius[13750]: Compiling Auth-Type PAP for attr Auth-Type
Apr 22 06:11:12 radius-server freeradius[13750]: Compiling Auth-Type CHAP for attr Auth-Type
Apr 22 06:11:12 radius-server freeradius[13750]: Compiling Auth-Type MS-CHAP for attr Auth-Type
```


FortiGate-40F

Dashboard

Network

Policy & Objects

Firewall Policy

Addresses

Internet Service Database

Services

Schedules

Virtual IPs

IP Pools

Protocol Options

Traffic Shaping

Security Profiles

VPN

User & Authentication

WiFi & Switch Controller

System

Security Fabric

Log & Report

Create new

Policy match

Search

Policy

Source

Destination

1

lan → wan

Management (lan1) → Server lan

Management to Server (5)

Management Address

Server lan address

Server lan → wan

TEMP server to internet (4)

Server lan address

all

Vlan24 → wan

Vlan50 → wan

Hermes-5GHz to Internet (3)

Vlan50 address

all

Implicit

Implicit Deny (0)

all

all

Create New Policy

Name

Hermes-5GHz-Enterprise to Internet

Schedule

always

Action

ACCEPT

DENY

Incoming interface

Vlan51

Outgoing interface

wan

Source & Destination

Show logic

Source

Vlan51 address

User/group

Destination

all

Service

ALL

Firewall/Network Options

NAT

IP pool configuration

Use Outgoing Interface Address

Use Dynamic IP Pool

Source port translation

Always

When port conflicts

Never

Protocol options

PROXY

default

Security Profiles

AntiVirus

Web filter

DNS filter

Application control

IPS

SSL Inspection

SSL

no-inspection

Logging Options

Log allowed traffic

Security events

All sessions

Comments

OK

Cancel

FortiGate-40F

Dashboard

Network

Policy & Objects

Firewall Policy

Addresses

Internet Service Database

Services

Schedules

Virtual IPs

IP Pools

Protocol Options

Traffic Shaping

Security Profiles

VPN

User & Authentication

WiFi & Switch Controller

System

Security Fabric

Log & Report

Create new

Policy match

Search

Policy

Source

Destination

lan → wan

Management (lan1) → Server lan

Server lan → wan

TEMP server to internet (4)

Server lan address

all

Edit

Insert

Disable

Delete

More

Vlan24 → wan

Vlan50 → wan

Vlan51 → wan

Hermes-5GHz-Enterprise to Internet (6)

Vlan51 address

all

Implicit

Disable unless updating servers

 Wi-Fi 

 Hermes-5GHz-Enterprise
Secured

Enter your user name and password

[Connect using a certificate](#)

 OK

 Cancel


 Wi-Fi 

 Hermes-5GHz-Enterprise
Connecting


Continue connecting?
If you expect to find Hermes-5GHz-Enterprise
in this location, go ahead and connect.
Otherwise, it may be a different network with
the same name.

[Show certificate details](#)

 Connect

 Cancel


Linux RADIUS Server Configuration

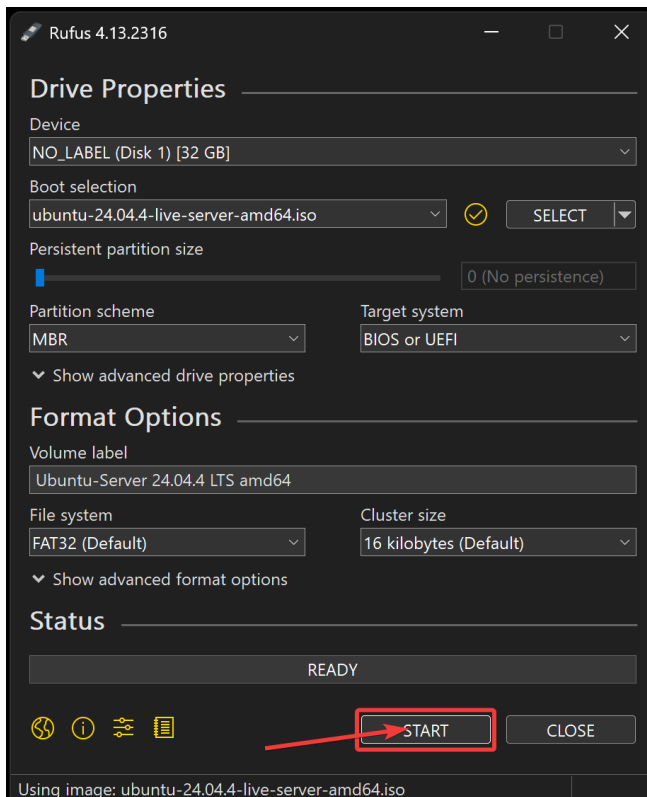

1. Install Rufus

2. Download image of Ubuntu (or preferred environment for a RADIUS server)

3. Format USB to create a boot drive using Rufus

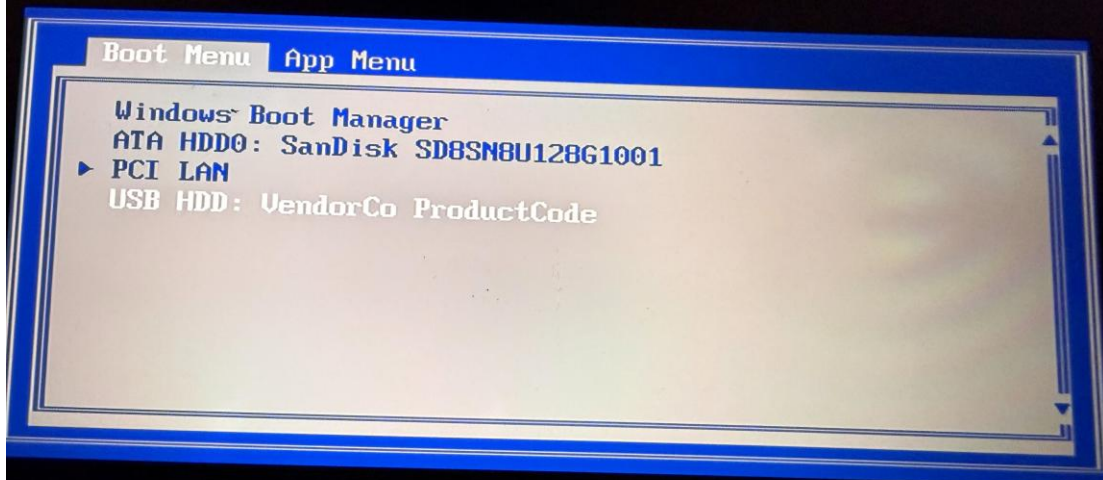

[↑↓] - Move [←→] - Collapse/Expand [Enter] - Select [ESC] - Exit
[Tab] - Switch Menu

*Try or Install Ubuntu Server

Ubuntu Server with the HWE kernel

Boot from next volume

UEFI Firmware Settings

```
0.411483] usb 1-10: New USB device found, idVendor=056a, idProduct=5090, bcdDevice= 1.00
0.413535] usb 1-10: New USB device strings: Mfr=1, Product=2, SerialNumber=0
0.415490] usb 1-10: Product: Pen and multitouch sensor
0.417440] usb 1-10: Manufacturer: Wacom Co.,Ltd.
0.443578] usb-storage 1-1:1.0: USB Mass Storage device detected
0.445044] scsi host2: usb-storage 1-1:1.0
0.447322] usbcore: registered new interface driver usb-storage
0.451555] usbcore: registered new interface driver uas
0.453028] Input: Wacom Co.,Ltd. Pen and multitouch sensor Touchscreen as /devices/pci0000:00/0000:00:14.0/usb1/1-10/1-10:1.0/0003:056A:5090.0004/input0
0.455661] Input: Wacom Co.,Ltd. Pen and multitouch sensor as /devices/pci0000:00/0000:00:14.0/usb1/1-10/1-10:1.0/0003:056A:5090.0004/input0
0.458297] hid-generic 0003:056A:5090.0004: input,hiddev0,hidraw0: USB HID v1.11 Device [Wacom Co.,Ltd. Pen and multitouch sensor] on usb-0000:00:14.0-7
0.463107] Input: Wacom Co.,Ltd. Pen and multitouch sensor Stylus as /devices/pci0000:00/0000:00:14.0/usb1/1-10/1-10:1.1/0003:056A:5090.0005/input0
0.465082] Input: Wacom Co.,Ltd. Pen and multitouch sensor as /devices/pci0000:00/0000:00:14.0/usb1/1-10/1-10:1.1/0003:056A:5090.0005/input0
0.467003] Input: Wacom Co.,Ltd. Pen and multitouch sensor Mouse as /devices/pci0000:00/0000:00:14.0/usb1/1-10/1-10:1.1/0003:056A:5090.0005/input0
0.469131] hid-generic 0003:056A:5090.0005: input,hiddev1,hidraw1: USB HID v1.11 Mouse [Wacom Co.,Ltd. Pen and multitouch sensor] on usb-0000:00:14.0-10
0.470693] usbcore: registered new interface driver usbtouch
0.472623] usbtouch: USB HID core driver
0.506029] wacom 0003:056A:5090.0004: hidraw0: USB HID v1.11 Device [Wacom Co.,Ltd. Pen and multitouch sensor] on usb-0000:00:14.0-7/input0
0.508375] Input: Wacom Pen and multitouch sensor Finger as /devices/pci0000:00/0000:00:14.0/usb1/1-10/1-10:1.0/0003:056A:5090.0004/input0
0.557418] wacom 0003:056A:5090.0005: hidraw4: USB HID v1.11 Mouse [Wacom Co.,Ltd. Pen and multitouch sensor] on usb-0000:00:14.0-10/input1
0.560377] Input: Wacom Pen and multitouch sensor Pen as /devices/pci0000:00/0000:00:14.0/usb1/1-10/1-10:1.1/0003:056A:5090.0005/input0
Begin: Loading essential drivers ... [ 0.773146] raid6: avx2x4 gen() 24331 MB/s
[ 0.790160] raid6: avx2x2 gen() 23906 MB/s
[ 0.807177] raid6: avx2x1 gen() 20853 MB/s
[ 0.807923] raid6: using algorithm avx2x4 gen() 24331 MB/s
[ 0.825151] raid6: .... xor() 7946 MB/s, mmio enabled
[ 0.825923] raid6: using avx2x2 recovery algorithm
[ 0.828949] xor: automatically using best checksumming function avx
[ 0.832228] async_tx: api initialized (async)
done.
Begin: Running /scripts/init-premount ... done.
Begin: Mounting root file system ... Begin: Running /scripts/nfs-top ... done.
Begin: Running /scripts/nfs-premount ... done.
[ 9.495192] scsi 2:0:0:0: Direct-Access VendorCo ProductCode 2.00 PQ: 0 ANSI: 4
[ 9.498465] sd 2:0:0:0: Attached scsi generic sgi type 0
[ 9.504828] sd 2:0:0:0: [sdb] 15728640 512-byte logical blocks: (8.05 GB/7.50 GiB)
[ 9.506960] sd 2:0:0:0: [sdb] Write Protect is off
[ 9.508036] sd 2:0:0:0: [sdb] No Caching mode page found
[ 9.510280] sd 2:0:0:0: [sdb] Assuming drive cache: write through
[ 9.514024] sdb: sdb1
[ 9.516747] sd 2:0:0:0: [sdb] Attached SCSI removable disk
Begin: Running /scripts/casper-premount ... done.
done.
The disk contains an unclean file system (0, 0).
Metadata kept in Windows cache, refused to mount.
Falling back to read-only mount because the NTFS partition is in an
unsafe state. Please resume and shutdown Windows fully (no hibernation
or fast restarting.)
Could not mount read-write, trying read-only
[ 10.955914] loop0: detected capacity change from 0 to 324824
[ 11.099503] loop1: detected capacity change from 0 to 288928
[ 11.246143] loop2: detected capacity change from 0 to 1373240
[ 11.416700] loop3: detected capacity change from 0 to 523432
[ 11.466487] overlays: null uuid detected in lower fs '/', falling back to xino=off,index=off,nfs_export=off.
[ 11.770615] evm: overlay not supported
```


[illegible]


```
[ 19.053582] Starting systemd-tmpfiles-setup-dev-early.service - Create Static Device Nodes in /dev gracefully...
[ OK ] 19.053582] Systemd-Journal[321]: Received client request to flush runtime Journal.
[ OK ] Finished systemd-modules-load.service - Load Kernel Modules.
[ OK ] Mounted sys-fs-fuse-connections.mount - FUSE Control File System.
[ OK ] Mounted sys-kernel-config.mount - Kernel Configuration File System.
[ OK ] Finished systemd-random-seed.service - Load/Save OS Random Seed.
[ OK ] Finished systemd-journal-flush.service - Flush Journal to Persistent Storage.
[ OK ] Starting systemd-sysctl.service - Apply Kernel Variables...
[ OK ] Finished systemd-tmpfiles-setup-dev-early.service - Create Static Device Nodes in /dev gracefully.
[ OK ] Starting systemd-sysusers.service - Create System Users...
[ OK ] Finished systemd-sysusers.service - Monitoring of WMI errors, snapshots etc. using dmeventd or progress polling.
[ OK ] Finished systemd-sysusers.service - Create System Users.
[ OK ] Starting systemd-tmpfiles-setup-dev.service - Create Static Device Nodes in /dev...
[ OK ] Finished systemd-tmpfiles-setup-dev.service - Create Static Device Nodes in /dev.
[ OK ] Starting systemd-udev.service - Rule-based Manager for Device Events and Files...
[ OK ] Finished systemd-sysctl.service - Apply Kernel Variables.
[ OK ] Started systemd-sysd.service - Device-Mapper Multipath Device Controller.
[ OK ] Reached target local-fs-pre.target - Preparation for Local File Systems.
[ OK ] Mounting snap-core22-2292.mount - Mount unit for core22, revision 2292...
[ OK ] Mounting snap-snapd-25935.mount - Mount unit for snapd, revision 25935...
[ OK ] Mounting snap-subiquity-7020.mount - Mount unit for subiquity, revision 7020...
[ OK ] Mounting tmp.mount - /tmp...
[ OK ] Finished systemd-udev-trigger.service - Coldplug All udev Devices.
[ OK ] Mounted tmp.mount - /tmp.
[ OK ] Mounted snap-snapd-25935.mount - Mount unit for snapd, revision 25935.
[ OK ] Mounted snap-subiquity-7020.mount - Mount unit for subiquity, revision 7020.
[ OK ] Mounted snap-core22-2292.mount - Mount unit for core22, revision 2292.
[ OK ] Reached target snapd.mounts.target - Mounted snaps.
[ OK ] Reached target local-fs.target - Local File Systems.
[ OK ] Listening on systemd-sysext-socket - System Extension Image Management (Varlink).
[ OK ] Starting console-setup.service - Set console font and keymap...
[ OK ] Starting finalrd.service - Create final runtime dir for shutdown pivot root...
[ OK ] Starting ldconfig.service - Rebuild Dynamic Linker Cache...
[ OK ] Starting plymouth-read-write.service - Tell Plymouth To Write Out Runtime Data...
[ OK ] Starting snapd.apparmor.service - Load Apparmor profiles managed internally by snapd...
[ OK ] Starting systemd-binfmt.service - Set Up Additional Binary Formats...
[ OK ] Starting systemd-tmpfiles-setup.service - Create Volatile Files and Directories...
[ OK ] Starting ufw.service - Uncomplicated firewall...
[ OK ] Started systemd-udevdev.service - Rule-based Manager for Device Events and Files.
[ OK ] Finished finalrd.service - Create final runtime dir for shutdown pivot root.
[ OK ] Finished plymouth-read-write.service - Tell Plymouth To Write Out Runtime Data.
[ OK ] Mounting proc-sys-fs-binfmt_misc.mount - Arbitrary Executable File Formats File System...
[ OK ] Started systemd-ask-password-console.path - Dispatch Password Requests to Console Directory Watch.
[ OK ] Reached target cryptsetup.target - Local Encrypted Volumes.
[ OK ] Mounted proc-sys-fs-binfmt_misc.mount - Arbitrary Executable File Formats File System.
[ OK ] Finished systemd-binfmt.service - Set Up Additional Binary Formats.
[ OK ] Finished ufw.service - Uncomplicated firewall.
[ OK ] Finished systemd-sysd.slice - Slice /system/systemd-backlight.
[ OK ] Created slice systemd-sysd.slice: /system/systemd-backlight.slice - Slice /system/systemd-backlight.
[ OK ] Starting systemd-backlight@ds:tpacpi:kbd-backlight.service - Load/Save Screen Backlight Brightness of leds:tpacpi:kbd-backlight.
[ OK ] Finished systemd-backlight@ds:tpacpi:kbd-backlight.service - Load/Save Screen Backlight Brightness of leds:tpacpi:kbd-backlight.
[ OK ] Finished systemd-tmpfiles-setup.service - Create Volatile Files and Directories.
[ OK ] Starting systemd-journal-catalog-update.service - Rebuild Journal Catalog...
[ OK ] Starting systemd-resolved.service - Network Name Resolution...
[ OK ] Starting systemd-timesyncd.service - Network Time Synchronization...
[ OK ] Starting systemd-sysd.slice - Slice /system/systemd-backlight.slice - Slice /system/systemd-backlight.
[ OK ] Starting systemd-sysd.slice - Slice /system/systemd-backlight.slice - Slice /system/systemd-backlight.
```

Willkommen! Bienvenue! Welcome! Добро пожаловать! Welkom!

Use UP, DOWN and ENTER keys to select your language.

- [Asturianu
- [Bahasa Indonesia
- [Català
- [Deutsch
- [English
- [English (UK)
- [Español
- [Français
- [Galego
- [Hrvatski
- [Latviski
- [Lietuviškai
- [Magyar
- [Nederlands
- [Norsk bokmål
- [Occitan
- [Polski
- [Português
- [Suomi
- [Svenska
- [Čeština
- [Ελληνικά
- [Беларуская
- [Русский
- [Српски
- [Українська

Keyboard configuration

Please select your keyboard layout below, or select "Identify keyboard" to detect your layout automatically.

Layout: [English (US) ▼]

Variant: [English (US) ▼]

[Identify keyboard]

Choose the type of installation

• • Choose the base for the installation.

☒ (X) Ubuntu Server

The default install contains a curated set of packages that provide a comfortable experience for

☐ () Ubuntu Server (minimized)

This version has been customized to have a small runtime footprint in environments where humans

Additional options

☐ [] Search for third-party drivers

This software is subject to license terms included with its documentation. Some is proprietary. real-time kernel.

Network configuration

Configure at least one interface this server can use to talk to other machines, and which preferably provides

NAME	TYPE	NOTES
[enp0s31f6	eth	- ▶]
disabled	autoconfiguration failed	
fc:45:96:ac:15:9c / Intel Corporation / Ethernet Connection I219-V		
[eth0	eth	-]
disabled		
9c:a2:f4:c6:3d:5d / TP-Link / UE300 10/100/1000 LAN (ethernet mode) [Realtek RTL8153]		

[wlp4s0	wlan	not connected ▶]
disabled		
f4:96:34:07:cc:86 / Intel Corporation / Wireless 8260		

[Create bond ▶]

Network configuration

- Configure at least one interface this server can use to talk to other machines, and which preferably

NAME	TYPE	NOTES
[enp0s31f6	eth	-]
disabled	autoconfiguration failed	
fc:45:96:ac:15:9c / Intel Corporation / Ethernet Connection I219-V		
[eth0	eth	-]
disabled		
9c:a2:f4:c6:3d:5d / TP-Link / UE300 10		
[wlp4s0	wlan	not connected]
disabled		
f4:96:34:07:cc:86 / Intel Corporation / Wireless 8260		
[Create bond]		

(close)
Info
Edit IPv4
Edit IPv6
Add a VLAN tag

et mode) [Realtek RTL8153]

IPv4 Method:

Automatic (DHCP)
Manual
Disabled

 nfiguration

[Save]
[Cancel]

Edit eth0 IPv4 configuration

IPv4 Method: [Manual ▼]

Subnet: 10.0.254.0/24

Address: 10.0.254.2

Gateway: 10.0.254.1

Name servers: 10.0.254.1
IP addresses, comma separatedSearch domains:
Domains, comma separated[Save]
[Cancel]

Network configuration

Configure at least one interface this server can use to talk to other machines, and which preferably provides sufficient access for updates.

NAME	TYPE	NOTES
[enp0s31f6	eth	▶]
disabled	autoconfiguration failed	
fc:45:96:ac:15:9c / Intel Corporation / Ethernet Connection I219-V		
[eth0	eth	▶]
static	10.0.254.2/24	
9c:a2:f4:c6:3d:5d / TP-Link / UE900 10/100/1000 LAN (ethernet mode) [Realtek RTL8153]		
[wlp1c0	wlan	not connected ▶]
disabled		
f4:96:94:07:cc:06 / Intel Corporation / Wireless 8260		
[Create bond ▶]		

Wifi support packages will be installed in the target system.

[continue without network]
[Back]

Proxy configuration

If this system requires a proxy to connect to the Internet, enter its details here.

Proxy address:

If you need to use a HTTP proxy to access the outside world, enter the proxy information here. Otherwise, leave this blank.

The proxy information should be given in the standard form of "http://[[user][:pass]@host[:port]]/".

[Done
[Back]

Ubuntu archive mirror configuration

If you use an alternative mirror for Ubuntu, enter its details here.

Mirror address: <http://archive.ubuntu.com/ubuntu/>

You may provide an archive mirror to be used instead of the default.

The mirror location cannot be checked because no network has been configured.

[Done
[Back]

Checking for installer update....

Contacting the snap store to check if a new version of the installer is available.

[--]

[Continue without updating]
[Back]

Guided storage configuration

Configure a guided storage layout, or create a custom one:

☒ Use an entire disk

[SanDisk_SD8SN8U128G1001_171420804427

local disk 119.242G ▾]

☒ Set up this disk as an LVM group

☐ Encrypt the LVM group with LUKS



Passphrase:

Confirm passphrase:

☐ Also create a recovery key

The key will be stored as ~/recovery-key.txt in the live system and will be

☐ Custom storage layout

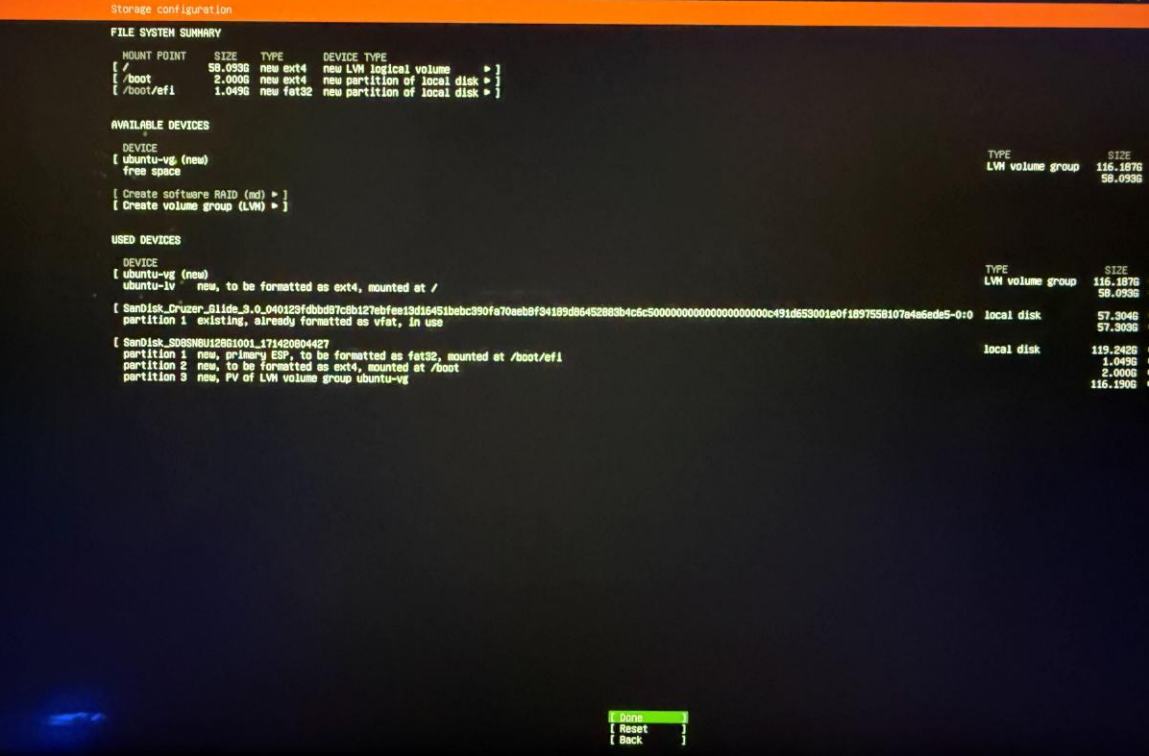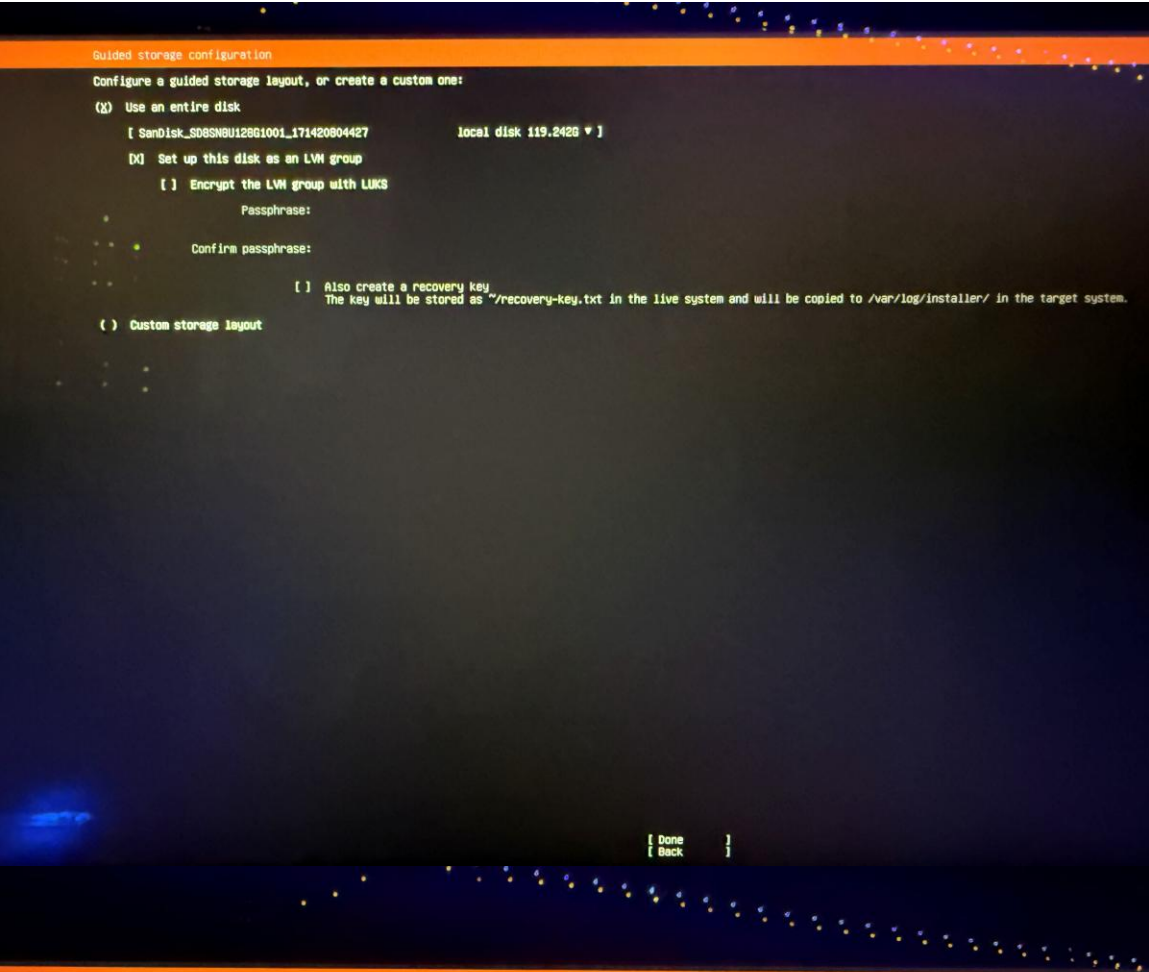

Profile configuration

Enter the username and password you will use to log in to the system. You can configure SSH access on a later screen, but a password is still needed for sudo.

Your name:

Your server's name:

The name it uses when it talks to other computers.

Pick a username:

Choose a password:

Confirm your password:

Profile configuration

Enter the username and password you will use to log in to the system. You can configure SSH access on a later screen

Your name:

Your server's name:

radius-server

The name it uses when it talks to other computers.

Pick a username:

management

Choose a password:

aaaaaaaa

Confirm your password:

aaaaaaaa

Profile configuration

Enter the username and password you will use to log in to the system. You can configure SSH access on a later screen, but a password is still needed for sudo.

Your name:

Your servers name:

radius-server

The name it uses when it talks to other computers.

Pick a username:

radiusclient

Choose a password:

Confirm your password:

Done

Upgrade to Ubuntu Pro

An internet connection is required to enable Ubuntu Pro.

[About Ubuntu Pro ►]

() Enable Ubuntu Pro

(X) Skip Ubuntu Pro setup for now

Once you are connected to the internet, you can enable Ubuntu Pro using the 'pro attach' command.

Upgrade to Ubuntu Pro

[Help]

An Internet connection is required to enable Ubuntu Pro.

[About Ubuntu Pro ►]

() Enable Ubuntu Pro

☒ Skip Ubuntu Pro setup for now

Once you are connected to the Internet, you can enable Ubuntu Pro using the 'pro attach' command.

[continue]
[Back]

SSH configuration

You can choose to install the OpenSSH server package to enable secure remote access to your server.

☒ Install OpenSSH server

☒ Allow password authentication over SSH

[Import SSH key ►]

AUTHORIZED KEYS

No authorized key

[Done]
[Back]

Third-party drivers


No applicable third-party drivers are available locally.

Note: Once the installation has finished and you are connected to a network, you can search again for

```
$ ubuntu-drivers list --recommended --gpgpu
```

```
curtin command in-target
executing curtin install curthooks step
curtin command install
  configuring installed system
  running 'curtin curthooks'
  curtin command curthooks
    configuring apt configuring apt
    installing missing packages
    Installing packages on target system: ['efibootmgr', 'grub-efi-amd64', 'grub-efi-amd64-signed', 'shim-signed']
    configuring iscsi service
    configuring raid (mdadm) service
    configuring NVMe over TCP
    installing kernel
    setting up swap
    apply networking config
    writing etc/fstab
    configuring multipath
    updating packages on target system
    configuring pollinate user-agent on target
    updating initramfs configuration
    configuring target system bootloader
    installing grub to target devices
    copying metadata from /cdrom
final system configuration
calculating extra packages to install
installing wpasupplicant
retrieving wpasupplicant
curtin command system-install
unpacking wpasupplicant
curtin command system-install
installing openssh-server
retrieving openssh-server
curtin command system-install
unpacking openssh-server
curtin command system-install
configuring cloud-init
restoring apt configuration
subiquity/Late/run:
```

[View full log]
[Reboot Now]

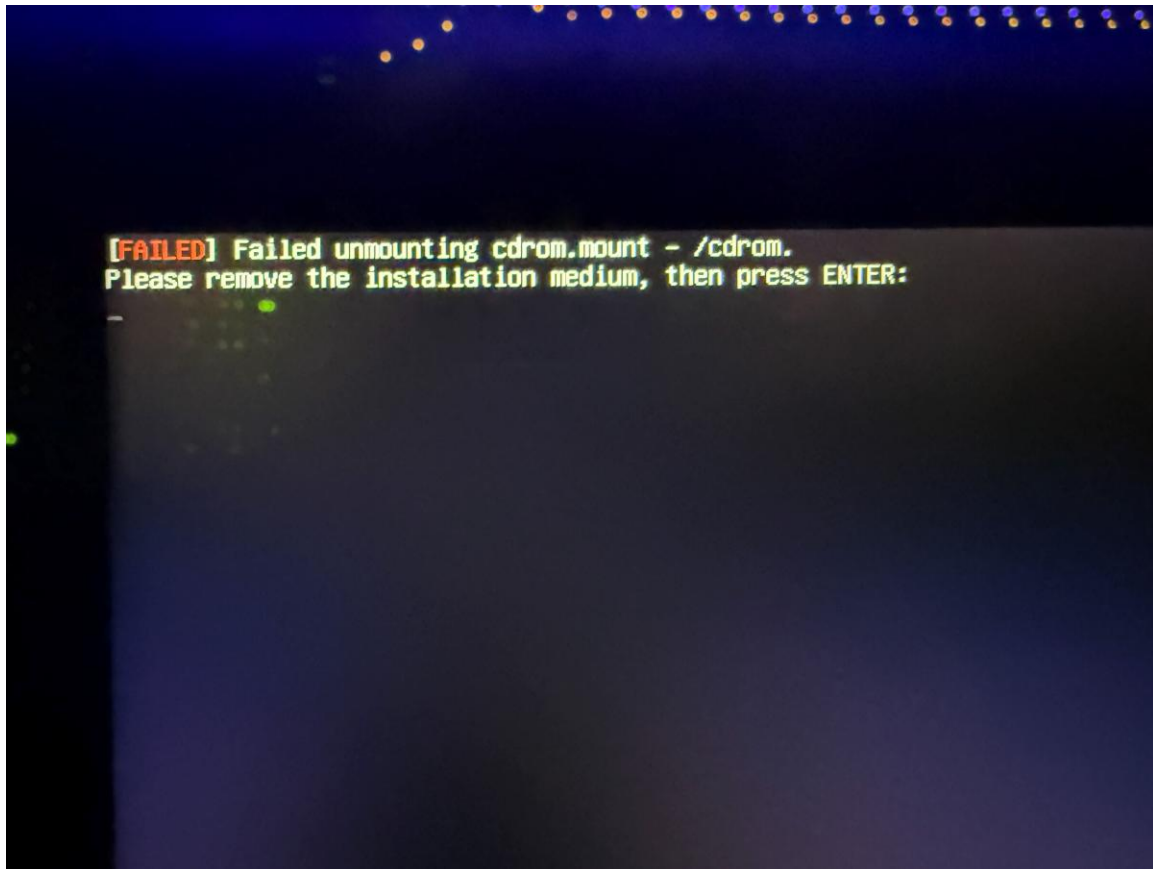

Configuration Files

FortiGate 40F Configuration

```
#config-version=FGT40F-7.6.6-FW-build3652-  
260127:opmode=0:vdom=0:user=admin  
#conf_file_ver=255881266652648  
#buildno=3652  
#global_vdom=1  
config system global  
    set alias "FortiGate-40F"  
    set gui-auto-upgrade-setup-warning disable  
    set hostname "FortiGate-40F"  
    set switch-controller enable  
    set timezone "US/Pacific"  
end  
config system accprofile  
    edit "prof_admin"  
        set secfabgrp read-write  
        set ftviewgrp read-write  
        set authgrp read-write  
        set sysgrp read-write
```

```
        set netgrp read-write
        set loggrp read-write
        set fwgrp read-write
        set vpngrp read-write
        set utmgrp read-write
        set wifi read-write
        set cli-get enable
        set cli-show enable
        set cli-exec enable
        set cli-config enable
    next
end
config system np6xlite
    edit "np6xlite_0"
    next
end
config system interface
    edit "wan"
        set vdom "root"
        set mode dhcp
        set allowaccess ping
        set type physical
        set role wan
        set snmp-index 1
    next
    edit "lan1"
        set vdom "root"
        set ip 192.168.1.254 255.255.255.0
        set allowaccess ping https ssh http
        set type physical
        set alias "Management"
        set snmp-index 2
    next
    edit "lan2"
        set vdom "root"
        set type physical
        set snmp-index 3
    next
    edit "lan3"
        set vdom "root"
        set type physical
        set snmp-index 4
    next
    edit "a"
        set vdom "root"
        set allowaccess ping fabric
```



```
        set type physical
        set device-identification enable
        set lldp-transmission enable
        set role lan
        set snmp-index 5
next
edit "modem"
    set vdom "root"
    set mode pppoe
    set status down
    set type physical
    set snmp-index 6
next
edit "naf.root"
    set vdom "root"
    set type tunnel
    set src-check disable
    set snmp-index 7
next
edit "l2t.root"
    set vdom "root"
    set type tunnel
    set snmp-index 8
next
edit "ssl.root"
    set vdom "root"
    set type tunnel
    set alias "Agentless VPN interface"
    set snmp-index 9
next
edit "lan"
    set vdom "root"
    set ip 10.0.0.1 255.255.255.0
    set allowaccess ping
    set type hard-switch
    set stp enable
    set role lan
    set snmp-index 10
next
edit "default-mesh"
    set vdom "root"
    set type vap-switch
    set role lan
    set snmp-index 11
next
edit "fortilink"
```

```
    set vdom "root"
    set fortilink enable
    set ip 10.255.1.1 255.255.255.0
    set allowaccess ping fabric
    set type aggregate
    set lldp-reception enable
    set lldp-transmission enable
    set snmp-index 12
next
edit "Vlan24"
    set vdom "root"
    set ip 10.0.24.1 255.255.255.0
    set allowaccess ping fabric
    set device-identification enable
    set role lan
    set snmp-index 13
    set ip-managed-by-fortiipam disable
    set interface "a"
    set vlanid 24
next
edit "Vlan50"
    set vdom "root"
    set ip 10.0.50.1 255.255.255.0
    set allowaccess ping fabric
    set device-identification enable
    set role lan
    set snmp-index 14
    set ip-managed-by-fortiipam disable
    set interface "a"
    set vlanid 50
next
edit "Vlan51"
    set vdom "root"
    set ip 10.0.51.1 255.255.255.0
    set allowaccess ping fabric
    set device-identification enable
    set role lan
    set snmp-index 15
    set ip-managed-by-fortiipam disable
    set interface "a"
    set vlanid 51
next
edit "Vlan99"
    set vdom "root"
    set ip 10.0.99.1 255.255.255.0
    set allowaccess ping fabric
```

```
        set device-identification enable
        set role lan
        set snmp-index 16
        set ip-managed-by-fortiipam disable
        set interface "a"
        set vlanid 99
    next
    edit "Hermes-2.4GHz"
        set vdom "root"
        set type vap-switch
        set role lan
        set snmp-index 17
        set ip-managed-by-fortiipam disable
    next
    edit "Hermes-5GHz"
        set vdom "root"
        set type vap-switch
        set alias "b"
        set role lan
        set snmp-index 18
        set ip-managed-by-fortiipam disable
    next
    edit "Server lan"
        set vdom "root"
        set ip 10.0.254.1 255.255.255.0
        set allowaccess ping
        set type hard-switch
        set device-identification enable
        set lldp-transmission enable
        set role lan
        set snmp-index 19
        set ip-managed-by-fortiipam disable
    next
    edit "5GHz-Enterprise"
        set vdom "root"
        set type vap-switch
        set alias "b"
        set role lan
        set snmp-index 20
        set ip-managed-by-fortiipam disable
    next
end
config system physical-switch
    edit "sw0"
        set age-val 0
    next
```

```
end
config system virtual-switch
  edit "lan"
    set physical-switch "sw0"
    config port
      edit "lan2"
      next
    end
  next
  edit "Server lan"
    set physical-switch "sw0"
    config port
      edit "lan3"
      next
    end
  next
end
config system password-policy
  set status enable
end
config system custom-language
  edit "en"
    set filename "en"
  next
  edit "fr"
    set filename "fr"
  next
  edit "sp"
    set filename "sp"
  next
  edit "pg"
    set filename "pg"
  next
  edit "x-sjis"
    set filename "x-sjis"
  next
  edit "big5"
    set filename "big5"
  next
  edit "GB2312"
    set filename "GB2312"
  next
  edit "euc-kr"
    set filename "euc-kr"
  next
end
```

```
config system admin
  edit "admin"
    set vdom "root"
    set old-password ENC
SH2aRKROrFbQ3N4ryWvZy3xZ+EvyFv8/3Biy1+7FEvyB3Ue1PdNloU0zz99Sz8=
    set accprofile "super_admin"
  config gui-dashboard
    edit 1
      set name "Status"
      set vdom "root"
      set permanent enable
    config widget
      edit 1
        set width 1
        set height 1
      next
      edit 2
        set type licinfo
        set x-pos 1
        set width 1
        set height 1
      next
      edit 3
        set type forticloud
        set x-pos 2
        set width 1
        set height 1
      next
      edit 4
        set type security-fabric
        set x-pos 3
        set width 1
        set height 1
      next
      edit 5
        set type admins
        set x-pos 4
        set width 1
        set height 1
      next
      edit 6
        set type cpu-usage
        set x-pos 5
        set width 2
        set height 1
      next
```

```
        edit 7
            set type memory-usage
            set x-pos 6
            set width 2
            set height 1
        next
        edit 8
            set type sessions
            set x-pos 7
            set width 2
            set height 1
        next
    end
next
edit 2
    set name "Security"
    set vdom "root"
    config widget
        edit 1
            set type fortiview
            set width 2
            set height 1
            set fortiview-type "compromisedHosts"
            set fortiview-sort-by "verdict"
            set fortiview-timeframe "hour"
            set fortiview-visualization "table"
        next
        edit 2
            set type fortiview
            set x-pos 1
            set width 2
            set height 1
            set fortiview-type "threats"
            set fortiview-sort-by "threatLevel"
            set fortiview-timeframe "hour"
            set fortiview-visualization "table"
        next
        edit 3
            set type device-vulnerability
            set x-pos 2
            set width 2
            set height 1
            set timeframe latest
        next
    end
next
```

```

edit 3
  set name "Network"
  set vdom "root"
  config widget
    edit 1
      set type routing
      set width 2
      set height 1
      set router-view-type "staticdynamic"
    next
    edit 2
      set type dhcp
      set x-pos 1
      set width 2
      set height 1
    next
    edit 3
      set type virtual-wan
      set x-pos 2
      set width 2
      set height 1
    next
    edit 4
      set type ipsec-vpn
      set x-pos 3
      set width 2
      set height 1
    next
  end
next
edit 4
  set name "WiFi"
  set vdom "root"
  config widget
    edit 1
      set type ap-status
      set width 2
      set height 1
    next
    edit 2
      set type channel-utilization
      set x-pos 1
      set width 2
      set height 1
      set wifi-band "both"
    next
  end

```



```
        edit 3
            set type clients-by-ap
            set x-pos 2
            set width 2
            set height 1
            set wifi-band "both"
        next
        edit 4
            set type client-signal-strength
            set x-pos 3
            set width 2
            set height 1
            set wifi-band "both"
        next
        edit 5
            set type rogue-ap
            set x-pos 4
            set width 2
            set height 1
        next
        edit 6
            set type historical-clients
            set x-pos 5
            set width 2
            set height 1
            set timeframe 1-hour
            set wifi-band "both"
        next
        edit 7
            set type interfering-ssids
            set x-pos 6
            set width 2
            set height 1
            set wifi-band "both"
        next
        edit 8
            set type wifi-login-failures
            set x-pos 7
            set width 2
            set height 1
        next
    end
next
edit 5
    set name "FortiView Sources"
    set vdom "root"
```

```

set layout-type standalone
set csf disable
config widget
  edit 1
    set type fortiview
    set width 6
    set height 3
    set fortiview-type "source"
    set fortiview-sort-by "bytes"
    set fortiview-timeframe "hour"
    set fortiview-visualization "table"
  next
end
next
edit 6
  set name "FortiView Destinations"
  set vdom "root"
  set layout-type standalone
  set csf disable
  config widget
    edit 1
      set type fortiview
      set width 6
      set height 3
      set fortiview-type "destination"
      set fortiview-sort-by "bytes"
      set fortiview-timeframe "hour"
      set fortiview-visualization "table"
    next
  end
next
edit 7
  set name "FortiView Applications"
  set vdom "root"
  set layout-type standalone
  set csf disable
  config widget
    edit 1
      set type fortiview
      set width 6
      set height 3
      set fortiview-type "application"
      set fortiview-sort-by "bytes"
      set fortiview-timeframe "hour"
      set fortiview-visualization "table"
    next
  end

```

```

        end
    next
    edit 8
        set name "FortiView Web Sites"
        set vdom "root"
        set layout-type standalone
        set csf disable
        config widget
            edit 1
                set type fortiview
                set width 6
                set height 3
                set fortiview-type "website"
                set fortiview-sort-by "sessions"
                set fortiview-timeframe "hour"
                set fortiview-visualization "table"
            next
        end
    next
    edit 9
        set name "FortiView Policies"
        set vdom "root"
        set layout-type standalone
        set csf disable
        config widget
            edit 1
                set type fortiview
                set width 6
                set height 3
                set fortiview-type "policy"
                set fortiview-sort-by "bytes"
                set fortiview-timeframe "hour"
                set fortiview-visualization "table"
            next
        end
    next
    edit 10
        set name "FortiView Sessions"
        set vdom "root"
        set layout-type standalone
        set csf disable
        config widget
            edit 1
                set type fortiview
                set width 6
                set height 3

```

```

        set fortiview-type "realtimeSessions"
        set fortiview-timeframe "realtime"
        set fortiview-visualization "table"
    next
end
next
end
    set gui-default-dashboard-template "minimal"
    set password ENC
PB2QsDYzhCuh7PkLXEzJP1LYaXax2Pa63C2bYyyGykhNZenLtGR2fLqiJLn+tdz8Y
AZZjjcQ3RQr4lRKx7I/5s5MwV2FdIemwLwnymbfZSoJWk=
next
end
config system sso-admin
end
config system ha
    set override disable
end
config system dns
    set primary 96.45.45.45
    set secondary 96.45.46.46
    set protocol dot
    set server-hostname "globalsdns.fortinet.net"
end
config system replacemsg-image
    edit "logo_fnet"
    next
    edit "logo_fguard_wf"
    next
    edit "logo_v3_fguard_app"
    next
end
config system replacemsg mail "partial"
end
config system replacemsg http "url-block"
end
config system replacemsg http "urlfilter-err"
end
config system replacemsg http "infcache-block"
end
config system replacemsg http "http-contenttypeblock"
end
config system replacemsg http "https-invalid-cert-block"
end
config system replacemsg http "https-untrusted-cert-block"
end

```

```
config system replacemsg http "https-blocklisted-cert-block"
end
config system replacemsg http "https-ech-block"
end
config system replacemsg http "switching-protocols-block"
end
config system replacemsg http "http-antiphish-block"
end
config system replacemsg http "videofilter-block"
end
config system replacemsg http "videofilter-block-text"
end
config system replacemsg fortiguard-wf "ftgd-block"
end
config system replacemsg fortiguard-wf "ftgd-ovrd"
end
config system replacemsg fortiguard-wf "ftgd-quota"
end
config system replacemsg fortiguard-wf "ftgd-warning"
end
config system replacemsg spam "ipblocklist"
end
config system replacemsg spam "smtp-spam-dnsbl"
end
config system replacemsg spam "smtp-spam-feip"
end
config system replacemsg spam "smtp-spam-helo"
end
config system replacemsg spam "smtp-spam-emailblock-to"
end
config system replacemsg spam "smtp-spam-emailblock-from"
end
config system replacemsg spam "smtp-spam-emailblock-subject"
end
config system replacemsg spam "smtp-spam-mimeheader"
end
config system replacemsg spam "reversedns"
end
config system replacemsg spam "smtp-spam-ase"
end
config system replacemsg spam "submit"
end
config system replacemsg alertmail "alertmail-virus"
end
config system replacemsg alertmail "alertmail-block"
end
```

```
config system replacemsg alertmail "alertmail-nids-event"
end
config system replacemsg alertmail "alertmail-crit-event"
end
config system replacemsg alertmail "alertmail-disk-full"
end
config system replacemsg admin "pre_admin-disclaimer-text"
end
config system replacemsg admin "post_admin-disclaimer-text"
end
config system replacemsg auth "auth-disclaimer-page-1"
end
config system replacemsg auth "auth-disclaimer-page-2"
end
config system replacemsg auth "auth-disclaimer-page-3"
end
config system replacemsg auth "auth-reject-page"
end
config system replacemsg auth "auth-login-page"
end
config system replacemsg auth "auth-login-failed-page"
end
config system replacemsg auth "auth-token-login-page"
end
config system replacemsg auth "auth-token-login-failed-page"
end
config system replacemsg auth "auth-success-msg"
end
config system replacemsg auth "auth-challenge-page"
end
config system replacemsg auth "auth-keepalive-page"
end
config system replacemsg auth "auth-portal-page"
end
config system replacemsg auth "auth-password-page"
end
config system replacemsg auth "auth-fortitoken-page"
end
config system replacemsg auth "auth-next-fortitoken-page"
end
config system replacemsg auth "auth-email-token-page"
end
config system replacemsg auth "auth-sms-token-page"
end
config system replacemsg auth "auth-email-harvesting-page"
end
```

```
config system replacemsg auth "auth-email-failed-page"
end
config system replacemsg auth "auth-cert-passwd-page"
end
config system replacemsg auth "auth-guest-print-page"
end
config system replacemsg auth "auth-guest-email-page"
end
config system replacemsg auth "auth-success-page"
end
config system replacemsg auth "auth-block-notification-page"
end
config system replacemsg auth "auth-quarantine-page"
end
config system replacemsg auth "auth-qtn-reject-page"
end
config system replacemsg auth "auth-saml-page"
end
config system replacemsg nac-quar "nac-quar-virus"
end
config system replacemsg nac-quar "nac-quar-dos"
end
config system replacemsg nac-quar "nac-quar-ips"
end
config system replacemsg nac-quar "nac-quar-dlp"
end
config system replacemsg nac-quar "nac-quar-admin"
end
config system replacemsg nac-quar "nac-quar-app"
end
config system replacemsg traffic-quota "per-ip-shaper-block"
end
config system replacemsg utm "virus-html"
end
config system replacemsg utm "client-virus-html"
end
config system replacemsg utm "virus-text"
end
config system replacemsg utm "dlp-html"
end
config system replacemsg utm "dlp-text"
end
config system replacemsg utm "appblk-html"
end
config system replacemsg utm "ipsblk-html"
end
```



```
config system replacemsg utm "virpatchblk-html"
end
config system replacemsg utm "ipsfail-html"
end
config system replacemsg utm "exe-text"
end
config system replacemsg utm "outbreak-prevention-html"
end
config system replacemsg utm "outbreak-prevention-text"
end
config system replacemsg utm "external-blocklist-html"
end
config system replacemsg utm "external-blocklist-text"
end
config system replacemsg utm "malware-stream-html"
end
config system replacemsg utm "malware-stream-text"
end
config system replacemsg utm "ems-threat-feed-html"
end
config system replacemsg utm "ems-threat-feed-text"
end
config system replacemsg utm "file-filter-html"
end
config system replacemsg utm "file-filter-text"
end
config system replacemsg utm "file-size-text"
end
config system replacemsg utm "transfer-size-text"
end
config system replacemsg utm "internal-error-text"
end
config system replacemsg utm "archive-block-html"
end
config system replacemsg utm "archive-block-text"
end
config system replacemsg utm "file-av-fail-text"
end
config system replacemsg utm "transfer-av-fail-text"
end
config system replacemsg utm "banned-word-html"
end
config system replacemsg utm "banned-word-text"
end
config system replacemsg utm "block-html"
end
```

```
config system replacemsg utm "block-text"
end
config system replacemsg utm "decompress-limit-text"
end
config system replacemsg utm "dlp-subject-text"
end
config system replacemsg utm "file-size-html"
end
config system replacemsg utm "client-file-size-html"
end
config system replacemsg utm "inline-scan-timeout-html"
end
config system replacemsg utm "inline-scan-timeout-text"
end
config system replacemsg utm "inline-scan-error-html"
end
config system replacemsg utm "fortidata-query-error-html"
end
config system replacemsg utm "fortidata-query-error-text"
end
config system replacemsg utm "inline-scan-error-text"
end
config system replacemsg automation "automation-email"
end
config system snmp sysinfo
end
config system autoupdate schedule
    set time 01:240
end
config system central-management
    set type fortiguard
end
config firewall internet-service-name
    edit "Google-Other"
        set internet-service-id 65536
    next
    edit "Google-Web"
        set internet-service-id 65537
    next
    edit "Google-ICMP"
        set internet-service-id 65538
    next
    edit "Google-DNS"
        set internet-service-id 65539
    next
    edit "Google-Outbound_Email"
```

```
        set internet-service-id 65540
next
edit "Google-SSH"
        set internet-service-id 65542
next
edit "Google-FTP"
        set internet-service-id 65543
next
edit "Google-NTP"
        set internet-service-id 65544
next
edit "Google-Inbound_Email"
        set internet-service-id 65545
next
edit "Google-LDAP"
        set internet-service-id 65550
next
edit "Google-NetBIOS.Session.Service"
        set internet-service-id 65551
next
edit "Google-RTMP"
        set internet-service-id 65552
next
edit "Google-NetBIOS.Name.Service"
        set internet-service-id 65560
next
edit "Google-Google.Cloud"
        set internet-service-id 65641
next
edit "Google-Google.Bot"
        set internet-service-id 65643
next
edit "Google-Gmail"
        set internet-service-id 65646
next
edit "Meta-Other"
        set internet-service-id 131072
next
edit "Meta-Web"
        set internet-service-id 131073
next
edit "Meta-ICMP"
        set internet-service-id 131074
next
edit "Meta-DNS"
        set internet-service-id 131075
```

```
next
edit "Meta-Outbound_Email"
    set internet-service-id 131076
next
edit "Meta-SSH"
    set internet-service-id 131078
next
edit "Meta-FTP"
    set internet-service-id 131079
next
edit "Meta-NTP"
    set internet-service-id 131080
next
edit "Meta-Inbound_Email"
    set internet-service-id 131081
next
edit "Meta-LDAP"
    set internet-service-id 131086
next
edit "Meta-NetBIOS.Session.Service"
    set internet-service-id 131087
next
edit "Meta-RTMP"
    set internet-service-id 131088
next
edit "Meta-NetBIOS.Name.Service"
    set internet-service-id 131096
next
edit "Meta-Whatsapp"
    set internet-service-id 131184
next
edit "Meta-Instagram"
    set internet-service-id 131189
next
edit "Apple-Other"
    set internet-service-id 196608
next
edit "Apple-Web"
    set internet-service-id 196609
next
edit "Apple-ICMP"
    set internet-service-id 196610
next
edit "Apple-DNS"
    set internet-service-id 196611
next
```

```
edit "Apple-Outbound_Email"
    set internet-service-id 196612
next
edit "Apple-SSH"
    set internet-service-id 196614
next
edit "Apple-FTP"
    set internet-service-id 196615
next
edit "Apple-NTP"
    set internet-service-id 196616
next
edit "Apple-Inbound_Email"
    set internet-service-id 196617
next
edit "Apple-LDAP"
    set internet-service-id 196622
next
edit "Apple-NetBIOS.Session.Service"
    set internet-service-id 196623
next
edit "Apple-RTMP"
    set internet-service-id 196624
next
edit "Apple-NetBIOS.Name.Service"
    set internet-service-id 196632
next
edit "Apple-App.Store"
    set internet-service-id 196723
next
edit "Apple-APNs"
    set internet-service-id 196747
next
edit "Yahoo-Other"
    set internet-service-id 262144
next
edit "Yahoo-Web"
    set internet-service-id 262145
next
edit "Yahoo-ICMP"
    set internet-service-id 262146
next
edit "Yahoo-DNS"
    set internet-service-id 262147
next
edit "Yahoo-Outbound_Email"
```

```
        set internet-service-id 262148
next
edit "Yahoo-SSH"
        set internet-service-id 262150
next
edit "Yahoo-FTP"
        set internet-service-id 262151
next
edit "Yahoo-NTP"
        set internet-service-id 262152
next
edit "Yahoo-Inbound_Email"
        set internet-service-id 262153
next
edit "Yahoo-LDAP"
        set internet-service-id 262158
next
edit "Yahoo-NetBIOS.Session.Service"
        set internet-service-id 262159
next
edit "Yahoo-RTMP"
        set internet-service-id 262160
next
edit "Yahoo-NetBIOS.Name.Service"
        set internet-service-id 262168
next
edit "Microsoft-Other"
        set internet-service-id 327680
next
edit "Microsoft-Web"
        set internet-service-id 327681
next
edit "Microsoft-ICMP"
        set internet-service-id 327682
next
edit "Microsoft-DNS"
        set internet-service-id 327683
next
edit "Microsoft-Outbound_Email"
        set internet-service-id 327684
next
edit "Microsoft-SSH"
        set internet-service-id 327686
next
edit "Microsoft-FTP"
        set internet-service-id 327687
```

```
next
edit "Microsoft-NTP"
    set internet-service-id 327688
next
edit "Microsoft-Inbound_Email"
    set internet-service-id 327689
next
edit "Microsoft-LDAP"
    set internet-service-id 327694
next
edit "Microsoft-NetBIOS.Session.Service"
    set internet-service-id 327695
next
edit "Microsoft-RTMP"
    set internet-service-id 327696
next
edit "Microsoft-NetBIOS.Name.Service"
    set internet-service-id 327704
next
edit "Microsoft-Skype_Teams"
    set internet-service-id 327781
next
edit "Microsoft-Office365"
    set internet-service-id 327782
next
edit "Microsoft-Azure"
    set internet-service-id 327786
next
edit "Microsoft-Bing.Bot"
    set internet-service-id 327788
next
edit "Microsoft-Outlook"
    set internet-service-id 327791
next
edit "Microsoft-Microsoft.Update"
    set internet-service-id 327793
next
edit "Microsoft-Dynamics"
    set internet-service-id 327837
next
edit "Microsoft-WNS"
    set internet-service-id 327839
next
edit "Microsoft-Office365.Published"
    set internet-service-id 327880
next
```

```
edit "Microsoft-Intune"
    set internet-service-id 327886
next
edit "Microsoft-Office365.Published.Optimize"
    set internet-service-id 327902
next
edit "Microsoft-Office365.Published.Allow"
    set internet-service-id 327903
next
edit "Microsoft-Office365.Published.USGOV"
    set internet-service-id 327917
next
edit "Microsoft-Azure.Monitor"
    set internet-service-id 327958
next
edit "Microsoft-Azure.SQL"
    set internet-service-id 327959
next
edit "Microsoft-Azure.AD"
    set internet-service-id 327960
next
edit "Microsoft-Azure.Data.Factory"
    set internet-service-id 327961
next
edit "Microsoft-Azure.Virtual.Desktop"
    set internet-service-id 327962
next
edit "Microsoft-Azure.Power.BI"
    set internet-service-id 327963
next
edit "Amazon-Other"
    set internet-service-id 393216
next
edit "Amazon-Web"
    set internet-service-id 393217
next
edit "Amazon-ICMP"
    set internet-service-id 393218
next
edit "Amazon-DNS"
    set internet-service-id 393219
next
edit "Amazon-Outbound_Email"
    set internet-service-id 393220
next
edit "Amazon-SSH"
```



```
        set internet-service-id 393222
next
edit "Amazon-FTP"
        set internet-service-id 393223
next
edit "Amazon-NTP"
        set internet-service-id 393224
next
edit "Amazon-Inbound_Email"
        set internet-service-id 393225
next
edit "Amazon-LDAP"
        set internet-service-id 393230
next
edit "Amazon-NetBIOS.Session.Service"
        set internet-service-id 393231
next
edit "Amazon-RTMP"
        set internet-service-id 393232
next
edit "Amazon-NetBIOS.Name.Service"
        set internet-service-id 393240
next
edit "Amazon-AWS"
        set internet-service-id 393320
next
edit "Amazon-AWS.WorkSpaces.Gateway"
        set internet-service-id 393403
next
edit "Amazon-Twitch"
        set internet-service-id 393446
next
edit "Amazon-AWS.GovCloud.US"
        set internet-service-id 393452
next
edit "Amazon-AWS.EBS"
        set internet-service-id 393470
next
edit "Amazon-AWS.Cloud9"
        set internet-service-id 393471
next
edit "Amazon-AWS.DynamoDB"
        set internet-service-id 393472
next
edit "Amazon-AWS.Route53"
        set internet-service-id 393473
```

```
next
edit "Amazon-AWS.S3"
    set internet-service-id 393474
next
edit "Amazon-AWS.Kinesis.Video.Streams"
    set internet-service-id 393475
next
edit "Amazon-AWS.Global.Accelerator"
    set internet-service-id 393476
next
edit "Amazon-AWS.EC2"
    set internet-service-id 393477
next
edit "Amazon-AWS.API.Gateway"
    set internet-service-id 393478
next
edit "Amazon-AWS.Chime.Voice.Connector"
    set internet-service-id 393479
next
edit "Amazon-AWS.Connect"
    set internet-service-id 393480
next
edit "Amazon-AWS.CloudFront"
    set internet-service-id 393481
next
edit "Amazon-AWS.CodeBuild"
    set internet-service-id 393482
next
edit "Amazon-AWS.Chime.Meetings"
    set internet-service-id 393483
next
edit "Amazon-AWS.AppFlow"
    set internet-service-id 393484
next
edit "Amazon-Amazon.SES"
    set internet-service-id 393493
next
edit "eBay-Other"
    set internet-service-id 458752
next
edit "eBay-Web"
    set internet-service-id 458753
next
edit "eBay-ICMP"
    set internet-service-id 458754
next
```

```
edit "eBay-DNS"
    set internet-service-id 458755
next
edit "eBay-Outbound_Email"
    set internet-service-id 458756
next
edit "eBay-SSH"
    set internet-service-id 458758
next
edit "eBay-FTP"
    set internet-service-id 458759
next
edit "eBay-NTP"
    set internet-service-id 458760
next
edit "eBay-Inbound_Email"
    set internet-service-id 458761
next
edit "eBay-LDAP"
    set internet-service-id 458766
next
edit "eBay-NetBIOS.Session.Service"
    set internet-service-id 458767
next
edit "eBay-RTMP"
    set internet-service-id 458768
next
edit "eBay-NetBIOS.Name.Service"
    set internet-service-id 458776
next
edit "PayPal-Other"
    set internet-service-id 524288
next
edit "PayPal-Web"
    set internet-service-id 524289
next
edit "PayPal-ICMP"
    set internet-service-id 524290
next
edit "PayPal-DNS"
    set internet-service-id 524291
next
edit "PayPal-Outbound_Email"
    set internet-service-id 524292
next
edit "PayPal-SSH"
```

```
        set internet-service-id 524294
next
edit "PayPal-FTP"
        set internet-service-id 524295
next
edit "PayPal-NTP"
        set internet-service-id 524296
next
edit "PayPal-Inbound_Email"
        set internet-service-id 524297
next
edit "PayPal-LDAP"
        set internet-service-id 524302
next
edit "PayPal-NetBIOS.Session.Service"
        set internet-service-id 524303
next
edit "PayPal-RTMP"
        set internet-service-id 524304
next
edit "PayPal-NetBIOS.Name.Service"
        set internet-service-id 524312
next
edit "Box-Other"
        set internet-service-id 589824
next
edit "Box-Web"
        set internet-service-id 589825
next
edit "Box-ICMP"
        set internet-service-id 589826
next
edit "Box-DNS"
        set internet-service-id 589827
next
edit "Box-Outbound_Email"
        set internet-service-id 589828
next
edit "Box-SSH"
        set internet-service-id 589830
next
edit "Box-FTP"
        set internet-service-id 589831
next
edit "Box-NTP"
        set internet-service-id 589832
```

```
next
edit "Box-Inbound_Email"
    set internet-service-id 589833
next
edit "Box-LDAP"
    set internet-service-id 589838
next
edit "Box-NetBIOS.Session.Service"
    set internet-service-id 589839
next
edit "Box-RTMP"
    set internet-service-id 589840
next
edit "Box-NetBIOS.Name.Service"
    set internet-service-id 589848
next
edit "Salesforce-Other"
    set internet-service-id 655360
next
edit "Salesforce-Web"
    set internet-service-id 655361
next
edit "Salesforce-ICMP"
    set internet-service-id 655362
next
edit "Salesforce-DNS"
    set internet-service-id 655363
next
edit "Salesforce-Outbound_Email"
    set internet-service-id 655364
next
edit "Salesforce-SSH"
    set internet-service-id 655366
next
edit "Salesforce-FTP"
    set internet-service-id 655367
next
edit "Salesforce-NTP"
    set internet-service-id 655368
next
edit "Salesforce-Inbound_Email"
    set internet-service-id 655369
next
edit "Salesforce-LDAP"
    set internet-service-id 655374
next
```

```
edit "Salesforce-NetBIOS.Session.Service"
    set internet-service-id 655375
next
edit "Salesforce-RTMP"
    set internet-service-id 655376
next
edit "Salesforce-NetBIOS.Name.Service"
    set internet-service-id 655384
next
edit "Salesforce-Email.Relay"
    set internet-service-id 655530
next
edit "Dropbox-Other"
    set internet-service-id 720896
next
edit "Dropbox-Web"
    set internet-service-id 720897
next
edit "Dropbox-ICMP"
    set internet-service-id 720898
next
edit "Dropbox-DNS"
    set internet-service-id 720899
next
edit "Dropbox-Outbound_Email"
    set internet-service-id 720900
next
edit "Dropbox-SSH"
    set internet-service-id 720902
next
edit "Dropbox-FTP"
    set internet-service-id 720903
next
edit "Dropbox-NTP"
    set internet-service-id 720904
next
edit "Dropbox-Inbound_Email"
    set internet-service-id 720905
next
edit "Dropbox-LDAP"
    set internet-service-id 720910
next
edit "Dropbox-NetBIOS.Session.Service"
    set internet-service-id 720911
next
edit "Dropbox-RTMP"
```

```
        set internet-service-id 720912
next
edit "Dropbox-NetBIOS.Name.Service"
    set internet-service-id 720920
next
edit "Netflix-Other"
    set internet-service-id 786432
next
edit "Netflix-Web"
    set internet-service-id 786433
next
edit "Netflix-ICMP"
    set internet-service-id 786434
next
edit "Netflix-DNS"
    set internet-service-id 786435
next
edit "Netflix-Outbound_Email"
    set internet-service-id 786436
next
edit "Netflix-SSH"
    set internet-service-id 786438
next
edit "Netflix-FTP"
    set internet-service-id 786439
next
edit "Netflix-NTP"
    set internet-service-id 786440
next
edit "Netflix-Inbound_Email"
    set internet-service-id 786441
next
edit "Netflix-LDAP"
    set internet-service-id 786446
next
edit "Netflix-NetBIOS.Session.Service"
    set internet-service-id 786447
next
edit "Netflix-RTMP"
    set internet-service-id 786448
next
edit "Netflix-NetBIOS.Name.Service"
    set internet-service-id 786456
next
edit "LinkedIn-Other"
    set internet-service-id 851968
```

```
next
edit "LinkedIn-Web"
    set internet-service-id 851969
next
edit "LinkedIn-ICMP"
    set internet-service-id 851970
next
edit "LinkedIn-DNS"
    set internet-service-id 851971
next
edit "LinkedIn-Outbound_Email"
    set internet-service-id 851972
next
edit "LinkedIn-SSH"
    set internet-service-id 851974
next
edit "LinkedIn-FTP"
    set internet-service-id 851975
next
edit "LinkedIn-NTP"
    set internet-service-id 851976
next
edit "LinkedIn-Inbound_Email"
    set internet-service-id 851977
next
edit "LinkedIn-LDAP"
    set internet-service-id 851982
next
edit "LinkedIn-NetBIOS.Session.Service"
    set internet-service-id 851983
next
edit "LinkedIn-RTMP"
    set internet-service-id 851984
next
edit "LinkedIn-NetBIOS.Name.Service"
    set internet-service-id 851992
next
edit "Adobe-Other"
    set internet-service-id 917504
next
edit "Adobe-Web"
    set internet-service-id 917505
next
edit "Adobe-ICMP"
    set internet-service-id 917506
next
```



```
edit "Adobe-DNS"
    set internet-service-id 917507
next
edit "Adobe-Outbound_Email"
    set internet-service-id 917508
next
edit "Adobe-SSH"
    set internet-service-id 917510
next
edit "Adobe-FTP"
    set internet-service-id 917511
next
edit "Adobe-NTP"
    set internet-service-id 917512
next
edit "Adobe-Inbound_Email"
    set internet-service-id 917513
next
edit "Adobe-LDAP"
    set internet-service-id 917518
next
edit "Adobe-NetBIOS.Session.Service"
    set internet-service-id 917519
next
edit "Adobe-RTMP"
    set internet-service-id 917520
next
edit "Adobe-NetBIOS.Name.Service"
    set internet-service-id 917528
next
edit "Adobe-Adobe.Experience.Cloud"
    set internet-service-id 917640
next
edit "Adobe-Adobe.Sign"
    set internet-service-id 917776
next
edit "Oracle-Other"
    set internet-service-id 983040
next
edit "Oracle-Web"
    set internet-service-id 983041
next
edit "Oracle-ICMP"
    set internet-service-id 983042
next
edit "Oracle-DNS"
```

```
        set internet-service-id 983043
next
edit "Oracle-Outbound_Email"
        set internet-service-id 983044
next
edit "Oracle-SSH"
        set internet-service-id 983046
next
edit "Oracle-FTP"
        set internet-service-id 983047
next
edit "Oracle-NTP"
        set internet-service-id 983048
next
edit "Oracle-Inbound_Email"
        set internet-service-id 983049
next
edit "Oracle-LDAP"
        set internet-service-id 983054
next
edit "Oracle-NetBIOS.Session.Service"
        set internet-service-id 983055
next
edit "Oracle-RTMP"
        set internet-service-id 983056
next
edit "Oracle-NetBIOS.Name.Service"
        set internet-service-id 983064
next
edit "Oracle-Oracle.Cloud"
        set internet-service-id 983171
next
edit "Hulu-Other"
        set internet-service-id 1048576
next
edit "Hulu-Web"
        set internet-service-id 1048577
next
edit "Hulu-ICMP"
        set internet-service-id 1048578
next
edit "Hulu-DNS"
        set internet-service-id 1048579
next
edit "Hulu-Outbound_Email"
        set internet-service-id 1048580
```

```
next
edit "Hulu-SSH"
    set internet-service-id 1048582
next
edit "Hulu-FTP"
    set internet-service-id 1048583
next
edit "Hulu-NTP"
    set internet-service-id 1048584
next
edit "Hulu-Inbound_Email"
    set internet-service-id 1048585
next
edit "Hulu-LDAP"
    set internet-service-id 1048590
next
edit "Hulu-NetBIOS.Session.Service"
    set internet-service-id 1048591
next
edit "Hulu-RTMP"
    set internet-service-id 1048592
next
edit "Hulu-NetBIOS.Name.Service"
    set internet-service-id 1048600
next
edit "Pinterest-Other"
    set internet-service-id 1114112
next
edit "Pinterest-Web"
    set internet-service-id 1114113
next
edit "Pinterest-ICMP"
    set internet-service-id 1114114
next
edit "Pinterest-DNS"
    set internet-service-id 1114115
next
edit "Pinterest-Outbound_Email"
    set internet-service-id 1114116
next
edit "Pinterest-SSH"
    set internet-service-id 1114118
next
edit "Pinterest-FTP"
    set internet-service-id 1114119
next
```

```
edit "Pinterest-NTP"
    set internet-service-id 1114120
next
edit "Pinterest-Inbound_Email"
    set internet-service-id 1114121
next
edit "Pinterest-LDAP"
    set internet-service-id 1114126
next
edit "Pinterest-NetBIOS.Session.Service"
    set internet-service-id 1114127
next
edit "Pinterest-RTMP"
    set internet-service-id 1114128
next
edit "Pinterest-NetBIOS.Name.Service"
    set internet-service-id 1114136
next
edit "LogMeIn-Other"
    set internet-service-id 1179648
next
edit "LogMeIn-Web"
    set internet-service-id 1179649
next
edit "LogMeIn-ICMP"
    set internet-service-id 1179650
next
edit "LogMeIn-DNS"
    set internet-service-id 1179651
next
edit "LogMeIn-Outbound_Email"
    set internet-service-id 1179652
next
edit "LogMeIn-SSH"
    set internet-service-id 1179654
next
edit "LogMeIn-FTP"
    set internet-service-id 1179655
next
edit "LogMeIn-NTP"
    set internet-service-id 1179656
next
edit "LogMeIn-Inbound_Email"
    set internet-service-id 1179657
next
edit "LogMeIn-LDAP"
```

```
        set internet-service-id 1179662
next
edit "LogMeIn-NetBIOS.Session.Service"
    set internet-service-id 1179663
next
edit "LogMeIn-RTMP"
    set internet-service-id 1179664
next
edit "LogMeIn-NetBIOS.Name.Service"
    set internet-service-id 1179672
next
edit "LogMeIn-GoTo.Suite"
    set internet-service-id 1179767
next
edit "Fortinet-Other"
    set internet-service-id 1245184
next
edit "Fortinet-Web"
    set internet-service-id 1245185
next
edit "Fortinet-ICMP"
    set internet-service-id 1245186
next
edit "Fortinet-DNS"
    set internet-service-id 1245187
next
edit "Fortinet-Outbound_Email"
    set internet-service-id 1245188
next
edit "Fortinet-SSH"
    set internet-service-id 1245190
next
edit "Fortinet-FTP"
    set internet-service-id 1245191
next
edit "Fortinet-NTP"
    set internet-service-id 1245192
next
edit "Fortinet-Inbound_Email"
    set internet-service-id 1245193
next
edit "Fortinet-LDAP"
    set internet-service-id 1245198
next
edit "Fortinet-NetBIOS.Session.Service"
    set internet-service-id 1245199
```

```
next
edit "Fortinet-RTMP"
    set internet-service-id 1245200
next
edit "Fortinet-NetBIOS.Name.Service"
    set internet-service-id 1245208
next
edit "Fortinet-FortiGuard"
    set internet-service-id 1245324
next
edit "Fortinet-FortiMail.Cloud"
    set internet-service-id 1245325
next
edit "Fortinet-FortiCloud"
    set internet-service-id 1245326
next
edit "Fortinet-FortiVoice.Cloud"
    set internet-service-id 1245432
next
edit "Fortinet-FortiGuard.Secure.DNS"
    set internet-service-id 1245454
next
edit "Fortinet-FortiEDR"
    set internet-service-id 1245475
next
edit "Kaspersky-Other"
    set internet-service-id 1310720
next
edit "Kaspersky-Web"
    set internet-service-id 1310721
next
edit "Kaspersky-ICMP"
    set internet-service-id 1310722
next
edit "Kaspersky-DNS"
    set internet-service-id 1310723
next
edit "Kaspersky-Outbound_Email"
    set internet-service-id 1310724
next
edit "Kaspersky-SSH"
    set internet-service-id 1310726
next
edit "Kaspersky-FTP"
    set internet-service-id 1310727
next
```

```
edit "Kaspersky-NTP"
    set internet-service-id 1310728
next
edit "Kaspersky-Inbound_Email"
    set internet-service-id 1310729
next
edit "Kaspersky-LDAP"
    set internet-service-id 1310734
next
edit "Kaspersky-NetBIOS.Session.Service"
    set internet-service-id 1310735
next
edit "Kaspersky-RTMP"
    set internet-service-id 1310736
next
edit "Kaspersky-NetBIOS.Name.Service"
    set internet-service-id 1310744
next
edit "McAfee-Other"
    set internet-service-id 1376256
next
edit "McAfee-Web"
    set internet-service-id 1376257
next
edit "McAfee-ICMP"
    set internet-service-id 1376258
next
edit "McAfee-DNS"
    set internet-service-id 1376259
next
edit "McAfee-Outbound_Email"
    set internet-service-id 1376260
next
edit "McAfee-SSH"
    set internet-service-id 1376262
next
edit "McAfee-FTP"
    set internet-service-id 1376263
next
edit "McAfee-NTP"
    set internet-service-id 1376264
next
edit "McAfee-Inbound_Email"
    set internet-service-id 1376265
next
edit "McAfee-LDAP"
```

```
        set internet-service-id 1376270
next
edit "McAfee-NetBIOS.Session.Service"
    set internet-service-id 1376271
next
edit "McAfee-RTMP"
    set internet-service-id 1376272
next
edit "McAfee-NetBIOS.Name.Service"
    set internet-service-id 1376280
next
edit "Symantec-Other"
    set internet-service-id 1441792
next
edit "Symantec-Web"
    set internet-service-id 1441793
next
edit "Symantec-ICMP"
    set internet-service-id 1441794
next
edit "Symantec-DNS"
    set internet-service-id 1441795
next
edit "Symantec-Outbound_Email"
    set internet-service-id 1441796
next
edit "Symantec-SSH"
    set internet-service-id 1441798
next
edit "Symantec-FTP"
    set internet-service-id 1441799
next
edit "Symantec-NTP"
    set internet-service-id 1441800
next
edit "Symantec-Inbound_Email"
    set internet-service-id 1441801
next
edit "Symantec-LDAP"
    set internet-service-id 1441806
next
edit "Symantec-NetBIOS.Session.Service"
    set internet-service-id 1441807
next
edit "Symantec-RTMP"
    set internet-service-id 1441808
```



```
next
edit "Symantec-NetBIOS.Name.Service"
    set internet-service-id 1441816
next
edit "Symantec-Symantec.Cloud"
    set internet-service-id 1441922
next
edit "VMware-Other"
    set internet-service-id 1507328
next
edit "VMware-Web"
    set internet-service-id 1507329
next
edit "VMware-ICMP"
    set internet-service-id 1507330
next
edit "VMware-DNS"
    set internet-service-id 1507331
next
edit "VMware-Outbound_Email"
    set internet-service-id 1507332
next
edit "VMware-SSH"
    set internet-service-id 1507334
next
edit "VMware-FTP"
    set internet-service-id 1507335
next
edit "VMware-NTP"
    set internet-service-id 1507336
next
edit "VMware-Inbound_Email"
    set internet-service-id 1507337
next
edit "VMware-LDAP"
    set internet-service-id 1507342
next
edit "VMware-NetBIOS.Session.Service"
    set internet-service-id 1507343
next
edit "VMware-RTMP"
    set internet-service-id 1507344
next
edit "VMware-NetBIOS.Name.Service"
    set internet-service-id 1507352
next
```

```
edit "VMware-Workspace.ONE"
    set internet-service-id 1507461
next
edit "AOL-Other"
    set internet-service-id 1572864
next
edit "AOL-Web"
    set internet-service-id 1572865
next
edit "AOL-ICMP"
    set internet-service-id 1572866
next
edit "AOL-DNS"
    set internet-service-id 1572867
next
edit "AOL-Outbound_Email"
    set internet-service-id 1572868
next
edit "AOL-SSH"
    set internet-service-id 1572870
next
edit "AOL-FTP"
    set internet-service-id 1572871
next
edit "AOL-NTP"
    set internet-service-id 1572872
next
edit "AOL-Inbound_Email"
    set internet-service-id 1572873
next
edit "AOL-LDAP"
    set internet-service-id 1572878
next
edit "AOL-NetBIOS.Session.Service"
    set internet-service-id 1572879
next
edit "AOL-RTMP"
    set internet-service-id 1572880
next
edit "AOL-NetBIOS.Name.Service"
    set internet-service-id 1572888
next
edit "RealNetworks-Other"
    set internet-service-id 1638400
next
edit "RealNetworks-Web"
```

```
        set internet-service-id 1638401
next
edit "RealNetworks-ICMP"
        set internet-service-id 1638402
next
edit "RealNetworks-DNS"
        set internet-service-id 1638403
next
edit "RealNetworks-Outbound_Email"
        set internet-service-id 1638404
next
edit "RealNetworks-SSH"
        set internet-service-id 1638406
next
edit "RealNetworks-FTP"
        set internet-service-id 1638407
next
edit "RealNetworks-NTP"
        set internet-service-id 1638408
next
edit "RealNetworks-Inbound_Email"
        set internet-service-id 1638409
next
edit "RealNetworks-LDAP"
        set internet-service-id 1638414
next
edit "RealNetworks-NetBIOS.Session.Service"
        set internet-service-id 1638415
next
edit "RealNetworks-RTMP"
        set internet-service-id 1638416
next
edit "RealNetworks-NetBIOS.Name.Service"
        set internet-service-id 1638424
next
edit "Zoho-Other"
        set internet-service-id 1703936
next
edit "Zoho-Web"
        set internet-service-id 1703937
next
edit "Zoho-ICMP"
        set internet-service-id 1703938
next
edit "Zoho-DNS"
        set internet-service-id 1703939
```

```
next
edit "Zoho-Outbound_Email"
    set internet-service-id 1703940
next
edit "Zoho-SSH"
    set internet-service-id 1703942
next
edit "Zoho-FTP"
    set internet-service-id 1703943
next
edit "Zoho-NTP"
    set internet-service-id 1703944
next
edit "Zoho-Inbound_Email"
    set internet-service-id 1703945
next
edit "Zoho-LDAP"
    set internet-service-id 1703950
next
edit "Zoho-NetBIOS.Session.Service"
    set internet-service-id 1703951
next
edit "Zoho-RTMP"
    set internet-service-id 1703952
next
edit "Zoho-NetBIOS.Name.Service"
    set internet-service-id 1703960
next
edit "Zoho-Site24x7.Monitor"
    set internet-service-id 1704153
next
edit "Mozilla-Other"
    set internet-service-id 1769472
next
edit "Mozilla-Web"
    set internet-service-id 1769473
next
edit "Mozilla-ICMP"
    set internet-service-id 1769474
next
edit "Mozilla-DNS"
    set internet-service-id 1769475
next
edit "Mozilla-Outbound_Email"
    set internet-service-id 1769476
next
```

```
edit "Mozilla-SSH"
    set internet-service-id 1769478
next
edit "Mozilla-FTP"
    set internet-service-id 1769479
next
edit "Mozilla-NTP"
    set internet-service-id 1769480
next
edit "Mozilla-Inbound_Email"
    set internet-service-id 1769481
next
edit "Mozilla-LDAP"
    set internet-service-id 1769486
next
edit "Mozilla-NetBIOS.Session.Service"
    set internet-service-id 1769487
next
edit "Mozilla-RTMP"
    set internet-service-id 1769488
next
edit "Mozilla-NetBIOS.Name.Service"
    set internet-service-id 1769496
next
edit "TeamViewer-Other"
    set internet-service-id 1835008
next
edit "TeamViewer-Web"
    set internet-service-id 1835009
next
edit "TeamViewer-ICMP"
    set internet-service-id 1835010
next
edit "TeamViewer-DNS"
    set internet-service-id 1835011
next
edit "TeamViewer-Outbound_Email"
    set internet-service-id 1835012
next
edit "TeamViewer-SSH"
    set internet-service-id 1835014
next
edit "TeamViewer-FTP"
    set internet-service-id 1835015
next
edit "TeamViewer-NTP"
```

```
        set internet-service-id 1835016
next
edit "TeamViewer-Inbound_Email"
    set internet-service-id 1835017
next
edit "TeamViewer-LDAP"
    set internet-service-id 1835022
next
edit "TeamViewer-NetBIOS.Session.Service"
    set internet-service-id 1835023
next
edit "TeamViewer-RTMP"
    set internet-service-id 1835024
next
edit "TeamViewer-NetBIOS.Name.Service"
    set internet-service-id 1835032
next
edit "TeamViewer-TeamViewer"
    set internet-service-id 1835117
next
edit "HP-Other"
    set internet-service-id 1900544
next
edit "HP-Web"
    set internet-service-id 1900545
next
edit "HP-ICMP"
    set internet-service-id 1900546
next
edit "HP-DNS"
    set internet-service-id 1900547
next
edit "HP-Outbound_Email"
    set internet-service-id 1900548
next
edit "HP-SSH"
    set internet-service-id 1900550
next
edit "HP-FTP"
    set internet-service-id 1900551
next
edit "HP-NTP"
    set internet-service-id 1900552
next
edit "HP-Inbound_Email"
    set internet-service-id 1900553
```

```
next
edit "HP-LDAP"
    set internet-service-id 1900558
next
edit "HP-NetBIOS.Session.Service"
    set internet-service-id 1900559
next
edit "HP-RTMP"
    set internet-service-id 1900560
next
edit "HP-NetBIOS.Name.Service"
    set internet-service-id 1900568
next
edit "HP-Aruba"
    set internet-service-id 1900726
next
edit "Cisco-Other"
    set internet-service-id 1966080
next
edit "Cisco-Web"
    set internet-service-id 1966081
next
edit "Cisco-ICMP"
    set internet-service-id 1966082
next
edit "Cisco-DNS"
    set internet-service-id 1966083
next
edit "Cisco-Outbound_Email"
    set internet-service-id 1966084
next
edit "Cisco-SSH"
    set internet-service-id 1966086
next
edit "Cisco-FTP"
    set internet-service-id 1966087
next
edit "Cisco-NTP"
    set internet-service-id 1966088
next
edit "Cisco-Inbound_Email"
    set internet-service-id 1966089
next
edit "Cisco-LDAP"
    set internet-service-id 1966094
next
```

```
edit "Cisco-NetBIOS.Session.Service"
    set internet-service-id 1966095
next
edit "Cisco-RTMP"
    set internet-service-id 1966096
next
edit "Cisco-NetBIOS.Name.Service"
    set internet-service-id 1966104
next
edit "Cisco-Webex"
    set internet-service-id 1966183
next
edit "Cisco-Meraki.Cloud"
    set internet-service-id 1966218
next
edit "Cisco-Duo.Security"
    set internet-service-id 1966225
next
edit "Cisco-AppDynamic"
    set internet-service-id 1966260
next
edit "Cisco-Webex.FedRAMP"
    set internet-service-id 1966315
next
edit "Cisco-Secure.Endpoint"
    set internet-service-id 1966324
next
edit "IBM-Other"
    set internet-service-id 2031616
next
edit "IBM-Web"
    set internet-service-id 2031617
next
edit "IBM-ICMP"
    set internet-service-id 2031618
next
edit "IBM-DNS"
    set internet-service-id 2031619
next
edit "IBM-Outbound_Email"
    set internet-service-id 2031620
next
edit "IBM-SSH"
    set internet-service-id 2031622
next
edit "IBM-FTP"
```



```
        set internet-service-id 2031623
next
edit "IBM-NTP"
        set internet-service-id 2031624
next
edit "IBM-Inbound_Email"
        set internet-service-id 2031625
next
edit "IBM-LDAP"
        set internet-service-id 2031630
next
edit "IBM-NetBIOS.Session.Service"
        set internet-service-id 2031631
next
edit "IBM-RTMP"
        set internet-service-id 2031632
next
edit "IBM-NetBIOS.Name.Service"
        set internet-service-id 2031640
next
edit "IBM-IBM.Cloud"
        set internet-service-id 2031748
next
edit "Citrix-Other"
        set internet-service-id 2097152
next
edit "Citrix-Web"
        set internet-service-id 2097153
next
edit "Citrix-ICMP"
        set internet-service-id 2097154
next
edit "Citrix-DNS"
        set internet-service-id 2097155
next
edit "Citrix-Outbound_Email"
        set internet-service-id 2097156
next
edit "Citrix-SSH"
        set internet-service-id 2097158
next
edit "Citrix-FTP"
        set internet-service-id 2097159
next
edit "Citrix-NTP"
        set internet-service-id 2097160
```

```
next
edit "Citrix-Inbound_Email"
    set internet-service-id 2097161
next
edit "Citrix-LDAP"
    set internet-service-id 2097166
next
edit "Citrix-NetBIOS.Session.Service"
    set internet-service-id 2097167
next
edit "Citrix-RTMP"
    set internet-service-id 2097168
next
edit "Citrix-NetBIOS.Name.Service"
    set internet-service-id 2097176
next
edit "Twitter-Other"
    set internet-service-id 2162688
next
edit "Twitter-Web"
    set internet-service-id 2162689
next
edit "Twitter-ICMP"
    set internet-service-id 2162690
next
edit "Twitter-DNS"
    set internet-service-id 2162691
next
edit "Twitter-Outbound_Email"
    set internet-service-id 2162692
next
edit "Twitter-SSH"
    set internet-service-id 2162694
next
edit "Twitter-FTP"
    set internet-service-id 2162695
next
edit "Twitter-NTP"
    set internet-service-id 2162696
next
edit "Twitter-Inbound_Email"
    set internet-service-id 2162697
next
edit "Twitter-LDAP"
    set internet-service-id 2162702
next
```

```
edit "Twitter-NetBIOS.Session.Service"
    set internet-service-id 2162703
next
edit "Twitter-RTMP"
    set internet-service-id 2162704
next
edit "Twitter-NetBIOS.Name.Service"
    set internet-service-id 2162712
next
edit "Dell-Other"
    set internet-service-id 2228224
next
edit "Dell-Web"
    set internet-service-id 2228225
next
edit "Dell-ICMP"
    set internet-service-id 2228226
next
edit "Dell-DNS"
    set internet-service-id 2228227
next
edit "Dell-Outbound_Email"
    set internet-service-id 2228228
next
edit "Dell-SSH"
    set internet-service-id 2228230
next
edit "Dell-FTP"
    set internet-service-id 2228231
next
edit "Dell-NTP"
    set internet-service-id 2228232
next
edit "Dell-Inbound_Email"
    set internet-service-id 2228233
next
edit "Dell-LDAP"
    set internet-service-id 2228238
next
edit "Dell-NetBIOS.Session.Service"
    set internet-service-id 2228239
next
edit "Dell-RTMP"
    set internet-service-id 2228240
next
edit "Dell-NetBIOS.Name.Service"
```

```
        set internet-service-id 2228248
next
edit "Vimeo-Other"
        set internet-service-id 2293760
next
edit "Vimeo-Web"
        set internet-service-id 2293761
next
edit "Vimeo-ICMP"
        set internet-service-id 2293762
next
edit "Vimeo-DNS"
        set internet-service-id 2293763
next
edit "Vimeo-Outbound_Email"
        set internet-service-id 2293764
next
edit "Vimeo-SSH"
        set internet-service-id 2293766
next
edit "Vimeo-FTP"
        set internet-service-id 2293767
next
edit "Vimeo-NTP"
        set internet-service-id 2293768
next
edit "Vimeo-Inbound_Email"
        set internet-service-id 2293769
next
edit "Vimeo-LDAP"
        set internet-service-id 2293774
next
edit "Vimeo-NetBIOS.Session.Service"
        set internet-service-id 2293775
next
edit "Vimeo-RTMP"
        set internet-service-id 2293776
next
edit "Vimeo-NetBIOS.Name.Service"
        set internet-service-id 2293784
next
edit "Redhat-Other"
        set internet-service-id 2359296
next
edit "Redhat-Web"
        set internet-service-id 2359297
```

```
next
edit "Redhat-ICMP"
    set internet-service-id 2359298
next
edit "Redhat-DNS"
    set internet-service-id 2359299
next
edit "Redhat-Outbound_Email"
    set internet-service-id 2359300
next
edit "Redhat-SSH"
    set internet-service-id 2359302
next
edit "Redhat-FTP"
    set internet-service-id 2359303
next
edit "Redhat-NTP"
    set internet-service-id 2359304
next
edit "Redhat-Inbound_Email"
    set internet-service-id 2359305
next
edit "Redhat-LDAP"
    set internet-service-id 2359310
next
edit "Redhat-NetBIOS.Session.Service"
    set internet-service-id 2359311
next
edit "Redhat-RTMP"
    set internet-service-id 2359312
next
edit "Redhat-NetBIOS.Name.Service"
    set internet-service-id 2359320
next
edit "VK-Other"
    set internet-service-id 2424832
next
edit "VK-Web"
    set internet-service-id 2424833
next
edit "VK-ICMP"
    set internet-service-id 2424834
next
edit "VK-DNS"
    set internet-service-id 2424835
next
```

```
edit "VK-Outbound_Email"
    set internet-service-id 2424836
next
edit "VK-SSH"
    set internet-service-id 2424838
next
edit "VK-FTP"
    set internet-service-id 2424839
next
edit "VK-NTP"
    set internet-service-id 2424840
next
edit "VK-Inbound_Email"
    set internet-service-id 2424841
next
edit "VK-LDAP"
    set internet-service-id 2424846
next
edit "VK-NetBIOS.Session.Service"
    set internet-service-id 2424847
next
edit "VK-RTMP"
    set internet-service-id 2424848
next
edit "VK-NetBIOS.Name.Service"
    set internet-service-id 2424856
next
edit "TrendMicro-Other"
    set internet-service-id 2490368
next
edit "TrendMicro-Web"
    set internet-service-id 2490369
next
edit "TrendMicro-ICMP"
    set internet-service-id 2490370
next
edit "TrendMicro-DNS"
    set internet-service-id 2490371
next
edit "TrendMicro-Outbound_Email"
    set internet-service-id 2490372
next
edit "TrendMicro-SSH"
    set internet-service-id 2490374
next
edit "TrendMicro-FTP"
```

```
        set internet-service-id 2490375
next
edit "TrendMicro-NTP"
        set internet-service-id 2490376
next
edit "TrendMicro-Inbound_Email"
        set internet-service-id 2490377
next
edit "TrendMicro-LDAP"
        set internet-service-id 2490382
next
edit "TrendMicro-NetBIOS.Session.Service"
        set internet-service-id 2490383
next
edit "TrendMicro-RTMP"
        set internet-service-id 2490384
next
edit "TrendMicro-NetBIOS.Name.Service"
        set internet-service-id 2490392
next
edit "Tencent-Other"
        set internet-service-id 2555904
next
edit "Tencent-Web"
        set internet-service-id 2555905
next
edit "Tencent-ICMP"
        set internet-service-id 2555906
next
edit "Tencent-DNS"
        set internet-service-id 2555907
next
edit "Tencent-Outbound_Email"
        set internet-service-id 2555908
next
edit "Tencent-SSH"
        set internet-service-id 2555910
next
edit "Tencent-FTP"
        set internet-service-id 2555911
next
edit "Tencent-NTP"
        set internet-service-id 2555912
next
edit "Tencent-Inbound_Email"
        set internet-service-id 2555913
```

```
next
edit "Tencent-LDAP"
    set internet-service-id 2555918
next
edit "Tencent-NetBIOS.Session.Service"
    set internet-service-id 2555919
next
edit "Tencent-RTMP"
    set internet-service-id 2555920
next
edit "Tencent-NetBIOS.Name.Service"
    set internet-service-id 2555928
next
edit "Ask-Other"
    set internet-service-id 2621440
next
edit "Ask-Web"
    set internet-service-id 2621441
next
edit "Ask-ICMP"
    set internet-service-id 2621442
next
edit "Ask-DNS"
    set internet-service-id 2621443
next
edit "Ask-Outbound_Email"
    set internet-service-id 2621444
next
edit "Ask-SSH"
    set internet-service-id 2621446
next
edit "Ask-FTP"
    set internet-service-id 2621447
next
edit "Ask-NTP"
    set internet-service-id 2621448
next
edit "Ask-Inbound_Email"
    set internet-service-id 2621449
next
edit "Ask-LDAP"
    set internet-service-id 2621454
next
edit "Ask-NetBIOS.Session.Service"
    set internet-service-id 2621455
next
```



```
edit "Ask-RTMP"
    set internet-service-id 2621456
next
edit "Ask-NetBIOS.Name.Service"
    set internet-service-id 2621464
next
edit "CNN-Other"
    set internet-service-id 2686976
next
edit "CNN-Web"
    set internet-service-id 2686977
next
edit "CNN-ICMP"
    set internet-service-id 2686978
next
edit "CNN-DNS"
    set internet-service-id 2686979
next
edit "CNN-Outbound_Email"
    set internet-service-id 2686980
next
edit "CNN-SSH"
    set internet-service-id 2686982
next
edit "CNN-FTP"
    set internet-service-id 2686983
next
edit "CNN-NTP"
    set internet-service-id 2686984
next
edit "CNN-Inbound_Email"
    set internet-service-id 2686985
next
edit "CNN-LDAP"
    set internet-service-id 2686990
next
edit "CNN-NetBIOS.Session.Service"
    set internet-service-id 2686991
next
edit "CNN-RTMP"
    set internet-service-id 2686992
next
edit "CNN-NetBIOS.Name.Service"
    set internet-service-id 2687000
next
edit "Myspace-Other"
```

```
        set internet-service-id 2752512
next
edit "Myspace-Web"
        set internet-service-id 2752513
next
edit "Myspace-ICMP"
        set internet-service-id 2752514
next
edit "Myspace-DNS"
        set internet-service-id 2752515
next
edit "Myspace-Outbound_Email"
        set internet-service-id 2752516
next
edit "Myspace-SSH"
        set internet-service-id 2752518
next
edit "Myspace-FTP"
        set internet-service-id 2752519
next
edit "Myspace-NTP"
        set internet-service-id 2752520
next
edit "Myspace-Inbound_Email"
        set internet-service-id 2752521
next
edit "Myspace-LDAP"
        set internet-service-id 2752526
next
edit "Myspace-NetBIOS.Session.Service"
        set internet-service-id 2752527
next
edit "Myspace-RTMP"
        set internet-service-id 2752528
next
edit "Myspace-NetBIOS.Name.Service"
        set internet-service-id 2752536
next
edit "Tor-Relay.Node"
        set internet-service-id 2818238
next
edit "Tor-Exit.Node"
        set internet-service-id 2818243
next
edit "Baidu-Other"
        set internet-service-id 2883584
```

```
next
edit "Baidu-Web"
    set internet-service-id 2883585
next
edit "Baidu-ICMP"
    set internet-service-id 2883586
next
edit "Baidu-DNS"
    set internet-service-id 2883587
next
edit "Baidu-Outbound_Email"
    set internet-service-id 2883588
next
edit "Baidu-SSH"
    set internet-service-id 2883590
next
edit "Baidu-FTP"
    set internet-service-id 2883591
next
edit "Baidu-NTP"
    set internet-service-id 2883592
next
edit "Baidu-Inbound_Email"
    set internet-service-id 2883593
next
edit "Baidu-LDAP"
    set internet-service-id 2883598
next
edit "Baidu-NetBIOS.Session.Service"
    set internet-service-id 2883599
next
edit "Baidu-RTMP"
    set internet-service-id 2883600
next
edit "Baidu-NetBIOS.Name.Service"
    set internet-service-id 2883608
next
edit "ntp.org-Other"
    set internet-service-id 2949120
next
edit "ntp.org-Web"
    set internet-service-id 2949121
next
edit "ntp.org-ICMP"
    set internet-service-id 2949122
next
```

```
edit "ntp.org-DNS"
    set internet-service-id 2949123
next
edit "ntp.org-Outbound_Email"
    set internet-service-id 2949124
next
edit "ntp.org-SSH"
    set internet-service-id 2949126
next
edit "ntp.org-FTP"
    set internet-service-id 2949127
next
edit "ntp.org-NTP"
    set internet-service-id 2949128
next
edit "ntp.org-Inbound_Email"
    set internet-service-id 2949129
next
edit "ntp.org-LDAP"
    set internet-service-id 2949134
next
edit "ntp.org-NetBIOS.Session.Service"
    set internet-service-id 2949135
next
edit "ntp.org-RTMP"
    set internet-service-id 2949136
next
edit "ntp.org-NetBIOS.Name.Service"
    set internet-service-id 2949144
next
edit "Proxy-Proxy.Server"
    set internet-service-id 3014850
next
edit "Botnet-C&C.Server"
    set internet-service-id 3080383
next
edit "Spam-Spamming.Server"
    set internet-service-id 3145920
next
edit "Phishing-Phishing.Server"
    set internet-service-id 3211457
next
edit "Zendesk-Other"
    set internet-service-id 3407872
next
edit "Zendesk-Web"
```

```
        set internet-service-id 3407873
next
edit "Zendesk-ICMP"
        set internet-service-id 3407874
next
edit "Zendesk-DNS"
        set internet-service-id 3407875
next
edit "Zendesk-Outbound_Email"
        set internet-service-id 3407876
next
edit "Zendesk-SSH"
        set internet-service-id 3407878
next
edit "Zendesk-FTP"
        set internet-service-id 3407879
next
edit "Zendesk-NTP"
        set internet-service-id 3407880
next
edit "Zendesk-Inbound_Email"
        set internet-service-id 3407881
next
edit "Zendesk-LDAP"
        set internet-service-id 3407886
next
edit "Zendesk-NetBIOS.Session.Service"
        set internet-service-id 3407887
next
edit "Zendesk-RTMP"
        set internet-service-id 3407888
next
edit "Zendesk-NetBIOS.Name.Service"
        set internet-service-id 3407896
next
edit "Zendesk-Zendesk.Suite"
        set internet-service-id 3408047
next
edit "DocuSign-Other"
        set internet-service-id 3473408
next
edit "DocuSign-Web"
        set internet-service-id 3473409
next
edit "DocuSign-ICMP"
        set internet-service-id 3473410
```

```
next
edit "DocuSign-DNS"
    set internet-service-id 3473411
next
edit "DocuSign-Outbound_Email"
    set internet-service-id 3473412
next
edit "DocuSign-SSH"
    set internet-service-id 3473414
next
edit "DocuSign-FTP"
    set internet-service-id 3473415
next
edit "DocuSign-NTP"
    set internet-service-id 3473416
next
edit "DocuSign-Inbound_Email"
    set internet-service-id 3473417
next
edit "DocuSign-LDAP"
    set internet-service-id 3473422
next
edit "DocuSign-NetBIOS.Session.Service"
    set internet-service-id 3473423
next
edit "DocuSign-RTMP"
    set internet-service-id 3473424
next
edit "DocuSign-NetBIOS.Name.Service"
    set internet-service-id 3473432
next
edit "ServiceNow-Other"
    set internet-service-id 3538944
next
edit "ServiceNow-Web"
    set internet-service-id 3538945
next
edit "ServiceNow-ICMP"
    set internet-service-id 3538946
next
edit "ServiceNow-DNS"
    set internet-service-id 3538947
next
edit "ServiceNow-Outbound_Email"
    set internet-service-id 3538948
next
```

```
edit "ServiceNow-SSH"
    set internet-service-id 3538950
next
edit "ServiceNow-FTP"
    set internet-service-id 3538951
next
edit "ServiceNow-NTP"
    set internet-service-id 3538952
next
edit "ServiceNow-Inbound_Email"
    set internet-service-id 3538953
next
edit "ServiceNow-LDAP"
    set internet-service-id 3538958
next
edit "ServiceNow-NetBIOS.Session.Service"
    set internet-service-id 3538959
next
edit "ServiceNow-RTMP"
    set internet-service-id 3538960
next
edit "ServiceNow-NetBIOS.Name.Service"
    set internet-service-id 3538968
next
edit "GitHub-GitHub"
    set internet-service-id 3604638
next
edit "Workday-Other"
    set internet-service-id 3670016
next
edit "Workday-Web"
    set internet-service-id 3670017
next
edit "Workday-ICMP"
    set internet-service-id 3670018
next
edit "Workday-DNS"
    set internet-service-id 3670019
next
edit "Workday-Outbound_Email"
    set internet-service-id 3670020
next
edit "Workday-SSH"
    set internet-service-id 3670022
next
edit "Workday-FTP"
```

```
        set internet-service-id 3670023
next
edit "Workday-NTP"
        set internet-service-id 3670024
next
edit "Workday-Inbound_Email"
        set internet-service-id 3670025
next
edit "Workday-LDAP"
        set internet-service-id 3670030
next
edit "Workday-NetBIOS.Session.Service"
        set internet-service-id 3670031
next
edit "Workday-RTMP"
        set internet-service-id 3670032
next
edit "Workday-NetBIOS.Name.Service"
        set internet-service-id 3670040
next
edit "HubSpot-Other"
        set internet-service-id 3735552
next
edit "HubSpot-Web"
        set internet-service-id 3735553
next
edit "HubSpot-ICMP"
        set internet-service-id 3735554
next
edit "HubSpot-DNS"
        set internet-service-id 3735555
next
edit "HubSpot-Outbound_Email"
        set internet-service-id 3735556
next
edit "HubSpot-SSH"
        set internet-service-id 3735558
next
edit "HubSpot-FTP"
        set internet-service-id 3735559
next
edit "HubSpot-NTP"
        set internet-service-id 3735560
next
edit "HubSpot-Inbound_Email"
        set internet-service-id 3735561
```



```
next
edit "HubSpot-LDAP"
    set internet-service-id 3735566
next
edit "HubSpot-NetBIOS.Session.Service"
    set internet-service-id 3735567
next
edit "HubSpot-RTMP"
    set internet-service-id 3735568
next
edit "HubSpot-NetBIOS.Name.Service"
    set internet-service-id 3735576
next
edit "Twilio-Other"
    set internet-service-id 3801088
next
edit "Twilio-Web"
    set internet-service-id 3801089
next
edit "Twilio-ICMP"
    set internet-service-id 3801090
next
edit "Twilio-DNS"
    set internet-service-id 3801091
next
edit "Twilio-Outbound_Email"
    set internet-service-id 3801092
next
edit "Twilio-SSH"
    set internet-service-id 3801094
next
edit "Twilio-FTP"
    set internet-service-id 3801095
next
edit "Twilio-NTP"
    set internet-service-id 3801096
next
edit "Twilio-Inbound_Email"
    set internet-service-id 3801097
next
edit "Twilio-LDAP"
    set internet-service-id 3801102
next
edit "Twilio-NetBIOS.Session.Service"
    set internet-service-id 3801103
next
```

```
edit "Twilio-RTMP"
    set internet-service-id 3801104
next
edit "Twilio-NetBIOS.Name.Service"
    set internet-service-id 3801112
next
edit "Twilio-Elastic.SIP.Trunking"
    set internet-service-id 3801277
next
edit "Coupa-Other"
    set internet-service-id 3866624
next
edit "Coupa-Web"
    set internet-service-id 3866625
next
edit "Coupa-ICMP"
    set internet-service-id 3866626
next
edit "Coupa-DNS"
    set internet-service-id 3866627
next
edit "Coupa-Outbound_Email"
    set internet-service-id 3866628
next
edit "Coupa-SSH"
    set internet-service-id 3866630
next
edit "Coupa-FTP"
    set internet-service-id 3866631
next
edit "Coupa-NTP"
    set internet-service-id 3866632
next
edit "Coupa-Inbound_Email"
    set internet-service-id 3866633
next
edit "Coupa-LDAP"
    set internet-service-id 3866638
next
edit "Coupa-NetBIOS.Session.Service"
    set internet-service-id 3866639
next
edit "Coupa-RTMP"
    set internet-service-id 3866640
next
edit "Coupa-NetBIOS.Name.Service"
```

```
        set internet-service-id 3866648
next
edit "Atlassian-Other"
    set internet-service-id 3932160
next
edit "Atlassian-Web"
    set internet-service-id 3932161
next
edit "Atlassian-ICMP"
    set internet-service-id 3932162
next
edit "Atlassian-DNS"
    set internet-service-id 3932163
next
edit "Atlassian-Outbound_Email"
    set internet-service-id 3932164
next
edit "Atlassian-SSH"
    set internet-service-id 3932166
next
edit "Atlassian-FTP"
    set internet-service-id 3932167
next
edit "Atlassian-NTP"
    set internet-service-id 3932168
next
edit "Atlassian-Inbound_Email"
    set internet-service-id 3932169
next
edit "Atlassian-LDAP"
    set internet-service-id 3932174
next
edit "Atlassian-NetBIOS.Session.Service"
    set internet-service-id 3932175
next
edit "Atlassian-RTMP"
    set internet-service-id 3932176
next
edit "Atlassian-NetBIOS.Name.Service"
    set internet-service-id 3932184
next
edit "Atlassian-Atlassian.Cloud"
    set internet-service-id 3932388
next
edit "Atlassian-Atlassian.Notification"
    set internet-service-id 3932436
```

```
next
edit "Xero-Other"
    set internet-service-id 3997696
next
edit "Xero-Web"
    set internet-service-id 3997697
next
edit "Xero-ICMP"
    set internet-service-id 3997698
next
edit "Xero-DNS"
    set internet-service-id 3997699
next
edit "Xero-Outbound_Email"
    set internet-service-id 3997700
next
edit "Xero-SSH"
    set internet-service-id 3997702
next
edit "Xero-FTP"
    set internet-service-id 3997703
next
edit "Xero-NTP"
    set internet-service-id 3997704
next
edit "Xero-Inbound_Email"
    set internet-service-id 3997705
next
edit "Xero-LDAP"
    set internet-service-id 3997710
next
edit "Xero-NetBIOS.Session.Service"
    set internet-service-id 3997711
next
edit "Xero-RTMP"
    set internet-service-id 3997712
next
edit "Xero-NetBIOS.Name.Service"
    set internet-service-id 3997720
next
edit "Zuora-Other"
    set internet-service-id 4063232
next
edit "Zuora-Web"
    set internet-service-id 4063233
next
```

```
edit "Zuora-ICMP"
    set internet-service-id 4063234
next
edit "Zuora-DNS"
    set internet-service-id 4063235
next
edit "Zuora-Outbound_Email"
    set internet-service-id 4063236
next
edit "Zuora-SSH"
    set internet-service-id 4063238
next
edit "Zuora-FTP"
    set internet-service-id 4063239
next
edit "Zuora-NTP"
    set internet-service-id 4063240
next
edit "Zuora-Inbound_Email"
    set internet-service-id 4063241
next
edit "Zuora-LDAP"
    set internet-service-id 4063246
next
edit "Zuora-NetBIOS.Session.Service"
    set internet-service-id 4063247
next
edit "Zuora-RTMP"
    set internet-service-id 4063248
next
edit "Zuora-NetBIOS.Name.Service"
    set internet-service-id 4063256
next
edit "AdRoll-Other"
    set internet-service-id 4128768
next
edit "AdRoll-Web"
    set internet-service-id 4128769
next
edit "AdRoll-ICMP"
    set internet-service-id 4128770
next
edit "AdRoll-DNS"
    set internet-service-id 4128771
next
edit "AdRoll-Outbound_Email"
```

```
        set internet-service-id 4128772
next
edit "AdRoll-SSH"
        set internet-service-id 4128774
next
edit "AdRoll-FTP"
        set internet-service-id 4128775
next
edit "AdRoll-NTP"
        set internet-service-id 4128776
next
edit "AdRoll-Inbound_Email"
        set internet-service-id 4128777
next
edit "AdRoll-LDAP"
        set internet-service-id 4128782
next
edit "AdRoll-NetBIOS.Session.Service"
        set internet-service-id 4128783
next
edit "AdRoll-RTMP"
        set internet-service-id 4128784
next
edit "AdRoll-NetBIOS.Name.Service"
        set internet-service-id 4128792
next
edit "Xactly-Other"
        set internet-service-id 4194304
next
edit "Xactly-Web"
        set internet-service-id 4194305
next
edit "Xactly-ICMP"
        set internet-service-id 4194306
next
edit "Xactly-DNS"
        set internet-service-id 4194307
next
edit "Xactly-Outbound_Email"
        set internet-service-id 4194308
next
edit "Xactly-SSH"
        set internet-service-id 4194310
next
edit "Xactly-FTP"
        set internet-service-id 4194311
```

```
next
edit "Xactly-NTP"
    set internet-service-id 4194312
next
edit "Xactly-Inbound_Email"
    set internet-service-id 4194313
next
edit "Xactly-LDAP"
    set internet-service-id 4194318
next
edit "Xactly-NetBIOS.Session.Service"
    set internet-service-id 4194319
next
edit "Xactly-RTMP"
    set internet-service-id 4194320
next
edit "Xactly-NetBIOS.Name.Service"
    set internet-service-id 4194328
next
edit "Intuit-Other"
    set internet-service-id 4259840
next
edit "Intuit-Web"
    set internet-service-id 4259841
next
edit "Intuit-ICMP"
    set internet-service-id 4259842
next
edit "Intuit-DNS"
    set internet-service-id 4259843
next
edit "Intuit-Outbound_Email"
    set internet-service-id 4259844
next
edit "Intuit-SSH"
    set internet-service-id 4259846
next
edit "Intuit-FTP"
    set internet-service-id 4259847
next
edit "Intuit-NTP"
    set internet-service-id 4259848
next
edit "Intuit-Inbound_Email"
    set internet-service-id 4259849
next
```

```
edit "Intuit-LDAP"
    set internet-service-id 4259854
next
edit "Intuit-NetBIOS.Session.Service"
    set internet-service-id 4259855
next
edit "Intuit-RTMP"
    set internet-service-id 4259856
next
edit "Intuit-NetBIOS.Name.Service"
    set internet-service-id 4259864
next
edit "Marketo-Other"
    set internet-service-id 4325376
next
edit "Marketo-Web"
    set internet-service-id 4325377
next
edit "Marketo-ICMP"
    set internet-service-id 4325378
next
edit "Marketo-DNS"
    set internet-service-id 4325379
next
edit "Marketo-Outbound_Email"
    set internet-service-id 4325380
next
edit "Marketo-SSH"
    set internet-service-id 4325382
next
edit "Marketo-FTP"
    set internet-service-id 4325383
next
edit "Marketo-NTP"
    set internet-service-id 4325384
next
edit "Marketo-Inbound_Email"
    set internet-service-id 4325385
next
edit "Marketo-LDAP"
    set internet-service-id 4325390
next
edit "Marketo-NetBIOS.Session.Service"
    set internet-service-id 4325391
next
edit "Marketo-RTMP"
```



```
        set internet-service-id 4325392
next
edit "Marketo-NetBIOS.Name.Service"
    set internet-service-id 4325400
next
edit "Bill-Other"
    set internet-service-id 4456448
next
edit "Bill-Web"
    set internet-service-id 4456449
next
edit "Bill-ICMP"
    set internet-service-id 4456450
next
edit "Bill-DNS"
    set internet-service-id 4456451
next
edit "Bill-Outbound_Email"
    set internet-service-id 4456452
next
edit "Bill-SSH"
    set internet-service-id 4456454
next
edit "Bill-FTP"
    set internet-service-id 4456455
next
edit "Bill-NTP"
    set internet-service-id 4456456
next
edit "Bill-Inbound_Email"
    set internet-service-id 4456457
next
edit "Bill-LDAP"
    set internet-service-id 4456462
next
edit "Bill-NetBIOS.Session.Service"
    set internet-service-id 4456463
next
edit "Bill-RTMP"
    set internet-service-id 4456464
next
edit "Bill-NetBIOS.Name.Service"
    set internet-service-id 4456472
next
edit "Shopify-Other"
    set internet-service-id 4521984
```

```
next
edit "Shopify-Web"
    set internet-service-id 4521985
next
edit "Shopify-ICMP"
    set internet-service-id 4521986
next
edit "Shopify-DNS"
    set internet-service-id 4521987
next
edit "Shopify-Outbound_Email"
    set internet-service-id 4521988
next
edit "Shopify-SSH"
    set internet-service-id 4521990
next
edit "Shopify-FTP"
    set internet-service-id 4521991
next
edit "Shopify-NTP"
    set internet-service-id 4521992
next
edit "Shopify-Inbound_Email"
    set internet-service-id 4521993
next
edit "Shopify-LDAP"
    set internet-service-id 4521998
next
edit "Shopify-NetBIOS.Session.Service"
    set internet-service-id 4521999
next
edit "Shopify-RTMP"
    set internet-service-id 4522000
next
edit "Shopify-NetBIOS.Name.Service"
    set internet-service-id 4522008
next
edit "Shopify-Shopify"
    set internet-service-id 4522162
next
edit "MuleSoft-Other"
    set internet-service-id 4587520
next
edit "MuleSoft-Web"
    set internet-service-id 4587521
next
```

```
edit "MuleSoft-ICMP"
    set internet-service-id 4587522
next
edit "MuleSoft-DNS"
    set internet-service-id 4587523
next
edit "MuleSoft-Outbound_Email"
    set internet-service-id 4587524
next
edit "MuleSoft-SSH"
    set internet-service-id 4587526
next
edit "MuleSoft-FTP"
    set internet-service-id 4587527
next
edit "MuleSoft-NTP"
    set internet-service-id 4587528
next
edit "MuleSoft-Inbound_Email"
    set internet-service-id 4587529
next
edit "MuleSoft-LDAP"
    set internet-service-id 4587534
next
edit "MuleSoft-NetBIOS.Session.Service"
    set internet-service-id 4587535
next
edit "MuleSoft-RTMP"
    set internet-service-id 4587536
next
edit "MuleSoft-NetBIOS.Name.Service"
    set internet-service-id 4587544
next
edit "Cornerstone-Other"
    set internet-service-id 4653056
next
edit "Cornerstone-Web"
    set internet-service-id 4653057
next
edit "Cornerstone-ICMP"
    set internet-service-id 4653058
next
edit "Cornerstone-DNS"
    set internet-service-id 4653059
next
edit "Cornerstone-Outbound_Email"
```

```
        set internet-service-id 4653060
next
edit "Cornerstone-SSH"
    set internet-service-id 4653062
next
edit "Cornerstone-FTP"
    set internet-service-id 4653063
next
edit "Cornerstone-NTP"
    set internet-service-id 4653064
next
edit "Cornerstone-Inbound_Email"
    set internet-service-id 4653065
next
edit "Cornerstone-LDAP"
    set internet-service-id 4653070
next
edit "Cornerstone-NetBIOS.Session.Service"
    set internet-service-id 4653071
next
edit "Cornerstone-RTMP"
    set internet-service-id 4653072
next
edit "Cornerstone-NetBIOS.Name.Service"
    set internet-service-id 4653080
next
edit "Eventbrite-Other"
    set internet-service-id 4718592
next
edit "Eventbrite-Web"
    set internet-service-id 4718593
next
edit "Eventbrite-ICMP"
    set internet-service-id 4718594
next
edit "Eventbrite-DNS"
    set internet-service-id 4718595
next
edit "Eventbrite-Outbound_Email"
    set internet-service-id 4718596
next
edit "Eventbrite-SSH"
    set internet-service-id 4718598
next
edit "Eventbrite-FTP"
    set internet-service-id 4718599
```

```
next
edit "Eventbrite-NTP"
    set internet-service-id 4718600
next
edit "Eventbrite-Inbound_Email"
    set internet-service-id 4718601
next
edit "Eventbrite-LDAP"
    set internet-service-id 4718606
next
edit "Eventbrite-NetBIOS.Session.Service"
    set internet-service-id 4718607
next
edit "Eventbrite-RTMP"
    set internet-service-id 4718608
next
edit "Eventbrite-NetBIOS.Name.Service"
    set internet-service-id 4718616
next
edit "Paychex-Other"
    set internet-service-id 4784128
next
edit "Paychex-Web"
    set internet-service-id 4784129
next
edit "Paychex-ICMP"
    set internet-service-id 4784130
next
edit "Paychex-DNS"
    set internet-service-id 4784131
next
edit "Paychex-Outbound_Email"
    set internet-service-id 4784132
next
edit "Paychex-SSH"
    set internet-service-id 4784134
next
edit "Paychex-FTP"
    set internet-service-id 4784135
next
edit "Paychex-NTP"
    set internet-service-id 4784136
next
edit "Paychex-Inbound_Email"
    set internet-service-id 4784137
next
```

```
edit "Paychex-LDAP"
    set internet-service-id 4784142
next
edit "Paychex-NetBIOS.Session.Service"
    set internet-service-id 4784143
next
edit "Paychex-RTMP"
    set internet-service-id 4784144
next
edit "Paychex-NetBIOS.Name.Service"
    set internet-service-id 4784152
next
edit "NewRelic-Other"
    set internet-service-id 4849664
next
edit "NewRelic-Web"
    set internet-service-id 4849665
next
edit "NewRelic-ICMP"
    set internet-service-id 4849666
next
edit "NewRelic-DNS"
    set internet-service-id 4849667
next
edit "NewRelic-Outbound_Email"
    set internet-service-id 4849668
next
edit "NewRelic-SSH"
    set internet-service-id 4849670
next
edit "NewRelic-FTP"
    set internet-service-id 4849671
next
edit "NewRelic-NTP"
    set internet-service-id 4849672
next
edit "NewRelic-Inbound_Email"
    set internet-service-id 4849673
next
edit "NewRelic-LDAP"
    set internet-service-id 4849678
next
edit "NewRelic-NetBIOS.Session.Service"
    set internet-service-id 4849679
next
edit "NewRelic-RTMP"
```

```
        set internet-service-id 4849680
next
edit "NewRelic-NetBIOS.Name.Service"
    set internet-service-id 4849688
next
edit "Splunk-Other"
    set internet-service-id 4915200
next
edit "Splunk-Web"
    set internet-service-id 4915201
next
edit "Splunk-ICMP"
    set internet-service-id 4915202
next
edit "Splunk-DNS"
    set internet-service-id 4915203
next
edit "Splunk-Outbound_Email"
    set internet-service-id 4915204
next
edit "Splunk-SSH"
    set internet-service-id 4915206
next
edit "Splunk-FTP"
    set internet-service-id 4915207
next
edit "Splunk-NTP"
    set internet-service-id 4915208
next
edit "Splunk-Inbound_Email"
    set internet-service-id 4915209
next
edit "Splunk-LDAP"
    set internet-service-id 4915214
next
edit "Splunk-NetBIOS.Session.Service"
    set internet-service-id 4915215
next
edit "Splunk-RTMP"
    set internet-service-id 4915216
next
edit "Splunk-NetBIOS.Name.Service"
    set internet-service-id 4915224
next
edit "Domo-Other"
    set internet-service-id 4980736
```

```
next
edit "Domo-Web"
    set internet-service-id 4980737
next
edit "Domo-ICMP"
    set internet-service-id 4980738
next
edit "Domo-DNS"
    set internet-service-id 4980739
next
edit "Domo-Outbound_Email"
    set internet-service-id 4980740
next
edit "Domo-SSH"
    set internet-service-id 4980742
next
edit "Domo-FTP"
    set internet-service-id 4980743
next
edit "Domo-NTP"
    set internet-service-id 4980744
next
edit "Domo-Inbound_Email"
    set internet-service-id 4980745
next
edit "Domo-LDAP"
    set internet-service-id 4980750
next
edit "Domo-NetBIOS.Session.Service"
    set internet-service-id 4980751
next
edit "Domo-RTMP"
    set internet-service-id 4980752
next
edit "Domo-NetBIOS.Name.Service"
    set internet-service-id 4980760
next
edit "FreshBooks-Other"
    set internet-service-id 5046272
next
edit "FreshBooks-Web"
    set internet-service-id 5046273
next
edit "FreshBooks-ICMP"
    set internet-service-id 5046274
next
```



```
edit "FreshBooks-DNS"
    set internet-service-id 5046275
next
edit "FreshBooks-Outbound_Email"
    set internet-service-id 5046276
next
edit "FreshBooks-SSH"
    set internet-service-id 5046278
next
edit "FreshBooks-FTP"
    set internet-service-id 5046279
next
edit "FreshBooks-NTP"
    set internet-service-id 5046280
next
edit "FreshBooks-Inbound_Email"
    set internet-service-id 5046281
next
edit "FreshBooks-LDAP"
    set internet-service-id 5046286
next
edit "FreshBooks-NetBIOS.Session.Service"
    set internet-service-id 5046287
next
edit "FreshBooks-RTMP"
    set internet-service-id 5046288
next
edit "FreshBooks-NetBIOS.Name.Service"
    set internet-service-id 5046296
next
edit "Tableau-Other"
    set internet-service-id 5111808
next
edit "Tableau-Web"
    set internet-service-id 5111809
next
edit "Tableau-ICMP"
    set internet-service-id 5111810
next
edit "Tableau-DNS"
    set internet-service-id 5111811
next
edit "Tableau-Outbound_Email"
    set internet-service-id 5111812
next
edit "Tableau-SSH"
```

```
        set internet-service-id 5111814
next
edit "Tableau-FTP"
        set internet-service-id 5111815
next
edit "Tableau-NTP"
        set internet-service-id 5111816
next
edit "Tableau-Inbound_Email"
        set internet-service-id 5111817
next
edit "Tableau-LDAP"
        set internet-service-id 5111822
next
edit "Tableau-NetBIOS.Session.Service"
        set internet-service-id 5111823
next
edit "Tableau-RTMP"
        set internet-service-id 5111824
next
edit "Tableau-NetBIOS.Name.Service"
        set internet-service-id 5111832
next
edit "Druva-Other"
        set internet-service-id 5177344
next
edit "Druva-Web"
        set internet-service-id 5177345
next
edit "Druva-ICMP"
        set internet-service-id 5177346
next
edit "Druva-DNS"
        set internet-service-id 5177347
next
edit "Druva-Outbound_Email"
        set internet-service-id 5177348
next
edit "Druva-SSH"
        set internet-service-id 5177350
next
edit "Druva-FTP"
        set internet-service-id 5177351
next
edit "Druva-NTP"
        set internet-service-id 5177352
```

```
next
edit "Druva-Inbound_Email"
    set internet-service-id 5177353
next
edit "Druva-LDAP"
    set internet-service-id 5177358
next
edit "Druva-NetBIOS.Session.Service"
    set internet-service-id 5177359
next
edit "Druva-RTMP"
    set internet-service-id 5177360
next
edit "Druva-NetBIOS.Name.Service"
    set internet-service-id 5177368
next
edit "Act-on-Other"
    set internet-service-id 5242880
next
edit "Act-on-Web"
    set internet-service-id 5242881
next
edit "Act-on-ICMP"
    set internet-service-id 5242882
next
edit "Act-on-DNS"
    set internet-service-id 5242883
next
edit "Act-on-Outbound_Email"
    set internet-service-id 5242884
next
edit "Act-on-SSH"
    set internet-service-id 5242886
next
edit "Act-on-FTP"
    set internet-service-id 5242887
next
edit "Act-on-NTP"
    set internet-service-id 5242888
next
edit "Act-on-Inbound_Email"
    set internet-service-id 5242889
next
edit "Act-on-LDAP"
    set internet-service-id 5242894
next
```

```
edit "Act-on-NetBIOS.Session.Service"
    set internet-service-id 5242895
next
edit "Act-on-RTMP"
    set internet-service-id 5242896
next
edit "Act-on-NetBIOS.Name.Service"
    set internet-service-id 5242904
next
edit "GoodData-Other"
    set internet-service-id 5308416
next
edit "GoodData-Web"
    set internet-service-id 5308417
next
edit "GoodData-ICMP"
    set internet-service-id 5308418
next
edit "GoodData-DNS"
    set internet-service-id 5308419
next
edit "GoodData-Outbound_Email"
    set internet-service-id 5308420
next
edit "GoodData-SSH"
    set internet-service-id 5308422
next
edit "GoodData-FTP"
    set internet-service-id 5308423
next
edit "GoodData-NTP"
    set internet-service-id 5308424
next
edit "GoodData-Inbound_Email"
    set internet-service-id 5308425
next
edit "GoodData-LDAP"
    set internet-service-id 5308430
next
edit "GoodData-NetBIOS.Session.Service"
    set internet-service-id 5308431
next
edit "GoodData-RTMP"
    set internet-service-id 5308432
next
edit "GoodData-NetBIOS.Name.Service"
```

```
        set internet-service-id 5308440
next
edit "SurveyMonkey-Other"
    set internet-service-id 5373952
next
edit "SurveyMonkey-Web"
    set internet-service-id 5373953
next
edit "SurveyMonkey-ICMP"
    set internet-service-id 5373954
next
edit "SurveyMonkey-DNS"
    set internet-service-id 5373955
next
edit "SurveyMonkey-Outbound_Email"
    set internet-service-id 5373956
next
edit "SurveyMonkey-SSH"
    set internet-service-id 5373958
next
edit "SurveyMonkey-FTP"
    set internet-service-id 5373959
next
edit "SurveyMonkey-NTP"
    set internet-service-id 5373960
next
edit "SurveyMonkey-Inbound_Email"
    set internet-service-id 5373961
next
edit "SurveyMonkey-LDAP"
    set internet-service-id 5373966
next
edit "SurveyMonkey-NetBIOS.Session.Service"
    set internet-service-id 5373967
next
edit "SurveyMonkey-RTMP"
    set internet-service-id 5373968
next
edit "SurveyMonkey-NetBIOS.Name.Service"
    set internet-service-id 5373976
next
edit "Cvent-Other"
    set internet-service-id 5439488
next
edit "Cvent-Web"
    set internet-service-id 5439489
```

```
next
edit "Cvent-ICMP"
    set internet-service-id 5439490
next
edit "Cvent-DNS"
    set internet-service-id 5439491
next
edit "Cvent-Outbound_Email"
    set internet-service-id 5439492
next
edit "Cvent-SSH"
    set internet-service-id 5439494
next
edit "Cvent-FTP"
    set internet-service-id 5439495
next
edit "Cvent-NTP"
    set internet-service-id 5439496
next
edit "Cvent-Inbound_Email"
    set internet-service-id 5439497
next
edit "Cvent-LDAP"
    set internet-service-id 5439502
next
edit "Cvent-NetBIOS.Session.Service"
    set internet-service-id 5439503
next
edit "Cvent-RTMP"
    set internet-service-id 5439504
next
edit "Cvent-NetBIOS.Name.Service"
    set internet-service-id 5439512
next
edit "Blackbaud-Other"
    set internet-service-id 5505024
next
edit "Blackbaud-Web"
    set internet-service-id 5505025
next
edit "Blackbaud-ICMP"
    set internet-service-id 5505026
next
edit "Blackbaud-DNS"
    set internet-service-id 5505027
next
```

```
edit "Blackbaud-Outbound_Email"
    set internet-service-id 5505028
next
edit "Blackbaud-SSH"
    set internet-service-id 5505030
next
edit "Blackbaud-FTP"
    set internet-service-id 5505031
next
edit "Blackbaud-NTP"
    set internet-service-id 5505032
next
edit "Blackbaud-Inbound_Email"
    set internet-service-id 5505033
next
edit "Blackbaud-LDAP"
    set internet-service-id 5505038
next
edit "Blackbaud-NetBIOS.Session.Service"
    set internet-service-id 5505039
next
edit "Blackbaud-RTMP"
    set internet-service-id 5505040
next
edit "Blackbaud-NetBIOS.Name.Service"
    set internet-service-id 5505048
next
edit "InsideSales-Other"
    set internet-service-id 5570560
next
edit "InsideSales-Web"
    set internet-service-id 5570561
next
edit "InsideSales-ICMP"
    set internet-service-id 5570562
next
edit "InsideSales-DNS"
    set internet-service-id 5570563
next
edit "InsideSales-Outbound_Email"
    set internet-service-id 5570564
next
edit "InsideSales-SSH"
    set internet-service-id 5570566
next
edit "InsideSales-FTP"
```

```
        set internet-service-id 5570567
next
edit "InsideSales-NTP"
        set internet-service-id 5570568
next
edit "InsideSales-Inbound_Email"
        set internet-service-id 5570569
next
edit "InsideSales-LDAP"
        set internet-service-id 5570574
next
edit "InsideSales-NetBIOS.Session.Service"
        set internet-service-id 5570575
next
edit "InsideSales-RTMP"
        set internet-service-id 5570576
next
edit "InsideSales-NetBIOS.Name.Service"
        set internet-service-id 5570584
next
edit "ServiceMax-Other"
        set internet-service-id 5636096
next
edit "ServiceMax-Web"
        set internet-service-id 5636097
next
edit "ServiceMax-ICMP"
        set internet-service-id 5636098
next
edit "ServiceMax-DNS"
        set internet-service-id 5636099
next
edit "ServiceMax-Outbound_Email"
        set internet-service-id 5636100
next
edit "ServiceMax-SSH"
        set internet-service-id 5636102
next
edit "ServiceMax-FTP"
        set internet-service-id 5636103
next
edit "ServiceMax-NTP"
        set internet-service-id 5636104
next
edit "ServiceMax-Inbound_Email"
        set internet-service-id 5636105
```



```
next
edit "ServiceMax-LDAP"
    set internet-service-id 5636110
next
edit "ServiceMax-NetBIOS.Session.Service"
    set internet-service-id 5636111
next
edit "ServiceMax-RTMP"
    set internet-service-id 5636112
next
edit "ServiceMax-NetBIOS.Name.Service"
    set internet-service-id 5636120
next
edit "Apptio-Other"
    set internet-service-id 5701632
next
edit "Apptio-Web"
    set internet-service-id 5701633
next
edit "Apptio-ICMP"
    set internet-service-id 5701634
next
edit "Apptio-DNS"
    set internet-service-id 5701635
next
edit "Apptio-Outbound_Email"
    set internet-service-id 5701636
next
edit "Apptio-SSH"
    set internet-service-id 5701638
next
edit "Apptio-FTP"
    set internet-service-id 5701639
next
edit "Apptio-NTP"
    set internet-service-id 5701640
next
edit "Apptio-Inbound_Email"
    set internet-service-id 5701641
next
edit "Apptio-LDAP"
    set internet-service-id 5701646
next
edit "Apptio-NetBIOS.Session.Service"
    set internet-service-id 5701647
next
```

```
edit "Apptio-RTMP"
    set internet-service-id 5701648
next
edit "Apptio-NetBIOS.Name.Service"
    set internet-service-id 5701656
next
edit "Veracode-Other"
    set internet-service-id 5767168
next
edit "Veracode-Web"
    set internet-service-id 5767169
next
edit "Veracode-ICMP"
    set internet-service-id 5767170
next
edit "Veracode-DNS"
    set internet-service-id 5767171
next
edit "Veracode-Outbound_Email"
    set internet-service-id 5767172
next
edit "Veracode-SSH"
    set internet-service-id 5767174
next
edit "Veracode-FTP"
    set internet-service-id 5767175
next
edit "Veracode-NTP"
    set internet-service-id 5767176
next
edit "Veracode-Inbound_Email"
    set internet-service-id 5767177
next
edit "Veracode-LDAP"
    set internet-service-id 5767182
next
edit "Veracode-NetBIOS.Session.Service"
    set internet-service-id 5767183
next
edit "Veracode-RTMP"
    set internet-service-id 5767184
next
edit "Veracode-NetBIOS.Name.Service"
    set internet-service-id 5767192
next
edit "Anaplan-Other"
```

```
        set internet-service-id 5832704
next
edit "Anaplan-Web"
    set internet-service-id 5832705
next
edit "Anaplan-ICMP"
    set internet-service-id 5832706
next
edit "Anaplan-DNS"
    set internet-service-id 5832707
next
edit "Anaplan-Outbound_Email"
    set internet-service-id 5832708
next
edit "Anaplan-SSH"
    set internet-service-id 5832710
next
edit "Anaplan-FTP"
    set internet-service-id 5832711
next
edit "Anaplan-NTP"
    set internet-service-id 5832712
next
edit "Anaplan-Inbound_Email"
    set internet-service-id 5832713
next
edit "Anaplan-LDAP"
    set internet-service-id 5832718
next
edit "Anaplan-NetBIOS.Session.Service"
    set internet-service-id 5832719
next
edit "Anaplan-RTMP"
    set internet-service-id 5832720
next
edit "Anaplan-NetBIOS.Name.Service"
    set internet-service-id 5832728
next
edit "Rapid7-Other"
    set internet-service-id 5898240
next
edit "Rapid7-Web"
    set internet-service-id 5898241
next
edit "Rapid7-ICMP"
    set internet-service-id 5898242
```

```
next
edit "Rapid7-DNS"
    set internet-service-id 5898243
next
edit "Rapid7-Outbound_Email"
    set internet-service-id 5898244
next
edit "Rapid7-SSH"
    set internet-service-id 5898246
next
edit "Rapid7-FTP"
    set internet-service-id 5898247
next
edit "Rapid7-NTP"
    set internet-service-id 5898248
next
edit "Rapid7-Inbound_Email"
    set internet-service-id 5898249
next
edit "Rapid7-LDAP"
    set internet-service-id 5898254
next
edit "Rapid7-NetBIOS.Session.Service"
    set internet-service-id 5898255
next
edit "Rapid7-RTMP"
    set internet-service-id 5898256
next
edit "Rapid7-NetBIOS.Name.Service"
    set internet-service-id 5898264
next
edit "AnyDesk-AnyDesk"
    set internet-service-id 5963927
next
edit "ESET-Eset.Service"
    set internet-service-id 6029426
next
edit "Slack-Other"
    set internet-service-id 6094848
next
edit "Slack-Web"
    set internet-service-id 6094849
next
edit "Slack-ICMP"
    set internet-service-id 6094850
next
```

```
edit "Slack-DNS"
    set internet-service-id 6094851
next
edit "Slack-Outbound_Email"
    set internet-service-id 6094852
next
edit "Slack-SSH"
    set internet-service-id 6094854
next
edit "Slack-FTP"
    set internet-service-id 6094855
next
edit "Slack-NTP"
    set internet-service-id 6094856
next
edit "Slack-Inbound_Email"
    set internet-service-id 6094857
next
edit "Slack-LDAP"
    set internet-service-id 6094862
next
edit "Slack-NetBIOS.Session.Service"
    set internet-service-id 6094863
next
edit "Slack-RTMP"
    set internet-service-id 6094864
next
edit "Slack-NetBIOS.Name.Service"
    set internet-service-id 6094872
next
edit "Slack-Slack"
    set internet-service-id 6095024
next
edit "ADP-Other"
    set internet-service-id 6160384
next
edit "ADP-Web"
    set internet-service-id 6160385
next
edit "ADP-ICMP"
    set internet-service-id 6160386
next
edit "ADP-DNS"
    set internet-service-id 6160387
next
edit "ADP-Outbound_Email"
```

```
        set internet-service-id 6160388
next
edit "ADP-SSH"
        set internet-service-id 6160390
next
edit "ADP-FTP"
        set internet-service-id 6160391
next
edit "ADP-NTP"
        set internet-service-id 6160392
next
edit "ADP-Inbound_Email"
        set internet-service-id 6160393
next
edit "ADP-LDAP"
        set internet-service-id 6160398
next
edit "ADP-NetBIOS.Session.Service"
        set internet-service-id 6160399
next
edit "ADP-RTMP"
        set internet-service-id 6160400
next
edit "ADP-NetBIOS.Name.Service"
        set internet-service-id 6160408
next
edit "Blackboard-Other"
        set internet-service-id 6225920
next
edit "Blackboard-Web"
        set internet-service-id 6225921
next
edit "Blackboard-ICMP"
        set internet-service-id 6225922
next
edit "Blackboard-DNS"
        set internet-service-id 6225923
next
edit "Blackboard-Outbound_Email"
        set internet-service-id 6225924
next
edit "Blackboard-SSH"
        set internet-service-id 6225926
next
edit "Blackboard-FTP"
        set internet-service-id 6225927
```

```
next
edit "Blackboard-NTP"
    set internet-service-id 6225928
next
edit "Blackboard-Inbound_Email"
    set internet-service-id 6225929
next
edit "Blackboard-LDAP"
    set internet-service-id 6225934
next
edit "Blackboard-NetBIOS.Session.Service"
    set internet-service-id 6225935
next
edit "Blackboard-RTMP"
    set internet-service-id 6225936
next
edit "Blackboard-NetBIOS.Name.Service"
    set internet-service-id 6225944
next
edit "SAP-Other"
    set internet-service-id 6291456
next
edit "SAP-Web"
    set internet-service-id 6291457
next
edit "SAP-ICMP"
    set internet-service-id 6291458
next
edit "SAP-DNS"
    set internet-service-id 6291459
next
edit "SAP-Outbound_Email"
    set internet-service-id 6291460
next
edit "SAP-SSH"
    set internet-service-id 6291462
next
edit "SAP-FTP"
    set internet-service-id 6291463
next
edit "SAP-NTP"
    set internet-service-id 6291464
next
edit "SAP-Inbound_Email"
    set internet-service-id 6291465
next
```

```
edit "SAP-LDAP"
    set internet-service-id 6291470
next
edit "SAP-NetBIOS.Session.Service"
    set internet-service-id 6291471
next
edit "SAP-RTMP"
    set internet-service-id 6291472
next
edit "SAP-NetBIOS.Name.Service"
    set internet-service-id 6291480
next
edit "SAP-HANA"
    set internet-service-id 6291612
next
edit "SAP-SuccessFactors"
    set internet-service-id 6291618
next
edit "Snap-Snapchat"
    set internet-service-id 6357108
next
edit "Zoom.us-Zoom.Meeting"
    set internet-service-id 6422646
next
edit "Sophos-Other"
    set internet-service-id 6488064
next
edit "Sophos-Web"
    set internet-service-id 6488065
next
edit "Sophos-ICMP"
    set internet-service-id 6488066
next
edit "Sophos-DNS"
    set internet-service-id 6488067
next
edit "Sophos-Outbound_Email"
    set internet-service-id 6488068
next
edit "Sophos-SSH"
    set internet-service-id 6488070
next
edit "Sophos-FTP"
    set internet-service-id 6488071
next
edit "Sophos-NTP"
```



```
        set internet-service-id 6488072
next
edit "Sophos-Inbound_Email"
        set internet-service-id 6488073
next
edit "Sophos-LDAP"
        set internet-service-id 6488078
next
edit "Sophos-NetBIOS.Session.Service"
        set internet-service-id 6488079
next
edit "Sophos-RTMP"
        set internet-service-id 6488080
next
edit "Sophos-NetBIOS.Name.Service"
        set internet-service-id 6488088
next
edit "Cloudflare-Other"
        set internet-service-id 6553600
next
edit "Cloudflare-Web"
        set internet-service-id 6553601
next
edit "Cloudflare-ICMP"
        set internet-service-id 6553602
next
edit "Cloudflare-DNS"
        set internet-service-id 6553603
next
edit "Cloudflare-Outbound_Email"
        set internet-service-id 6553604
next
edit "Cloudflare-SSH"
        set internet-service-id 6553606
next
edit "Cloudflare-FTP"
        set internet-service-id 6553607
next
edit "Cloudflare-NTP"
        set internet-service-id 6553608
next
edit "Cloudflare-Inbound_Email"
        set internet-service-id 6553609
next
edit "Cloudflare-LDAP"
        set internet-service-id 6553614
```

```
next
edit "Cloudflare-NetBIOS.Session.Service"
    set internet-service-id 6553615
next
edit "Cloudflare-RTMP"
    set internet-service-id 6553616
next
edit "Cloudflare-NetBIOS.Name.Service"
    set internet-service-id 6553624
next
edit "Cloudflare-CDN"
    set internet-service-id 6553737
next
edit "Pexip-Pexip.Meeting"
    set internet-service-id 6619256
next
edit "Zscaler-Other"
    set internet-service-id 6684672
next
edit "Zscaler-Web"
    set internet-service-id 6684673
next
edit "Zscaler-ICMP"
    set internet-service-id 6684674
next
edit "Zscaler-DNS"
    set internet-service-id 6684675
next
edit "Zscaler-Outbound_Email"
    set internet-service-id 6684676
next
edit "Zscaler-SSH"
    set internet-service-id 6684678
next
edit "Zscaler-FTP"
    set internet-service-id 6684679
next
edit "Zscaler-NTP"
    set internet-service-id 6684680
next
edit "Zscaler-Inbound_Email"
    set internet-service-id 6684681
next
edit "Zscaler-LDAP"
    set internet-service-id 6684686
next
```

```
edit "Zscaler-NetBIOS.Session.Service"
    set internet-service-id 6684687
next
edit "Zscaler-RTMP"
    set internet-service-id 6684688
next
edit "Zscaler-NetBIOS.Name.Service"
    set internet-service-id 6684696
next
edit "Zscaler-Zscaler.Cloud"
    set internet-service-id 6684793
next
edit "Yandex-Other"
    set internet-service-id 6750208
next
edit "Yandex-Web"
    set internet-service-id 6750209
next
edit "Yandex-ICMP"
    set internet-service-id 6750210
next
edit "Yandex-DNS"
    set internet-service-id 6750211
next
edit "Yandex-Outbound_Email"
    set internet-service-id 6750212
next
edit "Yandex-SSH"
    set internet-service-id 6750214
next
edit "Yandex-FTP"
    set internet-service-id 6750215
next
edit "Yandex-NTP"
    set internet-service-id 6750216
next
edit "Yandex-Inbound_Email"
    set internet-service-id 6750217
next
edit "Yandex-LDAP"
    set internet-service-id 6750222
next
edit "Yandex-NetBIOS.Session.Service"
    set internet-service-id 6750223
next
edit "Yandex-RTMP"
```

```
        set internet-service-id 6750224
next
edit "Yandex-NetBIOS.Name.Service"
    set internet-service-id 6750232
next
edit "mail.ru-Other"
    set internet-service-id 6815744
next
edit "mail.ru-Web"
    set internet-service-id 6815745
next
edit "mail.ru-ICMP"
    set internet-service-id 6815746
next
edit "mail.ru-DNS"
    set internet-service-id 6815747
next
edit "mail.ru-Outbound_Email"
    set internet-service-id 6815748
next
edit "mail.ru-SSH"
    set internet-service-id 6815750
next
edit "mail.ru-FTP"
    set internet-service-id 6815751
next
edit "mail.ru-NTP"
    set internet-service-id 6815752
next
edit "mail.ru-Inbound_Email"
    set internet-service-id 6815753
next
edit "mail.ru-LDAP"
    set internet-service-id 6815758
next
edit "mail.ru-NetBIOS.Session.Service"
    set internet-service-id 6815759
next
edit "mail.ru-RTMP"
    set internet-service-id 6815760
next
edit "mail.ru-NetBIOS.Name.Service"
    set internet-service-id 6815768
next
edit "Alibaba-Other"
    set internet-service-id 6881280
```

```
next
edit "Alibaba-Web"
    set internet-service-id 6881281
next
edit "Alibaba-ICMP"
    set internet-service-id 6881282
next
edit "Alibaba-DNS"
    set internet-service-id 6881283
next
edit "Alibaba-Outbound_Email"
    set internet-service-id 6881284
next
edit "Alibaba-SSH"
    set internet-service-id 6881286
next
edit "Alibaba-FTP"
    set internet-service-id 6881287
next
edit "Alibaba-NTP"
    set internet-service-id 6881288
next
edit "Alibaba-Inbound_Email"
    set internet-service-id 6881289
next
edit "Alibaba-LDAP"
    set internet-service-id 6881294
next
edit "Alibaba-NetBIOS.Session.Service"
    set internet-service-id 6881295
next
edit "Alibaba-RTMP"
    set internet-service-id 6881296
next
edit "Alibaba-NetBIOS.Name.Service"
    set internet-service-id 6881304
next
edit "Alibaba-Alibaba.Cloud"
    set internet-service-id 6881402
next
edit "GoDaddy-Other"
    set internet-service-id 6946816
next
edit "GoDaddy-Web"
    set internet-service-id 6946817
next
```

```
edit "GoDaddy-ICMP"
    set internet-service-id 6946818
next
edit "GoDaddy-DNS"
    set internet-service-id 6946819
next
edit "GoDaddy-Outbound_Email"
    set internet-service-id 6946820
next
edit "GoDaddy-SSH"
    set internet-service-id 6946822
next
edit "GoDaddy-FTP"
    set internet-service-id 6946823
next
edit "GoDaddy-NTP"
    set internet-service-id 6946824
next
edit "GoDaddy-Inbound_Email"
    set internet-service-id 6946825
next
edit "GoDaddy-LDAP"
    set internet-service-id 6946830
next
edit "GoDaddy-NetBIOS.Session.Service"
    set internet-service-id 6946831
next
edit "GoDaddy-RTMP"
    set internet-service-id 6946832
next
edit "GoDaddy-NetBIOS.Name.Service"
    set internet-service-id 6946840
next
edit "GoDaddy-GoDaddy.Email"
    set internet-service-id 6946939
next
edit "Bluejeans-Bluejeans.Meeting"
    set internet-service-id 7012476
next
edit "Webroot-Webroot.SecureAnywhere"
    set internet-service-id 7078013
next
edit "Avast-Other"
    set internet-service-id 7143424
next
edit "Avast-Web"
```

```
        set internet-service-id 7143425
next
edit "Avast-ICMP"
        set internet-service-id 7143426
next
edit "Avast-DNS"
        set internet-service-id 7143427
next
edit "Avast-Outbound_Email"
        set internet-service-id 7143428
next
edit "Avast-SSH"
        set internet-service-id 7143430
next
edit "Avast-FTP"
        set internet-service-id 7143431
next
edit "Avast-NTP"
        set internet-service-id 7143432
next
edit "Avast-Inbound_Email"
        set internet-service-id 7143433
next
edit "Avast-LDAP"
        set internet-service-id 7143438
next
edit "Avast-NetBIOS.Session.Service"
        set internet-service-id 7143439
next
edit "Avast-RTMP"
        set internet-service-id 7143440
next
edit "Avast-NetBIOS.Name.Service"
        set internet-service-id 7143448
next
edit "Avast-Avast.Security"
        set internet-service-id 7143550
next
edit "Wetransfer-Other"
        set internet-service-id 7208960
next
edit "Wetransfer-Web"
        set internet-service-id 7208961
next
edit "Wetransfer-ICMP"
        set internet-service-id 7208962
```

```
next
edit "Wetransfer-DNS"
    set internet-service-id 7208963
next
edit "Wetransfer-Outbound_Email"
    set internet-service-id 7208964
next
edit "Wetransfer-SSH"
    set internet-service-id 7208966
next
edit "Wetransfer-FTP"
    set internet-service-id 7208967
next
edit "Wetransfer-NTP"
    set internet-service-id 7208968
next
edit "Wetransfer-Inbound_Email"
    set internet-service-id 7208969
next
edit "Wetransfer-LDAP"
    set internet-service-id 7208974
next
edit "Wetransfer-NetBIOS.Session.Service"
    set internet-service-id 7208975
next
edit "Wetransfer-RTMP"
    set internet-service-id 7208976
next
edit "Wetransfer-NetBIOS.Name.Service"
    set internet-service-id 7208984
next
edit "Sendgrid-Sendgrid.Email"
    set internet-service-id 7274623
next
edit "Ubiquiti-UniFi"
    set internet-service-id 7340160
next
edit "Lifesize-Lifesize.Cloud"
    set internet-service-id 7405697
next
edit "Okta-Other"
    set internet-service-id 7471104
next
edit "Okta-Web"
    set internet-service-id 7471105
next
```



```
edit "Okta-ICMP"
    set internet-service-id 7471106
next
edit "Okta-DNS"
    set internet-service-id 7471107
next
edit "Okta-Outbound_Email"
    set internet-service-id 7471108
next
edit "Okta-SSH"
    set internet-service-id 7471110
next
edit "Okta-FTP"
    set internet-service-id 7471111
next
edit "Okta-NTP"
    set internet-service-id 7471112
next
edit "Okta-Inbound_Email"
    set internet-service-id 7471113
next
edit "Okta-LDAP"
    set internet-service-id 7471118
next
edit "Okta-NetBIOS.Session.Service"
    set internet-service-id 7471119
next
edit "Okta-RTMP"
    set internet-service-id 7471120
next
edit "Okta-NetBIOS.Name.Service"
    set internet-service-id 7471128
next
edit "Okta-Okta"
    set internet-service-id 7471307
next
edit "Cybozu-Other"
    set internet-service-id 7536640
next
edit "Cybozu-Web"
    set internet-service-id 7536641
next
edit "Cybozu-ICMP"
    set internet-service-id 7536642
next
edit "Cybozu-DNS"
```

```
        set internet-service-id 7536643
next
edit "Cybozu-Outbound_Email"
        set internet-service-id 7536644
next
edit "Cybozu-SSH"
        set internet-service-id 7536646
next
edit "Cybozu-FTP"
        set internet-service-id 7536647
next
edit "Cybozu-NTP"
        set internet-service-id 7536648
next
edit "Cybozu-Inbound_Email"
        set internet-service-id 7536649
next
edit "Cybozu-LDAP"
        set internet-service-id 7536654
next
edit "Cybozu-NetBIOS.Session.Service"
        set internet-service-id 7536655
next
edit "Cybozu-RTMP"
        set internet-service-id 7536656
next
edit "Cybozu-NetBIOS.Name.Service"
        set internet-service-id 7536664
next
edit "VNC-Other"
        set internet-service-id 7602176
next
edit "VNC-Web"
        set internet-service-id 7602177
next
edit "VNC-ICMP"
        set internet-service-id 7602178
next
edit "VNC-DNS"
        set internet-service-id 7602179
next
edit "VNC-Outbound_Email"
        set internet-service-id 7602180
next
edit "VNC-SSH"
        set internet-service-id 7602182
```

```
next
edit "VNC-FTP"
    set internet-service-id 7602183
next
edit "VNC-NTP"
    set internet-service-id 7602184
next
edit "VNC-Inbound_Email"
    set internet-service-id 7602185
next
edit "VNC-LDAP"
    set internet-service-id 7602190
next
edit "VNC-NetBIOS.Session.Service"
    set internet-service-id 7602191
next
edit "VNC-RTMP"
    set internet-service-id 7602192
next
edit "VNC-NetBIOS.Name.Service"
    set internet-service-id 7602200
next
edit "Egnyte-Egnyte"
    set internet-service-id 7667846
next
edit "CrowdStrike-CrowdStrike.Falcon.Cloud"
    set internet-service-id 7733383
next
edit "Aruba.it-Other"
    set internet-service-id 7798784
next
edit "Aruba.it-Web"
    set internet-service-id 7798785
next
edit "Aruba.it-ICMP"
    set internet-service-id 7798786
next
edit "Aruba.it-DNS"
    set internet-service-id 7798787
next
edit "Aruba.it-Outbound_Email"
    set internet-service-id 7798788
next
edit "Aruba.it-SSH"
    set internet-service-id 7798790
next
```

```
edit "Aruba.it-FTP"
    set internet-service-id 7798791
next
edit "Aruba.it-NTP"
    set internet-service-id 7798792
next
edit "Aruba.it-Inbound_Email"
    set internet-service-id 7798793
next
edit "Aruba.it-LDAP"
    set internet-service-id 7798798
next
edit "Aruba.it-NetBIOS.Session.Service"
    set internet-service-id 7798799
next
edit "Aruba.it-RTMP"
    set internet-service-id 7798800
next
edit "Aruba.it-NetBIOS.Name.Service"
    set internet-service-id 7798808
next
edit "ISLOnline-Other"
    set internet-service-id 7864320
next
edit "ISLOnline-Web"
    set internet-service-id 7864321
next
edit "ISLOnline-ICMP"
    set internet-service-id 7864322
next
edit "ISLOnline-DNS"
    set internet-service-id 7864323
next
edit "ISLOnline-Outbound_Email"
    set internet-service-id 7864324
next
edit "ISLOnline-SSH"
    set internet-service-id 7864326
next
edit "ISLOnline-FTP"
    set internet-service-id 7864327
next
edit "ISLOnline-NTP"
    set internet-service-id 7864328
next
edit "ISLOnline-Inbound_Email"
```

```
        set internet-service-id 7864329
next
edit "ISLOnline-LDAP"
        set internet-service-id 7864334
next
edit "ISLOnline-NetBIOS.Session.Service"
        set internet-service-id 7864335
next
edit "ISLOnline-RTMP"
        set internet-service-id 7864336
next
edit "ISLOnline-NetBIOS.Name.Service"
        set internet-service-id 7864344
next
edit "Akamai-CDN"
        set internet-service-id 7929993
next
edit "Akamai-Linode.Cloud"
        set internet-service-id 7930148
next
edit "Rackspace-CDN"
        set internet-service-id 7995529
next
edit "Instart-CDN"
        set internet-service-id 8061065
next
edit "Bitdefender-Other"
        set internet-service-id 8126464
next
edit "Bitdefender-Web"
        set internet-service-id 8126465
next
edit "Bitdefender-ICMP"
        set internet-service-id 8126466
next
edit "Bitdefender-DNS"
        set internet-service-id 8126467
next
edit "Bitdefender-Outbound_Email"
        set internet-service-id 8126468
next
edit "Bitdefender-SSH"
        set internet-service-id 8126470
next
edit "Bitdefender-FTP"
        set internet-service-id 8126471
```

```
next
edit "Bitdefender-NTP"
    set internet-service-id 8126472
next
edit "Bitdefender-Inbound_Email"
    set internet-service-id 8126473
next
edit "Bitdefender-LDAP"
    set internet-service-id 8126478
next
edit "Bitdefender-NetBIOS.Session.Service"
    set internet-service-id 8126479
next
edit "Bitdefender-RTMP"
    set internet-service-id 8126480
next
edit "Bitdefender-NetBIOS.Name.Service"
    set internet-service-id 8126488
next
edit "Pingdom-Other"
    set internet-service-id 8192000
next
edit "Pingdom-Web"
    set internet-service-id 8192001
next
edit "Pingdom-ICMP"
    set internet-service-id 8192002
next
edit "Pingdom-DNS"
    set internet-service-id 8192003
next
edit "Pingdom-Outbound_Email"
    set internet-service-id 8192004
next
edit "Pingdom-SSH"
    set internet-service-id 8192006
next
edit "Pingdom-FTP"
    set internet-service-id 8192007
next
edit "Pingdom-NTP"
    set internet-service-id 8192008
next
edit "Pingdom-Inbound_Email"
    set internet-service-id 8192009
next
```

```
edit "Pingdom-LDAP"
    set internet-service-id 8192014
next
edit "Pingdom-NetBIOS.Session.Service"
    set internet-service-id 8192015
next
edit "Pingdom-RTMP"
    set internet-service-id 8192016
next
edit "Pingdom-NetBIOS.Name.Service"
    set internet-service-id 8192024
next
edit "UptimeRobot-Other"
    set internet-service-id 8257536
next
edit "UptimeRobot-Web"
    set internet-service-id 8257537
next
edit "UptimeRobot-ICMP"
    set internet-service-id 8257538
next
edit "UptimeRobot-DNS"
    set internet-service-id 8257539
next
edit "UptimeRobot-Outbound_Email"
    set internet-service-id 8257540
next
edit "UptimeRobot-SSH"
    set internet-service-id 8257542
next
edit "UptimeRobot-FTP"
    set internet-service-id 8257543
next
edit "UptimeRobot-NTP"
    set internet-service-id 8257544
next
edit "UptimeRobot-Inbound_Email"
    set internet-service-id 8257545
next
edit "UptimeRobot-LDAP"
    set internet-service-id 8257550
next
edit "UptimeRobot-NetBIOS.Session.Service"
    set internet-service-id 8257551
next
edit "UptimeRobot-RTMP"
```

```
        set internet-service-id 8257552
next
edit "UptimeRobot-NetBIOS.Name.Service"
    set internet-service-id 8257560
next
edit "UptimeRobot-UptimeRobot.Monitor"
    set internet-service-id 8257709
next
edit "Quovadisglobal-Other"
    set internet-service-id 8323072
next
edit "Quovadisglobal-Web"
    set internet-service-id 8323073
next
edit "Quovadisglobal-ICMP"
    set internet-service-id 8323074
next
edit "Quovadisglobal-DNS"
    set internet-service-id 8323075
next
edit "Quovadisglobal-Outbound_Email"
    set internet-service-id 8323076
next
edit "Quovadisglobal-SSH"
    set internet-service-id 8323078
next
edit "Quovadisglobal-FTP"
    set internet-service-id 8323079
next
edit "Quovadisglobal-NTP"
    set internet-service-id 8323080
next
edit "Quovadisglobal-Inbound_Email"
    set internet-service-id 8323081
next
edit "Quovadisglobal-LDAP"
    set internet-service-id 8323086
next
edit "Quovadisglobal-NetBIOS.Session.Service"
    set internet-service-id 8323087
next
edit "Quovadisglobal-RTMP"
    set internet-service-id 8323088
next
edit "Quovadisglobal-NetBIOS.Name.Service"
    set internet-service-id 8323096
```



```
next
edit "Splashtop-Splashtop"
    set internet-service-id 8388751
next
edit "Zoox-Other"
    set internet-service-id 8454144
next
edit "Zoox-Web"
    set internet-service-id 8454145
next
edit "Zoox-ICMP"
    set internet-service-id 8454146
next
edit "Zoox-DNS"
    set internet-service-id 8454147
next
edit "Zoox-Outbound_Email"
    set internet-service-id 8454148
next
edit "Zoox-SSH"
    set internet-service-id 8454150
next
edit "Zoox-FTP"
    set internet-service-id 8454151
next
edit "Zoox-NTP"
    set internet-service-id 8454152
next
edit "Zoox-Inbound_Email"
    set internet-service-id 8454153
next
edit "Zoox-LDAP"
    set internet-service-id 8454158
next
edit "Zoox-NetBIOS.Session.Service"
    set internet-service-id 8454159
next
edit "Zoox-RTMP"
    set internet-service-id 8454160
next
edit "Zoox-NetBIOS.Name.Service"
    set internet-service-id 8454168
next
edit "Skyfii-Other"
    set internet-service-id 8519680
next
```

```
edit "Skyfii-Web"
    set internet-service-id 8519681
next
edit "Skyfii-ICMP"
    set internet-service-id 8519682
next
edit "Skyfii-DNS"
    set internet-service-id 8519683
next
edit "Skyfii-Outbound_Email"
    set internet-service-id 8519684
next
edit "Skyfii-SSH"
    set internet-service-id 8519686
next
edit "Skyfii-FTP"
    set internet-service-id 8519687
next
edit "Skyfii-NTP"
    set internet-service-id 8519688
next
edit "Skyfii-Inbound_Email"
    set internet-service-id 8519689
next
edit "Skyfii-LDAP"
    set internet-service-id 8519694
next
edit "Skyfii-NetBIOS.Session.Service"
    set internet-service-id 8519695
next
edit "Skyfii-RTMP"
    set internet-service-id 8519696
next
edit "Skyfii-NetBIOS.Name.Service"
    set internet-service-id 8519704
next
edit "CoffeeBean-Other"
    set internet-service-id 8585216
next
edit "CoffeeBean-Web"
    set internet-service-id 8585217
next
edit "CoffeeBean-ICMP"
    set internet-service-id 8585218
next
edit "CoffeeBean-DNS"
```

```
        set internet-service-id 8585219
next
edit "CoffeeBean-Outbound_Email"
    set internet-service-id 8585220
next
edit "CoffeeBean-SSH"
    set internet-service-id 8585222
next
edit "CoffeeBean-FTP"
    set internet-service-id 8585223
next
edit "CoffeeBean-NTP"
    set internet-service-id 8585224
next
edit "CoffeeBean-Inbound_Email"
    set internet-service-id 8585225
next
edit "CoffeeBean-LDAP"
    set internet-service-id 8585230
next
edit "CoffeeBean-NetBIOS.Session.Service"
    set internet-service-id 8585231
next
edit "CoffeeBean-RTMP"
    set internet-service-id 8585232
next
edit "CoffeeBean-NetBIOS.Name.Service"
    set internet-service-id 8585240
next
edit "Cloud4Wi-Other"
    set internet-service-id 8650752
next
edit "Cloud4Wi-Web"
    set internet-service-id 8650753
next
edit "Cloud4Wi-ICMP"
    set internet-service-id 8650754
next
edit "Cloud4Wi-DNS"
    set internet-service-id 8650755
next
edit "Cloud4Wi-Outbound_Email"
    set internet-service-id 8650756
next
edit "Cloud4Wi-SSH"
    set internet-service-id 8650758
```

```
next
edit "Cloud4Wi-FTP"
    set internet-service-id 8650759
next
edit "Cloud4Wi-NTP"
    set internet-service-id 8650760
next
edit "Cloud4Wi-Inbound_Email"
    set internet-service-id 8650761
next
edit "Cloud4Wi-LDAP"
    set internet-service-id 8650766
next
edit "Cloud4Wi-NetBIOS.Session.Service"
    set internet-service-id 8650767
next
edit "Cloud4Wi-RTMP"
    set internet-service-id 8650768
next
edit "Cloud4Wi-NetBIOS.Name.Service"
    set internet-service-id 8650776
next
edit "Panda-Panda.Security"
    set internet-service-id 8716432
next
edit "Ewon-Talk2M"
    set internet-service-id 8781970
next
edit "Nutanix-Nutanix.Cloud"
    set internet-service-id 8847507
next
edit "Backblaze-Other"
    set internet-service-id 8912896
next
edit "Backblaze-Web"
    set internet-service-id 8912897
next
edit "Backblaze-ICMP"
    set internet-service-id 8912898
next
edit "Backblaze-DNS"
    set internet-service-id 8912899
next
edit "Backblaze-Outbound_Email"
    set internet-service-id 8912900
next
```

```
edit "Backblaze-SSH"
    set internet-service-id 8912902
next
edit "Backblaze-FTP"
    set internet-service-id 8912903
next
edit "Backblaze-NTP"
    set internet-service-id 8912904
next
edit "Backblaze-Inbound_Email"
    set internet-service-id 8912905
next
edit "Backblaze-LDAP"
    set internet-service-id 8912910
next
edit "Backblaze-NetBIOS.Session.Service"
    set internet-service-id 8912911
next
edit "Backblaze-RTMP"
    set internet-service-id 8912912
next
edit "Backblaze-NetBIOS.Name.Service"
    set internet-service-id 8912920
next
edit "Extreme-Extreme.Cloud"
    set internet-service-id 8978580
next
edit "XING-Other"
    set internet-service-id 9043968
next
edit "XING-Web"
    set internet-service-id 9043969
next
edit "XING-ICMP"
    set internet-service-id 9043970
next
edit "XING-DNS"
    set internet-service-id 9043971
next
edit "XING-Outbound_Email"
    set internet-service-id 9043972
next
edit "XING-SSH"
    set internet-service-id 9043974
next
edit "XING-FTP"
```

```
        set internet-service-id 9043975
next
edit "XING-NTP"
        set internet-service-id 9043976
next
edit "XING-Inbound_Email"
        set internet-service-id 9043977
next
edit "XING-LDAP"
        set internet-service-id 9043982
next
edit "XING-NetBIOS.Session.Service"
        set internet-service-id 9043983
next
edit "XING-RTMP"
        set internet-service-id 9043984
next
edit "XING-NetBIOS.Name.Service"
        set internet-service-id 9043992
next
edit "Genesys-PureCloud"
        set internet-service-id 9109653
next
edit "BlackBerry-Cylance"
        set internet-service-id 9175190
next
edit "DigiCert-OCSP"
        set internet-service-id 9240728
next
edit "Infomaniak-SwissTransfer"
        set internet-service-id 9306265
next
edit "Fuze-Fuze"
        set internet-service-id 9371802
next
edit "Truecaller-Truecaller"
        set internet-service-id 9437339
next
edit "GlobalSign-OCSP"
        set internet-service-id 9502872
next
edit "VeriSign-OCSP"
        set internet-service-id 9568408
next
edit "Sony-PlayStation.Network"
        set internet-service-id 9633952
```

```
next
edit "Acronis-Cyber.Cloud"
    set internet-service-id 9699489
next
edit "RingCentral-RingCentral"
    set internet-service-id 9765027
next
edit "FSecure-FSecure"
    set internet-service-id 9830564
next
edit "Kaseya-Kaseya.Cloud"
    set internet-service-id 9896101
next
edit "Shodan-Scanner"
    set internet-service-id 9961638
next
edit "Censys-Scanner"
    set internet-service-id 10027174
next
edit "Valve-Steam"
    set internet-service-id 10092711
next
edit "YouSeeU-Bongo"
    set internet-service-id 10158248
next
edit "Cato-Cato.Cloud"
    set internet-service-id 10223785
next
edit "SolarWinds-SpamExperts"
    set internet-service-id 10289323
next
edit "SolarWinds-Pingdom.Probe"
    set internet-service-id 10289326
next
edit "SolarWinds-SolarWinds.RMM"
    set internet-service-id 10289379
next
edit "8X8-8X8.Cloud"
    set internet-service-id 10354860
next
edit "Zattoo-Zattoo.TV"
    set internet-service-id 10420401
next
edit "Datto-Datto.RMM"
    set internet-service-id 10485939
next
```

```
edit "Barracuda-Barracuda.Cloud"
    set internet-service-id 10551477
next
edit "Naver-Line"
    set internet-service-id 10617015
next
edit "Disney-Disney+"
    set internet-service-id 10682552
next
edit "DNS-DoH_DoT"
    set internet-service-id 10748089
next
edit "DNS-Root.Name.Servers"
    set internet-service-id 10748156
next
edit "Quad9-Quad9.Standard.DNS"
    set internet-service-id 10813626
next
edit "Stretchoid-Scanner"
    set internet-service-id 10879142
next
edit "Poly-RealConnect.Service"
    set internet-service-id 10944700
next
edit "Telegram-Telegram"
    set internet-service-id 11010249
next
edit "Spotify-Spotify"
    set internet-service-id 11075786
next
edit "NextDNS-NextDNS"
    set internet-service-id 11141324
next
edit "Fastly-CDN"
    set internet-service-id 11206793
next
edit "Neustar-UltraDNS.Probes"
    set internet-service-id 11272397
next
edit "Malicious-Malicious.Server"
    set internet-service-id 11337935
next
edit "NIST-ITS"
    set internet-service-id 11403472
next
edit "Jamf-Jamf.Cloud"
```



```
        set internet-service-id 11469009
next
edit "Alcatel.Lucent-Rainbow"
    set internet-service-id 11534546
next
edit "Forcepoint-Forcepoint.Cloud"
    set internet-service-id 11600083
next
edit "Datadog-Datadog"
    set internet-service-id 11665620
next
edit "Mimecast-Mimecast"
    set internet-service-id 11731157
next
edit "MediaFire-Other"
    set internet-service-id 11796480
next
edit "MediaFire-Web"
    set internet-service-id 11796481
next
edit "MediaFire-ICMP"
    set internet-service-id 11796482
next
edit "MediaFire-DNS"
    set internet-service-id 11796483
next
edit "MediaFire-Outbound_Email"
    set internet-service-id 11796484
next
edit "MediaFire-SSH"
    set internet-service-id 11796486
next
edit "MediaFire-FTP"
    set internet-service-id 11796487
next
edit "MediaFire-NTP"
    set internet-service-id 11796488
next
edit "MediaFire-Inbound_Email"
    set internet-service-id 11796489
next
edit "MediaFire-LDAP"
    set internet-service-id 11796494
next
edit "MediaFire-NetBIOS.Session.Service"
    set internet-service-id 11796495
```

```
next
edit "MediaFire-RTMP"
    set internet-service-id 11796496
next
edit "MediaFire-NetBIOS.Name.Service"
    set internet-service-id 11796504
next
edit "Pandora-Pandora"
    set internet-service-id 11862230
next
edit "SiriusXM-SiriusXM"
    set internet-service-id 11927767
next
edit "Hopin-Hopin"
    set internet-service-id 11993304
next
edit "RedShield-RedShield.Cloud"
    set internet-service-id 12058842
next
edit "InterneTTL-Scanner"
    set internet-service-id 12124326
next
edit "VadeSecure-VadeSecure.Cloud"
    set internet-service-id 12189915
next
edit "Netskope-Netskope.Cloud"
    set internet-service-id 12255452
next
edit "ClickMeeting-ClickMeeting"
    set internet-service-id 12320989
next
edit "Tenable-Tenable.io.Cloud.Scanner"
    set internet-service-id 12386528
next
edit "Vidyo-VidyoCloud"
    set internet-service-id 12452065
next
edit "OpenNIC-OpenNIC.DNS"
    set internet-service-id 12517602
next
edit "Sectigo-Sectigo"
    set internet-service-id 12583141
next
edit "DigitalOcean-DigitalOcean.Platform"
    set internet-service-id 12648679
next
```

```
edit "Pitney.Bowes-Pitney.Bowes.Data.Center"
    set internet-service-id 12714216
next
edit "VPN-Anonymous.VPN"
    set internet-service-id 12779753
next
edit "Blockchain-Crypto.Mining.Pool"
    set internet-service-id 12845290
next
edit "FactSet-FactSet"
    set internet-service-id 12910830
next
edit "Bloomberg-Bloomberg"
    set internet-service-id 12976367
next
edit "Five9-Five9"
    set internet-service-id 13041904
next
edit "Gigas-Gigas.Cloud"
    set internet-service-id 13107441
next
edit "Imperva-Imperva.Cloud.WAF"
    set internet-service-id 13172978
next
edit "HorizonIQ-HorizonIQ"
    set internet-service-id 13238515
next
edit "Azion-Azion.Platform"
    set internet-service-id 13304053
next
edit "Hurricane.Electric-
Hurricane.Electric.Internet.Services"
    set internet-service-id 13369590
next
edit "NodePing-NodePing.Probe"
    set internet-service-id 13435127
next
edit "Frontline-Frontline"
    set internet-service-id 13500665
next
edit "Tally-Tally.ERP"
    set internet-service-id 13566202
next
edit "Hosting-Bulletproof.Hosting"
    set internet-service-id 13631739
next
```

```
edit "Okko-Okko.TV"
    set internet-service-id 13697277
next
edit "Voximplant-Voximplant.Platform"
    set internet-service-id 13762829
next
edit "OVHcloud-OVHcloud"
    set internet-service-id 13828367
next
edit "SentinelOne-SentinelOne.Cloud"
    set internet-service-id 13893905
next
edit "Kakao-Kakao.Services"
    set internet-service-id 13959442
next
edit "Stripe-Stripe"
    set internet-service-id 14024979
next
edit "NetScout-Scanner"
    set internet-service-id 14090406
next
edit "Recyber-Scanner"
    set internet-service-id 14155942
next
edit "Cyber.Casa-Scanner"
    set internet-service-id 14221478
next
edit "GTHost-Dedicated.Instant.Servers"
    set internet-service-id 14287132
next
edit "ivi-ivi.Streaming"
    set internet-service-id 14352669
next
edit "BinaryEdge-Scanner"
    set internet-service-id 14418086
next
edit "Fintech-MarketMap.Terminal"
    set internet-service-id 14483742
next
edit "xMatters-xMatters.Platform"
    set internet-service-id 14549279
next
edit "Blizzard-Battle.Net"
    set internet-service-id 14614816
next
edit "Axon-Evidence"
```

```
        set internet-service-id 14680353
next
edit "CDN77-CDN"
        set internet-service-id 14745737
next
edit "GCore.Labs-CDN"
        set internet-service-id 14811273
next
edit "Matrix42-FastViewer"
        set internet-service-id 14876962
next
edit "Bunny.net-CDN"
        set internet-service-id 14942345
next
edit "StackPath-CDN"
        set internet-service-id 15007881
next
edit "Edgio-CDN"
        set internet-service-id 15073417
next
edit "CacheFly-CDN"
        set internet-service-id 15138953
next
edit "Microsoft-Azure.Connectors"
        set internet-service-id 327980
next
edit "Microsoft-Teams.Published.Worldwide.Optimize"
        set internet-service-id 327991
next
edit "Microsoft-Teams.Published.Worldwide.Allow"
        set internet-service-id 327992
next
edit "Microsoft-Azure.Front.Door"
        set internet-service-id 327993
next
edit "Microsoft-Azure.Service.Bus"
        set internet-service-id 328007
next
edit "Microsoft-Azure.Microsoft.Defender"
        set internet-service-id 328009
next
edit "Microsoft-Azure.Resource.Manager"
        set internet-service-id 328013
next
edit "Microsoft-Azure.Arc.Infrastructure"
        set internet-service-id 328014
```

```
next
edit "Microsoft-Azure.Storage"
    set internet-service-id 328015
next
edit "Microsoft-Azure.ATP"
    set internet-service-id 328016
next
edit "Microsoft-Azure.Traffic.Manager"
    set internet-service-id 328017
next
edit "Microsoft-Azure.Windows.Admin.Center"
    set internet-service-id 328018
next
edit "Microsoft-Azure.KeyVault"
    set internet-service-id 328021
next
edit "Microsoft-Azure.Databricks"
    set internet-service-id 328034
next
edit "Microsoft-Azure.Event.Hub"
    set internet-service-id 328035
next
edit "Microsoft-Azure.Power.Platform"
    set internet-service-id 328043
next
edit "Microsoft-Azure.Front.Door.MicrosoftSecurity"
    set internet-service-id 328080
next
edit "Microsoft-Azure.OneDsCollector"
    set internet-service-id 328104
next
edit "Microsoft-Azure.Sentinel"
    set internet-service-id 328105
next
edit "Salesforce-Hyperforce"
    set internet-service-id 655738
next
edit "Fortinet-FortiClient.EMS"
    set internet-service-id 1245477
next
edit "Fortinet-FortiWeb.Cloud"
    set internet-service-id 1245480
next
edit "Fortinet-FortiSASE"
    set internet-service-id 1245481
next
```

```
edit "Fortinet-FortiGuard.SOCaaS"  
    set internet-service-id 1245514  
next  
edit "Fortinet-FortiDLP.Cloud"  
    set internet-service-id 1245546  
next  
edit "Fortinet-FortiMonitor"  
    set internet-service-id 1245558  
next  
edit "Fortinet-FortiSandbox"  
    set internet-service-id 1245560  
next  
edit "Fortinet-FortiSandbox.Cloud"  
    set internet-service-id 1245561  
next  
edit "Tencent-VooV.Meeting"  
    set internet-service-id 2556219  
next  
edit "Tor-Tor.Node"  
    set internet-service-id 2818432  
next  
edit "NewRelic-Synthetic.Monitor"  
    set internet-service-id 4849970  
next  
edit "Rapid7-Scanner"  
    set internet-service-id 5898406  
next  
edit "SAP-SAP.Ariba"  
    set internet-service-id 6291766  
next  
edit "Alibaba-DingTalk"  
    set internet-service-id 6881623  
next  
edit "ISLOnline-ISLOnline"  
    set internet-service-id 7864667  
next  
edit "Datto-Datto.BCDR"  
    set internet-service-id 10486083  
next  
edit "DNS-ARPA.Name.Servers"  
    set internet-service-id 10748206  
next  
edit "DNS-Generic.TLD.Name.Servers"  
    set internet-service-id 10748284  
next  
edit "OVHcloud-OVH.Telecom"
```

```
        set internet-service-id 13828461
next
edit "Paylocity-Paylocity"
    set internet-service-id 15204646
next
edit "Qualys-Qualys.Cloud.Platform"
    set internet-service-id 15270183
next
edit "Dailymotion-Other"
    set internet-service-id 15335424
next
edit "Dailymotion-Web"
    set internet-service-id 15335425
next
edit "Dailymotion-ICMP"
    set internet-service-id 15335426
next
edit "Dailymotion-DNS"
    set internet-service-id 15335427
next
edit "Dailymotion-Outbound_Email"
    set internet-service-id 15335428
next
edit "Dailymotion-SSH"
    set internet-service-id 15335430
next
edit "Dailymotion-FTP"
    set internet-service-id 15335431
next
edit "Dailymotion-NTP"
    set internet-service-id 15335432
next
edit "Dailymotion-Inbound_Email"
    set internet-service-id 15335433
next
edit "Dailymotion-LDAP"
    set internet-service-id 15335438
next
edit "Dailymotion-NetBIOS.Session.Service"
    set internet-service-id 15335439
next
edit "Dailymotion-RTMP"
    set internet-service-id 15335440
next
edit "Dailymotion-NetBIOS.Name.Service"
    set internet-service-id 15335448
```



```
next
edit "LaunchDarkly-LaunchDarkly.Platform"
    set internet-service-id 15401258
next
edit "Medianova-CDN"
    set internet-service-id 15466633
next
edit "NetDocuments-NetDocuments.Platform"
    set internet-service-id 15532331
next
edit "Vonage-Vonage.Contact.Center"
    set internet-service-id 15597869
next
edit "Vonage-Vonage.Video.API"
    set internet-service-id 15597872
next
edit "Veritas-Enterprise.Vault.Cloud"
    set internet-service-id 15663407
next
edit "UK.NCSC-Scanner"
    set internet-service-id 15728806
next
edit "Restream-Restream.Platform"
    set internet-service-id 15794481
next
edit "ArcticWolf-ArcticWolf.Cloud"
    set internet-service-id 15860019
next
edit "CounterPath-Bria"
    set internet-service-id 15925556
next
edit "CriminalIP-Scanner"
    set internet-service-id 15990950
next
edit "IPFS-IPFS.Gateway"
    set internet-service-id 16056629
next
edit "Internet.Census.Group-Scanner"
    set internet-service-id 16122022
next
edit "Performive-Performive.Cloud"
    set internet-service-id 16187706
next
edit "OneLogin-OneLogin"
    set internet-service-id 16253244
next
```

```
edit "Shadowserver-Scanner"
    set internet-service-id 16318630
next
edit "Turkcell-Suit.Conference"
    set internet-service-id 16384317
next
edit "LeakIX-Scanner"
    set internet-service-id 16449702
next
edit "Infoblox-BloxOne"
    set internet-service-id 16515390
next
edit "Nice-CXone"
    set internet-service-id 16580927
next
edit "Hetzner-Hetzner.Hosting.Service"
    set internet-service-id 16646464
next
edit "ThreatLocker-ThreatLocker"
    set internet-service-id 16712001
next
edit "ZPE-ZPE.Cloud"
    set internet-service-id 16777538
next
edit "ColoCrossing-ColoCrossing.Hosting.Service"
    set internet-service-id 16843076
next
edit "Sinch-Mailgun"
    set internet-service-id 16908613
next
edit "SpaceX-Starlink"
    set internet-service-id 16974150
next
edit "Ingenuity-Ingenuity.Cloud.Service"
    set internet-service-id 17039688
next
edit "Skyhigh.Security-Secure.Web.Gateway"
    set internet-service-id 17105227
next
edit "THE.Hosting-THE.Hosting.Hosting.Service"
    set internet-service-id 17170764
next
edit "StatusCake-StatusCake.Monitor"
    set internet-service-id 17236307
next
edit "NAP-NAPLAN"
```

```
        set internet-service-id 17301844
next
edit "Elastic-Elastic.Cloud"
        set internet-service-id 17367382
next
edit "NFON-NFON"
        set internet-service-id 17432920
next
edit "SERVERD-SERVERD.Hosting.Service"
        set internet-service-id 17498457
next
edit "MEGA-MEGA.Cloud"
        set internet-service-id 17563994
next
edit "Hadrian-Scanner"
        set internet-service-id 17629350
next
edit "Dotcom.Monitor-Dotcom.Monitor"
        set internet-service-id 17695068
next
edit "Ahrefs-AhrefsBot"
        set internet-service-id 17760605
next
edit "Semrush-SemrushBot"
        set internet-service-id 17826142
next
edit "Zero.Networks-Zero.Networks"
        set internet-service-id 17891679
next
edit "Vultr-Vultr.Cloud"
        set internet-service-id 17957216
next
edit "EGI-EGI.Hosting.Service"
        set internet-service-id 18022753
next
edit "ONYPHE-Scanner"
        set internet-service-id 18088102
next
edit "Proofpoint-Proofpoint"
        set internet-service-id 18153828
next
edit "Lookout-Lookout.Cloud"
        set internet-service-id 18219365
next
edit "Heimdal-Heimdal.Security"
        set internet-service-id 18284902
```

```
next
edit "Yealink-Yealink.Meeting"
    set internet-service-id 18350439
next
edit "Secomea-Secomea"
    set internet-service-id 18415976
next
edit "CallTower-CT.Cloud"
    set internet-service-id 18481513
next
edit "OpenAI-OpenAI.Bot"
    set internet-service-id 18547052
next
edit "OpenAI-GPT.Actions"
    set internet-service-id 18547073
next
edit "Alpemix-Alpemix"
    set internet-service-id 18612590
next
edit "M247-M247.Hosting.Service"
    set internet-service-id 18678127
next
edit "Quintex-Quintex.Hosting.Service"
    set internet-service-id 18743664
next
edit "Aeza-Aeza.Hosting.Service"
    set internet-service-id 18809201
next
edit "Amanah-Amanah.Hosting.Service"
    set internet-service-id 18874738
next
edit "ByteDance-Lark"
    set internet-service-id 18940275
next
edit "KnowBe4-KnowBe4"
    set internet-service-id 19005812
next
edit "Keeper-Keeper.Security"
    set internet-service-id 19071349
next
edit "NinjaOne-NinjaOne"
    set internet-service-id 19136887
next
edit "Modat-Scanner"
    set internet-service-id 19202214
next
```

```
edit "Make-Make.Platform"
    set internet-service-id 19267963
next
edit "Cloudzy-Cloudzy.Hosting.Service"
    set internet-service-id 19333501
next
edit "Nokia-Deepfield.Genome.Crawler"
    set internet-service-id 19399038
next
edit "Neat-Neat.Cloud"
    set internet-service-id 19464575
next
edit "Brightree-Brightree"
    set internet-service-id 19530114
next
edit "PagerDuty-PagerDuty"
    set internet-service-id 19595651
next
edit "JFrog-JFrog"
    set internet-service-id 19661188
next
edit "Tailscale-Tailscale"
    set internet-service-id 19726725
next
edit "Gamma-Horizon"
    set internet-service-id 19792265
next
edit "Automox-Automox"
    set internet-service-id 19857802
next
edit "Pulseway-Pulseway.RMM"
    set internet-service-id 19923339
next
edit "3xK-3xK.Hosting.Service"
    set internet-service-id 19988876
next
edit "ASEM-UBIQUITY"
    set internet-service-id 20054413
next
edit "Dialpad-Dialpad"
    set internet-service-id 20119950
next
edit "iboss-iboss.Cloud"
    set internet-service-id 20185487
next
edit "Redstor-Redstor"
```

```
        set internet-service-id 20251025
    next
    edit "Anthropic-Claude"
        set internet-service-id 20382099
    next
    edit "NETLOCK-NETLOCK"
        set internet-service-id 20578711
    next
    edit "Aircall-Aircall"
        set internet-service-id 20906400
    next
    edit "Mendix-Mendix.Cloud"
        set internet-service-id 20971937
    next
    edit "Palo.Alto.Networks-Cortex.Xpanse.Scanner"
        set internet-service-id 21365159
    next
end
config firewall internet-service-definition
end
config firewall internet-service-fortiguard
    edit "FQDN-Google-Gmail"
        set id 4278190080
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Meta-Whatsapp"
        set id 4278190081
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Apple-App.Store"
        set id 4278190082
        set comment "Built-in fqdn entry from Fortiguard"
```

```
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Microsoft-Skype_Teams"
        set id 4278190083
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Microsoft-Office365"
        set id 4278190084
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Microsoft-Azure"
        set id 4278190085
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Microsoft-Outlook"
        set id 4278190086
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
```

```

        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Microsoft-Microsoft.Update"
    set id 4278190087
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
edit "FQDN-Microsoft-WNS"
    set id 4278190088
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
edit "FQDN-Microsoft-Intune"
    set id 4278190089
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
edit "FQDN-Amazon-AWS"
    set id 4278190090
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
            next
            edit 6

```



```

        set addr-mode ipv6
    next
end
next
edit "FQDN-Amazon-Amazon.SES"
    set id 4278190091
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Adobe-Adobe.Sign"
    set id 4278190092
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Oracle-Oracle.Cloud"
    set id 4278190093
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-LogMeIn-GoTo.Suite"
    set id 4278190094
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end

```

```
        end
    next
    edit "FQDN-Symantec-Symantec.Cloud"
        set id 4278190095
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-VMware-Workspace.ONE"
        set id 4278190096
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-TeamViewer-TeamViewer"
        set id 4278190097
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-HP-Aruba"
        set id 4278190098
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
end
```

```
edit "FQDN-Cisco-Webex"
  set id 4278190099
  set comment "Built-in fqdn entry from Fortiguard"
  config entry
    edit 4
    next
    edit 6
    set addr-mode ipv6
    next
  end
next
edit "FQDN-Cisco-Meraki.Cloud"
  set id 4278190100
  set comment "Built-in fqdn entry from Fortiguard"
  config entry
    edit 4
    next
    edit 6
    set addr-mode ipv6
    next
  end
next
edit "FQDN-Cisco-Duo.Security"
  set id 4278190101
  set comment "Built-in fqdn entry from Fortiguard"
  config entry
    edit 4
    next
    edit 6
    set addr-mode ipv6
    next
  end
next
edit "FQDN-Cisco-AppDynamic"
  set id 4278190102
  set comment "Built-in fqdn entry from Fortiguard"
  config entry
    edit 4
    next
    edit 6
    set addr-mode ipv6
    next
  end
next
edit "FQDN-Cisco-Secure.Endpoint"
  set id 4278190103
```

```
        set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-IBM-IBM.Cloud"
    set id 4278190104
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Tencent-VooV.Meeting"
    set id 4278190105
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Zendesk-Zendesk.Suite"
    set id 4278190106
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-GitHub-GitHub"
    set id 4278190107
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
```

```
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-AnyDesk-AnyDesk"
    set id 4278190108
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-ESET-Eset.Service"
    set id 4278190109
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Slack-Slack"
    set id 4278190110
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-SAP-HANA"
    set id 4278190111
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
```

```
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-SAP-SuccessFactors"
    set id 4278190112
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-SAP-SAP.Ariba"
    set id 4278190113
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Zoom.us-Zoom.Meeting"
    set id 4278190114
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Pexip-Pexip.Meeting"
    set id 4278190115
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
```

```
        next
    end
next
edit "FQDN-Zscaler-Zscaler.Cloud"
    set id 4278190116
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Alibaba-DingTalk"
    set id 4278190117
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-GoDaddy-GoDaddy.Email"
    set id 4278190118
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Webroot-Webroot.SecureAnywhere"
    set id 4278190119
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
end
```

```
next
edit "FQDN-Avast-Avast.Security"
    set id 4278190120
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Lifesize-Lifesize.Cloud"
    set id 4278190121
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Okta-Okta"
    set id 4278190122
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Egnyte-Egnyte"
    set id 4278190123
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-CrowdStrike-CrowdStrike.Falcon.Cloud"
```



```
    set id 4278190124
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Splashtop-Splashtop"
    set id 4278190125
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Panda-Panda.Security"
    set id 4278190126
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Ewon-Talk2M"
    set id 4278190127
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Nutanix-Nutanix.Cloud"
    set id 4278190128
    set comment "Built-in fqdn entry from Fortiguard"
```

```
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Extreme-Extreme.Cloud"
        set id 4278190129
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Genesys-PureCloud"
        set id 4278190130
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-BlackBerry-Cylance"
        set id 4278190131
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-DigiCert-OCSP"
        set id 4278190132
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
```

```
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Acronis-Cyber.Cloud"
    set id 4278190133
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-RingCentral-RingCentral"
    set id 4278190134
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Valve-Steam"
    set id 4278190135
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Cato-Cato.Cloud"
    set id 4278190136
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
```

```
        set addr-mode ipv6
    next
end
next
edit "FQDN-SolarWinds-SpamExperts"
    set id 4278190137
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-8X8-8X8.Cloud"
    set id 4278190138
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Datto-Datto.RMM"
    set id 4278190139
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Datto-Datto.BCDR"
    set id 4278190140
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
```

```
        end
    next
    edit "FQDN-Barracuda-Barracuda.Cloud"
        set id 4278190141
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Poly-RealConnect.Service"
        set id 4278190142
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Jamf-Jamf.Cloud"
        set id 4278190143
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Alcatel.Lucent-Rainbow"
        set id 4278190144
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
end
```

```
edit "FQDN-Datadog-Datadog"
  set id 4278190145
  set comment "Built-in fqdn entry from Fortiguard"
  config entry
    edit 4
    next
    edit 6
      set addr-mode ipv6
    next
  end
next
edit "FQDN-Mimecast-Mimecast"
  set id 4278190146
  set comment "Built-in fqdn entry from Fortiguard"
  config entry
    edit 4
    next
    edit 6
      set addr-mode ipv6
    next
  end
next
edit "FQDN-Pandora-Pandora"
  set id 4278190147
  set comment "Built-in fqdn entry from Fortiguard"
  config entry
    edit 4
    next
    edit 6
      set addr-mode ipv6
    next
  end
next
edit "FQDN-SiriusXM-SiriusXM"
  set id 4278190148
  set comment "Built-in fqdn entry from Fortiguard"
  config entry
    edit 4
    next
    edit 6
      set addr-mode ipv6
    next
  end
next
edit "FQDN-VadeSecure-VadeSecure.Cloud"
  set id 4278190149
```

```
        set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Netskope-Netskope.Cloud"
    set id 4278190150
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Sectigo-Sectigo"
    set id 4278190151
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Pitney.Bowes-Pitney.Bowes.Data.Center"
    set id 4278190152
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-FactSet-FactSet"
    set id 4278190153
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
```

```
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Bloomberg-Bloomberg"
    set id 4278190154
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Five9-Five9"
    set id 4278190155
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Frontline-Frontline"
    set id 4278190156
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Tally-Tally.ERP"
    set id 4278190157
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
```



```

        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Voximplant-Voximplant.Platform"
    set id 4278190158
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Kakao-Kakao.Services"
    set id 4278190159
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Stripe-Stripe"
    set id 4278190160
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-xMatters-xMatters.Platform"
    set id 4278190161
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6

```

```
        next
    end
next
edit "FQDN-Axon-Evidence"
    set id 4278190162
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Matrix42-FastViewer"
    set id 4278190163
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-LaunchDarkly-LaunchDarkly.Platform"
    set id 4278190164
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-NetDocuments-NetDocuments.Platform"
    set id 4278190165
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
end
```

```
next
edit "FQDN-Vonage-Vonage.Contact.Center"
    set id 4278190166
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Veritas-Enterprise.Vault.Cloud"
    set id 4278190167
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Restream-Restream.Platform"
    set id 4278190168
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-CounterPath-Bria"
    set id 4278190169
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-OneLogin-OneLogin"
```

```
    set id 4278190170
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Turkcell-Suit.Conference"
    set id 4278190171
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Infoblox-BloxOne"
    set id 4278190172
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Nice-CXone"
    set id 4278190173
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-ThreatLocker-ThreatLocker"
    set id 4278190174
    set comment "Built-in fqdn entry from Fortiguard"
```

```
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-ZPE-ZPE.Cloud"
        set id 4278190175
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Skyhigh.Security-Secure.Web.Gateway"
        set id 4278190176
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-MEGA-MEGA.Cloud"
        set id 4278190177
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Proofpoint-Proofpoint"
        set id 4278190178
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
```

```
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Brighttree-Brighttree"
    set id 4278190179
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
            next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-PagerDuty-PagerDuty"
    set id 4278190180
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
            next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-JFrog-JFrog"
    set id 4278190181
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
            next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Amazon-AWS.Bedrock"
    set id 4278190182
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
            next
        edit 6
```

```
        set addr-mode ipv6
    next
end
next
edit "FQDN-Amazon-AWS.SageMaker"
    set id 4278190183
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Amazon-AWS.Transcribe"
    set id 4278190184
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-HPE-Juniper.Mist.AI"
    set id 4278190185
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-DeepL-DeepL"
    set id 4278190186
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
```

```
        end
    next
    edit "FQDN-DeepSeek-DeepSeek"
        set id 4278190187
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-ByteDance-Doubao"
        set id 4278190188
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-GitHub-GitHub.Copilot"
        set id 4278190189
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
    edit "FQDN-Google-Google.Gemini"
        set id 4278190190
        set comment "Built-in fqdn entry from Fortiguard"
        config entry
            edit 4
            next
            edit 6
                set addr-mode ipv6
            next
        end
    next
end
```



```
edit "FQDN-Lightning.AI-Lightning.AI"
    set id 4278190191
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Meta-Meta.AI"
    set id 4278190192
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-NLP.Cloud-NLP.Cloud"
    set id 4278190193
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Pixlr-Pixlr"
    set id 4278190194
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Alibaba-Qwen.Chat"
    set id 4278190195
```

```
        set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Replicate-Replicate"
    set id 4278190196
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-Alibaba-Alibaba.Cloud"
    set id 4278190197
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-iZotope-iZotope"
    set id 4278190198
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-ipDTL-ipDTL"
    set id 4278190199
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
```

```

        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-iLok-iLok"
    set id 4278190200
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
edit "FQDN-YoYotta-YoYotta"
    set id 4278190201
    set comment "Built-in fqdn entry from Fortiguard"
    config entry
        edit 4
        next
        edit 6
            set addr-mode ipv6
        next
    end
next
end
config system health-check-fortiguard
    edit "Fortinet"
        set server "www.fortinet.com"
        set protocol http
    next
end
config system resource-limits
end
config system standalone-cluster
    config cluster-peer
    end
end
config system fortiguard
    set auto-firmware-upgrade disable
end
config endpoint-control fctems

```

```
edit 1
next
edit 2
next
edit 3
next
edit 4
next
edit 5
next
edit 6
next
edit 7
next
end
config system email-server
    set server "fortinet-notifications.com"
    set port 465
    set security smtps
end
config system session-helper
    edit 1
        set name pptp
        set protocol 6
        set port 1723
    next
    edit 2
        set name h323
        set protocol 6
        set port 1720
    next
    edit 3
        set name ras
        set protocol 17
        set port 1719
    next
    edit 4
        set name tns
        set protocol 6
        set port 1521
    next
    edit 5
        set name tftp
        set protocol 17
        set port 69
    next
```

```
edit 6
    set name rtsp
    set protocol 6
    set port 554
next
edit 7
    set name rtsp
    set protocol 6
    set port 7070
next
edit 8
    set name rtsp
    set protocol 6
    set port 8554
next
edit 9
    set name ftp
    set protocol 6
    set port 21
next
edit 10
    set name mms
    set protocol 6
    set port 1863
next
edit 11
    set name pmap
    set protocol 6
    set port 111
next
edit 12
    set name pmap
    set protocol 17
    set port 111
next
edit 13
    set name sip
    set protocol 17
    set port 5060
next
edit 14
    set name dns-udp
    set protocol 17
    set port 53
next
edit 15
```

```
        set name rsh
        set protocol 6
        set port 514
    next
    edit 16
        set name rsh
        set protocol 6
        set port 512
    next
    edit 17
        set name dcerpc
        set protocol 6
        set port 135
    next
    edit 18
        set name dcerpc
        set protocol 17
        set port 135
    next
    edit 19
        set name mgcp
        set protocol 17
        set port 2427
    next
    edit 20
        set name mgcp
        set protocol 17
        set port 2727
    next
end
config system auto-install
    set auto-install-config enable
    set auto-install-image enable
end
config system console
end
config system ntp
    set ntpsync enable
    set server-mode enable
    set interface "fortilink"
end
config system ftm-push
    set server-cert "Fortinet_GUI_Server"
end
config system automation-trigger
    edit "Compromised Host"
```

```
        set description "An incident of compromise has been
detected on a host endpoint."
    next
    edit "Any Security Rating Notification"
        set description "A security rating summary report has
been generated."
        set event-type security-rating-summary
        set report-type any
    next
    edit "AV & IPS DB update"
        set description "The antivirus and IPS database has been
updated."
        set event-type virus-ips-db-updated
    next
    edit "Configuration Change"
        set description "An administrator\'s session that changed
a FortiGate\'s configuration has ended."
        set event-type config-change
    next
    edit "Conserve Mode"
        set description "A FortiGate has entered conserve mode
due to low memory."
        set event-type low-memory
    next
    edit "HA Failover"
        set description "A HA failover has occurred."
        set event-type ha-failover
    next
    edit "High CPU"
        set description "A FortiGate has high CPU usage."
        set event-type high-cpu
    next
    edit "License Expiry"
        set description "A FortiGate license is near expiration."
        set event-type license-near-expiry
        set license-type any
    next
    edit "Reboot"
        set description "A FortiGate is rebooted."
        set event-type reboot
    next
    edit "Anomaly Logs"
        set description "An anomalous event has occurred."
        set event-type anomaly-logs
    next
    edit "IPS Logs"
```

```
        set description "An IPS event has occurred."
        set event-type ips-logs
next
edit "SSH Logs"
    set description "An SSH event has occurred."
    set event-type ssh-logs
next
edit "Traffic Violation"
    set description "A traffic policy has been violated."
    set event-type traffic-violation
next
edit "Virus Logs"
    set description "A virus event has occurred."
    set event-type virus-logs
next
edit "Webfilter Violation"
    set description "A webfilter policy has been violated."
    set event-type webfilter-violation
next
edit "Admin Login"
    set description "A FortiOS event with specified log ID
has occurred."
    set event-type event-log
    set logid 32001
next
edit "Incoming Webhook Call"
    set description "An incoming webhook call is received"
    set event-type incoming-webhook
next
edit "Weekly Trigger"
    set trigger-type scheduled
    set trigger-frequency weekly
    set trigger-weekday tuesday
    set trigger-hour 10
next
edit "FortiAnalyzer Connection Down"
    set description "A FortiAnalyzer connection is down."
    set event-type event-log
    set logid 22902
next
edit "Network Down"
    set description "A network connection is down."
    set event-type event-log
    set logid 20099
    config fields
        edit 1
```



```

        set name "status"
        set value "DOWN"
    next
end
next
edit "Local Certificate Expiry"
    set description "A local certificate is near expiration."
    set event-type local-cert-near-expiry
next
edit "Auto Firmware upgrade"
    set description "Automatic firmware upgrade."
    set event-type event-log
    set logid 22094 22095 32263 22096 22097
next
edit "Super Admin Creation"
    set description "A super admin is created."
    set event-type event-log
    set logid 44560
next
end
config system automation-action
    edit "Access Layer Quarantine"
        set description "Quarantine the MAC address on access
layer devices (FortiSwitch and FortiAP)."
```

set action-type quarantine

```

    next
    edit "FortiClient Quarantine"
        set description "Use FortiClient EMS to quarantine the
endpoint device."
```

set action-type quarantine-forticlient

```

    next
    edit "FortiNAC Quarantine"
        set description "Use FortiNAC to quarantine the endpoint
device."
```

set action-type quarantine-fortinac

```

    next
    edit "IP Ban"
        set description "Ban the IP address specified in the
automation trigger event."
```

set action-type ban-ip

```

    next
    edit "FortiExplorer Notification"
        set description "Automation action configuration for
sending a notification to any FortiExplorer mobile application."
```

set action-type fortiexplorer-notification

```

    next

```

```

    edit "Email Notification"
        set description "Send a custom email to the specified
recipient(s)."
```

- set action-type email
- set forticare-email enable
- set email-subject "%log.logdesc%"

```

    next
    edit "CLI Script - System Status"
        set description "Execute a CLI script to return the
system status."
```

- set action-type cli-script
- set script "get system status"
- set accprofile "super_admin_readonly"

```

    next
    edit "Reboot FortiGate"
        set description "Reboot this FortiGate unit."
```

- set action-type system-actions
- set system-action reboot
- set minimum-interval 300

```

    next
    edit "Shutdown FortiGate"
        set description "Shut down this FortiGate unit."
```

- set action-type system-actions
- set system-action shutdown

```

    next
    edit "Backup Config Disk"
        set description "Backup the configuration on disk."
```

- set action-type system-actions
- set system-action backup-config

```

    next
end
config system automation-stitch
    edit "Network Down"
        set description "Send an email when a network goes down."
```

- set status disable
- set trigger "Network Down"
- config actions
 edit 1
 set action "Email Notification"

```

        next
    end
    next
    edit "HA Failover"
        set description "Send an email when a HA failover is
detected."
```

- set status disable

```

        set trigger "HA Failover"
        config actions
            edit 1
                set action "Email Notification"
            next
        end
    next
    edit "Reboot"
        set description "Send an email when a FortiGate is
rebooted."
        set status disable
        set trigger "Reboot"
        config actions
            edit 1
                set action "Email Notification"
            next
        end
    next
    edit "FortiAnalyzer Connection Down"
        set description "Send a email notification when the
connection to FortiAnalyzer is lost."
        set status disable
        set trigger "FortiAnalyzer Connection Down"
        config actions
            edit 1
                set action "Email Notification"
            next
        end
    next
    edit "License Expired Notification"
        set description "Send a email notification when a license
is near expiration."
        set status disable
        set trigger "License Expiry"
        config actions
            edit 1
                set action "Email Notification"
            next
        end
    next
    edit "Compromised Host Quarantine"
        set description "Quarantine a compromised host on
FortiAPs, FortiSwitches, and FortiClient EMS."
        set status disable
        set trigger "Compromised Host"
        config actions

```

```
        edit 1
            set action "Access Layer Quarantine"
        next
        edit 2
            set action "FortiClient Quarantine"
        next
    end
next
edit "Incoming Webhook Quarantine"
    set description "Quarantine a provided MAC address on
FortiAPs, FortiSwitches, and FortiClient EMS using an Incoming
Webhook."
    set status disable
    set trigger "Incoming Webhook Call"
    config actions
        edit 1
            set action "Access Layer Quarantine"
        next
        edit 2
            set action "FortiClient Quarantine"
        next
    end
next
edit "Security Rating Notification"
    set description "Send a email notification when a new
Security Rating report is available."
    set status disable
    set trigger "Any Security Rating Notification"
    config actions
        edit 1
            set action "Email Notification"
        next
    end
next
edit "Firmware upgrade notification"
    set description "Automatic firmware upgrade
notification."
    set trigger "Auto Firmware upgrade"
    config actions
        edit 1
            set action "Email Notification"
        next
    end
next
edit "Super Admin Creation Notification"
```

```
        set description "Send a email notification when a super
admin is created."
        set trigger "Super Admin Creation"
        config actions
            edit 1
                set action "Email Notification"
                set required enable
            next
        end
    next
end
config system federated-upgrade
    set status disabled
end
config system ike
end
config system ipam
    set status disable
    config pools
        edit "default-pool"
            set subnet 172.31.0.0 255.255.0.0
        next
        edit "lan-pool"
            set subnet 192.168.0.0 255.255.0.0
        next
    end
    config rules
        edit "role-lan"
            set device "*"
            set interface "*"
            set role lan
            set pool "lan-pool"
            set dhcp enable
        next
    end
end
config wireless-controller vap
    edit "default-mesh"
        set mesh-backhaul enable
        set ssid "fortinet.mesh.root"
        set security wpa3-sae
        set pmf enable
        set sae-h2e-only enable
        set schedule "always"
        set alias "m"
```

```

        set sae-password ENC
ZvVzE0wyiES0nMsiICBxzTETn8G2c91LR2cj6IYCiEThR/CXzxkJVo81k7b3P5+cm
Hwc+WxXP4GFa0Wm3FDaemDDAbmHov5hjze1T6DwaQUf10BMixzPbRf46C5ZMvUk7F
4F0LDA6CLaISPPik+BjeJzApE1cB8/wYsm0Y9e8zB1sDhXl2dff4CI0oSeTFRTXw1
v81lmMjY3dkVA
    next
    edit "Hermes-2.4GHz"
        set ssid "Hermes-2.4GHz"
        set passphrase ENC
q53WmKDxwxLIKrmtL7D9BKlwaj082laYuyUduQ9hsYDbwpEn/xD+MiF1d5r4eXbh1
cv6MJeOQAEln4zfc16Nx5UZnn/phBsgtNF6Fdig8ez3DK2yx8fpLYJifcvfD7SiX0
RWxHD/5PhTs6f230qD7/bthhVsZWsxilWD6VnI1nAy8LS6qJncAnD3q1mitfmVKF1
nL1lmMjY3dkVA
        set local-bridging enable
        set schedule "always"
        set vlanid 24
        set alias "b"
    next
    edit "Hermes-5GHz"
        set ssid "Hermes-5GHz"
        set passphrase ENC
TL//lWrMIYa7YZr7X00uMAXSeUxcGxpCPy3LQuH/2ED1u3jL3CvXdtbBx55ttlQPP
vPBXz0JfPID4KPZwfpELcagFY1AuQ3ijLgkplVhZaBxbHorvfrem66LUWEQ+k1kB5
ojrPHkRLw5xXipty2oSiLR4FTja20kuj4QV23KXBTkvfB9eSY7YvIFoZN2afFv1tu
7lVlmMjY3dkVA
        set local-bridging enable
        set schedule "always"
        set vlanid 50
        set alias "b"
    next
    edit "5GHz-Enterprise"
        set ssid "Hermes-5GHz-Enterprise"
        set security wpa2-only-enterprise
        set auth radius
        set radius-server "Radius Server"
        set local-bridging enable
        set schedule "always"
        set vlanid 51
        set alias "b"
    next
end
config system object-tagging
    edit "default"
        next
end
config switch-controller traffic-policy

```

```

edit "quarantine"
    set description "Rate control for quarantined traffic"
    set guaranteed-bandwidth 163840
    set guaranteed-burst 8192
    set maximum-burst 163840
    set cos-queue 0
    set id 1
next
edit "sniffer"
    set description "Rate control for sniffer mirrored
traffic"
    set guaranteed-bandwidth 50000
    set guaranteed-burst 8192
    set maximum-burst 163840
    set cos-queue 0
    set id 2
next
end
config system settings
    set gui-dns-database enable
end
config system dhcp server
    edit 1
        set forticlient-on-net-status disable
        set dns-service default
        set default-gateway 10.0.0.1
        set netmask 255.255.255.0
        set interface "lan"
        config ip-range
            edit 1
                set start-ip 10.0.0.5
                set end-ip 10.0.0.253
            next
        end
    next
    edit 2
        set dns-service default
        set ntp-service local
        set default-gateway 10.255.1.1
        set netmask 255.255.255.0
        set interface "fortilink"
        config ip-range
            edit 1
                set start-ip 10.255.1.2
                set end-ip 10.255.1.254
            next

```

```
        end
        set vci-match enable
        set vci-string "FortiSwitch" "FortiExtender"
    next
    edit 3
        set dns-service default
        set default-gateway 192.168.1.254
        set netmask 255.255.255.0
        set interface "lan1"
        config ip-range
            edit 1
                set start-ip 192.168.1.1
                set end-ip 192.168.1.253
            next
        end
    next
    edit 4
        set forticlient-on-net-status disable
        set dns-service default
        set wifi-ac-service local
        set default-gateway 10.0.24.1
        set netmask 255.255.255.0
        set interface "Vlan24"
        config ip-range
            edit 1
                set start-ip 10.0.24.10
                set end-ip 10.0.24.254
            next
        end
    next
    edit 5
        set forticlient-on-net-status disable
        set dns-service default
        set wifi-ac-service local
        set default-gateway 10.0.50.1
        set netmask 255.255.255.0
        set interface "Vlan50"
        config ip-range
            edit 1
                set start-ip 10.0.50.10
                set end-ip 10.0.50.254
            next
        end
    next
    edit 6
        set forticlient-on-net-status disable
```



```

        set dns-service default
        set default-gateway 10.0.51.1
        set netmask 255.255.255.0
        set interface "Vlan51"
        config ip-range
            edit 1
                set start-ip 10.0.51.10
                set end-ip 10.0.51.254
            next
        end
    next
    edit 7
        set forticlient-on-net-status disable
        set dns-service default
        set wifi-ac-service local
        set default-gateway 10.0.99.1
        set netmask 255.255.255.0
        set interface "Vlan99"
        config ip-range
            edit 1
                set start-ip 10.0.99.10
                set end-ip 10.0.99.254
            next
        end
    next
end
config system dhcp6 server
    edit 1
        set interface "fortilink"
    next
end
config firewall address
    edit "none"
        set uuid bb4b56e4-27b7-51f1-2fb7-ebb4aae42908
        set subnet 0.0.0.0 255.255.255.255
    next
    edit "login.microsoftonline.com"
        set uuid bb4b8420-27b7-51f1-4273-a1852c08ca69
        set type fqdn
        set fqdn "login.microsoftonline.com"
    next
    edit "login.microsoft.com"
        set uuid bb4b9c1c-27b7-51f1-3104-6d9c147221c7
        set type fqdn
        set fqdn "login.microsoft.com"
    next

```

```
edit "login.windows.net"
    set uuid bb4bb0d0-27b7-51f1-5624-c9247e2ac474
    set type fqdn
    set fqdn "login.windows.net"
next
edit "gmail.com"
    set uuid bb4bc5a2-27b7-51f1-04bd-22356d355973
    set type fqdn
    set fqdn "gmail.com"
next
edit "wildcard.google.com"
    set uuid bb4bda42-27b7-51f1-6334-4c1b2b7562a2
    set type fqdn
    set fqdn "/*.google.com"
next
edit "wildcard.dropbox.com"
    set uuid bb4beeec-27b7-51f1-8543-4ab94156c713
    set type fqdn
    set fqdn "/*.dropbox.com"
next
edit "all"
    set uuid bb6b82b6-27b7-51f1-56f8-cade4432a419
next
edit "FIREWALL_AUTH_PORTAL_ADDRESS"
    set uuid bb6b881a-27b7-51f1-289e-fc7482c1caff
next
edit "FABRIC_DEVICE"
    set uuid bb6b8cac-27b7-51f1-f791-03b472a56885
    set comment "IPv4 addresses of Fabric Devices."
next
edit "EMS_ALL_UNKNOWN_CLIENTS"
    set uuid bb966756-27b7-51f1-d5a9-138ba8e0d7c6
    set type dynamic
    set sub-type ems-tag
    set dirty clean
next
edit "EMS_ALL_UNMANAGEABLE_CLIENTS"
    set uuid bb968c04-27b7-51f1-988f-f341f8731c70
    set type dynamic
    set sub-type ems-tag
    set dirty clean
next
edit "lan"
    set uuid bbeca814-27b7-51f1-6aa1-01720a64e5fa
    set type interface-subnet
    set subnet 10.0.0.0 255.255.255.0
```

```

        set interface "lan"
    next
    edit "FCTEMS_ALL_FORTICLOUD_SERVERS"
        set uuid d2236e7e-27b7-51f1-be1c-450c59470370
        set type dynamic
        set sub-type ems-tag
        set dirty clean
    next
    edit "Vlan24 address"
        set uuid f971fa7c-2c6c-51f1-43e6-ff530b9aa406
        set type interface-subnet
        set subnet 10.0.24.0 255.255.255.0
        set interface "Vlan24"
    next
    edit "Vlan50 address"
        set uuid 4872bcd8-2c6d-51f1-e3ef-e3efc328b6a9
        set type interface-subnet
        set subnet 10.0.50.0 255.255.255.0
        set interface "Vlan50"
    next
    edit "Vlan51 address"
        set uuid 9cb8aeb0-2c6d-51f1-d0c0-aba31bd8e30f
        set type interface-subnet
        set subnet 10.0.51.0 255.255.255.0
        set interface "Vlan51"
    next
    edit "Vlan99 address"
        set uuid f7e35312-2c6d-51f1-13d2-029a2eb49aa2
        set type interface-subnet
        set subnet 10.0.99.0 255.255.255.0
        set interface "Vlan99"
    next
    edit "Server lan address"
        set uuid b0607b74-3770-51f1-046d-cce94830ca9a
        set type interface-subnet
        set subnet 10.0.254.0 255.255.255.0
        set interface "Server lan"
    next
    edit "Management Address"
        set uuid 0503bc32-3838-51f1-2de1-7047e3f1a243
        set associated-interface "lan1"
        set subnet 192.168.1.0 255.255.255.0
    next
end
config firewall multicast-address
    edit "all"

```

```

        set start-ip 224.0.0.0
        set end-ip 239.255.255.255
    next
    edit "all_hosts"
        set start-ip 224.0.0.1
        set end-ip 224.0.0.1
    next
    edit "all_routers"
        set start-ip 224.0.0.2
        set end-ip 224.0.0.2
    next
    edit "Bonjour"
        set start-ip 224.0.0.251
        set end-ip 224.0.0.251
    next
    edit "EIGRP"
        set start-ip 224.0.0.10
        set end-ip 224.0.0.10
    next
    edit "OSPF"
        set start-ip 224.0.0.5
        set end-ip 224.0.0.6
    next
end
config firewall address6
    edit "all"
        set uuid bb4ca4d6-27b7-51f1-e3f1-ff38b644bc1b
    next
    edit "none"
        set uuid bb4ccd6c-27b7-51f1-3fc9-c4fcca9854e5
        set ip6 ::/128
    next
end
config firewall multicast-address6
    edit "all"
        set ip6 ff00::/8
    next
end
config firewall addrgrp
    edit "G Suite"
        set member "gmail.com" "wildcard.google.com"
        set uuid bb4c0a30-27b7-51f1-42f4-21cb0c130758
    next
    edit "Microsoft Office 365"
        set member "login.microsoftonline.com"
        "login.microsoft.com" "login.windows.net"

```

```
        set uuid bb4c607a-27b7-51f1-0406-95b936a5a085
    next
end
config firewall wildcard-fqdn custom
    edit "adobe"
        set uuid bb65e41e-27b7-51f1-8673-cda61ca61513
        set wildcard-fqdn "*.adobe.com"
    next
    edit "Adobe Login"
        set uuid bb65fbfc-27b7-51f1-de01-f0ec641601fc
        set wildcard-fqdn "*.adobelogin.com"
    next
    edit "android"
        set uuid bb65fec2-27b7-51f1-ed31-88410eeb4643
        set wildcard-fqdn "*.android.com"
    next
    edit "apple"
        set uuid bb660192-27b7-51f1-01ba-ee08e5928ff7
        set wildcard-fqdn "*.apple.com"
    next
    edit "appstore"
        set uuid bb66046c-27b7-51f1-e783-3f5588892858
        set wildcard-fqdn "*.appstore.com"
    next
    edit "auth.gfx.ms"
        set uuid bb66071e-27b7-51f1-c74a-0c067bccc2c5
        set wildcard-fqdn "*.auth.gfx.ms"
    next
    edit "citrix"
        set uuid bb6609d0-27b7-51f1-05e8-7d3bb398a43b
        set wildcard-fqdn "*.citrixonline.com"
    next
    edit "dropbox.com"
        set uuid bb660ca0-27b7-51f1-8db0-4477159bd102
        set wildcard-fqdn "*.dropbox.com"
    next
    edit "ease"
        set uuid bb660f52-27b7-51f1-586c-51f034c852f0
        set wildcard-fqdn "*.ease.com"
    next
    edit "firefox update server"
        set uuid bb661204-27b7-51f1-b26a-20a1e4ce4b88
        set wildcard-fqdn "aus*.mozilla.org"
    next
    edit "fortinet"
        set uuid bb6614de-27b7-51f1-951e-11ec0b64d6b4
```

```
        set wildcard-fqdn "*.fortinet.com"
next
edit "googleapis.com"
    set uuid bb66179a-27b7-51f1-ea75-ae9240b6fb18
    set wildcard-fqdn "*.googleapis.com"
next
edit "google-drive"
    set uuid bb661a56-27b7-51f1-ed8b-d028a12ea235
    set wildcard-fqdn "*drive.google.com"
next
edit "google-play2"
    set uuid bb661d08-27b7-51f1-9a4c-d8c95e6290ed
    set wildcard-fqdn "*.ggpht.com"
next
edit "google-play3"
    set uuid bb662514-27b7-51f1-1884-130ef88b37e8
    set wildcard-fqdn "*.books.google.com"
next
edit "Gotomeeting"
    set uuid bb6627da-27b7-51f1-ab29-e5415d8e30de
    set wildcard-fqdn "*.gotomeeting.com"
next
edit "icloud"
    set uuid bb6630b8-27b7-51f1-a0fb-e9385c58d944
    set wildcard-fqdn "*.icloud.com"
next
edit "itunes"
    set uuid bb66479c-27b7-51f1-fca3-f0569e1aecc7
    set wildcard-fqdn "*itunes.apple.com"
next
edit "microsoft"
    set uuid bb664a76-27b7-51f1-cdcb-7d9adf74141a
    set wildcard-fqdn "*.microsoft.com"
next
edit "skype"
    set uuid bb664d3c-27b7-51f1-2a69-b7eeaa0b72ee
    set wildcard-fqdn "*.messenger.live.com"
next
edit "softwareupdate.vmware.com"
    set uuid bb665020-27b7-51f1-6089-5edf35c4370a
    set wildcard-fqdn "*.softwareupdate.vmware.com"
next
edit "verisign"
    set uuid bb6652dc-27b7-51f1-d117-a1ce1d588980
    set wildcard-fqdn "*.verisign.com"
next
```

```

edit "Windows update 2"
    set uuid bb665598-27b7-51f1-97ea-3d5f08381340
    set wildcard-fqdn "*.windowsupdate.com"
next
edit "live.com"
    set uuid bb6658ae-27b7-51f1-65ea-7367359d144f
    set wildcard-fqdn "*.live.com"
next
edit "google-play"
    set uuid bb665b7e-27b7-51f1-b050-2a3a16989713
    set wildcard-fqdn "*play.google.com"
next
edit "update.microsoft.com"
    set uuid bb665e3a-27b7-51f1-0638-5f339a5377e9
    set wildcard-fqdn "*update.microsoft.com"
next
edit "swscan.apple.com"
    set uuid bb6660f6-27b7-51f1-6c87-6d2bd83db2a4
    set wildcard-fqdn "*swscan.apple.com"
next
edit "autoupdate.opera.com"
    set uuid bb6663e4-27b7-51f1-0d88-cb3f021fb7a7
    set wildcard-fqdn "*autoupdate.opera.com"
next
edit "cdn-apple"
    set uuid bb6666a0-27b7-51f1-6725-3af19da26048
    set wildcard-fqdn "*.cdn-apple.com"
next
edit "mzstatic-apple"
    set uuid bb66695c-27b7-51f1-7811-54f3039c3e03
    set wildcard-fqdn "*.mzstatic.com"
next
end
config firewall service category
    edit "General"
        set uuid bb5c0aac-27b7-51f1-e1ea-c13f7f8e0cfd
        set comment "General services."
    next
    edit "Web Access"
        set uuid bb5c36a8-27b7-51f1-a456-5a8170f246b0
        set comment "Web access."
    next
    edit "File Access"
        set uuid bb5c3bbc-27b7-51f1-3e16-33fdb62d83fb
        set comment "File access."
    next

```

```

edit "Email"
    set uuid bb5c40c6-27b7-51f1-d5f6-05dda75fe07f
    set comment "Email services."
next
edit "Network Services"
    set uuid bb5c45da-27b7-51f1-1999-4f7d563c458d
    set comment "Network services."
next
edit "Authentication"
    set uuid bb5c4ae4-27b7-51f1-c6f7-7953ed617de7
    set comment "Authentication service."
next
edit "Remote Access"
    set uuid bb5c4fee-27b7-51f1-51c4-955f62fd8092
    set comment "Remote access."
next
edit "Tunneling"
    set uuid bb5c5638-27b7-51f1-76ef-deb1c123d670
    set comment "Tunneling service."
next
edit "VoIP, Messaging & Other Applications"
    set uuid bb5c5b6a-27b7-51f1-ec36-3815bf2a7f45
    set comment "VoIP, messaging, and other applications."
next
end
config firewall service custom
edit "ALL"
    set uuid bb5c68f8-27b7-51f1-78f3-fac845d59fc4
    set category "General"
    set protocol IP
next
edit "ALL_TCP"
    set uuid bb5c82ca-27b7-51f1-2463-34b1132df72a
    set category "General"
    set tcp-portrange 1-65535
next
edit "ALL_UDP"
    set uuid bb5c8888-27b7-51f1-a00a-3b3dd796c1b4
    set category "General"
    set udp-portrange 1-65535
next
edit "ALL_ICMP"
    set uuid bb5c8e1e-27b7-51f1-28c6-81e2f55e7dea
    set category "General"
    set protocol ICMP
    unset icmp-type

```



```
next
edit "ALL_ICMP6"
    set uuid bb5c942c-27b7-51f1-966f-976849b8fc1b
    set category "General"
    set protocol ICMP6
    unset icmptype
next
edit "GRE"
    set uuid bb5c99f4-27b7-51f1-96f0-67359bd83495
    set category "Tunneling"
    set protocol IP
    set protocol-number 47
next
edit "AH"
    set uuid bb5c9fa8-27b7-51f1-989a-74cfc0a53156
    set category "Tunneling"
    set protocol IP
    set protocol-number 51
next
edit "ESP"
    set uuid bb5ca55c-27b7-51f1-b4a8-5f52056ce1b2
    set category "Tunneling"
    set protocol IP
    set protocol-number 50
next
edit "AOL"
    set uuid bb5cab1a-27b7-51f1-0971-5b68e0f3352d
    set tcp-portrange 5190-5194
next
edit "BGP"
    set uuid bb5cb038-27b7-51f1-7989-71b4e48c8a29
    set category "Network Services"
    set tcp-portrange 179
next
edit "DHCP"
    set uuid bb5cb5d8-27b7-51f1-69cd-64968cba3630
    set category "Network Services"
    set udp-portrange 67-68
next
edit "DNS"
    set uuid bb5cbba0-27b7-51f1-ae10-72eb9aa5346f
    set category "Network Services"
    set tcp-portrange 53
    set udp-portrange 53
next
edit "FINGER"
```

```
        set uuid bb5cc154-27b7-51f1-42b6-ed45a8718c04
        set tcp-portrange 79
next
edit "FTP"
    set uuid bb5cc654-27b7-51f1-a1e0-49210001f9cd
    set category "File Access"
    set tcp-portrange 21
next
edit "FTP_GET"
    set uuid bb5ccbfe-27b7-51f1-3759-f019498eed8c
    set category "File Access"
    set tcp-portrange 21
next
edit "FTP_PUT"
    set uuid bb5cd19e-27b7-51f1-0cc5-30fb91437f7c
    set category "File Access"
    set tcp-portrange 21
next
edit "GOPHER"
    set uuid bb5cdd6a-27b7-51f1-4d56-301d24530ccb
    set tcp-portrange 70
next
edit "H323"
    set uuid bb5cf62e-27b7-51f1-bdea-ce3be943b162
    set category "VoIP, Messaging & Other Applications"
    set tcp-portrange 1720 1503
    set udp-portrange 1719
next
edit "HTTP"
    set uuid bb5cfbec-27b7-51f1-ceb2-eb5c3c88d728
    set category "Web Access"
    set tcp-portrange 80
next
edit "HTTPS"
    set uuid bb5d01aa-27b7-51f1-fd20-90473ac3406e
    set category "Web Access"
    set tcp-portrange 443
next
edit "IKE"
    set uuid bb5d079a-27b7-51f1-4c5f-0e699533bb8d
    set category "Tunneling"
    set udp-portrange 500 4500
next
edit "IMAP"
    set uuid bb5d0d62-27b7-51f1-5efb-29bb94c64802
    set category "Email"
```

```
        set tcp-portrange 143
next
edit "IMAPS"
    set uuid bb5d1320-27b7-51f1-0207-5d6fc3351c21
    set category "Email"
    set tcp-portrange 993
next
edit "Internet-Locator-Service"
    set uuid bb5d18c0-27b7-51f1-40c7-57ffc24bdd78
    set tcp-portrange 389
next
edit "IRC"
    set uuid bb5d1de8-27b7-51f1-9df3-5d72fc94fa36
    set category "VoIP, Messaging & Other Applications"
    set tcp-portrange 6660-6669
next
edit "L2TP"
    set uuid bb5d23a6-27b7-51f1-694e-21f8ea255acb
    set category "Tunneling"
    set tcp-portrange 1701
    set udp-portrange 1701
next
edit "LDAP"
    set uuid bb5d295a-27b7-51f1-c678-8a0022af8276
    set category "Authentication"
    set tcp-portrange 389
next
edit "NetMeeting"
    set uuid bb5d2f0e-27b7-51f1-1557-52de4cf67a67
    set tcp-portrange 1720
next
edit "NFS"
    set uuid bb5d3454-27b7-51f1-9cff-c4051c53f9cd
    set category "File Access"
    set tcp-portrange 111 2049
    set udp-portrange 111 2049
next
edit "NNTP"
    set uuid bb5d39f4-27b7-51f1-2d12-c7e568bffd78
    set tcp-portrange 119
next
edit "NTP"
    set uuid bb5d3efe-27b7-51f1-37ff-23c194cd0961
    set category "Network Services"
    set tcp-portrange 123
    set udp-portrange 123
```

```
next
edit "OSPF"
    set uuid bb5d44c6-27b7-51f1-b225-eac4bee9dc37
    set category "Network Services"
    set protocol IP
    set protocol-number 89
next
edit "PC-Anywhere"
    set uuid bb5d504c-27b7-51f1-dd14-0a3d713ca0f5
    set category "Remote Access"
    set tcp-portrange 5631
    set udp-portrange 5632
next
edit "PING"
    set uuid bb5d5a56-27b7-51f1-5421-3c7e9aff9687
    set category "Network Services"
    set protocol ICMP
    set icmptype 8
    unset icmpcode
next
edit "TIMESTAMP"
    set uuid bb5d601e-27b7-51f1-9fb4-fe4360854a0f
    set protocol ICMP
    set icmptype 13
    unset icmpcode
next
edit "INFO_REQUEST"
    set uuid bb5d653c-27b7-51f1-1e21-d3090662ba4e
    set protocol ICMP
    set icmptype 15
    unset icmpcode
next
edit "INFO_ADDRESS"
    set uuid bb5d6a64-27b7-51f1-1946-0746456015af
    set protocol ICMP
    set icmptype 17
    unset icmpcode
next
edit "ONC-RPC"
    set uuid bb5d6f6e-27b7-51f1-07eb-2432c84d30ee
    set category "Remote Access"
    set tcp-portrange 111
    set udp-portrange 111
next
edit "DCE-RPC"
    set uuid bb5d754a-27b7-51f1-87ee-e891c8452589
```

```
        set category "Remote Access"
        set tcp-portrange 135
        set udp-portrange 135
    next
    edit "POP3"
        set uuid bb5d7b1c-27b7-51f1-ed64-c077927bb594
        set category "Email"
        set tcp-portrange 110
    next
    edit "POP3S"
        set uuid bb5d80bc-27b7-51f1-6e63-68b9c0dc093c
        set category "Email"
        set tcp-portrange 995
    next
    edit "PPTP"
        set uuid bb5d8684-27b7-51f1-bdf0-2fb53f35bd33
        set category "Tunneling"
        set tcp-portrange 1723
    next
    edit "QUAKE"
        set uuid bb5d8c42-27b7-51f1-075e-7f609f35b06c
        set udp-portrange 26000 27000 27910 27960
    next
    edit "RAUDIO"
        set uuid bb5d9160-27b7-51f1-8e74-cb0f5e4ba238
        set udp-portrange 7070
    next
    edit "REXEC"
        set uuid bb5d9660-27b7-51f1-f8f1-5a31765d7143
        set tcp-portrange 512
    next
    edit "RIP"
        set uuid bb5d9b56-27b7-51f1-60f9-5e23833bb658
        set category "Network Services"
        set udp-portrange 520
    next
    edit "RLOGIN"
        set uuid bb5da10a-27b7-51f1-f4a7-652f544b80dd
        set tcp-portrange 513:512-1023
    next
    edit "RSH"
        set uuid bb5da63c-27b7-51f1-d5bc-76b1247d506e
        set tcp-portrange 514:512-1023
    next
    edit "SCCP"
        set uuid bb5db0dc-27b7-51f1-2f8c-00fdff9a2f0a
```

```
        set category "VoIP, Messaging & Other Applications"
        set tcp-portrange 2000
next
edit "SIP"
    set uuid bb5dcad6-27b7-51f1-9d17-fe9f125a731c
    set category "VoIP, Messaging & Other Applications"
    set tcp-portrange 5060
    set udp-portrange 5060
next
edit "SIP-MSNmessenger"
    set uuid bb5dd0b2-27b7-51f1-f71a-71e72a6fff6e
    set category "VoIP, Messaging & Other Applications"
    set tcp-portrange 1863
next
edit "SAMBA"
    set uuid bb5dd698-27b7-51f1-5d86-350b1386c040
    set category "File Access"
    set tcp-portrange 139
next
edit "SMTP"
    set uuid bb5ddc9c-27b7-51f1-d6d0-5f08ed36a586
    set category "Email"
    set tcp-portrange 25
next
edit "SMTPS"
    set uuid bb5de278-27b7-51f1-8f2e-4f43860d935c
    set category "Email"
    set tcp-portrange 465
next
edit "SNMP"
    set uuid bb5de868-27b7-51f1-1f8b-d6f5c8be97bf
    set category "Network Services"
    set tcp-portrange 161-162
    set udp-portrange 161-162
next
edit "SSH"
    set uuid bb5dee44-27b7-51f1-3416-78cf814bbf85
    set category "Remote Access"
    set tcp-portrange 22
next
edit "SYSLOG"
    set uuid bb5df3ee-27b7-51f1-ec11-3f024fbbd291
    set category "Network Services"
    set udp-portrange 514
next
edit "TALK"
```

```
        set uuid bb5df998-27b7-51f1-e92c-9aec7d493d61
        set udp-portrange 517-518
    next
    edit "TELNET"
        set uuid bb5dfea2-27b7-51f1-21ee-b61e978ed08a
        set category "Remote Access"
        set tcp-portrange 23
    next
    edit "TFTP"
        set uuid bb5e049c-27b7-51f1-ec20-6e2cc3a6e41c
        set category "File Access"
        set udp-portrange 69
    next
    edit "MGCP"
        set uuid bb5e0a8c-27b7-51f1-0bbe-eb55ae05ec29
        set category "VoIP, Messaging & Other Applications"
        set tcp-portrange 2428
        set udp-portrange 2427 2727
    next
    edit "UUCP"
        set uuid bb5e104a-27b7-51f1-e9e1-9e31a53109c5
        set tcp-portrange 540
    next
    edit "VDOLIVE"
        set uuid bb5e154a-27b7-51f1-d653-07f287f0ed37
        set tcp-portrange 7000-7010
    next
    edit "WAIS"
        set uuid bb5e1a68-27b7-51f1-da6c-08a1de6cd6cf
        set tcp-portrange 210
    next
    edit "WINFRAME"
        set uuid bb5e249a-27b7-51f1-b922-75bbc98e56f3
        set tcp-portrange 1494 2598
    next
    edit "X-WINDOWS"
        set uuid bb5e2a8a-27b7-51f1-a2ef-0e910c1b5d29
        set category "Remote Access"
        set tcp-portrange 6000-6063
    next
    edit "PING6"
        set uuid bb5e307a-27b7-51f1-a411-9e5937f0409d
        set protocol ICMP6
        set icmptype 128
        unset icmpcode
    next
```

```
edit "MS-SQL"
    set uuid bb5e35de-27b7-51f1-390c-fc4e9b6c5d7d
    set category "VoIP, Messaging & Other Applications"
    set tcp-portrange 1433 1434
next
edit "MYSQL"
    set uuid bb5e3bb0-27b7-51f1-9d8b-f4744e05540d
    set category "VoIP, Messaging & Other Applications"
    set tcp-portrange 3306
next
edit "RDP"
    set uuid bb5e418c-27b7-51f1-299d-5c7849680154
    set category "Remote Access"
    set tcp-portrange 3389
next
edit "VNC"
    set uuid bb5e475e-27b7-51f1-3b42-65efae75dfa
    set category "Remote Access"
    set tcp-portrange 5900
next
edit "DHCP6"
    set uuid bb5e4d4e-27b7-51f1-3f65-ba1e9acce27
    set category "Network Services"
    set udp-portrange 546 547
next
edit "SQUID"
    set uuid bb5e5316-27b7-51f1-9593-dec20eccb39a
    set category "Tunneling"
    set tcp-portrange 3128
next
edit "SOCKS"
    set uuid bb5e58fc-27b7-51f1-fd44-6608e97f7c6b
    set category "Tunneling"
    set tcp-portrange 1080
    set udp-portrange 1080
next
edit "WINS"
    set uuid bb5e5ef6-27b7-51f1-08e3-83e1c54a943a
    set category "Remote Access"
    set tcp-portrange 1512
    set udp-portrange 1512
next
edit "RADIUS"
    set uuid bb5e64aa-27b7-51f1-41b3-b4e6d047f6d7
    set category "Authentication"
    set udp-portrange 1812 1813
```



```
next
edit "RADIUS-OLD"
    set uuid bb5e6a68-27b7-51f1-1a51-604b437dd4bf
    set udp-portrange 1645 1646
next
edit "CVSPSERVER"
    set uuid bb5e6f86-27b7-51f1-64e7-a2d06894cb5e
    set tcp-portrange 2401
    set udp-portrange 2401
next
edit "AFS3"
    set uuid bb5e74d6-27b7-51f1-9c04-a42e4980a1a7
    set category "File Access"
    set tcp-portrange 7000-7009
    set udp-portrange 7000-7009
next
edit "TRACEROUTE"
    set uuid bb5e7a94-27b7-51f1-c5fd-44789355479e
    set category "Network Services"
    set udp-portrange 33434-33535
next
edit "RTSP"
    set uuid bb5e8656-27b7-51f1-d146-c5bd9f147837
    set category "VoIP, Messaging & Other Applications"
    set tcp-portrange 554 7070 8554
    set udp-portrange 554
next
edit "MMS"
    set uuid bb5e8d22-27b7-51f1-e0a9-6679d94c7eb9
    set tcp-portrange 1755
    set udp-portrange 1024-5000
next
edit "KERBEROS"
    set uuid bb5e92b8-27b7-51f1-15ba-e940f9fd67cd
    set category "Authentication"
    set tcp-portrange 88 464
    set udp-portrange 88 464
next
edit "LDAP_UDP"
    set uuid bb5e988a-27b7-51f1-54fb-2987955a75a9
    set category "Authentication"
    set udp-portrange 389
next
edit "SMB"
    set uuid bb5e9e70-27b7-51f1-e8d7-ca987121070b
    set category "File Access"
```

```

        set tcp-portrange 445
    next
    edit "NONE"
        set uuid bb5ea44c-27b7-51f1-7779-7184166425cd
        set tcp-portrange 0
    next
end
config firewall service group
    edit "Email Access"
        set uuid bb6aca2e-27b7-51f1-836d-7eb6b8ef15e8
        set member "DNS" "IMAP" "IMAPS" "POP3" "POP3S" "SMTP"
"SMTPS"
    next
    edit "Web Access"
        set uuid bb6b166e-27b7-51f1-b150-e9c6eb22e52e
        set member "DNS" "HTTP" "HTTPS"
    next
    edit "Windows AD"
        set uuid bb6b35b8-27b7-51f1-02ed-2c315fc9b903
        set member "DCE-RPC" "DNS" "KERBEROS" "LDAP" "LDAP_UDP"
"SAMBA" "SMB"
    next
    edit "Exchange Server"
        set uuid bb6b62ea-27b7-51f1-6bec-9f06e1bba20a
        set member "DCE-RPC" "DNS" "HTTPS"
    next
end
config vpn certificate ca
end
config vpn certificate local
    edit "Fortinet_CA_SSL"
        set password ENC
MgTX4Fx16bjFMfcwQdhEutl/yjdImX919KroZAZZCSC0rse+1MUx3MiKNCD0MwJdp
HUogCG3Zq0BdxTNSx05wZdsZ0yMKQ+cPZSBm9B3WAPMTCqG3m55vaUTEU/nqmV0o6
87++GyLZhAnp6f6RpmUnZYbNTLjDNgw3pmuzjIzbBqC6QgZlhVwdG+jv50MPce6s0
vkVlmMjY3dkVA
        set comments "This is the default CA certificate the SSL
Inspection will use when generating new server certificates."
        set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----
MIIFNTBfBgkqhkiG9w0BBQ0wUjAxBgkqhkiG9w0BBQwwJAQQFikC7nhj+w0vCDu7
9eV9VwICCAAwDAYIKoZIhvcNAgkFADAdBglgkgBZQMEASoEEHnj/XDzA/zhoVN0
XzSxm9EEggTQJTCGHUvAidNrMI9LgqIIIsvdTG0njfK2w80uxgS6xKxLZMi1Ytsv
kN69rSUIyEDt81+7G7/U+0b/VqN3Ga+Paf739lwIjvVpEJMB4dKSv9wKPyVuTjyz
1WBbUBb2e1S0J8Agqc+UQ4PevOiFNg18W0arER8ayisg0D57r8M4KszJRXNYqnKp
s82ckpIw6CJ8k84Pw4u+gkEQp7qgGd4I7zWf0VpkI7Pirccvbn75Xy+eqe8zqVGw
4SiWkevyyv9uw00R4mYA8nmvCFb09mp76dhA/VlSR1zB26QxkcPHkxdqwnATNwiY2

```

U6JVxmeCAwuWj2fPO/3HSS5z1LSn8X1tTW0vGkGDHm9HAetc64dgg3D8wkpxF98J
nNguadhBysyMQ6YsWcpD2C2ippvRbz1X1ErPGVbm5w0fjUBMkLay8pSIc4p50hZ0
fJdP4FhoxG5V34NDa8OPVwdWqFGanQ098DX7fbukePmzyRpGha2NcuSNtSJgXpps
ypJL1h0kj21CL6XQe1MyGoNPgfKK+CeYZN1N1L+J5xMb0o9RqytKbTI1r/hMRAJg
gW4WdS7agndu8zby+IgwCa61UAYxKHtTXCheB2/ZxR56163fNKN42b1Aad0jVIGE
uZ30MRerHTSECFzn7rdKvz+ekv6UMcciQ/RumGWZ7NcMQtmXFUKPg3zuGm+dF5v
Rnn+qnOFIaLBKgb9vaKJiom5V6KQKM2xelj33PZyCdJd1uNnrVEmnhn1b10kBaXJ
DZywaj6e/u9W21ZANYKUyrfEb8Ryx5DUsmxJ2BXqM/LnwPL1SUadG22+o7ds3X5b
yaqukTPNcbG1c+pUcFnzL+H+HNCKR+U6paeMpP+5DEY4mzS9I9JDDZs56JVRto2G
wxz0t3p1t7I3TYmxuaFNdICPZn2U4k6kyCY710dq7jxMT0/0H5obtylpAXQI15L6
wKXkMYg8YZ/UUp04Q6FPddrP8p0k6y4y273N5ZjEzJ0h6SZ/vmoJ0Lmfno0fDhjX
R/+RyIbPI1EvRo6Cn5kBg53lm8Sdox2BaOLjUQGCQmhseMwdY0BtX0xiqZe019ci
DRmE5SpNrEGY4s5I9acw92unME0q4F59b06lizbdDWmxEqgBkw1MF8ZO+VTWmIfQ
fmgikdPh5jR5gxfaN6M38r42+pOh5mGh4ehubAaUolQBupMtt1me+FjRMW0G+wi
IYesWGSa3zAEFcsh0D/BHCowvcLcJHR11RcFGVX7J0Dr6105mUzzbTSg5vqCz9+d
0+dXUvIPyntZBa+g2526/e50EkI1JRxiXxqF11J8UkGkqcybNWHW3RilpAKCE+tB
a/WWDEmv75AKP/LRDEDCu+GSEx09LhG8aK2asW8vAXNIItK6QbocSpt45Z6B4hhU0
DwqnDKfg0jH+yrgPwCg8TQSR5+0MY0vR//7EmzTfUzqNI2Goex8Pah7t3mZYm5Ay
RrU+5ZCaBM//xcA1qPYL50WK3jJ58YIVDnjtEfo7CyD++OhLJXunf0m0vf69TscB
uQSmoflqRtD33hzeSHYk7SZZgYcC6tu2RUVct7FxS8EqbPboB32yugQdTnQ+gf9F
Qxhlgpff2ADA3ecXE/f6GL0RdK032sp31f6+fMLawFu7TLQbHBDg+c4=
-----END ENCRYPTED PRIVATE KEY-----"

set certificate "-----BEGIN CERTIFICATE-----"

MIIEEjCCAvqgAwIBAgIIXyyv2u1CYMswDQYJKoZIhvcNAQELBQAwgaxCzAJBgNV
BAYTA1VTMRMwEQYDVQQIDApDYWxpZm9ybmlhMRIwEAYDVQQHDA1TdW5ueXZhbGUx
ETAPBgNVBAoMCEZvcnRpbmV0MR4wHAYDVQQQLDBVdXJ0aWZpY2F0ZSBDbXR0b3Jp
dHkxGTAXBgNVBAMMEEZHVdQWRlRlMjMwOT1DR0YxIzAhBgkqhkiG9w0BCQEFHFN1
cHBvcnRAZm9ydGluZXQuY29tMB4XDTI2MDMyNDE5MjgzN1oXDTM2MDMyNDE5Mjgz
N1owgaxCzAJBgNVBAYTA1VTMRMwEQYDVQQIDApDYWxpZm9ybmlhMRIwEAYDVQQH
DA1TdW5ueXZhbGUxETAPBgNVBAoMCEZvcnRpbmV0MR4wHAYDVQQQLDBVdXJ0aWZp
Y2F0ZSBDbXR0b3JpdHkxGTAXBgNVBAMMEEZHVdQWRlRlMjMwOT1DR0YxIzAhBgkq
hkiG9w0BCQEFHFN1cHBvcnRAZm9ydGluZXQuY29tMIIBIjANBgkqhkiG9w0BAQEF
AAOCAQ8AMIIBCgKCAQEAuGIawhD+atJLBw3PdBATdb2Hvvdw4GHv446dmgE/V65d
jKqbrxCHHUznNgqInKpOn+c6ZQWWTa4pPwyr1bo1RS/f8/3xpIL0894YK7+eQrsA
jlRRtNYxyVF3+tT3brkON+aNCa8Df1I1Cj8AmNiF0uq2s5QkeaYT97cyX25CUOS
GFQqKDSO/Q9KqWHiZuU8JEPDcyHUVlp9/AZnKYuNfcg0CDwbfgfC72iXJrPF0peV4
dKQ5QEVDXNAf9maCxCgkTqFniPmtbZTdFut9onEQ7E2EwqcjhsC1YqiIdM05bpq
4hMYIKm/yei5aMnr9UbNHuZT1o5skhJCGAjQ+wxS0QIDAQABozwwOjAMBGNVHRME
BTADAQH/MASGA1UdDwQEAwICBDAdbGgNVHQ4EFgQU9IqWZuOpDr8058xoHonYnCSa
OgIwDQYJKoZIhvcNAQELBQADggEBACxprcorzidRJ7KpRnbZRsQHsVia8IOg/m5k
cfVOGBDyEimEVzQChZJeLqQ0+7JVpULte5UJBfu+IeF7qnJWsFVD1gcKEHGzUmMR
lNGcBinNJ8wDUDM/zG1tmoe1MvntAjhvw/t+xEzERY9HqVVK1NH77X9SdS6ktlzp
qFkOpRmVWE21otKwqDQUkmJclZp6G21T090z63rp8Hd7SdYkmNWayqRTVXUwaW00
CSTx3jCyyYGZmihgsqnCWV6n8BdH9isRk3pe9QYAuemRR6DsF1tu+pwgREqwbHaf
oqEMn1rRVdJpsN9a3HFPrKi08A5rXNRQ1wLkVJ5sTFwEzK9aqE8=
-----END CERTIFICATE-----"

```
set range global
set source factory
set last-updated 1774380549
next
edit "Fortinet_CA_Untrusted"
set password ENC
Gu0/MY95/FPnns1EIsDwQWq7WAMwTKYk6tsqZfB2dY2o2mFtrwVe1JjBIr5ZvNGTy
dcI/xXri9RoP0mSHeDexvh7IPKw10555G23wX9d1Bk60j7QAH79zVRnbgfgoGT0cC
xHPVcJ/hr2U3oWSVixzWqFI+hJ36tamrxWb/bzhR/tv8Yji6h9E0Kb3J5sh7/hTht
SDVlmMjY3dkVA
set comments "This is the default CA certificate the SSL
Inspection will use when generating new server certificates."
set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----
MIIFNTBfBgkqhkiG9w0BBQ0wUjAxBgkqhkiG9w0BBQwwJAQQJUSmR4H2TgHR6iYc
LbGXxwICCAAwDAYIKoZIhvcNAgkFADAdBg1ghkgBZQMEASoEED4NI1xs80miIBMe
J3E53lEEggTQdoPqLKMjXJhRb/zcyJZMMP2Zu6y3rh8MhoBs5GRNWymYuC50yxur
vhXCIus9x508wEbKJPfhEowLI6cUEdS1ogPpm2T5DichBC5hVHRnyuEg1UbAwdBN
zXB2TmxBeBZPeL5c8UjY/ijZKkuJLh09rZlrZKLeirvwwFPkVKk3ZP9jfaHL540Y
WvD57HN15F8FtimAeCbC3jpbX9NUy5hml4d2uPseTojAlj6834dv6vFb8P80V0oe
wB2pSxMxkSU3IO+GDaHHh+qzuJi9S9hIr6tsEg+xiFun9ja2UDALzg4t11fzD90W
b8/v2oaoWo+1yELsKJ00kuV9ejdVygDck0jQLo5cfNEHgLVvHCGajn53z/HXHzYR
en+U9i+jON/PQlKyPVNc8yhaQY4p+LGzzsJ1xp8eg+X4nS0R018c+2r2ibYuN+mX
j++eLnGfuiFgzJhOGfnxrFgZ0sh98yFbDgYi6retORZqIiGASkDs99YLuwHuCF1Z
mNzlIzddBLuLxXIPQBWJHnRkjt0MuVyrDY07te/uwAJy/RnKEwjFZ7vHL70HKmJK
QYbjtiGJ43+3SWtDBPOhlPojqFeR2ID1U8Wp3QhzZVx3VkyFbBMjI1uAPezDnv1a
YxF/Tf4atfuod0U3rus+ufYKBv2l0sXh48hYuUbOpjps5+dt79xXrcR6pN4etsxT
1YJM1pS+ifKNniRPcIxQ8MvV2ZmyGHvhnE98FMgntMXC/Bg5m8aMTtwLRWNdfV1
EeUQPKm3K4raSrUSx8vTTu+Ac0gcXVqbJTci4PYVdBEyX6w4TpII00v6QVMU2aFs
/IUZek3+kjp5gHXJRiYDjsprZ9QKQ6i54n8/io0L6wTLgoLLZX5qiHV1QxqgAQLE
Tn/y4/0PIdrxKioxXqPF7qtH/mcrG8UhyfIeDqHLTfD7f3Wx0SN20jg6WbxeqAU3
dSQzHWJnkrBsa0uluuK+X0eLGI fZxvwh410cCibXYVvGSdYfwuDaRANBUhbvFwRQ
AGRzmkvxAHZp5XpwahZmNOBZE0jw4zMgFFaOj2D0ZLkV4yC8/IzSV52JuGig5MDG
rP5vpfljqlXQnQz90wH10mmdsQ05yBacHPjkPEELrsMujbnX7fXqdVLuaL1CtJBT
Hw8UwWL3wkTwmBLnArt7Ivt/jkcXMBWZrjsBvP7nc/pl7pzyuKWYVJKAa2lAoE16
+kQ3BmMUJTii0Z/4eieui9MkFM1r3sU55qwQbpWDozaRdSAU8OpLnQZD1SguAgYp
5UZ33Ex11PL+XkWCC8H52JKk0+p5vwsU80XGtqp5sP8s674JZKfQc+3LhwPeLRdu
G0/J9wOJS/pbhURDdJMYaUC9693Qdgsn+mge5g9/zyy929sDVJWkcsJiUCue65+/
ppKe50r10AmUXVX8JijdFF07JUK7b4IoKQwgHgBuBgc7hGsgfLKhvsigDhPH3gam
Pe/Yuoy9vfJcmuZm+46ehAiCF5QFuy83i0L7u6SAQKF2D7LG1RwrTTFB2Ee9E4MI
Sg9C714jwhsQs+JeS+qcaLQ5dpyUqgzrLnKfHspuxM+9pkmvcjc9PdKoux+T0ktJ
Sj7CHlArxYNYohdNNgrTBwVdOXIDXmpcn2hFYvtDuUKV6V90mrRyS2s=
-----END ENCRYPTED PRIVATE KEY-----"
set certificate "-----BEGIN CERTIFICATE-----
MIIEHDCCAwSgAwIBAgIIFjBFZ6a/fgQwDQYJKoZIhvcNAQELBQAwwa4xCzAJBgNV
BAYTA1VTMRMwEQYDVQQIDApDYWxpZm9ybmlhMRIwEAYDVQQHDAlTdW5ueXZhbGUx
ETAPBgNVBAoMCEZvcnRpbmV0MR4wHAYDVQQQLDBVDZXJ0aWZpY2F0ZSBDbXR0b3Jp
```

dHkxHjAcBgNVBAMMFUZvcnRpbmV0IFVudHJ1c3RlZCBDQTEjMCEGCSqGSIB3DQEEJ
ARYUc3VwcG9ydEBmb3J0aW5ldC5jb20wHhcNMjYwMzI0MTkyODM3WhcNMzYwMzI0
MTkyODM3WjCBcjELMAkGA1UEBhMCVVMxEzARBgNVBAgMCkNhbgG1mb3JuaWExEjAQ
BgNVBACMCVn1bm55dmFsZTERMA8GA1UECgwIRm9ydGluZXQxHjAcBgNVBAsMFUNl
cnRpZm1jYXRlIEF1dGhvcml0eTEeMBwGA1UEAwwVRm9ydGluZXQgVW50cnVzdGVk
IENBMSMwIQYJKoZIhvcNAQkBFhRzdXBwb3J0QGZvcnRpbmV0LmNvbTCCASIwDQYJ
KoZIhvcNAQEBBQADggEPADCCAQoCggEBAMcTxEG+UG/HezKjTN/vU9ee5pbxGroP
MweQVoFhlgJhauMqHmqDzoML9cJa4dtGMA+D0AsCMu/REZkOFH8222f5rjG87ymS
fdS+1FKUnPhlpr9UqYtqmIAJVbCrYUJXfSF2BqY59Duaiv1o6uB1kP6IKBivAcba
hjYHpm+zip5AhoShAez5SRBe1ZCCLs3zsRxhlFLgdq1T8AfwLLdXQVPTxXC1vb8
gaoCivUo5sZdVk8Dn3R1sQ0tdIrpMVkD3y/hra+qUTA5IGXzw9bNgzJyo/nty5Jw
JDpsD9BRbkM1REhYTUhyqb8gAlDH5aIJzhX1aTlCA92juirCfEfmiqcCAwEAAm8
MDowDAYDVR0TBAAUwAwEB/zALBgNVHQ8EBAMCAgQwHQYDVR0OBBYEFFxUBulz9mb1
0Lx+f8CkYaie6i0ZMA0GCSqGSIB3DQEBCwUAA4IBAQCkvFAx5ID/LMBzxxCYv3yF
/7hgEzi4t9XahxzLL9huQ/PwXB3NY+WbvohAOSqswGN/rf71YqR+QPAPZDYa9Tt
gB2G6RJvyabjFtDyKc+sGwsxKVR1LfSffyLtsylQCE1XdM3iZ3wbQaH3rnPUDp13
FR5se7qqFi10JXk/JZm63fJmASCEoIVwkm2kaD4YXfD0GH30tD6uw+7XG1iH76S4
AJ63m1iAEp9+3UzG5NkwdEE8TNNtNddFQs23Ny6S8V82zyZel2HmnORjHxNRP41D
8MPJurTDEd0VtrgPv7GEC1Jr7iTxiWu317zxsKJrL4L05FImkqpVwXbMETVb18Es
-----END CERTIFICATE-----"

```
    set range global
    set source factory
    set last-updated 1774380549
next
edit "Fortinet_SSL"
    set password ENC
m2fKFdhHn1UyE7opzwa9QR7xt4DurE5Q11iKq4qL+r4nhq0DmFMPEVbg90gYFQM44
XRwrMe1aa8gVgqGN7ANvx8S1NXUeqeZMQnDUj7YjI3c3LSXd0AkGrXz6jppq+Jd+a2
2VVR0ZfVvf7mKjx/MT7ZUJofrpDGdsiz12QKVdKmltGuQFGssS/ZIKH88j0gTlX//
z9FlmMjY3dkVA
    set comments "This certificate is embedded in the
hardware at the factory and is unique to this unit. "
    set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----
MIIFJTBfBgkqhkiG9w0BBQ0wUjAxBgkqhkiG9w0BBQwwJAQQm7Ki/l54G/YCpiIm
CBS0uAICCAAwDAYIKoZIhvcNAgkFADAdBg1ghkgBZQMEASoEEOR7DM/RHCZV7paX
BEBARbUEggTA7H2j8qkdZvnkcc3kIxa1I2IDolKyzifWp+s3uSwPX9bISALbpyoI
PDwoy8tWWM03kdYyoRjzXb/opc0CkMzJugrFDnqvJ7QwntGr7rcOWaoTjEqHx0GW
RWa6f4xjGKsY5Wq0La2Jda3MUfhKrZ1DjB7V1UR4F0Fm4ibSKc+Pqvg4GUOYsmjK
kYXymK9KWYqp7LYkM8bqrCyo8XQmvFUycphNq7efjBfo31USJznKPMGz5CH3P+PZ
pndTCzjqRNhd0/DFDC6MfykmxWMg21kw0u0j+D+PbqhFBx/Hqds/jJAjSjBEClsb
Op8E5W+bI/DiHZQ7rgBYwlWSMxei+u0IJfeQuBjxhmiChP72uKf2hey7dn050Zbg
95yzL0Pd0TCyRZWdk59RH9Lzg0jHkVa7yIexhWWogN7FT+30jhCYlqe1u0mZ8MIM
ZeX1GWmlL3x1VHSsgHzDqu/j59L8UyFozNLK22NP1KN01KUsIpLOULvxIuShxyby
xmK08kFnRu2ufUX3YZ20gRjm+BK6ybQHLjsCSEaTbbNAaIte4JF/BML4LKYQ+hqr
lrNu6y0Fpfnr7xWB1KgvNOK2JxWLGLfLNTdy0Lahwh0gDYTKM05sCQpWQgg1FMC
5YEgrlo/7QjiOXUaHOUDGmRjLAtFhkDfUkqWT2G0CGZq9WtUhiaQXPSiBuphw+I
```

Zdsvkf4vc19er13LA+Sn9q+BA6uuIHNC8m81r06iE53jkGQjqPQ7rPjhWklea7N
s4dPg1eZZpaPB3bSSbbEO5XJuQTCGtSKR0tvtbq6cN9++XKYf1CbaRLMTcXSZ2aas
3290RHOkHf/1mWq7D9sa077pQI2Xm5/cCGiPXTrNNZy4uoSza54auNkiqBuKt5j3
WtBwW4nn4tWQXZpLX20E4T4c1eEQ1x2DpJXeYiMVX6oz/4UQeygkPd2EpTgVOfbV
KJMoqGQGyeu06R0f+ZereyzWR2N/3B5Bg9zjNF9jMA8ih2Fjlep7WFB126FJnhAB
UUq8P4W0eiVpoDcjtXHvuJWJzwPCOmjqUN3hp0VdJZ0jQP8Yk4wP5TKFBKWaj1xF
FNCowQqcGd/h6E7I8n3WOKwUxCz90XkOmvge8mCQMBu3itGxKkLrhBjhp7IbfPtX
d5YBsywG1c0VVqyjMwiBqsw3HSSEtjWGZGljf304co24+tkXABYmHqWE1aPc00hE
ePU6pFUUmmW9z1VnAAZuJK857PRbG2Wg0/GU+NgDX1E1Wwefbc7hKYgJN6Nhp8V/
LkNwZ0SJP15A9csdrTLGuTLGorfMiGi44SA+fgRtTGoJ+/0fvpPuWWY7nour2e0Z
qCzrEa/5nTujhS/TF58Kj3iYNQOWOMfM6asrG9XgSzcjf6pRFnpCJav/wowQHjC1
pm4EWLGqP5tNVns/pivVx2rU2ewy9PJAxm52WiFRM/L2z05sTyTr07XQGF5T0tDQ
cx8sNCvuQRxKNBJ1TRJs/HKzpn0tiVjhD2hCUZ5zQXeTeHsPV5yXtKKQ1cKRuK/f
qLFWiADpLu58mGdie1LsKe286VFhM6g2HJz5E0KWF2dhQCHMb88ohHnbvrzZPCYa
B2y5sy1iitt5SZBPm8MxbG8gSg+StDfBjw==
-----END ENCRYPTED PRIVATE KEY-----"

set certificate "-----BEGIN CERTIFICATE-----
MIID4DCCAsigAwIBAgIIRXBSHHM6QG0wDQYJKoZIhvcNAQELBQAwgZ0xCzAJBgNV
BAYTA1VTMRMwEQYDVQQIDApDYWxpZm9ybm1hMRIwEAYDVQQHDAlTdW5ueXZhbGUx
ETAPBgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQDLDA1Glb3J0aUdhGUXGTAXBgNVBAMM
EEZHVDQwR1RLMjMwOT1DR0YxIzAhBgkqhkiG9w0BCQEFHN1cHBvcnRAZm9ydGlu
ZXQuY29tMB4XDTE2MDMyNDE5MjgzOFoXDTI4MDYyNjE5MjgzOFowgZ0xCzAJBgNV
BAYTA1VTMRMwEQYDVQQIDApDYWxpZm9ybm1hMRIwEAYDVQQHDAlTdW5ueXZhbGUx
ETAPBgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQDLDA1Glb3J0aUdhGUXGTAXBgNVBAMM
EEZHVDQwR1RLMjMwOT1DR0YxIzAhBgkqhkiG9w0BCQEFHN1cHBvcnRAZm9ydGlu
ZXQuY29tMIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEAwRWzmrHvoSMl
gtrU839M/AWUtrL9BYMotssadzfrXv1/dHa2thiYW5dTFwfCKRii/OdOp1IO3k7v
Vb2MxMR6YHuLVcN4mhD6kNRli4QEiBoa9C3WgP5KxSJxdYbIAZSRbrsEIdjdoGKH
20jizA6C0dDwsoGFXMVXD8MSzUF/od5WQpPpPjN0ygnM6cWqi7i3a+tPUVb4+vcW
XckoB+qIaxdxk5aX0K8LFgl04uo8L/u0B2/NxF6cZT5eczsreNJOc5AmnyJbQOX6
PKt1hjHYTJmRzkiHS0D7f8CjzrvaIgd9W+MsF9/Lcf8pMMrX473HYUcCiR720TBW
PQWzaggyDyQIDAQABoyIwIDAjBgNVHRMEAjaAMBMGA1UdJQQMMAoGCCsGAQUFBwMB
MA0GCSqGSIb3DQEBChUAA4IBAQAyYDe75SsqQ0MoUZXGYgyq1gKWLWVwS6nvqhCo9
M2N93C0iS4F++SsOXunmGcweNR7qu02ssgI9A+dPDdvCOIXQ8FzIDtg5wStNW3I+
joEDteAq36U9AJfhQkMu5zJZDLLN0Pm30C6fWSyOweC3IUwU7KNxg79Qz9jCr5ev
bcX0uPAvn8wwti7veYO+YTDypE9i5PkiMudcVm4bKseZ+I5vyeBzfi5aTd1n+KNV
C7e+g/h7MkSvBraCuFqfS8ukL0bjf1tImF3XPz5HaMN30F6owjAOSmbbLYtqAfxS
pHB5UamRep1BZ9o3aElavFJ2qmklAHCpeIoWB75yP96KMYy1
-----END CERTIFICATE-----"

set range global
set source factory
set last-updated 1774380549
next
edit "Fortinet_GUI_Server"
set password ENC
TXEs0Z6aCSV9MieXxapd48fuUNFdaKXDWZunY5TatVURHPf7PBxx3CJ1xjQ1Fd+6x

IQpC/wvtdgxAdqH2W+R600VDwo7jHgUv2/mlmDQW/ubhsaPJJP6x98v9Zp1IGq/zn
T2hGiiwfrNMTq7/Ye6rqQpIaJo6BZ2j2D3StXeX5Y4gB379D+m+uBhv2jQPHAp/z
FYVlmMjY3dkVA

set comments "This is the default CA certificate the SSL
Inspection will use when generating new server certificates."

set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----
MIIJtTBfBgkqhkiG9w0BBQ0wUjAxBgkqhkiG9w0BBQwwJAQQQNdtBCV1VeE37VHM
elBPmgICCAAwDAYIKoZIhvcNAgkFADAdBgIghkgBZQMEASoEEAP6/QvAlNW1E6jr
Eog08oQEgg1QQzmgVdD/xVDjPhZ23pgxEbFLxkVpLkygB+Tl2V0IwIACupbsyckI
4Ih3+fHZINqEdlvMBgrtNuxFRJmFrWUlsjzr9sROKTB+hq03e99I8kZb05zB5Awv
ifa/yYTaX0/MurmKvdmXH+J78rm7KPF2a5Qmlb4WIGS+JW8lNQPAmqulmjnzMASe
AJYCK8aqZvT9YCFXQ7p4cDEXtvhj3grjBJOQ8qBIx/izvNF2x0gXAdhTOTW64mc5
t1ETOkSwsBZF29NEP4n4Rvwjwblisq+M7Wng6vW0htMK8OpC3HxsZAZj934so+VI
o6wNQ5wZJkhk54AWOG+PiWQiau3SbJqkyzf0NZRtERpx3tQ+5B6G/ndHG94o/tRM
IWB6ETjivDD7mUr2tD9urJ/wLeZHJ7JIhjJLIgndtLm0Ex6ouIJf52VFrS/nrLv+
aQvpgLL10CiQy1I0GUCuNgkwh3cELgNuKdVqYJgRUhVKNbGtuZLnkM/+nIIEExpU
Gct740HwEa403b4NREflxJqASI7p5xRW0HS6uJCqcTTHf6+HGxhvp0PEPP2x/kqe
PpC/5AzNyT5mYnODB6MULC0iTspTaTBHYD6yz/02YAlrOrmsFspwYt64/QnX/lSG
GuXITtumXR74sh6+VS3iwHYYG+SpQPaz3MgmsDDff/z+fCzghcLwtMR10r8NIA2U
T2PGk5UCes3T9964UmRQva5sjoCTs7sL8xgTWZK0H6iSFwSfpwUe3TQ3p1vnxija
uF0diCRXMV1amiRsuxuqZHtz7ukgcKp+RqqpidG8d7Z+gpZHo0ow7qLchh2kLDmg
uh/4wbGZKFwNEVsdbx2b0ytgtth34/MxUKzt9CxRoquGjmlMah6m9mcEhs3miF7l
ABCEb8u9tHyGx7nvsTheeg2UtqZGJ9wWtdbkNj5g065T3CFVyIMMedr7LJmQ6558
yj9nmtlykHvNhbq/TLG2wmxsjmE8YMZiMt0+Jm1NiADzv8v5C0jeF0/wlutZFxJF
6y6eP8jQf8t9WhlUt/Irt+mHQJmEe9UZHvZhKfkskyiRxNBXkqNWQcvn5T9ndSX9
JM+F1W3f2dnooBf+wBefN05bqDSuFoW0oGXMeoX0cVHWIzA+Zci1bFlH0d6TStWa
pSaskXaDeQndRpDL0cPSVFgRqJ5qJeqQgoNLqyBE13uCm0fU3tdL9Zti7iqJG9Y/
yqANL5cCGurQ6hHQjUcs/61GnDyH3rTbvZQzZouuisfzPdnz8n0nhIxZdGKGRdXC
XTKZ9sVWE5Q6FhcUbgZ4iq+mUM9rMgQ61FoESYj1h9zsK65WNm1qswVHxtIFTVWU
h8uM9w+D+T3DMxqRlkPU5URoFTSoA3gJk+1mrijay2eFemdZo2saF7yMTR+eoIpR
5YI5LwI3S+1ZmMB61cvnwcl9r3xbcURSp3opYK/srM3i5vQk0ARi7FWWfbqixAHw
au17pTc6BizMPmMCnmV5BCtCdpl4zudqmkeJ5V/+5bjNJsZHGa+UD4I8eyrB6r+r
GaZEPmo00u+IRVDu9dXfy38qpiJpuUFI8GX83CrKNVxgkg8YtkeCsP58JIznt0nl
fJxwWajqjStLcfrYgPSSVN/AJwRah8CWxdtJwgrB4GVawvfZTF7BKQW8TBkulHCG
F2go0Ey0sEqDGFHpxjP2U2LgUfMRhnheiaN231o064CSZCRH87qhXQQXlRpKciDg
uQ3yiiCR+GdFPpgb4Dgdqjqz1DCN/VbjN4qmvWowTj5id3fSnjDn0grqZGiKxvc3
NKrruiExCbRG/2YKhJ62H9QdcIH/ShZtWroyoJXRcKroxE2vhzeec/oAXX+EIKAZ
wszr02QCsNm1dw6TSf1MPsQv3GKxdxVzZ+9lRswPqYmq2iWkshfs9J94BMb52pjW
3BvpjwxLuca5PYS/CPzkXg95+c/+SGIpti3r5+z0IW47xVDR1ph5iByiMS9N7+Lw
X710tAWIV5Rt7kb3F1IumR2CemqsoMlpJcTRO8Stvh9AieAEw0dX7Gzp5d8KXNGp
mR01RMUHNhG7BXpT7oIykikeb0kkv0QZE1qg9LSy/MuJyscqRDkCjBklvOniy1QZ
YYdv90aDnRganXrXeK7ZcaGQISU+lnHNkf+ct5G5GARzpLnKbE7RpTKz6CKk4CdP
MLzeRcy2YWVZRbYFLczHNP8Rq79pEMa9j+GNGiYVvPKsYoJ0+rGwKpHcRA7d3JZc
I0rbYkT2o5PEmK8zo+14ji6cqeP8KppBszWoe1sTcGY289Qdm/4N1SozC6jtNlcG
f+Q6bpkjjNQksMKIHWLk0KY2SxUkpDSlWkXhClxSQpBH9tuTy+sTQcZNayB7oqL6
EUVH4oFt0AMuB1P/DuZBbuBSwaeBRV1Zjc4MMi9Y2kdp1zSeVlmCab+iYAKEkdw6

peLc3WSvr08ypR82MPMNgS AuNeKWhXCU/XjfyPl466rS6NRAKRmvNPrCgxaCewL+
uwBzyOJXaT0WNBH0yUKuFPHsSII6GLEetrBaTDng0IDMw8Q1NR02ZHj71kddcFbV
l209t6JX6pEhELJ1hOmTi0ZU5Y20unsxYSf6/CRZa1DugQhFKfXpPBoy1Nve4qGy
phL678hBU5iA0Xx4kekjh8YKYLBPMyKWhuMRPBw3D4qp4JMDNRK1DvWAmP3/a+0G
944mCiMfpoFe26oUg96qHcoIRREDHFLKkNFoG66cSovAMNUJf8Zh1f4QQYEIyzWb
DPf4yPtaiEtZ/gxOnlplsM/NBmgCnMYzLKYh108c66kTZvfWQcWoxeuiVxxwv+KJ
lh2ZaB5Pw2/zbfiSyL8ppjYBT4x04G2y0aYPd+V0i9VI4xoXgyS4Ft7fe04CEva0
jUFoJk5ugokYS5P6/wqFDux1PKa5Mm4TLNMr5DBGSzqhyCTcklmg5A75XGroeyhw
P9XE4UVDm4c1QaL2kOrZnCDjuiaWfPc5Tw4rLxvQSEuTfvgvVLn17V094YLItzq0
LU1Rel49Q94c8l8rQkAERkBoQiKD/pCR8JlnZJnRb17C/XVkbSzAqiV27sUTVKU
NlpgqunORuKPePlxbm5rigfdUbvSwg3LSPJvVaIla8+zhPoOahbS8N9vs0gY0ygB
WPloY5Uj+YJ9RWtdzGMhE2XAY9Cmu9pq6ksxvUq/83m3BlIduvrVjQ=
-----END ENCRYPTED PRIVATE KEY-----"

set certificate "-----BEGIN CERTIFICATE-----"

MIIFIZCCBAugAwIBAgIIBZ/b5/RIhxcwDQYJKoZIhvcNAQELBQAwgaxCzAJBgNV
BAYTA1VTMRMwEQYDVQQIDApDYWxpZm9ybmlhMRIwEAYDVQQQHDA1TDw5ueXZhbGUx
ETAPBgNVBAoMCEZvcnRpbmV0MR4wHAYDVQQQLDBVDZXXJ0aWZpY2F0ZSBBDXRob3Jp
dHkxGTAXBgNVBAMMEZHVdQWRlRlMjMwOTlDR0YxIzAhBgkqhkiG9w0BCQEFHhN1
cHBvcnRAZm9ydGluZXQuY29tMB4XDTI2MDMyNjE5NTEwMVoXDTI4MDYyODE5NTEw
MVowdjELMAkGA1UEBhMCVVMxEzARBgNVBAGMCkNhbm3JuaWExEjAQBgNVBAcM
CVN1bm55dmFsZTEWMBQGA1UECgwNRm9ydGluZXQgTHRkLjESMBAGA1UECwwJRm9y
dGluHYXRlMRIwEAYDVQQQDDA1Gb3J0aUdhDGUwggiMA0GCSqGSIb3DQEBAQUAA4IC
DwAwggIKAoICAQCbaqtEyyKeOB1km33s//kKPj5/qiYwa+7qePlDXnxEOBR5jpNE
8oN7X87wcNvC+fVFJ7tfZolp6fWLeFCTAgXaZjq4s4a7NpzMnPJY2ZjZfhBo/TDD
c2XCvd/m3UYAxT2f0U2R0h71BzHWQR9nTMe3daVv+zqNBifZUMhtjFaSdwPYpaqq
oV6IfzmoL4VGnehPr6qC8mpapNPJXkQcnNBRO6rF+T/+PoaAiAES1M3Gv1CZF4q
0ZPNDikU6aETfGZ4eIIAaGwFPyjnYBEIVxksVjg+v7z62nvfaXTvtD4ppZriD8RC
yu1LRKbNTRdDdfexHyjZ0r5R1Sxui4Ivwu8FGNs2tJ7So4i/Q17jSRMODLURWPxt
RyVzmCzi6YomysviFFj8pzoen0br7FBRViiJz3jZq1kDLAed6GW2U6cS9xUrofV8
6G0frQ5YN7pqB14XuLq7FEQGfuVfDn15tjuD34sf0bsgK5H9NrDejH/J0mjpuz8B
ebjwnAMyWUcj100HSWy4CtKSPi7XmY33sYU5evBeMb5bwsCMij68LZ80ZmxKsrSM
FxDvzlsxxBsnDC7s/jk4hn/HO/VUpkDJa/s+COBVulqycJWdy4Y0E+L1oLOEIomP
+cA78mmMBfPGftR5buDXgRz2WVgc9jidr1smMlApEKLm9FNnQIz6oI25EwIDAQAB
o4GAMH4wCQYDVR0TBAlwADATBgNVHSEDDAKBggrBgEFBQcDATA1BgNVHQ8EBAMC
B4AwHQYDVR0OBBYEFHeCfPHjcu2l9+AYWhEvogpqqH4YMB8GA1UdIwQYMBaAFPSK
lmbjqQ6/NOFmaB6J2JwkmjoCMA8GA1UdEQQIMAaHBMCof4wDQYJKoZIhvcNAQEL
BQADggEBAFDQ1gEHBCBv02G87gz2LC90zmjuIhUuYHi4+IJ+QjTxPMZP+AUVPrr+
jErPNj3Fz5szrVd9Jn4yiOZIBbQQaRUTMC/Y9RvK2aX4E1TPFV45cuRd6QLay3Kx
LEXz935DLrBRLTwmLqk309avXI01EnqAVLgyhYJuC1XNqXTTrPMCTp1eNFf0dGIcm
eiV8wFwB4gMI17034KGI2Z0Q1PJ6Dk9akcDETI5jQcAHaulHZxN4iw1ZuTVvUli
nGckt5A2Z/i0Ie0t2jfPVV/GHI9R8WmN/27AJYr/nMp2IKcarfF2jEK+06oazA4n
6WyZ7YF0Kyuz9fwDRf+Ijvo8pbUubm4=
-----END CERTIFICATE-----"

set range global
set source factory
set last-updated 1774380549


```
next
edit "Fortinet_SSL_RSA1024"
    set password ENC
WpT2CwEtkteS1+QbwbUc5sebQKiIawQd0bPVkdkV7w2xHA7KTrRtGn10JFceUE6oa
EtYSvJrVtjj9/aeH7WdqdedP7RM+zpxABiTJv4mmrZ8j7DM8E9m2vCvD4dXhGwbkA
LQV7o51tJDS6NXQOyBFX6EJwXif1MlcRp2tOiZLVlgKjgGp0u4caZheD0FBMyAiH0
RkFlmMjY3dkVA
    set comments "This certificate is embedded in the
hardware at the factory and is unique to this unit. "
    set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----
MIIC5TBfBgkqhkiG9w0BBQ0wUjAxBgkqhkiG9w0BBQwwJAQQ18NSfjBo5UzWZjaN
bAE5rgICCAAwDAYIKoZIhvcNAgkFADAdBg1ghkgBZQMEASoEEJgJDK8SiZKVgfAe
y1yS6kAEggKA/YsQqQVEh2vEB9imh0tI5HVgQy3XPsfY6fnN283nAvtELy24y50M
J9SuxsHAK1EqW49IQEsfCRGxXmrb3le2d33Ats19JRFeWKv6xCUFLGDnuA4Y8NN1
7Kr4P6fc04dWDJduo0fWqCzXhFtUOnrc89d66c0DZ/0TYizzvAo1rIomdFFK5pQI
gwDUpIw1v9zrN2YlrQruLo/eGGOfiR3D+r38wctD9wouksLswv5S1TmGPIWllAuf
/5Qzvw6mcyo1IlnfE+Q60i6c3YZuy20yrSREshbRBoXKFuK320jnjKKNzs8T0T5i
UIL5+7AbAVdmoqu5gtkFOFX/ZEym8oBG+vdcjLwXI8n+l0HAKW889YrR52IoqLW0
la8dB9mvl+r7glIxki/LGKJvW5iuKMLLh8Q2KYM5ubHXwD7sqUNrtzfYSg9DS6HY
haNH/MHaV+SwK/yMFT0BJw0tjTugkjRATtk27rcp1iX45AZeiXvyWXEn20tmGext
nDqh8QZVN8akqaN5recxadalcxq3jv+NpuJRKeUnU83BmhEeIAHxd07r7o01cVKj
ucVe12H/EWjU40p+sRIKOAmUCU004KARXS+DLVh7UGQ1PZ500jQUc6j5+7eBeTpo
Psh9U05N50Wb7BN4Mc1J32MXL23VspiRnf+m4rgOSyeZDJa5QxWkngtORV3Kh1En
5sLQv+4nq50/V0xFGtdnw2EJJLFki00sFr6902r8xGpFfPbkNZ/4sQw14+S1Px67
TAaoQZFkuKEQkoe1VNU2jf60z9Ht2g6fwaoy7Q0NBQs6mT2LK2foHqYf0Xa/nhDi
hqDh/G+JMABVXNpV3yL+xBcmb+pvTfG1jQ==
-----END ENCRYPTED PRIVATE KEY-----"
    set certificate "-----BEGIN CERTIFICATE-----
MIIC2zCCAKSgAwIBAgIIF9TgvDayuT8wDQYJKoZIhvcNAQELBQAwgZ0xCzAJBgNV
BAYTA1VTMRMwEQYDVQQIDApDYWxpZm9ybmlhMRIwEAYDVQQQHDA1TdW5ueXZhbGUx
ETAPBgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQQLDAlGlb3J0aUdhGUXGTAXBgNVBAMM
EEZHVDQwR1RLMjMwOT1DR0YxIzAhBgkqhkiG9w0BCQEWfHN1cHBvcnRAZm9ydGlu
ZXQuY29tMB4XDTI2MDMyNDE5MjgzOFoXDTI4MDYyNjE5MjgzOFowZ0xCzAJBgNV
BAYTA1VTMRMwEQYDVQQIDApDYWxpZm9ybmlhMRIwEAYDVQQQHDA1TdW5ueXZhbGUx
ETAPBgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQQLDAlGlb3J0aUdhGUXGTAXBgNVBAMM
EEZHVDQwR1RLMjMwOT1DR0YxIzAhBgkqhkiG9w0BCQEWfHN1cHBvcnRAZm9ydGlu
ZXQuY29tMIGfMA0GCSqGSIb3DQEBAQUAA4GNADCBiQKBgQC8Mrgsy1tGdo/Bt1k9
APWIDqb4WqKt1wnect8qT8Z71uB8eEfDOR0JQNu+TTksTQK3Q6e8nFam7EUnEfja
OyLrNcyGHrpgiQ4isYpUVoQujFlXhmDomuvJDVDkOn8A6aStHS2/MxbsA4ACUe92
EDusX82vC2vU9M9BKM6uvIT7TQIDAQABoyIwIDAJBgNVHRMEAjaAMBGA1UdJQQM
MAoGCCSGAQUFBwMBMA0GCSqGSIb3DQEBCwUAA4GBAC0c3edwEJQIipv4xWt2FMvT
diGtIG8UQBMC29ENv80eNi3VscM05Rdd6fg5AWjTIsINaTyInxIdvnbgyLRuciz5
B9lzSsnM+Elb0BRRkipp1eNfL6EpQEPK8c5cRj03NFHmtEM3eTwpYQD9erox37ky
kgRkVEmoV7NK56uV3HXe
-----END CERTIFICATE-----"
    set range global
```

```
set source factory
set last-updated 1774380549
next
edit "Fortinet_SSL_RSA2048"
set password ENC
aBtyIQ/p6xJR70SLLwPVE4BUC80hsIwn5L2sEW0JItG4YMtTwpwtGfnasvhf0ZWcd
u6pYyryukVRMN5TPLTxN3yCBx6xCgMrsXiQxkIh8Ck0bYckr2RKxBvwkLanveCDBe
gt3cjXm7vh5vhVHia4wHrcs7r6JvNttiTg/7+zV0Bi3kYD+yiTkcoUDAbP9dc0+/P
ImllmMjY3dkVA
set comments "This certificate is embedded in the
hardware at the factory and is unique to this unit. "
set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----
MIIFNTBfBgkqhkiG9w0BBQ0wUjAxBgkqhkiG9w0BBQwwJAQQgYjvEN6c5jlm4I3s
OD00eAICCAAwDAYIKoZIhvcNAgkFADAdBgIghkgBZQMEASoEEG5sJA6HEgDeYfgh
M4Cw780EggTQXhAuipc8jxnrSEzbXbRLagdc5EpCuMxBuTBC4Kz5mpmWJ+0A9im4
7IsLSlRiU4Mt/kbNAZKCj37+07Eg4yV0Bj4UxtG5nJxt3i/Na6KDXddjkKPZ8Qo1
uDoNzcfbJcEoOn7kf3iA3Z1AS7U0qiUfEL0E2937JJ/n7H3572SqzXitIPH2/If
56+fiHhK8qf0YAPAGSd4u+MgXU9ip8ThcEhz2P5/AG0CAmyoktqCE7klsWjuu6wm
ER9FUYeN/mvA9Rlx/CW7vh4k/28fGCBGc85YVU7ihUaWqV8R2QndXCI9AckclEea
H/EJGoA2wLE4NuqeJUpSunV3TSrNUlWpIrrhBy8SvHonTDJn86Uv+SzSrI3wrY9d
v9ga6xiRLNfClIxSH3NOJVOTfbQoULNBg+D4Sg0j3NvYb65nna4iceH4HF/w9trB
jaZmpmSu1QW0WLeCi3eJdsUdbxM2NLvJuwPlH88AUFFnEXK0Bv0+ufZR7C4ev3yX
UCesdlufJM9koUREsbRow/tyb1MgKHe54vCGAjsP1cBFtyXxQDBYex+uzQHf9aft
q4wr8XcJLVi6lWXuHr+8lKmXs8fj9ZuVnMno+9yWlfgtaoMGmcHBFTn/+kGxSs9B
SI6TGR0QJgdi+ge+V4tYF53Zhsr07GtIqV1Bs7StI2iPJMsMdP8mE53mDqDyAuhb
mDwo9Nw84bzy/D21ImP60EEvnnv3JBNxlxyBD08Ljj4B3ng1FODGaw1Q6slsx35mb
68zYEsjtpBFsr0ftwgn0qy4dB17RFTQFP6/Wz+Fws81eSYJt8k2F4Dc0i7zLrWzI
cL29bnZHY03dX7ED3B7NbVCdFLC4Jl1b1ia7isW3PyAKUF2Tu6LNcq9BrN2jEqiAF
UH3DFibFeM+WknmZXuHmK4Rz/hdbblyFKIshT90QGv5v5v1VqhQbYrzL1z+6Jauh
tNuLC73ZUHG7qY8QPhdd3cRmwXuB5ArrlIUsvur0AWFGlRXwQuAgSwpiUYMJNQP
A CB61KF3qtrduENSEb8dvpB1Rr1AeldkmwEFG+wWTwq6TeEf5V6NWPgJ7HsSbX0DB
QTzjanH5/1kuzMeX2pOPmB9trWMtk7j9nw+A+Y7qbZESsz8BjxBbEfCoazG6Y6Xx
FvW0zhZsvImeALbdVvaqWduo7hn7N2aGkjt9fzqVKSzfa496V4YJhhUYeIaDtBc
dn0QFJC+9hSB2sMCJybRc+BVCtkxfhPDBLbqJuqp2ifW8mccLKUNJG2rIxGmkNt0
WKRXwrFkdZL0c5x4dEmt/61txXYxBEMVltx3xof52983nxtXGxAk+zEnQbqsxHQF
7ZW4TxCNNi/BnI6Ph41SQZWT1TxnkuJTvQPf1Zggq0ffVfuBW+vtNEcIJbndD0Xa
Pn7TJxmTEzxrDfMSnqVQZIOUkdt36tCMaPx2PYEojZ2V2apk8P+wNyWP6MgbQpz3
4o0IGEwiLlNP9L+eNW8w3Je0UtcnrkNyt958LP12i96NBnWHNKX3MdhxfXZbXHPi
u0jk5fVn9pW05iyQ9K0I4vU+l4WlTYKHjE6uZ203GQ0JhVZ3JR17qFJsuHe2TSjd
W8upGRlIpe5Qz8F5/VDXoCrFU59jGZA0n4rzZwbISl5CKyzwYsnVCxw=
-----END ENCRYPTED PRIVATE KEY-----"
set certificate "-----BEGIN CERTIFICATE-----
MIID4DCCAsigAwIBAgIIZdc8b6LjwtIwDQYJKoZIhvcNAQELBQAwgZ0xCzAJBgNV
BAYTA1VTMRMwEQYDVQQIDApDYWxpZm9ybmlhMRIwEAYDVQQHDA1TdW5ueXZhbGUx
ETAPBgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQDLDA1G3J0aUdhGUXGTAXBgNVBAMM
EEZHVDQwRlRlMjMwOTlDR0YxIzAhBgkqhkiG9w0BCQEFHh1cHBvcnRAZm9ydGlu
```

ZXQuY29tMB4XDTI2MDMyNDE5MjgzOFoXDTI4MDYyNjE5MjgzOFowgZ0xCzAJBgNV
BAYTA1VTMRMwEQYDVQQIDApDYWxpZm9ybm1hMRIwEAYDVQQHDA1TdW5ueXZhbGUx
ETAPBgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQQLDA1Gb3J0aUdhGUXGTAXBgNVBAMM
EEZHVDQwR1RLMjMwOT1DR0YxIzAhBgkqhkiG9w0BCQEFHN1cHBvcnRAZm9ydGlu
ZXQuY29tMIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEApthbjPui18H3
dSocb3KtKw1HF/mceM0l3idHafsAcOp8VjpYgFUfJXg1Hw94FJJF+lijk04iSSb0
gqlavF/izkX9FGabHPn6iJH6s+u3wHaP8cky1ItHU3VXeEgt3lR0hoJuYf4QBAPV
onv1HRGx6+1t7X0AftXwFHEVuleIZFZ4siJH8qoeh7QEPKKW7KHhwXAK1BEZX9u+
d8aEsYQqYgcwh9zvMwc873n96sb8elziIdAfvv2LVdo4nGEBGJvA/ASARweeSKYR
MB4az3/aRch6udhkGU5PSln97vQkDu5Co9/7ooV9dfDu3sgEMYD6xJm8rcB3FRYT
zUmVJYl30wIDAQABoyIwIDAJBgNVHRMEAjAAMBGA1UdJQQMMAoGCCsGAQUFBwMB
MA0GCSqGSIb3DQEBChUAA4IBAQBv0an0AbcJlAmN9G1FqY0QSuwTDbpzJ03cZwvu
9H3SYSw2lKAj2leytKlGF+/D/pfFtxDoLYkHuNhs7ru00XceDdSfjwcT4QdLA4r
jihQvSkngRGpQdU5IX+QXrDZquUCf0HGMEqiUaxupCDWaObPmi6tXN1aBCGGvbAS
YyMsox2JQ1JeF0JsQfWaPZOZe942+epf07YvGZ5v2sdWsm/qfLFEq85pNO4YJJen
9WW5zckC2SqHdJQ10XKSGGvwClcjLmAj1j/fuYEB5Kf0hx1DCRoVuNKYR+PYQkdQ
lALB00Hfqla0Bp/j6n6LSwlrP/McQAPqPecoeARuhSH7b65y

-----END CERTIFICATE-----"

```
set range global
set source factory
set last-updated 1774380549
```

next

edit "Fortinet_SSL_RSA4096"

```
set password ENC
```

8vbJ3G1WSaXuqiA7eYHOK5YkakESKTaalR5zPaXh/DX1p7RPzPrFR6T9lu12CvPw/
T+4YOLHFbBcDofdXx7olkM8iAEvjyLh+aUNVcvVep/UoAjhFOI70gMWbZBg8LOqaE
/+8m47WsvwQ8kCosNeTh9MgtoaGsuBUHEcZkW429vcK7aJWEfNKKLw2LEL4twJe+i
6N1lmMjY3dkVA

set comments "This certificate is embedded in the
hardware at the factory and is unique to this unit. "

```
set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----"
```

MIIJtTBfBgkqhkiG9w0BBQ0wUjAxBgkqhkiG9w0BBQwwJAQQ5C7DqXh2zjnIYVIs
8fuFQQICCAAwDAYIKoZIhvcNAgkFADAdBg1ghkgBZQMEASoEELp7wi24JQH0icDK
Bd9RWdYEgglQK8u00yET07R6CZvpUH2rMe+VvZ0jtk80mfHFLzqSFPkr1e0jGJsx
atRklYvuG8Cvyz9sMGQUzSzgFI5yAZy2FRcawPAGhLdjNWJyEbIfQWTUmrU5K/Eb
9XfWwFPzJYotSm0L/F72oUu60a6RI/p74sd3g9iBvUB+JcUuKcCavt8gy2Vmy3wb
Dr9Jdx9+KfFmSwlIoFgVSDZqnNfc+H9q1SbF+WDX5zBdWGCKSca5GzhCc7YhBYn3
WQ+14hckXNEKg7TfuHjFvLODRIDS41lFx2NCK/sWs32uBcEWWisJqSBPfbL0YD/y
JVtj5e2hN0JgqdH2E4Z65Vh8+u+DfpyPHL6Vd0Sv/ZmmrrcH5U+obTa1YtIGe01l
Ko24HVDga7xRwxob60xGPAnFA6r5TccckR28VZHPL9GI567jnNi9JyKYoa18B+6P
RB5x2GbRokivjDBeAcaVW6DUPYNF18sJynVSciPen2ImyG4rzdeaMu9zGHoopSp+
fe/y6iS9tv5J+RpIIeZGmelTHjAldSotW6kjl9sqRGyBXnR3ZZznZz42dnWW3wP
Q5eV36f1Nejw+aJ8/jfY7zKTbEgKre/B0KDW/8eq0NMxK70iGedCtA/4NQZcIjpA
SlUqNZyD7ZASl0ZlRW5MWOUORfc2rS+iWYP/7rSpLGW5P2xwUVZV4za5gTgK5fvT
Gf6icDitmKxunR7Wm0JMVoaEjPT7C8n0ATHakp4rW5SQGJLBkHyXB9PdMnFKPHIS
EZM518lo7SxYiKNlB55nGLfNj6KphAL1NbytSf9gmGAR0wY9nkQ4/+1+boMMH0wv

B5PPLtKvmt3GbR/DlMs2iTjf1nga6dHM+a2U2ebSK+ip4GnRcbI6RDSBHckzCrtx
wBJo1wC/QNopt5lWd29XaSt6yUYqi0IO7zfgysHzGHlH5IN1Ct176b3+4ma0Iy6D
ar+ANmRa/B3SJazgFVh+preI/KrHp8XYLmHm0Y2WlQwOZ+IKLZf5R0QFHwMEkQH
ZJ7GjTEcWwptmEpRR2WzPATYY7J1lpIuS0TpfqNKFwxeL6CBQK2w0bYm9CHNQZGC
poQGchfxQ1XZ01HoYTXIq2Wd58eIuTGskqpb+nPts161jSEIPeNeUaLsDLWwegpc
p8BDcHTp+1xVXCxxkgcaJjnoLmQSMo+eEn2BUzBxPhXoBdH25bTF2UcCloQjhVF
9dqY5TyqdXkplq69xJf5qCe8ApkfsIqASr55PppoCVL5s/PtoJ+nXSN0E2IPvj3M
k5E1IgOXOWlK84Dcf5c7IbLbnw3Rwiv/1YAPTF32efMJJoIMU3POh5iMXW1bubraY
7KNSVXbi+nggg0FUbbqDp1mTVqy07gVuElTz36/QEy0f1XeQN8Ec4BVdSEohAsMp
U7fjg5z7FT6et+nQrIqW65o5esdjDeh3v/ZXZ95qGBj2r89Tg3JkSgooxKG4Ksj+
q+ctdu6ZSfCOCAmKrLNTWTLqszeSaL3FY54JoGb4qLXWQoHHOPrigj1z/MPixsR8
jA6HqB8R/NoJP6z/LJ8C8ZvM4X09STX/91uwzvUAzVdnp7TOFFvfji/5JhMYzcCm
Cy8c3CTUpUvyhXHgOU15FkdG+dAI1Iu7nyBSCWKQ6BDoc/VxfrmFobnQeSKw05h2
MYDmohRCSrDqU3UsQnQV41CMFpU8Yd6mBMLW/1mId9m7Km47KHUI28iL4/G1A97j
L8iRMyp1+td+ja4YKoj1Y0/Lto4NP7jay7j8ufwzXvStZpjnFHBDBHIM36SAwilx
61U09fta0dEveXXk4I/BB0vBq2+CRkUMSXMULwtPVsUTdLUPSrfjj0QYui7eI+ZV
hWPBDF4zmyCaw1ZEtxAGEiLRlmiRFUIEPLATa7Dhn8QCCgmsqqF0g5oh6bRtDu+E
vAPCDEq4Q2GMnf6tC0N1BFzslCMhQXlGcKa124a3/wwV670VsCJTazboZg8zh1DC
LJ25c54IeIcd1ZPbXtJCZoV14pnpAj/n0BX/XIvtKp7vMplZxP8PSzIJf/n1MNX
PYawUAsWA2LOCf3ug3lqUSmF5r4UeGiotnh3xuWS8d/c/y8NLLMGVcnotNGEFw2X/
pwNtU9dwsNXHqPCNv0h7sDXxVvTiXqRy6iGFSe2tQSJe1v276AjvrZ/L/tPnyR34
vGtASeCuv32B7UQLpWrDIXyaanaxP1R9G7VxK0tVw8N9+0LDrBvVFP1W+v230f2s
3Zgghen8eQsomZ5c95NVwY0VRbFxlWLuU2Fx8d7UgEezwva65POTXiXNSodh4oDLV
gd9cyckaVfYg7c0MtCALnXowGosC39dwKvakpp7q6fZoXkcLjnLRsdecMSXy00HP
8xwG9sT/dn1H8CzOCERE/g1V+YC0L4SAiBh0mwmg36t1svdsbSco916dY5ytyXvf
HwbSYiQEjO/MnIMf9C5we3A7IduGf6cYYkhK4v+XnX1s+1UBZRcPMzaQmtfgZ+Bp
fAsJEJgmksRWTjLY3ovv50acHxXWA7KGlyU6SgG30LzdF+ntw/A+49q14hTkzWME
31t54krfOcd6G4BdlbRauAzdd6ZEV5Zu3tSpUAZxeVU7dVGItTFyA79hfAF0uBbs
41lwWpKMDGKmIFFAKSbqAAJKnfMXSm3n8RwkM4ZmeELtVUfKv7+Zx2/dW0Qz4gI38
0iVEqiOnN9QsG/RCYMht5U8+jbEuC+9GQChHJLFvWJHb7naWfpQN1vdEDf42ntvH
EjW21wrfrkw9vg7VNCnQX3aj61GxJpmjcRqsreK22C/eN9d9K0hQEAQeFfle202q
f2gkFkEReQkvf90NwFKDDfB+dZEspiF2A/gmjRhExPAqcdVnRyHoRdIH23tXSbyH
JMN/bXcsvgfexZgPBjCcYHW3vZfv3yn0vajKP81YxpF07HxrXknv0Yr+C409YEN0
j1C5TW9KjRCi0gLP9h4m0FyQKGD/MjmnCAF/AwfCBpq1v1H74zy9M3wc9r1SPBte
7+yff5mbmftQRh0PeLO6D/L4b2ZSO+3jBXd3n4MOK9DI56KxoRcKk7LcAcEVznG
u5gcnD07hWixCCCiGrVFg/acUtTJ0mJxUwuXYythm815ixgXH4F9bp3vGzA1r5z
4JshEFzn3DcUm7El+KNypEu4M/d+HWDS/qaNHHSxOHKZjGTt02UZB4k=
-----END ENCRYPTED PRIVATE KEY-----"

set certificate "-----BEGIN CERTIFICATE-----"

MIIF4DCCA8igAwIBAgIIH2NcJhXsWVYwDQYJKoZIhvcNAQELBQAwgZ0xCzAJBgNV
BAYTA1VTMRMwEQYDVQQIDApDYWxpZm9ybm1hMRIwEAYDVQQHDA1TdW5ueXZhbGUx
ETAPBgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQQLDA1Glb3J0aUdhGUXGTAXBgNVBAMM
EEZHVDQwR1RLMjMwOT1DR0YxIzAhBgkqhkiG9w0BCQEFHN1cHBvcnRAZm9ydGlu
ZXQuY29tMB4XDTI2MDMyNDE5Mjg0NV0XDTI4MDYyNjE5Mjg0NVowgZ0xCzAJBgNV
BAYTA1VTMRMwEQYDVQQIDApDYWxpZm9ybm1hMRIwEAYDVQQHDA1TdW5ueXZhbGUx
ETAPBgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQQLDA1Glb3J0aUdhGUXGTAXBgNVBAMM

EEZHVDQwRlRLMjMwOTlDR0YxIzAhBgkqhkiG9w0BCQEFHn1cHBvcnRAZm9ydGlu
ZXQuY29tMIICIjANBgkqhkiG9w0BAQEFAAOCAg8AMIICCgKCAgEAzW+kn2WmCj65
gI+JFQK2zChcLl7inGJ2ZhnUpjJI4l7cwTAvBy4rcNTzZd9AeZSSrFAQ4riTtoh
nUkJRa3Z0l0/6wLKrJ/gEE0VnB3gWQkfSi04FD1Y9L0oWKOKv21N0Z/u0755VP07
Zq67aK2bXck6Qw0l0+kKZUK13ad0Dcu6F24nY15n8BqZIVLd7+SQXFqcQVWnmv5X
BAqJ3lcmRZt6zjREPnx2+Xz2MKva+lYQr86W/VEpY587hsJ6cmMa4cso1QfnELTF
WHmEiqrIVZC5S05MKdGzsMg+bgdJHKL7wf9VpNBTgf/eDo5j/gfmF9ICtQAHAmA3
tBrnYDQzE95CaiA1T+8nTDWjbawX6Y6A4KxD5jzv5YXca07h+aQOGFj+oOWAPi0L
0+3V1jZUBnjA/zYJr3jw6PD2PVHJfZQwS/DsgdfdNnWm3FEgafJ+Lzf4w1KgPFTK
L8lE58NNKcNEfts84NMAyuiRj/DMAfTit9qW8sj04HJRvm6xq21uphqHE6qUVvot
uDYHy13fji4a9UpKRk/U509Pl2H8uFaoR3733BQ/k4SVew2riffHNngtXLWYQSYW
UgRvcPAlsqQTLyGyNoII8Q/XnEGL/jem1bp7RcZwm8fzfWD4MdwP1GuL9vScXEUC
cY1cVLR4EndJBb1Vivro7g651AtkunkCAwEAAAMiMCAwCQYDVR0TBAlwADATBgNV
HSUEDDAKBggrBgEFBQcDATANBgkqhkiG9w0BAQsFAAOCAgEAa2fYD8hP8a6h5ZY4
x7ZcRE7j0DaZi1SYhNIrxm2wa14X+7Hg7nZPnn001TLvwOBQ6yE0+5xm3oh6gary
ammsp1ubai6DX5wUzo+pcuWFBYg/W6/olHpgDVLbHIi137IXAPEIwXGq9+NjzTis
5hz0uLhZKwLZepIZliEsKJ7F+mCDkgGEkpx051BlcgAFcVJRHjK0uu827hZS40IN
paR3GSF+4ss89yi0ALwBbIHn8pg1es4JG7f/5SdN67n0lezEK8uZ6QmTcPt9n/zW
gWRtMwE/ohni/Xozrd+IVoBZdHZ3XR/Wzr7CnawGK770ft4AF4pqPaz6fZB1bULz
JGAUURj77r19tX1LevfULa9ZUKRUkvFxqymKW8H0mDi6SzVYsBnVcDQg/nRl0L8
PXtNap5k/uofR9n7QVQgVTq8xnE5tpsV/8jQbGJcDZgE2aptCKoop2l2L6VEsRYL
ONWetHl15TpiyOQ+ThdTU1oyYwD1/DG3FSb0XQOTwG7i0AkqGnMsXMAWdgTgBx79
Matvf56ks0VvuJei9WEPl/e9aWS9l1PH58lsYfwc2/r8Y7SKo/gYZlhm8D6PrPau
gw1GJVBoI/hVZOMGO7+kV9Vd2tusC+hF6TtvBU7x5W9t+9yatahQcYBM9VSadIud
AoE21f4ITe5PANyfg+qRFKPRLXg=

-----END CERTIFICATE-----"

set range global
set source factory
set last-updated 1774380549

next

edit "Fortinet_SSL_DSA1024"

set password ENC

8AZZ7qi1XNYByuCG+9YC87005RYgstUTnwFHqyMJzLeLN+6j5Qo08l0Jjoo4GKLV7
2w0t1Uf5Wz0yo8cUyj3C5lMqrxddjhaaimbm+bZA1WN2Q5M/e8EVft1Wzk0iP5z0uM
wqBjAgaj8+oDapculdb5hFK4RLQDkZwRPISdJsSf4Q0LVLAeZJtwhusQUFQIk1srZ
GgFlmMjY3dkVA

set comments "This certificate is embedded in the
hardware at the factory and is unique to this unit. "

set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----

MIIBtTBfBgkqhkiG9w0BBQ0wUjAxBgkqhkiG9w0BBQwwJAQQ2oMcqNd+M9xFmRnn
hVpMOgICCAAwDAYIKoZIhvcNAgkFADAdBg1ghkgBZQMEASoEEGeR83RSHGZ7LVnd
pCzf/1kEggFQYNrDhGuWarN5DtY50Sezv1h1m3xs7foQj506aSVsVz/ygxhKL9fF
/CrPKdgHzr1iSrGOuW+BSlMRZgNFx5UeVxd075/HK28yPz6aafArmDynKiowFik6
288CSnIXU2ktsagW38NyuNCmy3ZA/B/diRjtthA1f46gQKspOK6X+ZJabgsW4v20
2lJBWY/ntPHR3YChoReMs8kVnub2TTPHF6dwEgehpRdA7/OLFnS5Nb1s56N7zwSQ
A8BB83CKCzgsG0FRsS6C5Gx+FQevzvMuZ0Hig3gR0M7MiU/buqQq14JU2eLYSt1w

UHS087DKXW11k5jaipx0wyHsF3juRAcl9h/sxveZh1I19119esDN03cZ/140parg
iE/d5Wksso7CvNkVAzoq4nerICSuNTyviwTGDMCgBmn2tS1SG4e5BGHMSobQc2r5
aDgfCPcT+uTU

-----END ENCRYPTED PRIVATE KEY-----"

set certificate "-----BEGIN CERTIFICATE-----"

MIIDnzCCA1ugAwIBAgIIau1kxPhW+jUwCwYJYIZIAWUDBAMCMIGdMQswCQYDVQQG
EwJVUzETMBEGA1UECAwKQ2FsaWZvcm5pYTESMBAGA1UEBwwJU3Vubn12YWxlMREw
DwYDVQQKDAhGbz3J0aW5ldDESMBAGA1UECwwJRm9ydG1HYXRlMRkwFwYDVQQDDBBG
R1Q0MEZUSzIzMDk5Q0dGMSMwIQYJKoZIhvcNAQkBFhRzdXBwb3J0QGZvcnRpbmV0
LmNvbTAeFw0yNjAzMjQxOTI4NDVaFw0yODA2MjYxOTI4NDVaMIGdMQswCQYDVQQG
EwJVUzETMBEGA1UECAwKQ2FsaWZvcm5pYTESMBAGA1UEBwwJU3Vubn12YWxlMREw
DwYDVQQKDAhGbz3J0aW5ldDESMBAGA1UECwwJRm9ydG1HYXRlMRkwFwYDVQQDDBBG
R1Q0MEZUSzIzMDk5Q0dGMSMwIQYJKoZIhvcNAQkBFhRzdXBwb3J0QGZvcnRpbmV0
LmNvbTCCAbcwggEsBgcqhkJ00AQBMIIbHwKBgQDjExAW+jknbfEWH3b+foe1Strc
uAhxC80gBytrvbQa00wqg3bNErCYdS532QPBorIERkBMPTCPXk8F1Kuwa510hBQv
WKPPnVOVxHmne+GQLJvqyOHZUqJc9pouHN720mnLZtYHcgCgZVeNHfVYZWVC4tu
JH+6WT/TOKz2PNtTXwIVAKvwS99Nf8ts9SCdceRN9wjRdd4XAoGBAJKFae0lZQKV
jraT9bqlkAWo+QtdAywfsG2ykeSkRzRYEXfMdzzbfLSR8sUyXRWR2KNU/CD+qoq8
MS3h2lLhs1x2YkCLx9nR996AZsKkzDPxQorQCLLIshiWdxzMrw3z3xa+UtP6VWV
h/Et/6no7QBRZxGVxuBTK8moN2YQ91RfA4GEAAKBgBzSx2SJM3QTVyNAaWnWe3hJ
ZqDC6mFE+PvCByCJiq5q4A/PVR5JRNAF7yeGoQ3BbLn+syLCZq/TGTrRGAW6F0+j
QqgsFaCNk/TcX/gQ81wkGVHYy8AU+kPVPDUD+oY25M9pXA/o+7hetN/4dhWOpMY
UkoGbY20h5A8vSQqn+zRoyIwIDAJBgNVHRMEAjaAMBMGA1UdJQQMMAoGCCsGAQUF
BwMBMA5GCWCGSAFlAwQDAgMxADAuAhUAMwuiOleLQlnJSvF+7o8u0/QFt1UCFQCH
U3tK2gHM9fufUjWnqGSwl9IzAQ==

-----END CERTIFICATE-----"

set range global

set source factory

set last-updated 1774380549

next

edit "Fortinet_SSL_DSA2048"

set password ENC

Yj9donwWJdxvwmbiE40gtInajMyMtu8Up3D/DWjgb4d8q4Ptro0Glu3V/Sek5su0
WFI87nOIZla6Z9n+hJqXk6zqB3e870az04jWJ5LDDg4tyIOuEGZbbTomSMtfAmdfu
1YSEqD8S0mYmjUdigOX6hfaM1uCqPJ0aBJJjfiSvGB/g9cbkqK20qzdccl/msu/P
GRVlmMjY3dkVA

set comments "This certificate is embedded in the
hardware at the factory and is unique to this unit. "

set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----"

MIIC1TBfBgkqhkiG9w0BBQ0wUjAxBgkqhkiG9w0BBQwwJAQQopxZrjXYimGy4UjZ
AWa4agICCAAwDAYIKoZIhvcNAQkFADAdBg1ghkgBZQMEASoEEHhZLz8C9CQ2PtCuc
L04PJYMEggJwKosUEpbY9DnWl4r30/T1w7XhA7a882Edo1UEUzQj1NL0LDV6T86k
etN7I709Fv1kr9WVcbqMZcsAkYUYvahqj+vFIPCY9HkWw1q26cueSbkIvwqk63dj
RFWmm2XRscfQYoZsoTL1m7E1mMgdMOL8NZdib70pba4dHphlww146pT1YVW7w1/A
1zuw0aVF0fdyeTiKXNa43iFa+UI0ruuzaAMUi4UJJRtkiHzKoRTGueZtWFa0CM+E
MsSAM+ZFM04WXqRqau9CebSL4MAy/G6J8B5XW9lfxcltPutoSdzs2F3q/1cA45+n

cH9fY4ZehI/lqdrajbGSGlp5i1lW3LPLLsXQ3jKPLYBeCHqOgbNB1bymaTNYK5o0
aMwb0VEzI27h0CkFlqiYGUJtYwGhohgzFS7KhavTPvNWraPUe9w1PbxUqTbUfP9Q
s7LxbQIO7jyVKQ1XzVImev1Sj0sI+o7xRoRHcMmObB9hU3mGvi2gbnrqjQkJRu1W
EP2EAdWMmpQrAERpz18ykVry7phShJv3JwR8V912qL96jQs9+sWRylzOEFedvfHG
9knfroIZmLnhaeg7/cCJRbt0aPYTJled9ugaVUAMXdsnEmCyXq7QSN1+eSufj9n
m+7Xz20z5J6q91fHVI+55yWeTdSvXj7f9Gpyv2eIp+IPCKZQANH9wS9NJEgR1xhq
TtXL8rB3Vo9QRSa0TwKIRTsTC/ZrvG526pPxUaSGu/u+sS8Q5MLF5FEd7qabp0my
de6I3iqprkjIYphHA3anC/V/i9hQ80qfXh1LrSQid4wwY/a5YQZalrj9riTKFVfb
wExupwEfZVlN

-----END ENCRYPTED PRIVATE KEY-----"

set certificate "-----BEGIN CERTIFICATE-----"

MIIFRDCCBOqgAwIBAgIIWHwtrwVSmgEwCwYJYIZIAWUDBAMCMIGdMQswCQYDVQQG
EwJVUzETMBEGA1UECAwKQ2FsaWZvcn5pYTESMBAGA1UEBwwJU3Vubn12YWxlMREw
DwYDVQQKDAhGb3J0aW5ldDESMBAGA1UECwwJRm9ydG1HYXRlMRkwFwYDVQQDDBBG
R1Q0MEZUSzIzMDk5Q0dGMSMwIQYJKoZIhvcNAQkBFhRzdXBwb3J0QGZvcnRpbmV0
LmNvbTAeFw0yNjAzMjQxOTI4NDhaFw0yODA2MjYxOTI4NDhaMIGdMQswCQYDVQQG
EwJVUzETMBEGA1UECAwKQ2FsaWZvcn5pYTESMBAGA1UEBwwJU3Vubn12YWxlMREw
DwYDVQQKDAhGb3J0aW5ldDESMBAGA1UECwwJRm9ydG1HYXRlMRkwFwYDVQQDDBBG
R1Q0MEZUSzIzMDk5Q0dGMSMwIQYJKoZIhvcNAQkBFhRzdXBwb3J0QGZvcnRpbmV0
LmNvbTCCA0YwggI5BgcqhkJ00AQBMIIICLAKCAQEAuKfbNpdUR40d7oquksSwnH62
MpG3i/387M0PKTtYsSxpjcgL+utb8EeUfC3dU2Ynid0/6h6EHy6D+ozjv9Ta0//y
RG54JPssvNK08Yjs1YIQQnGMuU5deV7LFkqfV2eKu8KbULPz1aiKB34kEdgDNEFr
Na6FD10GAk+NK07JeV6zVyvZN2WQqaZGGK8Fk5cn8k67LValEp/26mfhPrjAsgtt
OJWCs4CmJurwoHHDRuNwd4SZn0PAK+nqVKDubamovUxNfjdMmnnYZNmRMUgi7zZg
G1D36fWhwaF6pdKnthKFXgSXgsJ0VKCx68JyrWJ1V16Yici2Dvg6e5c2NcyZkQIh
AKkayOmWJTXBfR4hoDHVq//Biy8T6IGSQnBGCblCeLNfAoIBACHSzPviHjdWuStF
ARsxi/pnMsq3u+nigz115N0ZdVOTM/GBUMuIsCTDLu0B/xXxjwSTaYczS53phUd4
IBr/CU+CubKj1j1U40cd9fwnmpbD7Q5Tl+FCN/60zvazd4U0ldsQck/Wl8d1yPxX
vPvJdmndq79dpGipY8/vtH7kVNJn3aVxGF160qSKrjkmcfAZjF/fT3Zbt59p3eq
//XymGbphVtE0nIXQtCN6ZCvaMrEvHwRSuJoKedYhiFQ5JQqOI278gAe2ALAmE+h
D2TJlxsnbDg1Lj3a2rJOBL+yNCYTyuiJjGRq8s6bWmvKp2KFXCjFfg6jrKJ65C10
V12PkZADggEFAAKCAQBOSasAVE7eICnFiHE4WtkwAiXOnKK4cwq0Z16y5TUX+bJR
xdsfWAgooQD50jC0nbHgyY6YWXSTmGAELGAE3b/ijapvHw6Pmn4WC4s8mhWFEyW
Ka5hT4p1A3BTg+JRHj0sSsmfLQ8C19UrHLdCAQROZN6/bpEsp+nB9dG9gAb683BR
7/uaq9kNrBGC68pIZJ+Oyh9KNmGEidvScQHGPBBcBhw5EtDk2AsdTIdEwIcUQJfG
eyrzUCts1sQPNCCD08fM9rUFXYjCQsd/3JxzMcD2YqpCxCpqpVpHuNTS3of9Imzv
o0TdVgQKiCkpk57sFh70mKocTxpwdSunh/kPPbwsoyIwIDAJBgNVHRMEAjaAMBMG
A1UdJQQMMAoGCCsGAQUFBwMBMAsGCWCGSAFlAwQDAGNHADBEAiBD+QaNAA+2k3iF
dHw0gphsGdIOkYyzMJ64iWd9tacZmgIgX7XuJdKh71kR80fLjsR5wEok7SnoD6wJ
hVgzc7/eQ6I=

-----END CERTIFICATE-----"

set range global

set source factory

set last-updated 1774380549

next

edit "Fortinet_SSL_ECDSA256"

```
set password ENC
whjKZIpgUZABRKXB4/Z6ISRy+dZD4mVCUdqpQ4nXVI1SsgkVtR6BdwMSwgSGMxkWi
xcXMivHzumbJntsKFkRZaHtZF7GMuCtt5IMv5X1SoMHqVGwP/VYsTa0VprsXYNE0m
ezdaYyVPHVLRGHbe87fEx+bjtf1KF+3i2vR+UTsw0u08PAd/Y6717umvQYhq82aFf
AgVlmMjY3dkVA
```

```
set comments "This certificate is embedded in the
hardware at the factory and is unique to this unit. "
```

```
set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----
MIH0MF8GCSqGSIb3DQEFDTBSMDEGCSqGSIb3DQEFDDAKBBDJZzB0jKA9Pp8Da0my
MmBLAgIIADAMBggqhkiG9w0CCQUAMB0GCWCGSAFlAwQBKqQs8AwWl4o0CUxdJ7p
q8m2aQSBkIhfzwn8bCGgov/LwQAJXt+0aSv5gM9owlwHQ9EycvKGIImoY0lfFH2Qe
ClwvnYAYvYmZcCY2M5QkA7n2FhaDH6ZrcpzjyGPNPbqcHFRHkNlt0dWiTnX9ByrJ
iSbyxDJA1130hhZa3zTwiesQ8XIZfQuFqTUAGRIN/xnKkZnfrwNfJx7PH0/jtqu4
9zD1r9b7uA==
```

```
-----END ENCRYPTED PRIVATE KEY-----"
```

```
set certificate "-----BEGIN CERTIFICATE-----
MIICVDCCAfqqAwIBAgIIIFc09sqb4CdsWcgYIKoZIZj0EAwIwgZ0xCzAJBgNVBAYT
AlVTMRMwEQYDVQQIDApDYWxpZm9ybmlhMRIwEAYDVQQHDA1TdW5ueXZhbGUxETAP
BgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQQLDA1Glb3J0aUdhGUxGTAXBgNVBAMMEZHZH
VDQwRlRLMjMwOTlDR0YxIzAhBgkqhkiG9w0BCQEFHN1cHBvcnRAZm9ydGluZXQu
Y29tMB4XDTI2MDMyNDE5Mjg0F0FoXDTI4MDYyNjE5Mjg0F0FowGZ0xCzAJBgNVBAYT
AlVTMRMwEQYDVQQIDApDYWxpZm9ybmlhMRIwEAYDVQQHDA1TdW5ueXZhbGUxETAP
BgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQQLDA1Glb3J0aUdhGUxGTAXBgNVBAMMEZHZH
VDQwRlRLMjMwOTlDR0YxIzAhBgkqhkiG9w0BCQEFHN1cHBvcnRAZm9ydGluZXQu
Y29tMFkwEwYHKoZIzj0CAQYIKoZIzj0DAQcDQgAEhU6t0dGzaVbu0Q0L0P1Pp6j
7hHM9M05ZyU+lrkVPTQ499vFvc0hFr4AXuCCJPv31/OFowiyQL6BDNBwad5yH6Mi
MCAwCQYDVR0TBAlwADATBgNVHSUEDDAKBggrBgEFBQcDATAKBggqhkiJOPQQDAgNI
ADBFAiEA41YQHWAffSh8fv0hx0knUhXTP/M45dmOTbLK9KjPUeYCIGiZQoiAF9mn
NykydQS6CqqaZrhtZkrEb3m1UgD+fEyz
```

```
-----END CERTIFICATE-----"
```

```
set range global
set source factory
set last-updated 1774380549
```

```
next
```

```
edit "Fortinet_SSL_ECDSA384"
```

```
set password ENC
G4cBttl3bImDS/upg3xEaMwgGKjgR4perRub1GDNW1nMmY2LQasdU180KmTVXGEAt
OFSVsbZGGGPEwK805UxyzmeIAMxkU2NRjMSWFeFQaITy8xSbdh3b2AL6JJAEMjc87
8xnUT9Co2/vzDayZcF08H6Alvs5X37R4gPb2IrLWSuK2/MsJNEig57scUz7QXC6/N
LPVlmMjY3dkVA
```

```
set comments "This certificate is embedded in the
hardware at the factory and is unique to this unit. "
```

```
set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----
MIIBJDBfBgkqhkiG9w0BBQ0wUjAxBgkqhkiG9w0BBQwwJAQQvuJ5a/J0iCooWhDb
ZiS9SAICCAAwDAYIKoZIhvcNAgkFADAdBg1ghkgBZQMEASoEEBx40WjVoavxkL9n
M3MXlXYEgcCKLWqPnTMo+sycPK5D6gPsuYLpeAHp1L0GWLLwKW77dAcPGE8kuooP
```


qD/FJfourjyn24AUDuo31s1sDXecnzPEKSq4iRuF2RJx+YS2cVMRfo6DqF5Am/82
Syn22djoATDdnIFo+aFhgyKVOpL2KIwhVKTJsYCVRYE06VWy+HyFJeF6uoiPTt7/
XqMPeIyBJn2yopwWo5vK7G71b6zjuI6p8UNn8daHDxUPly/CD+tHIAoiE2M6yMND
NVZKsr85Px4=

-----END ENCRYPTED PRIVATE KEY-----"

set certificate "-----BEGIN CERTIFICATE-----"

MIICkDCCAhegAwIBAgIIeva1VPBDhA4wCgYIKoZIzj0EAwIwGZ0xCzAJBgNVBAYT
ALVTMRMwEQYDVQQIDApDYWxpZm9ybmlhMREwEAYDVQQHDA1TdW5ueXZhbGUxETAP
BgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQQLDA1Glb3J0aUdhGUxGTAXBgNVBAMMEZ
VDQwR1RLMjMwOT1DR0YxIzAhBgkqhkiG9w0BCQEWfHN1cHBvcnRAZm9ydGluZXQu
Y29tMB4XDTI2MDMyNDE5Mjg0OV0xDTI4MDYyNjE5Mjg0OVowGZ0xCzAJBgNVBAYT
ALVTMRMwEQYDVQQIDApDYWxpZm9ybmlhMREwEAYDVQQHDA1TdW5ueXZhbGUxETAP
BgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQQLDA1Glb3J0aUdhGUxGTAXBgNVBAMMEZ
VDQwR1RLMjMwOT1DR0YxIzAhBgkqhkiG9w0BCQEWfHN1cHBvcnRAZm9ydGluZXQu
Y29tMHYwEAYHKoZIzj0CAQYFK4EEACIDYgAE0HjCXq6LefcakXlfjU9aNBhd2IN
VfWBDvld8Jn4YuW4QqGEKLVc08jPs5P13altkQITy1mCYqYm450Gk0ECw4BGJjWl
freK+ZvOYqoQDdDhZwr+RBLrGyKaU6zjQ2lGoyIwIDAJBgNVHRMEAjAAMBGA1Ud
JQQMAoGCCsGAQUFBwMBMAoGCCqGSM49BAMCA2cAMGQCMEkBZ0ZH4B3mETRmDQx
03dC9GjXJM3dsU//Xoc10Udz12kr3ue9Qt7Wqbw+iEjPRwIwUY9WMLUWg/UgrFZO
7kYyC7/Sq6MRDP21atIwGmssiUylaNsuoQ/R8cSZm8hI03vM

-----END CERTIFICATE-----"

set range global

set source factory

set last-updated 1774380549

next

edit "Fortinet_SSL_ECDSA521"

set password ENC

e/pZnRXD9nK2Xd/V40cq7M2ZMwfVwu2FvjFYcJrAkT3B3RCiU834D5HhfiAkAstu9
QQE9U1a+bCpnY25GR0gCAH/ANpyQvfJDAn/7G1/qsuP203QQhxaMyajP08bMDkRZu
Kzw0DX+2Z1E00baL/AKVLXHzCzKW79eDvWkhn1nPVnzHCiv4fycfECqj4KnNqpYef
jnFlmMjY3dkVA

set comments "This certificate is embedded in the
hardware at the factory and is unique to this unit. "

set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----"

MIIBZTBfBgkqhkiG9w0BBQ0wUjAxBgkqhkiG9w0BBQwwJAQQTvjj0hRypD/7C8foX
QpaywQICCAAwDAYIKoZIhvcNAgkFADAdBg1ghkgBZQMEASoEEJzuVIdDlnSiVnVF
Lhk6+R4EggEAzyecZT2fB6allpGADXv8e1eB+GzJvttS38j/duSW9sD2gZ6blrFu
+tLrZdcWtugSsiub7dFEXaVjuyrqbYKZMDrD2ZfuU1uaHzT9ZIj50wBuM4fUrQDx
/y1CVLzm28Pu0C3qkCygCuxv06UDjx6zQ+FKm2urTjiZ6AFL9qBzRF9GJm6Z/Mif
bKEBxLIPmDLHwjiqYPiETmVo6emwq0+lBMytsnEwonkRs7AU9MUip9Zo5vWcq
Lk780Ky7VYTr8w2y9yNvF2nSlHc8I9W7K5A5s0+CRNc+zb39F2Rai32UwrX4KuuX
3kd7aK5r0SoA2A/D7MrctsigjkFuVK1A7g==

-----END ENCRYPTED PRIVATE KEY-----"

set certificate "-----BEGIN CERTIFICATE-----"

MIIC3DCCAaj2gAwIBAgIINJR6pxyDWckwCgYIKoZIzj0EAwIwGZ0xCzAJBgNVBAYT
ALVTMRMwEQYDVQQIDApDYWxpZm9ybmlhMREwEAYDVQQHDA1TdW5ueXZhbGUxETAP

BgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQLEA1Gb3J0aUdhhdGUxGTAXBgNVBAMMEEZHV
VDQwR1RLMjMwOT1DR0YxIzAhBgkqhkiG9w0BCQEFHN1cHBvcnRAZm9ydGluZXQu
Y29tMB4XDTI2MDMyNDE5Mjg0V0VoXDTI4MDYyNjE5Mjg0VowgZ0xCzAJBgNVBAYT
A1VTMRMwEQYDVQQIDApDYWxpZm9ybm1hMRIwEAYDVQQHDA1TdW5ueXZhbGUxETAP
BgNVBAoMCEZvcnRpbmV0MRIwEAYDVQQLEA1Gb3J0aUdhhdGUxGTAXBgNVBAMMEEZHV
VDQwR1RLMjMwOT1DR0YxIzAhBgkqhkiG9w0BCQEFHN1cHBvcnRAZm9ydGluZXQu
Y29tMIGbMBAGByqGSM49AgEGBSuBBAAjA4GGAAQBW1d0vzs0w1Totl+3FiRSjGsK
SX9KfbRkmMJbesKbTBQpCp3bPzx9b1x2DHg1dSgY/+8LihJsnrsvBqi7zwozM3MB
MfdqRhL/JzthYooCHGTQLG1i9y2WvMiWBTkwa8jVHjsqsdYIxScNnPpB0btMwmKD
xY72YbEq92rcT5Qz1fcQkYGjIjAgMAKGA1UdEwQCMAAwEwYDVR0lBAwwCgYIKwYB
BQUHAWewCgYIKoZIZj0EAwIDgYwAMIGIAkIBTSRZRawMZ+qfpEx9MMf1I4vS42Mb
XyIG/ee00JK0Gk+pHJOv/N2HgIGretF1x5fGL/baIcxqD5TBBu17KX0kzJgCQgCN
4WLNanBTbafzEakGqzW0G2dom1ZCUcqpQEA1+9FGh36XqXbrCR4yhNMJt0Qs8ZZ
qWHsADcki8fdjM2nCB+WvA==

-----END CERTIFICATE-----"

set range global

set source factory

set last-updated 1774380549

next

edit "Fortinet_SSL_ED25519"

set password ENC

TYv2Fgsjw5jZaGLLU1tTEQOCBpkLhmpRMhxlpEuIiQz3dngEQ8o9+WlvooU3GkNJd
TT2B46btqkWoKXEq1Vb3hWPmx8pSgIuZsajTGL56YqewM8fR+iXkarD+nNeTfx5++
0w/1QCCgLzSi8GVUwYISTWq9HpqmmLtWtRmyB4V4zzue2OBSTRzA2U21JZxbtbYgG
9TVlmMjY3dkVA

set comments "This certificate is embedded in the
hardware at the factory and is unique to this unit. "

set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----

MIGjMF8GCSqGSib3DQEFDTBSMDEGCSqGSib3DQEFDDAKBBDOVACbULBTPdSzaa47
z/x4AgIIADAMBggqhkiG9w0CCQUAMB0GCWCGSAFlAwQBKqQQJdAn193xw3Pxyrj0
BXC13gRA0DguMtYxpWQsHdPPud4qaKJFIkEDY7I0LWfcqdZnZ49q2304z+zwSf3Z
62LSKYFsabwVTH11mkwC3+AbbYx14Q==

-----END ENCRYPTED PRIVATE KEY-----"

set certificate "-----BEGIN CERTIFICATE-----

MIICFDCCAcagAwIBAgIIPE3IIsYXGcIwBQYDK2VwMIGdMQswCQYDVQQGEwJVUzET
MBEGA1UECAwKQ2FsaWZvcn5pYTESMBAGA1UEBwwJU3Vubn12YWxlMREwDwYDVQQK
DAhGb3J0aW5ldDESMBAGA1UECwwJRm9ydG1HYXR1MRkwFwYDVQQDDDBGR1Q0MEZU
SzIzMDk5Q0dGMSMwIQYJKoZIhvcNAQkBFhRzdXBwb3J0QGZvcnRpbmV0LmNvbTAe
Fw0yNjAzMjQxOTI4ND1aFw0yODA2MjYxOTI4ND1aMIGdMQswCQYDVQQGEwJVUzET
MBEGA1UECAwKQ2FsaWZvcn5pYTESMBAGA1UEBwwJU3Vubn12YWxlMREwDwYDVQQK
DAhGb3J0aW5ldDESMBAGA1UECwwJRm9ydG1HYXR1MRkwFwYDVQQDDDBGR1Q0MEZU
SzIzMDk5Q0dGMSMwIQYJKoZIhvcNAQkBFhRzdXBwb3J0QGZvcnRpbmV0LmNvbTAq
MAUGAyt1cAMhAG5ZJjQexfNqoAOTkSt9I9wakkRgxDoeIq7MjoIzUwA+oyIwIDAj
BgNVHRMEAjAAMBGA1UdJQQMMAoGCCsGAQUFBwMBMAUGAyt1cANBAHS74aayrM5f
Gjj2vQ6sIp9skLVqfzocJsFwMAsMcmc/Vo58a74s19LRZtv91TU8zxzg6slwM2WZ
J11Z98GqYgw=

```

-----END CERTIFICATE-----"
    set range global
    set source factory
    set last-updated 1774380549
next
edit "Fortinet_SSL_ED448"
    set password ENC
S5dsrWhhHcUodLvX4AM2lDf/kYwot93HhGqyQ5hufYfhTBE2M4mmKHVAIKb4n6HfM
iHs23SieyUIJ7DWGn29qlD08oiM0W+SLKtNjZe92P9wuFbXn4rNDNHUIvDpVjGyYK
ukNBPw/UrHffYIfG3TFdhL92fS/i7bSI9kD289n22pnFiNZFcAg2C2xCKa4pFeTmq
LY1lmMjY3dkVA
    set comments "This certificate is embedded in the
hardware at the factory and is unique to this unit. "
    set private-key "-----BEGIN ENCRYPTED PRIVATE KEY-----
MIGzMF8GCSqGSIb3DQEFDTBSMDEGCSqGSIb3DQEFDDAKBBCd0/gd9Y+vF2AutzH7
A158AgIIADAMBggqhkiG9w0CCQUAMB0GCWCGSAFlAwQBKqQQOhoVKTW73hdr8zss
V6B2QwRQ9KvuyaFTavv2SsDUMSnGzj8AsMsDiGzotdP1BzgWAJOIuHztuzlSiM5F
VG+Wu/9/Ru+HthAZWHlEp7AhJK9tsMkQ003Rkcsyoc/uAw+3ng=
-----END ENCRYPTED PRIVATE KEY-----"
    set certificate "-----BEGIN CERTIFICATE-----
MIICXzCCAd+gAwIBAgIIATRwQQ994NwwBQYDK2VxMIGdMQswCQYDVQQGEwJVUzET
MBEGA1UECAwKQ2FsaWZvcn5pYTESMBAGA1UEBwwJU3Vubnl2YWxlMREwDwYDVQQK
DAhGb3J0aW5ldDESMBAGA1UECwwJRm9ydG1HYXRlMRkwFwYDVQQDDDBBGR1Q0MEZU
SziZMDk5Q0dGMSMwIQYJKoZIhvcNAQkBFhRzdXBwb3J0QGZvcnRpbmV0LmNvbTAe
Fw0yNjAzMjQxOTI4NDlaFw0yODA2MjYxOTI4NDlaMIGdMQswCQYDVQQGEwJVUzET
MBEGA1UECAwKQ2FsaWZvcn5pYTESMBAGA1UEBwwJU3Vubnl2YWxlMREwDwYDVQQK
DAhGb3J0aW5ldDESMBAGA1UECwwJRm9ydG1HYXRlMRkwFwYDVQQDDDBBGR1Q0MEZU
SziZMDk5Q0dGMSMwIQYJKoZIhvcNAQkBFhRzdXBwb3J0QGZvcnRpbmV0LmNvbTBD
MAUGAyt1cQM6ACGDGvcwez6MRzGe3Ke1ipV37cGcmGfQeWhWpEk58hKIryJNnq7j
1Kp/TxtDPvtew+ru9Uv2rTZ8gKMiMCAwCQYDVROTBAlwADATBgNVHSUEDDAKBggr
BgEFBQcDATAFBgMrZXEDcwA7H3fdWqSACrOHhB3qWnYXd20153Ckihd41QoA6Rch
phA2+7M9yfDle7XlYDPraI4mqxTg3sESyIA3z47qu/3T74ChbELCTAlnq43J0JKV
U8gLxMv+9D8QjmjuXqDbfxmB/mGfoP5jx0yUfPVfbE5AHAA=
-----END CERTIFICATE-----"
    set range global
    set source factory
    set last-updated 1774380549
next
end
config webfilter ftgd-local-cat
    edit "custom1"
        set id 140
    next
    edit "custom2"
        set id 141
    next

```

```

end
config ips sensor
  edit "default"
    set comment "Prevent critical attacks."
    config entries
      edit 1
        set severity medium high critical
      next
    end
  next
  edit "sniffer-profile"
    set comment "Monitor IPS attacks."
    config entries
      edit 1
        set severity medium high critical
      next
    end
  next
  edit "wifi-default"
    set comment "Default configuration for offloading WiFi
traffic."
    config entries
      edit 1
        set severity medium high critical
      next
    end
  next
  edit "all_default"
    set comment "All predefined signatures with default
setting."
    config entries
      edit 1
        next
      end
    next
    edit "all_default_pass"
      set comment "All predefined signatures with PASS action."
      config entries
        edit 1
          set action pass
        next
      end
    next
    edit "protect_http_server"
      set comment "Protect against HTTP server-side
vulnerabilities."

```

```

        config entries
            edit 1
                set location server
                set protocol HTTP
            next
        end
    next
    edit "protect_email_server"
        set comment "Protect against email server-side
vulnerabilities."
        config entries
            edit 1
                set location server
                set protocol SMTP POP3 IMAP
            next
        end
    next
    edit "protect_client"
        set comment "Protect against client-side
vulnerabilities."
        config entries
            edit 1
                set location client
            next
        end
    next
    edit "high_security"
        set comment "Blocks all Critical/High/Medium and some Low
severity vulnerabilities"
        set block-malicious-url enable
        config entries
            edit 1
                set severity medium high critical
                set status enable
                set action block
            next
            edit 2
                set severity low
            next
        end
    next
end
config firewall shaper traffic-shaper
    edit "high-priority"
        set maximum-bandwidth 1048576
        set per-policy enable

```

```

next
edit "medium-priority"
    set maximum-bandwidth 1048576
    set priority medium
    set per-policy enable
next
edit "low-priority"
    set maximum-bandwidth 1048576
    set priority low
    set per-policy enable
next
edit "guarantee-100kbps"
    set guaranteed-bandwidth 100
    set maximum-bandwidth 1048576
    set per-policy enable
next
edit "shared-1M-pipe"
    set maximum-bandwidth 1024
next
end
config application list
    edit "default"
        set comment "Monitor all applications."
        config entries
            edit 1
                set action pass
            next
        end
    next
    edit "sniffer-profile"
        set comment "Monitor all applications."
        unset options
        config entries
            edit 1
                set action pass
            next
        end
    next
    edit "wifi-default"
        set comment "Default configuration for offloading WiFi
traffic."
        set deep-app-inspection disable
        config entries
            edit 1
                set action pass
                set log disable

```

```

        next
    end
next
edit "block-high-risk"
    config entries
        edit 1
            set category 2 6
        next
        edit 2
            set action pass
        next
    end
next
end
config dlp data-type
    edit "keyword"
        set pattern "built-in"
    next
    edit "regex"
        set pattern "built-in"
    next
    edit "hex"
        set pattern "built-in"
    next
    edit "mip-label"
        set pattern "^[[:xdigit:]]{8}-[[:xdigit:]]{4}-[[:xdigit:]]{4}-[[:xdigit:]]{4}-[[:xdigit:]]{12}$"
        set transform "built-in"
    next
    edit "credit-card"
        set pattern "\\b([2-6]{1}\\d{3})[- ]?(\\d{4})[- ]?(\\d{2})[- ]?(\\d{2})[- ]?(\\d{2,4})\\b"
        set verify "builtin)credit-card"
        set look-back 20
        set transform "\\b\\1[- ]?\\2[- ]?\\3[- ]?\\4[- ]?\\5\\b"
    next
    edit "ssn-us"
        set pattern "\\b(\\d{3})-(\\d{2})-(\\d{4})\\b"
        set verify "(?!-)\b(?:666|000|9\\d{2})\\d{3}-(?!00)\\d{2}-(?!0{4})\\d{4}\\b(?:-)"
        set look-back 12
        set transform "\\b\\1-\\2-\\3\\b"
    next
    edit "edm-keyword"
        set pattern ".+"
        set transform "/\\0/i"

```

```
        next
    end
    config dlp filepattern
        edit 1
            set name "builtin-patterns"
            config entries
                edit "*.bat"
                next
                edit "*.com"
                next
                edit "*.dll"
                next
                edit "*.doc"
                next
                edit "*.exe"
                next
                edit "*.gz"
                next
                edit "*.hta"
                next
                edit "*.ppt"
                next
                edit "*.rar"
                next
                edit "*.scr"
                next
                edit "*.tar"
                next
                edit "*.tgz"
                next
                edit "*.vb?"
                next
                edit "*.wps"
                next
                edit "*.xl?"
                next
                edit "*.zip"
                next
                edit "*.pif"
                next
                edit "*.cpl"
                next
            end
        next
        edit 2
            set name "all_executables"
```



```

        config entries
            edit "bat"
                set filter-type type
                set file-type bat
            next
            edit "exe"
                set filter-type type
                set file-type exe
            next
            edit "elf"
                set filter-type type
                set file-type elf
            next
            edit "hta"
                set filter-type type
                set file-type hta
            next
        end
    next
end
config dlp profile
    edit "default"
        set comment "Default profile."
    next
    edit "sniffer-profile"
        set comment "Log a summary of email and web traffic."
        set summary-proto smtp pop3 imap http-get http-post
    next
    edit "Content_Summary"
        set summary-proto smtp pop3 imap http-get http-post ftp
nntp cifs
    next
    edit "Content_Archive"
        set full-archive-proto smtp pop3 imap http-get http-post
ftp nntp cifs
        set summary-proto smtp pop3 imap http-get http-post ftp
nntp cifs
    next
    edit "Large-File"
        config rule
            edit 1
                set name "Large-File-Filter"
                set proto smtp pop3 imap http-get http-post
                set file-size 5120
                set action log-only
            next

```

```
        end
    next
end
config webfilter ips-urlfilter-setting
end
config webfilter ips-urlfilter-setting6
end
config log threat-weight
    config web
        edit 1
            set category 26
            set level high
        next
        edit 2
            set category 61
            set level high
        next
        edit 3
            set category 86
            set level high
        next
        edit 4
            set category 1
            set level medium
        next
        edit 5
            set category 3
            set level medium
        next
        edit 6
            set category 4
            set level medium
        next
        edit 7
            set category 5
            set level medium
        next
        edit 8
            set category 6
            set level medium
        next
        edit 9
            set category 12
            set level medium
        next
        edit 10
```

```

        set category 59
        set level medium
    next
    edit 11
        set category 62
        set level medium
    next
    edit 12
        set category 83
        set level medium
    next
    edit 13
        set category 72
    next
    edit 14
        set category 14
    next
    edit 15
        set category 96
        set level medium
    next
end
config application
    edit 1
        set category 2
    next
    edit 2
        set category 6
        set level medium
    next
end
end
config user radius
    edit "Radius Server"
        set server "10.0.254.2"
        set secret ENC
EFN3HkA9FPRCWEM28P0d1B3HRvTTdGUDto/v1TIhFPZIUq1ttsi4Y0fNgRVakQ8dq
RfS9fcIdC9PkDyo1IKcYoPJWDhc1jc2uSnzhT8q18Sr5thH0RQ+VR1D4cTDJAJsxp
6wY+geaVU9Vg6wXK5q7wswBqRZ++sZgK5G4gTisr0ZNRoo2PcmhDn1TNpHlxehhyp
Me1lmMjY3dkVA
    next
end
config user fortitoken
    edit "FTKMOB42C7AD9F89"
        set license "FTMTRIAL0DE8D397"
    next

```

```

    edit "FTKMOB42D8963825"
        set license "FTMTRIAL0DE8D397"
    next
end
config user local
    edit "guest"
        set type password
        set passwd ENC
WkJZyAIXusdX18ATbaaUg5WxFXAcMQKvbtLz66AG6js1nNC30E0gxwS+EyH82GrZ5
iE6n0e5Tf0vxQ5R5YgkBQf67qcZPixUDzaqUjIjSGk1TlTpe9kN2JzZSy45qrY5aW
AjlQqlbvVFQpW/giHAPRNzXrIuSIwKhHU/hmD6YK1zpNo0OXrWmiKmFyrAVmRVip0
KrVlmMjY3dkVA
    next
end
config user setting
    set auth-cert "Fortinet_Factory"
end
config user group
    edit "SSO_Guest_Users"
    next
    edit "Guest-group"
        set member "guest"
    next
end
config voip profile
    edit "default"
        set comment "Default VoIP profile."
        config sip
        end
    next
    edit "strict"
        config sip
            set malformed-request-line discard
            set malformed-header-via discard
            set malformed-header-from discard
            set malformed-header-to discard
            set malformed-header-call-id discard
            set malformed-header-cseq discard
            set malformed-header-rack discard
            set malformed-header-rseq discard
            set malformed-header-contact discard
            set malformed-header-record-route discard
            set malformed-header-route discard
            set malformed-header-expires discard
            set malformed-header-content-type discard
            set malformed-header-content-length discard

```

```

        set malformed-header-max-forwards discard
        set malformed-header-allow discard
        set malformed-header-p-asserted-identity discard
        set malformed-header-sdp-v discard
        set malformed-header-sdp-o discard
        set malformed-header-sdp-s discard
        set malformed-header-sdp-i discard
        set malformed-header-sdp-c discard
        set malformed-header-sdp-b discard
        set malformed-header-sdp-z discard
        set malformed-header-sdp-k discard
        set malformed-header-sdp-a discard
        set malformed-header-sdp-t discard
        set malformed-header-sdp-r discard
        set malformed-header-sdp-m discard
    end
next
end
config system sdwan
    config zone
        edit "virtual-wan-link"
        next
    end
    config health-check
        edit "Default_DNS"
            set system-dns enable
            set interval 1000
            set probe-timeout 1000
            set recoverytime 10
            config sla
                edit 1
                    set link-cost-factor latency jitter packet-
loss
                                set latency-threshold 250
                                set jitter-threshold 50
                                set packetloss-threshold 5
                next
            end
        next
    end
    edit "Default_Office_365"
        set server "www.office.com"
        set protocol https
        set interval 120000
        set probe-timeout 120000
        set recoverytime 10
        config sla

```

```

        edit 1
            set link-cost-factor latency jitter packet-
loss
                set latency-threshold 250
                set jitter-threshold 50
                set packetloss-threshold 5
            next
        end
    next
edit "Default_Gmail"
    set server "gmail.com"
    set interval 1000
    set probe-timeout 1000
    set recoverytime 10
    config sla
        edit 1
            set link-cost-factor latency jitter packet-
loss
                set latency-threshold 250
                set jitter-threshold 50
                set packetloss-threshold 2
            next
        end
    next
edit "Default_Google Search"
    set server "www.google.com"
    set protocol https
    set interval 120000
    set probe-timeout 120000
    set recoverytime 10
    config sla
        edit 1
            set link-cost-factor latency jitter packet-
loss
                set latency-threshold 250
                set jitter-threshold 50
                set packetloss-threshold 5
            next
        end
    next
edit "Default_FortiGuard"
    set server "fortiguard.com"
    set protocol https
    set interval 120000
    set probe-timeout 120000
    set recoverytime 10

```

```

        config sla
            edit 1
                set link-cost-factor latency jitter packet-
loss
                    set latency-threshold 250
                    set jitter-threshold 50
                    set packetloss-threshold 5
            next
        end
    next
end
end
config dnsfilter profile
    edit "default"
        set comment "Default dns filtering."
        config ftgd-dns
            config filters
                edit 1
                    set category 2
                next
                edit 2
                    set category 7
                next
                edit 3
                    set category 8
                next
                edit 4
                    set category 9
                next
                edit 5
                    set category 11
                next
                edit 6
                    set category 12
                next
                edit 7
                    set category 13
                next
                edit 8
                    set category 14
                next
                edit 9
                    set category 15
                next
                edit 10
                    set category 16
            
```

```
next
edit 11
next
edit 12
    set category 57
next
edit 13
    set category 63
next
edit 14
    set category 64
next
edit 15
    set category 65
next
edit 16
    set category 66
next
edit 17
    set category 67
next
edit 18
    set category 26
    set action block
next
edit 19
    set category 61
    set action block
next
edit 20
    set category 86
    set action block
next
edit 21
    set category 88
    set action block
next
edit 22
    set category 90
    set action block
next
edit 23
    set category 91
    set action block
next
edit 24
```



```

        set category 96
        set action block
    next
    edit 25
        set category 98
        set action block
    next
    edit 26
        set category 99
        set action block
    next
end
end
set block-botnet enable
next
end
config system dns-server
    edit "Server lan"
    next
end
config antivirus settings
    set machine-learning-detection enable
    set grayware enable
end
config antivirus profile
    edit "default"
        set comment "Scan files and block viruses."
        config http
            set av-scan block
        end
        config ftp
            set av-scan block
        end
        config imap
            set av-scan block
            set executables virus
        end
        config pop3
            set av-scan block
            set executables virus
        end
        config smtp
            set av-scan block
            set executables virus
        end
    end
next

```

```

edit "sniffer-profile"
    set comment "Scan files and monitor viruses."
    config http
        set av-scan block
    end
    config ftp
        set av-scan block
    end
    config imap
        set av-scan block
        set executables virus
    end
    config pop3
        set av-scan block
        set executables virus
    end
    config smtp
        set av-scan block
        set executables virus
    end
next
edit "wifi-default"
    set comment "Default configuration for offloading WiFi
traffic."
    config http
        set av-scan block
    end
    config ftp
        set av-scan block
    end
    config imap
        set av-scan block
        set executables virus
    end
    config pop3
        set av-scan block
        set executables virus
    end
    config smtp
        set av-scan block
        set executables virus
    end
next
end
config file-filter profile
    edit "default"

```

```

        set comment "File type inspection."
    next
    edit "sniffer-profile"
        set comment "File type inspection."
    next
end
config webfilter ftgd-risk-level
    edit "high"
        set high 100
        set low 91
    next
    edit "suspicious"
        set high 90
        set low 71
    next
    edit "moderate"
        set high 70
        set low 51
    next
    edit "low"
        set high 50
        set low 21
    next
    edit "trustworthy"
        set high 20
        set low 1
    next
    edit "unrated"
    next
end
config webfilter profile
    edit "default"
        set comment "Default web filtering."
        config ftgd-wf
            unset options
            config filters
                edit 1
                    set action block
                next
                edit 2
                    set category 2
                    set action block
                next
                edit 3
                    set category 7
                    set action block
            
```

```
next
edit 4
    set category 8
    set action block
next
edit 5
    set category 9
    set action block
next
edit 6
    set category 11
    set action block
next
edit 7
    set category 13
    set action block
next
edit 8
    set category 14
    set action block
next
edit 9
    set category 15
    set action block
next
edit 10
    set category 16
    set action block
next
edit 11
    set category 26
    set action block
next
edit 12
    set category 57
    set action block
next
edit 13
    set category 61
    set action block
next
edit 14
    set category 63
    set action block
next
edit 15
```

```
        set category 64
        set action block
next
edit 16
        set category 65
        set action block
next
edit 17
        set category 66
        set action block
next
edit 18
        set category 67
        set action block
next
edit 19
        set category 83
        set action block
next
edit 20
        set category 86
        set action block
next
edit 21
        set category 88
        set action block
next
edit 22
        set category 90
        set action block
next
edit 23
        set category 91
        set action block
next
edit 24
        set category 96
        set action block
next
edit 25
        set category 98
        set action block
next
edit 26
        set category 99
        set action block
```

```
        next
        edit 27
            set category 1
        next
        edit 28
            set category 3
        next
        edit 29
            set category 4
        next
        edit 30
            set category 5
        next
        edit 31
            set category 6
        next
        edit 32
            set category 12
        next
        edit 33
            set category 59
        next
        edit 34
            set category 62
        next
    end
end
next
edit "monitor-all"
    set comment "Monitor and log all visited URLs, flow-
based."
    config ftgd-wf
        unset options
        config filters
            edit 1
                set category 1
            next
            edit 2
                set category 3
            next
            edit 3
                set category 4
            next
            edit 4
                set category 5
            next
```

```
edit 5
    set category 6
next
edit 6
    set category 12
next
edit 7
    set category 59
next
edit 8
    set category 62
next
edit 9
    set category 83
next
edit 10
    set category 2
next
edit 11
    set category 7
next
edit 12
    set category 8
next
edit 13
    set category 9
next
edit 14
    set category 11
next
edit 15
    set category 13
next
edit 16
    set category 14
next
edit 17
    set category 15
next
edit 18
    set category 16
next
edit 19
    set category 57
next
edit 20
```

```
        set category 63
next
edit 21
        set category 64
next
edit 22
        set category 65
next
edit 23
        set category 66
next
edit 24
        set category 67
next
edit 25
        set category 19
next
edit 26
        set category 24
next
edit 27
        set category 25
next
edit 28
        set category 72
next
edit 29
        set category 75
next
edit 30
        set category 76
next
edit 31
        set category 26
next
edit 32
        set category 61
next
edit 33
        set category 86
next
edit 34
        set category 17
next
edit 35
        set category 18
```



```
next
edit 36
    set category 20
next
edit 37
    set category 23
next
edit 38
    set category 28
next
edit 39
    set category 29
next
edit 40
    set category 30
next
edit 41
    set category 33
next
edit 42
    set category 34
next
edit 43
    set category 35
next
edit 44
    set category 36
next
edit 45
    set category 37
next
edit 46
    set category 38
next
edit 47
    set category 39
next
edit 48
    set category 40
next
edit 49
    set category 42
next
edit 50
    set category 44
next
```

```
edit 51
    set category 46
next
edit 52
    set category 47
next
edit 53
    set category 48
next
edit 54
    set category 54
next
edit 55
    set category 55
next
edit 56
    set category 58
next
edit 57
    set category 68
next
edit 58
    set category 69
next
edit 59
    set category 70
next
edit 60
    set category 71
next
edit 61
    set category 77
next
edit 62
    set category 78
next
edit 63
    set category 79
next
edit 64
    set category 80
next
edit 65
    set category 82
next
edit 66
```

```
        set category 85
next
edit 67
        set category 87
next
edit 68
        set category 31
next
edit 69
        set category 41
next
edit 70
        set category 43
next
edit 71
        set category 49
next
edit 72
        set category 50
next
edit 73
        set category 51
next
edit 74
        set category 52
next
edit 75
        set category 53
next
edit 76
        set category 56
next
edit 77
        set category 81
next
edit 78
        set category 84
next
edit 79
next
edit 80
        set category 88
next
edit 81
        set category 89
next
```

```
        edit 82
            set category 90
        next
        edit 83
            set category 91
        next
        edit 84
            set category 92
        next
        edit 85
            set category 93
        next
        edit 86
            set category 94
        next
        edit 87
            set category 95
        next
        edit 88
            set category 96
        next
        edit 89
            set category 97
        next
        edit 90
            set category 98
        next
        edit 91
            set category 99
        next
        edit 92
            set category 100
        next
        edit 93
            set category 101
        next
    end
end
set log-all-url enable
set web-content-log disable
set web-filter-command-block-log disable
set web-filter-cookie-log disable
set web-url-log disable
set web-invalid-domain-log disable
set web-ftgd-err-log disable
next
```

```
edit "sniffer-profile"
  set comment "Monitor web traffic."
  config ftgd-wf
    config filters
      edit 1
      next
      edit 2
        set category 1
      next
      edit 3
        set category 2
      next
      edit 4
        set category 3
      next
      edit 5
        set category 4
      next
      edit 6
        set category 5
      next
      edit 7
        set category 6
      next
      edit 8
        set category 7
      next
      edit 9
        set category 8
      next
      edit 10
        set category 9
      next
      edit 11
        set category 11
      next
      edit 12
        set category 12
      next
      edit 13
        set category 13
      next
      edit 14
        set category 14
      next
      edit 15
```

```
        set category 15
next
edit 16
        set category 16
next
edit 17
        set category 17
next
edit 18
        set category 18
next
edit 19
        set category 19
next
edit 20
        set category 20
next
edit 21
        set category 23
next
edit 22
        set category 24
next
edit 23
        set category 25
next
edit 24
        set category 26
next
edit 25
        set category 28
next
edit 26
        set category 29
next
edit 27
        set category 30
next
edit 28
        set category 31
next
edit 29
        set category 33
next
edit 30
        set category 34
```

```
next
edit 31
    set category 35
next
edit 32
    set category 36
next
edit 33
    set category 37
next
edit 34
    set category 38
next
edit 35
    set category 39
next
edit 36
    set category 40
next
edit 37
    set category 41
next
edit 38
    set category 42
next
edit 39
    set category 43
next
edit 40
    set category 44
next
edit 41
    set category 46
next
edit 42
    set category 47
next
edit 43
    set category 48
next
edit 44
    set category 49
next
edit 45
    set category 50
next
```

```
edit 46
    set category 51
next
edit 47
    set category 52
next
edit 48
    set category 53
next
edit 49
    set category 54
next
edit 50
    set category 55
next
edit 51
    set category 56
next
edit 52
    set category 57
next
edit 53
    set category 58
next
edit 54
    set category 59
next
edit 55
    set category 61
next
edit 56
    set category 62
next
edit 57
    set category 63
next
edit 58
    set category 64
next
edit 59
    set category 65
next
edit 60
    set category 66
next
edit 61
```



```
        set category 67
next
edit 62
        set category 68
next
edit 63
        set category 69
next
edit 64
        set category 70
next
edit 65
        set category 71
next
edit 66
        set category 72
next
edit 67
        set category 75
next
edit 68
        set category 76
next
edit 69
        set category 77
next
edit 70
        set category 78
next
edit 71
        set category 79
next
edit 72
        set category 80
next
edit 73
        set category 81
next
edit 74
        set category 82
next
edit 75
        set category 83
next
edit 76
        set category 84
```

```
next
edit 77
    set category 85
next
edit 78
    set category 86
next
edit 79
    set category 87
next
edit 80
    set category 88
next
edit 81
    set category 89
next
edit 82
    set category 90
next
edit 83
    set category 91
next
edit 84
    set category 92
next
edit 85
    set category 93
next
edit 86
    set category 94
next
edit 87
    set category 95
next
edit 88
    set category 96
next
edit 89
    set category 97
next
edit 90
    set category 98
next
edit 91
    set category 99
next
```

```
        edit 92
            set category 100
        next
        edit 93
            set category 101
        next
    end
end
next
edit "wifi-default"
    set comment "Default configuration for offloading WiFi
traffic."
    set options block-invalid-url
    config ftgd-wf
    unset options
    config filters
        edit 1
            set action block
        next
        edit 2
            set category 2
            set action block
        next
        edit 3
            set category 7
            set action block
        next
        edit 4
            set category 8
            set action block
        next
        edit 5
            set category 9
            set action block
        next
        edit 6
            set category 11
            set action block
        next
        edit 7
            set category 13
            set action block
        next
        edit 8
            set category 14
            set action block
```

```
next
edit 9
    set category 15
    set action block
next
edit 10
    set category 16
    set action block
next
edit 11
    set category 26
    set action block
next
edit 12
    set category 57
    set action block
next
edit 13
    set category 61
    set action block
next
edit 14
    set category 63
    set action block
next
edit 15
    set category 64
    set action block
next
edit 16
    set category 65
    set action block
next
edit 17
    set category 66
    set action block
next
edit 18
    set category 67
    set action block
next
edit 19
    set category 83
    set action block
next
edit 20
```

```
        set category 86
        set action block
next
edit 21
        set category 88
        set action block
next
edit 22
        set category 90
        set action block
next
edit 23
        set category 91
        set action block
next
edit 24
        set category 96
        set action block
next
edit 25
        set category 98
        set action block
next
edit 26
        set category 99
        set action block
next
edit 27
        set category 1
next
edit 28
        set category 3
next
edit 29
        set category 4
next
edit 30
        set category 5
next
edit 31
        set category 6
next
edit 32
        set category 12
next
edit 33
```

```

        set category 59
    next
    edit 34
        set category 62
    next
end
end
next
end
config webfilter search-engine
    edit "google"
        set hostname ".*\\.google\\.\\.*"
        set url
        "^\\/(custom|search|images|videosearch|webhp)\\/?)"
        set query "q="
        set safesearch url
        set safesearch-str "&safe=active"
    next
    edit "yahoo"
        set hostname ".*\\.yahoo\\.\\.*"
        set url "^\\/search(\\/video|\\/images){0,1}(\\/?|;)"
        set query "p="
        set safesearch url
        set safesearch-str "&vm=r"
    next
    edit "bing"
        set hostname ".*\\.bing\\.\\.*"
        set url
        "^((\\/images|\\/videos)?(\\/search|\\/async|\\/asynv2)\\/?)"
        set query "q="
        set safesearch header
    next
    edit "yandex"
        set hostname "yandex\\.\\.*"
        set url
        "^\\/(yand|images|video|search|search\\/)\\/?)"
        set query "text="
        set safesearch url
        set safesearch-str "&family=yes"
    next
    edit "youtube"
        set hostname ".*youtube.*"
        set safesearch header
    next
    edit "baidu"
        set hostname ".*\\.baidu\\.com"

```

```
        set url "^\\s?\\?"
        set query "wd="
next
edit "baidu2"
    set hostname ".*\\.baidu\\.com"
    set url "^\\/(ns|q|m|i|v)\\?"
    set query "word="
next
edit "baidu3"
    set hostname "tieba\\.baidu\\.com"
    set url "^\\/f\\?"
    set query "kw="
next
edit "vimeo"
    set hostname ".*vimeo.*"
    set url "^\\/search\\?"
    set query "q="
    set safesearch header
next
edit "yt-scan-1"
    set url "www.youtube.com/user/"
    set safesearch yt-scan
next
edit "yt-scan-2"
    set url "www.youtube.com/youtubei/v1/browse"
    set safesearch yt-scan
next
edit "yt-scan-3"
    set url "www.youtube.com/youtubei/v1/player"
    set safesearch yt-scan
next
edit "yt-scan-4"
    set url "www.youtube.com/youtubei/v1/navigator"
    set safesearch yt-scan
next
edit "yt-channel"
    set url "www.youtube.com/channel/"
    set safesearch yt-channel
next
edit "yt-pattern"
    set url "youtube.com/channel/"
    set safesearch yt-pattern
next
edit "twitter"
    set hostname "twitter\\.com"
    set url "^\\/i\\/api\\/graphql\\/.*\\/UserByScreenName"
```

```

        set query "variables="
        set safesearch translate
        set safesearch-str "regex::%22screen_name%22:%22([A-Za-
z0-9_]{4,15})%22::twitter.com/\\1"
    next
    edit "google-translate-1"
        set hostname "translate\\.google\\.\\.*"
        set url "^\\//translate"
        set query "u="
        set safesearch translate
        set safesearch-str "regex::(?:\\.|&)u=([^&]+)::\\1"
    next
    edit "google-translate-2"
        set hostname ".*\\.translate\\.\\.goog"
        set url "^\\//"
        set safesearch translate
        set safesearch-str "case::google-translate"
    next
end
config emailfilter profile
    edit "sniffer-profile"
        set comment "Malware and phishing URL monitoring."
        config imap
        end
        config pop3
        end
        config smtp
        end
    next
    edit "default"
        set comment "Malware and phishing URL filtering."
        config imap
        end
        config pop3
        end
        config smtp
        end
    next
end
config virtual-patch profile
    edit "default"
    next
end
config log memory setting
    set status enable
end

```



```

config log null-device setting
    set status disable
end
config firewall schedule recurring
    edit "always"
        set uuid bb4d4468-27b7-51f1-c868-3fb45d384303
        set day sunday monday tuesday wednesday thursday friday
saturday
    next
    edit "none"
        set uuid bb4d7302-27b7-51f1-4cb8-faf55cc4de31
    next
    edit "default-darrp-optimize"
        set uuid bb4d7f1e-27b7-51f1-82de-f2aa50712758
        set start 01:00
        set end 01:30
        set day sunday monday tuesday wednesday thursday friday
saturday
    next
end
config firewall ssh local-key
    edit "Fortinet_SSH_RSA2048"
        set password ENC
AAAASMXDOG6E9B8rSnGn3MElCqNjrpGxSoQq5xH1dQf9m6VzlrtpzBmp/zAE8UNih
ihooq2Zo1tsM4iDVWE3KwKK462VY8UA91VHRwH5sjpuamfQge67813pqwNKQBn950
XRC1DF7EnK+xjHasSGGx+315emc+g5eiNtSfB8j3aDpI32oIkb3qg/AzxiUHQrPBz
FK1lmMjY3dkVA
        set source built-in
    next
    edit "Fortinet_SSH_DSA1024"
        set password ENC
AAAASCf3DHpcYcplJRL4Go/F2J8YdoSeHfRhxedj4bfi0fY4WNpMfXBzUWdNwII//
9DJbH1afy6stofhnU554GxQBILX8KNRtRBhfvoEBxGcGl/S8dZ2NNClnyJ2jsHYfm
mDYCLDK7rXdy0GhfMhJVsQ50daBBQyKBUMVhnOYdvhV0avj2djSuGlkNP/LSN6D6Y
MW1lmMjY3dkVA
        set source built-in
    next
    edit "Fortinet_SSH_ECDSA256"
        set password ENC
AAAASOD3LiSiC4BqkmwEScXCwvexlpRGurGMX/Fyz8R3xjo0bbuM0z52BAk99N4/7
V8hPTlfmZjgnhaSTR2XOVCw17kPm4lv/PJCtXk/FHuqnFYJAGs9cqr7t4yNyg6Kyb
5hY2DThd6g1vtKH/IOGya9vQnmc8LZvehIrf4DKMMBLmcxGPnsu0tGT3TqQeSj1J
Wf1lmMjY3dkVA
        set source built-in
    next
    edit "Fortinet_SSH_ECDSA384"

```

```

        set password ENC
AAAASMN/RLyT17ZVHqVP76lquIX25RxV5yYiHlDnB89I8XCgQW0Nv0/7RIYu/HnSC
czkmH/y/KspqwqRlctIy/RmXsgQ7DsUlyZNdQE1WIcQ1LdUsLoTix7oTr2zNQro4j
mUuxt6qjW7IeGIJtnEYnQAC4UjF07oTbLXSZAX6d4h0CwigFK1M0aoWnyrBmYrQD9
rEllmMjY3dkVA
        set source built-in
    next
    edit "Fortinet_SSH_ECDSA521"
        set password ENC
AAAASM0raAKmD27s0Trj+B+Myu+2zkdFQ1CnrsCD2LTrPIDSGuWHrSvo7LMPdS5+g
xZybKfRLh9ioeoxfowkq4trPg0Y/pRgsUVa4D4d97/yM6jHP0dIq/25VF1cwA/ydh
4i4J4w4fvc6s8RZdXfRdmv87omDGGYi8d0KXXyxQq136CE87XOE1L4bh4DaiQuiiff
2DF1mMjY3dkVA
        set source built-in
    next
    edit "Fortinet_SSH_ED25519"
        set password ENC
LCaj8JvJlp6zi/5yFqx0HEBbjbSda949P8kfvtcSDk20fall54GNiDJV/K3Bvc2zG
N0vDpCuD7WT2Zb0+H4RTP+jkEZbd+3p4F/1xVKGhz6cK8pmMFAc1LutEyUBEMgwxP
7I73gIgXjdVryJ4nPnelq+/zewjz6KuT9Qo+liuKLVli/gWLKRsu18lKcQSt2aawf
bBF1mMjY3dkVA
        set source built-in
    next
end
config firewall ssh local-ca
    edit "Fortinet_SSH_CA"
        set password ENC
AAAASIptnDM5fVfDW2/E8AsiHJd+tQcmQZNG0BvHoJCurDLEpaBW0S8X8zKqEgGx0
XN9GnsVOqcrth2ojifKmXHX1EWlg3A4rFBaX0xlD319iig7mFGKQ44LYYYkqewer1
r6wFle1F+uuwC9RBYmwVf04sb3oa/eyNn3U7a14HF9rDQjt0I7FAUleC0rv9tqWAg
oK11mMjY3dkVA
        set source built-in
    next
    edit "Fortinet_SSH_CA_Untrusted"
        set password ENC
AAAASCWSjdGNDg9/uOyH+nRyCLCkb0v1H1kvW2fdanXd30a+ApX7UKLiIDhVoyehW
/st47WoVautfD0Ua1ov0ynTzw+3Awdhxm3GIz4LQX43p6kKxUnbDYpiwAut+GACKR
saRya8niBa5SmaFtzdLNmytSjDVMjJCUASQF9uWjleYsLLS/fjwLaxVofntdr3T7f
PKF1mMjY3dkVA
        set source built-in
    next
end
config firewall ssh setting
    set caname "Fortinet_SSH_CA"
    set untrusted-caname "Fortinet_SSH_CA_Untrusted"
    set hostkey-rsa2048 "Fortinet_SSH_RSA2048"

```

```
    set hostkey-dsa1024 "Fortinet_SSH_DSA1024"
    set hostkey-ecdsa256 "Fortinet_SSH_ECDSA256"
    set hostkey-ecdsa384 "Fortinet_SSH_ECDSA384"
    set hostkey-ecdsa521 "Fortinet_SSH_ECDSA521"
    set hostkey-ed25519 "Fortinet_SSH_ED25519"
end
config firewall profile-protocol-options
    edit "default"
        set comment "All default services."
        config http
            set ports 80
            unset options
            unset post-lang
        end
        config ftp
            set ports 21
            set options splice
        end
        config imap
            set ports 143
            set options fragmail
        end
        config pop3
            set ports 110
            set options fragmail
        end
        config smtp
            set ports 25
            set options fragmail splice
        end
        config nntp
            set ports 119
            set options splice
        end
        config dns
            set ports 53
        end
        config cifs
            set ports 445
            unset options
        end
    next
end
config firewall ssl-ssh-profile
    edit "deep-inspection"
        set comment "Read-only deep inspection profile."
```

```
config https
    set ports 443
    set status deep-inspection
end
config ftps
    set ports 990
    set status deep-inspection
end
config imaps
    set ports 993
    set status deep-inspection
end
config pop3s
    set ports 995
    set status deep-inspection
end
config smtps
    set ports 465
    set status deep-inspection
end
config dot
    set status disable
end
config ssl-exempt
    edit 1
        set fortiguard-category 31
    next
    edit 2
        set fortiguard-category 33
    next
    edit 3
        set type wildcard-fqdn
        set wildcard-fqdn "adobe"
    next
    edit 4
        set type wildcard-fqdn
        set wildcard-fqdn "Adobe Login"
    next
    edit 5
        set type wildcard-fqdn
        set wildcard-fqdn "android"
    next
    edit 6
        set type wildcard-fqdn
        set wildcard-fqdn "apple"
    next
```

```
edit 7
    set type wildcard-fqdn
    set wildcard-fqdn "appstore"
next
edit 8
    set type wildcard-fqdn
    set wildcard-fqdn "auth.gfx.ms"
next
edit 9
    set type wildcard-fqdn
    set wildcard-fqdn "citrix"
next
edit 10
    set type wildcard-fqdn
    set wildcard-fqdn "dropbox.com"
next
edit 11
    set type wildcard-fqdn
    set wildcard-fqdn "ease"
next
edit 12
    set type wildcard-fqdn
    set wildcard-fqdn "firefox update server"
next
edit 13
    set type wildcard-fqdn
    set wildcard-fqdn "fortinet"
next
edit 14
    set type wildcard-fqdn
    set wildcard-fqdn "googleapis.com"
next
edit 15
    set type wildcard-fqdn
    set wildcard-fqdn "google-drive"
next
edit 16
    set type wildcard-fqdn
    set wildcard-fqdn "google-play2"
next
edit 17
    set type wildcard-fqdn
    set wildcard-fqdn "google-play3"
next
edit 18
    set type wildcard-fqdn
```

```
        set wildcard-fqdn "Gotomeeting"
next
edit 19
    set type wildcard-fqdn
    set wildcard-fqdn "icloud"
next
edit 20
    set type wildcard-fqdn
    set wildcard-fqdn "itunes"
next
edit 21
    set type wildcard-fqdn
    set wildcard-fqdn "microsoft"
next
edit 22
    set type wildcard-fqdn
    set wildcard-fqdn "skype"
next
edit 23
    set type wildcard-fqdn
    set wildcard-fqdn "softwareupdate.vmware.com"
next
edit 24
    set type wildcard-fqdn
    set wildcard-fqdn "verisign"
next
edit 25
    set type wildcard-fqdn
    set wildcard-fqdn "Windows update 2"
next
edit 26
    set type wildcard-fqdn
    set wildcard-fqdn "live.com"
next
edit 27
    set type wildcard-fqdn
    set wildcard-fqdn "google-play"
next
edit 28
    set type wildcard-fqdn
    set wildcard-fqdn "update.microsoft.com"
next
edit 29
    set type wildcard-fqdn
    set wildcard-fqdn "swscan.apple.com"
next
```

```

        edit 30
            set type wildcard-fqdn
            set wildcard-fqdn "autoupdate.opera.com"
        next
        edit 31
            set type wildcard-fqdn
            set wildcard-fqdn "cdn-apple"
        next
        edit 32
            set type wildcard-fqdn
            set wildcard-fqdn "mzstatic-apple"
        next
    end
next
edit "custom-deep-inspection"
    set comment "Customizable deep inspection profile."
    config https
        set ports 443
        set status deep-inspection
    end
    config ftps
        set ports 990
        set status deep-inspection
    end
    config imaps
        set ports 993
        set status deep-inspection
    end
    config pop3s
        set ports 995
        set status deep-inspection
    end
    config smtps
        set ports 465
        set status deep-inspection
    end
    config dot
        set status disable
    end
    config ssl-exempt
        edit 1
            set fortiguard-category 31
        next
        edit 2
            set fortiguard-category 33
        next
    end
end

```

```
edit 3
    set type wildcard-fqdn
    set wildcard-fqdn "adobe"
next
edit 4
    set type wildcard-fqdn
    set wildcard-fqdn "Adobe Login"
next
edit 5
    set type wildcard-fqdn
    set wildcard-fqdn "android"
next
edit 6
    set type wildcard-fqdn
    set wildcard-fqdn "apple"
next
edit 7
    set type wildcard-fqdn
    set wildcard-fqdn "appstore"
next
edit 8
    set type wildcard-fqdn
    set wildcard-fqdn "auth.gfx.ms"
next
edit 9
    set type wildcard-fqdn
    set wildcard-fqdn "citrix"
next
edit 10
    set type wildcard-fqdn
    set wildcard-fqdn "dropbox.com"
next
edit 11
    set type wildcard-fqdn
    set wildcard-fqdn "ease"
next
edit 12
    set type wildcard-fqdn
    set wildcard-fqdn "firefox update server"
next
edit 13
    set type wildcard-fqdn
    set wildcard-fqdn "fortinet"
next
edit 14
    set type wildcard-fqdn
```



```
        set wildcard-fqdn "googleapis.com"
next
edit 15
    set type wildcard-fqdn
    set wildcard-fqdn "google-drive"
next
edit 16
    set type wildcard-fqdn
    set wildcard-fqdn "google-play2"
next
edit 17
    set type wildcard-fqdn
    set wildcard-fqdn "google-play3"
next
edit 18
    set type wildcard-fqdn
    set wildcard-fqdn "Gotomeeting"
next
edit 19
    set type wildcard-fqdn
    set wildcard-fqdn "icloud"
next
edit 20
    set type wildcard-fqdn
    set wildcard-fqdn "itunes"
next
edit 21
    set type wildcard-fqdn
    set wildcard-fqdn "microsoft"
next
edit 22
    set type wildcard-fqdn
    set wildcard-fqdn "skype"
next
edit 23
    set type wildcard-fqdn
    set wildcard-fqdn "softwareupdate.vmware.com"
next
edit 24
    set type wildcard-fqdn
    set wildcard-fqdn "verisign"
next
edit 25
    set type wildcard-fqdn
    set wildcard-fqdn "Windows update 2"
next
```

```

        edit 26
            set type wildcard-fqdn
            set wildcard-fqdn "live.com"
        next
        edit 27
            set type wildcard-fqdn
            set wildcard-fqdn "google-play"
        next
        edit 28
            set type wildcard-fqdn
            set wildcard-fqdn "update.microsoft.com"
        next
        edit 29
            set type wildcard-fqdn
            set wildcard-fqdn "swscan.apple.com"
        next
        edit 30
            set type wildcard-fqdn
            set wildcard-fqdn "autoupdate.opera.com"
        next
        edit 31
            set type wildcard-fqdn
            set wildcard-fqdn "cdn-apple"
        next
        edit 32
            set type wildcard-fqdn
            set wildcard-fqdn "mzstatic-apple"
        next
    end
next
edit "no-inspection"
    set comment "Read-only profile that does no inspection."
    config https
        set status disable
    end
    config ftps
        set status disable
    end
    config imaps
        set status disable
    end
    config pop3s
        set status disable
    end
    config smtps
        set status disable

```

```

        end
        config dot
            set status disable
        end
    next
    edit "certificate-inspection"
        set comment "Read-only SSL handshake inspection profile."
        config https
            set ports 443
            set status certificate-inspection
        end
        config ftps
            set status disable
        end
        config imaps
            set status disable
        end
        config pop3s
            set status disable
        end
        config smtps
            set status disable
        end
        config dot
            set status disable
        end
    next
end
config firewall policy
    edit 1
        set uuid bbfa1e36-27b7-51f1-f9e2-4938dce8cb34
        set srcintf "lan"
        set dstintf "wan"
        set action accept
        set srcaddr "all"
        set dstaddr "all"
        set schedule "always"
        set service "ALL"
        set nat enable
    next
    edit 2
        set name "Hermes-2.4GHz to Internet"
        set uuid 7db116d4-2ec9-51f1-4361-811cb3326d0e
        set srcintf "Vlan24"
        set dstintf "wan"
        set action accept

```

```
        set srcaddr "Vlan24 address"
        set dstaddr "all"
        set schedule "always"
        set service "ALL"
        set nat enable
    next
    edit 3
        set name "Hermes-5GHz to Internet"
        set uuid 12784748-2f91-51f1-3812-1b1ff087bd9b
        set srcintf "Vlan50"
        set dstintf "wan"
        set action accept
        set srcaddr "Vlan50 address"
        set dstaddr "all"
        set schedule "always"
        set service "ALL"
        set nat enable
    next
    edit 4
        set status disable
        set name "TEMP server to internet"
        set uuid e33f7254-3836-51f1-03ae-d78aba277677
        set srcintf "Server lan"
        set dstintf "wan"
        set action accept
        set srcaddr "Server lan address"
        set dstaddr "all"
        set schedule "always"
        set service "ALL"
        set nat enable
    next
    edit 5
        set name "Management to Server"
        set uuid b1213a3e-3a96-51f1-b2e1-2610b5c7b4ff
        set srcintf "lan1"
        set dstintf "Server lan"
        set action accept
        set srcaddr "Management Address"
        set dstaddr "Server lan address"
        set schedule "always"
        set service "ALL"
    next
    edit 6
        set name "Hermes-5GHz-Enterprise to Internet"
        set uuid ed1a5e22-3f4a-51f1-90ee-893a6ae46910
        set srcintf "Vlan51"
```

```

        set dstintf "wan"
        set action accept
        set srcaddr "Vlan51 address"
        set dstaddr "all"
        set schedule "always"
        set service "ALL"
        set nat enable
    next
end
config firewall local-in-policy
    edit 1
        set uuid bb863142-27b7-51f1-350d-4983211feebb
        set intf "any"
        set dstaddr "all"
        set internet-service-src enable
        set internet-service-src-name "Malicious-
Malicious.Server" "Tor-Exit.Node" "Tor-Relay.Node"
        set service "ALL"
        set schedule "always"
    next
end
config switch-controller security-policy 802-1X
    edit "802-1X-policy-default"
        set user-group "SSO_Guest_Users"
    next
end
config switch-controller security-policy local-access
    edit "default"
        set mgmt-allowaccess https ping ssh
        set internal-allowaccess https ping ssh
    next
end
config switch-controller lldp-profile
    edit "default"
        set med-tlvs inventory-management network-policy
location-identification
        set auto-isl disable
        config med-network-policy
            edit "voice"
            next
            edit "voice-signaling"
            next
            edit "guest-voice"
            next
            edit "guest-voice-signaling"
            next
        next
    next
end

```

```

        edit "softphone-voice"
        next
        edit "video-conferencing"
        next
        edit "streaming-video"
        next
        edit "video-signaling"
        next
    end
    config med-location-service
        edit "coordinates"
        next
        edit "address-civic"
        next
        edit "elin-number"
        next
    end
next
edit "default-auto-isl"
next
edit "default-auto-mclag-icl"
    set auto-mclag-icl enable
next
end
config switch-controller qos dot1p-map
    edit "voice-dot1p"
        set priority-0 queue-4
        set priority-1 queue-4
        set priority-2 queue-3
        set priority-3 queue-2
        set priority-4 queue-3
        set priority-5 queue-1
        set priority-6 queue-2
        set priority-7 queue-2
    next
end
config switch-controller qos ip-dscp-map
    edit "voice-dscp"
        config map
            edit "1"
                set cos-queue 1
                set value 46
            next
            edit "2"
                set cos-queue 2
                set value 24,26,48,56

```

```

        next
        edit "5"
            set cos-queue 3
            set value 34
        next
    end
next
end
config switch-controller qos queue-policy
    edit "default"
        set schedule round-robin
        set rate-by kbps
        config cos-queue
            edit "queue-0"
            next
            edit "queue-1"
            next
            edit "queue-2"
            next
            edit "queue-3"
            next
            edit "queue-4"
            next
            edit "queue-5"
            next
            edit "queue-6"
            next
            edit "queue-7"
            next
        end
    next
    edit "voice-egress"
        set schedule weighted
        set rate-by kbps
        config cos-queue
            edit "queue-0"
            next
            edit "queue-1"
                set weight 0
            next
            edit "queue-2"
                set weight 6
            next
            edit "queue-3"
                set weight 37
            next
        end
    end
end

```

```

        edit "queue-4"
            set weight 12
        next
        edit "queue-5"
        next
        edit "queue-6"
        next
        edit "queue-7"
        next
    end
next
end
config switch-controller qos qos-policy
    edit "default"
    next
    edit "voice-qos"
        set trust-dot1p-map "voice-dot1p"
        set trust-ip-dscp-map "voice-dscp"
        set queue-policy "voice-egress"
    next
end
config switch-controller storm-control-policy
    edit "default"
        set description "default storm control on all port"
    next
    edit "auto-config"
        set description "storm control policy for fortalink-is1-
ic1 port"
        set storm-control-mode disabled
    next
end
config switch-controller auto-config policy
    edit "pse"
    next
    edit "default"
    next
    edit "default-ic1"
        set poe-status disable
        set igmp-flood-report enable
        set igmp-flood-traffic enable
    next
end
config switch-controller initial-config template
    edit "_default"
        set vlanid 1
    next

```



```
    edit "quarantine"
        set vlanid 4093
        set dhcp-server enable
    next
    edit "rspan"
        set vlanid 4092
        set dhcp-server enable
    next
    edit "voice"
        set vlanid 4091
    next
    edit "video"
        set vlanid 4090
    next
    edit "onboarding"
        set vlanid 4089
    next
    edit "nac_segment"
        set vlanid 4088
        set dhcp-server enable
    next
end
config switch-controller switch-profile
    edit "default"
    next
end
config switch-controller ptp profile
    edit "default"
    next
end
config switch-controller ptp interface-policy
    edit "default"
    next
end
config switch-controller remote-log
    edit "syslogd"
    next
    edit "syslogd2"
    next
end
config wireless-controller setting
    set darrp-optimize-schedules "default-darrp-optimize"
end
config wireless-controller arrp-profile
    edit "arrp-default"
    next
```

```
end
config wireless-controller wids-profile
  edit "default"
    set comment "Default WIDS profile."
    set ap-scan enable
    set wireless-bridge enable
    set deauth-broadcast enable
    set null-ssid-probe-resp enable
    set long-duration-attack enable
    set invalid-mac-oui enable
    set weak-wep-iv enable
    set auth-frame-flood enable
    set assoc-frame-flood enable
    set spoofed-deauth enable
    set asleep-attack enable
    set eapol-start-flood enable
    set eapol-logoff-flood enable
    set eapol-succ-flood enable
    set eapol-fail-flood enable
    set eapol-pre-succ-flood enable
    set eapol-pre-fail-flood enable
  next
  edit "default-wids-apscan-enabled"
    set ap-scan enable
  next
end
config wireless-controller ble-profile
  edit "fortiap-discovery"
    set advertising ibeacon eddystone-uid eddystone-url
    set ibeacon-uuid "wtp-uuid"
  next
end
config wireless-controller wtp-profile
  edit "FAP421E-default"
    config platform
      set type 421E
    end
    config lan
    end
    set handoff-sta-thresh 55
    config radio-1
      set band 802.11g 802.11n-2G
      set darrp enable
      set arrp-profile "arrp-default"
      set vap-all bridge
      set vap1 "Hermes-2.4GHz"
```

```

        set vap2 "Hermes-5GHz"
        set vap3 "5GHz-Enterprise"
        set channel "1" "6" "11"
    end
    config radio-2
        set band 802.11a 802.11n-5G 802.11ac-5G
        set channel-bonding 40MHz
        set darrp enable
        set arrp-profile "arrp-default"
        set vap-all bridge
        set vap1 "Hermes-2.4GHz"
        set vap2 "Hermes-5GHz"
        set vap3 "5GHz-Enterprise"
    end
next
end
config wireless-controller wtp
    edit "FP421E3X17006273"
        set uuid 80919728-2ec1-51f1-0c1d-3a07ad20379c
        set admin enable
        set wtp-profile "FAP421E-default"
        set wtp-mode remote
        config radio-1
        end
        config radio-2
        end
    next
end
config router rip
    config redistribute "connected"
    end
    config redistribute "static"
    end
    config redistribute "ospf"
    end
    config redistribute "bgp"
    end
    config redistribute "isis"
    end
end
config router ripng
    config redistribute "connected"
    end
    config redistribute "static"
    end
    config redistribute "ospf"

```

```
        end
        config redistribute "bgp"
        end
        config redistribute "isis"
        end
    end
    config router ospf
        config redistribute "connected"
        end
        config redistribute "static"
        end
        config redistribute "rip"
        end
        config redistribute "bgp"
        end
        config redistribute "isis"
        end
    end
    config router ospf6
        config redistribute "connected"
        end
        config redistribute "static"
        end
        config redistribute "rip"
        end
        config redistribute "bgp"
        end
        config redistribute "isis"
        end
    end
    config router bgp
        config redistribute "connected"
        end
        config redistribute "rip"
        end
        config redistribute "ospf"
        end
        config redistribute "static"
        end
        config redistribute "isis"
        end
        config redistribute6 "connected"
        end
        config redistribute6 "rip"
        end
        config redistribute6 "ospf"
```

```

        end
        config redistribute6 "static"
        end
        config redistribute6 "isis"
        end
    end
    config router isis
        config redistribute "connected"
        end
        config redistribute "rip"
        end
        config redistribute "ospf"
        end
        config redistribute "bgp"
        end
        config redistribute "static"
        end
        config redistribute6 "connected"
        end
        config redistribute6 "rip"
        end
        config redistribute6 "ospf"
        end
        config redistribute6 "bgp"
        end
        config redistribute6 "static"
        end
    end
    config router multicast
    end

```

LAN Switch Configuration

```

!
hostname LANSwitch
!
!
!
!
interface FastEthernet0/1
    switchport access vlan 5
    switchport mode access
!
interface FastEthernet0/2
    switchport access vlan 5
    switchport mode access

```

```
!  
interface FastEthernet0/3  
    switchport access vlan 5  
    switchport mode access  
!  
interface FastEthernet0/4  
    switchport access vlan 5  
    switchport mode access  
!  
interface FastEthernet0/5  
    switchport access vlan 5  
    switchport mode access  
!  
interface FastEthernet0/6  
    switchport access vlan 5  
    switchport mode access  
!  
interface FastEthernet0/7  
    switchport access vlan 5  
    switchport mode access  
!  
interface FastEthernet0/8  
    switchport access vlan 5  
    switchport mode access  
!  
interface FastEthernet0/9  
    switchport access vlan 5  
    switchport mode access  
!  
interface FastEthernet0/10  
    switchport access vlan 5  
    switchport mode access  
!  
interface FastEthernet0/11  
    switchport access vlan 5  
    switchport mode access  
!  
interface FastEthernet0/12  
    switchport access vlan 5  
    switchport mode access  
!  
interface FastEthernet0/13  
    switchport access vlan 5  
    switchport mode access  
!  
interface FastEthernet0/14
```

```
    switchport access vlan 5
    switchport mode access
!
interface FastEthernet0/15
    switchport access vlan 5
    switchport mode access
!
interface FastEthernet0/16
    switchport access vlan 5
    switchport mode access
!
interface FastEthernet0/17
    switchport trunk encapsulation dot1q
    switchport trunk native vlan 100
    switchport trunk allowed vlan 24,50,51,99,100
    switchport mode trunk
!
interface FastEthernet0/18
    switchport trunk encapsulation dot1q
    switchport trunk native vlan 100
    switchport trunk allowed vlan 24,50,51,99,100
    switchport mode trunk
!
interface FastEthernet0/19
    switchport access vlan 4
    switchport mode access
    shutdown
!
interface FastEthernet0/20
    switchport access vlan 4
    switchport mode access
    shutdown
!
interface FastEthernet0/21
    switchport access vlan 4
    switchport mode access
    shutdown
!
interface FastEthernet0/22
    switchport access vlan 4
    switchport mode access
    shutdown
!
interface FastEthernet0/23
    switchport access vlan 4
    switchport mode access
```

```
shutdown
!
interface FastEthernet0/24
switchport access vlan 4
switchport mode access
shutdown
!
interface FastEthernet0/25
switchport access vlan 4
switchport mode access
shutdown
!
interface FastEthernet0/26
switchport access vlan 4
switchport mode access
shutdown
!
interface FastEthernet0/27
switchport access vlan 4
switchport mode access
shutdown
!
interface FastEthernet0/28
switchport access vlan 4
switchport mode access
shutdown
!
interface FastEthernet0/29
switchport access vlan 4
switchport mode access
shutdown
!
interface FastEthernet0/30
switchport access vlan 4
switchport mode access
shutdown
!
interface FastEthernet0/31
switchport access vlan 4
switchport mode access
shutdown
!
interface FastEthernet0/32
switchport access vlan 4
switchport mode access
shutdown
```



```
!  
interface FastEthernet0/33  
  switchport access vlan 4  
  switchport mode access  
  shutdown  
!  
interface FastEthernet0/34  
  switchport access vlan 4  
  switchport mode access  
  shutdown  
!  
interface FastEthernet0/35  
  switchport access vlan 4  
  switchport mode access  
  shutdown  
!  
interface FastEthernet0/36  
  switchport access vlan 4  
  switchport mode access  
  shutdown  
!  
interface FastEthernet0/37  
  switchport access vlan 4  
  switchport mode access  
  shutdown  
!  
interface FastEthernet0/38  
  switchport access vlan 4  
  switchport mode access  
  shutdown  
!  
interface FastEthernet0/39  
  switchport access vlan 4  
  switchport mode access  
  shutdown  
!  
interface FastEthernet0/40  
  switchport access vlan 4  
  switchport mode access  
  shutdown  
!  
interface FastEthernet0/41  
  switchport access vlan 4  
  switchport mode access  
  shutdown  
!
```

```
interface FastEthernet0/42
  switchport access vlan 4
  switchport mode access
  shutdown
!
interface FastEthernet0/43
  switchport access vlan 4
  switchport mode access
  shutdown
!
interface FastEthernet0/44
  switchport access vlan 4
  switchport mode access
  shutdown
!
interface FastEthernet0/45
  switchport access vlan 4
  switchport mode access
  shutdown
!
interface FastEthernet0/46
  switchport access vlan 4
  switchport mode access
  shutdown
!
interface FastEthernet0/47
  switchport access vlan 4
  switchport mode access
  shutdown
!
interface FastEthernet0/48
  switchport access vlan 4
  switchport mode access
  shutdown
!
interface GigabitEthernet0/1
  switchport access vlan 4
  switchport mode access
  shutdown
!
interface GigabitEthernet0/2
  switchport access vlan 4
  switchport mode access
  shutdown
!
interface GigabitEthernet0/3
```

```

    switchport access vlan 4
    switchport mode access
    shutdown
!
interface GigabitEthernet0/4
    switchport access vlan 4
    switchport mode access
    shutdown
!
!
vlan 4
    name Parking
vlan 5
    name LAN
vlan 24
    name 2.4GHz
vlan 50
    name 5GHz
vlan 51
    name 5GHz-Enterprise
vlan 99
    name Management
vlan 100
    name native
!
end

```

RADIUS Server Configs

clients.conf

```

## clients.conf -- client configuration directives
##
##      $Id: 5f39ff120a44e3fb837d1893d54a7ebb31fd8749 $

#####
#####
#
# Define RADIUS clients (usually a NAS, Access Point, etc.).

#
# There are a number of security practices which are critical in
the
# modern era.
#
# * don't use RADIUS/UDP or RADIUS/TCP over the Internet. Use
RADIUS/TLS.

```

```
#
# * If you do send RADIUS over UDP or TCP, don't send MS-CHAPv2.
#   Anyone who can see the MS-CHAPv2 data can crack it in
# milliseconds.
#
# * use the "radsecret" program to generate secrets. It uses
# Perl (sorry).
#   Every time you run it, it will generate a new strong secret.
#
# * don't create shared secrets yourself. Anything you create
# is likely to
#   be in a "cracking" dictionary, and will allow a hobbyist
# attacker
#   to crack the shared secret in a few minutes.
#
# * Don't trust anyone who tells you to ignore the above
# recommendations.
#
```

```
client fortigate {
    ipaddr = 10.0.254.1
    secret = securesecret
    proto = *
}
```

logind.conf

```
# This file is part of systemd.
#
# systemd is free software; you can redistribute it and/or
# modify it under the
# terms of the GNU Lesser General Public License as published by
# the Free
# Software Foundation; either version 2.1 of the License, or (at
# your option)
# any later version.
#
# Entries in this file show the compile time defaults. Local
# configuration
# should be created by either modifying this file (or a copy of
# it placed in
# /etc/ if the original file is shipped in /usr/), or by creating
# "drop-ins" in
# the /etc/systemd/logind.conf.d/ directory. The latter is
# generally
# recommended. Defaults can be restored by simply deleting the
# main
```

```
# configuration file and all drop-ins located in /etc/.
#
# Use 'systemd-analyze cat-config systemd/logind.conf' to display
the full config.
#
# See logind.conf(5) for details.
```

```
[Login]
#NAutoVTs=6
#ReserveVT=6
#KillUserProcesses=no
#KillOnlyUsers=
#KillExcludeUsers=root
#InhibitDelayMaxSec=5
#UserStopDelaySec=10
#HandlePowerKey=poweroff
#HandlePowerKeyLongPress=ignore
#HandleRebootKey=reboot
#HandleRebootKeyLongPress=poweroff
#HandleSuspendKey=suspend
#HandleSuspendKeyLongPress=hibernate
#HandleHibernateKey=hibernate
#HandleHibernateKeyLongPress=ignore
HandleLidSwitch=ignore
HandleLidSwitchExternalPower=ignore
HandleLidSwitchDocked=ignore
#PowerKeyIgnoreInhibited=no
#SuspendKeyIgnoreInhibited=no
#HibernateKeyIgnoreInhibited=no
LidSwitchIgnoreInhibited=no
#RebootKeyIgnoreInhibited=no
#HoldoffTimeoutSec=30s
#IdleAction=ignore
#IdleActionSec=30min
#RuntimeDirectorySize=10%
#RuntimeDirectoryInodesMax=
#RemoveIPC=yes
#InhibitorsMax=8192
#SessionsMax=8192
#StopIdleSessionSec=infinity
```

users

```
#
# Configuration file for the rlm_files module.
# Please see rlm_files(5) manpage for more information.
#
```

```
#      This file contains authentication security and
configuration
#      information for each user. Accounting requests are NOT
processed
#      through this file. Instead, see 'accounting', in this
directory.
#
#      The first field is the user's name and can be up to
#      253 characters in length. This is followed (on the same
line) with
#      the list of authentication requirements for that user.
This can
#      include password, comm server name, comm server port
number, protocol
#      type (perhaps set by the "hints" file), and huntgroup
name (set by
#      the "huntgroups" file).
#
#      If you are not sure why a particular reply is being sent
by the
#      server, then run the server in debugging mode (radiusd -
X), and
#      you will see which entries in this file are matched.
#
#      When an authentication request is received from the comm
server,
#      these values are tested. Only the first match is used
unless the
#      "Fall-Through" variable is set to "Yes".
#
#      A special user named "DEFAULT" matches on all usernames.
#      You can have several DEFAULT entries. All entries are
processed
#      in the order they appear in this file. The first entry
that
#      matches the login-request will stop processing unless you
use
#      the Fall-Through variable.
#
#      Indented (with the tab character) lines following the
first
#      line indicate the configuration values to be passed back
to
#      the comm server to allow the initiation of a user
session.
#      This can include things like the PPP configuration values
```

```

#         or the host to log the user onto.
#
#         You can include another `users' file with `$INCLUDE
users.other'

#
#         For a list of RADIUS attributes, and links to their
definitions,
#         see: http://www.freeradius.org/rfc/attributes.html
#
#         Entries below this point are examples included in the
server for
#         educational purposes. They may be deleted from the
deployed
#         configuration without impacting the operation of the
server.
#

user      Cleartext-Password := "password"
          Reply-Message := "Hello"

#
# Deny access for a specific user. Note that this entry MUST
# be before any other 'Auth-Type' attribute which results in the
user
# being authenticated.
#
# Note that there is NO 'Fall-Through' attribute, so the user
will not
# be given any additional resources.
#
#lameuser      Auth-Type := Reject
#              Reply-Message = "Your account has been disabled."

#
# Deny access for a group of users.
#
# Note that there is NO 'Fall-Through' attribute, so the user
will not
# be given any additional resources.
#
#DEFAULT      Group == "disabled", Auth-Type := Reject
#              Reply-Message = "Your account has been disabled."
#
#

```

```
# This is a complete entry for "steve". Note that there is no
Fall-Through
# entry so that no DEFAULT entry will be used, and the user will
NOT
# get any attributes in addition to the ones listed here.
#
#steve  Cleartext-Password := "testing"
#       Service-Type = Framed-User,
#       Framed-Protocol = PPP,
#       Framed-IP-Address = 172.16.3.33,
#       Framed-IP-Netmask = 255.255.255.0,
#       Framed-Routing = Broadcast-Listen,
#       Framed-Filter-Id = "std.ppp",
#       Framed-MTU = 1500,
#       Framed-Compression = Van-Jacobson-TCP-IP

#
# The canonical testing user which is in most of the
# examples.
#
#bob    Cleartext-Password := "hello"
#       Reply-Message := "Hello, %{User-Name}"
#
#
# This is an entry for a user with a space in their name.
# Note the double quotes surrounding the name. If you have
# users with spaces in their names, you must also change
# the "filter_username" policy to allow spaces.
#
# See raddb/policy.d/filter, filter_username {} section.
#
#"John Doe"    Cleartext-Password := "hello"
#              Reply-Message = "Hello, %{User-Name}"

#
# Dial user back and telnet to the default host for that port
#
#Deg     Cleartext-Password := "ge55ged"
#       Service-Type = Callback-Login-User,
#       Login-IP-Host = 0.0.0.0,
#       Callback-Number = "9,5551212",
#       Login-Service = Telnet,
#       Login-TCP-Port = Telnet

#
```



```

# Another complete entry. After the user "dialbk" has logged in,
the
# connection will be broken and the user will be dialed back
after which
# he will get a connection to the host "timeshare1".
#
#dialbk Cleartext-Password := "callme"
#      Service-Type = Callback-Login-User,
#      Login-IP-Host = timeshare1,
#      Login-Service = PortMaster,
#      Callback-Number = "9,1-800-555-1212"

#
# user "swilson" will only get a static IP number if he logs in
with
# a framed protocol on a terminal server in Alphen (see the
huntgroups file).
#
# Note that by setting "Fall-Through", other attributes will be
added from
# the following DEFAULT entries
#
#swilson      Service-Type == Framed-User, Huntgroup-Name ==
"alphen"
#            Framed-IP-Address = 192.0.2.65,
#            Fall-Through = Yes

#
# If the user logs in as 'username.shell', then authenticate them
# using the default method, give them shell access, and stop
processing
# the rest of the file.
#
#DEFAULT      Suffix == ".shell"
#            Service-Type = Login-User,
#            Login-Service = Telnet,
#            Login-IP-Host = your.shell.machine

#
# The rest of this file contains the several DEFAULT entries.
# DEFAULT entries match with all login names.
# Note that DEFAULT entries can also Fall-Through (see first
entry).
# A name-value pair from a DEFAULT entry will NEVER override
# an already existing name-value pair.

```

```

#

# Sample defaults for all framed connections.
#
#DEFAULT      Service-Type == Framed-User
#      Framed-IP-Address = 255.255.255.254,
#      Framed-MTU = 576,
#      Service-Type = Framed-User,
#      Fall-Through = Yes

#
# Default for PPP: dynamic IP address, PPP mode, VJ-compression.
# NOTE: we do not use Hint = "PPP", since PPP might also be auto-
#       detected
#       by the terminal server in which case there may not be a
#       "P" suffix.
#       The terminal server sends "Framed-Protocol = PPP" for
#       auto PPP.
#
DEFAULT Framed-Protocol == PPP
      Framed-Protocol = PPP,
      Framed-Compression = Van-Jacobson-TCP-IP

#
# Default for CSLIP: dynamic IP address, SLIP mode, VJ-
#       compression.
#
DEFAULT Hint == "CSLIP"
      Framed-Protocol = SLIP,
      Framed-Compression = Van-Jacobson-TCP-IP

#
# Default for SLIP: dynamic IP address, SLIP mode.
#
DEFAULT Hint == "SLIP"
      Framed-Protocol = SLIP

#
# Last default: rlogin to our main server.
#
#DEFAULT
#      Service-Type = Login-User,
#      Login-Service = Rlogin,
#      Login-IP-Host = shellbox.ispdomain.com

# #

```

```
# # Last default: shell on the local terminal server.  
# #  
# DEFAULT  
#     Service-Type = Administrative-User
```

```
# On no match, the user is denied access.
```

```
#####  
# You should add test accounts to the TOP of this file! #  
# See the example user "bob" above. #  
#####
```