Quantum Krylov chemistry on Quantinuum hardware

Review of the SKQD report, the four ground-state paradigms checked, and a publication strategy

Prajjwal

15 October 2026 (revised the same day after a literature and platform check)

What the report claims · where the evidence is thin · which paradigms are real on today's hardware · what to do instead · how to make it a Quantinuum paper

How to read this document

This document merges two earlier ones: a reviewer's report on "Scalable Non-Iterative Quantum Krylov Subspace Chemistry on Trapped-Ion Processors" (A. Kumar, 8 October 2026, 14 pp.; "the report" below), and a claim-by-claim check of a brief that lists four "state-of-the-art paradigms" for molecular ground states on Quantinuum hardware ("the brief"). It is written for a first-time reader: the glossary (Section 1) defines every acronym, each section ends with a one-line takeaway, and the toy numerics are gathered in one place (Section 11) and produced by one script.

Every factual statement carries a label so that you can check it yourself:

- [R] **verified from the report text**: a page, equation, table or figure is cited (e.g. "p. 8, Eq. (32)").
- [P] **a claim made in the brief**, reproduced so that it can be checked.
- [V] **verified**: read from a primary source on 15 October 2026 (Quantinuum data sheets, product-change notifications, Nexus/pytket/InQuanto documentation, arXiv abstract pages, journal pages), from the Quantinuum/Hiverge preprint in this folder, or from the project notes. The full list of sources with URLs is in Section 15; items marked [M] were seen only in a secondary source (press, blog, search summary) and should be read in the primary paper before being quoted.
- [A] **my own reasoning**: an inference from what a source says, or from standard linear algebra and cost arithmetic.
- [G] **general knowledge, to be verified**: a fact about the literature or the hardware that I believe to be correct but that you must confirm before quoting it in a paper.
- [N] **numerical check**: a result of `code/krylov_toy_checks_h2.py`, a statevector toy on the 2-qubit H_2 model with Gaussian shot noise. It illustrates mechanisms; it is never a hardware result.

The model for a credible Quantinuum hardware paper is the Quantinuum/Hiverge preprint "Automated near-term quantum algorithm discovery for molecular ground states" (arXiv:2603.26359, March 2026), cited as "the Hiverge paper". Three research notes behind this revision (platform facts, literature citations, state of the art) were compiled with web access on 15 October 2026 and are kept as markdown in `notes/`; their conclusions are folded into the text and their sources listed in Section 15. The companion documents `qite-complete-guide.pdf` (QITE from first principles, with the QITE-versus-Krylov benchmark idea) and `Krylov_SKQD_Study_Notes.pdf` (your own study of the report) are referred to rather than repeated.

Executive summary

The report. It presents a pipeline for molecular ground-state energies on Quantinuum H2-1/H2-2: exact $\mathbb{Z}_2$ tapering (12 to 7–8 qubits), perturbative pruning of the Hamiltonian, ancilla-free "sample-based Krylov quantum diagonalisation" (SKQD) in which the quantum computer only proposes computational-basis bitstrings and a classical computer diagonalises the full Hamiltonian in the span of those bitstrings, and a two-tier statistical filter for noisy bitstrings. It reports chemical accuracy for H_2O (hardware, 0.11–0.31 mHa), F_2 (hardware, "0.0000 mHa") and four further molecules in six-orbital active spaces, and claims a "100% chemical accuracy pass rate". The hardware runs are real and the exposition of tapering and of the method's scaling "walls" is honest and useful. But the paper does not show that the quantum computer contributed anything, and its evidence is unquantified.

Top five flaws (details in Section 5):

1. **The classical step does the work; no classical control** (F7, F8). 249/256 basis states for water; ≤ 400 determinants in every active space; raw noisy hardware beats both the filtered run and the noiseless simulator. Nothing isolates a quantum contribution.
2. **Novelty and framing** (F24). The method is SKQD/SQD/QSCI from the 2023–25 literature, uncited; the "Defense of Supremacy" section claims a milestone that no ≤ 8-qubit calculation can support.
3. **No statistics, no reproducibility** (F13, F22). One hardware run per molecule, no error bars, no bootstrap, no raw counts, no code, no Hamiltonians, no software versions. Compare the Hiverge paper: 10^4 shots, bootstrap, "3.1 ± 3.4 mHa", public repository.
4. **Resource accounting is wrong** (F19, F20). Eq. (9) is not Quantinuum's HQC formula, Eq. (10) uses a different denominator from Eq. (9), the batch total is not $6\times$ the per-circuit cost, and no actual HQC, wall-time or classical cost is reported.
5. **Theory claims that do not hold for the implemented method** (F1, F2, F6). The Krylov convergence story does not apply to a compact 10–30-term driver; "every omitted term is fully restored" is false in general; the two-tier filter discards exactly the rare configurations the paper's own "sampling wall" says are the bottleneck.

The four paradigms in the brief (details in Sections 6 to 9):

1. **QPE with low-rank factorisation (DF/THC, iterative QPE)**: correct as the fault-tolerant end-point, irrelevant to a 500–5 000 HQC budget. One-ancilla iterative QPE trades qubits for coherent evolution growing as 2^m for m bits; the toy needs 2 048 units of controlled evolution for 12 bits ([N]). One line in a cost table, no runs.
2. **Krylov / QLanczos**: the right family and already our backbone; the brief's "Quantinuum heavily favours it" is unsupported, its swap-network sentence is backwards on an all-to-all device, and it omits the two deciding issues: Hadamard-test shot cost and the conditioning of the overlap matrix (both measured in Section 11).
3. **ADAPT-VQE and generative ansätze**: ADAPT correctly described. The "transformer trained on molecules" sentence does describe a real Quantinuum line (ADAPT-GQE circuits for imipramine executed on Helios-1, July 2026), but it is not the Hiverge paper (LLM-driven evolutionary *algorithm discovery*), the "order of magnitude" speed-up has no source, and neither paper reached chemical accuracy on hardware. State preparation and baseline, not the novelty.
4. **Fault-tolerant GSEE / statistical phase estimation / syndromes**: three things bundled. Statistical phase estimation is *near-term*: Quantinuum has already run single-ancilla QCELS on H1-1 up to 19 qubits (0.7–6.3 mHa with 100–500 shots per circuit, no mitigation)

[V], and on the toy it reaches chemical accuracy in 100% of runs at 10^5 shots per time point where coherent Krylov from the same data reaches 55% ([N]). Logical-qubit chemistry exists but only at the one-logical-qubit scale (QEC-protected phase estimation of H_2 on H2-2, 0.001(13) Ha) [V] and is out of scope. Stabiliser syndromes and symmetry post-selection are different tools; the realistic options for us are PMSV, parity checks and the Iceberg detection code, whose discard rates (tens of percent at 10^3 two-qubit gates) must be budgeted.

Novelty. A targeted search (about 45 queries, Section 14.1) found no paper that runs two or more of {sample-based diagonalisation, Hadamard-test Krylov, QITE/QLanczos, QCELS/RPE} on the same hardware for the same molecules under matched budgets with repeats and error bars; no Quantinuum-hardware Krylov, SKQD or QITE chemistry paper exists as of 15 October 2026; and nobody has published the fraction of noisy Krylov runs that end below the true ground energy. Those three gaps are the paper.

Top three recommendations (details in Section 14):

1. **Reframe as a budget-matched, four-arm benchmark**, not a supremacy claim: sample-based diagonalisation (SKQD/SQD with the full driver), coherent Krylov with error-detected overlaps, QITE/QLanczos, and statistical phase estimation (free: it re-uses the coherent-Krylov data), plus classical-only controls, on active spaces of 12–20 orbitals where the connected expansion cannot saturate. The central figure is energy error (with confidence intervals) versus cumulative hardware cost.
2. **Adopt the Hiverge reporting standard**: emulator first (raw, symmetry-verified, forecast noise), then hardware; ≥ 3 independent repeats; bootstrap intervals; native-gate ledger per circuit; public code, Hamiltonians and raw counts; explicit device, dates and software versions.
3. **Make the quantum part matter and use the hardware's strengths**: a full-Hamiltonian Trotter driver (so the SKQD guarantee applies), residual-guided selection and adaptive shot allocation, and mid-circuit-measurement-based symmetry/error detection with qubit reuse, because that is what superconducting-platform SQD papers cannot do. Co-design with Quantinuum (InQuanto, Nexus, H2-1E/H2-2E emulators). Do not add QPE or logical-qubit work.

Contents

How to read this document 1

Executive summary 2

I Background 5

1 Glossary 5

2 The hardware premises, checked 7

II The SKQD report under review 10

3 What the report does and claims 10

4 What a credible Quantinuum hardware paper looks like 11

5 Flaws, weaknesses and gaps 12

III The four paradigms in the brief, checked 19

6 Paradigm 1: QPE with low-rank Hamiltonian factorisation 19

7 Paradigm 2: Quantum subspace diagonalisation and QLanczos 20

8 Paradigm 3: Adaptive variational methods and generative ansätze 22

9 Paradigm 4: Logical qubits, statistical phase estimation, and error detection 23

10 The mapping pipeline, checked 25

IV Toy numerical checks 26

11 Seven checks on the two-qubit H_2 model 26

12 A circuit-level prototype of the four arms 29

V Alternatives and strategy 35

13 Alternative and complementary approaches 35

14 Future strategy: a publishable paper with Quantinuum 38

15 Action checklist 43

References 44

Part I

Background

1 Glossary

Term	Plain-language meaning
Ground state, E_0 (GSEE)	The lowest-energy electronic state of a molecule and its energy; "ground-state energy estimation" is the task of finding E_0. The target of everything here.
Chemical accuracy	Energy error below 1 kcal/mol $\approx$ 1.6 mHa (1 mHa $= 10^{-3}$ Hartree). Usually measured against an exact reference *in the same model*; it says nothing about agreement with experiment.
HF	Hartree–Fock: the best single-determinant (mean-field) state. Cheap, usually the starting point, misses correlation.
FCI / CASCI	Full configuration interaction: the exact answer in a chosen orbital basis. CASCI is FCI inside a small "active space" of orbitals (e.g. CAS(8e,6o) = 8 electrons in 6 orbitals) with the rest frozen.
Active space	The handful of orbitals and electrons treated quantum mechanically; everything else is frozen classically. Fixes the qubit count (2× spatial orbitals before tapering).
CCSD(T), MP2	Coupled cluster with singles, doubles and perturbative triples: the classical "gold standard" for weakly correlated molecules. MP2 is cheaper second-order perturbation theory. Both fail when several determinants are equally important (strong correlation).
DMRG, SCI, SHCI, HCI	Classical methods for strongly correlated systems: density-matrix renormalisation group; selected CI (keep only important determinants); semistochastic/heat-bath CI are modern SCI variants. These are the honest classical competitors.
Determinant / bitstring	An occupation pattern of spin-orbitals. After the Jordan–Wigner map, a computational-basis bitstring of the qubits. The ground state is a weighted sum of such bitstrings.
Pauli string, λ	$H = \sum_m h_m P_m$ with P_m tensor products of I, X, Y, Z. The 1-norm $\lambda = \sum_m \lvert h_m \rvert$ sets the cost of block-encoding methods.
Tapering	Removing qubits exactly by exploiting $\mathbb{Z}_2$ symmetries (particle-number parity, point group). Zero error by construction.
Trotter step, e^{-iHt}	Approximating real-time evolution as a product of short gates, one per Hamiltonian term. Error grows with t and with non-commuting terms; controlled by the number of steps r.

Term	Plain-language meaning
Quantum Krylov (QKS/QKSD)	Build a basis $\{e^{-iHt_k}\|\mathrm{HF}\rangle\}$, measure the overlap matrix $\mathbf{S}$ and Hamiltonian matrix $\mathbf{H}_K$ between these states, solve $\mathbf{H}_K c = E\,\mathbf{S}c$. "Coherent" Krylov in this document.
Hadamard test	One-ancilla circuit that returns Re or Im of $\langle\psi_0\|U\|\psi_0\rangle$ from the ancilla statistics. Needs controlled-U. How coherent Krylov gets its matrix elements.
Conditioning, $\kappa(\mathbf{S})$	Ratio of largest to smallest eigenvalue of $\mathbf{S}$. When Krylov vectors are nearly parallel, κ explodes and shot noise is amplified; one must drop small eigenvalues (thresholding / canonical orthogonalisation) or add a ridge.
SKQD	Sample-based Krylov quantum diagonalisation: run the Krylov circuits but only *measure bitstrings*; then diagonalise H classically in the span of the sampled bitstrings. The overlap matrix is the identity ($\mathbf{S} = I$). Introduced by Yu et al. (arXiv:2501.09702, 2025; still a preprint) [V].
SQD / QSCI	Sample-based quantum diagonalisation (IBM, 2024–25) and quantum-selected CI (Kanno et al., 2023): same idea as SKQD but the bitstrings come from any prepared state, with classical "configuration recovery" of noisy samples (Robledo-Moreno et al., Science Advances 11, eadu9991, 2025; Kanno et al., Phys. Rev. Research 8, 023268, 2026) [V].
Connected expansion	Classical step: add every bitstring coupled by H to an already selected one. One "shell" of this from HF alone generates all single and double excitations.
QITE / QLanczos	Quantum imaginary-time evolution: approximate the cooling map $e^{-\tau H}$ by measured, state-dependent unitaries; QLanczos builds a Krylov space from QITE states. Iterative (needs feedback). See `qite-complete-guide.pdf`.
VQE, HEA, ADAPT-VQE	Variational quantum eigensolver: optimise circuit angles to minimise energy. HEA = hardware-efficient ansatz (shallow, symmetry-breaking). ADAPT grows the circuit one operator at a time from a pool using energy gradients. The Hiverge paper's baselines.

Term	Plain-language meaning
QPE, IQPE	Quantum phase estimation: read the eigenphase of e^{-iHt} into an ancilla register. Iterative (Kitaev) QPE uses one ancilla and reads one binary digit per round.
Block encoding, qubitisation	Embedding H/λ in a unitary; the "walk operator" W has eigenphases $\pm\arccos(E_n/\lambda)$, so QPE on W gives E_n. The standard fault-tolerant route.
DF, THC	Double factorisation and tensor hypercontraction: low-rank rewritings of the two-electron integrals that shrink λ and the gates needed to build W.
SPE, QCELS, RPE	Statistical / robust phase estimation: measure the signal $s(t) = \langle\psi_0\|e^{-iHt}\|\psi_0\rangle$ at several t and fit frequencies classically (Fourier, Prony, matrix pencil, least squares). No eigenproblem, one ancilla, much better shot scaling.
Shots	Repetitions of a circuit. Averages have noise $\sim 1/\sqrt{N_{\text{shots}}}$; a bitstring with probability p needs $\sim 1/p$ shots to be seen once.
Depth, 2Q gates	Circuit depth = number of sequential gate layers; two-qubit (2Q) gate count = number of native entangling gates (ZZPhase on Quantinuum). Both drive error and cost on hardware.
$R_{ZZ}(\theta)$, ZZPhase	Quantinuum's native arbitrary-angle two-qubit gate $\exp(-i\frac{\theta}{2}Z\otimes Z)$.
MCMR, qubit reuse	Mid-circuit measurement and reset: measure some qubits during a circuit and act on the result (detect an error and discard the shot, or reset and reuse the qubit). A distinctive trapped-ion capability.
PMSV	Partition-measurement symmetry verification (InQuanto): discard shots that violate a known symmetry (particle number, spin). Cheap error detection used in the Hiverge paper.
Error detection code	A small code (e.g. Iceberg $[[k{+}2, k, 2]]$) that flags, but does not correct, single errors; flagged shots are discarded.
Logical qubit	A qubit encoded in many physical qubits with error correction. Current demonstrations: a few to a few tens of logical qubits.
HQC	Hardware quantum credit, Quantinuum's usage unit: $\text{HQC} = 5 + C\,(N_{1q} + 10N_{2q} + 5N_m)/5000$ per circuit with C shots ([V]). *Not* a currency.
H2-1, H2-2, H2-1E, Helios	Quantinuum System Model H2 machines (56 trapped-ion qubits, all-to-all connectivity), their emulators ("E"), and the 2025 successor Helios (98 qubits) [G].
Emulator / statevector	Emulator: a classical simulation with a device noise model. Statevector: exact noiseless simulation.

2 The hardware premises, checked

The brief opens with four hardware facts [P]: all-to-all connectivity, two-qubit error $\sim 10^{-3}$–10^{-4}, mid-circuit measurement and reset, and native arbitrary-angle R_{ZZ}. The table gives what the official documents say (data sheets and product-change notifications read on 15 October 2026 [V]; URLs in Section 15).

Claim in the brief	What the official documents say	Consequence for us
All-to-all connectivity	[V] H2 data sheet v4.00 (Sept 2025): 56 $^{171}Yb^{+}$ qubits, all-to-all, 4 gate zones, racetrack QCCD. Helios data sheet v1.2 (June 2026): 98 $^{137}Ba^{+}$ qubits, all-to-all, 8 zones (4 for two-qubit gates).	No SWAP routing; a weight-w Pauli rotation costs $2(w-1)$ (or $2w-3$ with one native R_{ZZ}) two-qubit gates whatever the qubits.
2Q error 10^{-3}–10^{-4}	[V] H2: typical 1×10^{-3}, max 2×10^{-3} (1Q 3×10^{-5}, SPAM 1×10^{-3}, memory 2×10^{-4} per depth-1 circuit). Helios: typical 8×10^{-4}, max 2×10^{-3}; measured $7.9(2)\times10^{-4}$ (arXiv:2511.05465), 1Q 2.5×10^{-5}, SPAM 4.8×10^{-4}. A 2026 paper quotes an H2-2 calibration of $8.3(5)\times10^{-4}$ [M].	Plan with 10^{-3}; nothing near 10^{-4} exists. At 10^{-3} a 300-gate circuit keeps $\approx 74\%$ of shots error-free, a 1 000-gate circuit $\approx 37\%$.
Mid-circuit measurement, reset, conditional logic	[V] both data sheets: "mid-circuit measurement conditioned circuit branching", "qubit reuse after mid-circuit measurement"; Helios adds real-time integer/float arithmetic and arbitrary control flow; MCM cross-talk 5×10^{-6} (H2).	The ingredient that distinguishes a Quantinuum paper (Section 9).
Native $R_{ZZ}(\theta)$	[V] Native gates: single-qubit rotations, ZZ, parameterised-angle ZZ (H2 also a general SU(4) entangler). In pytket: {Rz, PhasedX, ZZMax, ZZPhase}, default two-qubit gate ZZPhase; Helios Guppy names `phased_x`, `rz`, `zz_max`, `zz_phase`.	Count compiled ZZPhase gates; "halving" holds only for weight-2 rotations (Section 10).
Qubit counts	[V] H2-1, H2-2: 56; Helios-1: 98 (available since 5 Nov 2025). H1-1 was retired on 15 Oct 2025.	Qubits are not the constraint; depth and credits are. Quantinuum "strongly encourages" jobs of ≤ 56 qubits to go to H2.
Emulators	[V] Hardware-hosted noisy emulators H2-1E/H2-2E/Helios-1E (statevector to 32 qubits, stabiliser to 56) are charged in HQC like hardware; Nexus-hosted H2-Emulator (noisy, 26 qubits), H2-1LE (noiseless) and Selene are charged in simulation time, not HQC. Noise can be switched off (`noisy_simulation=False`) or overridden (`error_params`).	Do the tuning on the time-metered emulators; spend HQC only on the hardware-hosted emulator for the final forecast and on hardware.

2.1 What a job costs

[V] Quantinuum's H-series cost unit is the HQC, defined in the hardware user guide, the Nexus terms (v8.0, October 2026) and Azure's provider page as

$$\mathrm{HQC} \;=\; 5 + \frac{C\,(N_{1q} + 10\,N_{2q} + 5\,N_m)}{5000},$$

with C the shots, N_{1q} single-qubit gates, N_{2q} native two-qubit gates and N_m state preparations and measurements (including the implicit initial preparation and mid-circuit measurements/resets). HQCs are "neither units of time nor money". For H2 conditional programs

every branch is charged whether executed or not; on Helios the cost is dynamic (per executed branch, plus 5 HQC per job), a `max_cost` must be given with every job, and jobs are capped at 10 000 shots and 500 000 HQC. `qnexus.circuits.cost()` estimates the HQC of a circuit before submission.

[V] Public price points: Azure lists USD 125 000/month for 10 000 HQC plus 100 000 emulator HQC, and USD 175 000/month for 17 000 + 170 000; one group reports a USD 185 000/month subscription with 17 000 HQC (arXiv:2601.09943). No public academic allocation figure exists (UK NQCC SparQ and an EPFL call give access without quoting HQC). the report's "typical academic budget 500–5 000 HQC" (p. 5) is therefore unsourced [A]; the realistic scale for a paper is 10^3–10^4 HQC on hardware plus ten times that on the hardware-hosted emulator.

> **What the budget really is.** With the formula above, one 8-qubit Hadamard-test circuit with 300 two-qubit gates costs 734 HQC at 10^3 shots and 7 295 HQC at 10^4 shots ([N], Check G). *A single well-sampled Hadamard-test circuit can consume a 5 000 HQC budget.* And HQC are charged on submitted shots, not on the shots that survive post-selection: with Iceberg detection at ~ 900 two-qubit gates about 77% of shots were discarded on H1-1 (2023), and parity post-selection discarded 62% in the 2026 H_3^+ run [V] (Section 9). Every paradigm below must be judged against these numbers, not against qubit counts.

2.2 The software path

[V] Job submission through `pytket-quantinuum` was removed in version 0.56 (December 2025); the supported path is `qnexus`: upload a pytket circuit, `start_compile_job` for the target, `start_execute_job` with `n_shots` and `backend_config=QuantinuumConfig(device_name=...)`, `jobs.wait_for`, `download_result().get_counts()`. `pytket-quantinuum` remains for offline compilation and the local "LE" emulator (pytket-pecos). The default compilation (optimisation level 2) is DecomposeBoxes, FullPeepholeOptimise, TK2 normalisation, rebase to {Rz, PhasedX, ZZPhase}, squash; level 3 adds GreedyPauliSimp, which is the pass that matters for Pauli-gadget circuits such as Trotter steps. InQuanto 6.1.1 (August 2026) provides PMSV, a subspace-expansion algorithm (QSE over single excitations), a moment-based Lanczos "Krylov" computable (not real-time Krylov), McLachlan variational imaginary time (not Motta-style QITE), and deterministic/iterative phase-estimation algorithms. The prototype in Section 12 follows this path.

Takeaway. Connectivity, MCMR, qubit reuse and the native gate are real and documented; the 10^{-4} error figure is not. The constraint that decides everything is the HQC cost of two-qubit gates times *submitted* shots, and the realistic budget scale is 10^3–10^4 HQC.

Part II

The SKQD report under review

3 What the report does and claims

3.1 The pipeline in plain language

The report (14 pages, 12 references) chains four "reductions" [R]:

1. **Tapering** (Sec. 3.2, pp. 5–6): find the Pauli operators that commute with every term of H by Gaussian elimination over $\mathbb{F}_2$ (Eqs. 16–19), rotate them to single-qubit X's with a Clifford (Eqs. 20–21), and replace each by its eigenvalue ± 1 (Eq. 22). 12 qubits become 7–8. This is exact.
2. **Pruning the driver** (Sec. 3.3, pp. 6–7): keep all diagonal (I/Z) terms ("Rule 1", Eq. 25) and drop off-diagonal terms whose second-order Epstein–Nesbet energy $|c_k|^2/\Delta E_{\text{gap}}$ is below $\eta = 10^{-7}$ Ha (Eq. 26).
3. **Ancilla-free SKQD** (Sec. 3.4, pp. 7–8): keep only the $K \in [10, 30]$ largest off-diagonal terms plus the diagonal as a "compact driving operator" H_{drive} (Eq. 30), evolve $|\Phi_{\text{HF}}\rangle$ under $e^{-iH_{\text{drive}}t_k}$ for $t_k \in \{0, 0.15, \ldots, 0.75\}$ (Eq. 31), and measure bitstrings. Because bitstrings are orthonormal, $\mathbf{S} = I$ (Eq. 32). Classically, add every bitstring coupled by H_{full} to a sampled one ("connected expansion", Eq. 33) and diagonalise H_{full} in that space (Eq. 34).
4. **Two-tier filter** (Sec. 3.5, pp. 8–9): discard bitstrings seen fewer than $N_{\min} = 2$ times or with frequency below $\nu_{\min} = 0.1\%$ (Eq. 35), and bitstrings whose second-order coupling to HF is below 10^{-6} Ha (Eq. 36).

3.2 The reported numbers

Case	Where	Qubits	2Q	Depth	Err. (mHa)	Provenance stated
H_2O, raw	p. 10, Tab. 1	8	150	428	0.1113	H2-1 hardware, job ID given, 6×1024 shots
H_2O, filtered	p. 10, Tab. 1	8	150	428	0.3095	same job, 53 core $\rightarrow$ 249 expanded states
H_2O, statevector	p. 10, Tab. 1	8	150	428	0.1836	noiseless
H_2O, emulator	p. 10, Tab. 1	8	150	428	0.1836	H2-1E, 1024 shots
"Standard QKS"	p. 10, Tab. 1	12	5436	18572	> 50	"decoheres"; no run described
F_2	p. 10, Tab. 2	7	153.3 (avg.)	505	0.0000	H2-2 hardware; no job ID, no shots stated
N_2, CH_4	p. 11, Tab. 3	7, 8	140, 110	–	0.2854, 0.0016	not stated
C_2H_4 (11 angles)	p. 11	4	40	162	0.0000	not stated
C_6H_6 (9 geometries)	p. 11	7–8	204	698 layers	0.0012	"compilation on H2-1", "1024-shot sampling"

All errors are relative to CASCI in the stated active space (STO-3G; all active spaces have ≤ 6

orbitals) [R].

3.3 The claims

From the abstract and Sec. 7 [R]: (i) tapering with "mathematically exact 0.0000 mHa error"; (ii) pruning with < 0.1 mHa error; (iii) 2Q-gate reduction "by up to 97.6%" and "survival fidelity from $< 0.03\%$ to $> 80\%$"; (iv) chemical accuracy on hardware for H_2O and F_2; (v) a "100% chemical accuracy pass rate" across six molecules; (vi) that "classical single-reference methods (MP2 and CCSD) fail" where the method succeeds; and (vii) Sec. 7.1, titled "Defense of Supremacy", lists four "milestones".

Takeaway. The report is a hardware demonstration of a sample-based diagonalisation workflow on tiny active spaces. The question a referee will ask first is: *what did the quantum computer contribute that Hartree–Fock plus a classical expansion would not have?*

4 What a credible Quantinuum hardware paper looks like

The Hiverge paper is a useful yardstick because it reports VQE-type circuits on the same hardware family and was written with Quantinuum's hardware team. The table lists what it does and whether the report does the same [R].

Practice	Hiverge paper	The report
Baselines run by the authors, same pool/setting	ADAPT-VQE and QEB-ADAPT-VQE implemented in the same codebase, same operator pools (Sec. 5.1, App. A.3)	None run. "Standard QKS" row is an unexecuted estimate; MP2/CCSD failure is quoted from another paper
Resource reporting	Per-geometry parameters, circuit evaluations, 2Q gates after compilation to the H2 native gate set (Fig. 5)	Single 2Q count and depth per molecule; no shots/HQCs/time ledger
Noise study before hardware	H2-1 emulator in three regimes: raw, PMSV-mitigated, "forecast" with tuned error rates (Fig. 7)	One 1024-shot emulator energy, noise model not described
Hardware statistics	10^4 shots per circuit, bootstrap error bars, result quoted as 3.1 ± 3.4 mHa, "statistically consistent with chemical precision" (Sec. 5.4)	1024 shots per circuit, one run, no uncertainty, errors quoted to 10^{-4} mHa
Ablation / mechanism	L0–L5 mechanism ladder isolating what each ingredient buys (Sec. 5.3, Figs. 6, 8, 9)	Raw vs. filtered only
Generalisation test	Evolved on some bond lengths, tested on unseen ones (Fig. 4)	Thresholds fixed; no held-out test
Reproducibility	GitHub repository; hardware specification source; execution window dated (refs. 48, 71)	Job ID only
Claims	"significant reductions in quantum resources" vs. named baselines; explicit limitations paragraph	"supremacy", "100% pass rate", "scalable"
Authorship	Quantinuum hardware/InQuanto staff acknowledged for execution and mitigation advice	Single author

Note that the Hiverge hardware result itself is modest (12-qubit LiH, one geometry, 3.1 ± 3.4 mHa).

What makes it publishable is the honest framing and the complete resource and noise story around it [A].

Takeaway. A Quantinuum paper is credible when the baselines are run by the authors, the uncertainty is quantified, the noise model is stated, resources are counted per circuit, and the code is public. None of these is expensive; all are missing from the report.

5 Flaws, weaknesses and gaps

Each flaw states what, where, why it matters, severity, and a fix. Severity: **high** = a referee would reject or demand new experiments; **medium** = must be fixed before submission; **low** = presentation. A summary table is in Section 5.8.

5.1 Theory and assumptions of the Krylov/SKQD construction

F1 – "Krylov" theory is invoked but does not apply to the implemented method. Where: p. 4, Eqs. (4)–(5); p. 8, Eqs. (30)–(32). **Severity: high.**

[R] Section 1.3 motivates the method with the generalised eigenproblem $\mathbf{H}_K c = E\mathbf{S}_K c$ in the span of $e^{-iHt_k}|\mathrm{HF}\rangle$, and Sec. 2.2 argues that coherent Krylov fails because $\mathbf{S}_K$ is ill-conditioned. The implemented method (Eq. 32) never forms that span: it diagonalises H_{full} in the span of *sampled bitstrings*, which is a different subspace. [V] The convergence guarantee for sample-based Krylov (Yu et al., "Quantum-centric algorithm for sample-based Krylov diagonalization", arXiv:2501.09702, Theorem 1) has explicit conditions: the Krylov states $e^{-ikH\,\delta t}|\psi_0\rangle$ must be generated with the *full* target H at $\delta t = \pi/\Delta E_{N-1}$ (spectral width); the ground state must be (α_L, β_L)-sparse (its L largest bitstrings carry weight $\geq \alpha_L$, each $\geq \beta_L$, $L = O(\mathrm{poly}\, n)$); the overlap $|\gamma_0|^2 = |\langle\psi_0|E_0\rangle|^2$ must be at least $1/\mathrm{poly}(n)$; the Krylov dimension $d = O(\log 1/\epsilon)$ for a gapped, bounded spectrum; and the number of samples *per Krylov state* must exceed $d^2 \log(L/\eta)/(|\gamma_0|^2\beta_L)$. Then the energy error is bounded by $\sqrt{8}\,\|H\|(1-\sqrt{\alpha_L})^{1/2}$. The hardware demonstrations were 85 and 70 qubits on IBM Heron (Anderson impurity models), with 10^5 shots per Krylov dimension. [R] The report instead evolves under a 10–30-term H_{drive} (Eq. 30) and never states an overlap or a gap for any molecule. [A] With a truncated driver the sampled distribution has no guaranteed relation to the ground state; the method is a heuristic configuration selector (QSCI-style) and should be presented as one. **Fix:** either (a) use the full tapered H (or a symmetry-preserving grouped driver) in the Trotter circuit and cite/apply the SKQD guarantee, reporting $|\langle\mathrm{HF}|E_0\rangle|^2$ and the gap for each instance; or (b) rename the method and test it empirically against classical selectors.

F2 – "Every single term omitted from the quantum driving circuit is fully restored in the final energy". Where: p. 8, text after Eq. (34). **Severity: high.**

[R] The claim is bold-faced. [A] It is false in general: the connected expansion (Eq. 33) restores the *matrix elements* of H_{full} between included configurations, not the configurations themselves. A configuration that H_{drive} cannot reach from HF and that is not coupled by H_{full} within one expansion shell of a sampled state is simply absent, and no number of shots recovers it. Your study notes (Lab B) show this on a 4-state model: one shell gives 5×10^{-5} error, only the full space gives zero. **Fix:** report the external residual $\|(I - BB^\dagger)H_{\mathrm{full}}Bc\|$ of the final Ritz vector, the number of expansion shells and the dimension after each, and the fraction of the sector covered.

F3 – Initial-state overlap and spectral gap are never reported. Where: Sec. 3.4, pp. 7–8;

Sec. 6, p. 12. **Severity: medium.**

[R] Section 6 ("Wall 2", "Wall 3") correctly states that a vanishing gap and a diluted ground state are the failure modes, but no overlap $|\langle \mathrm{HF}|E_0\rangle|^2$, gap, or sampling probability of the important determinants is given for any molecule, even though all six cases are small enough to compute them exactly. [A] Without them one cannot tell whether the benzene $R_1 = 5.0\,\text{Å}$ or ethylene $\phi = 90°$ points are hard at all in a 2- or 6-orbital active space. **Fix:** a table of $|\langle \mathrm{HF}|E_0\rangle|^2$, $E_1 - E_0$, number of determinants with weight $> 10^{-3}$, and the Hilbert-space dimension, per instance.

F4 – Trotterisation and time grid are unspecified. Where: p. 4, Eq. (7); p. 8, Eq. (31). **Severity: medium.**

[R] Eq. (7) gives a second-order product formula with r steps, but r, the term ordering, and the units of $t_k \in \{0, 0.15, \ldots, 0.75\}$ are not given; "6 circuits" includes $t_0 = 0$, which is the bare HF circuit and contributes only the HF bitstring (plus noise), so there are 5 informative circuits. [A] For a sampling method Trotter error is not an accuracy problem (any state is a valid sampler) but it changes *which* configurations are populated, so it is part of the method and must be reproducible. **Fix:** state r, ordering, units; show the sampled distribution versus t_k in simulation; justify the grid (e.g. by the marginal-discovery rule in your notes).

F5 – Pruning score is a single-reference energy, not a driving relevance. Where: p. 7, Eqs. (24)–(26); p. 12, Eq. (37). **Severity: medium.**

[R] Off-diagonal terms are ranked by $|c_k|^2/\Delta E_{\text{gap}}$ with a HOMO–LUMO denominator; the report itself says this "collapses" at dissociation (Wall 2) yet reports benzene ring-breathing to $R_1 = 5.0\,\text{Å}$ and N_2 with the same recipe. [A] A term's second-order energy contribution and its usefulness for *populating* configurations are different things; a term with small $|c_k|$ can open the only path to an important configuration. Also, "diagonal terms ... cost virtually nothing" (p. 7) is not right: ZZ terms compile to ZZPhase gates (your notes, p. 7 entry). **Fix:** ablate the driver size ($K = 10, 20, 30, \text{all}$) and show energy and coverage versus K; use a norm- or commutator-based score where the gap closes.

F6 – The two-tier filter contradicts the paper's own sampling wall and empirically hurts. Where: p. 9, Eqs. (35)–(36); p. 10; p. 12, Wall 3. **Severity: high.**

[R] Tier 1 discards bitstrings seen once or with frequency $< 0.1\%$; with 1024 shots, 0.1% is 1.02 shots, so the frequency test is redundant with $N_{\min} = 2$. Wall 3 (p. 12) says the real bottleneck is configurations with probability $\sim 10^{-6}$ that appear rarely; Tier 1 discards precisely such configurations when they do appear. Tier 2 keeps a bitstring only if it couples directly to HF with $\Delta E_k^{(2)} > 10^{-6}\,\text{Ha}$, which rejects every configuration that reaches the ground state only through an intermediate (e.g. a triple relative to HF). On water the filter *worsened* the result from 0.1113 to 0.3095 mHa (Table 1). [A] Noise bitstrings in the correct symmetry sector cannot raise a variational energy; they can only add harmless or helpful directions. The actual damage from noise is bitstrings in the *wrong* sector (wrong particle number or S_z), which are detected exactly and for free by symmetry checks, not by frequency. **Fix:** replace Tier 1/2 by (i) exact sector checks on each bitstring (after undoing the tapering map), (ii) residual-guided selection using the correlated Ritz vector (your notes, "Residual-guided energetic selection"), and (iii) a reported ablation: no filter / sector only / tier 1 / tier 2 / both.

5.2 Methodology and claims versus evidence

F7 – The classical post-processing does (nearly) all the work; there is no classical-only control. Where: p. 10, Sec. 4.2; p. 11, Table 3. **Severity: high.**

[R] For water the filtered expansion "populated 249 determinants" on 8 qubits, i.e. $249/256 = 97.3\%$ of the entire tapered space (your notes make this point); the raw branch, which did better, presumably used even more. Every active space in Table 3 has ≤ 6 orbitals, so CASCI involves at most $\binom{6}{3}^2 = 400$ determinants and is solved in microseconds classically. [A] Hartree–Fock plus *one* connected-expansion shell under H_{full} already contains all singles and doubles, which in a 6-orbital space is most of the sector; a second shell is everything. Thus any pipeline ending in "connected expansion + diagonalise H_{full}" will pass at these sizes, with or without a quantum computer. [N] Check C shows this in the extreme: on the 2-qubit H_2 model, HF plus one shell equals FCI exactly, as does the sampled basis with 10 shots. **Fix:** add control arms at matched final dimension: (a) HF + s shells, no quantum; (b) random valid-sector seeds; (c) a classical selector (CIPSI/HCI-style). Report energy versus final dimension D for each. Move to active spaces (12–20 orbitals) where the expansion cannot saturate the space.

F8 – Raw noisy hardware beats both the filtered run and the noiseless simulator, and this is not explained. Where: p. 10, Table 1. **Severity: high.**

[R] Errors: statevector 0.1836, emulator 0.1836, hardware raw 0.1113, hardware filtered 0.3095 mHa. [A] If the noiseless pipeline leaves 0.18 mHa, its expanded space is missing something; noise then *adds* bitstrings that happen to fix part of it. That is variational luck, not noise resilience, and it means the reported hardware accuracy is not a property of the algorithm. It is also inconsistent with Eqs. (32)–(34) delivering 249/256 states (a space that large should be essentially exact). **Fix:** report D_{raw}, D_{core} and D_{expanded} for every branch; verify variational monotonicity; explain the 0.18 mHa residual.

F9 – "Chemical precision" is agreement with a tiny model, not with chemistry. Where: title; abstract; p. 10, Table 2; p. 11. **Severity: medium.**

[R] All references are CASCI in STO-3G with ≤ 6 active orbitals. The ethylene barrier of "132.8 kcal/mol" (p. 11) comes from a CAS(2e,2o) model. [V] The experimental torsional barrier of ethylene is 65 kcal/mol (Douglas, Rabinovitch and Looney, J. Chem. Phys. 23, 315, 1955; a spectroscopic re-evaluation gives about 60, Wallace, Chem. Phys. Lett. 159, 35, 1989), and correlated calculations give 65–69 (CASPT2 65.2–65.5; CASSCF(12,12) 68–69; MR-CISD+Q 69.2; RHF 108–112; Zen et al., JCTC 10, 1048, 2014, Table III), so the two-orbital model is off by a factor of two even though the algorithm reproduces it to 0.0000 mHa. (No published CAS(2e,2o) barrier value was found; the report's 132.8 is plausible for an RHF-like minimal model but should be computed and stated as such.) [A] Matching a model to 10^{-7} Ha is a statement about the solver, not about the molecule; the title ("Solving Polyatomic and Aromatic Ground States within Chemical Precision") overclaims. The Hiverge paper says "chemical precision relative to FCI" throughout. **Fix:** say "agreement with the active-space CASCI reference"; drop the chemistry conclusions (barrier heights, "non-adiabatic") or compute them in a basis where they mean something.

F10 – The MP2/CCSD "failure" is imported, not demonstrated, and is not like-for-like. Where: abstract; p. 11, Sec. 5.2. **Severity: medium.**

[R] The divergence of MP2/CCSD beyond $R_1 \approx 2.44$ Å is quoted from arXiv:2203.05275; it was computed in a different (full) orbital space, whereas the report's success is in a 6-orbital active space. [A] The fair classical competitors for a 6-orbital CAS are CASCI itself (trivial), CASSCF, DMRG and SCI, all of which are exact or near-exact here. Only F_2 has an HF baseline

(73.5 mHa, Table 2). **Fix:** report HF, CCSD(T) in the active space, and an SCI/DMRG baseline for each instance; state that CASCI is the reference and is cheap.

F11 – The VQE straw man is contradicted by Quantinuum's own paper. Where: p. 3, Sec. 1.2. **Severity: medium.**

[R] "A typical 200-iteration VQE run requires days to weeks of queued cloud latency" and "millions of shots" are unreferenced. The Hiverge paper reaches chemical precision for H_2O (14 qubits) with 10^3–10^4 circuit evaluations (its Fig. 5b) and runs on H2-1 with 10^4 shots per circuit. **Fix:** cite actual numbers or remove; the non-iterative advantage can be stated without exaggeration (one batch submission versus adaptive loops).

F12 – The "Standard QKS" baseline row is an estimate presented as a result. Where: p. 10, Table 1; p. 4, Sec. 2.1. **Severity: medium.**

[R] 12 qubits, 5436 ZZPhase, depth 18572, error "> 50 (Decoheres)" with "FAIL". No job, no shots, no emulator run is described; a Hadamard-test circuit needs an ancilla (13 qubits, not 12); the 10,000-gate estimate on p. 4 assumes one controlled Trotter step of all ≈ 470 terms, which no one would run (one would taper and prune the coherent method too). **Fix:** label as a compiled-resource estimate, give the same tapering and pruning to the baseline, and run a small coherent-Krylov instance on H2-1E to produce a real number.

5.3 Experiments and hardware

F13 – One run per molecule, no error bars, no repeats. Where: pp. 9–10, Secs. 4.1–4.3. **Severity: high.**

[R] Water: one job, 6 circuits × 1024 shots; F_2: no shot count or job ID; errors quoted to four decimals in mHa. [A] The energy from a sampled basis is a random variable (which bitstrings were seen); the "0.1113 mHa" has an unknown spread. **Fix:** ≥ 3 independent jobs per instance, interleaved in time; bootstrap over shots within a job; report median, interquartile range and the probability of reaching chemical accuracy, as in Hiverge Fig. 7.

F14 – Provenance of each number (hardware / emulator / statevector) is ambiguous. Where: p. 11, Table 3 and Secs. 5.1–5.2. **Severity: medium.**

[R] Table 3 is captioned "on Quantinuum H-Series QPUs" but hardware execution is described only for H_2O and F_2; benzene mentions "compilation on H2-1" and "1024-shot sampling"; N_2, CH_4 and C_2H_4 say nothing. The abstract's "100% chemical accuracy pass rate" therefore mixes hardware and simulation. **Fix:** a provenance column (statevector / H2-1E / H2-1 job ID / date) per row, as your notes' manifest requires.

F15 – F_2 "0.0000 mHa" with inconsistent precision and a 36-determinant target. Where: p. 10, Sec. 4.3, Table 2. **Severity: medium.**

[R] The energy is given to 10^{-6} Ha $= 10^{-3}$ mHa, so an error of "0.0000 mHa" is below the stated precision. CAS(10e,6o) has $\binom{6}{5}^2 = 36$ balanced determinants (your notes). [A] Exactness here is unsurprising and uninformative. **Fix:** full-precision energies; final dimension; and choose an F_2 active space where the result is not trivially exact.

F16 – Error-mitigation comparison is not fair or standard. Where: p. 9, Sec. 3.5; p. 10. **Severity: medium.**

[R] The only ablation is raw versus two-tier filtered; the emulator noise model is not described; no symmetry verification or post-selection is tried. The Hiverge paper compares raw, PMSV

and a forecast model on the same emulator. [A] Because Tier 2 uses the Hamiltonian, it is classical post-processing, not error mitigation, and should be compared with the simplest exact alternative: particle-number and S_z post-selection. **Fix:** emulator study with raw / sector post-selection / PMSV / two-tier; report the fraction of shots discarded by each.

F17 – "Survival fidelity $< 0.03\% \rightarrow > 80\%$" is a gate-count heuristic, not a measurement. Where: abstract; p. 8; p. 13. **Severity: low.**

[N] Solving $(1-p)^{5436} = 3 \times 10^{-4}$ gives $p = 1.49 \times 10^{-3}$, and then $(1-p)^{150} = 0.80$: the two numbers are exactly consistent with the formula "fidelity $= (1-p_{2Q})^{N_{2Q}}$" at $p_{2Q} \approx 0.15\%$ (Check D). [A] Nothing was measured. **Fix:** say so, or measure a proxy (fraction of shots in the correct sector).

F18 – Gate count does not add up. Where: p. 9, Sec. 4.1. **Severity: low.**

[R] $150 + 356 + 318 = 824$, stated total 833 (your notes). **Fix:** export the compiled circuit and quote pytket's counts.

5.4 Resource accounting

F19 – The HQC formula is wrong and the arithmetic is internally inconsistent. Where: p. 5, Eqs. (9)–(10). **Severity: high.**

[R] Eq. (9) reads HQC $\approx (5 + N_{1Q}/10 + N_{2Q} + 5N_{\text{meas}})/500 \times N_{\text{shots}}$; Eq. (10) computes $5436 \times 1024/336 \approx 16{,}568$ (denominator 336, not 500) and a "batch total" of 82,862.17, which is neither $6 \times 16{,}568 = 99{,}408$ nor $5\times$. [V] Quantinuum's published form (Nexus/Azure documentation; also quoted in your notes) is HQC $= 5 + C\,(N_{1q} + 10N_{2q} + 5N_m)/5000$ with C the shot count; Helios is costed differently [G]. [N] With Eq. (9) as printed and $N_{\text{meas}} = 12$, the per-circuit cost is 11,266–13,493 HQC depending on N_{1Q}; with the published formula and $N_{1q} = N_{2q}$ it is about 12,264 HQC (Check D). [R] The "$\approx$ \$80,000+" figure treats HQCs as dollars, which they are not. **Fix:** use the official estimator for the actual compiled circuits, and report HQCs *actually consumed* for every run (hardware and emulator).

F20 – No cost ledger. Where: Secs. 4–5. **Severity: medium.**

[R] Missing: HQCs spent, QPU execution time, queue time, number of submissions, classical time and memory for the 249-dimensional solve, shots on emulators, per-circuit 2Q counts (F_2 gives an "average 153.3"). [A] "Non-iterative" is the paper's main selling point; the latency advantage must be quantified in wall time to be a result. **Fix:** a table in the style of Hiverge Fig. 5: per instance and per circuit, N_{2Q}, depth, shots, HQC, QPU time, classical time.

F21 – Depth numbers are compiler-dependent and the compiler is unspecified. Where: p. 9; p. 10, Table 2; p. 11. **Severity: low.**

[R] Depth 428 for 150 ZZPhase gates on 8 all-to-all qubits; "698 layers" for benzene. [A] With all-to-all connectivity no routing is needed, so depth is set by the Trotter term ordering and the optimisation level. **Fix:** state pytket/TKET version and pass list; report depth in 2Q layers.

5.5 Reproducibility and statistics

F22 – Nothing can be reproduced. Where: whole report. **Severity: high.**

[R] No code, no data, no raw counts, no Hamiltonian coefficients, no geometries for N_2/CH_4, no active-orbital selection, no software versions (InQuanto? PySCF? pytket?), no calibration data or

run dates. The only artefact is a job ID that readers cannot open. Your notes' "implementation ledger" lists 13 missing or partial items. **Fix:** release a bundle (Hamiltonians with hashes, tapering maps, driver lists, compiled circuits, raw per-circuit counts, filter/expansion code, environment file), as the Hiverge paper does with its repository.

F23 – Thresholds are unmotivated and could have been tuned to the answer. Where: p. 7 ($\eta = 10^{-7}$); p. 9 ($N_{\min} = 2$, $\nu_{\min} = 0.1\%$, 10^{-6} Ha); p. 8 (ϵ_{expand} never given). **Severity: medium.**

[A] With the exact answer known, every threshold can be adjusted until the error is small; nothing in the report rules this out. **Fix:** pre-register thresholds; show sensitivity sweeps; use a held-out geometry (as Hiverge does with hollow vs. solid markers).

5.6 Novelty and framing

F24 – The core method is prior work and is not cited; "supremacy" is unwarranted. Where: p. 8, Sec. 3.4; p. 13, Sec. 7.1; references. **Severity: high.**

[V] Sample-based Krylov diagonalisation is Yu, Robledo-Moreno et al. (arXiv:2501.09702, 2025, preprint); sample-based quantum diagonalisation with configuration recovery is Robledo-Moreno et al. (Science Advances 11, eadu9991, 2025; arXiv:2405.05068: N_2, [2Fe-2S], [4Fe-4S] on 58–77 qubits of ibm_torino, energies within "tens of mE_h" of HCI, no chemical-accuracy claim); quantum-selected CI is Kanno et al. (arXiv:2302.11320, 2023; Phys. Rev. Research 8, 023268, 2026); tapering is Bravyi et al. (arXiv:1701.08213, 2017, cited by the report); Epstein–Nesbet partitioning is textbook. [R] The report uses the name "SKQD" but cites none of the SKQD/SQD/QSCI papers, and lists the $\mathbf{S} = I$ observation, tapering and a compact driver as its "four major algorithmic milestones". Sec. 7.1 is titled "Defense of Supremacy" although every computed quantity is classically trivial. [A] A referee from the field will see this immediately. **Fix:** cite the prior work, position the contribution as a *hardware implementation and cost study* of a known method with a specific driver and filter, remove "supremacy" and "scalable" from the title and text.

F25 – Tautological results are counted as results. Where: abstract; p. 6; p. 13. **Severity: low.**

[R] "Exact 0.0000 mHa error" for tapering is stated four times. [A] Exact symmetry reduction has zero error by construction; it is a tool, not a finding. Same for "$\kappa(\mathbf{S}) = 1.000000$" (Eq. 32), which is the definition of an orthonormal basis. **Fix:** state once, as method.

5.7 What the report does well

To be fair to the author [R]: real hardware execution on two machine generations with a traceable job ID; honest reporting of raw versus filtered results even though the filter hurt; a clear, correct exposition of tapering (Sec. 3.2); a frank "four walls" section (Sec. 6) that names the sampling, gap, tapering-saturation and classical-memory limits (this is better than many published SQD papers); sensible, hardware-aware circuit design (ancilla-free, ≤ 204 ZZPhase gates); and a correct diagnosis (Sec. 2.2) that coherent Krylov is fragile under shot noise, which Check B confirms. The ingredients for a good paper are present; the evidence and the framing are not.

5.8 Summary table

ID	Flaw	Where	Severity
F1	Krylov theory invoked but method uses a compact driver; no overlap/gap	pp. 4, 8	high
F2	"Every omitted term fully restored" is false in general	p. 8	high
F3	No initial overlap, gap or weight distribution reported	pp. 7–8, 12	medium
F4	Trotter steps, ordering, time units unspecified; $t = 0$ circuit counted	pp. 4, 8	medium
F5	Pruning score is single-reference energy, not driving relevance	pp. 7, 12	medium
F6	Two-tier filter contradicts sampling wall; made water worse	pp. 9–10, 12	high
F7	Classical expansion does the work (249/256); no classical control	pp. 10–11	high
F8	Raw hardware beats noiseless simulator; unexplained	p. 10	high
F9	"Chemical precision" is vs. a $\leq$ 6-orbital model; title overclaims	title, p. 11	medium
F10	MP2/CCSD failure imported, not like-for-like	abstract, p. 11	medium
F11	VQE straw man contradicted by Hiverge numbers	p. 3	medium
F12	"Standard QKS" baseline is an estimate shown as a FAIL result	p. 10	medium
F13	Single run, no error bars, no repeats	pp. 9–10	high
F14	Hardware/emulator/statevector provenance ambiguous	p. 11	medium
F15	F_2 "0.0000 mHa" beyond stated precision; 36-determinant target	p. 10	medium
F16	Mitigation comparison not standard (no PMSV/sector post-selection)	pp. 9–10	medium
F17	"Survival fidelity" is a $(1-p)^N$ heuristic	abstract, p. 8	low
F18	$150 + 356 + 318 \neq 833$	p. 9	low
F19	HQC formula wrong; Eqs. (9)–(10) inconsistent; HQC treated as dollars	p. 5	high
F20	No cost ledger (HQC, QPU time, queue, classical)	Secs. 4–5	medium
F21	Compiler and depth convention unspecified	pp. 9–11	low
F22	No code, data, Hamiltonians, versions, dates	all	high
F23	Thresholds unmotivated; possible tuning to the answer	pp. 7–9	medium
F24	Prior work (SKQD/SQD/QSCI) uncited; "supremacy" framing	pp. 8, 13	high
F25	Tautologies (exact tapering, $\kappa = 1$) counted as results	abstract	low

Takeaway. Eight high-severity issues cluster into three stories: the quantum step is not shown to matter (F7, F8, F2, F6), the evidence is unquantified and unreproducible (F13, F22, F19), and the framing claims more than any 8-qubit calculation can (F24, F1). All three are fixable with a redesigned study, not with rewriting.

Part III

The four paradigms in the brief, checked

6 Paradigm 1: QPE with low-rank Hamiltonian factorisation

6.1 What the brief says

[P] Textbook QPE is replaced by block-encoding/qubitisation; DF and THC compress the two-electron tensor and lower λ, hence the depth of the walk operator $W = e^{i \arcsin(H/\lambda)}$; iterative QPE with one ancilla uses Quantinuum's fast MCMR and feed-forward "without loss of precision".

6.2 What is right

- Qubitised QPE is the method of record for *fault-tolerant* chemistry resource estimates, and DF/THC are the standard compressions: THC gives the lowest λ and gate counts in the FeMoco/P450 estimates (von Burg et al. 2021; Lee et al. 2021) [G]. The walk-operator phase convention is $\pm \arccos(E/\lambda)$ in the usual presentation; arcsin appears in some conventions, and the two differ only by a shift of $\pi/2$ [A].
- Iterative QPE does need only one ancilla, and MCMR plus conditional phase feedback is exactly what it requires; Quantinuum has the primitives [V].

6.3 What is overstated

1. **Depth, not qubits, is the cost.** "Without loss of precision" is true for the ancilla count but hides that the m-th bit requires controlled-$U^{2^{m-1}}$. Chemical accuracy on a window of 2 Ha needs $\log_2(2/0.0016) \approx 11$ bits, so the longest round applies the evolution 2^{10}–2^{11} times. In the toy (Check F: two-qubit H_2, exact ground state as input, 50 shots per bit) IQPE recovers E_0 to 0.15 mHa with 12 bits, but the longest circuit contains 2048 copies of the unit evolution ([N]). On hardware each copy is a full Trotter step or a full walk operator: at a few hundred two-qubit gates each and 10^{-3} error per gate, the circuit is dead long before bit five. This is why QPE is not a NISQ method, Quantinuum connectivity notwithstanding.
2. **DF/THC do not help a NISQ circuit.** They reduce the *number of Toffoli/T gates* in a fault-tolerant walk operator and the λ that sets how many walk steps are needed. For an 8–20 qubit Trotter circuit the relevant count is the number of Pauli terms after tapering and the per-term R_{ZZ} ladders, which DF changes only by re-grouping. On the toy Hamiltonian $\lambda = 0.988$ Ha before any factorisation; there is nothing to compress at this size ([N]).
3. **Overlap is a hidden requirement.** QPE on $|\psi_0\rangle$ returns E_0 with probability $|\langle E_0|\psi_0\rangle|^2$ and other eigenvalues otherwise. For HF on the toy this is 0.988; for a strongly correlated active space it can be small, and then IQPE's bit-by-bit logic breaks because the measured phase is a mixture [A].

6.4 What Quantinuum has actually run

[V] Phase estimation on Quantinuum hardware is a device-benchmark line on two- to six-qubit molecules, not a chemistry method at active-space scale: Bayesian QPE of H_2 inside the Iceberg detection code on H1-1 (Yamamoto et al. 2024: 0.006 ± 0.007 Ha at 920 physical two-qubit gates, $\approx 77\%$ of shots discarded; unencoded 0.048 ± 0.009 Ha); QEC-protected QPE of H_2 in the $[[7, 1, 3]]$ colour code on H2-2 (Yamamoto et al. 2025/26: 0.001(13) Ha, 4.7% discarded by

the detection gadgets, up to 1 585 fixed plus 7 202 conditional two-qubit gates, code released); a 50-bit multi-ancilla QPE of H_2 on the 56-qubit machine as a precision benchmark (Tranter et al. 2025, 200 shots per experiment); adiabatic preparation plus iterative QPE for H_3^+ on six qubits (Nützel et al. 2026: -25.5 ± 5.3 mHa, about 1 050 two-qubit gates per circuit, 62% of shots discarded by parity post-selection, leakage named as the main obstacle); and split-evolution QPE of a four-qubit ethylene model on H2-2 (Rowe et al. 2026). The pattern: sub-chemical-accuracy results exist only for two-qubit H_2; at six qubits and 10^3 gates the error is tens of mHa and depth, not shots, is the limit.

> **Do not confuse the fault-tolerant road map with a near-term plan.** The brief's section reads like a resource-estimation abstract. Nothing in it is wrong as a statement about where chemistry on error-corrected machines is heading, but none of it runs within a 10^3–10^4 HQC budget on today's H2 for an 8–20 qubit active space; the demonstrations above are the evidence.

Verdict for our paper. Include QPE as one line of a cost table ("full QPE to chemical accuracy would need $\sim 10^3$ sequential Trotter steps at the longest round") to motivate why near-term methods are needed. Do *not* spend simulator or hardware effort on it. The near-term relative that *does* belong in the paper is statistical phase estimation (Section 9), which replaces the 2^m coherent repetitions by many short circuits and a classical fit.

Takeaway. QPE is the destination, not a benchmark arm. Its one-ancilla form trades qubits for exponentially long coherent circuits; the factorisation tricks help only in the fault-tolerant setting.

7 Paradigm 2: Quantum subspace diagonalisation and QLanczos

7.1 What the brief says

[P] Variational optimisation suffers from barren plateaus and optimiser noise; Quantinuum benchmarks "heavily favour" Krylov / non-variational subspace expansion; the subspace is spanned by real-time or imaginary-time states; $\mathbf{H}_{ij}$ and $\mathbf{S}_{ij}$ are measured by Hadamard tests and $\mathbf{Hc} = E\mathbf{Sc}$ is solved classically; all-to-all connectivity avoids the routing overhead of deep Trotter circuits and "fermionic swap networks".

7.2 What is right

The description of the method is correct and matches `qite-complete-guide.pdf`, Lesson 21, and the report's Sec. 2 ([V]). Barren plateaus and optimiser noise are genuine VQE problems [G]. All-to-all connectivity does remove the SWAP overhead of long Pauli strings [V].

7.3 What is overstated or inconsistent

1. **"Quantinuum benchmarks heavily favour Krylov"** is not supported by anything in this workspace. The Quantinuum paper we have (Hiverge) is a *variational* ansatz-discovery paper ([V], Section 4); the only Krylov document is the report, whose quantum step turned out to do little work (F7). Treat the sentence as marketing until a Quantinuum Krylov hardware paper is cited [G].

2. **Fermionic swap networks are a fix for *limited* connectivity.** On an all-to-all device you simply do not need them; invoking them as an "ion-trap advantage" is backwards [A]. The real advantage is that a weight-w Pauli rotation costs $2(w-1)$ two-qubit gates (or $2w-3$ with one native R_{ZZ}) with no SWAPs at all.
3. **The Hadamard tests are the expensive part and the brief does not say so.** Each $\mathbf{S}_{ij}$ needs one controlled time-evolution circuit for Re and one for Im; each $\mathbf{H}_{ij}$ needs one per Pauli term of H (or per commuting group). With Toeplitz structure (equal time steps) only $O(K)$ distinct elements are needed, but each still costs 10^4–10^5 shots for chemical accuracy in the toy (Checks B and E), i.e. thousands of HQC per element at 300 two-qubit gates (Check G).
4. **Conditioning.** The overlap matrix of nearly parallel time-evolved states is ill-conditioned: Check A gives $\kappa(\mathbf{S}) \approx 10^4$ at $K = 2$ and a singular matrix for $K \geq 3$ on the toy, and Check B finds 32–44% of noisy runs falling *below* E_0 unless thresholded hard ([N]). The brief's "computed classically" hides a regularisation policy that must be declared in advance.
5. **Imaginary-time Krylov (QLanczos) is a different cost structure.** The brief lumps "real-time evolution or imaginary-time projections" together. QITE states are produced *iteratively*, each round needing the device, with depth growing per step ([V], QITE guide Lesson 12); but their overlaps are real and the basis is, by construction, enriched in the ground-state direction, so $\mathbf{S}$ is better conditioned along the direction that matters. That is why QITE/QLanczos is its own arm (A3 in Section 13).

7.4 What the literature adds

- [V] No Quantinuum-hardware paper using real-time quantum Krylov, sample-based Krylov or QITE for a molecule was found (six targeted searches). The closest are a moment-based Lanczos Green's-function calculation on H1-1 (Greene-Diniz et al., Quantum 8, 1383, 2024) and a Loschmidt-amplitude $\langle\psi|e^{-iHt}\psi\rangle$ time series for a 32-orbital Fermi–Hubbard ladder on H2-1 (Hémery et al., PRX Quantum 5, 030323, 2024), which is exactly the Hadamard-test primitive our coherent arm needs. Quantinuum's own Krylov work is theoretical (arXiv:2211.16097).
- [V] On superconducting hardware the state of the art is Yoshioka et al. (Nat. Commun. 16, 5014, 2025): Krylov diagonalisation of a 56-site Heisenberg model with $D = 10$ and a controlled-initialisation trick instead of controlled time evolution; their $k = 1$ energies lie *below* the exact ground energy, which is the non-variational failure of Check B observed on a real device. IBM's 2026 line has moved to sample-based Krylov (Kirby et al. 2026, 49 qubits; Piccinelli et al. 2025, randomised SKQD).
- [V] Threshold policy is a research question in its own right. Epperly, Lin and Nakatsukasa (SIAM J. Matrix Anal. Appl. 43, 1263, 2022) prove that canonical orthogonalisation with threshold $\epsilon = \Theta(\eta^{1/(1+\alpha)})$, η the matrix-element noise and $\alpha \approx 1/4$ empirically, recovers the lowest eigenvalue with error $O(\eta^{1/(1+\alpha)})$ times a condition number, that the Krylov energy converges exponentially in the number of time steps at a rate set by the gap-to-bandwidth ratio with the grid $t_j = \pi j/\Delta E_{N-1}$, and that the initial overlap must be reasonably large (about 0.1 or more, unlike classical Krylov). Kirby (Quantum 8, 1457, 2024; arXiv:2401.01246) gives non-asymptotic bounds with error *linear* in the circuit error rate, notes that the best threshold is of the order of the noise, and that finite sampling breaks the variational guarantee. Shen et al. (Quantum 7, 1066, 2023) give the real-time Krylov convergence theory, and Klymko et al. (PRX Quantum 3, 020323, 2022) reach chemical accuracy for Cr_2 with about 50 time steps in simulation; Oliveira, Ziems and Glaser (2026) find on BeH_2/H_6 that sampling noise, not ill-conditioning, dominates failures, that a noiseless cutoff of 10^{-6} is best and 10^{-2} over-truncates, and that under noise the rule $\sigma = 2\sqrt{D \ln 2D} \times$ (noise level) worked best; they also propose "imaginary" and "unitary" reliability filters. Nobody reports the fraction

of runs that end below E_0.

- [V] Cheaper coherent variants exist and should be cited: Gaussian-power Krylov (Zhang et al., Quantum 8, 1438, 2024, "orders of magnitude fewer measurements"), mirror subspace diagonalisation (Kanasugi et al. 2025/26, 10–$10^4\times$ lower sampling cost in numerics), rotate-then-threshold (De Vriendt et al. 2026, up to 100× fewer samples).

> **Two Krylov flavours, two cost profiles.** *Coherent* Krylov pays in ancilla-controlled circuits and shots per matrix element but needs no classical diagonalisation beyond $K \times K$. *Sample-based* Krylov (SKQD/SQD) pays nothing for overlaps ($\mathbf{S} = I$ in the determinant basis), needs no ancilla, and pushes the work into a classical eigensolve of 10^3–10^6 dimension. the report chose the second and let the classical step do nearly everything (F7). A paper that shows *where the crossover is*, on one device, under one budget, is the publishable object.

Verdict for our paper. Keep Krylov as the backbone, in both flavours: A2 (full-driver SKQD with classical controls) and A4 (coherent Krylov with error-detected Hadamard tests). Report $\kappa(\mathbf{S})$, the threshold policy, and the fraction of runs below E_0 in every figure. Add QLanczos on top of the QITE arm so that "imaginary-time Krylov" is tested, not just mentioned.

Takeaway. The method is right and already ours. The brief's framing hides the two things that decide success: the shot cost of Hadamard tests and the conditioning of $\mathbf{S}$.

8 Paradigm 3: Adaptive variational methods and generative ansätze

8.1 What the brief says

[P] Hardware-efficient ansätze violate symmetries; fermionic/qubit-ADAPT-VQE grows the circuit from a pool by largest energy gradient, $|\psi^{(k+1)}\rangle = e^{\theta_k \hat{A}_k}|\psi^{(k)}\rangle$; Quantinuum, NVIDIA and pharmaceutical partners use transformer models trained on molecular graphs to predict compact state-preparation circuits, cutting execution time by an order of magnitude relative to manual ADAPT searches.

8.2 What is right

- ADAPT-VQE (Grimsley et al. 2019) and qubit-ADAPT (Tang et al. 2021) are correctly described [G]. Using fermionic excitation generators keeps particle number and S_z exact, which HEA circuits do not [A].
- The Hiverge paper is a Quantinuum paper about machine-designed ansätze and it does report large reductions in two-qubit gates and in H2 emulator/hardware runs with public code ([V], Section 4).

8.3 What is overstated or mixed up

1. **Two projects merged into one sentence.** The Hiverge work is *LLM-driven evolutionary algorithm discovery*: a language model proposes and mutates code for `generate_ansatz()` routines, which are scored on emulators ([V]). The "transformer that predicts circuits" is a different Quantinuum line: ADAPT-GQE, "Learning to prepare molecular ground states

with transformer models" (Koziell-Pipe et al., arXiv:2607.22468, July 2026), whose generated 12-qubit circuits for an imipramine active space were executed on Helios-1 [V]; a secondary summary puts the hardware energy about 200 mHa above CASCI (about 80 mHa on the emulator) with 500 shots per circuit and a symmetry post-selection overhead that grows with size [M]. The generative-eigensolver idea itself is GPT-QE, Nakaji et al. (arXiv:2401.09253, 2024, still a preprint; University of Toronto with NVIDIA co-authors, no Quantinuum involvement; a 4-qubit H_2 run on ibm_kawasaki) [V]. Neither Quantinuum paper reached chemical accuracy on hardware.

2. **"Order of magnitude faster than manual ADAPT"** has no source. The Hiverge paper compares gate counts and energies against ADAPT/UCC baselines, not discovery wall-clock in those terms ([V]); its hardware result is LiH on H2 at -7.8767 ± 0.0031 Ha against FCI -7.8824 Ha, i.e. 5.7 mHa off, with 10^4 shots per circuit and PMSV discarding under 10% [M] (blog; the preprint reports "minimum system requirements for chemical precision"). Do not repeat the factor without a citation.
3. **Optimiser cost is still paid.** ADAPT needs 10^2–10^4 energy evaluations per molecule; on hardware that is the whole HQC budget many times over. In practice the optimisation is done on the emulator and only the final circuit goes to hardware (that is what Hiverge did, [V]). This makes ADAPT a *state-preparation* tool for our purposes, not a hardware algorithm to benchmark.

> **Novelty.** An ADAPT or Hiverge ansatz run on H2 is not a publishable result on its own; Quantinuum has already published it. Its value to us is (i) a credible starting state for the sample-based and QITE arms, (ii) the "variational baseline" row every reviewer will ask for, and (iii) the collaboration hook: the InQuanto/Hiverge team already has the instances (14-qubit H_2O, 20-qubit F_2) and their resource counts ([V]).

Verdict for our paper. Use ADAPT-VQE (or the public Hiverge ansätze) as state preparation and baseline (A7), optimised on the emulator. Describe it accurately in the paper. Do not build the paper's novelty on generative circuit design unless we actually collaborate with that group.

Takeaway. ADAPT is the right baseline and starting state; the "transformer" story conflates two projects and should be rewritten before it goes into any proposal.

9 Paradigm 4: Logical qubits, statistical phase estimation, and error detection

9.1 What the brief says

[P] Quantinuum's logical-qubit demonstrations (colour codes, surface codes, Steane/Bacon–Shor/bivariate-bicycle structures on H2) move GSEE toward fault tolerance; statistical phase estimation (Lin–Lin spectral methods, QCELS) avoids deep coherent QPE by fitting short-time survival amplitudes $\langle\psi_0|e^{-iHt}|\psi_0\rangle$ with Fourier/Prony/matrix-pencil methods; mid-circuit stabiliser checks discard or correct errors so that $\hat{N}$ and $\hat{S}^2$ are preserved.

9.2 Three things that must be separated

(a) Statistical phase estimation is a near-term method. QCELS (Ding and Lin, PRX Quantum 4, 020331, 2023) and the earlier Lin–Tong method (PRX Quantum 3, 010318, 2022)

are designed for the *early fault-tolerant* regime: one ancilla, controlled e^{-iHt} for modest t, many repetitions, and a classical fit [V]. Nothing requires logical qubits; the methods apply to a 10-qubit physical register as to a logical one. The precise requirements [V]: Lin–Tong needs a known lower bound $\eta \leq p_0 = |\langle E_0|\psi_0\rangle|^2$ and no gap, with maximal evolution time $\tilde{O}(1/\epsilon)$ and total evolution time $\tilde{O}(\epsilon^{-1}\eta^{-2})$; QCELS needs $p_0 > 0.71$ and then reaches precision ϵ with maximal time $T_{\max} = \delta/\epsilon$, $\delta = \Theta(\sqrt{1-p_0})$ (so the depth prefactor shrinks as the overlap improves) and Heisenberg-limited total time; for small p_0 it is combined with a Fourier filter and needs a gap $\Delta \gg \epsilon$ and a *relative* overlap ≥ 0.71 inside a window. For HF on the toy $p_0 = 0.988$; for a stretched bond it can fall below 0.71, which is when the filtered variant or a better starting state (ADAPT) is needed. Check E in Section 11 compares QCELS-type fitting with coherent Krylov on identical data.

(a′) It has been run on Quantinuum hardware. [V] Sorathia et al. (arXiv:2510.25675, October 2025, Quantinuum) ran single-ancilla QCELS on H1-1 for plutonium-oxide and hydride active spaces of 3–19 qubits with 100–500 shots per circuit and no mitigation, obtaining 0.7–6.3 mHa against statevector references; Blunt et al. (PRX Quantum 4, 040341, 2023) reached chemical precision with Lin–Tong-type SPE on Rigetti hardware for (4e,4o) spaces. Oumarou et al. (arXiv:2603.15552, March 2026) compared SPE and Krylov subspace diagonalisation fed by the *same* Chebyshev-moment data in emulation (Fe_2S_2, Fe_4S_4, naphthalene): at comparable total shots ($\sim 10^5$) Krylov reached the same precision with about ten times lower polynomial degree (shallower circuits). That is the emulation analogue of our same-data comparison and the prior art we must cite and extend to hardware: the toy's "SPE is more shot-efficient per point" and their "Krylov needs shallower circuits" are compatible, because SPE resolves frequencies through longer evolution times and Krylov through more matrix elements.

(b) Logical-qubit chemistry exists, at the one-logical-qubit scale. [V] Verified demonstrations: the $[[7,1,3]]$ colour code and the $[[12,2,4]]$ Knill code on H2 (arXiv:2404.02280), the $[[16,6,4]]$ tesseract code as four logical qubits and "12 logical qubits" with Microsoft (arXiv:2409.04628), both published together in Nature 654, 349 (June 2026, not 2024); a nonlocal $[[25,4,3]]$ surface-code variant with four logical qubits beyond break-even on H2 (PRL 133, 180601, 2024); magic-state code switching on H2-1 (PRX 15, 041008, 2025); 48–94 logical qubits in Iceberg and concatenated codes on Helios (arXiv:2602.22211); and the C_4-Helix $[[20,2,6]]$ code with a distance-5 surface-code interface on Helios (arXiv:2609.03194). No bivariate-bicycle logical memory on a Quantinuum machine was found; the brief's code list should be corrected. For chemistry: QEC-protected QPE of H_2 with one logical system qubit and one logical ancilla in the colour code on H2-2 (Yamamoto et al. 2025/26, 0.001(13) Ha); Microsoft's two-logical-qubit catalytic-intermediate workflow (2024, press-level detail only [M]). A 14–20 qubit chemistry circuit with thousands of R_{ZZ} gates cannot be run logically today; out of scope for our paper, but the QEC-QPE paper is the reporting model to follow (code and raw shots released at `github.com/CQCL/qec_qpe_chem`).

(c) Syndrome extraction and symmetry post-selection are different. Stabiliser syndromes detect errors in an *encoded* register; symmetry checks (PMSV, particle-number parity) detect errors that *change a conserved quantity* of an *unencoded* chemistry state. The brief writes the first and describes the effect of the second. For us the realistic options, with their measured prices [V], are: PMSV post-selection (Yamamoto et al., Phys. Rev. Research 4, 033110, 2022; in InQuanto as `inquanto.protocols.PMSV`; under 10% discarded in the Hiverge LiH run [M]); parity post-selection (62% discarded in the H_3^+ QPE run at $\sim$ 1 050 two-qubit gates); and the Iceberg $[[k+2,k,2]]$ detection code (Self, Benedetti, Amaro, Nature Physics 20, 219, 2024, on H1-2: 8 logical qubits, 256 layers; $\approx$ 77% discarded around 920 two-qubit gates in

the Bayesian-QPE run; co-compiling the gadgets with the algorithm raised the acceptance of a 22-qubit QAOA from 4% to 33%, Jin et al. 2025/26; a $[[4, 2, 2]]$ variant that converts detected errors into resets avoids post-selection, Chertkov et al. 2026). Iceberg is a research construction, not a product option; PMSV is. All three convert hardware noise into a known acceptance rate instead of an unknown bias [A] (A8 in Section 13), and the discarded shots are still charged.

Verdict for our paper. Add statistical phase estimation as the fourth arm (A5). It costs nothing extra: the coherent-Krylov arm already produces $s(t_k)$; SPE is a different classical post-processing of the same shots and is the honest "QPE-lite" comparison point. Treat logical-qubit GSEE as out of scope and say so in one sentence. Make mid-circuit symmetry checks or Iceberg-style detection the hardware-specific ingredient, applied identically to every arm that uses an ancilla.

Takeaway. Statistical phase estimation is near-term and shot-efficient; logical-qubit GSEE is not yet a platform; syndromes and symmetry checks are different tools and we can only use the second.

10 The mapping pipeline, checked

[P] Active space from CASSCF/DMRG; Jordan–Wigner with fermionic swap networks or Bravyi–Kitaev with point-group Z_2 tapering; TKET synthesises Pauli gadgets directly into $R_{ZZ}(\theta)$, halving two-qubit counts.

- **Active space.** Correct and standard [G]. For the paper, fix the active space *and publish the integrals* (F22). Use the same space for all arms and for the classical controls (CCSD(T), selected CI, DMRG).
- **Mapping.** Jordan–Wigner needs no swap networks on an all-to-all device (Section 7); tapering by Z_2 symmetries works with any mapping, not only Bravyi–Kitaev [A]. The useful extra options are the qubit-efficient encodings of A9.
- **"Halving two-qubit gates."** A weight-w Pauli rotation in CNOT form costs $2(w-1)$ two-qubit gates. With one native R_{ZZ} at the centre of the ladder it costs $2(w-2)+1 = 2w-3$: the saving is exactly one gate, i.e. halving *only* for $w = 2$ [A]. Larger savings come from TKET's phase-gadget and Pauli-gadget synthesis, which merges commuting gadgets and exploits arbitrary angles: Cowtan et al. report an average 54.5% reduction in CX count and 57.7% in two-qubit depth on UCCSD circuits (EPTCS 318, 213, 2020), and the UCC-specific strategy 75.4% (up to 89.9%) in CX depth (arXiv:2007.10515) [V]; in the current stack this is the `GreedyPauliSimp` pass of optimisation level 3, which is off at the default level 2 [V]. Quote the compiled native-gate count per circuit at a stated optimisation level, not a folklore factor. The prototype in Section 12 does this: for the two-qubit model one Trotter step compiles to a handful of ZZPhase gates, and the controlled version used in a Hadamard test to about twice that (Section 12).

> **A per-circuit ledger.** Whatever the compiler does, the paper needs one table: per circuit, N_{1q}, N_{2q} (native ZZPhase), N_m, shots, acceptance rate after post-selection, and HQC from the published formula. The Hiverge paper does this ([V]); the report does not and its own HQC arithmetic is inconsistent (F19–F21).

Takeaway. The pipeline is standard. Remove the swap-network sentence, replace "halving" by compiled counts, and publish the integrals.

Part IV

Toy numerical checks

11 Seven checks on the two-qubit H_2 model

What this is and is not. A small simulation written for this review.
Script: `code/krylov_toy_checks_h2.py` (NumPy/SciPy, fixed seeds).
Results: `code/krylov_toy_checks_h2_results.json`.
Figures: `figures/krylov-conditioning-h2.png` and `figures/spe-vs-krylov-h2.png`.
It uses the same 2-qubit H_2 model as `code/qite_h2.py`: STO-3G, $R = 0.735$ Å, parity mapping, tapered, electronic energy only. Reference values: $E_{\mathrm{FCI}}^{\mathrm{el}} = -1.857275$ Ha, $E_{\mathrm{HF}} = -1.836968$ Ha (HF overlap $|\langle \mathrm{HF}|E_0\rangle|^2 = 0.988$), gap 0.613 Ha, 1-norm $\lambda = 0.988$ Ha. Shot noise is modelled as Gaussian on every Hadamard-test estimate (variance $(1-m^2)/N$ in Checks A–D, $1/N$ in Check E). There is no device noise model. It is a statevector toy that illustrates mechanisms; it is not a hardware result and it does not reproduce anything in the report.

11.1 Check A: conditioning of the coherent Krylov overlap matrix

[N] With $t_k = k\Delta t$ and $|\psi_0\rangle = |\mathrm{HF}\rangle$:

Δt	$K = 2$	$K = 3$	$K = 4$	$K = 5$
0.1	1.2×10^4	$\sim 10^{300}$	$\sim 10^{17}$	$\sim 10^{300}$
0.5	5.1×10^2	$\sim 10^{300}$	$\sim 10^{300}$	$\sim 10^{300}$
1.0	1.5×10^2	$\sim 10^{17}$	$\sim 10^{300}$	$\sim 10^{300}$

HF populates a 2-dimensional invariant subspace of this H, so any $K \geq 3$ Krylov set is exactly linearly dependent and $\mathbf{S}$ is singular to machine precision; values of order 10^{17}–10^{300} are numerical infinities. Even $K = 2$ at $\Delta t = 0.1$ has $\kappa \approx 10^4$. This confirms the report's Sec. 2.2 premise (p. 4, Eq. 8) [R] on the smallest possible example: thresholding is not optional.

11.2 Check B: shot noise, thresholding and non-variational energies

[N] 300 independent noisy reconstructions of $(\mathbf{H}_K, \mathbf{S}_K)$ for $K = 3$, $\Delta t = 0.5$, each Toeplitz element (and each of the 4 non-identity Pauli terms of H) estimated from N shots; canonical orthogonalisation drops Gram eigenvalues below a relative cutoff.

N shots/element	cutoff	median (mHa)	90th pct. (mHa)	P(chem. acc.)	$P(E < E_0 - 1.6\,\mathrm{mHa})$
10^3	10^{-12}	19.1	226	0.06	0.55
10^3	10^{-3}	18.0	123	0.06	0.54
10^3	10^{-1}	17.8	37	0.06	0.20
10^4	10^{-3}	9.4	24	0.07	0.35
10^4	10^{-2}	13.2	21	0.01	0.01
10^5	10^{-12}	4.2	19	0.24	0.44
10^5	10^{-3}	3.3	8.8	0.25	0.32
10^5	10^{-2}	13.0	15	0.00	0.00

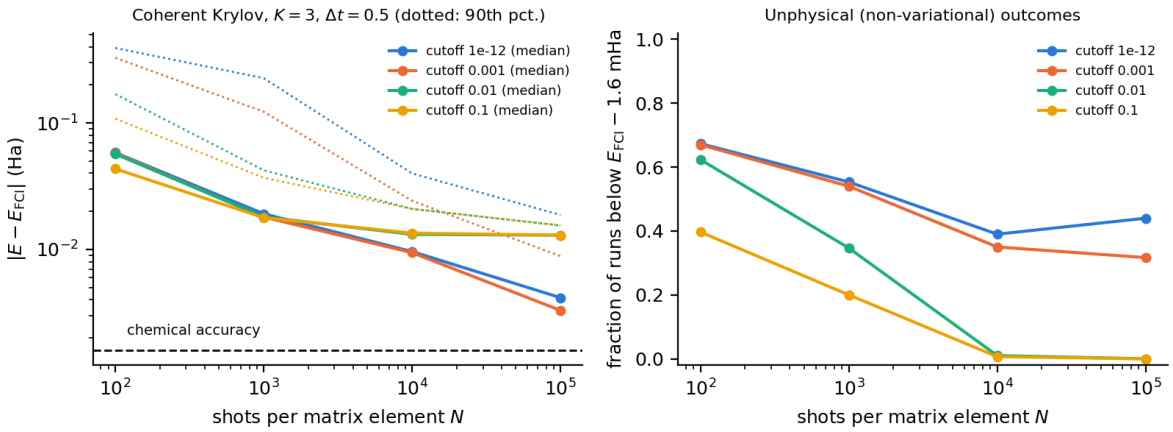


Figure 1: Check B: toy coherent-Krylov on 2-qubit H_2 ($K = 3$, $\Delta t = 0.5$, 300 seeds per point). Left: median (solid) and 90th-percentile (dotted) absolute energy error versus shots per matrix element for four Gram cutoffs. Right: fraction of runs whose energy lies more than 1.6 mHa *below* the exact ground energy, i.e. unphysical outcomes caused by noise amplified through an ill-conditioned $\mathbf{S}$. Statevector toy with Gaussian shot noise; not a hardware result.

Reading: (i) with a weak cutoff, a third to a half of all runs land *below* the true ground energy, which a variational method can never do; this is the "negative-infinity energies" failure the report describes (p. 4). (ii) A strong cutoff ($\geq 10^{-2}$) removes the unphysical outcomes but collapses the rank to 1, i.e. to the HF energy (13 mHa error): regularisation trades noise for bias. (iii) Even at 10^5 shots per element, only a quarter of runs reach chemical accuracy at the best cutoff. On a 2-qubit model. This is the quantitative reason to prefer $\mathbf{S} = I$ sample-based methods or phase-estimation-type fits when the budget is small, and it is the first result a benchmark paper should show.

11.3 Check C: sampled basis versus a classical-only control

[N] Sampling bitstrings from the four Krylov states (10, 100 or 1024 shots each) always yields the support $\{|01\rangle, |10\rangle\}$ and the exact energy. With 1% simulated readout bit-flips the support grows to all four bitstrings; the energy is unchanged because the extra states lie in other symmetry sectors and cannot lower a variational energy. **The classical control, HF plus one connected shell under H with no quantum sampling at all, gives the same support and the same exact energy.** This is flaw F7 in miniature: when the expansion saturates the sector, sampling is redundant. the report's active spaces are larger, but not large enough for the argument to change.

11.4 Check D: arithmetic in the report

[N] HQC (F19): Eq. (9) as printed with $N_{2Q} = 5436$, $N_{\mathrm{meas}} = 12$, 1024 shots gives 11,266 ($N_{1Q} = 0$) to 13,493 ($N_{1Q} = 2N_{2Q}$) HQC per circuit, not 16,568; the printed 16,568 equals $5436 \times 1024/336$; the printed batch total 82,862.17 divided by 6 is 13,810 and divided by 5 is 16,572. With the published formula $5 + C(N_{1q} + 10N_{2q} + 5N_m)/5000$ [V] and $N_{1q} = N_{2q}$, the cost is 12,264 HQC per circuit. "Survival fidelity" (F17): $(1-p)^{5436} = 3 \times 10^{-4} \Rightarrow p = 1.49 \times 10^{-3}$, and $(1-p)^{150} = 0.80$, $(1-p)^{204} = 0.74$.

11.5 Check E: statistical phase estimation versus coherent Krylov on the same data

Both methods consume the signal $s(t_k) = \langle\psi_0|e^{-iHt_k}|\psi_0\rangle$ on a time grid; coherent Krylov additionally needs $h(t_k) = \langle\psi_0|He^{-iHt_k}|\psi_0\rangle$. [N] $K = 24$ points at $\delta t = 0.3$, Gaussian noise of standard deviation $1/\sqrt{N}$ on Re and Im of every point ($\lambda/\sqrt{N}$ for h, treating H as one measurable, which is *optimistic* for Krylov), 300 repetitions. SPE uses the matrix-pencil method with rank 2 (the toy signal has exactly two components, which favours SPE; see the caveat); Krylov uses $K/2 = 12$ basis states and a relative threshold of 10^{-3} on $\mathbf{S}$.

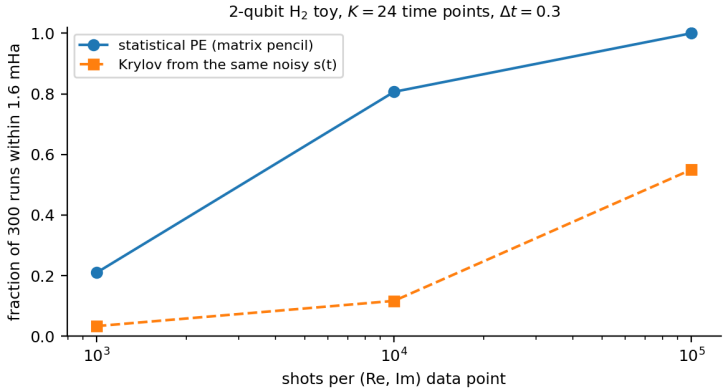


Figure 2: Check E: fraction of 300 noisy runs within chemical accuracy, two-qubit H_2 toy. Statistical PE (matrix pencil) and coherent Krylov are fed the same noisy survival signal; Krylov also gets the noisy H-weighted signal.

	Statistical PE			Coherent Krylov, same data		
Shots per point	median $\lvert\Delta E\rvert$	within 1.6 mHa	below E_0	median $\lvert\Delta E\rvert$	within 1.6 mHa	below E_0
10^3	4.2 mHa	21%	53%	46 mHa	3%	78%
10^4	0.85 mHa	81%	8%	7.3 mHa	12%	65%
10^5	0.25 mHa	100%	0%	1.4 mHa	55%	26%

Reading the table. (i) For the same noisy data, fitting frequencies is far more shot-efficient than solving the generalised eigenproblem: at 10^4 shots per point SPE is within chemical accuracy four times out of five, Krylov one time in eight. (ii) Krylov's failures are mostly *non-variational* (energies below E_0), the signature of noise amplified by small eigenvalues of $\mathbf{S}$ (as in Check B); SPE errors are symmetric and shrink with N. (iii) At 10^5 shots per point and 24 points the total is 4.8×10^6 shots of Hadamard-test circuits; at 300 two-qubit gates that is roughly 3.5×10^5 HQC (Check G), i.e. seventy times a 5 000 HQC budget. Both methods need *much* shorter circuits or far fewer points on hardware; the sample-based arm exists precisely because it has no Hadamard tests.

> **Caveats of Check E.** Two components in the signal and a known rank make matrix pencil look better than it will on a real molecule, where the rank and the number of points must be chosen and QCELS-type least-squares fitting of the dominant frequency is the robust choice [G]. Krylov was given an optimistic noise model for $h(t)$ and a fixed threshold; a tuned threshold narrows the gap but does not close it (Check B). None of this is a hardware statement.

11.6 Check F: how long an iterative-QPE circuit is

[N] Kitaev's iterative phase estimation on the exact ground state of the toy (so that only the depth question is tested), energy window $[-2, 0]$ Ha, 12 bits, 50 shots per bit: the estimate is E_0 to 0.15 mHa, below chemical accuracy, as it should be. The price is that the round for the least-significant bit applies the unit evolution $2^{11} = 2048$ times coherently, and the m-th bit 2^{m-1} times. On hardware each unit is a full Trotter step of the tapered Hamiltonian (hundreds of two-qubit gates); at 10^{-3} error per gate the survival probability of a 2048-step circuit is zero for every practical purpose. This is the quantitative content of Section 6.

11.7 Check G: HQC envelope for one 8-qubit instance

[N] Arithmetic from the published formula HQC $= 5 + C(N_{1q} + 10N_{2q} + 5N_m)/5000$ with $N_{1q} = 2N_{2q}$ and N_m = number of measured qubits:

Circuit type	N_{2q}	shots	HQC/circuit	Comment
Sampling circuit (sample-based arm)	150	10^3	373	no ancilla; ~ 13 circuits fit in 5 000 HQC
Hadamard test (coherent Krylov, SPE)	300	10^3	734	~ 6 time points per 5 000 HQC
Hadamard test	300	10^4	7 295	one point exhausts the budget
QITE prefix after several steps	600	10^3	1 453	grows with step count
SPE, 24 points, Re and Im	300	10^4 each	350 160 total	Check E at its best setting

The envelope says what the emulator stage must establish before hardware: how few time points and shots each arm can survive on. Checks B and E suggest that the Hadamard-test arms need $\geq 10^4$ shots per point for chemical accuracy, which is incompatible with a 5 000 HQC budget at 300 two-qubit gates. Either the circuits must be an order of magnitude shorter (smaller instance, tapering, compiled gadgets) or the hardware budget must be an order of magnitude larger; this is the first go/no-go question of the strategy.

Takeaway. The toy confirms both halves of the report's central argument – coherent Krylov is shot-hungry and non-variational under noise, and $\mathbf{S} = I$ removes that problem – but also its central weakness: at small size the classical expansion alone gives the answer. It adds two facts the brief lacks: phase-estimation-type fitting of the same data is far more shot-efficient than the eigenproblem, and iterative QPE is a depth problem, not a qubit problem.

12 A circuit-level prototype of the four arms

The toy checks of Section 11 model shot noise as Gaussian perturbations of matrix elements. The script `code/qkrylov_quantinuum.py` goes one level down: it builds the actual circuits of the four arms in pytket, compiles them to the H-series native gate set, counts native gates, costs every circuit with the published HQC formula, and runs them either on a local statevector backend with sampled shots (what was done here) or, through the same interface, on Quantinuum's emulators and hardware via `qnexus` (code path written against the documented API of Section 2, not executed from this server). It is the seed of the WP2 simulation code.

12.1 What it builds

- **Instances.** `h2-2q`: the tapered two-qubit H_2 of all toy checks (HF = $|01\rangle$, overlap 0.988). `h2-4q`: the Jordan–Wigner four-qubit H_2 at 0.8 Å of the QITE guide (15 Pauli terms, HF = $|1100\rangle$, sector $N = 2$, $S_z = 0$), whose two-electron sector has dimension 4.
- **Time evolution.** Second-order Trotter product of Pauli rotations with a fixed Trotter time step (0.25 Ha^{-1}), so a circuit for time t has $\lceil t/0.25 \rceil$ steps and its cost grows linearly with t; the error against the exact propagator is checked on every run (1.6×10^{-3} in the survival amplitude over the longest grid for `h2-2q`).
- **Hadamard tests.** One ancilla in $|+\rangle$, controlled Trotter evolution built from controlled Pauli rotations (basis change, CX ladder, controlled-R_z on the ladder end, undo: $2w$ two-qubit gates for a weight-w string before optimisation), ancilla read in X (real part) or Y (imaginary part). The register is read in a qubit-wise-commuting Pauli basis so that every Hamiltonian term sharing that basis is obtained from the same shots ($\langle X_{\text{anc}} \otimes P \rangle = \text{Re}\langle \psi_0 | PU | \psi_0 \rangle$), and the survival amplitude $s(t) = \langle \psi_0 | U | \psi_0 \rangle$ comes free from the ancilla alone. Two bases per time point suffice for `h2-2q` (ZZ, XX), five for `h2-4q`.
- **Sampling circuits** for the sample-based arm: the same Trotter circuits without ancilla, read in the computational basis; bitstrings outside the sector are discarded (the free symmetry check of F6), one connected shell is added classically, and H is diagonalised in the result. The classical control (HF plus one shell, no quantum sampling) is computed alongside.
- **QITE** at circuit level: each imaginary-time step is fitted per Hamiltonian term from Pauli expectation values measured on the current circuit (basis-rotation circuits, grouped), the fitted unitary is appended as Pauli rotations, and the circuit grows step by step; ridge 0.1 on S (the value the QITE guide found necessary at low shot counts), pool of odd-Y strings (weight-4 strings for the four-qubit instance, which generate the double excitation).
- **Statistical phase estimation**: a QCELS-type single-frequency least-squares fit of $s(t_k)$ with the search window set from the HF energy ($[E_{\text{HF}} - 0.5, E_{\text{HF}} + 0.1]$ Ha, never from the answer), run twice: on exactly the Krylov arm's time points (same data) and on its own longer grid ($3K$ points, Z-basis circuits only, so it pays for the ancilla readout but not for the Hamiltonian terms).
- **Thresholds** for the Krylov arm: the noise-aware absolute rule of Oliveira et al. (2026), $\sigma = 2\sqrt{K \ln 2K}/\sqrt{\text{shots}}$ (default), or a fixed relative cutoff (Check B).

12.2 Compilation, counting and costing

Every circuit goes through DecomposeBoxes, FullPeepholeOptimise, rebase to {PhasedX, Rz, ZZPhase} and RemoveRedundancies, i.e. the gate set and the main passes of Quantinuum's default optimisation level 2 [V]. The script records N_{1q}, N_{2q} (ZZPhase), N_m, depth and two-qubit depth per circuit (a per-circuit ledger in the results file) and converts them to HQC with $5 + C(N_{1q} + 10N_{2q} + 5N_m)/5000$. Two consequences worth knowing before reading any number: (i) on *two* qubits every unitary compiles to at most three ZZPhase gates, so the sampling circuits of `h2-2q` cost 3 two-qubit gates whatever the evolution time and the Hadamard tests 19; the cost growth with t that the strategy is about only appears from four qubits on; (ii) the HQC axis is exact arithmetic on compiled counts, but the "noise" is sampling noise only, with no gate errors, so every accuracy number is an upper bound on what the hardware-hosted emulator will give.

12.3 Backends and how to move to Quantinuum

1. `-backend statevector` (used here): pytket's exact statevector, measurement probabilities computed exactly, shots drawn from a multinomial; `shots=None` returns exact expectation values (used for the noiseless checks).
2. `-backend qnexus -device H2-1LE`: noiseless cloud emulation within the free simulation quota; then `H2-Emulator` (noisy, time-metered) for tuning; then `H2-1E` (hardware-hosted noise model, HQC-metered) for the forecast; then `H2-1`/`H2-2`. The class uploads each circuit, compiles it server-side at a chosen optimisation level, executes with a shot count and optional `max_cost`, and converts the returned `BackendResult` counts to the same dictionary the local backend produces, so every arm's code is unchanged. A helper calls `qnexus.circuits.cost()` for a server-side HQC estimate before spending anything. Requirements: `pip install qnexus`, one interactive `qnx.login()`, a Nexus project. This path has not been executed from this server (no credentials); it was written against the documented API and must be smoke-tested on `H2-1SC` (the free syntax checker) first.
3. Still to add before an emulator campaign: PMSV-style symmetry post-selection on the register of the Hadamard-test circuits, the leakage-detection option, batching of circuits into one job (one job per circuit as written would pay the 5 HQC overhead every time), and Helios (`HeliosConfig`, Guppy/HUGR) once H2 results exist.

12.4 Results on the local backend

[N] Runs on the local backend: `h2-2q` with 50 seeds per shot budget (QITE: 5 seeds), `h2-4q` with 20 seeds (QITE: 3); $K = 4$ Krylov time points at $\delta t = 0.5$, Trotter step 0.25 (second order), noise-aware Krylov threshold $2\sqrt{K \ln 2K}/\sqrt{\text{shots}}$ plus two relative cutoffs, QCELS window from the HF energy, SPE grids of $K_{\text{spe}} = 12$ (`h2-2q`) and 8 (`h2-4q`) points, QITE with $\Delta\tau = 0.2$, ridge 0.1, 8 steps (`h2-2q`) and 6 steps (`h2-4q`). Every seed re-samples every circuit; "within chem. acc." is the fraction of seeds with $|E - E_{\text{FCI}}| < 1.6$ mHa and "below E_0" the fraction more than 1.6 mHa *below* the exact energy (non-variational outcomes). Results files: `code/qkrylov_h2-2q_results.json`, `code/qkrylov_h2-4q_results.json`.

Noiseless sanity checks. Trotter error in the survival amplitude over the longest grid: $1.6e-03$ (`h2-2q`), $1.2e-03$ (`h2-4q`). With exact expectation values: Krylov -0.14 / 0.25 mHa (rank 2 / 2), QCELS on the $K = 4$ Krylov points 5.96 / 8.78 mHa (four points are too few to resolve the frequency), QCELS on its own grid 0.49 / -6.99 mHa, matrix pencil 0.27 / 0.25 mHa (the eight-point SPE grid of `h2-4q` is too short for the single-frequency fit; a twelve-point test run gave +0.15 mHa, at the price of circuits with up to 2 300 ZZPhase gates); QITE converges to 0.05 mHa after 8 steps on `h2-2q` and to 0.37 mHa after 6 steps on `h2-4q` (noiseless trajectories 20.31, 9.74, 4.64, 2.21, 1.05, 0.50, 0.24, 0.11, 0.05 and 23.30, 11.76, 5.90, 2.95, 1.48, 0.74, 0.37 mHa). The classical control (HF plus one shell) is exact on both instances with a subspace of dimension 2: in both sectors the only configuration coupled to HF is the double excitation, which is F7 in miniature again.

Compiled cost ledger. Native two-qubit (ZZPhase) counts after compilation (optimisation level 2 passes); the full ledger with single-qubit counts, depths and HQC per circuit is in the results files.

Instance	Sampling circuit $U(t)\|\mathrm{HF}\rangle$ (ZZPhase)	Hadamard test, $m = 1, 2, 3$ (ZZPhase; bases per point)	Extra SPE points $m \geq K$ (ZZPhase)	QITE circuit after s steps (ZZPhase)
two-qubit H_2	$t = 0.5$: 3, $t = 1.0$: 3, $t = 1.5$: 3	19, 19, 19, 19, 19 (2 bases)	$m = 4$: 19, $m = 5$: 19, $m = 6$: 19, $m = 7$: 19, ...	0, 2, 2, 2, ...
four-qubit H_2	$t = 0.5$: 90, $t = 1.0$: 174, $t = 1.5$: 258	216, 216, 216, 216, 424, 424, 424, 424, 632, 632, 632, 632 (5 bases)	$m = 4$: 840, $m = 5$: 1048, $m = 6$: 1256, $m = 7$: 1464	0, 25, 47, 69, ...

On two qubits the compiler collapses every circuit to its minimal form (3 ZZPhase for any evolution time, 19 for any Hadamard test), so the cost axis there is flat; on four qubits the counts grow linearly with the evolution time, as they will on any larger instance: one second-order Trotter step of the 14-term Hamiltonian costs 84 ZZPhase gates as a plain circuit and about 208 as a controlled one, so the $m = 3$ Hadamard test already has 632 two-qubit gates and the $m = 7$ SPE point 1464. At 10^3 shots the Krylov arm costs 38203 HQC on `h2-4q` against 1626 for the sampling arm, a factor of 23; this is Check G's budget wall in compiled numbers, before any gate noise.

Accuracy versus budget, `h2-2q`.

Arm (cell: HQC; median $\|\Delta E\|$; within chem. acc. / below E_0)	10^2 shots	10^3 shots	10^4 shots
SKQD, sample + 1 shell	24; 0.00 mHa; 100% / 0%	60; 0.00 mHa; 100% / 0%	420; 0.00 mHa; 100% / 0%
Krylov, noise-aware threshold	138; 10.44 mHa; 4% / 20%	842; 8.22 mHa; 4% / 0%	7884; 8.05 mHa; 0% / 0%
Krylov, relative cutoff 10^{-3}	138; 51.22 mHa; 6% / 84%	842; 11.14 mHa; 10% / 70%	7884; 2.57 mHa; 30% / 64%
Krylov, relative cutoff 10^{-2}	138; 31.76 mHa; 6% / 84%	842; 6.35 mHa; 14% / 46%	7884; 7.71 mHa; 16% / 6%
SPE (QCELS) on the Krylov data, $K = 4$	69; 41.21 mHa; 0% / 46%	423; 12.00 mHa; 4% / 28%	3956; 5.66 mHa; 14% / 8%
SPE (QCELS), own grid, $K = 12$	254; 8.82 mHa; 8% / 46%	1550; 2.82 mHa; 34% / 24%	14510; 1.11 mHa; 80% / 6%
QITE after 8 steps (cumulative HQC; final median; within chem. acc.)	478; 18.05 mHa; 0%	1141; 6.77 mHa; 0%	7761; 1.71 mHa; 40%

All budgets (10^2, 300, 10^3, 3000, 10^4 shots per circuit) are in the results file and in the figure.

Accuracy versus budget, `h2-4q`.

Arm (cell: HQC; median $\lvert\Delta E\rvert$; within chem. acc. / below E_0)	300 shots	3000 shots	10^4 shots
SKQD, sample + 1 shell	502; 0.00 mHa; 100% / 0%	4837; 0.00 mHa; 100% / 0%	16078; 0.00 mHa; 100% / 0%
Krylov, noise-aware threshold	11566; 13.90 mHa; 5% / 20%	114308; 10.23 mHa; 0% / 5%	380676; 11.52 mHa; 0% / 0%
Krylov, relative cutoff 10^{-3}	11566; 25.39 mHa; 5% / 65%	114308; 13.75 mHa; 15% / 50%	380676; 8.20 mHa; 0% / 60%
Krylov, relative cutoff 10^{-2}	11566; 10.23 mHa; 15% / 40%	114308; 8.76 mHa; 15% / 25%	380676; 9.57 mHa; 0% / 10%
SPE (QCELS) on the Krylov data, $K = 4$	2312; 23.07 mHa; 0% / 70%	22849; 10.70 mHa; 10% / 5%	76092; 11.01 mHa; 10% / 5%
SPE (QCELS), own grid, $K = 8$	10602; 7.60 mHa; 5% / 50%	105393; 6.14 mHa; 10% / 90%	351148; 6.99 mHa; 0% / 100%
QITE after 6 steps (cumulative HQC; final median; within chem. acc.)	8339; 6.49 mHa; 0%	78033; 2.63 mHa; 33%	258723; 1.75 mHa; 33%

All budgets (300, 10^3, 3000, 10^4 shots per circuit) are in the results file and in the figure.

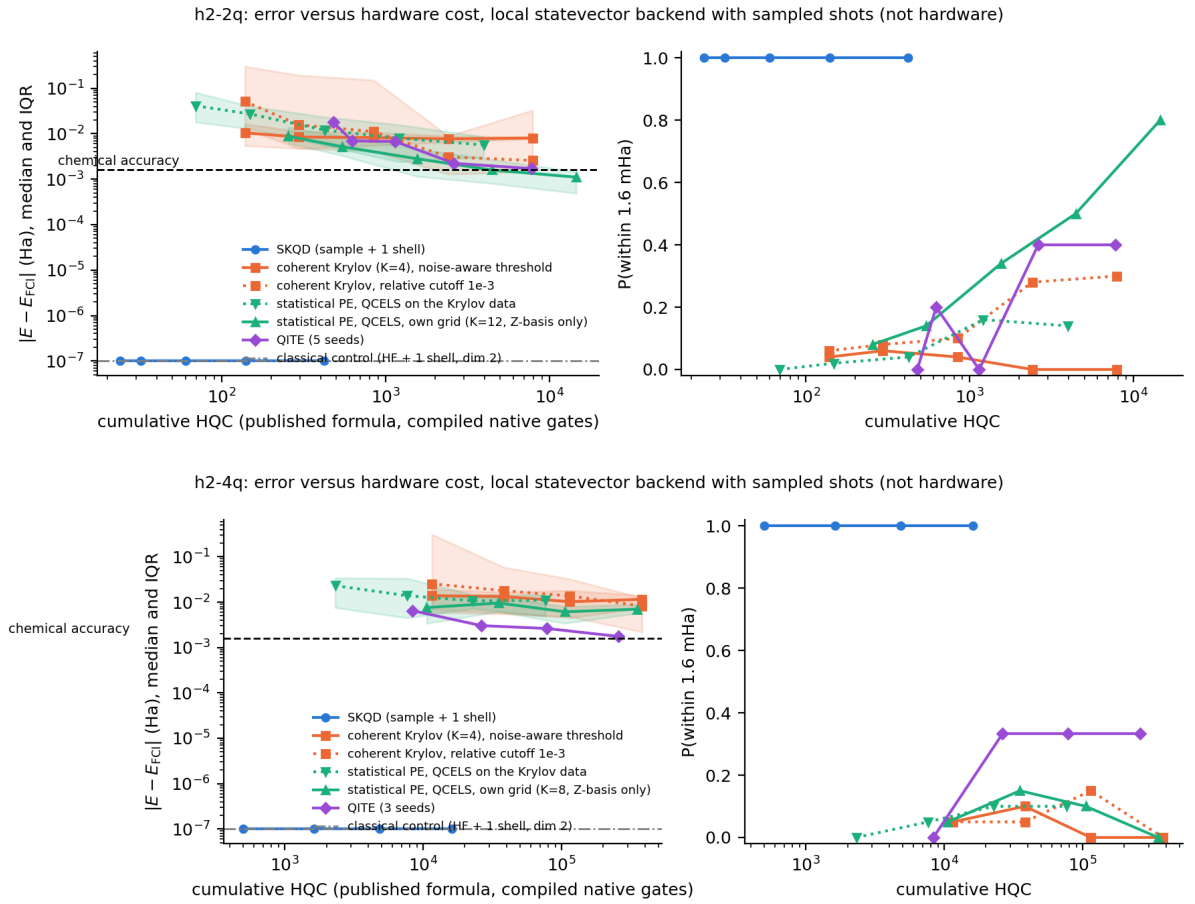


Figure 3: Prototype of the paper's central figure, produced by `code/qkrylov_quantinuum.py` on the local backend (sampling noise only, no gate errors): median energy error with interquartile band (left) and probability of chemical accuracy (right) against cumulative HQC computed from compiled native gate counts, for the two-qubit (top) and four-qubit (bottom) H_2 instances. Dashed line: chemical accuracy; dash-dotted: the classical control.

What the prototype shows.

1. **Sampling is cheap and, at this size, trivially exact.** The SKQD arm reaches the exact energy at every budget from 24 HQC upwards because HF plus one shell already spans the sector; the instance decides nothing about the quantum step (F7), but the arm's cost structure (short circuits, no ancilla, $\mathbf{S} = I$) is what makes it the only arm comfortably inside a 10^3–10^4 HQC budget on four qubits.
2. **Threshold policy decides what the Krylov arm reports, and neither policy is good on these instances.** The noise-aware rule keeps a single direction at every budget (mean retained rank 1), never produces an energy below E_0 at $\geq 10^3$ shots, and is stuck at a bias of about 8.05 mHa; the relative cutoffs reach chemical accuracy in up to 30% of runs at the largest budget but are non-variational in 84% of runs at 10^2 shots. Pre-registering several policies and reporting the non-variational fraction under each, as Section 14 asks, is the only honest way to present this arm.
3. **Statistical phase estimation on its own grid is the most shot-efficient Hadamard-test arm on two qubits** (1.11 mHa median, 80% within chemical accuracy at 10^4 shots per point), and the same fit on the Krylov arm's four points is useless (5.66 mHa): the method needs evolution times that resolve the frequency. On four qubits those long circuits are the most expensive ones in the ledger, which is Oumarou et al.'s depth-versus-degree trade-off appearing in compiled gate counts.
4. **QITE is competitive per HQC on two qubits** (1.71 mHa median after 8 steps at 10^4 shots per basis, cumulative 7761 HQC, two ZZPhase gates per step) and still cheap on four qubits (25 ZZPhase per step), but its accuracy at low shot counts is limited by the noise in the fitted coefficients (the ridge trade-off of the QITE guide), and the number of measurement bases per step grows quickly with the pool.
5. **Everything above is sampling noise only.** On hardware the 600–2 300-gate Hadamard-test circuits of the four-qubit instance would lose most shots to gate errors or to post-selection; the emulator stage (WP2) must repeat this sweep with the device noise model, and the circuits must be shortened (GreedyPauliSimp, symmetry tricks that remove the ancilla, fewer Trotter steps with error checks) before any of the Hadamard-test arms is submitted.

Takeaway. The prototype turns the strategy's cost axis into compiled native-gate counts and HQC on real Quantinuum-style circuits, and its arms run unchanged on the local backend and on Nexus; what it cannot do locally is model gate noise, which is what the emulator stage is for.

Part V
Alternatives and strategy

13 Alternative and complementary approaches

For each approach: the idea, expected benefit relative to the report's compact-driver SKQD, cost, risk, and which Quantinuum features it exploits (hardware facts as in Section 2).

A1. Sample-based diagonalisation done properly (SQD/QSCI with configuration recovery)

Idea. Keep the $\mathbf{S} = I$ structure but sample from a state with real correlation content (a truncated UCC or an ADAPT/Hiverge-grown circuit, or a full-H Trotter state) and use the IBM-style configuration-recovery loop: estimate orbital occupations from the current Ritz vector, repair bitstrings that violate the sector, resample subspaces, iterate classically. *Benefit.* Removes the arbitrary frequency filter (F6), gives an established name and citation base (F24), scales to 30–60 qubits where the expansion cannot saturate (F7). *Cost.* Deeper state-preparation circuits (10^2–10^3 2Q gates); classical eigensolves of 10^4–10^6 dimension. *Risk.* Already heavily published by IBM on superconducting hardware; novelty must come from the trapped-ion angle (fidelity allows deeper preparation; all-to-all removes SWAP overhead) and from the controls. *Quantinuum features.* High 2Q fidelity, all-to-all connectivity, 56–98 qubits, InQuanto for Hamiltonians.

A2. Full-driver SKQD with the convergence guarantee, plus adaptive sampling

Idea. Evolve under the full tapered H (first-order Trotter, few steps), so that Yu et al.'s theorem applies; allocate shots across time points with the marginal-discovery rule in your notes; select configurations by residual coupling to the current Ritz vector rather than by HF coupling. *Benefit.* Turns the heuristic into a method with a statement; directly fixes F1, F5, F6. *Cost.* More 2Q gates per circuit than the compact driver (all ≈ 200 pruned terms); 1 or 2 extra classical rounds for adaptive allocation. *Risk.* Gives up part of the "single batch" argument if allocation is adaptive; may show that the driver choice does not matter at small size (a result in itself). *Quantinuum features.* Nexus batching, all-to-all (Trotter of long Pauli strings without routing), emulators for the pilot.

A3. QITE and QITE-generated Lanczos (your existing arm)

Idea. Iteratively fit a unitary to each imaginary-time step from measured S and b (Motta et al. 2020); then use the QITE states at several τ as a Krylov (QLanczos) basis. *Benefit.* A genuinely different algorithmic family (filter instead of subspace), gives a prepared state not just an energy, and the QLanczos variant yields a coherent Krylov arm whose basis is by construction well-conditioned in the direction of the ground state. Your `qite_h2.py` already shows the shot-noise/ridge trade-off (10^3 shots: 151 mHa plateau; 10^5 shots: 2 mHa; ridge 0.1 rescues 10^3 shots to 17 mHa). *Cost.* Many sequential rounds (each needs the device), circuit depth grows with steps, and the pool size grows exponentially with domain size. *Risk.* Cloud latency per round; on > 8 qubits the local-domain approximation may stall. *Quantinuum features.* High fidelity for accumulated depth; conditional logic/real-time feedback could in principle run small

QITE updates inside one job (to verify whether Nexus supports classical linear solves in-loop; Helios advertises a real-time control engine).

A4. Coherent quantum Krylov with error-detected Hadamard tests

Idea. Measure $\mathbf{S}$ and $\mathbf{H}_K$ with a single ancilla, exploiting the Toeplitz structure (only K distinct elements, not K^2), and protect the ancilla and register with mid-circuit symmetry checks (particle number, parity) that discard faulty shots; reset and reuse the ancilla between elements. *Benefit.* The "prohibitive" controlled-Trotter cost (F12) is far smaller after tapering/pruning (a 200-term step on 8 qubits is a few hundred 2Q gates, feasible at 99.9%); and it provides the honest coherent-Krylov baseline the report lacks. *Cost.* Shots: Checks B and E say 10^4–10^5 per element for chemical accuracy; post-selection multiplies cost by 1/(acceptance). *Risk.* Conditioning: needs a declared regularisation policy; may simply lose to A1/A2 at fixed budget (which would be a clean result). *Quantinuum features.* Mid-circuit measurement, qubit reuse, conditional operations, all-to-all (controlled Pauli gadgets without routing).

A5. Short-circuit phase estimation (RPE / QCELS-type)

Idea. Estimate E_0 from the time series $\langle\psi_0|e^{-iHt}\psi_0\rangle$ measured with one ancilla, using robust phase estimation or least-squares fitting of a few complex exponentials (QCELS); no eigenproblem, no $\mathbf{S}$. *Benefit.* Heisenberg-limited shot scaling and provable error bounds given overlap $|\langle\psi_0|E_0\rangle|^2 > 1/2$; the natural "QPE-lite" arm; on the toy it is 4–7× more likely to reach chemical accuracy than Krylov from the same data (Check E). *Cost.* Controlled evolution for several t, deeper than Krylov at the longest t; but the data are the same Hadamard-test circuits as A4, so as a fourth arm it is free. *Risk.* Overlap requirement fails for strongly correlated instances; depth. *Quantinuum features.* High fidelity, ancilla reuse; same error-detection as A4. (Verify the specific QCELS/RPE references before citing.)

A6. Observable dynamic mode decomposition / filter diagonalisation

Idea. Use the same time series as A5 but extract eigenvalues by dynamic mode decomposition (Shen, Camps, Szasz et al., Quantum 9, 1836, 2025 [V]) or filter diagonalisation (Parrish and McMahon, arXiv:1909.08925; Klymko et al. 2022), Hankel-matrix methods like the matrix pencil of Check E, which are robust to noise through rank truncation. *Benefit.* Reuses A5 data; gives excited states too; Cortes and Gray (Phys. Rev. A 105, 022417, 2022) show how Hamiltonian symmetries let one avoid the Hadamard test in some variants [V]. *Cost.* None beyond A5. *Risk.* Fewer hardware demonstrations. *Quantinuum features.* as A5.

A7. ADAPT-VQE / Hiverge-discovered ansatz as the Quantinuum-native baseline

Idea. Use the Hiverge paper's own evolved `generate_ansatz()` routines (public repository) or standard ADAPT-VQE as (i) the variational baseline and (ii) the state-preparation circuit for sampling in A1. *Benefit.* Immediate credibility and a natural collaboration hook with the Hiverge/InQuanto team; the H_2O 14-qubit and F_2 20-qubit instances already have published resource counts to compare against. *Cost.* Classical optimisation (10^3–10^4 evaluations) before hardware. *Risk.* Not novel on its own (Section 8). *Quantinuum features.* InQuanto pools, CUDA-Q emulation, H2 native compilation.

A8. Error detection with mid-circuit measurement

Idea. Beyond PMSV post-selection, encode the register in a lightweight detection code (the Iceberg $[[k+2, k, 2]]$ code demonstrated on H-series by Self et al. 2024, to verify) or use ancilla-mediated particle-number checks at intervals, discarding shots that flag an error. *Benefit.* Converts hardware noise into a known acceptance rate instead of unknown bias; a distinctive trapped-ion capability that superconducting SQD papers cannot match (Section 9). *Cost.* 2 extra qubits and some 2Q gates per check; shots divided by acceptance. *Risk.* Overhead may exceed benefit at 8–16 qubits; needs Quantinuum compiler support. *Quantinuum features.* Mid-circuit measurement, conditional logic, qubit reuse, all-to-all.

A9. Qubit-efficient and symmetry-adapted encodings

Idea. Tapering (already used); seniority-zero / paired encodings (one qubit per spatial orbital) for near-equilibrium cases; qubit-efficient CI encodings that map D determinants to $\lceil \log_2 D \rceil$ qubits (Yoffe et al. 2025, cited by Hiverge as ref. 72). *Benefit.* Larger active spaces at the same qubit count; sector violations become impossible by construction. *Cost.* Non-local Hamiltonians; more complex circuits. *Risk.* Paired encodings lose accuracy at dissociation. *Quantinuum features.* All-to-all connectivity makes non-local encodings cheap.

13.1 Comparison and ranking

Scores are my judgement [A] on a 1–5 scale (5 = best). "Novelty" is novelty of a paper built around the item with Quantinuum; "Feasibility" is within ∼4 months with emulator access and a modest hardware budget.

ID	Approach	Novelty	Feasib.	Shot cost	Hardware feature exploited
A1	SQD/QSCI with recovery, deep prep	3	4	low	fidelity, all-to-all, qubit count
A2	Full-driver SKQD + adaptive shots + residual selection	4	5	low	batching, emulators
A3	QITE / QLanczos	3	3	high	fidelity for depth; real-time control (verify)
A4	Error-detected coherent Krylov	4	3	high	mid-circuit meas., reuse, conditional ops
A5	RPE / QCELS (free fourth arm on A4 data; precedent on H1-1)	3	5	medium	fidelity, ancilla reuse
A6	ODMD / filter diagonalisation	4	3	medium	as A5
A7	ADAPT / Hiverge ansatz baseline	1	5	medium	InQuanto, emulators
A8	Iceberg / symmetry error detection	4	3	medium	mid-circuit meas., conditional logic
A9	Qubit-efficient encodings	3	4	low	all-to-all
A10	Measurement-cheap coherent variants (Gaussian-power, mirror, rotate-then-threshold)	3	3	medium	as A4

Ranking for the paper. The combination with the best novelty-times-feasibility is a **four-arm, budget-matched benchmark**: A2 (sample-based arm, with classical controls) versus A4 (coherent Krylov arm with error detection) versus A3 (QITE/QLanczos arm, your existing work) versus A5 (statistical phase estimation, computed from the A4 data at no extra hardware

cost), with A7 as state preparation and baseline, and A8 as the hardware-specific ingredient that distinguishes the paper from IBM's SQD line. A6 is an optional post-processing variant of A5.

13.2 Verdict table for the brief's paradigms

Paradigm (brief)	Role in our paper	Hardware feature used	Status of the brief's description
1. QPE + DF/THC, IQPE	One row in a cost table ("what full QPE would need"); no runs	none (fault-tolerant)	correct as road map, irrelevant to the budget; "no loss of precision" hides 2^m depth
2. Krylov / QLanczos	Backbone: sample-based arm (A2) and coherent arm (A4); QLanczos on top of QITE (A3)	all-to-all; MCMR for ancilla reuse and checks	correct method; "Quantinuum favours it" unsupported; swap-network sentence backwards; cost and conditioning omitted
3. ADAPT / generative	State preparation and variational baseline (A7), optimised on the emulator	emulators, InQuanto, native compilation	ADAPT correct; "transformer, 10×" conflates Hiverge with GQE, unsourced
4. Logical GSEE / SPE / syndromes	SPE as fourth arm (A5, free from the A4 data); error detection (A8) as the hardware-specific ingredient; logical qubits out of scope	MCMR, conditional logic, qubit reuse	SPE correct and near-term; logical-qubit claims partly unverifiable; syndromes $\neq$ symmetry checks

Takeaway. No single algorithm is the "better" one; the publishable object is the comparison under identical budgets, with the hardware's mid-circuit measurement used for error detection in the arms that need an ancilla.

14 Future strategy: a publishable paper with Quantinuum

14.1 Novelty and prior art

A targeted search on 15 October 2026 (about 45 queries and fetches; not a systematic review, so novelty confidence is medium) found [V]:

- **No budget-matched, multi-arm hardware comparison.** The only paper that ran QITE, QLanczos and VQE on the same hardware is Yeter-Aydeniz et al. (arXiv:2102.05511, 2021; IBM, 1–4 qubits, LiH/NaH/KH/RbH, unmatched budgets; QLanczos numerically unstable at four qubits). The only SPE-versus-Krylov comparison is Oumarou et al. (arXiv:2603.15552, 2026), in emulation with shot noise only. Raisuddin et al. (arXiv:2512.01012, 2025) compare SQD on hardware with classical methods at commensurate resources over 745 reaction energies and find large statistical deviations.

- **No Quantinuum-hardware Krylov, SKQD or QITE chemistry paper**; the trapped-ion SKQD paper (Rosanowski et al. 2025, Schwinger model) used the Mainz processor; the only trapped-ion imaginary-time run is Iceberg-encoded probabilistic ITE on spin-defect models (Nishi et al. 2025, H1-1).
- **No published statistic for the non-variational fraction** of noisy Krylov runs, although the effect is documented (Yoshioka et al. 2025 hardware energies below the ground energy; Kirby 2024; Oliveira et al. 2026).

The paper's novelty is therefore the combination: four arms on one trapped-ion device, one HQC budget, identical Hadamard-test shots feeding arms (ii) and (iv), symmetry/error detection applied identically, repeats with inferential statistics, and the non-variational fraction per threshold policy as a reported quantity. Prior art to cite and differentiate from: 2102.05511, 2603.15552, 2512.01012, 2510.25675 (QCELS on H1-1), 2306.16608 and 2505.09133 (Quantinuum QPE with detection/correction), 2407.14431 (Yoshioka), 2501.09702 and 2603.03496 (SKQD), 2604.11532 (threshold policies).

14.2 What the literature changes in the plan

1. **Budget on submitted shots, including those discarded.** Iceberg discarded $\approx 77\%$ at ~ 900 two-qubit gates and parity post-selection 62% at $\sim 1\,050$; HQC are charged before post-selection. Report shots per *accepted* sample and HQC per accepted result.
2. **Pre-register at least two Krylov threshold policies** (Oliveira et al.'s $\sigma = 2\sqrt{D \ln 2D} \times$ noise; Kirby's $\epsilon \sim$ noise rate; a fixed relative cutoff as in Check B) and report the non-variational fraction under each. The same policies apply to QLanczos.
3. **Set expectations from the Quantinuum precedents**: QCELS at 9–19 qubits gave 1–6 mHa with 100–500 shots per circuit and no mitigation; QPE-type runs at $\sim 10^3$ two-qubit gates were depth-limited (leakage), not shot-limited. Plan the Hadamard-test arms around a few hundred two-qubit gates per circuit, and use the leakage-detection option where available.
4. **Strengthen the classical control**: IBM's 2026 SKQD papers claim advantages over selected-CI heuristics, so the control must be a strong HCI/SHCI-class selector at matched cost, and the sample-based arm should include an SQD-versus-SKQD discussion (sampling from a correlated state versus from Trotter states).
5. **Reporting**: follow Köster and Mauerer (arXiv:2605.29872, 2026: repeats across days, drift check, inferential statistics with effect sizes, failure cases), the QED-C application-benchmark metrics (quality, time, gate resources; Lubinski et al. 2024) and the Proctor et al. (2025) benchmarking perspective; release code and raw shots as Quantinuum did for the QEC-QPE paper.
6. **Budgets**: with public price points of 10^4 HQC per month at the standard subscription and per-job caps of 10^4 shots and 5×10^5 HQC on Helios, define the budget tiers in HQC (10^3, 3×10^3, 10^4) and estimate each circuit with `qnexus.circuits.cost()` before submission.

14.3 Central research question and claims

> **Research question.** For a fixed molecular Hamiltonian, sector and reference, and a fixed hardware budget (shots, shot-weighted two-qubit gates, HQCs, wall time), which of four ground-state strategies – sample-based diagonalisation (SKQD/SQD), coherent real-time Krylov with error-detected overlaps, imaginary-time filtering (QITE/QLanczos), and statistical phase estimation on the same overlap data – reaches a target accuracy most reliably, and in which regime (system size, correlation strength) does the quantum sampling contribute beyond classical selection?

Publishable claims this can support (pre-registered as hypotheses, not outcomes):

1. A **regime map**: at ≤ 8 tapered qubits the classical expansion alone reaches chemical accuracy (confirming F7); at 16–24 qubits with strong correlation, quantum-seeded selection reaches a given error with a D that is $X\times$ smaller than HF-seeded or random-seeded selection at the same classical cost.
2. A **cost frontier**: error versus cumulative HQC (and versus shot-weighted 2Q gates) for the four arms, with confidence intervals, on the same instances.
3. A **hardware-specific result**: mid-circuit symmetry/error detection improves the coherent-Krylov and SPE arms' variational reliability (fraction of non-variational outcomes) at a quantified acceptance cost.
4. A **same-data result**: on identical Hadamard-test shots, phase-estimation-type fitting versus the generalised eigenproblem (Check E made quantitative on 8–16 qubits).
5. A **negative result is acceptable**: if sample-based always wins at these sizes, the paper reports that with the numbers; the Hiverge paper's LiH hardware point is an example of a modest hardware result published honestly.

14.4 Work packages

WP0 – Reproduce and control (weeks 1–3, simulator only). Rebuild the report's H_2O CAS(8e,6o) and F_2 CAS(10e,6o) pipelines in statevector (PySCF/InQuanto for integrals, your own tapering code validated against the sector spectrum). Run: quantum-seeded expansion vs. HF + s shells vs. random valid-sector seeds, all at matched final D. *Metrics:* error vs. D; external residual. *Go/no-go:* if no quantum-seeded case beats the HF-seeded control at matched D (expected), record it and move to larger instances; if one does, keep that instance.

WP1 – Freeze the problem set and budgets (weeks 2–5). Choose three instances with a classical reference and increasing difficulty, e.g. H_2O CAS(8e,6o) (continuity with the report, 8 qubits), N_2 at $R \in \{1.1, 1.6, 2.2\}$ Å in CAS(10e,10o) or CAS(10e,12o) (20–24 qubits before tapering; strongly multireference at stretch), and one 14–16-orbital case with a DMRG/SHCI reference (e.g. a larger-basis H_2O or a benzene $\pi + \sigma$ space; to be chosen with Quantinuum's chemists). Freeze geometry, basis, active orbitals, sector, energy offset, HF reference. Define three budgets $B \in \{10^4, 10^5, 10^6\}$ total shots and the corresponding HQC and 2Q-gate-shot totals (Check G is the template); publish the allocation policy for each arm before any run. Deliverable: a machine-readable manifest with Hamiltonian hashes (your notes' template).

WP2 – Four arms in simulation (weeks 4–10). Stage A exact statevector; Stage B shot noise only (independent whole-algorithm repeats, ≥ 50 seeds); Stage C H2-1E/H2-2E noise model with raw / sector post-selection / PMSV; Stage C′ forecast model with improved error rates (as Hiverge Fig. 7). Arms: (i) SKQD/SQD with full-H Trotter driver, adaptive shots, residual selection, plus the report's compact driver as an ablation; (ii) coherent Krylov, $K \leq 6$, Toeplitz measurement, declared cutoff policy, with and without mid-circuit symmetry checks; (iii) QITE with $\Delta\tau \in \{0.02, 0.05, 0.1\}$, two pools, ridge/cutoff policy, and QLanczos on its states; (iv) statistical PE (QCELS-type fit, not a fixed-rank pencil) on the arm-(ii) time series, with the number of time points and shots per point as the tuning knobs. ADAPT/Hiverge ansatz as baseline and as starting state. *Metrics:* median and IQR of error, P(chem. acc.), non-variational fraction, D, residual, per-circuit 2Q/depth, total shots, HQC estimate, classical time. *Go/no-go for hardware:* an arm goes to hardware on an instance only if P(chem. acc.) ≥ 0.8 on the emulator at the chosen budget, or if its failure is itself the finding (then one confirmatory run). The first go/no-go question is the one Check G poses: can the Hadamard-test arms reach chemical accuracy with few enough points and shots to fit the budget at all?

WP3 – Hardware (weeks 8–14). Design: for each (instance, arm, budget) that passed WP2, three independent jobs interleaved across arms within the same calibration window; 10^4 shots per circuit where affordable (Hiverge standard); error-detected variants of arms (ii) and (iv) and sector post-selection for all; raw and mitigated results stored separately. Record device, date, calibration snapshot, pytket/InQuanto/Nexus versions, HQCs charged, QPU and queue time, every raw count file. Expected hardware scale: 8–16 tapered qubits, ≤ 300 2Q gates per circuit, 10–40 circuits per arm-instance; total HQC to be estimated with the official calculator before submission.

WP4 – Analysis and paper (weeks 12–18). Bootstrap all hardware results; produce the figures below; ablation ladder for the sample-based arm (driver / filter / selection / shells); reconcile emulator forecasts with hardware; write with Quantinuum co-authors; release code and data.

14.5 Figures the paper needs

1. **Central figure: error versus cumulative hardware cost.** x = cumulative HQC (second panel: shot-weighted 2Q gates), $y = |E - E_{\text{ref}}|$ on a log scale with bootstrap intervals; one line per arm; chemical-accuracy line; classical controls as horizontal references; hardware points as stars over emulator curves (Hiverge Fig. 7 style). One panel per instance.
2. Probability of chemical accuracy versus budget, per arm.
3. Quantum-seeded versus classical-seeded selection: error versus final dimension D (the F7 test); this figure decides whether the sampling matters.
4. Mechanism/ablation ladder for the sample-based arm (driver, filter, selection, shells), Hiverge Fig. 6 style.
5. Non-variational fraction and retained rank versus shots and cutoff for coherent Krylov, with and without error detection; SPE from the same data on the same axes (hardware-specific and same-data results).
6. Resource ledger table: per circuit and per arm, 2Q gates, depth, shots, HQC, QPU time, classical time, memory.

14.6 Statistics

Report medians and interquartile ranges over independent repeats, bootstrap confidence intervals over shots within a job, P(chem. acc.) with a Wilson interval, and signed errors (to show non-variational outcomes). Pre-register thresholds, cutoffs and allocation policies in the WP1 manifest. Use held-out geometries for any threshold tuned on data. Never compare a statevector curve to a hardware cost axis.

14.7 Timeline, risks and mitigations

Weeks	Milestone	Risk and mitigation
1–3	WP0 controls done; decision on instance set	Classical control wins everywhere at 8 qubits: expected; this is Fig. 3, not a failure
2–5	WP1 manifest frozen; budgets and HQC estimates agreed with Quantinuum	Reference for the 14–16-orbital case unavailable: use DMRG/SHCI via a collaborator, or shrink to 12 orbitals
4–10	WP2 emulator results for all arms	QITE stalls or is too deep at 16+ qubits: report it, keep QLanczos on fewer steps; Hadamard-test arms too shot-hungry (Check G): keep one instance only, or shorten circuits
8–14	WP3 hardware campaign	Budget overrun: fix B per arm in advance, prioritise the central figure's points; drift: interleave arms, repeat the HF-only circuit as a control each session
12–18	WP4 paper and data release	Results modest: frame as cost frontier and regime map; emphasise the error-detection and same-data results

14.8 Collaboration and authorship with Quantinuum

Approach the InQuanto/applications group that co-authored the Hiverge paper (the preprint names InQuanto, emulator and hardware-execution staff in its acknowledgements). Offer: a benchmark design, the classical controls and the QITE arm; ask for: emulator access with the current noise model and PMSV, help with compilation and mid-circuit-measurement constructs, hardware time, and a chemist's choice of the 14–16-orbital instance. Agree authorship early (contribution statement per WP), data-release terms and whether the hardware specification source can be cited. the report's author should be invited as co-author for the SKQD arm; the existing water/F_2 job data become WP0 inputs if released.

14.9 Candidate venues (suggestions)

arXiv (quant-ph) first. Then, depending on the outcome: *PRX Quantum* or *Quantum* for a methods-plus-hardware benchmark; *npj Quantum Information* or *Physical Review Research* for a solid but modest hardware result; *J. Chem. Theory Comput.* or *J. Chem. Phys.* if the chemistry (regime map, classical controls) is the main story. A Quantinuum technical note or blog can accompany the preprint.

14.10 What *not* to put in the paper

QPE runs; DF/THC implementations; logical-qubit experiments; a generative-ansatz claim we did not produce; any "supremacy" language; any cost quoted in dollars rather than compiled gate counts and HQC; any statevector curve on a hardware cost axis.

Takeaway. The paper is the comparison, not any one method. Freeze the problem, pre-register budgets, run controls first, go to hardware only with emulator evidence, and report cost and uncertainty like the Hiverge paper.

15 Action checklist

Before any new computation

- ☐ Ask the report's author for the WP0 inputs: tapered Hamiltonians, driver lists, compiled circuits, raw per-circuit counts, filter/expansion code, exact reference energies (your notes' request list).
- ☐ Rewrite the brief's four sections with the corrections in Sections 6 to 10 before it is used in any proposal (the Hiverge/GQE conflation, the swap-network sentence, the 10^{-4} error figure, the logical-qubit code list, the "halving" claim).
- ☐ Cite the prior work with the verified references of Section 15: Yu et al. 2025 (SKQD, preprint), Robledo-Moreno et al. 2025 (SQD), Kanno et al. 2023/2026 (QSCI), Motta et al. 2020 (QITE/QLanczos), Stair et al. 2020, Ding and Lin 2023 (QCELS), Oumarou et al. 2026 and Yeter-Aydeniz et al. 2021 (prior comparisons), Sorathia et al. 2025 (QCELS on H1-1), Yamamoto et al. 2024/2026 (Quantinuum QPE with detection/correction).
- ☐ Replace Eq. (9) by the published HQC formula; recompute all costs; never quote HQCs as dollars.

Classical controls (WP0)

- ☐ HF + s shells and random-seed expansions at matched D for H_2O and F_2; plot error vs. D.
- ☐ Record $|\langle \mathrm{HF}|E_0\rangle|^2$, gap, weight distribution and sector dimension for every instance.
- ☐ Reproduce the 0.1836 mHa statevector residual for water and explain it.

Design freeze (WP1)

- ☐ Three instances, references, sectors, offsets, HF reference, Hamiltonian hashes in a manifest.
- ☐ Budgets B and allocation policy per arm, pre-registered; thresholds and cutoffs fixed or tuned only on held-out geometries.
- ☐ HQC ledger for every circuit type on the chosen instances (Check G as template); decide the budget tiers.

Simulation (WP2)

- ☐ Extend `code/qite_h2.py` and `code/krylov_toy_checks_h2.py` to 8 qubits (H_4 or LiH) with a Trotterised propagator and compiled gate counts; rerun Check E with QCELS-type fitting.
- ☐ Stage A/B/C/C′ for all four arms; ≥ 50 whole-algorithm seeds; raw / sector post-selection / PMSV.
- ☐ Ablations: driver size, filter variants, selection rule, shells; QITE $\Delta\tau$ and pool; Krylov K, Δt, cutoff, with/without error detection; SPE points and shots per point.
- ☐ Design the mid-circuit checks (parity or Iceberg) once and apply identically to arms (ii), (iii), (iv).
- ☐ Go/no-go per (instance, arm): $P(\text{chem. acc.}) \geq 0.8$ on emulator or a declared confirmatory run.

Hardware (WP3)

- ☐ Three interleaved jobs per point; 10^4 shots per circuit where affordable; HF-only control circuit each session.
- ☐ Log device, date, calibration, software versions, HQC charged, QPU and queue time, all raw counts.
- ☐ Store raw and mitigated results separately; bootstrap intervals for everything.

Paper (WP4)

☐ Figures 1–6 of Section 14; provenance column in every table; resource ledger.
☐ Limitations paragraph; one-sentence scope statement excluding QPE and logical qubits; no "supremacy", "scalable" or "100% pass rate" without a defined population.
☐ Public repository with code, manifests, counts and an environment file; authorship and data terms agreed with Quantinuum.
☐ Verify every [G] item in this document before it is cited.

References

All references below were checked on 15 October 2026 against arXiv metadata, Crossref or the publisher page unless marked [M] (secondary source only). Preprints without a journal version are marked "preprint".

Documents in this folder

- A. Kumar, "Scalable Non-Iterative Quantum Krylov Subspace Chemistry on Trapped-Ion Processors", 8 Oct 2026, 14 pp. (the report under review).
- F. Finger, F. Rapp, P. Kalidindi, A. Koziell-Pipe, D. Z. Manrique, G. Greene-Diniz, S. Clark, K. Meichanetzidis (Quantinuum), K. He, K. Yin, H. Fawzi, B. Romera Paredes, A. Fawzi (Hiverge), "Automated near-term quantum algorithm discovery for molecular ground states", arXiv:2603.26359 (27 Mar 2026), https://arxiv.org/abs/2603.26359.
- Project notes: `Krylov_SKQD_Study_Notes.pdf`, `qite-complete-guide.pdf`; code `code/qite_h2.py`, `code/krylov_toy_checks_h2.py`, `code/qkrylov_quantinuum.py`.

Quantinuum platform documents

- Quantinuum H2 Product Data Sheet v4.00 (17 Sep 2025); H1 Product Data Sheet v8.0.1 (9 Jun 2025); Helios Product Data Sheet v1.2 (9 Jun 2026); PCN "System Model H1 Retirement" (15 Jul 2025); PCN "Helios Release" (5 Nov 2025): https://docs.quantinuum.com/systems/ (data sheets under `_static/assets/data_sheets/`, PCNs under `pcns/`).
- Hardware user guide, "Tracking usage with Hardware Quantum Credits" (HQC formula): https://docs.quantinuum.com/systems/user_guide/hardware_user_guide/workflow.html; Helios costing: https://docs.quantinuum.com/systems/trainings/helios/getting_started/costing.html; Nexus Quantum System Terms v8.0 (Oct 2026): https://nexus.quantinuum.com/auth/terms_and_conditions/quantum_system; Azure Quantum provider and pricing pages: https://learn.microsoft.com/azure/quantum/provider-quantinuum, https://learn.microsoft.com/azure/quantum/pricing.
- Emulators: https://docs.quantinuum.com/systems/user_guide/emulator_user_guide/introduction.html; Helios emulators: https://docs.quantinuum.com/systems/user_guide/emulator_user_guide/emulators/helios_emulators.html; Nexus backend configs: https://docs.quantinuum.com/nexus/nexus_api/backend_configs.html; Nexus jobs and results notebook: https://docs.quantinuum.com/nexus/trainings/notebooks/basics/jobs_results.html; cost estimation: https://docs.quantinuum.com/nexus/nexus_api/circuits.html.
- pytket-quantinuum (native gate set, compilation passes, removal of job submission in 0.56): https://docs.quantinuum.com/tket/extensions/pytket-quantinuum/; product update 28 Aug 2025: https://docs.quantinuum.com/product-updates/posts/nexus_8_2025_pytket_quantinuum/.
- InQuanto 6.1.1 manual: error mitigation (PMSV) https://docs.quantinuum.com/inquanto/manual/errmit.html; QSE https://docs.quantinuum.com/inquanto/manual/algorithms/algorithms_qse.html; Krylov (moment) computable https://docs.quantinuum.com/inquanto/manual/computables/greens_function.html; time evolution

https://docs.quantinuum.com/inquanto/manual/algorithms/te_vqs.html; changelog https://docs.quantinuum.com/inquanto/misc/changelog.html.

- H. Ransford et al., "Helios: a 98-qubit trapped-ion quantum computer", arXiv:2511.05465 (2025), preprint.
- "Three months in the life of cloud quantum computing", arXiv:2601.09943 (2026), preprint (subscription figures).

Quantinuum hardware chemistry and error-detection papers

- K. Yamamoto, S. Duffield, Y. Kikuchi, D. Muñoz Ramo, "Demonstrating Bayesian quantum phase estimation with quantum error detection", Phys. Rev. Research 6, 013221 (2024), arXiv:2306.16608 (H1-1, Iceberg $[[6, 4, 2]]$, 920 two-qubit gates, 6×10^{-3} Ha).
- K. Yamamoto, Y. Kikuchi, D. Amaro, B. Criger, S. Dilkes, C. Ryan-Anderson, A. Tranter et al., "Quantum error-corrected computation of molecular energies", arXiv:2505.09133 (2025, v3 Sep 2026; DOI 10.1103/m7j3-5sk6 listed, journal version not checked); code https://github.com/CQCL/qec_qpe_chem.
- A. Tranter, M. Gowland, K. Yamamoto, V. Sze, D. Muñoz Ramo, "High-precision quantum phase estimation on a trapped-ion quantum computer", arXiv:2506.17207 (2025), preprint.
- L. Nützel, M. Hartmann, N. Dreyer, E. Granet, "Ground state energy via adiabatic evolution and phase measurement for a molecular Hamiltonian on an ion-trap quantum computer", Quantum Sci. Technol. 11, 035038 (2026), arXiv:2512.14415.
- K. Sorathia et al., "Quantum simulation of actinide chemistry: towards scalable algorithms on trapped ion quantum computers", arXiv:2510.25675 (2025), preprint (QCELS on H1-1, 3–19 qubits).
- D. Rowe, F. Gaggioli, L. Szulakowska, D. Muñoz Ramo, D. Z. Manrique, "Split-evolution QPE for particle-conserving Hamiltonians", arXiv:2604.14921 (2026), preprint (H2-2).
- A. Koziell-Pipe, S. Brewer, J. Guhit et al., "Learning to prepare molecular ground states with transformer models", arXiv:2607.22468 (2026), preprint (ADAPT-GQE on Helios-1).
- G. Greene-Diniz et al., "Quantum computed Green's functions using a cumulant expansion of the Lanczos method", Quantum 8, 1383 (2024), arXiv:2309.09685 (H1-1).
- K. Hémery et al., "Measuring the Loschmidt amplitude for finite-energy properties of the Fermi–Hubbard model on an ion-trap quantum computer", PRX Quantum 5, 030323 (2024), arXiv:2309.10552 (H2-1).
- K. Yamamoto, D. Z. Manrique, I. T. Khan, H. Sawada, D. Muñoz Ramo, "Quantum hardware calculations of periodic systems with partition-measurement symmetry verification", Phys. Rev. Research 4, 033110 (2022), arXiv:2109.08401 (PMSV).
- C. N. Self, M. Benedetti, D. Amaro, "Protecting expressive circuits with a quantum error detection code", Nature Physics 20, 219 (2024), arXiv:2211.06703 (Iceberg, H1-2).
- Y. Jin, Z. He, Y. Hao, S. Omanakuttan, D. Amaro, S. Tannu, R. Shaydulin, M. Pistoia, "Iceberg beyond the tip", arXiv:2504.21172 (2025/26), preprint (H2-1, 22 algorithmic qubits); Z. He, D. Amaro, R. Shaydulin, M. Pistoia, "Performance of quantum approximate optimization with quantum error detection", Commun. Phys. 8, 217 (2025).
- E. Chertkov, A. C. Potter, D. Hayes, M. Foss-Feig, "Error detection without post-selection in adaptive quantum circuits", Phys. Rev. Research 8, 023057 (2026), arXiv:2509.25326 (H2).
- T. Nishi et al., "Encoded probabilistic imaginary-time evolution on a trapped-ion quantum computer for ground and excited states of spin qubits", Phys. Rev. Applied 23, 034016 (2025), arXiv:2407.10555 (H1-1 [M]).
- Logical qubits: C. Ryan-Anderson et al., arXiv:2404.02280 (colour and $[[12, 2, 4]]$ codes on H2) and R. da Silva et al., arXiv:2409.04628 (tesseract code), published together as Paetznick, Reichardt, da Silva, Ryan-Anderson, Aasen et al., "Improved quantum processor logical error rates via correction and detection", Nature 654, 349 (2026); Y. Hong, E. Durso-Sabina, D. Hayes, A. Lucas, "Entangling four logical qubits beyond break-even in a nonlocal code", Phys. Rev. Lett. 133, 180601 (2024), arXiv:2406.02666; magic-state code switching, Phys. Rev. X 15, 041008 (2025), arXiv:2506.14169; S. Dasu, M. DeCross, S. Guo et al., "Computing with many encoded logical qubits beyond break-even", arXiv:2602.22211 (2026), preprint (Helios); C_4-Helix code, arXiv:2609.03194 (2026), preprint (Helios); Microsoft/Quantinuum chemistry blog, 10 Sep 2024 [M].

Algorithms and theory

- J. Yu, J. Robledo Moreno, J. T. Iosue, L. Bertels, D. Claudino, B. Fuller, P. Groszkowski, T. S. Humble, P. Jurcevic, W. Kirby, T. A. Maier, M. Motta, B. Pokharel, A. Seif, A. Shehata, K. J. Sung, M. C. Tran, V. Tripathi, A. Mezzacapo, K. Sharma, "Quantum-centric algorithm for sample-based Krylov diagonalization", arXiv:2501.09702 (2025), preprint.
- J. Robledo-Moreno, M. Motta, H. Haas et al., "Chemistry beyond the scale of exact diagonalization on a quantum-centric supercomputer", Science Advances 11, eadu9991 (2025), arXiv:2405.05068.
- K. Kanno, M. Kohda, R. Imai, S. Koh, K. Mitarai, W. Mizukami, Y. O. Nakagawa, "Quantum-selected configuration interaction", Phys. Rev. Research 8, 023268 (2026), arXiv:2302.11320.
- W. Kirby, B. Pokharel, J. Robledo Moreno et al., "Observation of improved accuracy over classical sparse ground-state solvers using a quantum computer", arXiv:2603.03496 (2026), preprint; S. Piccinelli et al., randomised SKQD (SqDRIFT), arXiv:2508.02578 (2025), preprint; N. Yoshioka, M. Amico, W. Kirby et al., "Krylov diagonalization of large many-body Hamiltonians on a quantum processor", Nature Communications 16, 5014 (2025), arXiv:2407.14431.
- E. N. Epperly, L. Lin, Y. Nakatsukasa, "A theory of quantum subspace diagonalization", SIAM J. Matrix Anal. Appl. 43, 1263 (2022), arXiv:2110.07492; W. Kirby, "Analysis of quantum Krylov algorithms with errors", Quantum 8, 1457 (2024), arXiv:2401.01246; Y. Shen, K. Klymko, J. Sud, D. B. Williams-Young, W. A. de Jong, N. M. Tubman, "Real-time Krylov theory for quantum computing algorithms", Quantum 7, 1066 (2023), arXiv:2208.01063; G. Lee, D. Lee, J. Huh, Quantum 8, 1477 (2024), arXiv:2307.16279.
- M. Oliveira, N. Ziems, M. Glaser, "Tackling instabilities of quantum Krylov subspace methods: an analysis of the numerical and statistical errors", arXiv:2604.11532 (2026), preprint; C. De Vriendt et al., "A new angle on quantum subspace diagonalization for quantum chemistry", arXiv:2602.11985 (2026), preprint; K. Kanasugi et al., "Mirror subspace diagonalization", arXiv:2511.20998 (npj Quantum Inf. 2026); Z. Zhang, A. Wang, X. Xu, Y. Li, "Measurement-efficient quantum Krylov subspace diagonalisation", Quantum 8, 1438 (2024), arXiv:2301.13353.
- R. M. Parrish, P. L. McMahon, "Quantum filter diagonalization", arXiv:1909.08925 (2019), preprint; K. Klymko et al., "Real-time evolution for ultracompact Hamiltonian eigenstates on quantum hardware", PRX Quantum 3, 020323 (2022), arXiv:2103.08563; C. L. Cortes, S. K. Gray, "Quantum Krylov subspace algorithms for ground- and excited-state energy estimation", Phys. Rev. A 105, 022417 (2022), arXiv:2109.06868; N. H. Stair, R. Huang, F. A. Evangelista, "A multireference quantum Krylov algorithm for strongly correlated electrons", J. Chem. Theory Comput. 16, 2236 (2020), arXiv:1911.05163.
- Z. Ding, L. Lin, "Even shorter quantum circuit for phase estimation on early fault-tolerant quantum computers with applications to ground-state energy estimation", PRX Quantum 4, 020331 (2023), arXiv:2211.11973; L. Lin, Y. Tong, "Heisenberg-limited ground-state energy estimation for early fault-tolerant quantum computers", PRX Quantum 3, 010318 (2022), arXiv:2102.11340; A. E. Russo, K. M. Rudinger, B. C. A. Morrison, A. D. Baczewski, "Evaluating energy differences on a quantum computer with robust phase estimation", Phys. Rev. Lett. 126, 210501 (2021), arXiv:2007.08697; Y. Shen, D. Camps, A. Szasz, S. Darbha, K. Klymko, D. B. Williams-Young, N. M. Tubman, R. Van Beeumen, "Estimating eigenenergies from quantum dynamics: a unified noise-resilient measurement-driven approach", Quantum 9, 1836 (2025), arXiv:2306.01858; N. S. Blunt, L. Caune, R. Izsák, E. T. Campbell, N. Holzmann, "Statistical phase estimation and error mitigation on a superconducting quantum processor", PRX Quantum 4, 040341 (2023), arXiv:2304.05126.
- M. Motta, C. Sun, A. T. K. Tan, M. J. O'Rourke, E. Ye, A. J. Minnich, F. G. S. L. Brandão, G. K.-L. Chan, "Determining eigenstates and thermal states on a quantum computer using quantum imaginary time evolution", Nature Physics 16, 205 (2020), arXiv:1901.07653; W. Kirby, M. Motta, A. Mezzacapo, "Exact and efficient Lanczos method on a quantum computer", Quantum 7, 1018 (2023), arXiv:2208.00567; S. McArdle, T. Jones, S. Endo, Y. Li, S. C. Benjamin, X. Yuan, "Variational ansatz-based quantum simulation of imaginary time evolution", npj Quantum Information 5, 75 (2019), arXiv:1804.03023.
- S. Bravyi, J. M. Gambetta, A. Mezzacapo, K. Temme, "Tapering off qubits to simulate fermionic Hamiltonians", arXiv:1701.08213 (2017), preprint.
- H. R. Grimsley, S. E. Economou, E. Barnes, N. J. Mayhall, "An adaptive variational algorithm for exact molecular simulations on a quantum computer", Nature Communications 10, 3007 (2019), arXiv:1812.11173; H. L. Tang et al., "Qubit-ADAPT-VQE", PRX Quantum 2, 020310 (2021),

arXiv:1911.10205; K. Nakaji et al., "The generative quantum eigensolver (GQE) and its application for ground state search", arXiv:2401.09253 (2024), preprint.

- V. von Burg, G. H. Low, T. Häner, D. S. Steiger, M. Reiher, M. Roetteler, M. Troyer, "Quantum computing enhanced computational catalysis", Phys. Rev. Research 3, 033055 (2021), arXiv:2007.14460; J. Lee, D. W. Berry, C. Gidney, W. J. Huggins, J. R. McClean, N. Wiebe, R. Babbush, "Even more efficient quantum computations of chemistry through tensor hypercontraction", PRX Quantum 2, 030305 (2021), arXiv:2011.03494.
- A. Cowtan, S. Dilkes, R. Duncan, W. Simmons, S. Sivarajah, "Phase gadget synthesis for shallow circuits", EPTCS 318, 213 (2020), arXiv:1906.01734; A. Cowtan, W. Simmons, R. Duncan, "A generic compilation strategy for the unitary coupled cluster ansatz", arXiv:2007.10515 (2020), preprint.
- D. Yoffe, N. Entin, A. Natan, A. Makmal, "A qubit-efficient variational selected configuration-interaction method", Quantum Sci. Technol. 10, 015020 (2025), arXiv:2302.06691.

Prior comparisons, benchmarks and reporting standards

- K. Yeter-Aydeniz, B. T. Gard, J. Jakowski, S. Majumder, G. S. Barron, G. Siopsis, T. S. Humble, R. C. Pooser, "Benchmarking quantum chemistry computations with variational, imaginary time evolution, and Krylov space solver algorithms", arXiv:2102.05511 (2021), preprint; K. Yeter-Aydeniz, R. C. Pooser, G. Siopsis, npj Quantum Information 6, 63 (2020), arXiv:1912.06226; N. Gomes et al., JCTC 16, 6256 (2020), arXiv:2006.15371.
- C. Oumarou, P. J. Ollitrault, S. Polla, C. Gogolin, "Optimizing and comparing quantum resources of statistical phase estimation and Krylov subspace diagonalization", arXiv:2603.15552 (2026), preprint.
- O. Raisuddin, J. Zhang, M. Motta, F. Faulstich, "From promise to practice: benchmarking quantum chemistry on quantum hardware", arXiv:2512.01012 (2025), preprint.
- P. Rosanowski, J. Eisinger, L. Funcke, U. Poschinger, F. Schmidt-Kaler, "Sample-based Krylov quantum diagonalization for the Schwinger model on trapped-ion and superconducting quantum processors", arXiv:2510.26951 (2025), preprint (Mainz trapped-ion processor).
- T. Proctor, K. Young, A. D. Baczewski, R. Blume-Kohout, "Benchmarking quantum computers", Nature Reviews Physics 7, 105 (2025), arXiv:2407.08828; T. Lubinski et al., "Quantum algorithm exploration using application-oriented performance benchmarks", arXiv:2402.08985 (2024); F. Köster, W. Mauerer, "Claim against measurement: statistical artefacts in quantum error mitigation benchmarks", arXiv:2605.29872 (2026), preprint.
- Ethylene barrier: J. E. Douglas, B. S. Rabinovitch, F. S. Looney, J. Chem. Phys. 23, 315 (1955); R. Wallace, Chem. Phys. Lett. 159, 35 (1989); A. Zen, E. Coccia, Y. Luo, S. Sorella, L. Guidoni, J. Chem. Theory Comput. 10, 1048 (2014).