



Engagement: Content Builder and CloudPages



CONTENTS

- Create Content in Marketing Cloud Engagement..... 1
- CloudPages 2
- Content Builder 9

Engagement: Content Builder and CloudPages

Manage, create, and publish targeted and relevant marketing content to customers across multiple Marketing Cloud Engagement channels.

CloudPages

CloudPages combines the best of Marketing Cloud Engagement to capture, organize, and act on prospect data. Use capture forms to grow your audience and then nurture those prospects with a journey. Optimize your content for distinct mobile, social, and web experiences to catch those prospects wherever they are. Built-in reports help you monitor performance and optimize as you go.

Content Builder

Content Builder is our cross-channel content management tool that allows you to consolidate images, documents, and content in a single location for use in Marketing Cloud Engagement. With an easy-to-use, drag and drop interface, Content Builder is more efficient than our previous create and edit tools. Content Builder also includes the content repository (CMS) and API, the content management application (formerly referred to as Content Canvas), and the new HTML content editor (formerly referred to as Content Builder).

CloudPages

CloudPages combines the best of Marketing Cloud Engagement to capture, organize, and act on prospect data. Use capture forms to grow your audience and then nurture those prospects with a journey. Optimize your content for distinct mobile, social, and web experiences to catch those prospects wherever they are. Built-in reports help you monitor performance and optimize as you go.

Here are some examples of how you can use CloudPages.

- Design landing pages for promotions and solicitations.
- Create microsites for a new products, services, or campaigns.
- Reuse Content Builder blocks for consistency and efficiency.
- Host dynamic, personalized information, such as preferences or profile content.
- Gate content with logins and other custom solutions by using AMPscript.

CloudPages Permissions

CloudPages supports specific Marketing Cloud Engagement user permissions. Choose whether to assign individual permissions or roles to users who create and manage web content. To support the expected access, you must assign some permissions in pairs or in conjunction with other Engagement permissions.

Create a CloudPages Folder

To organize your CloudPages content, create folders (formerly known as collections). You can also nest your folders and group relevant subfolders.

Creating Content in CloudPages

You can create a few types of content in Marketing Cloud Engagement with CloudPages. Decide whether to create content from scratch or to work using other Engagement tools, such as Content Builder, Smart Capture forms, or code resources.

Create a Code Resource

To add styles or functionality to CloudPages content, such as custom CSS or JavaScript, create a code resource. After you create and publish the code resource, work with a Marketing Cloud Engagement developer to apply it to content using AMPscript.

Create a Smart Capture Form

To start a customer journey with people who submit a form, configure a Smart Capture form and then set it as an entry event in Journey Builder. You can add a Smart Capture form to any landing page in CloudPages.

Review CloudPages Analytics

CloudPages offers built-in analytics that track views of a page over the past 90 days. To see more information, create a report in Analytics Builder.

CloudPages Permissions

CloudPages supports specific Marketing Cloud Engagement user permissions. Choose whether to assign individual permissions or roles to users who create and manage web content. To support the expected access, you must assign some permissions in pairs or in conjunction with other Engagement permissions.

User Permissions

Permission	Description
Access	Access the CloudPages app
View	Open and view content that's created in CloudPages
Create	Create content and folders
Edit	Edit and save content and folders
Delete	Delete content and folders
Publish/Unpublish	Publish and unpublish content for external viewers
Content Builder Assets	Perform various tasks when working with files and content blocks in Content Builder

Roles

A user role combines permissions to address common marketer tasks. Keep in mind that in addition to CloudPages permissions, roles also include Engagement permissions. When assigning roles, consider the principle of least privilege. Each role supports a variety of permissions.

Each role supports a variety of permissions.

- Administrator—Create users and assign permissions, manage all CloudPages content.
- Channel Manager—Manage all CloudPages content.
- Content Editor—Create and edit CloudPages content.
- Viewer—View CloudPages content.

When you configure sharing, those settings apply to content editors and viewers.

Create a CloudPages Folder

To organize your CloudPages content, create folders (formerly known as collections). You can also nest your folders and group relevant subfolders.

1. Open CloudPages and click **Create Folder**.
2. Enter a name and description, and then save.
3. To change a folder name, open the folder and click  .

If you no longer need a folder, you can delete it from the folder view.

Creating Content in CloudPages

You can create a few types of content in Marketing Cloud Engagement with CloudPages. Decide whether to create content from scratch or to work using other Engagement tools, such as Content Builder, Smart Capture forms, or code resources.

CloudPages helps you create these content types.

- Landing pages
- Microsites
- Interactive email pages
- Code resources

Metadata for each piece of content is included in its page properties and advanced settings.

Property	Description
Created	The timestamp of when the content was created. This value uses the locale in your admin settings.
Name and Description	These labels are for internal use only.
Page ID	This ID is used for internal tracking and appears in the data extension that's related to a landing page.
Page Name	The landing page's external name that is shown in the browser tab when the user is viewing the page. You can change the page name in Advanced Settings SEO .
URL	Where the page is available online. Additional options are available when private domains are in use.

 **Note** CloudPages page loads time out after 30 seconds.

Create Landing Pages with CloudPages

A landing page is a key part of many marketing campaigns. In CloudPages, a landing page is also a building block of a microsite. Use pages to build awareness, collect prospect data, and promote events or encourage downloads.

Create a Personalized URL for a Landing Page

When private domains are enabled, you can configure friendly and personalized URLs that help people find your content. A friendly URL can contain recognizable text in any part of the URL. With a

personalized URL (PURL), you can customize the URL's page key to serve dynamic content to the viewer.

Create an Interactive Email Page

When you want to increase engagement on form submissions, such as surveys or profile updates, an interactive email can help. After you build an email using an interactive email form block in Content Builder, you can customize a landing page for the submission confirmation.

Create a Microsite

In Marketing Cloud Engagement, a CloudPages microsite is a collection of landing pages that you can organize into a meaningful site map. Add pages to the site map in the order that you want them to appear.

See Also

[Knowledge: CloudPages Security Best Practices](#)

Create Landing Pages with CloudPages

A landing page is a key part of many marketing campaigns. In CloudPages, a landing page is also a building block of a microsite. Use pages to build awareness, collect prospect data, and promote events or encourage downloads.

If you have one or more private domains assigned to your account, you can also create pages at the root level or create pages for error handling, such as for 404, 500, or 503 errors. You can have one of each of these page types per private domain.

Before you begin, make sure that you have access to [CloudPages](#) and [Content Builder](#).

Create a Landing Page

1. In CloudPages, create a landing page.
 - a. Create a folder, and then click **Create**.
 - b. Open the folder, and then click **Add Content | Landing Page**.
2. In the Landing Page window, if the private domains feature is enabled, define the URL settings.
3. Save the landing page and then select a layout.
4. In the editor, drag blocks onto the canvas, and configure them in the Content and Block Settings panes. Your changes are autosaved.
5. To add customized content, add Smart Capture or Code Resource blocks to your landing page.
6. Publish your page now or schedule a later publishing date.

Create a Root-Level Landing Page

1. Select and open a CloudPages folder, and then add a new landing page.
2. In the Landing Page window **URL** dropdown, select a private domain and leave the site key field blank.
3. Click **Next** and save the landing page.
4. Select a layout.

5. In the editor, add content to the page as needed.
6. Publish your page now or schedule a later publishing date. When published, the page URL will be at the root domain.

Create a Custom Page for Error Handling

1. Select and open a CloudPages folder, and then add a new landing page.
2. In the Landing Page window **URL** dropdown, select a private domain.
3. Under **Advanced**, select the Error Content for 403, 404, or 500 errors.
4. Click **Next** and save the landing page.
5. Select a layout.
6. In the editor, add content to the error page as needed.
7. Publish your page now or schedule a later publishing date.

Create a Personalized URL for a Landing Page

When private domains are enabled, you can configure friendly and personalized URLs that help people find your content. A friendly URL can contain recognizable text in any part of the URL. With a personalized URL (PURL), you can customize the URL's page key to serve dynamic content to the viewer.

To purchase the private domains add-on, contact your account executive. After you configure a private domain, you can edit a landing page's URL or set up the URL during page creation.


1. From the folders view in CloudPages, find the landing page that you want to work with, and click .
2. Select a domain from the URL dropdown, and enter a readable name in the Site Key field.
3. To secure your content, toggle on the HTTPS setting.
Serving content over HTTPS requires that your private domain has an SSL certificate configured for CloudPages.
4. Save your work.

Create an Interactive Email Page

When you want to increase engagement on form submissions, such as surveys or profile updates, an interactive email can help. After you build an email using an interactive email form block in Content Builder, you can customize a landing page for the submission confirmation.

You must publish a page to use it with an email. To refresh a page's content, open the page for editing, review the content, and publish.

1. In Content Builder, [create an interactive email block](#).
2. Open or create a CloudPages folder, and create an interactive email page.
3. Enter a name and an optional description.
4. If private domains are enabled, define the URL settings.
5. Click the **Email Form** block.
Don't delete or replace the original Email Form block.

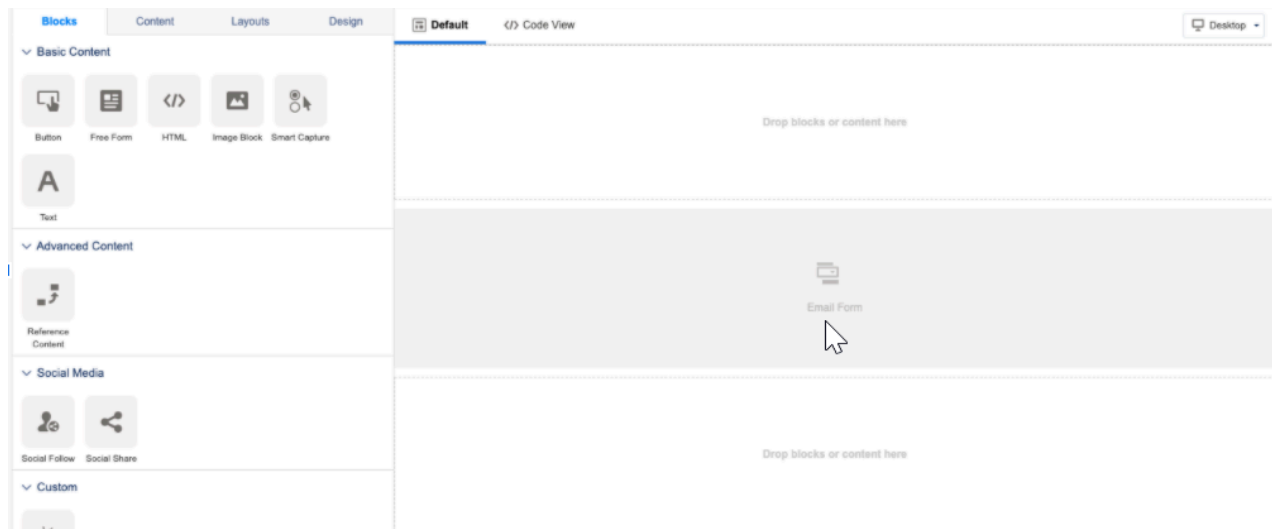

6. Choose what to display after the user submits the form.
 - To show a confirmation page that uses existing content, select **Block from Content Builder**, and then select the block.
 - To send people to a different URL after form submission, select **Redirect to a URL**.
7. Enter a page URL, and define which details to append to the URL, if any.
8. To design your page, add other tabs and blocks.
9. To save your work but not publish, click **Save**. Or, schedule or publish your page.

Create a Microsite

In Marketing Cloud Engagement, a CloudPages microsite is a collection of landing pages that you can organize into a meaningful site map. Add pages to the site map in the order that you want them to appear.

1. Open or create a CloudPages folder, and create a microsite.
2. Enter a name and an optional description.
3. If the private domains feature is enabled, define the URL settings.
4. Click **Create**.
5. Add pages to the canvas.
6. Click the thumbnail for a page to edit it.
7. Drag blocks onto the canvas, and edit their properties.


Tip You can save blocks and reuse them elsewhere. To save a block, click **Save Block**, and then select **Create New**.
8. Review the content on the canvas.

There are several steps that you can take next.

- To preview the page, publish it and open the preview URL. To make changes, unpublish the page and edit it.
- To reorder pages, create a site map without copying the pages in the current version. Click the **Link to site map** (🔗) button next to each page that you want to add to the site map.

- When you're done creating the microsite, you can publish it immediately or schedule it for publication at a later time.

Create a Code Resource

To add styles or functionality to CloudPages content, such as custom CSS or JavaScript, create a code resource. After you create and publish the code resource, work with a Marketing Cloud Engagement developer to apply it to content using AMPscript.

A code resource can support CSS, JSON, JavaScript, RSS, XML, or text.

1. Open or create a CloudPages folder, and create a code resource.
2. Enter a name and an optional description.
3. If the private domains feature is enabled, define the URL settings.
4. Select a resource type.
5. Paste your code into the field.
6. To customize the code, use the personalization and merge fields in the toolbar.
7. Save your work.
8. To make the code resource available in CloudPages, publish it.

See Also

[Knowledge: CloudPages Security Best Practices](#)

Create a Smart Capture Form

To start a customer journey with people who submit a form, configure a Smart Capture form and then set it as an entry event in Journey Builder. You can add a Smart Capture form to any landing page in CloudPages.

When you configure the Smart Capture form, store the data in a sendable Event Source data extension.

1. [Create a data extension](#) using these guidelines.
 - a. Select **Create from New**, select **Is Sendable?**, and keep the default retention settings.
 - b. Configure details for each attribute. You can hide or reveal attributes when you create forms later, so include as many relevant data points as you want.
 - c. For the Send Relationship, relate Email Address with Subscriber Key.
2. Create or edit a landing page or microsite, and add a Smart Capture block.
3. To use the form in a journey, select **Use in Journey Builder**.
4. For Data Target, select **Data Extension**, and then select the data extension that you created.
5. Select the attributes that you want to appear as fields on your form.
6. If needed, add hidden fields, such as a source name or a relevant ID.
 - a. Click **Add Hidden Attribute**.
 - b. Select an available field.
 - c. Enter the value to submit, and then click **Done Editing**.
7. On the Submit Options tab, customize the confirmation message.

8. Add other styles or HTML as needed.

Use a Smart Capture Form in Journey Builder

You can initiate activities after someone submits a Smart Capture form on a landing page. For example, send a confirmation email or add the person as a lead or contact in Sales Cloud. You can add a Smart Capture form only to a multistep journey.

Use a Smart Capture Form in Journey Builder

You can initiate activities after someone submits a Smart Capture form on a landing page. For example, send a confirmation email or add the person as a lead or contact in Sales Cloud. You can add a Smart Capture form only to a multistep journey.

If your journey includes an email, before you activate the journey, complete the email's Content Detective and Validation steps. Use each Smart Capture form one time per journey.

1. Create a landing page that contains a Smart Capture form block.
2. In Journey Builder, create a multistep journey.
3. Select the CloudPages entry source, and drag it to the entry source target.
4. Define the entry source.
 - a. Click the entry source icon.
 - b. Select the form from the list, and then click **Next**.
 - c. Review the summary, and then click **Done**.
5. Drag in other activities and controls to configure the journey.

If you're using a Smart Capture form as a trigger event, configure the re-entry step, and the default channel address in the journey's settings.

Review CloudPages Analytics

CloudPages offers built-in analytics that track views of a page over the past 90 days. To see more information, create a report in Analytics Builder.

You can choose from Microsite Tracking, CloudPages Impressions, or CloudPages Smart Capture Submissions reports.

1. Open a CloudPages folder, and locate the content that you want to review.
2. From the page's thumbnail or the editing view, click , and select **Activity**.
3. To filter what's shown, adjust the start and end dates, and then click **Submit**.

Content Builder

Content Builder is our cross-channel content management tool that allows you to consolidate images, documents, and content in a single location for use in Marketing Cloud Engagement. With an easy-to-

use, drag and drop interface, Content Builder is more efficient than our previous create and edit tools. Content Builder also includes the content repository (CMS) and API, the content management application (formerly referred to as Content Canvas), and the new HTML content editor (formerly referred to as Content Builder).

[Get Started with Content Builder](#)

Content Builder consolidates images, documents, and content in a single location for use in Marketing Cloud Engagement. Create subject lines and body copy for messages by harnessing the power of Einstein generative AI. Use the third-party Typeface integration option to generate images to completely tailor your message.

[Content Builder FAQs](#)

Review frequently asked questions about Marketing Cloud Engagement Content Builder.

[Content Builder Editor Best Practices and Tips](#)

Learn best practices and tips for the Content Builder editor in Marketing Cloud.

[Upload Files](#)

Upload content to Content Builder by dragging and dropping existing content, by browsing your computer for the content, or by uploading content from an external URL. The maximum file size per file is 5 MB.

[Create Emails in Content Builder](#)

Use this task to create an email in Content Builder for Marketing Cloud Engagement. Email names must be unique within a folder.

[Create Templates](#)

Use Content Builder to create templates by pasting HTML or using a layout tool.

[Create Mobile Messages](#)

Create SMS, push notification, and LINE messages in Marketing Cloud Engagement Content Builder.

[Create Content Blocks](#)

Use content blocks to create reusable modular content for messages. Manage content blocks in Content Builder.

[Create a Code Snippet](#)

Use code snippets in Marketing Cloud Engagement Content Builder to save reusable bits of HTML, AMPscript, and Guide Template Language. Insert snippets when editing HTML via the Code Snippets toolbar selector, or by typing the Customer Key value for the snippet followed by the Tab key. You can also create a code snippet content block by clicking **Create > Content Blocks > Code Snippet**. You can reference Code Snippets with the AMPscript ContentBlockByKey and ContentBlockByID functions.

[Share Content](#)

The share content feature allows you to share content, templates, and emails with other business units in your account. Enterprise 2.0 accounts, you can share from any business unit to any other business unit. For Enterprise 1.0 and Agency accounts you can share down to child business units. Contact your relationship manager to enable this feature.

[Duplicate Content](#)

Use duplicate content in Content Builder to copy the style or format of a previously created content asset. We recommend copying the structure of a piece of content before adding actual content. When duplicating a content area in an email or template, the duplicate option is disabled if the content area

block limit is reached.

Content Builder Approvals in Marketing Cloud Engagement

To review and approve content in Content Builder, use Approvals.

Content Builder Tags

Create and manage nested and Einstein tags in Marketing Cloud Engagement Content Builder.

Sitecore Content

Sitecore content is available via Sitecore Connect for Marketing Cloud Engagement, which enables a real-time sync of images created and updated in Sitecore to Content Builder.

Content Builder Recycle Bin

Content Builder Recycle Bin is a repository for recently deleted items that can be restored to Marketing Cloud Engagement. Items moved to the Recycle Bin are unavailable in emails and journeys. You can restore items from the Recycle Bin and use them again.

Get Started with Content Builder

Content Builder consolidates images, documents, and content in a single location for use in Marketing Cloud Engagement. Create subject lines and body copy for messages by harnessing the power of Einstein generative AI. Use the third-party Typeface integration option to generate images to completely tailor your message.

With the editor, you can:

- Create professional emails without knowing HTML
- Preview changes to email content in real time
- Use intelligent HTML paste tools, such as color coding and line numbers
- Insert code snippets for adding common links, such as Forward to a Friend and Open Tracking

With the content repository, you can:

- Use global search and filtering tools
- Add tags and campaign associations to connect related content
- Edit all your content inside the application

Content Builder Experience

Explore Content Builder features in Marketing Cloud Engagement.

Content Builder Administration

Access Content Builder setup from the Marketing Cloud Engagement toolbar by hovering over your username and selecting **Setup**, then searching for *Content Builder Settings*.

Customer Key

Each Content Builder asset has a Customer Key, a unique 36 character identifier that can be referenced via AMPscript.

Search for Content

Content Builder provides several ways to locate specific content.

Folder Management

Store images, documents, templates, emails, and more in the same or different folders in Marketing Cloud Engagement Content Builder. Create, rename, move, or delete folders by right-clicking in the appropriate folder space.

See Also

[Content Builder Editor Best Practices and Tips](#)

[Content Builder Message Creation Tips](#)

Content Builder Experience

Explore Content Builder features in Marketing Cloud Engagement.

Icon Descriptions

-  - Feature Not Available
-  - Feature Replaced
-  - Feature Changed

Administration

Feature	New Tools
Granular Permissions and Managing Roles for non-Enterprise 2.0 Account	
Provisioning for Child Accounts	
Product Support Environment	

APIs and AMPscript

Feature	New Tools
SOAP APIs and Partner or Custom Solutions	

Approvals

Feature	New Tools
Bypass Approval Rule	
Prevent Approval Withdraw when Email Jobs are Scheduled	

Distributed Sending

Feature	New Tools
Emails and Sends - Content Builder Emails	

Email Studio

Feature	New Tools
Content: Appending Headers and Footers	
Content: Copy and paste from a third-party text editor, such as Microsoft Word or Google Docs	
Content: Dynamic Content	
Content: Facebook Like	
Content: Simple Automated Emails	
Content: Surveys	
Content: View Pending Sends to Cancel a Job	
Interactive Content: Live Offers	
Send: Guided Send Recurring Send Option	
Send: Guided Send Select Tracking Option	
Send: Send Preview	
Send: Guided Send to a Test Data Extension	
Send: Simple Send	
Send: Test Send	
Send: Guided Send Test Options	
Subscribers: Welcome Emails from a List	
Subscribers: Send Option from Lists, Data Extensions, Groups	
Upload Images: Ability to Overwrite Images	
Upload Images: Predictable Image URLs	

Playbooks

Feature	New Tools
Playbook Campaign - Content Builder Emails	

Reports

Feature	New Tools
Custom reports - email-specific content	

Content Builder Administration

Access Content Builder setup from the Marketing Cloud Engagement toolbar by hovering over your username and selecting **Setup**, then searching for *Content Builder Settings*.

Email Autosave

Users who want to be more intentional about when edits are saved can disable Email Autosave. Disabling Email Autosave prevents Content Builder from saving accidental edits. We also disabled the timestamp and modified by fields from being updated when you made no changes, whether you have Email Autosave enabled or disabled.

When enabled, Content Builder automatically saves all changes in the editor. When disabled, Content Builder does not autosave when you edit and exit an email before clicking **Save**, or when you open and close an email without editing. Content Builder still autosaves when you navigate to a different step of the wizard.

Email Autosave is enabled by default to minimize disruption. Autosave is only available for editing emails.

Click **Edit**, check or uncheck **EnableEmail Autosave**, then click **Save**.

Across Enterprise Sharing

This setting allows all users to share content with existing and future business units. Click **Edit** to enable or disable, then click **Save**.

Predictable File URLs

Enable this setting to generate a friendlier and more informative name as part of the URL path for published content by using the file name. By default, Content Builder generates a random number at the end of the URL. After uploading, you can edit the file name on the properties page, but you can't edit the URL. You can disable this setting after enabling. The URL uses the structure of the setting at the time of upload.

If Predictive URL is enabled and you want to update an image but use the same name, use **Replace** rather than **Delete**. Deleting a file removes it from the Content Builder library but the file remains published by our third party.

Editor Configuration

Administrators can select the editor options they want available for their business unit. You can configure these editor and block tabs:

Tab	Where
-----	-------

Blocks	Editor
Content	Editor
Layout	Editor
Design	Editor
Code View (for Templates)	Editor
Code View (for Template Based Emails)	Editor
Block Settings	Block
HTML Editor	Block

- Editor Tabs - Click **Edit** to configure the tabs that are available in the editor, then click **Save**.
 - Block Tabs - Click **Edit** to configure the tabs that are available in the editor, then click **Save**.
-  **Note** Before the January 2020 release, you could create layouts from the **Create** menu and edit them in emails even when the permission was disabled. After the release, ensure that the permission is enabled to continue creating and editing layouts.

Block Group Configuration

Admins can select the blocks they want available for their business unit. Click **Edit** in any section to configure block visibility in the editor, then click **Save**.

You can configure these blocks:

Block Name	Block Group	Editor Availability
Button	Basic	Email and CloudPages
Free Form	Basic	Email and CloudPages
HTML	Basic	Email and CloudPages
Image	Basic	Email and CloudPages
Text	Basic	Email and CloudPages
Code Snippet	Basic	Email and CloudPages
Smart Capture	Basic	CloudPages
A/B Test	Advanced	Email
Dynamic Content	Advanced	Email
Enhanced Dynamic Content	Advanced	Email
External Content	Advanced	Email

Einstein Content	Advanced	Email
Live Image	Advanced	Email
Reference Content	Advanced	Email and CloudPages
Image Carousel	Interactive Content	Email
Email Form	Interactive Content	Email
Social Follow	Social Media	Email and CloudPages

Content Builder Permissions

As you get started with Marketing Cloud Engagement Content Builder, it is important to review permissions for the users in your account.

Content Builder Permissions

As you get started with Marketing Cloud Engagement Content Builder, it is important to review permissions for the users in your account.

If your users have the standard Marketing Cloud Engagement roles, those permissions in Content Builder match their permissions in the classic Emails tools. Assign these permissions under Setup > Users > Manage Roles > Permissions.



Note Denying permissions for a user doesn't remove their access to Content Builder.

For users with custom roles, you can assign new Content Builder permissions as follows:

- Content Builder > Assets: These permissions are for managing uploaded files and content blocks. You can specify which users can create, edit, and delete these assets in Content Builder. The permissions in this section apply to assets within Content Builder, not the classic Email tools.
- Content Builder > Folders: These permissions are for managing folders within Content Builder. You can control who can create, view, move, rename, and delete Content Builder folders. There are no permissions for individual folders.

These permissions for Content Builder reference the Email application permissions. If you use the classic Email tools, these permissions aren't added.

- Email > Content > Template: The permission to manage Content Builder templates reside under the Email application permissions. If a user has permission to create, modify, or delete templates within the classic Email tools, they have permission to perform the same actions within Content Builder.
- Email > Content > Email: The permission to manage Content Builder emails reside under the Email application permissions. If a user has permission to create, modify, delete, and send emails within the classic Email tools, they have permission to perform the same actions within Content Builder.

Content imported from Sitecore is saved in the Sitecore subfolder. You can't edit this content, but you can delete it with this permission: Content Builder > Third-Party Content Administrator Access.

Customer Key

Each Content Builder asset has a Customer Key, a unique 36 character identifier that can be referenced via AMPscript.

You can optionally assign your own Customer Key when creating content using any combination of letters, numbers, spaces, or special characters. If you leave the field blank, the system issues a random key.

Customer Keys must be unique across all business units in the enterprise. If you plan to reference an asset by Customer Key, use a naming convention to avoid duplicates, especially for large enterprises. For example, if you create a key of 'logo,' no other asset in any business unit in the enterprise can have a customer key of logo. However, if your parent business unit names an asset bu1-logo, other business units could use bu2-logo.

You can view an asset's customer key in the list view of Content Builder, or by accessing the asset's Properties page. Click Copy to copy it to your clipboard and include in your AMPscript references.

Use customer keys to specify a predictable identifier to your content in case the content is unintentionally moved or renamed. Referencing content by Name instead of Customer Key can result in errors. We recommend using the customer key for these references with Content Builder.

Search for Content

Content Builder provides several ways to locate specific content.

1. To find files within the folder structure, click **Content** and navigate through the folders.
2. To display content via the Filters tab, select **Filters** and filter based on existing criteria in the following categories.
 - Types (such as images or text)
 - Tags
 - Owners

The grid displays available content that matches the filter criteria you select.

3. To find files by searching, type in keywords or filenames in the search field. The search displays information based on the following categories:
 - Content
 - Name
 - Content within files



Important To use the search, include at least three numbers or letters in succession, excluding symbols. Search returns all content that contains all or part of the keyword. For example, "Saturday" returns all content that contains "Saturday", "sat", "day", and so on.



Note It may take up to 30 seconds for edited or new content to display in this search.

4. To sort your content by field, select a field name.
5. To view a different balance between content and textual information, select list or thumbnail.

Watch a 2-minute video on [Organizing Your Content](#).

Folder Management

Store images, documents, templates, emails, and more in the same or different folders in Marketing Cloud Engagement Content Builder. Create, rename, move, or delete folders by right-clicking in the appropriate folder space.

Folder Options

Folder Option	Description
Create Folders	Create your own folder structure by right-clicking on Content Builder or a parent folder to create a subfolder.
Rename a Folder	Rename any of the folders you've created. You cannot rename the default root folder, Content Builder.
Move a Folder	Adjust your folder structure by making the top-level folders you've created into subfolders of other folders, or by promoting subfolders. You cannot move the default root folders, Content Builder. Also, the order in which the folders appear in your folder structure is alphabetical. To display folders in a different order, rename them.
Delete a Folder	You can only delete empty folders. You cannot delete the default root folders, Content Builder. To delete a folder that contains content, move the content into a different folder before deleting the folder. If the content in the folder is no longer needed, delete the content before deleting the folder.

Content Builder FAQs

Review frequently asked questions about Marketing Cloud Engagement Content Builder.

Are these tools available in all Email Studio editions?

Content Builder is available in all Email Studio Editions. Distributed Sending and XpressMarketing accounts don't have access to Content Builder or Content Builder emails.

How do I send an email created in Content Builder?

Content Builder emails can be sent using Email Studio Send Flow, User-Initiated Sends, Triggered Sends, Transactional Messaging REST API, Distributed Marketing, Automation Studio, Journey Builder, and Marketing Cloud Connect.

When do I use a Code Snippet instead of an HTML block?

When you use AMPscript to pull content blocks, the editor wraps the block in a table. If you don't want this table wrapper, use Code Snippets.

What is the limit to the number of assets in a folder in Content Builder?

Shared folders have a limit of 5,000 assets. There's no limit to the number of assets that can be stored in a local folder.

What is the maximum size of a file that can be uploaded to Content Builder?

The maximum file size for files uploaded to Content Builder is 5 MB for all file types.

Can I use Return Path with Content Builder emails?

No. This solution is no longer available.

Can I use Litmus with Content Builder emails?

Yes.

Have AMPscript functions changed with Content Builder?

Content Builder supports all relevant content functions, using SSJS or AMPscript. When using these functions in Content Builder, update the relevant lookup functions to reference the Content Builder content.

When I create a custom template in the new editor, why don't my account headers and footers appear?

To get your account headers and footers to display in your template, add the `<custom type="header"/>` tag where you want the header to display and the `<custom type="footer"/>` tag where you want the footer to display in your custom HTML template.

How do I customize headers and footers for my emails created in Content Builder?

Content Builder uses the same HTML Headers and Footers created in the Setup app. See [Headers and Footers](#).

Is there a cost associated with Content Builder?

Customers can access Content Builder at no additional cost.

Content Builder Editor Best Practices and Tips

Learn best practices and tips for the Content Builder editor in Marketing Cloud.

How-To Videos

See [Email Studio and Content Builder How-To Videos](#)

Editor Basics



Note Don't include personally identifiable information, such as the email address, in email links.

- A live, persistent preview on the right side of the page updates as changes are made, whether in Layout view or Code View.
- User-friendly features like auto-complete of HTML, tag matching, color coding, line numbers, and automatic formatting help you edit HTML source.
- In Layout view, drag content, content blocks, or content layouts onto the preview canvas where you want. When blocks are on the page, you can drag them to another location in the email or template.
- You can use the Tree View to duplicate, edit, or delete blocks.
- Drag multiple blocks to any content area unless the content area is restricted. There's no longer a one-to-one relationship between content areas and blocks.
- Drag images directly from your computer to an email or template. The image automatically uploads to Content Builder.
- A content block or content layout created while editing an email or template can be saved to Content Builder for reuse.
- The HTML that is output by the editor is high quality. For example, the classic editor would sometimes wrap images with <p> tags, causing formatting issues. The Content Builder editor doesn't add <p> tags.
- If you intend to use the Scale to Fit option on images in email, resize your image to the maximum width and height desired. Using a larger width and height avoids image distortion when viewing emails in Outlook.



Note Scale to Fit isn't supported in Outlook.

- **Paste as Plain Text** and **Paste from Word** toolbar buttons aren't supported by all browsers. To paste with formatting, use Cmd+V on Mac, or Ctrl+V on Windows.



- HTML content blocks can add extra code wrappers to your message. To preserve your code, use code snippets instead.

Templates

- Whether creating a template via paste HTML or starting with an existing template, the editing experience is the same. You can start a template with paste HTML, then change to Layout mode for drag and drop editing.
- Content areas and content blocks don't have a one-to-one relationship. By default, you can add as many blocks to a content area as you want. As a result, you can reduce the number of content areas in their templates.
- Content areas can have restrictions. You can limit the number and type of blocks that can be dropped in a content area. For example, you can limit a banner-type content area to only one block and limit it to image blocks only.
- After content has been placed in a content area, you can lock that content area so it can't be changed in emails created using that template.
- To allow the template creator to include instructions in each content area, change the default "drop blocks or content here" message in each content area. Change the default either in the HTML or via the UI on the Content Area Properties tab.
- In HTML paste templates, add the header, footer, and open tracking tags if you want them added to emails.
- Content areas are identified with the `<div data-type="slot" data-key="(unique key)">` syntax. The editor still recognizes @@contentarea and <custom> syntax from the classic editor. The div definition allows the max number of blocks, the blocks allowed, and the text message displayed in empty content to be defined in the HTML. Defining properties directly in the HTML is useful when creating Paste HTML templates.

Example:

```
<div data-type="slot" data-key="Hero1" data-max-blocks="1" data-allowed-blocks="imageblock; textblock; freeformblock; abtestblock; dynamicblock" data-label="Place Hero Image Here"></div>
```

In this example, the content area allows for a maximum of one block. The block must be an image, text, freeform, a/b test or dynamic content block. The message shown inside the empty content area is "Place Hero Image Here".

- A few reserved keywords can't be used as the data-key value on a content area. Using them can render the template unusable after it's saved.
 - Content
 - Subcontent
 - Supercontent
 - Design
 - Tags

- Filename
- Createdbyname
- Modifiedbyname
- Ownername
- Name
- legacyID
- legacycategoryID
- Legacytype
- enterpriseID
- To take advantage of all the editor's features, use the library of templates to create an email or as the starting point for a template. Existing Layouts are known simply as “Empty” templates. These templates conform to best practices for mobile responsiveness.
- The Global Styles component allows you to easily change styles in one location and cascade those styles throughout the template or email. Global styles are only present on emails and templates based on one of the provided templates.
- To make columns in Content Layouts stack when viewed on mobile devices, add the following CSS to the mobile media query in your template:

```
body .responsive-td {width:100% !important; float:left !important; padding:0 !important; }
```

Emails

Wizards walk you through changing the template the email uses or to update the current template.

Code in the Code View editor of a template-based Content Builder email is locked, and you can't copy the code. To copy code, select the code, right-click, then select **Create Code Snippet**. You can also select **Save as Template** from the **Save** button menu that allows you to copy the code or edit the code directly in the Code View editor.

AMPscript Functions and Other Scripting

- The following AMPscript functions reference content blocks and images in Content Builder:
 - ContentBlockbyID, ContentBlockbyKey
 - ContentImagebyID, ContentImagebyKey
 Content Builder AMPscript functions also work with Code Snippets.
- When AMPscript is used to pull in content blocks, the table the editor adds that wraps the blocks is pulled in as well. If you don't want this wrapping table, use Code Snippets instead.
- When adding AMPscript Content Builder functions, search for and select images and blocks to reference without leaving the editor. Activate the search in the editor by clicking Browse... when you type the function. 
- See [AMPscript Syntax Guide](#) for more information.

Upload Files

Upload content to Content Builder by dragging and dropping existing content, by browsing your computer for the content, or by uploading content from an external URL. The maximum file size per file is 5 MB.



Note Most content* uploaded to Content Builder is stored and published by a third-party content delivery network to ensure optimized delivery to your audiences worldwide. The content delivery network has complete access to the content and creates a public URL containing the content that isn't protected by login credentials. Until the content is successfully published to the third-party content delivery network, the public URL returns a 404. The publishing process can take up to several minutes. Deleting a file removes it from the Content Builder library but the file remains published by our third party. If Predictive URL is enabled and you want to update an image but use the same name, use **Replace** rather than **Delete**. *Code files aren't published to this third party. These files include the following extensions: htm, html, xhtml, xht, css, less, sass, js, json, atom, rss, xml, sxl, sxlt, md, markdown, as, fla, eml.

1. Click **Create** and mouse over **Upload > Content**.
2. Click **Upload**.
3. There are two ways to upload content.
 - Drag Files: Drag files from your computer to the upload window to add one or more files, then click **Upload and Publish**.
 - Browse for Files: Click **Create, Upload**, select the file, and click **OK**.

Replace Content

Replace content in Marketing Cloud Engagement Content Builder. You can only replace content added using the upload process.

Copy File URL

Copy the URL of a Marketing Cloud Engagement Content Builder file for use in another email, landing page, or another location

Supported File Types

You can upload to Content Builder these file types up to 5 MB per file.

Replace Content

Replace content in Marketing Cloud Engagement Content Builder. You can only replace content added using the upload process.



Note If Predictive URL is enabled, replacing a file retains the published URL. Replacing the file is useful if you're using AMPscript in an email to populate an image URL whose name matches a data extension value. Deleting a file removes it from the Content Builder library but the file remains published by our third party.

1. Click the actions dropdown.

2. Click **Replace**.
3. Drag or browse for the file to replace the existing file.
4. Click **Upload and Publish**.

Copy File URL

Copy the URL of a Marketing Cloud Engagement Content Builder file for use in another email, landing page, or another location

If your account doesn't use an SSL certificate and you have a Sender Authentication package, images in emails show your custom domain.

1. In the Content Builder library, click the actions dropdown for a file.
2. Select **Copy Published URL**.
3. Paste the URL in an email, landing page, or wherever you need the URL.

Supported File Types

You can upload to Content Builder these file types up to 5 MB per file.

Document	Image	Audio	Video
.vcf	.jpg	.mp3	.mp4
	.png	.aif	.avi
	.gif	.wav	.mpeg
	.jpeg		



Note Custom font files are not supported.

Create Emails in Content Builder

Use this task to create an email in Content Builder for Marketing Cloud Engagement. Email names must be unique within a folder.

1. Click **Create** within Content Builder.
2. Click **Email Message**.
3. In Define Properties, choose a creation method, and complete the fields.
 - a. Template - Choose one of many standard templates.
 - b. HTML - Paste your custom HTML code.
 - c. Text Only - Create from text only. You can also [use a code snippet](#).
 - d. Existing Email - Use one of your Classic or Content Builder saved emails.
4. Define Email properties. Enter text in the required (*) fields then hit save or Next
5. Select **Next**.

6. In Add Content, build your email, and click **Next**.
7. Preview and test your email, then **Save**. To send your email, use Email Studio [Send Flow](#). To send an email, use Journey Builder or [Email Studio](#).

AMP for Email

AMP for Email is a new open-source email standard that allows customers to interact with messages directly in their inbox and offers real-time content and data at open. Use Marketing Cloud Content Builder to build AMP emails. Common use cases include carousels, confirmations and opt-ins, real-time data, browsing and research, and appointment booking.

Create an Email in Content Builder

The process of creating an email in Email Studio starts with choosing the type of email you want to create. After you create an email, you can send it immediately or schedule it to be sent later.

Creating Messages in Content Builder Using Einstein Generative AI

To generate subject line and body copy options for your Content Builder messages use Einstein generative AI. If you've created subject lines or body copy in Einstein Copy Insights, you can copy the text to use in Content Builder and create tailored variations for your audiences.

Content Builder Message Creation Tips

Learn tips for creating emails in Content Builder.

AMP for Email

AMP for Email is a new open-source email standard that allows customers to interact with messages directly in their inbox and offers real-time content and data at open. Use Marketing Cloud Content Builder to build AMP emails. Common use cases include carousels, confirmations and opt-ins, real-time data, browsing and research, and appointment booking.

Get Started with AMP for Email

To build an AMP email in Marketing Cloud Engagement Content Builder, first create the email by choosing an AMP email template or accessing the AMP editor view in an email.

AMP for Email Best Practices

Use these tips and best practices when building AMP emails in Marketing Cloud Engagement Content Builder.

Appendix: Use GTL with AMP for Email Mustache Syntax

Guide Template Language and AMP Mustache templates use the same delimiters (double curly braces {{ and }}). Therefore, when sending AMP containing Mustache templates through Marketing Cloud Engagement, ensure that you add a snippet of code at the top to change the GTL delimiters.

Get Started with AMP for Email

To build an AMP email in Marketing Cloud Engagement Content Builder, first create the email by choosing an AMP email template or accessing the AMP editor view in an email.



Note You can enable or disable AMP Email from Setup > Content Builder Settings.



Register with Email Clients That Support AMP

Before you build the email, complete the [AMP for Email: Sender Registration form](#). This is the only form required to allowlist your supported email client to send AMP emails.

Resources

After registering, consult the AMP documentation to learn how to build and validate emails:

- [AMP documentation](#)
- [AMP Component Catalogue](#)
- [Gmail AMP for Email Playground](#)
- [Test your AMP emails in Gmail](#)
- [AMP Send Guidelines](#)

AMP for Email Best Practices

Use these tips and best practices when building AMP emails in Marketing Cloud Engagement Content Builder.

General

- Ensure that your AMP email has an HTML fallback for email clients that can't display AMP content.
- Ensure that you create content for all three MIME types.
- There's one subject line and one preheader for all three MIME types.
- Design using familiar UI conventions.
- Use the built-in state options provided by AMP.
 - AMP-list: placeholder, fallback. In this case, fallback is the name of the attribute used by AMP.
 - AMP-form: submitting, submit-success, and submit-error
- Test with the validator AND in email clients.
- For AMP to work correctly, Multipart MIME must be enabled.

Use HTML and CSS in AMP

- AMP supports most CSS and HTML. Follow modern web standards when coding.
- You can also copy the code over from your HTML version. As a shortcut to get started, copy over your HTML version, then make edits to pass AMP validation.
- Include AMP attribute in HTML `<html ⚡email lang="en">`
- Include AMP `<script>` elements.
- Only use a single style block and no important statements.
- Wrap your content in `<article>` elements and don't use `<main>`
- Use `<amp-img>` instead of `<img>`.

- Images require SSL for AMP support.

AMP for Email and Marketing Cloud Engagement Scripting Languages

- AMP for Email can be used with AMPscript or GTL.
- Content Builder code snippets can produce AMP validation errors.
- ContentBlockBy functions don't work with AMP.
- Though AMP validator doesn't recognize AMPscript or GTL, you can preview and test an email in Subscriber preview in Content Builder to ensure your email renders correctly.
- To avoid conflict with AMP Mustache, change GTL Delimiters `{{=<>=}}` at the message level.

Code Resources

A code resource is a CloudPages feature that allows you to store and load JavaScript, CSS, and other files from a message or page. Code resources work with all Marketing Cloud Engagement scripting languages. The JSON code resource allows you to create a custom data source for AMP emails to use at the time of open. See [Code Resource](#).

These custom data sources can be used with certain amp components, such as:

- `<amp-list>` dynamically downloads data and creates list items using a template. See [amp-list documentation](#).
- `<amp-form>` allows you to create forms to submit input fields in an AMP document. See [amp-form documentation](#).
- `<amp-autocomplete>` suggests completed results that correspond to the user's field input. This feature can help the user complete their task quicker.

Security Concerns

AMP for Email handles request security by using the Cross Origin Resource Sharing (CORS) method to secure requests made from the email to outside services. If you use CORS, ensure that you use it inside a code resource. It's the users discretion responsibility to use this level of security. See [CORS security in AMP](#).

Appendix: Use GTL with AMP for Email Mustache Syntax

Guide Template Language and AMP Mustache templates use the same delimiters (double curly braces `{{` and `}}`). Therefore, when sending AMP containing Mustache templates through Marketing Cloud Engagement, ensure that you add a snippet of code at the top to change the GTL delimiters.

The `<!-- {{=<>=}} -->` snippet changes the delimiters from `{{variable}}` to `<variable>`

Code Sample

You can send this code example in Marketing Cloud Engagement to see how the delimiter change works. To see what happens when you don't account for the delimiter conflict, remove the delimiter change.

```
<!-- {{={< >}} -->
<!doctype html>
<html >4email>
<head>
  <meta charset="utf-8">
  <script async src="https://cdn.ampproject.org/v0.js"></script>
  <script async custom-element="amp-list" src="https://cdn.ampproject.org/v0/a
mp-list-0.1.js"></script>
  <script async custom-template="amp-mustache" src="https://cdn.ampproject.or
g/v0/amp-mustache-0.2.js"></script>
  <style amp4email-boilerplate>body{visibility:hidden}</style>
</head>
<body>
  Check out these latest deals from our store!
  <amp-list src="https://amp.dev/static/samples/json/cart.json" layout="fixed-
height" height="80">
    <template type="amp-mustache">
      <div id="cart">
        <!-- These items (and their prices) can be updated dynamically. -->
        {{#cart_items}}
        <div class="cart-item">
          <span>{{name}}</span>
          <span>{{price}}</span>
        </div>
        {{/cart_items}}
        {{^cart_items}}
          There are no featured products available. Please check back again la
ter.
        {{/cart_items}}
      </div>
    </template>
  </amp-list>
</body>
</html>
```

Create an Email in Content Builder

The process of creating an email in Email Studio starts with choosing the type of email you want to create. After you create an email, you can send it immediately or schedule it to be sent later.

- **Template Based:** Choose this option if you already have a template that you're using for this email.
- **HTML Paste:** Choose this option to type or paste HTML code for an email into the editor.
- **Text Only:** Choose this option if you want to create an email that displays as text only in your subscribers' inbox regardless of their display preferences. Opens data is never reported for text-only emails.



Note This option may not be enabled in your account. To enable it, contact your Marketing Cloud Engagement account representative.

Create a Content Builder Email

Create a Content Builder email through Email Studio Content.

Create a Content Builder Email

Create a Content Builder email through Email Studio Content.

Before following these instructions, confirm that you can access Content Builder.

1. Click **Content** in Email Studio.
2. Click **Create**.
3. Select a Create Email option.
4. Fill in the fields.
5. Click **Next**.
6. Enter a Subject.
 -  **Note** Enter a subject line before sending the email. The subject appears in the subject line of the email when the email is delivered. Insert personalization strings, select a symbol, or create dynamic content as needed.
7. If needed, enter a Preheader and customize using personalization strings, symbols, or create dynamic content
8. Build your email according to the type of email you are creating: [Template](#), [HTML](#), or [Text Only](#).
9. Click **Next**.
10. Complete the Subscriber Preview and Test Sending section.
11. Click the desktop and mobile icon to preview how the email displays on desktop and mobile devices.
 -  **Note** Emails created for mobile optimization adjust according to the screen size of the device the email is being viewed on.
12. Click **Layout** to preview the HTML version of the email.
13. Click **Plain Text** to preview the text version of the email received by people whose email clients are unable to accept HTML content.
14. Save or click the back arrow to exit without saving.

Build an Email from a Template in Content Builder

Use Content Builder to create an email from a template.

Build an Email from HTML with Content Builder Tools

Use Content Builder tools in Email Studio to build an email by pasting in HTML.

Build a Text Email Using Content Builder Tools

Use Email Studio Content Builder tools to build a text-email that displays as text only in your subscribers' inbox, regardless of their display preferences. The open rate data is never reported for text-only emails.

Build an Email from a Template in Content Builder

Use Content Builder to create an email from a template.

1. In Content Builder, click **Create** and select **Email Message**.



Note The code shown in the Code View section of a template-based email is locked and can't be copied. To copy code, select the code, right-click, and then select **Create Code Snippet**. You can also select **Save as Template** from the **Save** button menu, which allows you to copy the code or edit the code directly in the Code View editor.

2. Select a template from the **Template** dropdown and click **Select**.
3. To add content, name your email and click **Next**.
4. From the Blocks tab, drag content blocks to content areas in the editor.
5. From the Content tab, drag saved content to content areas in the editor.
6. To view and update the email received by subscribers whose email clients don't accept HTML, click **Plain Text**.
7. To add layouts sections, select the **Layouts** tab, drag layouts to the editor, and then drag blocks into the content areas to create a group of content.
8. To set or change the template and styles of the email, select the **Design** tab and click **Change Template**.
9. Enter an email subject and optional preheader, then click **Next** to preview and test your email.
10. To send an email, use Journey Builder or [Email Studio](#).
11. To apply changes to an existing Email Template, follow these steps:
 - a. Select the Email Name to update.
 - b. Click **Properties** and make your changes.
 - c. Apply your template changes.

To update an email that uses this template to the modified version, click **Update Email Now** from the email properties. The updated template adds content areas to the email for each edited template area. Review the content versions and delete the ones you don't want.

Edits to emails used in active journeys aren't used in the journey until you update the activity. See [Update an Email in a Running Journey](#).

Build an Email from HTML with Content Builder Tools

Use Content Builder tools in Email Studio to build an email by pasting in HTML.

1. Add your HTML using an option:
 - a. Enter or paste your HTML directly into the editor window on the left side of the screen.
 - b. Click browse to select your HTML from Content Builder or your computer.

- c. Drag files from your computer to the upload window to add a file.

2. Use insert code snippet  to add system links. Use the insert attributes  to add personalization.

 **Note** Do not include personally identifiable information data, such as email address, in email links.

3. Click **Format HTML** to add proper indentation and spacing to your HTML. Use **Word Wrap** to specify whether a browser may break lines within words. Use **Line Numbers** to add or remove line numbers from displaying in the editor.
4. To track how many people open your email, select insert code snippet  then click **Track Email Opens**.
5. Use the add email tools control to add the required fields **Physical Mailing Address** and **Profile Center**.
6. To display account headers and footers add the `<custom type="header" />` tag where you want the header to display and the `<custom type="footer" />` tag where you want the footer to display.
7. Click **Plain Text** to view how the email is received for people whose email clients don't accept HTML content.

 **Note** Edits to emails used in active journeys are not used in the journey until you update the activity. See [Update an Email in a Running Journey](#).

Insert Content Builder Image in HTML Paste Email

Use the image URL of your Content Builder image in an `<img src>` reference tag in your Email Studio HTML paste email.

Insert Content Builder Image in HTML Paste Email

Use the image URL of your Content Builder image in an `<img src>` reference tag in your Email Studio HTML paste email.

1. Navigate to Content Builder.
2. Click your image.
3. Click **Copy** for the URL in image details.
4. Open the email for editing in code view.
5. In the HTML editor, insert an img src reference tag and paste the URL.
You end up with code similar to: ``.
6. Save your work.

Build a Text Email Using Content Builder Tools

Use Email Studio Content Builder tools to build a text-email that displays as text only in your subscribers' inbox, regardless of their display preferences. The open rate data is never reported for text-only emails.

Before building the email, confirm that you can access Content Builder.

1. Select **Text Only** as the email type.
2. Add your text in the editor window.
3. Use  (Insert Attributes) to add personalization.
4. To display account headers and footers in your text-only email, add the {{> _header}} tag where you want the header to display and the {{> _footer}} tag where you want the footer to display. Use the add email tools control to add the required fields: Physical Mailing Address and Profile Center.



Note Edits to emails used in active journeys aren't used in the journey until you update the activity. See [Update an Email in a Running Journey](#).



Note Updates to one version of the email, either HTML or plain text, don't affect the other version. Click **Restore text from HTML** to revert to text automatically generated by the HTML version.

Creating Messages in Content Builder Using Einstein Generative AI

To generate subject line and body copy options for your Content Builder messages use Einstein generative AI. If you've created subject lines or body copy in Einstein Copy Insights, you can copy the text to use in Content Builder and create tailored variations for your audiences.

Start by entering a key message up to 300 characters. Then choose a brand personality, and optionally enter a sample subject line or body copy. If you don't like the generated options, start over and create another set of options. Iterate on your favorite options until you land on the perfect subject line or body copy.

Different factors can drive your brand personality choices. For example, if you want to promote a new line of summer clothing for children, you can choose a playful personality. Or if your target audience is avid hikers, you can choose an adventurous personality. If you don't see a personality option that fits your needs, ask your Salesforce admin to add it in Einstein Copy Insights Setup.

If you use the third-party integration with Typeface, drag the content block where you want it, and generate images to accompany your content.

Typeface Generative AI Content

Salesforce has partnered with Typeface, a non-SFDC application, to generate images to take your generative AI content to the next level.

Typeface Generative AI Content

Salesforce has partnered with Typeface, a non-SFDC application, to generate images to take your generative AI content to the next level.

These prerequisites are required to use Typeface.

- Salesforce Marketing Cloud Engagement with Content Builder
- A Typeface account
- The Typeface app from App Exchange

The Content Builder Typeface block lets you use Typeface's generative AI to create branded assets for campaigns in the flow of your work. You can remove backgrounds, extend images, replace objects, and also edit images with a few clicks and natural language. Save time and money producing visually rich and sophisticated images without expensive graphic design assistance by connecting to your Typeface account.

For more information about how Typeface works with Salesforce Marketing Cloud Engagement, see [this Typeface blog post](#).

Content Builder Message Creation Tips

Learn tips for creating emails in Content Builder.

Email

- See [Email Studio and Content Builder How-To Videos](#)
- To quickly get started creating emails, use email templates. Update content blocks with relevant content for your email and brand. Delete unused content blocks from the email before sending.
- On the Add/Edit Content step of the email creation flow, you can save an email as a template for future use. Use templates as a starting point for a simplified email creation process, especially for content that's repetitive.
- Use any of these options to create or modify emails with similar content:
 - Create an email from a template.
 - Create from an existing email.
 - Duplicate then rename the email.
- To start from an email created with the classic tools, select **Create from existing email**, then select the classic email. This action copies the content in your classic email to Content Builder so you can edit, test, and send the email with the new tools.
- Preview and test your emails before sending. We recommend test sending emails to different email clients, browsers, and devices to ensure the email renders correctly.
- To preview emails with targeted 1:1 personalization, set up a test audience and include multiple subscribers and attributes. To preview how the email renders, select a subscriber in Subscriber Preview and toggle between subscribers.
- Quickly send a test email to up to five recipients. Or test send to a larger audience using test data extensions.
- You can test send emails based on multiple content personalization options:
 - Individual subscriber selected in Subscriber Preview
 - Entire subscriber audience in Subscriber Preview
 - Recipient Test Data Extension
- The Subject Prefix field in the Preview & Test step on the Test Send tab can be updated with a test-related word that pre-pends to the Subject in the test send.

- Use the Approvals workflow with Content Builder emails to verify and control emails before live sending. If Approvals is enabled in your account, select **Start Approvals** in the creation workflow or in the email properties to collaborate with your team in finalizing your email campaigns.
- To quickly locate emails, the Email Subject Line field is displayed in the Content Builder library under the Email Name.
- When Marketing Cloud Engagement sends an email, it inserts hard line breaks in the email to reduce the line length because some mail servers don't accept emails with lines longer than 700–980 characters. Engagement doesn't insert breaks in URLs. If the URL is long or you want to specify where lines break, the maximum line length is 700–980 characters.
- To reference Content Builder emails in SQL queries, use the Email ID on the Details screen.
- Asset ID on the Details screen is the primary key for each Content Builder asset. Use Asset ID to reference content blocks with the ContentBlockByID() AMPscript function.
- Edits to emails used in active journeys aren't used in the journey until you update the activity. See [Update an Email in a Running Journey](#).

Mobile

Mobile activities in a running journey can't be edited. Create a version of the journey and use the edited email. See [Journey Versions](#).

Create Templates

Use Content Builder to create templates by pasting HTML or using a layout tool.

1. Click **Create**.
2. Hover over **Template**.
3. Select a template type. When creating from an existing template, select the template to start creating from and click **Select**.
4. Save the template.
5. Complete required fields.
6. Add content to the email.
7. Save the email.



Note Editing a template doesn't automatically affect emails you used the template to create. Deleting a template doesn't delete emails created using that template.

[Email Client Support for Default Templates](#)

Marketing Cloud Engagement has tested these browsers and clients for compatibility with Content Builder email templates.

[Add Content to a Template](#)

Use one or more options to add content in Content Builder to display in the email.

[Add Content to a Paste HTML Template](#)

If you have HTML email content, add it to this Content Builder template.

[View or Modify a Template](#)

Follow these steps to view or modify a template in Marketing Cloud Engagement Content Builder.

Single Source Template Strategy

A Single Source template allows you to create content once and reuse the content for multiple emails, contexts, and audiences. For example, if you're sending a campaign to multiple countries that have multiple languages, each language requires a separate email which can total 200 emails or more. The number of emails increases when you segment into commercial and transactional or other customer-based profiles. To reduce unnecessary work, create a single source template that never changes, and create new emails based on the template.

Email Client Support for Default Templates

Marketing Cloud Engagement has tested these browsers and clients for compatibility with Content Builder email templates.

These email clients and mobile apps are tested for use with Content Builder default templates. Content and layouts were verified in emails built using default templates with email and web-based clients, apps, and devices.

Grades

- A - Thoroughly tested. Email templates are fully supported in these email clients.
- B - Not thoroughly tested. Email templates are assumed to be functional in these email clients. Defects are investigated and fixed, if possible.
- F - Explicitly unsupported and untested email clients.

Desktop Clients

Type	Client	Operating System or Browser	Grade
Desktop	Outlook Office 365	Windows 10	B
Desktop	Outlook Office 365 Dark	Windows 10	B
Desktop	Outlook Office 365	mac OS 10.15	A
Desktop	Outlook 2019	Windows 10	B
Desktop	Windows 10 Mail	Windows 10	B
Desktop	Outlook 2016	Windows 10	B
Desktop	Outlook 2016	OS X 10.12	B
Desktop	Apple Mail 13	macOS 10.15	A

Type	Client	Operating System or Browser	Grade
Desktop	Apple Mail 13 Dark	macOS 10.15	A
Desktop	Apple Mail 12 Dark	macOS 10.14	A

Mobile Clients

Type	Client	Operating System or Browser	Grade
Mobile	iPhone 11 pro max	iOS 13	A
Mobile	iPhone 11 pro	iOS 13	A
Mobile	iPhone 11 pro Dark	iOS 13	A
Mobile	iPhone 11	iOS 13	A
Mobile	iPhone XR	iOS 13	A
Mobile	iPhone XS	iOS 12	A
Mobile	iPhone 8 Plus	iOS 13	A
Mobile	iPhone XS Max	iOS 12	A
Mobile	Microsoft Outlook	iOS 11.13	A
Mobile	iPad Pro (12.9 inch)	iOS 13	A
Mobile	iPad Pro (11 inch)	iOS 13	A
Mobile	iPad Mini	iOS 13	A
Mobile	iPad (Gen 7)	iOS 13	A
Mobile	Gmail App	iOS 13	A
Mobile	Gmail App	Android 8.0	A
Mobile	Samsung Mail	Android 10.0	B

Web Clients

Type	Client	Operating System or Browser	Grade
Web	Mail.ru	Latest version of Chrome and Firefox	A

Type	Client	Operating System or Browser	Grade
Web	Yahoo mail	Latest version of Chrome and Firefox	A
Web	Gmail	Latest version of Chrome and Firefox	A
Web	G Suite	Latest version of Chrome and Firefox	A
Web	Office 365	Latest version of Chrome and Firefox	B
Web	Outlook.com	Latest version of Chrome and Firefox	A

Last update: May 2020

Add Content to a Template

Use one or more options to add content in Content Builder to display in the email.

1. Drag one or more blocks from the Blocks tab to create content in your template, and follow the instructions according to the type of block selected.
2. To select existing content to add to your template, select **Content**. You can also search to find saved content and drag the content directly from search.
3. To drag a grouping of blocks to the canvas, select **Layouts**.
4. To set or change template styles, select **Design**. You can also lock and unlock features to restrict edit access to certain style elements in your template. See [Lock a Content Area](#).
5. Duplicate, edit, nest, or delete blocks with the Tree View.
In the Tree View, you can see and edit the email structure without scrolling the preview or dragging blocks. The Tree View is optimized for screen reader and keyboard navigation.
6. To insert more content areas in your template, follow these steps:

You can place a content box anywhere a table can be placed. If you're using HTML tables, you can include one content box per tag.

- a. Click **Code View**.
- b. Place your cursor in the HTML code at the location where you want the content area to appear in the template.
- c. Click **Insert Code Snippet**.
- d. Click **Content Area**.
- e. Place the content area between the open and close body tag. To size and format the content box you've created, add formatting tags.



Note When you edit a template, the edits don't automatically affect emails already created from

that template. Deleting a template doesn't delete the emails created from that template.

7. To view the full HTML, click **Code View**.

The full HTML of the email displays in a view-only pane on the left. A lock icon indicates that you can't edit the HTML.



Note When editing template HTML, a new option at the bottom of the HTML editor lets you toggle to the full view of the HTML. You can't edit HTML in this view, and block HTML is highlighted.

Complete Create Template Fields

Follow these steps to complete the field information and steps when creating a template in Content Builder.

Lock a Content Area

Follow these steps to lock content areas in Content Builder. This feature allows you to add content to a template and then lock the content. You cannot change that content when using that template to create an email.

Modify the Content Area Properties

Follow these steps modify the content properties in Content Builder. Limit the number of blocks added to a content area. You can also specify the types of blocks added to a content area or change the default message displayed for a content block.

Complete Create Template Fields

Follow these steps to complete the field information and steps when creating a template in Content Builder.

1. Enter an internal name. You and other users see this name in your folders, but external subscribers do not see this name.
2. To choose a different folder, choose **Change** in the Location field.
3. Enter an internal description of the template. The template description is what you and other users see in your template folder.
4. To associate the email with a tag, choose **Add** and enter the name of a tag.
5. To select business units and set sharing permissions, choose **Share**.

Lock a Content Area

Follow these steps to lock content areas in Content Builder. This feature allows you to add content to a template and then lock the content. You cannot change that content when using that template to create an email.

1. Select the template in from the Content Builder library.
2. Click **Edit**.
3. Hover over the title bar of the content area then click the **down arrow**. 
4. Click **Lock** and **Save**.

A red lock appears at the top corner of the content and the content is disabled. Choose **Lock** again to unlock the content area.

Restrict a Content Area

Follow these steps to restrict a content area in Content Builder. This action allows the addition of only the specified number and types of content to the content area when creating an email from the template.

Restrict a Content Area

Follow these steps to restrict a content area in Content Builder. This action allows the addition of only the specified number and types of content to the content area when creating an email from the template.

1. Choose **Edit**.
2. Choose **Restrictions**.
3. Set the Max Number of Blocks allowed to be used in this content area.
4. Select the Types of Blocks allowed to be used in this content area.
 When content exists in the content area before restrictions are set, the number of blocks in the content area are the minimum number of blocks you can set. For example, if there are three blocks in the content area before you sets restrictions, you cannot select fewer than three blocks.
 All types are allowed in the block by default. To choose specific block types, search for them in the search bar and select them. Those blocks appear in Selected. You can also click the drop-down list of common blocks and choose blocks from there. Select blocks appear in the respective block. To no longer allow that block type, click X next to the type. If a section contains content before you set restrictions, then you can set restrictions on the types of blocks.
5. Choose **Done Editing**.

Modify the Content Area Properties

Follow these steps modify the content properties in Content Builder. Limit the number of blocks added to a content area. You can also specify the types of blocks added to a content area or change the default message displayed for a content block.

You could limit the content area for a banner image to a maximum of one image block. Make that block display the message Banner Image Only.

1. To view or modify in the All Content grid, choose the name of the template.
2. Hover over the title bar for the content area then choose **downarrow**.
3. Choose **Properties**.
4. Configure the content properties:
 - Content Design Assistance - Enter text to replace the default message.
 - Max Number of Blocks - Select the maximum number of blocks a content area accepts.
 - Types of Blocks - Select the block types accepted by that content area.
5. Click **Done Editing** and **Save**.

Add Content to a Paste HTML Template

If you have HTML email content, add it to this Content Builder template.

Contact your relationship manager if you don't have this feature enabled in your account.

Use these options to add content to the email. Use the toolbar to insert system-provided options.



Note Editing a template doesn't automatically affect emails you used the template to create. Deleting a template doesn't delete emails created using that template.

1. Enter or paste your HTML into the editor.
2. To select your HTML from Content Builder or your computer, click **Browse**.
3. To add a file, drag files from your computer to the upload window.
4. Use the insert code snippet  to add system links and HTML elements.
5. Use the insert attributes controls  to add personalization.
6. Insert a content area.
 - a. Place your cursor in the HTML code where you want the content area to appear in the template. Insert a content box anywhere you can insert a table. If you're using HTML tables, use one content box per tag.
 - b. Click **Insert Code Snippet**.
 - c. Click **Content Area**. To size and format the content box you have created, add formatting tags. Make sure your content area name is alphanumeric and less than 17 characters and contains no spaces or uppercase characters.



Note To set the maximum number of blocks a content area accepts, update the `data-max-blocks` attribute in the HTML. In the example, the content area allows for a maximum of one block. The block must be an image, text, freeform, a/b test, or dynamic content block. The message shown inside the empty content area is "Place Hero Image Here".

```
<div data-type="slot" data-key="Hero1" data-max-blocks="1" data-allowed-blocks="imageblock; textblock; freeformblock; abtestblock; dynamicblock" data-label="Place Hero Image Here"></div>
```

7. To track how many people open your email, select **Insert Code Snippet** and then click **Track Email Opens**. Insert the tracking pixel immediately after the opening `<body/>` tag.
8. Use **Insert Code Snippet** to add the required fields, physical mailing address, and profile center. Type the physical mailing address and profile center in the template or the email created from this template.
9. To display an account header or footer in your paste HTML template, add the `<custom type="header" />` tag where you want the header to display or the `<custom type="footer" />` tag where you want the footer to display. This feature is only available for HTML paste templates.

View or Modify a Template

Follow these steps to view or modify a template in Marketing Cloud Engagement Content Builder.

Editing a template doesn't automatically update emails already created from that template. Deleting a template doesn't delete the emails created from that template.

1. From the content library, select the template you want to modify.
2. To edit the template, click **Edit** and drag blocks.
3. To change existing content areas, hover over the content area, click **down arrow**, and select **Edit**.
4. When finished editing the template, click **Save**.

To update an email that uses this template to the modified version, click **Update Email Now** from the email properties. The updated template adds content areas to the email for each edited template area. Review the content versions and delete the ones you don't want.

Single Source Template Strategy

A Single Source template allows you to create content once and reuse the content for multiple emails, contexts, and audiences. For example, if you're sending a campaign to multiple countries that have multiple languages, each language requires a separate email which can total 200 emails or more. The number of emails increases when you segment into commercial and transactional or other customer-based profiles. To reduce unnecessary work, create a single source template that never changes, and create new emails based on the template.

Single Source Template



Thank You Special thanks to [Trailblazer Karol Cholewa](#) for contributing this content.

For each country in your campaign, create a paste HTML template that contains the same HTML layout, CSS, media queries, and other personalization. Add country specific headers and footers to each template, then name and save each basic template. To create emails for new campaigns, duplicate the basic template of the desired country and add campaign specific content.


Business Unit Component Sharing Strategy

To organize your single source templates and components, you can create a business unit for each country and use these sample guidelines and permissions:

- The single Paste HTML Template is stored at the parent business unit level and shared with all child business units.
- Reference blocks with localized headers and footers for each country are stored in the parent business but shared only with specific business units. This allows for easier management and prevents unauthorized users from making changes. For example, a content box with a German header is shared

only with your Germany business unit (View and Send folder permission). See the Shared Folder Permissions table.

- All updates to the shared HTML template are replicated in emails that use this template across all business units. When the HTML template is edited, you are notified in the email with an **Update Email Now** link.

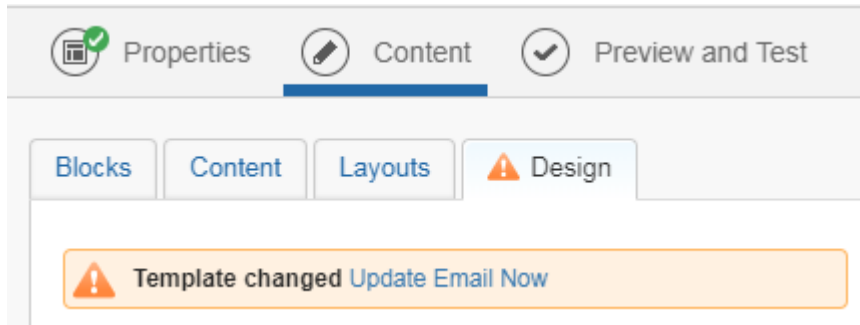

Shared Folder Permissions

EMEA	Germany	Italy	Spain	UK
HTML Template	x	x	x	x
Header-DE-de	x			
Footer-DE-de	x			
Header-IT-it		x		
Footer-IT-it		x		
Header-ES-es			x	
Footer-ES-es			x	
Header-UK-en				x
Footer-UK-en				x

Single Source Template Advantages

- Centralized template management - Allows you to make changes to the shared template, headers, and footers from a single parent business unit.
- Access control - Only admins with access to the parent business unit can make changes to the shared template, footer, and headers.
- Simplicity - Quick and easy to deploy edits like email hacks and branding style changes.
- Cost efficiency - Use less resources in template creation and maintenance.

Single Source Template Disadvantages

- Because each country specific template requires a language declaration in the head tag (for example,

`lang="en")`, you can't use a Single Source template to serve multiple languages. Alternatively, you can declare language at a lower content level like header, body blocks, or footer.

- For some users, creating emails from an existing email is not as intuitive as creating from a template.
- Users need to pay attention to email properties and ensure that the template is always up to date.

See Also

[Headers and Footers](#)

Create Mobile Messages

Create SMS, push notification, and LINE messages in Marketing Cloud Engagement Content Builder.

Create In-App Messages in Content Builder

Create in-app messages in Content Builder to target your engaged app audiences. Choose from full-page, modal, or banner-style templates in Content Builder, and send using the new In-App activity in Journey Builder.

Create LINE Carousel Messages in Content Builder

A carousel message is a LINE message that can include 10 different messages within one carousel. To create LINE messages, your account must have LINE channels enabled. To learn more about how to get LINE access and channels, contact your Salesforce account executive.

Create Multi-Content LINE Messages in Content Builder

Create multi-content messages in Content Builder and use them in your Journey Builder sends. A multi-content message includes a single video, image, audio, or text message or up to five of these elements in one message.

Preview Mobile Subscriber Details

Before sending, get a subscriber-level preview for mobile messages that use Marketing Cloud Engagement Content Builder. Use Subscriber Preview to see personalization and code rendered for that subscriber.

Create an SMS/MMS Message in Content Builder

Create an SMS or MMS message in Marketing Cloud Engagement Content Builder. You can also use the Content Builder editor in Journey Builder to create and send an SMS or MMS message. MMS is only available in the United States and Canada.

Create a Push Notification in Content Builder

Create a Journey Builder push notification in Marketing Cloud Engagement Content Builder. You can also use the Content Builder editor in Journey Builder to create and send a MobilePush message.

Create a WhatsApp Template Message

Create a WhatsApp template message in Content Builder for Marketing Cloud Engagement.

Create a WhatsApp Session Message

Use Content Builder to create session messages to respond to user-initiated conversations. When a user sends a message to your WhatsApp channel, you can respond to them without using a template. Session messages are free-form messages and don't need approval.

Create In-App Messages in Content Builder

Create in-app messages in Content Builder to target your engaged app audiences. Choose from full-page, modal, or banner-style templates in Content Builder, and send using the new In-App activity in Journey Builder.

Recommended Image Dimensions for In-App Messages

In-App Layout	Aspect Ratio	Pixels
Banner	1:1	50x50 minimum
Modal	16:9	640x360 minimum
Full Page - Image Crop	16:9	640x360 minimum
Full Page - Image Fill	3:4 OR 4:3	450x600 OR 600x450 minimum

1. In Content Builder, click **Create**.
2. In the dropdown, select **Mobile App**, and then select **In-App Message** and **Select**.
3. Choose **Full-Page**, **Banner**, or **Modal** and click **Select**.
 - a. If you select Full-Page, you have the additional option of **Crop Image** or **Fill Image**.
 Note To use the Fill Image feature, you must be on the latest version of the MobilePush [iOS](#) or [Android](#) SDK.
4. To add an image to your message, insert a URL or click **Browse** to choose an image from the Content Builder library.
5. Add a title and subtitle to your message, if applicable. Use the personalization and emoji dropdown as needed.
6. Enter the message.
 Note To personalize the content of your message, click inside the Message field and select contact attributes from the personalization dropdown menu.
7. Add buttons to your message and name your buttons.
8. Select a behavior for each button.
 - Dismiss message—Closes the message.
 - Go to web URL—Insert a URL in the field that goes to a web page.
 - Open page in app—Insert a URL in the field that goes to a specific page in your app.
 - Open device settings—Opens the user's device settings.
 - Open location settings—Opens the user's location settings.
9. At the top of the screen, click the **Design** tab.
 - a. For a full-page or modal layout, choose whether you want the message title to appear above or below the image.
 - b. The dismiss icon is enabled by default. To not include the icon, deselect this option.
 Note The dismiss icon can only be removed if you've added a dismiss button to your message. Full-page and modal messages must have a method for dismissal, Banner messages can be swiped away.

- c. For modal and banner layout, select the background opacity for your app.
- 10. Configure notification settings.
 - a. For a banner layout, choose whether you want the banner to appear at the top or bottom of the device.
 - b. For modal and banner layout, choose the border size. Choose the border color from the dropdown or enter a hex code.
 - c. Choose the background color from the dropdown or enter a hex code.
 - d. For modal and banner, choose the corner radius.
 - e. Choose the notification opacity.
- 11. Configure the text settings.
 - a. Choose the title font size. Choose the font color from the dropdown or enter a hex code.
 - b. Choose the title alignment.
 - c. Choose the message font size. Choose the font color from the dropdown or enter a hex code.
 - d. Choose the message alignment.
- 12. Configure the image settings.
 - a. For a full-page or modal layout, for the image size, select either **Edge to Edge** or **Inset**.
 - b. Choose the border size. Choose the border color from the dropdown or enter a hex code.
 - c. Choose the corner radius.
- 13. Configure the button settings for each button.
 - a. For a full-page and modal, select **Horizontal** or **Vertical** orientation.
 - b. Choose the font size. Choose the font color from the dropdown or enter a hex code.
 - c. Choose the border size. Choose a border color from the dropdown or enter a hex code.
 - d. Choose a button background color from the dropdown or enter a hex code. Choose a corner radius.
- 14. Click **Save**.
- 15. For a subscriber-level preview for your message, click **Subscriber Preview**.
This message can now be pulled into an In-App Message activity. See [Create the In-App Message Activity in Journey Builder](#).



Important Referencing other Content Builder content in blocks returns table and HTML wrappers instead of text. To reference this content, use code snippets. See [ContentBlockbyID](#).

Create LINE Carousel Messages in Content Builder

A carousel message is a LINE message that can include 10 different messages within one carousel. To create LINE messages, your account must have LINE channels enabled. To learn more about how to get LINE access and channels, contact your Salesforce account executive.

1. In Content Builder, click **Create**, and then select **Chat Messaging** and **LINE Message**.
2. Select **Carousel** and click **Select**.
 -  **Important** You can add up to 10 messages within one carousel, but all messages in a carousel must have the same number of images, buttons, and fields.
3. To add an image, on the Content tab, click **Browse** or add a URL.
 -  **Note** Use a JPEG or PNG image. The image URL maximum is 1,000 characters.
4. Add a title to your message. The maximum character count for the title is 40.

5. Enter your message. The maximum character count for messages is 60 characters.
 -  **Note** You can use AMPscript in all message fields. AMPscript doesn't count toward the character limit.
 -  **Note** If the height limitation is exceeded, the lower part of the text display area gets cut off. For this reason, depending on the character width, the message text may not be fully displayed even when it is within the character limits.
6. Add buttons to your message. Buttons can take users to a specified URL. Each message must have one button and can have a maximum of three buttons
 - a. Add labels for each button. Button label maximum is 20 characters.
 - b. Add a behavior for each button.
 - c. Add the URL that the button takes users to when they click. The Button Action URL maximum is 1,000 characters.
7. To select your background color for each message, click the **Design** tab and choose your color from the dropdown. You can also enter a hex code.
8. To configure layout and image settings, click the gear icon, make changes, and click **Done**.
9. To add another message to the carousel, click **+**.
10. For a subscriber-level preview for your message, click **Subscriber Preview**.
11. Click **Save**.

Create Multi-Content LINE Messages in Content Builder

Create multi-content messages in Content Builder and use them in your Journey Builder sends. A multi-content message includes a single video, image, audio, or text message or up to five of these elements in one message.

-  **Note** To create LINE messages, your account must have LINE channels enabled. To learn more about how to get LINE access and channels, contact your Salesforce account executive.

Create a Multi-Content Message LINE Activity in Journey Builder

1. In Content Builder, click **Create**, and then select **Chat Messaging** and **LINE Message**
2. Select **Multi-Content Message** and click **Select**.
3. Click **Add Content** and choose the element you want to add. You can add up to 5 elements to your message.
 -  **Note** If you use AMPscript in media URL fields, verify in Subscriber Preview that it renders a URL.
 - To add a text message, click **Text** and insert your message.
 -  **Note** The maximum character count for messages is 2,000 characters.
 - To add an image, click **Browse** or add a URL and enter alt text for your image.
 -  **Note** Use a JPEG image with a maximum 1024-px width. The image URL maximum is 1,000 characters.
 - To add a video, click **Browse** or add a URL. Do the same for the Preview field.

 **Note** A wide or tall video can be cropped when played in some environments. It's a best practice to keep your video files under 1 minute or 10 megabytes and to use a URL if the file is over 3 megabytes.

- To add an audio file, click **Browse** or add a URL, and enter the required duration of your audio file.

 **Note** It's a best practice to keep your audio files under 1 minute or 10 megabytes and to use a URL if the file is over 3 megabytes.

- To add an Imagemap, select a layout and add a URL and behavior for each section of your layout.

 **Note** Image must be 1040 x 1040 px.

- To add a Sticker, select from sticker packages in the top row, and then select the individual sticker.

4. When you're done entering the elements of your message, click **Save Message**.

5. For a subscriber-level preview for your message, click **Subscriber Preview**.

This message can now be pulled into a Multi-Content Message LINE activity. See [Create the Multi-Content Message LINE Activity in Journey Builder](#).

 **Important** Referencing other Content Builder content in blocks returns table and HTML wrappers instead of text. To reference this content, use code snippets. See [ContentBlockbyID](#).

Preview Mobile Subscriber Details

Before sending, get a subscriber-level preview for mobile messages that use Marketing Cloud Engagement Content Builder. Use Subscriber Preview to see personalization and code rendered for that subscriber.

This feature uses the Content Builder > Assets > Subscriber Preview permission. This permission is enabled by default for Marketing Cloud Engagement Administrator, Viewer, Channel Manager, and Editor/Publisher roles.

 **Important** Previewing SMS messages is only available when performing a Data Extension SMS send, and is usually unavailable for Journey Builder sends which don't require a Locale Field in the entry data extension to send the message. To select a data extension for a Content Builder message preview, first prepare the data extension for a Data Extension SMS send. See [Data Extension Sends](#).

1. When creating a mobile message in Content Builder or Journey Builder, click **Subscriber Preview**.
2. To choose which subscribers to preview, click **Select Source**
3. Select a source and click **Select**.
4. To preview the personalized message, click through subscribers.
5. To preview the message for different devices and message types, use the dropdowns.
6. To preview the message with a different source, click **Change** and select another source.
7. To preview with all data, including demographics data, select an app.
8. Click **Return to Editor**.

Create an SMS/MMS Message in Content Builder

Create an SMS or MMS message in Marketing Cloud Engagement Content Builder. You can also use the Content Builder editor in Journey Builder to create and send an SMS or MMS message. MMS is only available in the United States and Canada.

 **Note** Journey Builder SMS messages are no longer created in MobileConnect. Instead, create your message in Content Builder, or [create your SMS/MMS messages](#) without leaving Journey Builder.

1. In Content Builder, click **Create**, mouse over Mobile App, and select **SMS/MMS**.
2. To upload or select multimedia, turn on **Add Media**.
3. Enter a message.

-  **Tip** The message editor contains several options that can improve your message delivery rates.
- To find non-GSM characters, which can cause your messages to be split into multiple parts, select **Highlight Non-GSM**.
 - To combine messages that contain more than 160 characters, check **Concatenate Message**. Message concatenation isn't available in all markets, including the United States. This option is only available when you select a short or long code for a location that allows concatenation. For more information about concatenating messages, see [Message Concatenation](#).
 - To shorten a URL, click **Shorten URL**, paste your URL, and click **Apply**.

4. Configure Preview by Code Type - preview the different locales for codes you have in your account, if applicable.

For MMS messages, you can only use US or Canada codes that have MMS capability enabled.

-  **Note**
- The Content Builder preview can render the message differently than the Journey Builder preview. The Journey Builder preview uses the code you select there, while Content Builder previews the message as you build it.

5. Click **Save**.

This SMS message can now be pulled into a Journey Builder SMS activity. See [Create the SMS/MMS Activity in Journey Builder](#).

-  **Important** Referencing Content Builder blocks like text or HTML returns table and HTML wrappers instead of text. To reference this content, use code snippets instead. See [ContentBlockbyID](#).

See Also

[Knowledge Article: MMS Guidelines](#)

Create a Push Notification in Content Builder

Create a Journey Builder push notification in Marketing Cloud Engagement Content Builder. You can also use the Content Builder editor in Journey Builder to create and send a MobilePush message.

-  **Note** Make sure your users are on SDK version 9.0 and later to enable Carousel messages and sound files on iOS and Android devices. For Android devices, SDK version 9.0 or higher is also required to configure custom small and large icons and interactive buttons.

Create advanced push notifications that engage your audience by using templates with multiple images and customizable buttons and text. With the Standard template, you can create a push notification with one media attachment, including an image, video, or GIF. With the Carousel template, you can create a push notification with up to six images.

-  **Note** Journey Builder push notifications are no longer created in MobilePush. Instead, [create your Journey Builder push notifications without leaving Journey Builder](#).

Create and Send a Standard Push Notification

Use the Standard template to create a push notification with one media attachment, that includes an image, video, or audio file, to make it more engaging. Add customizable buttons for Android devices. Specify custom sound for Android and iOS.

Create and Send a Carousel Push Notification

Use the Carousel template to create a push notification that can have up to six images. This lets you show multiple images in one notification.

Create and Send a Standard Push Notification

Use the Standard template to create a push notification with one media attachment, that includes an image, video, or audio file, to make it more engaging. Add customizable buttons for Android devices. Specify custom sound for Android and iOS.

1. In Content Builder, click **Create**, hover Mobile App, and select **Push Notification**.
2. Select **Standard** layout, and then click **Next**.
3. In the Content panel, enter a title and subtitle for your message.
4. Enter the body of the message.
5. Optionally, add media to your message.
 - Insert a URL or AMPscript, or select media from the Content Builder library.
-  **Tip** If you use AMPscript in this field, use Subscriber Preview to verify that it renders correctly.
 - Enter alternate text.
 - Select whether to use different media for Android.
6. Select an Open Behavior:
 - **Open the App** – Opens the app when the recipient taps the message.
 - **Go to App URL** – Opens a specific page in your app when the recipient taps the message.
 - **Go to Web URL** – Opens the default web browser and loads a specific URL when the recipient taps the message.
 - **Go to CloudPage** – Opens a CloudPage (such as a landing page or microsite) when the recipient taps the message.

-  **Note** If you don't provide a call to action (CTA), the SDK open the app by default. If the CTA type

is other than Open the App and the URL isn't specified or is invalid, SDK defaults to **Open the App**.

7. To set up a message sound on iOS devices, select an option from the dropdown menu in the iOS Configurations section.
 - **Device Default:** Uses the default notification sound set by the device.
 - **Custom:** Allows you to use a custom sound file. The default is custom.caf. For a different file, consult your app developer.
 - **None:** Makes the notification silent.
8. To set up your message for the Android devices, select an option from the dropdown menus in the Android Configurations section. Make sure your users are on SDK version 9.0 and later to see the icons.
 - **Small Icon** - Appears in the top status bar and next to the app name and notification. It helps your users identify your app when they receive a push notification. The app requires the presence of a PNG file and doesn't support other formats.
 - **Large Icon** - Appears on the right side of the notification in the non-expanded view, giving your users additional context of the notification. Large icons support only PNG file and can be a file in the app or a URL.
 - **Sound** - Select the sound options from the dropdown menu, similar to those in the iOS Configuration section.
9. Use these options to customize the behavior and appearance of your Interactive buttons. Make sure your users are on SDK version 9.0 and later to see the buttons.
 - **Label** – Enter the text to display on the button. Each button must include a label, an icon, or both; otherwise, you'll see an error when activating or validating the Journey.
 -  **Note** Buttons appear in one line on the user's device. Keep button labels short, especially if using two or three buttons on Android. Also, color may appear different if the contrast ratio is too low for dark or light themes on the user's device.
 - **Identifier** – Enter a unique name or ID to distinguish this button from others.
 - **Icon** – Optionally, select an icon to display with the label.
 - **Open Behavior** – Select how the button behaves when clicked.

If you create buttons in the message in Content Builder or Journey Builder, the SDK uses a Salesforce layout. This may look different from other notifications on different devices. This is applicable only for Android.

Salesforce captures button clicks and relays them as an ENS event. For more information, see [MobilePush Event](#).

 **Important** For iOS, you must select a valid button category in the Delivery Options section of the Journey Builder. Otherwise, buttons won't appear on the user's device. On Android, if you haven't configured a button in the message, the app developer's buttons may not show up if the category information is incorrect. However, this also depends on how the app developers handle the category in your mobile app.

10. In the Design panel, you can optionally customize your button styles, such as font size, style, and color.
11. For a subscriber-level preview of your message, click **Subscriber Preview**.
12. Click **Save**.

This push message can now be pulled into a Journey Builder push notification activity. See [Create the Push Notification Activity in Journey Builder](#).

 **Important** Referencing other Content Builder content in blocks returns table and HTML wrappers instead of text. To reference this content, use code snippets. See [ContentBlockbyID](#).

Create and Send a Carousel Push Notification

Use the Carousel template to create a push notification that can have up to six images. This lets you show multiple images in one notification.

To send a Carousel notification to iOS devices, collaborate with your app developer to define the **Advanced Template Category** in the Administration tab. For Android, no category is required to send the Carousel notification.

 **Note** Make sure your users are on SDK version 9.0 and later to receive carousel messages on iOS and Android devices.

1. In Content Builder, click **Create**, hover Mobile App, and select **Push Notification**.
 2. Select **Carousel** layout, and then click **Next**.
 3. In the Carousel Configuration panel, enter the title and body of your message.
 4. Select an Open Behavior:
 - **Open the App** – Opens the app when the recipient taps the message.
 - **Go to App URL** – Opens a specific page in your app when the recipient taps the message.
 - **Go to Web URL** – Opens the default web browser and loads a specific URL when the recipient taps the message.
 - **Go to CloudPage** – Opens a CloudPage (such as a landing page or microsite) when the recipient taps the message.
-  **Note** If you don't provide a call to action (CTA), the SDK opens the app by default. If the CTA type is other than Open the App and the URL isn't specified or is invalid, SDK defaults to **Open the App**.
5. In the Image Layout section, you can show or hide the image caption and sub-caption, and add them to the Carousel pages. You can also customize the image by selecting a background color for the Carousel pages.
 6. To set up a message sound on iOS devices, select an option from the dropdown menu in the iOS Configurations section.
 - **Device Default**: Uses the default notification sound set by the device.
 - **Custom**: Allows you to use a custom sound file. The default is custom.caf. For a different file, consult your app developer.
 - **None**: Makes the notification silent.
 7. To set up your message for the Android devices, select an option from the dropdown menus in the Android Configurations section.
 - **Small Icon** - Appears in the top status bar and next to the app name and notification. It helps your users identify your app when they receive a push notification. The app requires the presence of a PNG file and doesn't support other formats.

- **Large Icon** - Appears on the right side of the notification in the non-expanded view, giving your users additional context of the notification. Large icons support only PNG file and can be a file in the app or a URL.
 - **Sound** - Select the sound options from the dropdown menu, similar to those in the iOS Configuration section.
8. In the Content tab, add an image to the selected Carousel page.
 - Insert a URL or AMPscript, or select media from the Content Builder library.
-  **Tip** If you use AMPscript in this field, use Subscriber Preview to verify that it renders correctly.
- Click the plus button in the left sidebar to add more Carousel images, up to a maximum of six per notification.
 - Salesforce recommends to use images under 200KB with a 2:1 aspect ratio. Supported image formats for Android and iOS SDKs: PNG, JPEG, GIF. The GIF shows as a still image and doesn't animate.
 - Salesforce captures the image click and relay them as an ENS event. For more information, see [MobilePush Event](#).
9. Enter a unique name or ID for the image, or use the system-generated ID. This helps differentiate it from other images in your project and is useful for tracking and automation.
 10. Optionally, enter alternative text to display if the image from the URL doesn't load or is unavailable.
 11. Enter the image caption, image sub-caption, and select an Open Behavior. In the Open Behavior, if no action is provided, or the URL is invalid, the SDK opens the app.
 12. In the Design panel, adjust your image caption and sub-caption styles.
 13. For a subscriber-level preview of your message, click **Subscriber Preview**.
 14. Click **Save**.
- This push message can now be pulled into a Journey Builder push notification activity. See [Create the Push Notification Activity in Journey Builder](#).

 **Important** Referencing other Content Builder content in blocks returns table and HTML wrappers instead of text. To reference this content, use code snippets. See [ContentBlockbyID](#).

Create a WhatsApp Template Message

Create a WhatsApp template message in Content Builder for Marketing Cloud Engagement.

1. In Content Builder, click **Create**.
 2. In the dropdown, select **Chat Messaging**, and then select **WhatsApp Template Message**.
 3. To see your approved templates, click **Browse**.
 4. Select the language you want to use, and click **Next**.
 5. Select the variables to use in your message.
-  **Note** After approval, you can only add the variables to templates. You can't edit the rest of the message.
- a. Complete the header using personalization tags.
 - b. Complete the message body using personalization tags.
-  **Note** Though templates and headers are approved through WhatsApp, ensure that any

personalization or variables don't exceed the 60-character limit for headers and the 1,024-character limit for messages. Facebook rejects messages that exceed limits.

- c. Add button text no more than 20 characters.
6. Save your changes.

Create a WhatsApp Session Message

Use Content Builder to create session messages to respond to user-initiated conversations. When a user sends a message to your WhatsApp channel, you can respond to them without using a template. Session messages are free-form messages and don't need approval.



Tip Keep your session messages simple. Offer support or product information based on keywords that you configure in Journey Builder.

1. In Content Builder, click **Create**.
2. In the dropdown, select **Chat Messaging**, and then select **WhatsApp Session Message**.
3. Select the Message Type from the dropdown.
4. Complete the message body using personalization tags.



Note Session messages are limited to 4,096 characters, including personalization and emojis. Facebook rejects messages that exceed these limits.

5. To use an image, upload a JPEG or PNG file that's 100 MB or less.
6. Save your changes.

Create Content Blocks

Use content blocks to create reusable modular content for messages. Manage content blocks in Content Builder.

The create process leads you through creating content using the editor. The content created is used in your messages and managed in Content Builder.



Note Don't include personally identifiable information, such as email address, in email links.

1. Click **Create**.
2. Click **Content Block**.
3. Click the content type to create.
4. Add styles, including border, colors, and spacing, to the content.
5. Enter or modify your HTML.
 - a. To add proper indentation and spacing to your HTML, right-click in the code editor and select **Apply Source Formatting**.
6. Save the content.
7. Complete these fields.
 - a. Enter an internal name that you and other users see in your folders.

- b. To choose a different folder location, click **Change**.
 - c. Enter an internal description.
 - d. To select business units and set sharing permissions, click **Share**.
 - e. To choose a different content owner if necessary, click **Change**.
8. Save the content block.

Create a Layout

Use Content Builder to create a layout for an email message.

Use a Text Content Block

Use the text content block to create text-based reusable email content in Content Builder

Use Einstein Content Selection in Your Emails

Add an Einstein Content Selection content block to your messages. At open, Einstein then can select an image for your messages by analyzing the assets that are engaging your customers. Enable Einstein Content Selection in Marketing Cloud Engagement Setup.

Use Einstein-Tested Content in Your Emails

Test your content before you send it. You can test up to 32 images at a time.

Use Einstein Recommendations in Your Emails

Add an Einstein Recommendations content block to your messages. At open, Einstein selects content from the content catalog that best engages each subscriber.

Add Image Content

Add images to the Content Blocks that you create in Content Builder. Content Builder supports .jpg, .gif, .png, and .svg images.

Text + Image Content

The Text + Image Block is unavailable in Content Builder.

Add Free Form Content

To add text, links, images, and more, use the free form content block in Content Builder.

Add HTML Content

HTML Content allows you to paste in HTML or upload HTML in Content Builder.

Dynamic Content

Use Marketing Cloud Engagement Content Builder to create dynamic content to deliver a targeted message to an audience. Dynamic content lets you define attributes to content, making the information your subscribers receive more relevant.

Create A/B Test Content

Create A/B test content in Content Builder. Use this block to create two different content areas and track which content performs better during an A/B Test. A/B Test works with Content Builder emails for testing content areas only. You can't use the A/B Test block to test emails, From Name, Subject Line, Preheaders, and Time with Content Builder emails.

Add a Button Block

Use Content Builder to add a linked button to your email.

Add a Social Follow Content Block

Add a social follow content block to an email in Content Builder. Social Follow allows you to add links to your social networks in your email. Social Follow directs subscribers from your email to your social

networks where they can then choose to follow your social accounts.

Add a Social Share Content Block

Add a social share content block to your email in Content Builder. Social Share allows recipients to share the email on their preferred social network.

Add External Content

Add external content blocks to an email in Content Builder

Add a Reference Block

Use Content Builder to add a reference block to your content.

Add an Image Carousel Block

Use Content Builder to add an image carousel block to your content.

Live Image

The Content Builder Live Image block lets you control message content at the time of open by switching relevant images in real time. You can send an email with image A that changes to image B based on a user-defined trigger.

Enhanced Dynamic Content

Enhanced Dynamic Content lets you import into Content Builder a delimited file containing text and image URLs to create enhanced dynamic content for emails.

Interactive Email Form Block

The Interactive Email Form block in Marketing Cloud Engagement Content Builder allows marketers to receive subscriber information like profile data, product reviews, and sales leads directly from embedded forms in an email. Allowing subscribers to submit forms without leaving their inbox increases customer engagement and gives marketers more data.

Create a Layout

Use Content Builder to create a layout for an email message.

1. Select an empty or pre-designed layout.
2. From Content, drag blocks into the content areas to group them together.
3. Follow the instructions according to the type of block selected:
4. From Layout Styling, use the controls to add styles including border, colors, and spacing to the block.
5. From Configure, use the controls to configure the vertical split and space between the content areas.

Use a Text Content Block

Use the text content block to create text-based reusable email content in Content Builder

1. Type content in the editor window.
2. Use editor controls to format and style your text.
 - a. To display more toolbar controls, click .
 - b. Use  to add system links and HTML elements.
 - c. Use  to add personalization.



Tip HTML code pasted from Word can cause formatting changes that affect your email preview. To prevent formatting problems, use Paste from Word to paste from Notepad or Word Document. When using HTML in a Text block or Free Form block, use valid HTML 4. Because the editor can modify the HTML in these blocks to standardize the editor view display, consider using the HTML block or Code Snippets if this is an issue.



Note The text content block outputs HTML, not plain text. To output text-only, [Create a Code Snippet](#).

Insert a Table

Insert and manage a table in a Content Builder text block in Marketing Cloud.

Manage Table Properties

Use a text block's table properties to format the properties of a specific table cell or manage rows, columns, and cells in Content Builder.

Insert and Remove Links

Build and remove links in a Content Builder text block.

Insert an Anchor

Add or remove an anchor to link to in a Content Builder text block.

Insert a Table

Insert and manage a table in a Content Builder text block in Marketing Cloud.

1. In the editor window, place your cursor where you want to insert the table.
2. To display more toolbar controls, click .
3. Select **Table**.
4. Fill in the following table properties:
 - Rows - The number of rows for the table.
 - Columns - The number of columns for the table.
 - Width - The width of the table as a percentage of the total width of the content area. 100% is the equivalent of full width. Manually resize the entire table using the table handles.
 - Height - The height of the table as a percentage of the total height of the content area. 100% is the equivalent of full height. Manually resize the entire table using the table handles.
 - Cell spacing - The margins around the outside all cells of the table.
 - Cell padding - The cell spacing inside all cells in the table.
 - Headers - The header of the table: None, First Row, First Column, Both
 - Border size - The outside borders and borders for cell of the table.
 - Alignment - The alignment of the text: Left, Center, Right.
 - Caption - The caption displays above the table.
 - Summary - A summary of the content of the table. The summary is not visible in the message and is used by web page readers for the visually impaired.
5. Click **OK**.

Manage Table Properties

Use a text block's table properties to format the properties of a specific table cell or manage rows, columns, and cells in Content Builder.

1. To format the properties of a specific table cell, right click on the table.
2. Click **Cell**.
3. Click **Cell Properties**.
4. Right click on a table to manage rows, columns, and cells.

Cell Properties

Format the properties of a specific cell after creating a table in Content Builder.

Table Commands

Manage table rows, columns, and cells in Content Builder with table commands.

Cell Properties

Format the properties of a specific cell after creating a table in Content Builder.

Cell Property	Description
Alignment	Positions text and images at the top, center, or bottom of the cell
Width	The width of the cells as a percentage of the total width of the table. 100% is the equivalent of full width. Manually resize the entire table using the table handles.
Height	The height of the cells as a percentage of the total height of the content area. 100% is the equivalent of full height. Manually resize the entire table using the table handles.
Word Wrap	Defines how the text wraps within the cell.
Horizontal Alignment	Defines how the text aligns from left to right.
Vertical Alignment	Defines how the text aligns from top to bottom.
Cell Type	Defines the type of cell: Header or Data
Rows Span	Forces the row to span the number of rows specified
Columns Span	Forces the column to span the number of columns specified
Background Color	Defines the background color for the cell. A

Cell Property	Description
	background color in a cell overrides a previously defined background color for the entire table.
Border Color	Defines the border color for the cell

Table Commands

Manage table rows, columns, and cells in Content Builder with table commands.

Command	Result
Insert Row Before	Inserts one row before the selected row
Insert Row After	Inserts one row after the selected row
Delete Row	Deletes the selected row
Insert Column Before	Inserts a column to the left of the selected column
Insert Column After	Inserts a column to the right of the selected column
Delete Column	Deletes the selected column
Insert Cell Before	Inserts one cell before the selected cell
Insert Cell After	Inserts one cell after the selected cell
Delete Cell	Deletes the selected cell
Merge Cell	Merges the selected cells, combining the content of both cells
Merge Right	Merges the selected cell and the cell to the right, combining the content of both cells
Merge Down	Merges the selected cell and the cell below it, combining the content of both cells
Split Cells Horizontally	Splits cell into two cells
Split Cells Vertically	Splitting the cells inserts a blank cell to the below or to the right
Delete Table	Deletes the selected table

Insert and Remove Links

Build and remove links in a Content Builder text block.

 **Note** Do not include personally identifiable information, such as email address, in email links.

1. Highlight the text you want to format as a hyperlink.
2. Click **Link** .
3. From Link To, choose the type of link and complete these fields.
 - a. Website - Enter the URL of the web site.
Http:// is inserted in the URL automatically.
 - b. Secure Website -If the web site address begins with https://, select this type and enter the URL.

 **Note** Https:// is inserted in the URL automatically.
 - c. Email Address - Enter the full email address and subject line of the email.

 **Note** The HTML code mailto: inserts automatically.
 - d. Forward to a Friend - The system populates the Forward to a Friend code when you choose this value. You can still edit the tool tip and link alias.
 - e. Microsite - Select the site and page of an email classic microsite.
 - f. CloudPages Microsite - Select the site and page of a CloudPages microsite.
 - g. CloudPages Landing Page - Select the CloudPages landing page.
 - h. Browse to content stored in your account or upload new content.

 **Tip** As a best practice, use document links rather than attaching a document directly to an email. Document links let you track how many subscribers open the document.
 - i. Anchor to text - Select the name of the anchor you created in this email.
 - j. Other - Enter a value that does not match the other types, such as a personalization string.

 **Note** For example, if you have an attribute that contains a URL, you can insert the personalization string to use the personalized URL for each subscriber.
4. To turn on conversion tracking feature, select **Conversion Tracking Link**.

 **Note** If your web site has been set up for conversion tracking, you can track the conversion rate for links to your web pages.
5. Enter descriptive text in Tool Tip.
This text appears when a subscriber hovers over the text or image for which the tool tip is defined.
6. Enter a descriptive name in Tracking Alias.
If no tracking alias is specified, then what you entered in link URL appears in the tracking results.
7. To remove a link, click the link text and click **unlink**.
8. To update an existing link, right-click the link and click **edit**.

The selected text is now highlighted as a link.

Insert an Anchor

Add or remove an anchor to link to in a Content Builder text block.

1. Select the anchor text.
2. Click anchor .
3. Name the anchor.
4. Click **OK**.
An anchor is displayed next to the text.
5. Create a link to the anchor by following the steps for [Insert and Remove Links](#) and selecting **Anchor to Text** from the **Link to** dropdown.



Tip To remove an anchor, right-click an  and click **Remove Anchor**.

Use Einstein Content Selection in Your Emails

Add an Einstein Content Selection content block to your messages. At open, Einstein then can select an image for your messages by analyzing the assets that are engaging your customers. Enable Einstein Content Selection in Marketing Cloud Engagement Setup.

Add an asset catalog file before dragging the Einstein Content Selection block into your message so that Einstein can select the image assets to show.

The content block selects an asset that's personalized for each subscriber from a pool of assets that you upload and then adds the asset to the message. The subscriber list can't contain a field called memberid. If it does, the block doesn't function properly.

Assets are selected based on how they perform with your subscribers.



Note Don't use the content block in emails that you plan to archive if the content selected by Einstein Content Selection must then be retrieved from the archive. Assets selected when a subscriber opens the email aren't archived.

1. Drag  into an email message.
2. Select the asset class that you want Einstein Content Selection to use.
3. To add a fallback image for an asset class if there's none, navigate to Einstein Content Selection Settings.
4. To filter the content that appears for the asset class, click **Advanced Settings**, and then use the Selection Spotlight feature to select one or more asset attributes and Spotlight values.
Adding multiple asset attributes is like an AND filter. For example, locale = EN-US AND city = New York.
Adding multiple asset values is like an OR filter. For example locale = EN-GB or EN-US.
5. Save the content block.
6. To view Einstein Content Selection in action, preview your message.
7. To view the message as it appears to different subscribers, click .

[See Also](#)

[Set Up Einstein Content Selection](#)
[Create and Upload an Asset Catalog File](#)
[Set Fallback Assets](#)


Use Einstein-Tested Content in Your Emails

Test your content before you send it. You can test up to 32 images at a time.



Note Before you get started, set up your [content test experiment](#).

Send an equal number of messages in your test, or tell Einstein to send the winning content asset to more recipients. When you add the Content Test content block to a message, you select an in-progress content test that was created in Einstein Content Selection.



1. Drag **Einstein Content Testing** into your message.
2. Search for and select a test that is in progress.
You can't select a draft, completed, or archived content test.
3. To change the test settings or add an image, expand the test summary.
 - a. To edit the settings, click ▼ and select **Edit**.
 - b. To prevent Einstein from selecting an image in the test, click 🗑️.
4. Click **Done**.
An image that's included in the test appears in the content block.

Use Einstein Recommendations in Your Emails

Add an Einstein Recommendations content block to your messages. At open, Einstein selects content from the content catalog that best engages each subscriber.

Make sure that your content catalog is published in Einstein Recommendations. The side panel is available only in the US. If you don't see the side panel, use the [Insert Einstein Email Recommendations Code](#) instructions to copy and insert the Einstein Email Recommendations code into your email.

1. Drag Einstein Recommendations content block into an email message.
2. Modify the display, scenarios, and layout as needed using the side panel.

Add Image Content

Add images to the Content Blocks that you create in Content Builder. Content Builder supports .jpg, .gif, .png, and .svg images.

Start by creating an image element. Then, choose a method for adding the image content.

In Content Builder, click **Create | Content Blocks | Image Blocks** or **Create | Content Blocks | Image Carousel**.

Use an Image That's Already Been Uploaded to Content Builder

1. Under Add an Image, click **Browse**.
2. Select the image that you want to add.
3. Click **Select**.

Upload an Image from Your Computer

1. Under Add an Image, click **Browse**.
2. Drag a file from your computer onto the Upload or Select Existing Content window.
3. Click **Upload and Publish**.

Upload an Image from a URL

1. Under Add an Image, enter the URL in the text field.
2. Click **Save**.
3. On the Create Image Block window, enter a name for the image.
4. Save your changes.

Text + Image Content

The Text + Image Block is unavailable in Content Builder.



Important The Text + Image Block is unavailable with the September 2016 Release or later. If you created Text + Image content before the September 2016 Release, the content remains available in your account.

Add Free Form Content

To add text, links, images, and more, use the free form content block in Content Builder.



Tip HTML code pasted from Word can cause formatting changes that affect your email preview. To prevent formatting problems, use Paste from Word to paste from Notepad or Word Document. When using HTML in a Text block or Free Form block, use valid HTML 4. Because the editor can modify the HTML in these blocks to standardize the editor view display, consider using the HTML block or Code Snippets if this is an issue.

1. Type content in the editor window on the left side of the screen.
2. Use the editor toolbar controls to format and style your text.
3. To display toolbar controls, click .

4. Use the insert control  to add system links and HTML elements.
5. Use the insert attributes controls  to add personalization.
6. To insert tables, anchors, and links, use a text content block.
7. To insert an image, click the image control.

Add HTML Content

HTML Content allows you to paste in HTML or upload HTML in Content Builder.



Important Contact your relationship manager if you do not have this feature enabled in your Marketing Cloud account.

1. Add your HTML in the editor using one of these options.

HTML Options

Option	Steps to Follow
Enter or Paste HTML	Enter or paste your HTML directly into the editor window on the left side of the screen.
Existing HTML	To add existing HTML, click browse then select your HTML from Content Builder.
Drag Files	Drag files from your computer to the upload window to add one or more files.
Browse for Files	To upload files from your computer, manually search for files.

2. Use insert code snippet  to add system links.
3. Use the insert attributes controls  to add personalization.



Important HTML content blocks can add extra code wrappers in your message. To preserve your code, use code snippets instead. See [Create a Code Snippet](#).

Dynamic Content

Use Marketing Cloud Engagement Content Builder to create dynamic content to deliver a targeted message to an audience. Dynamic content lets you define attributes to content, making the information your subscribers receive more relevant.

If you include dynamic content in your email that is based on data in a data extension, ensure that you send the email to the same data extension that you based the rules on or to a data extension that contains fields with the exact same names as the data extension fields use in the dynamic content rules.

Always upload the content you want to use before you create dynamic content. If you choose to make local copies of content blocks, update the dynamic content block in emails and saved dynamic content

when you edit content already used in dynamic content.

Dynamic content is content that displays in a content area according to the rules that you define based on the subscriber's attributes or data extension column values. By using dynamic content, you can ensure that a more-tailored message is reaching your targeted audience.

For example, as a clothing advertiser, you can display women's clothing information in the content area for all the females on your subscriber list and men's clothing for all the males on your subscriber list; however, dynamic content can be much more specific.

Dynamic content can be used in any type of email other than text-based email messages. The dynamic content area uses the formatting (for example, background color and border design) defined for whichever selected content being used.

In addition, default content is the content you specify in the Default Content field. This content displays when a subscriber does not meet a rule you created.

If you create dynamic content based on subscriber attributes, ensure that you create rules. Define the four elements of the rule in the order shown in this table:

Define the Four Elements of a Rule

Element	What It Is	How to Define It
Attribute	The profile on which you want to base which subscribers see this content. If you send to a data extension with a column name that is the same as the profile attribute, the data extension overrides the profile attribute.	Click Profile Attributes as the source to build the rule from. This displays all attribute in your account. Choose an attribute. If you want multiple attributes to control the content for this rule, add a second expression to make the rule complex.
Value	The attribute values to be used in determining which subscribers see this content. If there is a default value for the attribute, the subscriber is evaluated with that value. Empty subscriber attribute vales are evaluated as containing a zero (0) value.	Your options in this field depend on the attribute and operator you selected. If the attribute has defined values, the dialog box features a dropdown list consisting of those defined values. If the attribute is a free-form field with no defined values, you see a text box in which you type

Element	What It Is	How to Define It
		the value. Type it exactly as it's been entered in subscriber records. For the most consistent results, use attributes with defined values for dynamic subject lines. If you chose exists in, exists in word, or does not exist in as the operator, enter all the possible values in the text box separated by commas with no spaces between values. Use the is empty or is not empty as the operator to create rules for empty conditions.
Operator	The relationship between the attribute and the value that you select.	The list of available operators varies based on the properties of the attribute you selected. Be sure to choose an operator that makes sense with the type of attribute you chose. For example, don't use the 'less than' operator with a text attribute.
Content	The content to be displayed for a subscriber who meets the attribute requirement you defined.	Click Content to show all stored static content. You cannot choose stored dynamic content. Navigate to the folder that contains the content you to display for this expression. Click and drag the name of the desired content area to Select Content. A preview of the selected content is shown. When you have selected the desired content, click the Save.



Example Northern Trail Outfitters has an email newsletter to send out, but they want to include dynamic content. To create the content, the marketer clicks Content Builder, and then clicks Create. The marketer creates several pieces of content in Content Builder that they want to create the dynamic content. They are now ready to create the dynamic content. They click Create and select Dynamic Content. Northern Trail Outfitters select default content and create a rule. All subscribers that have their gender designated as female receive the same content. After Northern Trail Outfitters has created all the rules, they click Save. They have now created dynamic content. Now they can include the dynamic content in email and send it, all female subscriber receive an email with the content designated for females. All other subscribers receive the default content.

Create Dynamic Content

Use dynamic content in email messages. Dynamic content appears according to the rules that you define, based on the subscriber's attributes, data extension values, or audiences. If a subscriber matches more than one rule, they receive the content for the first rule that applies.

Modify Dynamic Content

Use Marketing Cloud Engagement Content Builder to modify a Dynamic Content block.

Create a Dynamic Subject Line and Preheader

Use Content Builder to create a dynamic subject line and preheader. An email with a dynamic subject line or dynamic preheader has the content that a subscriber sees based on the subscriber's attributes according to the rules that you define. For example, you can define one subject line to appear for all the males in your list and another for all the females. These attributes can be taken from a subscriber list or a sendable data extension.

Create Dynamic Content

Use dynamic content in email messages. Dynamic content appears according to the rules that you define, based on the subscriber's attributes, data extension values, or audiences. If a subscriber matches more than one rule, they receive the content for the first rule that applies.

Before creating dynamic content, upload the content you want to use. If you make local copies of content blocks, update the dynamic content block in your emails and save the latest content when editing.

1. Make a selection for Dynamic Block Options.

- Keep content blocks up-to-date: Select this option if you want to apply future source block edits to emails using the block. This option is the default for new blocks and maintains references to the default and rule-based content so that edits are updated in the email that uses the dynamic content. Blocks and code snippets are valid references. Source files aren't.
- - The preview shows the AMPscript function of the content, like the reference block, to make sure that outdated content isn't shown.
- - To edit a dynamic content block used in an email, edit the source content (block or code snippet) referenced by the dynamic content block's default or rule-based content. Changes made directly to the dynamic content block aren't applied to emails that already use it. Alternatively, you can use a reference block to retrieve the dynamic content block.

- Deleted dynamic content references render blank in the email if using **Keep content blocks up-to-date** but continue to render if using **Make local copies of content blocks**. If you delete references used in a dynamic content block, you can't switch Dynamic Block Options.
 - Make local copies of content blocks: Select this option if you don't want to apply source block edits to emails using the block. This option is the default for existing blocks.
- To select the content that appears if the subscriber data doesn't satisfy any of the dynamic content rules, click **Browse....** If you don't select content, the block displays no content to the recipient.
 - Add your content.

Options	Steps to Follow
Existing Content	To add an existing image, select your image from Content Builder.
Drag Files	Drag files from your computer to the upload window.
Browse for Files	To manually search for files to upload: - Click Add. - Select Browse. - Select the file from your computer to add. - Click OK.

- Click **Select**.
- Click **Create Rule #**.
- Select **Profile Attribute** or **Data Extension** as the source to create the dynamic content from. You select a source only the first time that you create a rule.
- Click **Ok**. If you selected **Data Extension** in the previous step, select the source data extension and click **OK**.

If you click **Change** before saving, the rules and content are removed.

- Drag attributes from the left column to the expression canvas. Use this table as a reference when building your filter.

Function	Description
is equal to	Subscribers with an attribute definition that exactly matches the value. (Choose one value only.)
is not equal to	Subscribers with an attribute definition that doesn't match the value. (Choose one value only.)
is greater than greater than equal to	Use this operator when the attribute is a numeric value. Subscribers with an attribute definition

Function	Description
	greater than (or greater than or equal to) the value.
is less than less than equal to	Use this operator when the attribute is a numeric value. Subscribers with an attribute definition less than (or less than or equal to) the value.
begins with	The application looks for attribute values that begin with the exact sequence of characters that you enter as the comparison value. Commas are treated as characters and not as delimiters.
contains does not contain	The application looks for attribute values that include or exclude the exact sequence of characters that you enter as the comparison value. Commas are treated as characters and not as delimiters.
ends with	The application looks for attribute values that end with the exact sequence of characters that you enter as the comparison value. Commas are treated as characters and not as delimiters.
exists in	The exists in operator looks for a partial match of the value.
exists in whole word	The exists in whole word operator looks for a full match of the entire value. For example, if your match criteria is <i>2326,5308</i> , this operator returns only subscribers with <i>2326</i> or <i>5308</i> attribute values.
does not exist in	Subscribers with an attribute definition that doesn't match any of the values you define in a comma-delimited string of values. This operator doesn't apply when selecting an attribute with restricted values, as you can select only one of the restricted values as the comparison value.
is empty is not empty	To filter for a blank value, select is empty or isn't empty.
is	The application looks for either a true or false value. Your only options are True and False.



Note Be sure to select an operator that makes sense with the type of attribute you selected. For example, don't use the less than operator with a text attribute. For attributes with type equal to

date, only these operators are supported: is equal to, is not equal to, is greater than, and is less than.

9. Select an **AND** or **OR** operator. To group your criteria, hover over the grouping operator so that it turns a darker blue, and click to change the operator.
If you select AND, the subscriber must meet all criteria to be included in the group. If you select OR, the subscriber must meet one of the criteria, not necessarily all criteria, to be included in the group.
10. To show all existing content, click **Content**.
11. Drag the name of existing content that appears if the subscriber information satisfies this rule under **Select Content**. To upload new content, click **Add**.
12. Click **Save**.
13. Click **Create Rule #** and follow the rule creation steps until you create all the rules needed.
14. To preview each content variation, click the rule area row. You can expand rules to view details and collapse rules to view many rules.

Modify Dynamic Content

Use Marketing Cloud Engagement Content Builder to modify a Dynamic Content block.



Note Always upload the content you want to use before you create dynamic content.



Important To edit a dynamic content block used in an email, edit the source content (block or code-snippet) referenced by the dynamic content block's default or rule-based content. Edits to the dynamic content block itself aren't reflected in subsequent updates of the email that uses it. Alternatively, you can use reference block to retrieve the dynamic content block.

1. Select the name of the content in the content grid.
 2. Select **Editor**.
 3. Make any changes or additions.
 - To change the default content, click **Replace**. Select the name of the content to replace the existing content and click **Select**. Click **Add** to upload new content.
 - To change a specific rule or content associated with a specific rule, click **Edit** in the rule area row. Make any changes or additions and click **Save**.
- 

Note Edits to content blocks that use dynamic content don't affect saved and stored email content that uses dynamic content.

 - To add a rule, click **Create Rule #**.
 - To delete a specific rule, click **Delete** for that specific rule. The rules moves up. For example, if you delete rule 2 then rule 3 are come the new rule 2.
 - To duplicate a rule, click **Duplicate** and change the values where necessary. This duplicates the rule criteria and the content selection.
4. Click **Save**.

Create a Dynamic Subject Line and Preheader

Use Content Builder to create a dynamic subject line and preheader. An email with a dynamic subject line or dynamic preheader has the content that a subscriber sees based on the subscriber's attributes according to the rules that you define. For example, you can define one subject line to appear for all the males in your list and another for all the females. These attributes can be taken from a subscriber list or a sendable data extension.

You must have the content you want to use created before you can create dynamic content. You must update the dynamic content block in emails and to saved dynamic content when changes are made to content already being used in dynamic content.

1. Create your email or select an existing email.
2. Enter a *Subject* and/or *Preheader*. The text entered is the default content and appears if the subscriber data does not satisfy any of the dynamic content rules.
3. Click the **Dynamic Content Button** to open the dynamic dialog box. 
4. Click **Create Rule #**.
5. Select **Profile Attribute** or **Data Extension** as the source to create the dynamic content from. Select a source the first time you create a rule.
6. Click **Ok**. If you selected data extension in the previous step, select the source data extension and click **OK**.

 **Note** If you click Change next to source at any time during the creation process before clicking Save the rules and content are removed.

7. Drag and drop attributes from the left column to the expression canvas. Use the following table as a reference to build out your filter.

Function	Description
is equal to	Subscribers with an attribute definition that exactly matches the value. (Choose 1 value only.)
is not equal to	Subscribers with an attribute definition that does not match the value. (Choose 1 value only.)
is greater than greater than equal to	Use this operator when the attribute is a numeric value. Subscribers with an attribute definition greater than (or less than or equal to) the value.
is less than less than equal to	Use this operator when the attribute is a numeric value. Subscribers with an attribute definition less than (or less than or equal to) the value.
begins with	The application looks for attribute values that begin with the exact sequence of characters that you enter as the comparison value. Commas are treated as characters and not as delimiters.
contains does not contain	The application looks for attribute values that include or exclude the

Function	Description
	exact sequence of characters that you enter as the comparison value. Commas are treated as characters and not as delimiters.
ends with	The application looks for attribute values that end with the exact sequence of characters that you enter as the comparison value. Commas are treated as characters and not as delimiters.
exists with	Subscribers with an attribute definition that matches one of the values you define in a comma delimited string of values. The exists in operator looks for a partial match of the entire value. For example, if your match criteria is north, the exists in operator returns subscribers with north, northwest, and northeast attribute values, but not subscribers with south, southwest, and southeast attribute values.
does not exist in	Subscribers with an attribute definition that do not match any of the values you define in a comma delimited string of values. This operator is not applicable when choosing an attribute with restricted values, as you can select only one of the restricted values as the comparison value.
is empty is not empty	To filter for a blank value select is empty or is not empty.
is	The application looks for of either a true or false value. Your only options are True and False .



Note Be sure to choose an operator that makes sense with the type of attribute you chose. For example, do not use the less than operator with a text attribute. For attributes with type equal to date, only the following operators are supported: is equal to, is not equal to, is greater than and is less than.

8. Select an **AND** or **OR** operator. You can group your criteria by hover over the grouping operator so that it turns a darker blue, and click to change the operator. If you choose **AND**, the subscriber must meet all criteria to be included in the group. If you choose **OR**, the subscriber must meet one of the criteria, not necessarily all criteria, to be included in the group.
9. Click **Save**.
10. Enter the text that appears if the subscriber information satisfies this rule and click **Save**.
11. Click **Create Rule #** and follow the steps until you have created all the rules needed.
12. Click **Save**.

Create A/B Test Content

Create A/B test content in Content Builder. Use this block to create two different content areas and track which content performs better during an A/B Test. A/B Test works with Content Builder emails for testing content areas only. You can't use the A/B Test block to test emails, From Name, Subject Line, Preheaders, and Time with Content Builder emails.

Before and after you build your content, see [Create Content Blocks](#) for more details.



Note To use this feature, you must have user permissions to access Content Builder.

1. To select content for content A, click **Browse**.
2. To select content for content B, click **Browse**.
3. Click **Save**.
4. Fill in the following fields:

Field	Steps to Follow
Name	Enter an internal name. The name is what you and other users see in your folders. Subscribers can't see this name.
External Key	Enter a unique identifier that can developers can use in API calls to access objects programmatically.
Location	This field shows the folder name. Click Change to choose a different folder.
Tags	To associate the message with a tag, follow the steps: • Click Add. • Enter the name of a tag. • Click Done.
Business Units	The shared content is initially shared to the All Content folder for the selected business units. Any user with update permissions in a recipient business unit can edit that content. Those changes apply to that content for all business units. Learn more about Sharing Content. To share this content, follow these steps: • Click Change. • You can share content as described: • All Business Units: This option shares content across the entire enterprise and to all future business units, including business units your account can't access due to login restrictions. • Custom: This options shares content to any

Field	Steps to Follow
	business units you can access. You can share to any number of business units. To select all children and grandchild, click Select Children. Clicking select children doesn't insure future children business units are included. Click Save.
Channel Permissions	Use channel permissions to indicate which channels (such as Mobile, Email, or Social) can use this content.

 **Note** The Tracking > Email Overlay View for emails that use A/B Test content blocks show only one of the content blocks, regardless of whether you select the job details for block A or block B. The tracking results are unique to the job but the email preview doesn't show A & B respectively, but only displays a single default block for each job. A/B testing of separate emails that don't use A/B Test content block show the unique email for the job whose tracking you select to view.

Modify A/B Content

Make changes to A/B content blocks in Content Builder.

Modify A/B Content

Make changes to A/B content blocks in Content Builder.

1. Select the name of the A/B Testing content in the All Content grid.
2. To make changes, click **Change** next to any item under Asset Properties.
3. Select **Editor**.
4. Make any changes or additions.
To change content A or B, click **Replace** under the path for the content.
5. Click **Save**.

Add a Button Block

Use Content Builder to add a linked button to your email.

Before and after you build your content, see Create Content Blocks.

1. Complete the Button Text field, and set your font type, size, and color.
2. Use the provided controls to style the button and button text.
3. Select a Link To option and complete the corresponding fields.
 - Website: Enter the URL of the web site, without the preceding https:// (which inserts automatically).
 - Secure Website: Enter the URL of the secure website without the preceding https:// (which inserts

automatically)

- Email Address: Enter the full email address (the HTML code mailto: inserts automatically) and subject line of the email.
 - Microsite: Select the site and page of the previously created microsite.
 - Forward to a Friend: The system populates the code when you choose this value. You can still edit the tooltip and link alias.
 - Document: Browse to content stored in your account or upload new content. As a best practice, always use document links rather than attach a document directly to an email. Document links offer the added benefit of allowing you to track how many subscribers open the document.
 - Anchor to text: Select the name of the anchor you previously created in this email.
 - Other: Enter a value that does not match the other types, such as a personalization string. For example, if you have an attribute that contains a URL, you can insert the personalization string to use the personalized URL for each subscriber.
4. Enter descriptive text in the Title field. This text appears when the recipient hovers over the text or image.
 5. Enter a descriptive name in the Tracking Alias field. When you view the tracking results, the tracking alias appears in the results. If a tracking alias is not provided what you entered in the link URL is used.
 6. Use the Block Settings and HTML Editor tabs as needed.
 7. Click **Done Editing**.

Add a Social Follow Content Block

Add a social follow content block to an email in Content Builder. Social Follow allows you to add links to your social networks in your email. Social Follow directs subscribers from your email to your social networks where they can then choose to follow your social accounts.

1. To select more social network links, click **Add a Social Network**.
2. Drag the items to reorder the way they will appear.
3. Use the provided controls to style the icons and text labels.

Add a Social Share Content Block

Add a social share content block to your email in Content Builder. Social Share allows recipients to share the email on their preferred social network.

1. To select more social network links, click **Add a Social Network**.
2. Drag the items to reorder the way they appears.
3. Use the provided controls to style the icons and text labels.

See Also

[Social Forward](#)

Add External Content

Add external content blocks to an email in Content Builder

Before and after you build out your content, see [Create Content Blocks](#) for more details.

1. Drag the External Content block to a content area.
2. Enter the complete URL, including `http://`, of the external content to embed into a message.
3. Select when to retrieve the content:
 - **Immediately** - immediately retrieves the URL content. Use this feature to get the content as it appears at the URL right now. If you select this option, you can't include personalization in the URL. You can edit and preview the content in the Layout and Plain Text preview of an Email.
 - **Send Time** - retrieves the URL content at the time the system processes the email for sending. Use this feature to get the latest content at the URL at the time the email is sent. If you choose this option and select a failure protocol, you can include personalization in the URL. When used in an Email, you can't edit the content but you can preview the content for a test subscriber.
4. If you select Send Time, choose a retrieval option:
 - **Email Level** - retrieves the URL external content only once, and every recipient receives the same content. Example: A newspaper sends a daily email with the latest news headlines. When the email is sent, the external content block pulls headlines from a web service the newspaper created to serve the headlines and links to full stories. Since the headlines are the same for everyone, this retrieval is only called once for the entire send.
 - **Subscriber Level** - retrieves the URL external content for or each individual recipient, and each recipient receives unique content. Example: an airline newsletter contains the recipients' award miles balance. Since each recipient's balance is different, the external content block calls a web service once for each recipient to get their miles balance.



Warning Since this retrieval can result in millions of external calls in a large send, we recommend Email Level.

Add a Reference Block

Use Content Builder to add a reference block to your content.

The reference block in Content Builder allows you to insert a pointer to an existing block in a template or email. The pointer ensures that the block always uses the latest content. Also, the editor shows the content of the referenced block instead of the AMPscript.

1. Drag the Reference Content block to a content area.
2. Click the block to edit.
3. To upload content, select content from the grid or click **Create**.
4. Click **Select**.
5. Use the arrow to delete, duplicate, or edit.
6. Click **Done Editing** or **Save**.

Add an Image Carousel Block

Use Content Builder to add an image carousel block to your content.

The Image Carousel block allows you to add blocks of up to ten rotating images. You can set these images to auto-rotate every 7.5 seconds. Navigation arrows and radio indicators allow the recipient to manually rotate through the images.

1. Drag the Image Carousel block to a content area.
2. Click the block to edit.
3. Add an image by clicking **Browse** or inserting a URL.
4. Add alt text that describes the appearance and function of the image for recipients who use assistive technology to view the email.
5. If necessary, add a link, then complete Image Settings.
6. To add more images, click **Add Image**
7. If needed, complete options on the Block Settings tab.
8. Click **Done Editing** or **Save**.

Interactive Image Carousel Block Email Client Support

- Apple mail iOS
- Apple mail Mac
- Outlook Mac
- Outlook webmail*
- Outlook iOS app*
- Outlook Android app*
- Outlook progressive web app*
- Yahoo*
- AOL*
- Samsung*
- Thunderbird*
- Freenet webmail*
- Freenet on iOS
- Fastmail webmail*
- Fastmail Android*
- Fastmail iOS*
- GMX iOS app
- [web.de](#) iOS app
- [mail.com](#) iOS app
- Edison iOS
- Edison Android
- QQ mail Android



Note Some email clients don't support the auto-rotate animation.



Important Outlook Windows app and Gmail aren't supported. Consult [this third-party, open-source](#)

[resource](#) for more information. Email clients that don't support the carousel show the first image, including the same alt text and link, if added. The carousel is fully usable with a keyboard input. Users can tab to the carousel, then move left and right with the left and right arrow keys. Focus indicators show which slide is selected. The carousel also works with a screen reader. Users can focus on the carousel and move left and right to select a slide. However, this behavior is described as radio buttons along with the associated alt text of the image, rather than as slides on the carousel. If a user has set their system preferences to say that they prefer reduced motion on the screen, the animation of looping through all images in the carousel doesn't play.

Live Image

The Content Builder Live Image block lets you control message content at the time of open by switching relevant images in real time. You can send an email with image A that changes to image B based on a user-defined trigger.



Important Content Builder Live Image is retired in the April 2021 release. Customers can no longer access the block in Content Builder, but can use Einstein Content Selection or the Content Block SDK.

Available Triggers

Trigger	Threshold Limits	Default Setting
Date and time	Set in half hour increments based off user time zone preferences	The following day at 12:00 pm
Number of days after send	Max 365 days	7 days
Number of impressions	Max 100,000 impressions	100 impressions
Number of clicks	Max 100,000	100 clicks
No trigger	User manually switches image	

Use Multiple Instances

- If you add multiple instances of the same Live Image block to different emails, they act and are tracked independently.
- If you copy an email with a Live Image block, the blocks act and are tracked independently.

Use Manual Switch

- The **Manual Switch** button only appears after you send the message containing the block. To manually switch the image, click **Manual Switch** on the Delivery tab of the block, then click **Confirm**.

- You can manually switch to image B regardless of the trigger, but only before the trigger threshold occurs. You can switch back to image A at any time. The image switches only for recipients who open the email after you made the switch.

Other Information

- You can use multiple Live Image blocks in an email.
- You can't use Live Image blocks with Reference blocks.
- You can't send a Live Image block that is shared with you. Only the owner of the block and its images can send it.

Enhanced Dynamic Content

Enhanced Dynamic Content lets you import into Content Builder a delimited file containing text and image URLs to create enhanced dynamic content for emails.

Instead of using AMPscript and data extensions to manually create complex dynamic content and the rules for each variation, the system creates the content from the data in your import file. The columns in the import file contain the names of the enhanced dynamic content assets, and the rows contain the content variations for each asset. Content Builder saves the assets as Enhanced Dynamic Content Maps in the content library that you can use as blocks in emails and templates. You can link your enhanced dynamic content to an audience during the import or while adding the blocks to an email or template.

Import Flow

Select **Enhanced Dynamic Content** in the Create menu to launch the four-step import flow.

- **File Upload** - Upload your file and select comma, semicolon, or tab as your delimiter. Choose whether to respect double quotes as a text qualifier.
- **Data Preparation** - Select which column to use as primary key. Optionally edit the names for each enhanced dynamic asset. Select the type of content for each column:
 - Text
 - Image
 - Exclude this column
- **Audience** - Choose whether to link your import file's primary key to a column in an audience data extension or profile attribute. You can also configure this link in the editor during message creation.
- **Review** - Review the settings from previous steps, view a five-row summary of your data, and select the folder location for your enhanced dynamic content.

See [Enhanced Dynamic Content Import File](#) to prepare your import file.

Editor Flow

You can add enhanced dynamic content to content areas of emails and templates from the Blocks or the

Editor tab in the editor.

 **Note** The April 2018 release doesn't support adding enhanced dynamic content in the subject and preheader.

- **Blocks Tab** - Drag the Enhanced Dynamic Content block in a content area, then select the enhanced dynamic content from the content library. You can change your audience source and column, view content variations, and configure block settings.
- **Content Tab** - Drag enhanced dynamic content in a content area. You can change your audience source and column, view content variations, and configure block settings.

If you change the audience in the editor and want to save it as a block, select **Create New** from the Save Block button menu, then name and save the block. You can only select **Update Existing** after saving the enhanced dynamic content as a block.

To edit the images and text in your enhanced dynamic content, open the map asset from the content library and click **Edit**. Click **Edit** in the variation you want to edit, make your changes, and click **Done Editing**. Editing an enhanced dynamic content map affects all blocks using it.

Enhanced Dynamic Content Import File

Use this information to prepare your import file to create enhanced dynamic content in Content Builder.

Enhanced Dynamic Content Import File

Use this information to prepare your import file to create enhanced dynamic content in Content Builder.

- Ensure that your file is a comma, semicolon, or tab-delimited file. In the import flow, you can select the delimiter and whether to respect double quotes as a text qualifier.
- Use only text or image URLs in your file. The system reads the first row of data and sets the dynamic content as either Text or Image. You can change the type or exclude the row in the import flow.
- The column header row contains the names of the dynamic content the system creates. Each column is saved as an Enhanced Dynamic Content Map in the content library, and you can add these to a message from the Content tab of the editor. You can review and edit these names in the import flow.
- The system sets the first text column as the default primary key. A primary key is a table column that you designate as the unique identifier for all records in the file. For example, a language column can be a primary key that uniquely identifies all languages in the file. During the import flow or message creation, you link this column to a column in an audience data extension or profile attribute.
- To set a row as the default content, enter *default* as the row value in the column you select as the primary key. If you don't include this row, the system uses the first row as default content.

Interactive Email Form Block

The Interactive Email Form block in Marketing Cloud Engagement Content Builder allows marketers to receive subscriber information like profile data, product reviews, and sales leads directly from embedded

forms in an email. Allowing subscribers to submit forms without leaving their inbox increases customer engagement and gives marketers more data.



Note Interactive Email Forms consume super messages in all account editions. Contact your account representative for more information.

The Email Form block is available in Content Builder for Marketing Cloud Engagement Pro editions or higher. Because the block can create, view, and write to a data extension, ensure that users have the Data Extension > Create, View, and Update permissions. To configure the block, in the app switcher:

- Hover over your name and click **Setup**.
- Search for *Content Builder Settings*.
- Enable Email Form under Block Group Configuration.

In the content block, you choose a form template to get started:

- Empty Form - Start from scratch and create any type of form you want.
- Reviews - Allow subscribers to complete product reviews or other feedback surveys. To use this data with third-party review services, build a custom Journey Builder activity to export the data externally. Or redirect the reviewer to another site while passing their form data in the URL query string.
- Progressive Profile - Collect or update subscriber preferences and demographic data, such as name, birthday, product preferences, and interests.
- Case Form - Allow subscribers to create or update a support case. Service Cloud customers can use Journey Builder to pass this data to the Service Cloud and create a case. See [Sales and Service Cloud Activities in Journey Builder](#).
- Lead Form - Capture or update subscriber information from your leads. Sales Cloud customers can use Journey Builder to pass this data to Salesforce.com. See [Sales and Service Cloud Activities in Journey Builder](#).



Note The lead form doesn't set up the lead. To set up the lead, use a Journey Builder activity.

After you define and style your form in the block, select an Interactive Email Page that you created in CloudPages to capture and validate the data. In the block, select or create a data extension that maps to your form fields and saves the submitted data.

Create an Interactive Email Form Block

Follow these steps to create an Email Form block in Marketing Cloud Engagement Content Builder. Ensure that you have the Data Extension > Create, View, and Update permissions, and that Email Form is enabled in Setup > Content Builder Settings.

Interactive Email Form Client Support

Review the supported email clients for the Marketing Cloud Engagement Content Builder Email Form block.

Interactive Email Form FAQ

View frequently asked questions for the Email Form block in Marketing Cloud Engagement Content Builder.

Create an Interactive Email Form Block

Follow these steps to create an Email Form block in Marketing Cloud Engagement Content Builder. Ensure that you have the Data Extension > Create, View, and Update permissions, and that Email Form is enabled in Setup > Content Builder Settings.

1. In Content Builder, click **Create > Content Blocks > Email Form**. Alternatively, create an email and drag the Email Form block in the editor.
 2. Choose a template.
 - Empty Form - Start from scratch and create any type of form you want.
 - Review - Allow subscribers to complete product reviews and other surveys.
 - Progressive Profile - Collect or update subscriber preferences and demographic data.
 - Case Form - Allow subscribers to create or update a support case.
 - Lead Form - Capture or update subscriber information from your leads.
-  **Note** You can customize any template by adding and deleting form fields.
3. Complete the CloudPages Destination fields by searching for a collection and selecting an Interactive Email Page.

 **Important** Navigate to CloudPages and create this page before creating the Email Form block. See [Create an Interactive Email Page](#).
 4. Complete the Response Capture field by selecting an existing data extension or creating one.

 **Important** The selected data extension can't exist in a shared folder.
 5. To add visible fields, click **New Input** and select a field type. You can delete and duplicate fields using the icons. To sort, click and drag fields.
 6. To label and map fields to data extension attributes, click the edit icon on each field. Configure other field options as necessary.

 **Tip** You can create and map your data extension in the content block without navigating away from here. The inputs you build automatically create columns in the data extension. Deleting inputs doesn't delete the data extension columns.
 7. To add hidden fields, click **New Hidden Field** and complete the Data Attribute and Field Content fields. Hidden fields pass to the data extension values that you want hidden from the submitter, such as order number or product ID.
 8. Review and resolve incomplete required fields.
 9. To adjust the General Form Styles, including defining the Fallback State, and Input Styles options, select the Design tab
 10. Select the **Block Settings** tab and complete options as necessary.

See Also

[Create an Interactive Email Page](#)

Interactive Email Form Client Support

Review the supported email clients for the Marketing Cloud Engagement Content Builder Email Form

block.

- Apple iPhone
- Apple iPad
- Apple Mail
- Gmail Webmail
- Gmail App
- Mozilla Thunderbird
- Outlook
- Yahoo webmail
- AOL webmail

Consult [this third-party, open-source resource](#) for more information. Also see [The Ultimate Guide to Interactive Forms in Email](#).

Interactive Email Form FAQ

View frequently asked questions for the Email Form block in Marketing Cloud Engagement Content Builder.

[Interactive Email Form Data FAQ](#)

View frequently asked questions for the Email Form block in Marketing Cloud Engagement Content Builder.

[Interactive Email Form Display FAQ](#)

View frequently asked questions for the Email Form block in Marketing Cloud Engagement Content Builder.

[Interactive Email Form Customization FAQ](#)

View frequently asked questions for the Email Form block in Marketing Cloud Engagement Content Builder.

Interactive Email Form Data FAQ

View frequently asked questions for the Email Form block in Marketing Cloud Engagement Content Builder.

Data

Where is the data extension?

Data is stored in a new or existing data extension that the user chooses when building the content block. Data extensions created with the Create a data extension automatically option are saved in the Interactive Content folder under your top-level Data Extension folder in Email Studio or Contact Builder.

How is the data saved?

In the block, you set the data extension values for questions and answer options. When the recipient submits the email form, the data passes through the URL string to the CloudPages landing page and is saved in your data extension.

Your data extension configuration can impact how email forms write to the data extension. If your data extension doesn't have a primary key, the system adds a row upon form submission. If a primary key is defined, the system attempts an upsert to overwrite the record, but if the payload is missing any primary keys, the system generates a unique ID for the record.

What happens after a user clicks **Submit**?

Upon submitting, the user is directed to a CloudPages Interactive Email page. If the submission contains errors, like incomplete required fields or undefined minimum and maximum character requirements, the recipient receives resolution messages to correct the form and resubmit (no validation occurs in the email inbox). If the submission is valid, the recipient is shown the Confirmation Message content. You build the CloudPages Interactive Email page before selecting it in the Email Form block.

Is submitted form data secure?

Interactive email forms use existing Marketing Cloud Engagement infrastructure and encryption. Information submitted is encrypted and arrives in the browser URL. We recommend not using personal identifiable information in the URL, even with HTTPS encryption.

How do I use the submitted form data?

After it's submitted, data is available in the target data extension and can be used for personalization in MC Scripting, Journeys, and more. If using the Redirect to a URL Confirmation Message option in the Email Form block on the Interactive Email CloudPage, the submitted data is also appended to the query string of the redirect URL specified, and can be used on the subsequent page.



Note Some data can be available during the submission process, but attempting to use it at any point other than from the target data extension or URL parameters on the redirect URL is subject to change without notice and should be avoided.

Does this form data integrate with other Clouds?

Customers can use native functionality in Journey Builder to move data from Data Extensions into Sales Cloud and Service Cloud. See [Sales and Service Cloud Activities in Journey Builder](#).

Why isn't data writing to my data extension?

Review these considerations if your data isn't writing to your data extension:

- Is the data extension selected in your Email Form content block?
- Are all form inputs mapped to a data attribute?
- Are there required fields in the data extension that aren't mapped to a form input? To write to a data extension, ensure that all required fields are mapped.
- Is the CloudPages Interactive Email page configured correctly with a Thank You message selected in

the Form block that is in the middle content row? See [Create an Interactive Email Page](#).

- Did you delete the data extension?

All submissions that don't write to a data extension are added to an error log located in a Data Extensions > Interactive Content folder named 00 IC Error Log. Review this log to monitor submissions and to help troubleshoot configuration errors. The error log records this information:

- Time Stamp - The time of the submission error.
- Is Test Send - A true or false value indicating if the connected email was a test send.
- Subscriber Key - The defined subscriber key for the user who receives the email.
- Email Address - The email address for the user who receives the email.
- Target Data Extension Name - The name of the data extension we attempted to write to.
- Target Data Extension Customer Key - The customer key for the data extension we attempted to write to.
- Submission - The data we attempted to write in a JSON object.
- Error Message - The error message we recorded when attempting to write.
- Email Web Link - The URL for Web View link of the email.

Do I choose to write to an existing data extension or create one automatically?

There's no best practice for choosing between these two options. Evaluate your use case and how you plan to use your data. Creating your own data extension allows greater control over the data extension options and individual fields. If you aren't sure, choose to create one automatically.

How do I manage date fields?

There's no best practice for how to manage date fields in the Email Form content block. The best option is to allow only the selection of dates that are hard-coded into inputs, like a set of radio buttons. If you use a normal text input to collect dates, and they don't match the format required to write to a data extension, the dates don't write to the data extension.

Can I add a time-stamp to my data extension so I know when the submissions occurred?

Yes, you can add the submission time to the data extension that you're using. In Email Studio, add a *Date* field to the data extension and click + to select *Use Current Date* in the Default Value field.

In Contact Builder, add a *Date* field to the data extension and select the *use the current system date* Default Value checkbox. No additional configuration is required in the Email Form block.

Are clicks to the form tracked?

Clicks to the submit button from an email form that result in a successful submission are tracked in standard click reporting. Submissions from the interactive version are tracked using the "forms submit" link alias. Submissions from the Automatic Fallback button are tracked using the "fallbackforms submit" link alias.

Interactive Email Form Display FAQ

View frequently asked questions for the Email Form block in Marketing Cloud Engagement Content Builder.

Why doesn't the form display in my email?

There are three main reasons why your form doesn't display in specific email clients.

- The email client doesn't support interactivity. The most common unsupported email client is Outlook. [See Interactive Email Form Client Support for supported clients.](#)
- If the form doesn't appear in a supported email client, there's likely a CSS conflict between your other email code and the code inserted by the Email Form content block. To diagnose this problem, remove all the other code, ensure that the form is working as expected, then add your code piece by piece to identify the conflict.
- If your issue is Gmail specific, ensure that your email doesn't exceed Gmail's size and character limits. Gmail clips the HTML of messages over 102 kb, which can cause the email form to not display. Gmail also limits the characters in your email's CSS style tags to ~16k. CSS code that exceeds this limit doesn't display in Gmail.

Which email clients support Interactive Email forms?

Support varies by email client but you can expect about 80% of opens to see interactive email forms. However, compatibility can vary depending on the subscriber base. For example, if most of your email opens are in Outlook, the percentage is much lower. The important distinction is that a subscriber's email client, not the email address, dictates whether they can have an interactive experience. [See Interactive Email Form Client Support for supported clients.](#)

What happens when a recipient can't see the Interactive email form?

When setting up an Email Form block in Content Builder, the user can define a fallback state. If a customer opens the email in an unsupported email client, the interactive content reverts to the fallback type you select. The fallback can be another content block, such as a button that links to form on the web, or you choose to show nothing, ensuring that each customer gets the best experience. You can also use automatic fallback, which lets you add a call-to-action button that links directly to the email form on the Interactive Email CloudPage destination you set for the block.

Why do some of my form fields look different in Gmail?

The Image Single Choice, Image Multiple Choice, Button Single Choice, Button Multiple Choice, and Rating input types show a radio button or checkbox depending on their type in the Gmail web client or Gmail apps. Gmail doesn't support some CSS attributes that we use to build the interactive elements while hiding the radio button or checkbox. While the styling is different, we're not aware of any impact on usability or performance. If the addition of the radio button or checkbox isn't acceptable for your use

case, consider using these input types:

- Select dropdown or radio button for single option selection inputs
- Checkbox for multiple option selection inputs

These are examples of how the inputs display with default styling.

Ratings in Apple Mail



Ratings in Gmail



Image or Button Choices in Apple Mail



Image or Button Choices in Gmail



Note The Placeholder Text that can be defined for Text inputs is not supported by Gmail and does not display. Do not rely on the Placeholder Text to convey critical information.

Is the Interactive email form mobile optimized?

Yes, the Interactive email form is built to display properly across all screen sizes of supported email clients. The email template used can impact proper display. For example, a template that isn't responsive or mobile optimized can impact proper email form display.

Can I change or limit the number of characters in the Short Answer or Paragraph section?

No. Only the font size can be changed in the Design tab to accommodate more characters.

Interactive Email Form Customization FAQ

View frequently asked questions for the Email Form block in Marketing Cloud Engagement Content Builder.

Customization

Can I use custom fonts?

You can't select custom fonts in the Design tab of the Email Form content block. However, the block inherits the fonts and styles of the surrounding email template. So, if a custom font is set on the template, the email form block inherits it.

Can I use custom CSS to target the form elements?

You can use custom CSS to override or extend the styles, but it isn't recommended. Because the structure and CSS used by the Email Form block is subject to change at any time, these changes can invalidate your custom CSS the next time you open or edit the block.

Can I change or limit the number of characters in the Short Answer or Paragraph sections of a Text input?

Yes, the character limit on a Text Input is determined by the length of the selected Data Attribute (data extension field). This limit is evaluated and enforced on the CloudPages Interactive Email page.

Can I prepopulate forms with information from data extensions?

You can prepopulate text inputs using the Value field when editing the Text Input. 

We're exploring this feature for other inputs as we improve the Email Form content block.

Can I use dynamic content to display different form fields to different people?

No, there's no workflow in the Email Form content block to perform this task. You can create different Email Form content blocks and then add conditional logic in AMPscript in your template to populate them based on your data.

Example template code:

```
%%[ IF @someVariable=="YES" THEN ]%%  
<div data-type="slot" data-key="interactivecontent" data-label="Interactive Content Section for the if true"></div>  
%%[ ELSE ]%%  
<div data-type="slot" data-key="interactivecontent" data-label="Interactive Content Section for the else"></div>  
%%[ ENDIF ]%%
```

Can I use branching logic based on previous form answers?

No, we don't offer branching logic for the Email Form block due to email client restrictions.

Can I use AMPscript (GTL)?

Yes, within certain limits you can use AMPscript to populate information in your form. There are two main use cases for using AMPscript:

- Use AMPscript for hidden field values as a powerful tool for passing subscriber data into your final data

extension.

- Use AMPscript when setting content for customers to read, such as the text in a label, description, or placeholder. The AMPscript renders correctly in the email, but not if a recipient is required to correct or validate their submission on a CloudPages landing page or if the Automatic Fallback option is used. Therefore, we recommend this use case only if your form has no required fields and you aren't using the Automatic Fallback Button.
- Note: AMPscript set in the placeholder doesn't always display in the Content Builder preview, but displays in Subscriber Preview and in sent emails. Always use a test send to verify before sending.

Does Interactive Email Use AMP for Gmail?

Interactive Email doesn't use AMP for Email. Interactive Email uses a combination of HTML and CSS. While there's overlap in functionality and email client compatibility, there are also differences.

Can I send users to my own landing page instead of a CloudPage?

Yes. To send customers to your own landing page, choose **Redirect to a URL** in the Type of Content dropdown when configuring the CloudPages Interactive Email page confirmation message. The user then passes through the CloudPages landing page and is redirected to the URL that you specified.

I only use HTML Paste emails. Can I still use Interactive Email?

Yes, to use Interactive Email with HTML Paste emails, first convert your HTML Paste email to be used as or with a Content Builder template. Prepare the email HTML as normal but follow these important considerations:

- Verify that your email code has `<html>` and `<body>` tags and begins with `<!DOCTYPE html>`.
- Verify that there are no unmatched HTML tags, such as unclosed table or div tags. Unmatched tags can cause rendering issues when used with Interactive Email, even if they don't cause issues with other campaigns.

Next, identify where in the email you want to place the Interactive Email Form block. Choose a location that allows for properly opened and closed tags. See Correct Code Examples. Then, paste this code snippet in the location you chose: `<div data-type="slot"></div>`

If there's static content included in your code that you want to use for a fallback, remove it from the code now. Use this content in a Content Builder block that you can select as the fallback content in the Email Form block.

Incorrect Code Example

```
<!-- Additional content above interactivity -->
    <table>
    <tr>
    <!-- Do NOT place Interactive Content here -->
    <td>
    </td>
```

```

    </tr>
  </table>
  <!-- Additional content below interactivity -->

```

Correct Code Examples

```

<!-- Additional content above interactivity -->
  <table>
    <tr>
      <td>
        <!-- Safe to place Interactive Content in this cell -->
      </td>
    </tr>
  </table>
  <!-- Additional content below interactivity -->

```

```

    <table>
      <tr><td>Additional content above interactivity</td></tr>
    </table>
    <!-- Safe to place Interactive Content here between tables -->
  >

  <table>
    <tr><td>Additional content below interactivity</td></tr>
  </table>

```

Next, create a template in Content Builder. Select **HTML Template** and choose **Paste HTML**, then copy and paste the HTML you created.

Finally, create your email in Content Builder, choose the template you created, and drag the Email Form block in email.

Create a Code Snippet

Use code snippets in Marketing Cloud Engagement Content Builder to save reusable bits of HTML, AMPscript, and Guide Template Language. Insert snippets when editing HTML via the Code Snippets toolbar selector, or by typing the Customer Key value for the snippet followed by the Tab key. You can also create a code snippet content block by clicking **Create > Content Blocks > Code Snippet**. You can reference Code Snippets with the AMPscript ContentBlockByKey and ContentBlockByID functions.



Note Code snippets behave like content blocks but are different because they don't include an extra HTML table that wraps the content.

Follow this task to create a code snippet in the editor.

1. In the Content Builder editor, highlight the HTML you want to use as a code snippet.
2. Click  from the toolbar menu and select **Create New Snippet**.
3. Alternatively, highlight your HTML, then right-click and select **Create Code Snippet**.
4. Complete the fields and click **Save**. To edit a saved code snippet, select the code snippet from the content library and click **Edit**.

Google Promotions Tab

Learn how to use a Google Promotions Tab code in Marketing Cloud Engagement Content Builder to enhance your email promotions with images, deals, expiration dates, and more.

Google Promotions Tab

Learn how to use a Google Promotions Tab code in Marketing Cloud Engagement Content Builder to enhance your email promotions with images, deals, expiration dates, and more.

Create a code snippet with the sample AMPscript markup and edit the bold areas with your details. If the tab content is the same between emails that use the template, add the code snippet directly under the template `<head>` tag. If the tab content changes between emails that use the template, add a content area directly under the template `<head>` tag, then drag in your code snippet.



Example

```
%%[
  SET @JSONStart = Concat('<', 'script type="', 'application/ld+js
n"', '>')
  SET @JSONEnd = Concat('<', '/', 'script', '>')
]%%
%%=TreatAsContent (@JSONStart)=%%
[ {
  "@context": "https://schema.org/",
  "@type": "Organization",
  "logo": "urlforlogo.png"
}, {
  "@context": "https://schema.org/",
  "@type": "DiscountOffer",
  "description": "20% off",
  "discountCode": "PROMO",
  "availabilityStarts": "2019-01-01T08:00:00-07:00",
  "availabilityEnds": "2019-09-30T23:59:59-07:00"
}, {
  "@context": "https://schema.org/",
```

```
"@type": "PromotionCard",  
"image": "https://urlforimage.png"  
}]  
%%=TreatAsContent (@JSONEnd) =%%
```

See [Google Promotions Tab Get Started](#) for more information.

Share Content

The share content feature allows you to share content, templates, and emails with other business units in your account. Enterprise 2.0 accounts, you can share from any business unit to any other business unit. For Enterprise 1.0 and Agency accounts you can share down to child business units. Contact your relationship manager to enable this feature.

You can create shared folders and share content with Content Builder editing permissions to control how recipient business units can interact with their content. Users with Share permissions can share content or folders to other business units that they have login rights to. Users can share to business units up, down, or across the hierarchy using the Selected Business Units option.

[View the MC Product Expert webinar.](#)

Share across Enterprise

You can share a folder and its contents to one or more business units in your account. When this feature is enabled, access the Shared tab on the main content grid. Any content placed in the root Shared Content folder is automatically shared to all existing and future business unit in your account. To enable the Across Enterprise option, the Administrator enables the setting in the Content Builder Setup page. Do not enable this option for enterprises containing multiple companies. View [Content Builder Setup](#).

Share to Selected Business Units

You can share to specific business units that have log-in access to. You can select a maximum of 2,000 business units. To share to more than 2,000 business units, share Across Enterprise, or Duplicate the content and share the duplicates to separate groups. You can search for business units by name when making selections.



Note Note: Sharing to selected business units does not share content to business units created after the content was first shared.

[Share Content Permissions and Roles](#)

Review the permissions and roles for Marketing Cloud Engagement Content Builder sharing.

[Share Folders and Content](#)

Learn how to share folders and content in Content Builder.

Unshare Folders and Content

Unshare content from all and select business units in Content Builder.

Shared Content Edit Permissions

While Marketing Cloud Engagement Content Builder business units that create content can take all actions on content, business units that receive shared content can only take these actions based on their edit permissions. Review the different Content Builder edit permissions.

Lock Shared Content

Email content areas in Content Builder can now be locked before sharing the email with other business units. This allows recipient business units to only edit unlocked content areas in shared emails with Edit Globally or Edit Locally permissions.

Sharing and Approvals

If you have Content Builder Approvals enabled, use these guidelines when sharing emails.

Share Content Permissions and Roles

Review the permissions and roles for Marketing Cloud Engagement Content Builder sharing.

Content Permissions

You can assign each content item in a shared folder its own edit permission. The edit permission determines how recipients can edit the content. The options for edit permissions are:

- **View and Send:** Recipients can view the shared content and select it to be sent in a message, but they cannot edit the content. Recipients can edit the content in a message, but those edits are not saved to the shared content item.
- **Edit Globally:** Recipients can edit the shared content, and any edit made in one business unit appears in the other business units that have access to the content.
- **Edit Locally:** This option is available for emails only. Recipients can create a local edit of the email, which appears only in their business unit as a separate asset with its own Customer Key and ID. This edit does not overwrite the shared email in other business units. When you create a local edit, the original shared email no longer appears in the recipient's business unit. However, if you delete the local edit, the original shared email appears again. If the business unit that shared the original email deletes or unshares the original, local edits are deleted.



Note For Enterprise 1.0, shared emails can only be shared with the Edit Locally permission. To send the shared email, first create a local edit.

Folder Permissions

Actions taken on this folder structure are controlled by these permissions under Content Builder > Shared Folders.

- View
- Create

- Move
- Rename
- Edit Sharing Properties
- Delete

Inherited Roles

Standard roles inherit these Content Builder permissions by default. Administrators can configure custom roles for each role.

Role	Inherited Content Builder Role
Marketing Cloud Engagement Viewer	View
Marketing Cloud Engagement Content Editor/ Publisher	All Shared Folder permissions
Marketing Cloud Engagement Administrator	All Shared Folder permissions

Share Folders and Content

Learn how to share folders and content in Content Builder.

Share Guidelines

You can share folder items to other business units without moving them to a shared folder. The shared folder items appear in the local folder of the business unit with a shared icon.

- Sharing content blocks and files are controlled by the Content Builder > Assets > Share permission.
- Templates are controlled by the Email Studio > Content > Templates > Share permission.
- Emails are controlled by the Email Studio > Content > Emails > Share permission.

Share Limits

- You can only share content with 2,000 business units. To share to more than 2,000 business units, use share Across Enterprise if enabled, or duplicate the content and share the duplicates to separate groups. View [Content Builder Setup](#).
- A shared folder can contain a maximum of 5,000 content items. If you require more, create subfolders and add more there.
 -  **Note** For Enterprise 1.0, shared emails can only be shared with the Edit Locally permission. To send the shared email, first create a local edit.
- A folder can contain up to 100 folders.

All Shared Content View

On the Shared tab, the All Shared Content view summarizes all content shared both to and from your

business unit. This content includes content located within shared folders or content shared from the Content Builder grid using the Share action. To determine how a content item is shared, locate the sharing icon on the content item grid. If the arrow is to the left of the icon, the content was shared to your business unit. If the arrow is to the right of the icon, it was shared by your business unit to others. Hovering over the icon provides more information about how the content was shared.

Create a Shared Subfolder

1. Right-click on the Shared Content folder or any other folder.
2. Select **Create Sub Folder**.
3. Name the folder.
4. Select the business units that can access all content created or moved in that folder.

All content in a shared folder is shared with the selected business units. New subfolders of a shared folder by default inherit the parent's business unit settings. A subfolder can only be shared to the same or a subset of business units that its parent was shared to.

Share a Single Content Item

1. In the Content Builder grid, find the item you want to share.
2. Expand the dropdown menu by the item.
3. Select **Share**.
4. Select the business units that can access the item.
5. Choose the Edit Permissions for the recipient business units.
6. Click **Share**. The recipients can now access this content in the Shared with Us view in their business unit.

You can also access sharing settings from the banner in the item's Properties page, and in the save flow when creating blocks, templates, and emails.

Share Multiple Content Items

1. In your Content Builder grid, select the items you want to share.
 **Note** Items shared to other business units can be bulk shared or unshared if they are in a shared folder.
2. Expand the Bulk Actions dropdown menu by the item.
3. Select **Share**.
4. Select the business units that can access your item.
5. Choose the Edit Permissions for the recipient business units.
6. Click **Share**. The recipients can now access this content in the Shared with Us view in their business unit.

Unshare Folders and Content

Unshare content from all and select business units in Content Builder.

Unshare Content from All Business Units

- You can't move a folder from the Shared tree to the Local tree and vice versa. Instead, create a destination folder, then move the folder content to the destination folder.
 - To unshare content from a shared folder, move the content to a folder owned by your business unit in the Local tab.
 - You cannot unshare a parent folder from a business unit that has access to one or more of its subfolders. To unshare a hierarchy of folders from a business unit, start with the subfolders and unshare up through the folder tree.
 - You cannot unshare a folder from a business unit that owns content in that folder. Move or remove the content from the business unit you want to unshare.
 - Always share a folder to at least one business unit in addition to the enterprise business unit. Removing access to all business units results in an error.
 - If an email is shared with Edit Locally permissions, then unshared, , the local edits are deleted from all business units who created local edits from the shared email. To prevent this, a recipient can duplicate the original shared email or the local copy before the original is unshared.
 - Recipient business units cannot use the ContentBlockByName AMPscript function to reference content shared manually outside of a shared folder, as its folder path is not available. To reference this content, use the ContentBlockByKey or ContentBlockByID functions.
1. Locate the item in the Local tab.
 2. Select the actions drop-down by the item.
 3. Select **My Business Unit**.
 4. Click **Save**.

Unshare Content from Specific Business Units

1. Locate the item in the Local tab.
2. Select the actions drop-down by the item.
3. Select **My Business Unit**.
4. Click **Save**.



Note If an email is shared with Edit Locally permissions, then unshared, the local edits are deleted from all business units who created local edits from the shared email. To prevent this, a recipient can duplicate original shared email or the local copy before the original is unshared. The duplicate should be stored in a local folder instead of a shared folder.

Shared Content Edit Permissions

While Marketing Cloud Engagement Content Builder business units that create content can take all

actions on content, business units that receive shared content can only take these actions based on their edit permissions. Review the different Content Builder edit permissions.

	Edit	Properties	Send	Preview and Test	Duplicate	Delete	Move	Share
View and Send	No, read-only	Yes, but read-only	Yes	Yes	Yes	No	No	No
Edit Locally - Locally shared email	No, read-only	Yes, but read-only	Yes	Yes	Yes	No	No	No
Local Edit	Yes	Yes, cannot edit Location	Yes	Yes	Yes	Yes	Yes	No
Edit Globally	Yes	Yes, cannot edit Location or Sharing	Yes	Yes	Yes	No	No	No

	Inbox Preview	Validate	Content Detective	Save as Template
View and Send	Yes	Yes	Yes	Yes
Edit Locally - Locally shared email	Yes	Yes	Yes	Yes
Local Edit	Yes	Yes	Yes	Yes
Edit Globally	Yes	Yes	Yes	Yes

Lock Shared Content

Email content areas in Content Builder can now be locked before sharing the email with other business units. This allows recipient business units to only edit unlocked content areas in shared emails with Edit Globally or Edit Locally permissions.

To lock a content area in an email:

1. Navigate to the email editor.

2. Hover over the content area and click the menu arrow.
3. Select **Lock**.
4. Share the email with business units.

Sharing and Approvals

If you have Content Builder Approvals enabled, use these guidelines when sharing emails.

- If Approvals is enabled in your business unit, you cannot share an email to another business unit unless it is approved.
- You can only share approved emails from business units with Approvals enabled.
- To revoke the approval status of a shared email, first unshare the email from all business units. Once modified and re-approved, you can share it again.
- If your email was shared with Edit Locally permissions, any local edit created by a recipient business unit is deleted when the email is unshared.
- If Approvals is not enabled in the business unit sharing the email, but it is enabled in a recipient's business unit, the recipient cannot send the email, as they cannot create an approval workflow for an email owned by another business unit. Use one of these options:
 - Option 1: The recipient duplicates the shared email and creates an approval workflow for the new email.
 - Option 2: If the original email was shared with Edit Locally permissions, the recipient creates a local edit and saves it to a local folder. The recipient then creates a workflow associated to the local edit.



Note In both options, the new email does not inherit content edits made to the original shared email.

Duplicate Content

Use duplicate content in Content Builder to copy the style or format of a previously created content asset. We recommend copying the structure of a piece of content before adding actual content. When duplicating a content area in an email or template, the duplicate option is disabled if the content area block limit is reached.



Note When you duplicate an email, **Save and Edit** does not save the existing campaign association. Configure the campaign association before saving. **Save** does copy the existing campaign association.

1. Click the actions dropdown.
2. Click **Duplicate**.
3. Enter a name.
4. Click **Save**.

Content Builder Approvals in Marketing Cloud Engagement

To review and approve content in Content Builder, use Approvals.

Get Started with Content Builder Approvals

In Marketing Cloud Engagement, you can submit a draft email for approval. Requiring approvals can help you maintain control and consistency over your email communications and branding. Launch the approval process from the Content Builder grid, the Approvals dashboard, or when you're creating an email.

Enable Content Builder Approvals

To use the built-in approvals process in Marketing Cloud Engagement, an admin must turn on the feature for Content Builder. Notify content creators before you enable approvals because it can disrupt their workflow.

Set Content Approval Permissions

Configure approval permissions in Content Builder for Marketing Cloud Engagement.


Content Builder Approvals Permissions

Review permission names and descriptions for use with Approvals in Content Builder. A Marketing Cloud Engagement admin can assign permissions to users.


Get Started with Content Builder Approvals

In Marketing Cloud Engagement, you can submit a draft email for approval. Requiring approvals can help you maintain control and consistency over your email communications and branding. Launch the approval process from the Content Builder grid, the Approvals dashboard, or when you're creating an email.


Before a user can use the approval workflow, an admin must select and configure a team workflow. The standard workflow features a submitter, at least one reviewer, and an approver. Its statuses are pending submission, submitted, reviewed, pending resubmission, and approved.

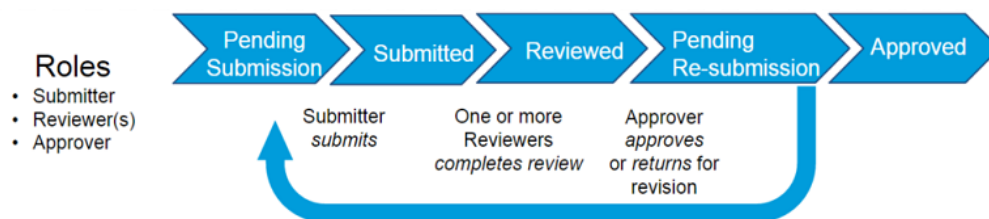

The two-step workflow features only a submitter and an approver, and the statuses pending submission, pending approval, pending resubmission, and approved.

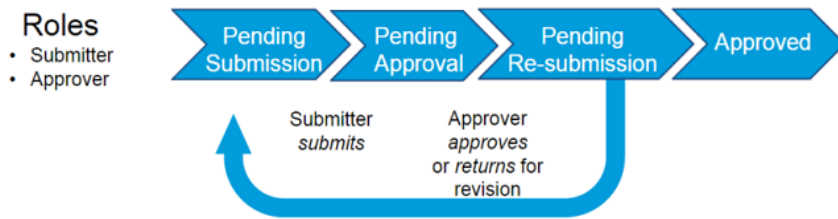

1. Create and save an email message.
2. Next to Start Approvals Process, click **Start**.

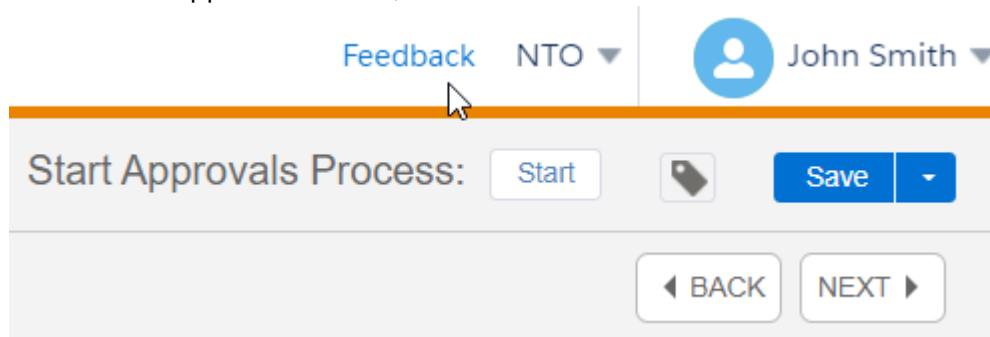

3. Select an audience, add instructions, assign a team, and include an expected completion date.
4. The reviewer or approver receives a notification about the request.

A complete list of messages in the approval process is available on the Approvals dashboard. The reviewer can annotate and comment on the email. Orange icons represent unresolved comments, and green icons indicate resolved comments.

5. An approver reviews the message.
 - If the email needs more work, it's returned to the submitter who can resubmit for approval.
 - If the email is approved, the submitter can send the message to any audience,

Content Builder Approvals Considerations

Before you use Approvals with Content Builder in Marketing Cloud Engagement, review these considerations.

Content Builder Approvals Considerations

Before you use Approvals with Content Builder in Marketing Cloud Engagement, review these considerations.

- Before you enable Approvals for a business unit, create at least one team.
- When you turn on Approvals, current Email Studio or Content Builder emails are approved.
- To edit an approved email, withdraw the email from Approvals. If you withdraw an approved email with pending or scheduled jobs, the email is still used in its originally approved version, even if you edit it.
- To withdraw a shared email, unshare the email first, and then withdraw it from Approvals. Unsharing the email deletes all copies from other business units.
- To make sure that an active journey picks up changes to an approved edited email, start editing the

email from Journey Builder. If you edit the email outside of the journey activity, refresh the activity to verify whether the journey includes the edits.

Enable Content Builder Approvals

To use the built-in approvals process in Marketing Cloud Engagement, an admin must turn on the feature for Content Builder. Notify content creators before you enable approvals because it can disrupt their workflow.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To submit content for approval:	Approval Items–Create and Edit
	AND
	Workflow Teams–Add/Remove User
To select audiences for content:	View on Email > Subscribers > List
	AND
	View on Email > Subscribers > Data Extension

1. In Engagement, hover over your username and click **Setup**.
2. Select **Feature Settings | Content Builder | Approvals Settings**.
3. Click **Create a Team**.
4. Under Teams & Workflows, choose an approval workflow and assign a team name.
5. For Assign a Workflow Role, search for users and select the roles for each person.
6. Click **Apply**, and then click **Close**.
7. To enable Approvals, click **On** and confirm the change.

Set Content Approval Permissions

Configure approval permissions in Content Builder for Marketing Cloud Engagement.

After you enable the approval process, each email message includes an Approvals Status tab.

1. In Engagement, hover over your name and click **Setup**.
2. In the Account dropdown, click **Users**.
3. Select the checkbox next to the user's name and click **Manage Roles**.
4. Click **Edit Permissions**.
5. For Workflows and Approvals, click the plus sign to show the permission categories.
6. Select the permissions you want that user to have.

Content Builder Approvals Permissions

Review permission names and descriptions for use with Approvals in Content Builder. A Marketing Cloud Engagement admin can assign permissions to users.

Permission	Description	API (if available)
Workflow Teams	–	'WorkflowTeam'
Create, edit, copy	Create or copy new review teams or edit existing teams	WorkflowTeam.CREATEEDITAND COPY
Delete	Delete a team	WorkflowTeam.DELETE
Add/Remove users	Assign users from current business unit to review team	WorkflowTeam.ADDREMOVEUSE RS
View	View teams	WorkflowTeam.VIEW
Approvals > Comments	–	'ApprovalComment'
Edit comments	Edit comments made by other users	ApprovalComment.UPDATEOTH ERS
Delete comments	Delete comments made by other users	ApprovalComment.DELETEOTHE RS
Delete threads	Delete a thread of comments	ApprovalComment.DELETEMULT IPLE
View comments	User can create, edit, and delete their comments unless the comments are denied.	ApprovalComment.VIEW
Approvals > Approval Items	–	'ApprovalItem'
Create and edit	Initiate approvals and edit existing approvals	ApprovalItem.CREATEANDEDIT
Delete	Delete workflow and approvals; doesn't delete email	ApprovalItem.DELETE
View	View approval items	ApprovalItem.VIEW
Workflow Role Instance	–	–
View	–	–
Create	–	–
Delete	–	–
Email > Subscriber > List	–	–

Permission	Description	API (if available)
View	–	–
Approve and Decline	–	–
Bypass Approval	–	–
General	–	–
Create and edit workflow definitions	–	–
Enable Approvals for Any Channel	–	–
View Workflow Definitions	–	–
Delete Workflow Definitions	–	–

Content Builder Tags

Create and manage nested and Einstein tags in Marketing Cloud Engagement Content Builder.

[Set Up Nested Content Tags](#)

Better organize and manage your content tags using nested, or hierarchical, content tagging.

[Nested Tags](#)

Nested tags allow you to add two child tags to a parent tag, creating a tag hierarchy to make them easier to find, categorize, and analyze.

[See Also](#)

[Einstein Content Tagging](#)

[Nested Tags](#)

[Tags](#)

Set Up Nested Content Tags

Better organize and manage your content tags using nested, or hierarchical, content tagging.

To set up nested tagging, first delete your current tags, which can take up to 24 hours.

1. From Setup, go to Platform Tools, Einstein, then Einstein Content Tagging.
2. Turn off tagging and click the **Delete Tags** button. Wait up to 24 hours for tags to delete.
3. Reactivate tagging. The new tags are generated by grouping a member's tags under the member identifier, plus ECT, for example: 123456 ECT. All tags end in .ai, for example: penguins.ai. A fully nested Einstein Content tag appears as 123456 ECT with penguins.ai nested under it.

If you use Einstein Content Tagging within Einstein Content Selection, continue with these steps also.

4. From Setup, go to Platform Tools, Einstein, then Einstein Content Selection.
5. Click **Deactivate** under Activate Automated Tagging with Einstein Content Tagging. Wait at least an hour before you continue.
6. Activate the Automated Tagging with Einstein Content Tagging option.

Nested Tags

Nested tags allow you to add two child tags to a parent tag, creating a tag hierarchy to make them easier to find, categorize, and analyze.



Note Nested tags are available in Content Builder only.

Under Setup > Feature Settings > Tags, manage tag hierarchies using **Create**, **Update**, and **Delete** tag actions.

In the Content Builder editor, click the tag icon to open the tag widget to search tags or create and assign tags to your content. The Create permission is required to create tags from the editor tag widget.

In the content library, you can add tags by selecting an asset and clicking the tag icon. You can also filter by tags. In the properties view of content, you can view tags associated with that content.

Sitecore Content

Sitecore content is available via Sitecore Connect for Marketing Cloud Engagement, which enables a real-time sync of images created and updated in Sitecore to Content Builder.

Prerequisites

- Marketing Cloud Engagement with Content Builder
- Media library write privileges in Sitecore

The Sitecore Connect for Marketing Cloud Engagement enables a real-time sync of images created and updated in Sitecore to Content Builder. Sitecore images are uploaded and maintained in Sitecore, and the connector syncs the images to a top-level Sitecore folder in Content Builder. Sitecore images in Content Builder are read-only and can be used across all Marketing Cloud Engagement channels.

- You can use Sitecore images in content blocks, templates, and emails.
- Sitecore content can be shared with and used by other business units.
- Sitecore images are searchable in the Content Builder library.
- The Sitecore content in Marketing Cloud Engagement is updated when either a ready only image is updated or new images are pushed via the sitecore connector.
- Images updated in Sitecore overwrite the images in Content Builder.
- Only users with the Third-Party Content Administrator Access permission can delete Sitecore images in Marketing Cloud Engagement.

Setup and Administrative User Requirements

Only an administrative user with these privileges can configure the connector for a Sitecore account:

- Module installation privileges in Sitecore
- Configuration file write access

For setup instructions, see [Sitecore Connect for Salesforce Marketing Cloud Engagement](#).

Sitecore Content Hub Connect Custom Block

Sitecore Connect allows you to build Content Builder messages with images stored in Sitecore Content Hub (StyleLabs). The connector installs the Sitecore Content Hub Connect custom content block, which you drag in a message and select your Sitecore images.

Sitecore Content Hub Connect Custom Block

Sitecore Connect allows you to build Content Builder messages with images stored in Sitecore Content Hub (StyleLabs). The connector installs the Sitecore Content Hub Connect custom content block, which you drag in a message and select your Sitecore images.

This feature is available for customer who purchased Sitecore Connect for Salesforce Marketing Cloud. See the [AppExchange listing](#) for more details.

Content Builder Recycle Bin

Content Builder Recycle Bin is a repository for recently deleted items that can be restored to Marketing Cloud Engagement. Items moved to the Recycle Bin are unavailable in emails and journeys. You can restore items from the Recycle Bin and use them again.

Access Recycle Bin

Access items sent to the Marketing Cloud Engagement recycle bin. The recycle bin is a list view that lets you sort and filter items. This feature can only be accessed in Content Builder.

Send Items to the Recycle Bin

To remove an item from an active email or journey, move it to the Recycle Bin. You can restore the item if you want to access it again.

Restore Recycle Bin Items

Restore items sent to Marketing Cloud Engagement recycle bin. You can restore one or more items at once.

Delete Recycle Bin Items


Permanently delete items from the Recycle Bin if they're no longer needed.

Access Recycle Bin

Access items sent to the Marketing Cloud Engagement recycle bin. The recycle bin is a list view that lets

you sort and filter items. This feature can only be accessed in Content Builder.

1. Navigate to **Content Builder** in the app switcher and select **Content Builder**.
2. Select the **Recycle Bin** tab.

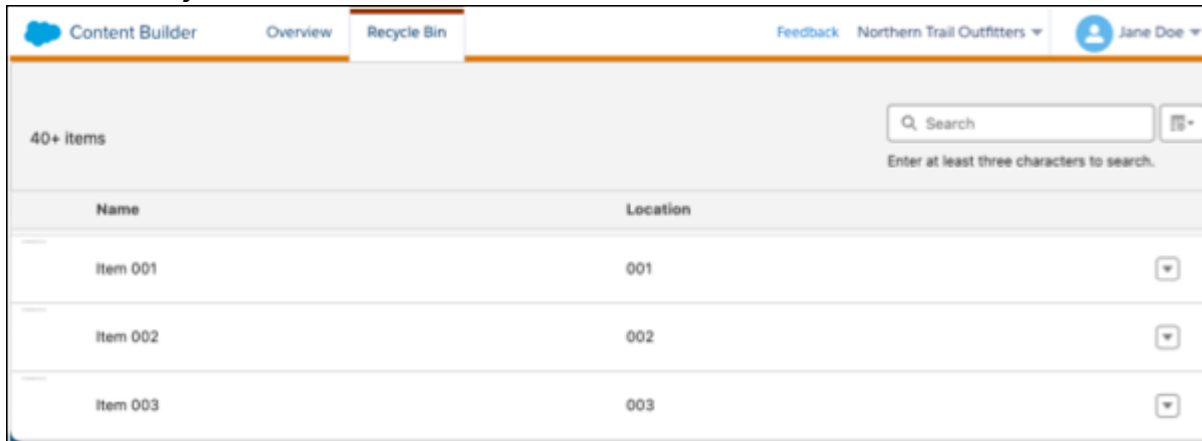

Send Items to the Recycle Bin

To remove an item from an active email or journey, move it to the Recycle Bin. You can restore the item if you want to access it again.

1. Go to the Content Builder item, and select **Send to Recycle Bin** from the dropdown.
2. In the confirmation box, click **Send to Recycle Bin**.

Items in the Recycle Bin are no longer accessible in emails and journeys but remain in the system to preserve reporting. Items remain in the Recycle Bin until you delete them.

Restore Recycle Bin Items

Restore items sent to Marketing Cloud Engagement recycle bin. You can restore one or more items at once.

1. Click the dropdown on the item.
2. In the dropdown, select Restore.

Items are restored to their original folders. If the folder no longer exists, you can't restore the item.

You can only restore items with a unique name and customer key. If an item exists in Content Builder with the same name or customer key, the restoration fails. Select the item in the recycle bin and use the dropdown to edit the name or customer key. After it's updated, attempt to restore the item again.

Delete Recycle Bin Items

Permanently delete items from the Recycle Bin if they're no longer needed.

1. To permanently delete an item in the Recycle Bin, click the dropdown for that item and select **Permanently Delete**.
2. In the confirmation box, click **Delete**.



Important Items moved from the Recycle Bin are no longer accessible in emails and journeys but remain in the system to preserve reporting.