



Engagement: Distributing Marketing and Marketing Cloud Connect



CONTENTS

Using Cross-Cloud Products with Marketing Cloud Engagement	1
Distributed Marketing	2
Marketing Cloud Connect.	154

Engagement: Distributing Marketing and Marketing Cloud Connect

Create a unified customer relationship by combining the marketing capabilities of Marketing Cloud Engagement with Salesforce CRM.

Distributed Marketing

Distributed Marketing from Salesforce bridges the gap between corporate marketing, employees, channel partners, and your brand to deliver consistent experiences across corporate marketing and partner networks. Corporate marketers build and share on-brand, collaborative content in Marketing Cloud Engagement. Distributed teams of advisers, partners, and more can view, personalize, and send this content directly from CRM experiences such as Sales, Service, Financial Services, or Experience Cloud.

Marketing Cloud Connect

Marketing Cloud Connect for Marketing Cloud Engagement combines the digital marketing capabilities of Engagement with the data management, segmentation, and campaign management tools in Salesforce. Create unitary customer relationships with more data-driven, personalized conversations and the ability to automate the customer journey. With Marketing Cloud Connect, access powerful Engagement tools directly within Sales or Service Cloud. Ensure a consistent branding and messaging experience, while engaging customers in relevant conversations and ultimately driving more leads into Salesforce.

Distributed Marketing

Distributed Marketing from Salesforce bridges the gap between corporate marketing, employees, channel partners, and your brand to deliver consistent experiences across corporate marketing and partner networks. Corporate marketers build and share on-brand, collaborative content in Marketing Cloud Engagement. Distributed teams of advisers, partners, and more can view, personalize, and send this content directly from CRM experiences such as Sales, Service, Financial Services, or Experience Cloud.



Note Marketing Cloud Next for Engagement includes platform-based functionality that replicates the experience of Distributed Marketing. To make marketing-approved email templates available to non-marketing users, check out [Distributed Marketing and Alerts](#).

Distributed Marketing provides a managed package that is installed in your CRM environment. You can install Distributed Marketing content blocks in your Marketing Cloud Engagement environment to easily enable powerful content collaboration. All sends use the power of Marketing Cloud Engagement to help teams of all sizes engage with their books of business reliably and at scale.

As a marketer with Distributed Marketing:

- Enable your teams to engage with their book of business at scale with on-brand content.
- Create moments of collaboration within email or SMS messages.
- Maintain brand and legal compliance with automated and manual approval processes.

As an advisor, partner, or dealer with Distributed Marketing:

- Send a personalized email to contacts, leads, or person accounts.
- To send messages to groups of clients at once, use easy segmentation tools like list views.
- Send multiple messages over time without worrying about managing the touchpoint cadence.



Note All documentation is based on the latest Distributed Marketing managed package.

Requirements for Distributed Marketing

Before installing Marketing Cloud Engagement Distributed Marketing, review the required products, licenses, and permissions to help determine if you can use Distributed Marketing in your environment. Within Distributed Marketing, certain features require complementary Salesforce products. Requirements are noted in the feature's setup instructions.

Get Started with Distributed Marketing

You saw the demos and identified compelling use cases that enable your advisors, partners, dealers, and others to inform, market, and sell to their customers at scale. Now, it's time to start setting up Distributed Marketing for Marketing Cloud Engagement. Use these guided setups to quickly activate new workflows for your teams.

Installation Overview

Follow these steps to complete the initial installation and configuration of the Distributed Marketing managed package in your Sales, Service, Financial Services, or Experience Cloud org and Distributed Marketing content block package in your Marketing Cloud Engagement account. To complete configuration in your Sales, Service, Financial Services, or Experience Cloud, you must be able to install the managed package, assign permission sets, and complete post-installation authentication setup. To complete configuration in Marketing Cloud Engagement, you must have access to administrative privileges and be able to install packages.

Distributed Marketing Setup

Distributed Marketing uses Marketing Cloud Engagement journeys and Salesforce campaigns inside the Sales, Service, Financial Services, and Experience Clouds. After installing the managed package and configuring authentication, set up Distributed Marketing by creating an entry event data extension, profile attributes, content, sender profile, and journey. Then customize the Campaign page layout for Distributed Marketing.

Manage Settings

Distributed Marketing allows you to enhance your CRM with Marketing Cloud Engagement content to send relevant, on-brand content at every touchpoint. With administrator access, typically granted to marketers, connect a Marketing Cloud Engagement journey to a campaign, enable Quick Send, and customize Distributed Marketing to fit your needs.

Distributed Marketing Content

Distributed Marketing allows you to extend powerful and dynamic content to distributed teams. You can also use it to allow those teams to interact with that content safely and efficiently.

Enhance Distributed Marketing

Enhance Distributed Marketing functionality to fit your company's needs. To extend the message personalization flow, create custom personalization interactions. Extend the Distributed Marketing payload to include more data for journey decisions, content personalization, and more.

Use Distributed Marketing

Distributed Marketing provides tools, workflows, and experiences that help you better serve and engage your entire book of business.

Requirements for Distributed Marketing

Before installing Marketing Cloud Engagement Distributed Marketing, review the required products, licenses, and permissions to help determine if you can use Distributed Marketing in your environment. Within Distributed Marketing, certain features require complementary Salesforce products. Requirements are noted in the feature's setup instructions.

Distributed Marketing requires these products:

- Salesforce Marketing Cloud Engagement with Journey Builder enabled. The documentation refers to this product as Marketing Cloud Engagement.
- Salesforce Sales, Service, Experience, or Industry Clouds with access to the appropriate objects, features, and capacities, including access to contacts, leads, accounts, campaigns, flows, and content. The documentation refers to this product as CRM.
- Salesforce Connect, with the ability to connect to one external data source. One license, including the

ability to connect to one external data source, is included with Distributed Marketing. This license is used exclusively by the Distributed Marketing application.

 **Note** Any data submitted to the Salesforce Connect Service is cached on SFDC infrastructure temporarily and isn't considered Customer Data as defined in the Agreement. However, (I) for that temporary period during which data is cached on the Salesforce infrastructure, such cached data is considered Customer Confidential Information, and the physical and logical protections for such data is the same as those protections applicable to Customer Data submitted to the Salesforce Services, and (II) in the event such data is electronically imported to and stored in the Salesforce Services (and to the extent such data isn't Content or Non-SFDC Applications), such data is Customer Data.

- Optionally, Marketing Cloud Connect. Users need this product to view engagement metrics such as Email Open in CRM, and to enable more advanced Journey Builder features such as Sales and Service Cloud activities.
- Optionally, MobileConnect. Users need this product to send SMS messages through Distributed Marketing.

 **Note** SMS messages can be sent to individuals who opted into receiving mobile messages. Customers must manage opt-ins outside of the Distributed Marketing application. For example, with email, mobile, or web opt-in templates. Consult independent legal counsel for guidance on applicable legal and industry requirements for managing opt-in. The Mobile Messaging Product Special Terms (PST) apply to SMS messages sent through Distributed Marketing.

- Optionally, SSL. Customers using a private domain need SSL to use the Distributed Marketing Image Block, which supports HTTPS images exclusively.

Distributed Marketing uses an authenticated Marketing Cloud Engagement system user to make marketing content accessible and usable from Sales Cloud. The solution, which can expose content from up to 200 unique Marketing Cloud Engagement business units, requires one unique user per business unit. Also, the business unit must be the unique user's default business unit. This user is referred to as the Marketing Cloud Engagement system user in this documentation. We recommend that this user is a dedicated system user, not a user shared by an employee.

Each unique Marketing Cloud Engagement system user requires these Marketing Cloud Engagement permissions.

Content Builder: Assets	View, Subscriber Preview
Content Builder: Folders	View
Email: Subscribers: Subscriber	Create, View, Update
Email: Subscribers: Data Extension	Create, View, Update, Delete, Manage Data
Email: Content: Email	Preview, View
Interaction Studio	Access
Journey Builder	Access, View



Note A Marketing Cloud Engagement license isn't required for every Distributed Marketing user. Marketing Cloud Engagement licenses are only required for Distributed Marketing Cloud Engagement system users. Content Builder: Assets > Subscriber Preview is only for customers using SMS. When authenticated with a Marketing Cloud Engagement business unit, Distributed Marketing uses named credentials to manage token access throughout the solution. Authenticated calls execute in the context of the authenticating user, which is found on the Execute As field on the named credential's associated Auth. Provider. The authenticating user in CRM must be an active user and have these CRM permissions:

To configure account authentication:	DMAAdministrator License permission set, Administrator permission (mcdm_15 namespace), Manage Auth Providers, Modify All Data, and Customize Application
To maintain an active integration:	Custom Application

Distributed Marketing is available in these Salesforce products and experiences.

Salesforce Product (Cloud)	What's Supported
Marketing Cloud Engagement (required)	E2.0
Sales	Professional, Enterprise, Unlimited Editions
Service	Professional, Enterprise, Unlimited Editions
Experience	Partner Experience (member), Partner Experience Login, Lightning External Apps Plus
Industries	Financial Services: Professional, Enterprise, Unlimited



Note

- Distributed Marketing requires SOAP APIs. To enable Distributed Marketing support in Sales or Service Cloud Professional Edition, purchase SOAP API separately.
- Distributed Marketing doesn't support users with External Identity, External Apps (Commerce Portal/ Lightning External Apps), Experience Cloud, Authenticated Sites, and Service Cloud Portal licenses. Your org must have at least one Partner Experience or Partner Experience login license provisioned to install Distributed Marketing.
- Distributed Marketing supports Marketing Cloud Engagement environments using tokenized sending and Field Level Encryption (FLE) with some considerations and limitations.
- Distributed Marketing supports CRM environments using SHIELD with some considerations and limitations.

CRM Experience	Supported
Salesforce Classic (Aloha)	No
Lightning Experience (LEX)	Yes

 **Note** Distributed Marketing uses custom components.

Review these scale considerations for using Distributed Marketing. Because the efficiency and scalability of a customer's org is mostly a function of their use cases, design decisions and implementation, scale considerations include "your mileage may vary." Certain workflows can have workflow-specific scale limitations. If your org is heavily customized, testing in a Sandbox environment is recommended.

Governor Limits. Distributed Marketing is a managed package. The product is subject to governor limits. [Learn more.](#)

Journey Builder Limitations. Distributed Marketing sends through Journey Builder, and is subject to Journey Builder's throughput and scale considerations. [Learn more.](#)

Users Per Org. Distributed Marketing doesn't support more than 150,000 users with Distributed Marketing Standard or Admin permissions in a single organization.

Concurrent Users. In an environment with little to no customizations, Distributed Marketing doesn't impact concurrent users. However, customers can experience concurrency issues when adding or removing members from a campaign. Customers can also encounter issues after customizing the platform using custom rollup summary fields and triggers, which update built-in rollup summary fields. For example, the campaign member status field on the campaign object. After a customer customizes the platform, we recommend that they perform their own performance testing to understand if their customizations imposed more limits outside of the use of Distributed Marketing.

Send Volume. We recommend that customers with custom roll-up summary fields send no more than 500 messages per campaign per minute. Roll-up summary fields lock the parent campaign record and can cause failures due to row-locking. This limit applies to all campaign send types.

Understand the total number of messages your users plan to send. If you think the number of sends could exceed 10,000 sends per minute, or 600,000 per hour, contact the account team to ensure that your account is provisioned for success. This volume is rarely seen. One send equates to an injection onto the journey. The number of messages on a campaign doesn't have an impact.

Distributed Marketing supports these Journey Builder message activities.

Message Activity	Available Workflows	Preview Support	Collaboration Support
Email	Campaign Send, Quick Send	Yes	Yes
SMS	Campaign Send, Quick Send	Yes	Yes

Message Activity	Available Workflows	Preview Support	Collaboration Support
Push Notification	Campaign Send	No	No
In-app Message	Campaign Send	No	No
LINE Message	Campaign Send	No	No
Inbox Message	Campaign Send	No	No
Custom Activities	Campaign Send	No	No

 Note

- All Distributed Marketing sending occurs through Journey Builder.
- If a message activity supports preview, users can view the activity and its message content through the Distributed Marketing experience.
- If a message activity supports collaboration, users can optionally interact with the message content through the Distributed Marketing experience.
- The SMS message activity requires MobileConnect.

Distributed Marketing supports sending to these CRM objects.

Object Records	Supported
Contacts	Yes
Leads	Yes
Person Accounts	Yes, with some workflow considerations
Custom Objects	No

Distributed Marketing requires these CRM objects and features.

Objects & Features	Type	Notes
Contact	Standard Object	
Lead	Standard Object	
Account	Standard Object	
Campaign	Standard Object	
ContentDocument (Content)	Standard Object	
Flow	Feature	
Integration via SOAP APIs	Feature	

Objects & Features	Type	Notes
Salesforce Connect	Feature	The ability to connect to one external data source is included with Distributed Marketing.

 **Note** While all these objects and features are required to install the solution, individual features can be used at your discretion. Most features are enabled through Distributed Marketing Administration, a permission set, or a combination of both. Features are available in all supported Salesforce Products (Clouds) unless otherwise indicated.

Distributed Marketing supports these languages.

Experience	Supported
CRM Experience (managed package)	English, German, Spanish, Mexican Spanish, French, Italian, Japanese, Brazilian Portuguese
Marketing Cloud Engagement Experience	English, German, Spanish, French, Canadian French, Italian, Japanese, Brazilian Portuguese, Latin American Spanish

See Also

[Distributed Marketing](#)
[Salesforce Pricing](#)

Get Started with Distributed Marketing

You saw the demos and identified compelling use cases that enable your advisors, partners, dealers, and others to inform, market, and sell to their customers at scale. Now, it's time to start setting up Distributed Marketing for Marketing Cloud Engagement Use these guided setups to quickly activate new workflows for your teams.

Before We Begin

Distributed Marketing is a set of tools, workflows, and experiences that allow users to view, interact with, and send best practice Marketing Cloud Engagement content from within their CRM experience. It helps your users easily engage with their books of business individually or in segments. Before you start, you can learn more about the product by taking the [Getting Started with Distributed Marketing](#) trail.

 **Tip** Where you see CRM, we're referring to any supported CRM experience such as Sales, Service, Financial Services, or Experience Clouds. Review Distributed Marketing requirements to ensure that you have the required objects and features within your environment. Where you see MC, we're referring to Marketing Cloud Engagement. To use any Distributed Marketing feature, you and your users need the appropriate permissions, which are listed on each help topic.

Guided Setup: Install and Configure Distributed Marketing

Before rolling out Distributed Marketing, we suggest having an internal alignment meeting to review tasks and determine a timeline and rollout strategy. This meeting typically involves stakeholders from corporate marketing, IT, and your business users such as Sales or Partner Management. Distributed Marketing installation is a multistep process that has you work in your Marketing Cloud Engagement and Sales Cloud environments. Some instances require you to work with multiple individuals in your organization who have administrative permissions in both environments. The environment you're working in is indicated on each task.

Guided Setup: Distributed Marketing Quick Send

Use this guide to set up Quick Send workflows in Distributed Marketing for Marketing Cloud Engagement.

Guided Setup: Campaign Send

Use this guide to set up the Campaign Send workflow in Distributed Marketing for Marketing Cloud Engagement.

Guided Setup: Distributed Marketing for Experience Cloud

In general, you can use the standard Distributed Marketing help and training documentation to set up, configure, and use Distributed Marketing. However, use this guide when setting up Distributed Marketing in Experience Builder instead of Lightning App Builder.

See Also

[Installation Overview](#)

Guided Setup: Install and Configure Distributed Marketing

Before rolling out Distributed Marketing, we suggest having an internal alignment meeting to review tasks and determine a timeline and rollout strategy. This meeting typically involves stakeholders from corporate marketing, IT, and your business users such as Sales or Partner Management. Distributed Marketing installation is a multistep process that has you work in your Marketing Cloud Engagement and Sales Cloud environments. Some instances require you to work with multiple individuals in your organization who have administrative permissions in both environments. The environment you're working in is indicated on each task.

Install Distributed Marketing:

Install Distributed Marketing in your Sales Cloud and Marketing Cloud Engagement environments.

1. [Install the Distributed Marketing Managed Package](#) (CRM).
2. [Assign administrator feature licenses to yourself](#) (CRM).



Tip Your administrator can assign DM Administrator or DM Standard feature licenses to other users now, or wait until Distributed Marketing is fully set up and tested.

3. [Install Distributed Marketing Content Blocks](#) (MC).



Tip Distributed Marketing content blocks allow your business users to edit content. If editing content doesn't fit into your business strategy, you can skip this step.

Create a Sender Profile:

Now, [create a sender profile](#). A sender profile specifies the From information for a send, and contains the name and address that the message appears to be from in the subscriber's email client. By default, Distributed Marketing sends messages on behalf of the user who hits the Send button, the running user. You can support more complex sending options using custom sender profiles.

Complete the Connection:

Finally, follow these steps to complete the connection. Distributed Marketing allows you to share content from up to 200 Marketing Cloud Engagement business units, regardless of the Marketing Cloud Engagement account, in a single Sales Cloud org. To make content in a specific business unit available, simply add it to Distributed Marketing, and log in to create and validate the connection.

1. [Add a Business Unit](#) to your organization (CRM).
2. [Share the Business Units](#) (CRM).



Tip Your administrator can optionally manage access to a business unit's content using sharing rules.

Guided Setup: Distributed Marketing Quick Send

Use this guide to set up Quick Send workflows in Distributed Marketing for Marketing Cloud Engagement.

What Is a Quick Send?

Quick Sends allow users to send a single, personalized email or SMS message to a part of their book of business, including: Quick Send messages are like opening an email inbox and typing an email, or opening your messaging app and sending a text. The difference is that Quick Send messages are more powerful because every send has the power of Marketing Cloud Engagement's Journey Builder behind it.

- A single contact, lead, or person account from different contexts such as individual records, opportunities, and Quick Send message records
- Up to 75 individuals at a time from a list view
- Up to 25,000 individuals at a time from the Quick Send message record

What kind of messages can you send using Quick Send? The possibilities are endless, but some examples include:

- Personalized e-cards for birthdays or holidays
- Empathetic notes after a world event, like a natural disaster
- Thank-you messages after a customer meeting
- Instructions for a time-sensitive issue
- Promotions or offers you want to give to one customer
- Follow up emails on a specific topic

You can learn more about Quick Send messages [here](#).



Tip If you haven't installed and set up Distributed Marketing, first check out [Guided Setup: Install and Set up Distributed Marketing](#).

A unique Marketing Cloud Engagement Journey powers every Distributed Marketing Quick Send message and includes the same ingredients:

- An email or SMS message activity
- A sender profile for email messages
- A data extension for the journey's API entry source

Create the individual ingredients in any order you prefer, and combine them together in a journey. Then share that journey with your users in some, or all, of the Quick Send workflows. If one workflow doesn't fit your business strategy, skip that task. You can use sharing rules to control what content individual users can see and send.

Set Up a Journey for Quick Send Message

1. Create Content for Distributed Marketing.

Content is the first ingredient. Create an email or SMS message in Journey Builder for any content you want to give your users. You can also create emails in Content Builder directly.

When creating emails for Distributed Marketing, remember to include the necessary sections to remain legally compliant in your region, such as the ability to unsubscribe. All messages sent through Distributed Marketing are considered Commercial. You can use Distributed Marketing's collaborative content to allow users to edit content, or skip this option if editing doesn't fit your content or business strategy.

When creating SMS messages for Distributed Marketing, recipients must be opted into their country code before users can send. You can use AMPscript to let users write their own SMS messages, or you can provide pre-written messages instead.

A user with access to create and modify content in Marketing Cloud Engagement completes these steps.

- a. Create an email or SMS message. Optionally include [Distributed Marketing content blocks](#) or AMPscript to [enable custom SMS messages](#) (MC).
- b. Save the content.

2. Create an Entry Event Data Extension.

The [entry event data extension](#) is the second ingredient. Distributed Marketing uses Marketing Cloud Engagement data extensions to store information about the send, like who sends it and who receives it. Create a data extension for any message you want to send with Distributed Marketing.

A user with access to Contact Builder and Journey Builder in Marketing Cloud Engagement [creates a data extension](#) for the quick send message (MC).

3. Create a Journey for a Quick Send Message.

Distributed Marketing uses Journey Builder's sending engine to send.

A user with access to Journey Builder in Marketing Cloud Engagement [creates a journey for quick send messages](#). We recommend creating a unique journey for each Quick Send. For a journey to be available for Quick Send, re-entry must be allowed. A single Email or SMS message activity can be used, but you can use multiple non-message activities and flow controls.

Set Up Quick Send Workflows

Set up one or more Quick Send workflows to let your users send a one-off message from throughout the platform. If one of the workflows doesn't fit into your business strategy, you can skip that task.



Tip When you add content in Distributed Marketing Administration, the content appears in all enabled Quick Send workflows.

When setting up a workflow, think about how you want to control who can see the component. Anyone without access receives a friendly message telling them such, but you can avoid this notification by [setting component visibility](#).

1. Set up Quick Send from a Contact, Lead, or Person Account.

[Add a Quick Send component](#) to your contact, lead, or person account page layouts to let a user send a single message from the recipient's message. Quick Send can only be added to the account layout if you're using person accounts.

2. Set up Quick Send from a List View

Enable users to send messages to up to 75 individuals at once using List Views. To set up Quick Send to a List View, [add the Send Quick Email custom button](#) to the Contact, Lead, or Person Account List View Search Layout in Lightning App Builder. Quick Send to a List View isn't supported in Experience Cloud.

3. Set up Quick Send from a Case

[Add the Quick Send component](#) to a Case page layout to allow a user to send a single message to an individual associated with the case from the case record.

4. Set up Quick Send from an Opportunity

[Add a Quick Send component](#) to an Opportunity page layout to allow a user to send a single message to an individual associated with the opportunity from the opportunity record.

5. Set up Quick Send from a Quick Send Message Record

[Set up Quick Send from the message record](#) to allow users to send a single message to an individual or bulk send to up to 25,000 individuals at once.

Share Content with Quick Send

You enabled the Quick Send workflows and created the content that makes sense for your users. Now it's time to share that content. Enable the journeys you want available in Distributed Marketing Administration. Then define sharing rules to allow users to see and send specific messages.



Tip After you enable a journey for Quick Send, the message is available in any of the Quick Send workflows you set up. If you applied sharing rules, users only see the individual Quick Send messages shared with them. Otherwise, Quick Send messages default to public view.

1. Add or remove the journeys from [Quick Send](#) in Distributed Marketing Administration.
2. In Setup, create and apply [sharing rules](#) for the Quick Send Journeys object.
3. Set up a Content Marketplace for Quick Send. Create list views of Quick Send messages. Then [create content marketplaces](#) to help users discover content they can access.



Example You're a financial institution offering banking, insurance, and retirement solutions. You have about 50 assets that are categorized into:

- Banking Quick Sends
- Insurance Quick Sends
- Retirement Quick Sends

These marketplace categories give administrators and other users the ability to group content in useful ways to help with content discovery. Let's say you set up sharing rules so bankers only see Quick Sends that have a custom field "Category" = Banking. It's likely that the category has dozens, if not hundreds, of different emails, including some related to holidays, taxes, different account types, and investment options. Giving the bankers a large content list means that they have to search through everything to find the right content using just the Quick Send name. That's what currently happens on the Quick Send component for the contact record. To help the bankers, marketplaces, also called list views, can be created for each of the categories, and then shared. So, if one of the bankers speaks with someone about investment opportunities, the banker can quickly find the "Investment Opts Assets" custom list view and see the 7 investment-related emails rather than the 50 other non-investment-related emails.

Guided Setup: Campaign Send

Use this guide to set up the Campaign Send workflow in Distributed Marketing for Marketing Cloud Engagement.

What Is Campaign Send?

Campaign sends allow users to add contacts, leads, or person accounts to single or multi-step journeys. These journeys can be simple, linear drip campaigns, engagements with engagement splits, AI, and more. Most messages can also be personalized for specific individuals or groups of people.

What kind of messages can you send using Campaign Send? The possibilities are endless, but some examples include:

- A welcome series to onboard a new customer
- An event management campaign to help drive attendance and follow up after the event
- A selling campaign to help reach the most individuals based on their channel preference and

engagement

Your Setup Tasks



Tip If you haven't installed and set up Distributed Marketing, first check out [Guided Setup: Install and Set up Distributed Marketing](#).

A unique Marketing Cloud Engagement Journey powers every Distributed Marketing Campaign Send and includes the same ingredients:

- A message
- A sender profile
- An entry event data extension

Create the individual ingredients in any order you prefer and combine them in a journey. Then share that journey with your users using the standard Salesforce Campaign object or campaign marketplaces. If you manage multiple brands or have different tiers of users, you can use sharing rules to control what content users can see and send.

When thinking about your campaign creation strategy, here are a few things to keep in mind:

- A single journey can power multiple campaigns, but a single campaign can only be powered by one journey.
- You can have all your users access the same campaign, or you can create a unique campaign for each user or team. Both approaches have pros and cons that depend on how you want to use campaigns and which of the powerful out-of-the-box tools, such as campaign influence, that you use. Your organizational structure is also a factor. We suggest creating a unique campaign for each user and using campaign hierarchy to relate them all together. You can decide on these options on a campaign-by-campaign basis. Regardless, users can only use Distributed Marketing to message individuals they have access to.

1. Create Content for Distributed Marketing

Create an email or SMS message that you want to let your business users send. This process is the same way you create content for any Distributed Marketing send.

- a. Create an SMS message in Mobile Connect or an email in Content Builder with [Distributed Marketing content blocks](#) (MC).
- b. Save the content.

Distributed Marketing emails are like [Marketing Cloud Engagement content for CAN-SPAM \(or equivalent\) requirements](#).

2. Create an Entry Event Data Extension

The [entry event data extension](#) is the second step. Distributed Marketing uses Marketing Cloud Engagement data extensions to store information about the send, such as who sends it and who is receives it. Complete this step for any message you want to send with Distributed Marketing.

Create a data extension for the Quick Send message (MC).

3. Create the Journey for the Campaign Send

Distributed Marketing uses Journey Builder's sending engine. For more information about the steps in this section, see [Create a Marketing Cloud Engagement Journey](#).

A user with access to Journey Builder in Marketing Cloud Engagement completes these steps.

- a. Create a journey for this Quick Send.
- b. Add an API Entry Source activity, and configure with the new data extension.
- c. Drag on a Send Email activity, then add and configure the content created for this Quick Send using the Distributed Marketing sender profile.
- d. Configure Contact Entry
- e. Save and Activate your journey.

Guided Setup: Distributed Marketing for Experience Cloud

In general, you can use the standard Distributed Marketing help and training documentation to set up, configure, and use Distributed Marketing. However, use this guide when setting up Distributed Marketing in Experience Builder instead of Lightning App Builder.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To create, customize, or publish a digital experience:	Create and Set Up Experiences AND View Setup and Configuration

To access the Experience Builder, in Sales or Service Cloud, navigate to **Setup**. Use Quick Find to navigate to **All Communities**. Click **Builder** for the site that you're editing.

1. [Add Campaign Messages Component](#)

Customize your Campaigns page layout for Distributed Marketing to include this custom Campaign Messages component. This component provides access to review Marketing Cloud Engagement messages within the connected journey, preview content, review pending campaign members for approval, and more. Think of the Campaign Messages component as a Distributed Marketing campaign's "home base."

2. [Add Pending Approvals Page](#)

Add a Pending Approvals page to continue setting up Distributed Marketing in your Experience Cloud. Through this page, you can review contacts, leads, and others to approve or reject them for receiving campaign messages.

3. [Add Settings Page](#)

Add a Distributed Marketing Settings page to continue setting up Distributed Marketing in your Experience Cloud. Through this page, you can select the default personalization and create options for personalizing messages, such as selecting how the message recipient is greeted.

4. Expose User Settings

Add a Settings navigation menu item to continue setting up Distributed Marketing in your Experience Cloud. This navigation menu item provides quick access to the Distributed Marketing Settings page.

5. Add Quick Send Components

To help your business users send a single email to a part of their book of business, add one or more of the Distributed Marketing Quick Send components to their experience.

See Also

[Manage Partner Relationships with Experience Cloud Sites](#)

Add Campaign Messages Component

Customize your Campaigns page layout for Distributed Marketing to include this custom Campaign Messages component. This component provides access to review Marketing Cloud Engagement messages within the connected journey, preview content, review pending campaign members for approval, and more. Think of the Campaign Messages component as a Distributed Marketing campaign's "home base."

REQUIRED EDITIONS**USER PERMISSIONS NEEDED**

To create, customize, or publish an experience:	Create and Set Up Experiences AND View Setup and Configuration
---	--

1. Access the Experience Builder. In Sales or Service Cloud, navigate to **Setup**. Use Quick Find to navigate to **All Experiences**. Click **Builder** for the Experience that you're editing.
2. Click **Home**.
3. Click **+ New Page**.
4. Click **Object Pages**.
5. Click **Campaign** for the object.
6. Click **Create**.
7. To customize components, click .
8. To add the Distributed Marketing component to the Campaign page, drag the custom component **MCDM Campaign Messages** onto the page.

Add Pending Approvals Page

Add a Pending Approvals page to continue setting up Distributed Marketing in your Experience Cloud. Through this page, you can review contacts, leads, and others to approve or reject them for receiving campaign messages.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To create, customize, or publish an experience:	Create and Set Up Experiences AND View Setup and Configuration
---	--

1. In Experience Builder, click **Home**.
2. Under Pages, click + **New Page**.
3. Click **Object Pages**.
4. Click **Linked Journey**.
5. Click **Create**.
6. Remove any existing components from the new page.
7. To customize components, click .
8. Drag the custom component **MCDM Pending Submissions** onto the page.

Add Settings Page

Add a Distributed Marketing Settings page to continue setting up Distributed Marketing in your Experience Cloud. Through this page, you can select the default personalization and create options for personalizing messages, such as selecting how the message recipient is greeted.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To create, customize, or publish an experience:	Create and Set Up Experiences AND View Setup and Configuration
---	--

1. In Experience Builder, click **Home**.
2. Under Pages, click + **New Page**.
3. Click **Standard Page**.
4. Select a layout.

 **Tip** The one full-width column layout is recommended.
5. Click **Next**.
6. Enter a helpful name, such as *Distributed Marketing Settings*.
7. Modify the URL as desired.
8. Click **Create**.
9. To customize components, click .
10. Drag the custom component **MCDM User Settings** onto the page.
11. Select **Publish**, and publish these changes to your Experience Cloud.

Expose User Settings

Add a Settings navigation menu item to continue setting up Distributed Marketing in your Experience

Cloud. This navigation menu item provides quick access to the Distributed Marketing Settings page.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To create, customize, or publish an experience:	Create and Set Up Experiences AND View Setup and Configuration

1. In Experience Builder, click **Home**.
2. Under Pages, click **Home**.
3. To customize the navigation, click the navigation bar.
4. Click **Navigation Menu**.
5. Click **+ Add Menu Item**.
6. Enter a name, such as *Settings*.
7. Select a type.
8. Select the Distributed Marketing settings page you created.
9. To add this navigation menu item, click **Publish**.

Add Quick Send Components

To help your business users send a single email to a part of their book of business, add one or more of the Distributed Marketing Quick Send components to their experience.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To create, customize, or publish an experience:	Create and Set Up Experiences AND View Setup and Configuration

1. In Experience Builder, click **Home**.
2. Click **+ New Page**.
3. Click **Object Pages**.
4. Select an object using the following table, and click **Create**. Then, drag on the corresponding Quick Send component.

Quick Send Workflow	Object	Quick Send Component
Quick Send from Contacts, Leads, and Accounts	Contact, Lead, or Account	MCDM Quick Send Message
Quick Send from Cases	Case	MCDM Quick Send Message
Quick Send from Quick Send Message Record	Quick Send Message	MCDM Quick Send Audience



Note Quick Send from List Views and Quick Send from Opportunity Records aren't supported in Experience Cloud experiences.

See Also

[Quick Send Messages](#)

Installation Overview

Follow these steps to complete the initial installation and configuration of the Distributed Marketing managed package in your Sales, Service, Financial Services, or Experience Cloud org and Distributed Marketing content block package in your Marketing Cloud Engagement account. To complete configuration in your Sales, Service, Financial Services, or Experience Cloud, you must be able to install the managed package, assign permission sets, and complete post-installation authentication setup. To complete configuration in Marketing Cloud Engagement, you must have access to administrative privileges and be able to install packages.

Review the Help topics in the order specified to perform the installation.

1. **[Install the Distributed Marketing Managed Package](#)**

Install the latest Marketing Cloud Engagement Distributed Marketing package version in your Salesforce org.

2. **[Assign Permissions](#)**

To grant access to Distributed Marketing, follow these steps to assign the installed permission sets.

3. **[Install Content Blocks](#)**

Marketing users with custom content blocks in Content Builder can enable personalization. Register blocks with your Marketing Cloud Engagement account, and then drag them into email content to create areas of collaboration for business users. To use Distributed Marketing content blocks, create a Marketing Cloud Engagement installed package for Distributed Marketing. Then, determine access and add the custom blocks you want to use.

4. **[Use Business Units with Distributed Marketing](#)**

If you use Marketing Cloud Engagement business units to manage content by categories - like brand, line of business, or region - you can add them to Distributed Marketing to support unique groups of business users. Then, use sharing rules and campaign marketplace to manage the content that groups of sellers, partners, distributors, or agents can access. You can set up business unit access for both Distributed Marketing administrators and standard users in Salesforce Setup. Business users do not require unique Marketing Cloud Engagement logins.

Install the Distributed Marketing Managed Package

Install the latest Marketing Cloud Engagement Distributed Marketing package version in your Salesforce org.

1. Log out of active Marketing Cloud Engagement sessions.
2. Log in to your Salesforce org.

3. Install the [MCDistributedMarketing managed package](#).
When you're prompted to log in, enter your administrator credentials.
4. Select the role or user profile for the managed package using Marketing Cloud Engagement Distributed Marketing.
To make sure that the managed package installs only for Distributed Marketing licensed users, select **Install for Admins Only** or **Install for Specific Profiles**.

Distributed Marketing Upgrades and Maintenance

Distributed Marketing features are automatically included in the Marketing Cloud Engagement releases and Distributed Marketing managed package updates. Content block updates are available immediately with each Marketing Cloud Engagement release. Distributed Marketing managed package updates are first available in Salesforce non-production environments and then in Salesforce production environments.

Distributed Marketing Upgrades and Maintenance

Distributed Marketing features are automatically included in the Marketing Cloud Engagement releases and Distributed Marketing managed package updates. Content block updates are available immediately with each Marketing Cloud Engagement release. Distributed Marketing managed package updates are first available in Salesforce non-production environments and then in Salesforce production environments.

Updates begin at 10:00 AM ET (7:00 AM PT) on the scheduled date. Release dates and times are subject to change. Some bug fixes and enhancements are released in micro-releases or emergency releases, which occur at 8:00 PM ET (5:00 PM PT). Production and non-production orgs are automatically updated during these releases.

After the Distributed Marketing managed package is pushed to Salesforce sandbox environments, administrators can manually upgrade production environments before the scheduled push.

Before you upgrade, review the [release notes](#).

1. Install the [MCDistributedMarketing managed package](#).
When you're prompted to login, enter your administrator credentials.
2. Select whether to install the managed package for admins only or for specific profiles.

Distributed Marketing Release Calendar

The Marketing Cloud Engagement Distributed Marketing release calendar is no longer in use.

See Also

[Marketing Cloud Engagement Release Notes](#)
[Upgrading Packages](#)
[Graded Browser Support](#)
[Supported Browsers for Experience Cloud Sites](#)

Distributed Marketing Release Calendar

The Marketing Cloud Engagement Distributed Marketing release calendar is no longer in use.

Refer to [Salesforce Release Notes](#) for the latest feature updates for Marketing Cloud Engagement Distributed Marketing.

Assign Permissions

To grant access to Distributed Marketing, follow these steps to assign the installed permission sets.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To manage permission set assignments:	Assign Permission Sets

Custom permissions and permission sets provide users access to Distributed Marketing licenses, objects, and functionality. Distributed Marketing has different permissions sets designed to give users, or groups of users, access to the functionality you want them to have. All Distributed Marketing permissions and permission sets have the mdcm_15 Namespace prefix.

These Distributed Marketing custom permissions and permission sets are provided:

- DM Administrator
- DM Administrator License
- DM Approver
- DM Bulk Send
- DM Standard
- DM Standard License

The DMAdministrator License or DMStandard License permission sets must be assigned to use Distributed Marketing functionality, unless otherwise indicated. You use a single license when either permission set is assigned to a user. We recommend that you manage license access exclusively with these permission sets. You can view the remaining licenses in your organization by navigating to Setup, choosing Company Information, and then reviewing the Distributed Marketing row in Permission Set Licenses.

-  **Note** Different tasks within Distributed Marketing administration can require other custom or standard permissions. The minimum permissions required to perform any task are outlined in that task's help and training documentation.
-  **Note** A Distributed Marketing [permission set license](#) is assigned automatically when you assign the DM Administrator License or the DM Standard License permission set to a user. Avoid assigning the Distributed Marketing permission set license to users because it can cause difficulties when managing license consumption. Instead, manage licenses through permission set assignment as

outlined on this page.

1. In Salesforce, navigate to **Setup**.
2. Use Quick Find to navigate to **Permission Sets**.



Tip To assign multiple permissions, instead of navigating to Permission Sets, search for the user you want to assign permissions to. Select Edit Assignments under Permission Set Assignments. Assign multiple permissions from Available Permission Sets to Enabled Permission Sets, and save the changes.

3. Select a Distributed Marketing permission set or permission set license.
4. Click **Manage Assignments**.
5. Click **Add Assignments**.
6. Select users for the Distributed Marketing permission set or permission set license.
7. Click **Assign**.
8. Click **Done**.
9. To assign more permission sets, repeat the steps.

Distributed Marketing Permissions

Control access to Distributed Marketing using custom permissions and permission sets.

Remove Distributed Marketing Licenses from Users

Make Distributed Marketing licenses available for others by removing the permission sets and the permission set licenses from existing users.

Distributed Marketing Permissions

Control access to Distributed Marketing using custom permissions and permission sets.

When you install Distributed Marketing, these custom permissions and permission sets are installed. You can use them to manage access to Distributed Marketing licenses and functionality. All Distributed Marketing permissions and permission sets have the mcdm_15_namespace prefix.

Permission	Description
Administrator Custom Permission	Grants access to admin functions, such as sharing content and managing organization defaults. Standard user functions are included with this permission. You can assign the Administrator custom permissions by assigning the installed DMAdministrator License or DMStandard License permission sets, or by using custom permission sets or profiles.
Standard Custom Permission	Grants access to standard user functions, such as content personalization and member approval. You can assign the Standard custom permissions

	by assigning the installed DMAdministrator License or DMStandard License permission sets, or by using custom permission sets or profiles.
DMAdministrator License Custom Permission Set	Grants users access to the Administrator custom permission and consumes one Distributed Marketing license. The DMAdministrator and DM Administrator License permission sets are typically assigned to marketers. DMAdministrator and DM Administrator License permission sets grant access to the Distributed Marketing Administration page and administrative Distributed Marketing functionality. Standard user functionality is included with this permission.
DMStandard License Custom Permission Set	Grants users access to the Standard custom permission and consumes one Distributed Marketing license. The DMStandard and DMStandard License permission sets are typically assigned to general Distributed Marketing users such as advisers, partners, or dealers. DMStandard and DMStandard License permission sets grant access to the Distributed Marketing Settings page and general Distributed Marketing functionality.
DMAdministrator Custom Permission Set	Provides access to required Distributed Marketing objects and Visualforce pages. If you create your own custom permission sets or profiles, include the appropriate Distributed Marketing objects and pages.
DMStandard Custom Permission Set	Provides access to required Distributed Marketing objects and Visualforce pages. If you create your own custom permission sets or profiles, include the appropriate Distributed Marketing objects and pages.
DMApprover Custom Permission Set	Lets users preview Distributed Marketing content, including business-user personalization, when reviewing content as part of a Distributed Marketing manual approval process. It doesn't grant access to personalize or send content through Distributed Marketing.
DM Activity Log View All	Provides View All Access to all users' Distributed Marketing Activity Logs ignoring sharing rules.
DM Auto Send	Provides access to Distributed Marketing

	AutoSend functionality.
DM Bulk Send Custom Permission Set	Provides access to Distributed Marketing bulk send functionality.
DM Segmented Send	Provides access to Distributed Marketing segmented send functionality after the Allow permission set to control Segmented Send Flow is enabled.

Remove Distributed Marketing Licenses from Users

Make Distributed Marketing licenses available for others by removing the permission sets and the permission set licenses from existing users.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To remove permission sets:	Assign Permission Sets

When assigning licenses to users, you must only assign permission sets. Permission set licenses are added automatically. However, to make the licenses available to reassign, you must remove both the permission set and the permission set license.

1. From Setup, enter *Users* in the **Quick Find** box, then select **Users**.
2. Select a user.
3. In the Permission Set Assignments related list, click **Edit Assignments**.
4. Remove the DMAdministrator License or the DMStandard License permission set.
5. Save your changes.
6. In the Permission Set License Assignments related list, click **Edit Assignments**.
7. Deselect the Distributed Marketing permission set licenses.
8. Save your changes.

Install Content Blocks

Marketing users with custom content blocks in Content Builder can enable personalization. Register blocks with your Marketing Cloud Engagement account, and then drag them into email content to create areas of collaboration for business users. To use Distributed Marketing content blocks, create a Marketing Cloud Engagement installed package for Distributed Marketing. Then, determine access and add the custom blocks you want to use.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To create and install packages:	You must have the Installed Package Administer permission. This permission is automatically applied to the Administrator and Marketing Cloud Engagement Administrator system-defined roles.

Review these topics, in the order specified, to perform the installation.

Add a Distributed Marketing Content Block Package

Follow these steps to create a Distributed Marketing Content Block package in Marketing Cloud Engagement. This package is where you can add the Distributed Marketing content blocks you want to use.

Set Content Block Permissions

You can manage who can access Distributed Marketing for Marketing Cloud Engagement content blocks.

Add a Distributed Marketing Content Block Package

Follow these steps to create a Distributed Marketing Content Block package in Marketing Cloud Engagement. This package is where you can add the Distributed Marketing content blocks you want to use.

1. In Marketing Cloud Engagement, navigate to Setup.
2. Select **Apps** under Platform Tools.
3. Select **Installed Packages**.
4. Select **New**.
5. Name the package, such as Distributed Marketing.
6. Add a description, such as Custom Content Blocks for Distributed Marketing.
7. Save your work.
8. Add these Distributed Marketing content blocks to your package:
 - a. [Distributed Marketing Image Block](#)
 - b. [Distributed Marketing Text Block](#)
 - c. [Distributed Marketing Rich Text Block](#)
 - d. [Distributed Marketing Multivariate Block](#)
 - e. [Distributed Marketing Attachment Block](#)

See Also

[Enable Email Personalization with Distributed Marketing Content Blocks](#)

Set Content Block Permissions

You can manage who can access Distributed Marketing for Marketing Cloud Engagement content blocks.

1. In Marketing Cloud Engagement, navigate to Setup.
2. Select **Apps** under Platform Tools.
3. Select **Installed Packages**.
4. Select your Distributed Marketing package. This package is the one you named in the previous section.
5. Select **Access**.
6. Select the business units that can access the DM installed package, or select License All Users to provide global access.

Use Business Units with Distributed Marketing

If you use Marketing Cloud Engagement business units to manage content by categories - like brand, line of business, or region - you can add them to Distributed Marketing to support unique groups of business users. Then, use sharing rules and campaign marketplace to manage the content that groups of sellers, partners, distributors, or agents can access. You can set up business unit access for both Distributed Marketing administrators and standard users in Salesforce Setup. Business users do not require unique Marketing Cloud Engagement logins.

Once configured, Distributed Marketing respects defined visibility for campaign sends and Quick Send. If a user is granted access to a campaign using a journey that exists in a business unit that the user doesn't have access to, the user can't view or send content from that campaign. Similarly, users can't see Quick Send messages from business units they do not have access to.

Add Business Units to Your Org

After installing the Distributed Marketing managed package, you can add up to 200 business units to your account. You can choose which users to share the business units with to control access to content. Distributed Marketing uses named principal authentication with the OAuth 2.0 protocol.

Share Business Units

Use sharing rules to manage business unit access per user, or allow all Marketing Cloud Engagement distributed marketing business users to access content from any added business unit.

Use Business Units with Content Marketplace

Create content marketplaces that display Campaigns or Quick Send messages connected to journeys from a specific business unit by including its name in the marketplace's filter criteria.

Remove Business Units

Want to clean up your business units? You can remove a business unit as long as none of its journeys are enabled as a Quick Send or in use by a campaign.

Refresh Authentication

Authenticated tokens are used to manage access to individual Marketing Cloud Engagement business units. Tokens are periodically refreshed to ensure a secure connection. If a token fails to refresh, you can manually reconnect the business unit.

See Also

[Set Up Campaign Marketplace](#)

Add Business Units to Your Org

After installing the Distributed Marketing managed package, you can add up to 200 business units to your account. You can choose which users to share the business units with to control access to content. Distributed Marketing uses named principal authentication with the OAuth 2.0 protocol.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To configure account authentication:	DMAAdministrator License permission set, Administrator permission (mcdm_15 namespace), Manage Auth Providers, Modify All Data, and Customize Application
To maintain an active integration:	Custom Application

 **Important** Authenticated calls execute in the context of the user who adds a business unit to Distributed Marketing. So any requests for new authenticated tokens run in the context of this user on behalf of all Distributed Marketing users. The authenticating user for each business unit is logged in the Execute As field on the named credential's associated Auth. Provider. This user must have the permissions outlined to maintain an active integration and must be an active user for the duration of Distributed Marketing being used. You can change this user for a specific business unit by editing the business unit's associated Auth. Provider.

A dedicated Marketing Cloud Engagement user is recommended for system authentication, is required per authenticated business unit, and needs these Marketing Cloud Engagement permissions:

Content Builder: Assets	View, Subscriber Preview
Content Builder: Folders	View
Email: Subscribers: Subscriber	Create, View, Update
Email: Subscribers: Data Extension	Create, View, Update, Delete, Manage Data
Email: Content: Email	Preview, View
Interaction Studio	Access
Journey Builder	Access, View

Note

- Distributed Marketing uses custom components.
- If you're using Financial Services Cloud, access the Distributed Marketing Business Unit Setup page directly. Navigate to Visualforce Pages in Setup, select **PostInstallPage**, and click **Preview**.

Then continue with step 5.

- Deselect **Enforce login IP Ranges on every request** for Session Settings. You can enable it again after account authentication.
- Content Builder: Assets > Subscriber Preview is only needed for customers using SMS.

1. Log out of all Marketing Cloud Engagement sessions.



Important Salesforce automatically authenticates against logged-in Marketing Cloud Engagement sessions. If you don't log out of active sessions, Salesforce can connect to the incorrect Marketing Cloud Engagement account.

2. In Salesforce, from the App Launcher, find, and open **Distributed Marketing Administration**.

3. In Business Units, select **Add Business Unit**.



Note The system redirects you from Distributed Marketing Administration to the Distributed Marketing Business Unit Setup page.

4. Follow the prompts on the Distributed Marketing Business Unit Setup page to configure your account.

5. To get the latest authentication status for connected business units, navigate to Distributed Marketing Administration, and click the **Update Connection Information** button.



Tip To change the display name for the business unit, hover over the display name, and select the pencil.



Note Don't forget to re-enable **Enforce Login IP Ranges on every request**.

Upgrade to Tenant-Specific Endpoints Authentication

To enhance the performance of the Marketing Cloud Engagement platform, tenant-specific subdomains are assigned automatically to all customers. This automatic assignment improves API performance, creates a faster experience, and is required for some Marketing Cloud Engagement data centers. You can self-update any connected business units not already using Tenant-Specific Endpoints (TSE) authentication without disrupting any existing connections. All new connections automatically use TSE authentication.

Upgrade to Tenant-Specific Endpoints Authentication

To enhance the performance of the Marketing Cloud Engagement platform, tenant-specific subdomains are assigned automatically to all customers. This automatic assignment improves API performance, creates a faster experience, and is required for some Marketing Cloud Engagement data centers. You can self-update any connected business units not already using Tenant-Specific Endpoints (TSE) authentication without disrupting any existing connections. All new connections automatically use TSE authentication.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To enable authentication for Tenant-Specific Subdomains:	DMAAdministrator license

These instructions apply only to business units added before January 2020.

1. Log out of any active Marketing Cloud Engagement sessions.
 2. In Salesforce, navigate to AppLauncher.
 3. Select **Distributed Marketing Administration**.
 4. In the Administration section, navigate to the **Critical Updates** section. Any authenticated business units using non-TSE authentication appear in the Business Units Ready to Prepare table. For example, Business_unit.
-  **Tip** If you don't see anything here, all of your business units are authenticated using the appropriate authentication method.
5. In the Business Units Ready to Prepare table, determine the business unit you want to update, and select the **Prepare Business Unit** button. The business unit is removed from the table.
 6. In the Administration section, navigate to Business Units. When the business unit is ready, it appears in the Business Units component under Administration > Business Units appended with _tse_migration. For example, Business_unit_tse_migration.
 7. In the Business Units component, click **Complete Log In** on the new business unit. Log in using your unique Marketing Cloud Engagement system user for Distributed Marketing.
 8. Navigate back to the **Business Units** section.
 9. Click the **Update Connection Information** button, and confirm the connection for the new business unit. For example, Business_unit_tse_migration.
-  **Note** Now, your new business unit is authenticated. However, all of your existing campaigns and quick send messages are accessed using the business unit that uses non-TSE authentication. Update your existing campaigns and quick send messages to use the newly authenticated business unit next.
10. In the Administration section, navigate to Critical Updates. Any business units that were authenticated using the TSE authentication created with this migration flow appear. For example, Business_unit_tse_migration.
 11. In the Business Units Ready to Upgrade table, determine the business unit to upgrade, and select the **Upgrade Business Unit** button. The business unit is removed from the table and the system upgrades all connected Campaigns and Quick Send messages to use TSE authentication. When the migration is complete, the business unit appears in the Business Units component in the Business Units section in Administration. The business unit appears without the tse_migration suffix, for example, Business_unit. The business unit authenticated using non-TSE authentication is appended with _deprecated. For example, Business_unit_deprecated.
 12. Delete the business unit authenticated with legacy authentication.

See Also

[IP Addresses for Inclusion on Allowlists in Marketing Cloud Engagement](#)

Your Subdomain and Your Tenant's Endpoints

Share Business Units

Use sharing rules to manage business unit access per user, or allow all Marketing Cloud Engagement distributed marketing business users to access content from any added business unit.

To set business unit access using any sharing model other than public read/write:



Note Make the Distributed Marketing Business Units object public read/write to allow all distributed marketing users to access any journeys from any business unit.

1. In Salesforce, navigate to **Setup**.
2. Under **Security**, select **Sharing Settings**.
3. Under **Organization-Wide Defaults**, select **Edit**.
4. For Marketing Cloud Engagement Business Unit, change **Default Internal Access** to **Private**.
5. Select **Save**.
6. Determine and implement a sharing model using Sharing Rules.
 - a. Use manual sharing to give business unit access to specific individuals or groups.
 - b. Use role hierarchy sharing to give users access to business units based on their Salesforce role.
 - c. Use criteria or owner-based sharing rules to give users access to business units based on fields on the business unit; a user's role, group, or subordinate structure; or both.
 - d. Use Apex managed sharing rules to programmatically create sharing rules that grant access to business units for both users and groups.

See Also

[Sharing Rules](#)

Use Business Units with Content Marketplace

Create content marketplaces that display Campaigns or Quick Send messages connected to journeys from a specific business unit by including its name in the marketplace's filter criteria.

1. Add at least one Marketing Cloud Engagement business unit to your org.
2. Create a list view for Campaigns or Quick Send messages.
3. Under the Setup Cog, select **Edit List Filters**.
4. Select **Add Filter**.
5. Select **Linked Business Unit**.
6. Select an operator and type in the display name of the business unit.
7. Select **Done**.

See Also

[Set Up Campaign Marketplace](#)

[Add Business Units to Your Org](#)

Remove Business Units

Want to clean up your business units? You can remove a business unit as long as none of its journeys are enabled as a Quick Send or in use by a campaign.

To remove a business unit:

1. In Salesforce, navigate to **Distributed Marketing Administration**.
2. Navigate to the **Business Unit** section.
3. Under **Business Units**, locate the business unit you want to delete.
4. Click the dropdown on the right side of the row, and choose **Delete**.
5. When prompted, click **Delete**.



Note If the business unit is successfully deleted, you get a success notification. Otherwise, you get a notification explaining why the business unit can't be deleted.



Note You can create reports that show which campaigns or Quick Send messages are connected to business units. Create a report on the Campaign or Quick Send Message object, and define a filter where field Linked Business Unit isn't equal to NULL. Then add other fields like Message Name or Campaign Name to help provide context. To enable reporting on the Quick Send Message object, edit the object in Object Manager, and then enable Allow Reports.

Refresh Authentication

Authenticated tokens are used to manage access to individual Marketing Cloud Engagement business units. Tokens are periodically refreshed to ensure a secure connection. If a token fails to refresh, you can manually reconnect the business unit.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To refresh authentication:	DMAdministrator License permission set, Administrator permission (mcdm_15 namespace), Manage Auth Providers, Modify All Data, and Customize Application

Tokens don't typically fail to refresh with normal use, but they can fail if an authenticated call isn't made for 30 days or more. Authenticated calls are made during any action in Distributed Marketing that pulls back information from the Marketing Cloud Engagement business unit. For example, selecting a Quick Send message to send. If a business unit becomes disconnected, you see an error on screen indicating that there's a problem with your Marketing Cloud Engagement authentication.

To reconnect the business unit:

1. Log out of all Marketing Cloud Engagement sessions.

2. In Salesforce, from the App Launcher, find and open **Distributed Marketing Administration**.
3. In the Business Units section, select **Update Connection Information**. The system checks the status of all added business units. If a business unit isn't authenticated, the system displays Complete Log In in the Connection Status column.



Note This update reports the status of the business unit connections and doesn't change the business units connections.

4. Select **Complete Log In**. The system opens the associated named credential record.
5. Select **Edit**.
6. Ensure that Start Authentication Flow on Save is enabled.
7. Save your work. The system prompts you to log into Marketing Cloud Engagement.
8. Log into Marketing Cloud Engagement using your unique system user.
9. To verify authentication status, navigate to Distributed Marketing Administration, and click **Update Connection information**.

Distributed Marketing Setup

Distributed Marketing uses Marketing Cloud Engagement journeys and Salesforce campaigns inside the Sales, Service, Financial Services, and Experience Clouds. After installing the managed package and configuring authentication, set up Distributed Marketing by creating an entry event data extension, profile attributes, content, sender profile, and journey. Then customize the Campaign page layout for Distributed Marketing.

1. Set Up Email Sends

Users can send pre-approved or customized email messages through Distributed Marketing. Email messages are created using Content Builder and sent through Journey Builder using the Email activity.

2. Set Up SMS Sends

Users can send preapproved or fully custom SMS messages through Marketing Cloud Engagement Distributed Marketing. SMS messages are sent through Journey Builder using the Mobile Connect SMS activity. The Mobile Messaging Product Special Terms (PST) apply to SMS messages sent through Distributed Marketing.

3. Set Up Journeys for Distributed Marketing

All messages in Distributed Marketing are sent using Marketing Cloud Engagement's Journey Builder. Create single-message journeys to provide business users individual assets such as birthday emails, knowledge articles, or world event updates. Or create multi-message journeys to empower users with more involved engagements such as welcome series, drip campaigns, or event outreach campaigns. You create a unique journey for each asset or multi-step engagement, then share the journey with business users using Distributed Marketing's Campaign or Quick Send Workflows.

4. Set Up Content Marketplaces

Content Marketplaces provide structure and guidance to help business users quickly and visually navigate the assets available for them to use. Create multiple marketplaces to showcase collections of assets grouped how your users think, such as Recommended, High ROI, and more. List views of Campaign or Quick Send message records power marketplaces, so setup and management is a breeze.

5. Campaign Messages

Campaign messages let your business users send single or multi-touch engagements to Contacts, Leads, and Person Accounts at scale from the Salesforce Campaign object.

6. **Quick Send Messages**

Quick Send messages enable your business users to rapidly send a single, personalized Marketing Cloud Engagement email or SMS message to contacts, leads, and person accounts from throughout the Salesforce platform.

7. **Use Distributed Marketing to Organize Content with Topics**

Assign one or more topics to each Quick Send to create content lists that you can easily search and manage.

8. **Use Distributed Marketing with Tokenized Sending**

Keep these considerations in mind when you use Distributed Marketing with Marketing Cloud Engagement accounts that use tokenized sending.

9. **Use Distributed Marketing with Field Level Encryption**

Keep these considerations and limitations in mind when you use Distributed Marketing with Marketing Cloud Engagement accounts that use Field Level Encryption.

Set Up Email Sends

Users can send pre-approved or customized email messages through Distributed Marketing. Email messages are created using Content Builder and sent through Journey Builder using the Email activity.

Considerations:

- By default, messages are sent to the standard CRM email field: Email. You can modify the field using custom development.
- By default, messages can be sent from the running user or the record owner. You can modify the send from information in Distributed Marketing Administration or custom development.
- Message personalization is enabled through Distributed Marketing Content Blocks.

To enable Emails Sends in Distributed Marketing, follow these steps:

1. Create a journey using the Email message activity.
2. Enable the journey in a Campaign Send or Quick Send workflow.

Create a Distributed Marketing Sender Profile

Create a sender profile in Marketing Cloud Engagement to control who emails are sent from. By default, Distributed Marketing messages are sent on behalf of the running, or logged in, user. To allow people to send on behalf of other team members, use custom Distributed Marketing personalization interactions and update this sender profile to reference that data.

Create Profile Attribute Mappings

When you use Distributed Marketing content blocks, users can automatically customize emails and preview those modifications within their editing experience. If you also use the additional data included in Distributed Marketing sends for email personalization, you must include that data as a profile attribute to preview content. For example, add 'greeting' as a profile attribute to allow your users to modify how they address email recipients, and preview those modifications.

Manage Replies to Distributed Marketing Emails

Most messages sent through Distributed Marketing don't warrant a reply from the recipient or have specific calls to action embedded in the message. But sometimes recipients reply to messages sent through Distributed Marketing. Review the following information to understand how Distributed Marketing works with reply mail management and Sender Authentication Packages (SAP).

See Also

[Campaign Messages](#)

[Quick Send Messages](#)

[Enable Email Personalization with Distributed Marketing Content Blocks](#)

[Enhance Distributed Marketing](#)

[Manage Settings](#)

Create a Distributed Marketing Sender Profile

Create a sender profile in Marketing Cloud Engagement to control who emails are sent from. By default, Distributed Marketing messages are sent on behalf of the running, or logged in, user. To allow people to send on behalf of other team members, use custom Distributed Marketing personalization interactions and update this sender profile to reference that data.



Note Marketing Cloud Engagement requires that all email addresses used as the From Email Address for sends are verified. The From Email Address is populated with the email address initiating the send in Distributed Marketing by default.

1. In Email Studio, navigate to **Email**.
2. Click **Admin**.
3. Under Send Management, click **Sender Profiles**.
4. Create a sender profile.
5. Under Sender Information, select **Use the specified information:** and enter the following.
 - a. From Name: `%%sendFromName%%`
 - b. From Email: `%%sendFromEmail%%`

See Also

[Add Custom Personalization Interactions](#)

[Sender Profile](#)

[Domain Verification for Marketing Cloud Engagement Email](#)

Create Profile Attribute Mappings

When you use Distributed Marketing content blocks, users can automatically customize emails and preview those modifications within their editing experience. If you also use the additional data included in Distributed Marketing sends for email personalization, you must include that data as a profile attribute to preview content. For example, add 'greeting' as a profile attribute to allow your users to modify how they address email recipients, and preview those modifications.

-  **Note** You can only add attributes in the parent business unit. If you use legacy personalization, create profile attributes for each of the personalization options.

To create a Profile Map:

1. In Email Studio, navigate to **Email**.
2. In Subscribers, click **Profile Management**.
3. Create an attribute for the field used in email message content.

-  **Tip** If you don't provide a value for the field, we display Lorem Ipsum. The value can be modified in the Data tab of the field's profile attribute. You can modify the number of characters displayed, or provide a default value.

-  **Note** Be sure to add all the profile attribute fields that you have. Use the same field names that are in the entry source data extension. Field names are case-sensitive. For example, if you have a data extension field called FirstName, add a profile attribute field called FirstName.

See Also

[Create Entry Event Data Extension](#)

Manage Replies to Distributed Marketing Emails

Most messages sent through Distributed Marketing don't warrant a reply from the recipient or have specific calls to action embedded in the message. But sometimes recipients reply to messages sent through Distributed Marketing. Review the following information to understand how Distributed Marketing works with reply mail management and Sender Authentication Packages (SAP).

Reply Mail Management

Reply Mail Management (RMM) helps reduce noise from automated customer responses like suppressed out-of-office replies. RMM helps streamline repeated responses like processing in-line unsubscribe requests.

-  **Tip** Dynamic Reply-To allows you to dynamically control the Reply Name for sends, but the From email address is still the RMM domain and the configuration applies to the entire business unit. This isn't recommended if you're using the same Business Unit for both Distributed Marketing and non-Distributed Marketing sends.

Often, these features aren't as beneficial for Distributed Marketing sends because business users prefer to process these types of responses themselves. Also, business users typically prefer that the From and Reply Names look like they come from them.

Instead of using RMM with Distributed Marketing, consider bypassing RMM for these sends to make a more logical flow for the sender and receiver.

For customers using a Sender Authentication Package (SAP), you must use a Private Domain for your

standard corporate domain.

 **Important** Domain Verification is now enforced on all accounts. This enforcement means that all domains, including domains used for Distributed Marketing sends, must be verified to send.

Use the suggested Distributed Marketing sender profile configuration and disable RMM for this profile to make emails look like they're sent from the actual user. For example, user@cumulusfinancial.com.

 **Note** This action allows recipients to reply back to the sender directly if necessary, like a traditional email. However, subsequent responses aren't tracked in Salesforce by Distributed Marketing.

 **Example** Cumulus Financial set up an RMM domain: NoReply@e.cumulusfinancial.com. Cumulus wants sends from their financial advisors to come from user@cumulusfinancial.com. This email address isn't the RMM domain. With RMM enabled, Cumulus can define a dynamic reply to, which would define the Reply To as user@cumulusfinancial.com, but the Send From name would still be from NoReply@e.cumulusfinancial.com. By disabling RMM and using the suggested Distributed Marketing sender profile, the send from and reply to names would be user@cumulusfinancial.com.

Set Up SMS Sends

Users can send preapproved or fully custom SMS messages through Marketing Cloud Engagement Distributed Marketing. SMS messages are sent through Journey Builder using the Mobile Connect SMS activity. The Mobile Messaging Product Special Terms (PST) apply to SMS messages sent through Distributed Marketing.

Considerations:

- By default, messages are sent to the standard CRM phone field: Phone. You can modify this field when configuring Quick Send or Campaign workflows.
 -  **Note** If you use Experience Cloud to set up SMS sends for Campaigns, the Phone field must be configured on the MCDM Pending Submissions component. For setup not in Experience Cloud, set up the Phone field on the MCDM Campaign Messages component.
- MobileConnect.manages opt-ins. Recipients must be opted in before receiving SMS messages through Distributed Marketing.
- Phone numbers must include the country code.
- Engagement tracking for SMS messages sent isn't available in CRM by Distributed Marketing or Marketing Cloud Connect today. But a log of SMS messages sent is available when sent using the Quick Send from Opportunity and Quick Send from Case workflows.
- Distributed Marketing doesn't surface blackout windows to users. If a user attempts a sending during a blackout window, the message isn't sent.
- Distributed Marketing is optimized for GSM characters only. Distributed Marketing doesn't programmatically prevent users from entering or sending non-GSM characters. But the maximum character count doesn't automatically update to reflect new character limits per message. If a user includes non-GSM characters, up to three messages can be sent.

- Custom SMS messages are enabled using AMPscript.

To enable SMS Sends in Distributed Marketing, follow these steps:

1. Create a journey using the SMS message activity. In Journey Delivery Options, select **Send only to contacts who are subscribed currently** or, for Campaigns, you can select **Subscribe all contacts**. The Subscribe all contacts isn't currently supported for Quick Sends.
2. Ensure that the journey's [event data extension](#) includes the following fields:

Column Name	Data Type	Length	Primary Key	Required	Notes
smsValue	Text	160	No	No	Include it to support custom SMS messages. Set it up as a profile attribute if it's referenced in AMPscript.
mobilePhone	Phone	50	No	No	Set it up as a profile attribute if it's referenced in AMPscript.

3. Enable the journey in a Campaign Send or Quick Send workflow.

See Also

[Campaign Messages](#)

[Quick Send Messages](#)

[Enable Custom SMS Messages](#)

Set Up Journeys for Distributed Marketing

All messages in Distributed Marketing are sent using Marketing Cloud Engagement's Journey Builder. Create single-message journeys to provide business users individual assets such as birthday emails, knowledge articles, or world event updates. Or create multi-message journeys to empower users with more involved engagements such as welcome series, drip campaigns, or event outreach campaigns. You create a unique journey for each asset or multi-step engagement, then share the journey with business users using Distributed Marketing's Campaign or Quick Send Workflows.



Important When creating a child campaign from a parent campaign, the child inherits the connected journey of the parent. The parent's connected journey can't be modified, even if the child is reconnected to another parent.

1. In Marketing Cloud Engagement, navigate to **Journey Builder**.
2. Create a journey.
3. Drag **API Event** entry source onto the journey canvas.



Note You can also use a data extension entry source, but the recommendation is to use an API entry source.

4. Configure the entry source with the unique event data extension you created for this marketing activity.



Important

- To avoid adding campaign members to multiple journeys at the same time, use a unique entry source per journey.
- A contact filter isn't required for Distributed Marketing, but use it as needed for more audience management.

5. To create your journey, drag journey activities onto the canvas.



Note Distributed Marketing allows users to view and send **Send Email** and **Send SMS** activities, and personalize Send Email activities. You can use other activity types on your journey, but users can't view or personalize these activities within other Salesforce clouds.

6. Configure the activity with the content and sender profile you created for Distributed Marketing setup.
7. Define the contact entry mode.
8. Name the journey and add a description.
9. Activate the journey.

Create Entry Event Data Extension

Create a standard, sendable data extension that captures information from the approved contacts that you use for journey messaging. For example, capture the sender email address and ID.

Journeys for Campaign Sends

To create a unique journey for marketing activities when using the Distributed Marketing Campaign Send workflow in Marketing Cloud Engagement, follow these steps.

Journeys for Quick Send Messages

To create a unique journey for marketing activities when using the Distributed Marketing Quick Send workflow in Marketing Cloud Engagement, follow these steps

See Also

[Set Up Campaign Marketplace](#)

[Allow Users to Create Campaign Hierarchies](#)

Create Entry Event Data Extension

Create a standard, sendable data extension that captures information from the approved contacts that you use for journey messaging. For example, capture the sender email address and ID.

1. In Marketing Cloud Engagement, navigate to **Audience Builder**.
2. Click **Contact Builder**.
3. Click **Data Extensions**.

4. To create a data extension in your folder structure, click **Create**.



Important Ensure that the data extension is standard, sendable, and the send relationship relates the ID to Subscribers on Subscriber Key.



Tip

- After you create this data extension for the first time, select Create from Existing to save time when creating journeys.
- If you're using [tokenized sending](#) or [field level encryption](#), review configuration considerations.

5. Include these fields in the data extension.

Column Name	Placeholder Text	Data Type	Length default = 50	Primary Key	Required	Notes
greeting	[Full Name]	Text	> 0		No	Picklist of fields on contact or lead object
id		Text	≥ 18		Yes	Id relates to Subscribers on Subscriber Key.
email		EmailAddresses	254		Yes, if sending email messages. Otherwise, No	Email address of contact or lead (standard field) Not configurable in profile attributes.
sfCampaignId	[Campaign Id]	Text	≥ 18		No	ID of linked campaign
sfCampaignMemberId	[Campaign Member Id]	Text	≥ 18		No	ID of injected campaign member
sfQuickSendId		Text	≥ 18		No	ID of quick send record

Column Name	Placeholder Text	Data Type	Length default = 50	Primary Key	Required	Notes
sendFromName	[From Name]	Text	> 0		No	Name of account owner for DM sender profile
sendFromEmail	[From Email]	Text	> 0		No	Email of account owner for DM sender profile
firstName	[First Name]	Text	> 0		No	First name of recipient
lastName	[Last Name]	Text	> 0		No	Last name of recipient
sfUserId	[Your User Id]	Text	≥ 18		Yes	ID of the user initiating the send. Usually the running user, but could be different if the user who prepares a bulk send isn't the user who starts the send. Learn more.
journeyID		Text	50		Yes	ID of journey that associates a journey to its personalization data

Column Name	Placeholder Text	Data Type	Length default = 50	Primary Key	Required	Notes
						extension
sfOrgId		Text	50		Yes	ID of the corresponding Salesforce Org in which the campaign member resides
smsValue		Text	< 160	No	No	To support custom SMS messages Learn more.
mobilePhone	[Mobile Phone]	Phone	50	No	Yes, if sending SMS messages. Otherwise, No	mobilePhone must be set up as a profile attribute if it's referenced in AMPscript.
EntryObjectId		Text	≥ 18	No	No	ID of Case or Opportunity the Quick Send was initiated from.



Tip You can't set a required field as nullable.



Note If you create a complex AMPscript to build out your email content in Content Builder, users can get an error message when they try to switch between preview and edit modes in Distributed Marketing. To avoid an error, account for the standard placeholders.

- If you enhance the Distributed Marketing payload with more data by [extending the entry source data](#) or [creating a custom personalization interaction](#), add the new fields to the data extension.

Journeys for Campaign Sends

To create a unique journey for marketing activities when using the Distributed Marketing Campaign Send workflow in Marketing Cloud Engagement, follow these steps.

When you create journeys for Quick Sends, consider the following.

- Journeys created for campaign sends can include any number of standard or custom activities. However, Distributed Marketing only shows business users email and SMS activities.
 - A single journey can be connected to multiple CRM campaigns, but a campaign can only be connected to a single journey at once. For example, give individual users access to their Welcome Series campaign, but power all the campaigns with the same journey to help scale marketing's efforts. Use campaign hierarchy to allow child campaigns to automatically use the connect journey of the parent account.
 - To avoid adding individuals to multiple journeys at the same time, use a unique entry source per journey.
 - A contact filter isn't required for Distributed Marketing, but can be used as needed.
 - Any contact entry setting can be used for Campaign Sends, but we suggest allowing re-entry always or after exiting for most use cases.
1. In Marketing Cloud Engagement, navigate to **Journey Builder**.
 2. Create a Multi-Step Journey.
 3. Drag an **API Event** entry source onto the journey canvas.
 4. Configure the entry source with the unique event data extension you created for this journey.
 5. Drag journey activities onto the canvas.
 -  **Tip** The **Activity Name** is displayed to users in various places, including the **Campaign Messages** component sorted alphanumerically. If you use flow control splits, consider using a naming convention to group message options. For example, 2a. Email Follow-up and 2b. SMS Follow-up, to help users understand that recipients receive an email or SMS message as a follow-up message.
 6. Define the contact entry mode.
 -  **Tip** To allow business users to add an individual to the journey only once, select **No re-entry**. To allow business users to add an individual to the journey multiple times, select **Re-entry anytime** or **No re-entry after exiting**. Regardless of the contact entry mode in Journey Builder, contacts and leads can be added to a campaign only once.
 7. Name the journey and add a description.
 8. Activate the journey. The journey can now be connected to a campaign.

Campaign Inheritance and Distributed Marketing

Use campaign hierarchies to manage content distribution when multiple individuals must use the same general marketing activity. For example, use a Welcome drip campaign instead of giving everyone access to the same campaign record.

Campaign Inheritance and Distributed Marketing

Use campaign hierarchies to manage content distribution when multiple individuals must use the same general marketing activity. For example, use a Welcome drip campaign instead of giving everyone access to the same campaign record.

For most use cases, you create a parent campaign for each unique marketing activity owned and managed by corporate marketing. You also create a unique child campaign owned and managed by individual business users.

For example, a retail bank creates a parent campaign for Open Checking Account. This campaign is owned and managed by a corporate marketing team. Each financial advisor receives their own child campaign to add individuals from their book of business.

When you use campaign hierarchies and Distributed Marketing, the child campaign automatically inherits the connected journey of the parent campaign. Consider these examples when using campaign inheritance with Distributed Marketing and the rules for each scenario.



Example You connect a campaign to a journey and assign it as a parent to a child campaign. No campaign members are added to the campaign yet.

- The child campaign inherits the connected journey.
- You can't connect the parent campaign to a different journey.



Example A child campaign is connected to a journey through a parent campaign. No campaign members are added to the child campaign yet. You have administrator permissions and update the child campaign reference to a different parent campaign.

- The child campaign remains connected to the original journey.
- You can't modify the parent campaign's existing journey connection or add a journey.



Important We don't recommend updating a child campaign to connect to a different parent campaign. Changing the parent campaign creates a disconnect between the journeys associated with the child and parent campaigns.



Example You connect a child campaign or a parent campaign to a journey and add campaign members.

- You can't connect the parent campaign to a different journey.
- You can't connect the child campaign to a different journey.

Journeys for Quick Send Messages

To create a unique journey for marketing activities when using the Distributed Marketing Quick Send workflow in Marketing Cloud Engagement, follow these steps

When you create journeys for Quick Sends, consider the following.

- Journeys created for quick sends can include any number of standard or custom Flow Control, Customer Updates, Sales & Service Cloud, or Custom activities. However, each journey for quick sends can include at most one email or SMS activity only.
 - To avoid adding individuals to multiple journeys at the same time, use a unique entry source per journey.
 - A contact filter isn't required for Distributed Marketing, but can be used as needed.
 - The contact entry setting must allow for Re-entry always or Re-entry after exiting. No re-entry isn't supported for quick send messages.
 - Journeys enabled as quick send messages are available in all quick send messages that business users can access.
1. In Marketing Cloud Engagement, navigate to **Journey Builder**.
 2. Create a Multi-Step Journey.
 3. Drag an **API Event** entry source onto the journey canvas.
 4. Configure the entry source with the unique event data extension you created for this journey.
 5. Drag journey activities onto the canvas.
 -  **Tip** A single **Email** or **SMS** activity is required. Use non-message activities to make quick send messages more powerful for recipients, senders, and the business. For example, add an Engagement Split activity to a quick send journey. If a contact doesn't open the email, use the Task activity to suggest business users follow up with a phone call. Or they can resend the email.
 6. Define the contact entry mode.
 -  **Tip** **Re-entry anytime** or **Re-entry only after existing** is required.
 7. Name the journey and add a description.
 -  **Tip** The journey name appears to business users when searching for a message to send. Put uniquely identifiable information for each message in the first 30 characters. For example, use Birthday Template - Summer 2020 instead of Summer 2020 Birthday Template.
 8. Activate the journey. The journey can now be enabled as a Quick Send message.

Set Up Content Marketplaces

Content Marketplaces provide structure and guidance to help business users quickly and visually navigate the assets available for them to use. Create multiple marketplaces to showcase collections of assets grouped how your users think, such as Recommended, High ROI, and more. List views of Campaign or Quick Send message records power marketplaces, so setup and management is a breeze.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To create and save Lightning pages in the Lightning App Builder:	Customize Application

Considerations:

- Each marketplace visualizes a single list view, sorted by created date oldest to newest. Quick Send messages and campaigns are separate components, but they can be displayed together using standard lightning layouts, such as Tabs.
- Because list views power marketplaces, users can see only the records for which they have permissions to access.
- Each tile card shows the image associated with the Campaign or Quick Send (optional), Title, and Description. The image is based on fields selected by the admin user.
- Each marketplace optionally displays up to 9 card tiles at a time. Users can page through to see more.
- Marketplaces can show an image. Images are added to individual Campaigns or Quick Send messages using the MCDM Image Upload component.
- You can't select the campaignId as the Name field when you create the marketplace.

To create a content marketplace:

1. Create a Campaign or Quick Send list view.
2. When the list view is ready, add it to a Content Marketplace.
 - a. In Lightning App Builder, find the page you want to add the marketplace to, and click **Edit**. For example, modify the Home page.
 - b. Drag the marketplace onto the page.
 - c. To configure the marketplace, choose the list view you want from the List View Name field.
 - d. Choose the fields to display in the Title and Body or use the default values, and optionally choose to display an image.
 - e. Optionally define component visibility.
 - f. Click **Save**. The marketplace is now available for your business users who can access those assets.



Example Create a custom home page for your users. Drag and drop the standard Tabs component onto the page, and create the tabs you want. For example, create a tab called New that uses a list view that displays Quick Send messages created in the past month by adding a filter where Created Date equals Last 30 Days.

Set Up Images for Content Marketplaces

Add images to content marketplace tiles to help business users visually identify assets. An image can be added to individual campaign or quick send message records. If no image is added, marketplaces with images enabled display a default image. To allow users to add images for content marketplaces, follow these instructions.

See Also

[Relative Date Filter Reference](#)

Set Up Images for Content Marketplaces

Add images to content marketplace tiles to help business users visually identify assets. An image can be added to individual campaign or quick send message records. If no image is added, marketplaces with images enabled display a default image. To allow users to add images for content marketplaces, follow

these instructions.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To create and save Lightning pages in the Lightning App Builder:	Customize Application

1. In Salesforce, navigate to Setup.
2. In Salesforce Setup, type *Lightning App Builder* in the Quick Find box, and click **Lightning App Builder**.
3. Edit the Campaign or Quick Send message record page layout used for Distributed Marketing users.
4. Drag the MCDM Image Upload component onto the page layout.
5. Click Save.
6. Activate the page.
7. On a Campaign or Quick Send message record, upload an image.



Tip The image height is locked to 130 px high and scales accordingly.

If unable to view images after following these steps, ensure that images are enabled within the Content Marketplace settings in Lightning App Builder.

Campaign Messages

Campaign messages let your business users send single or multi-touch engagements to Contacts, Leads, and Person Accounts at scale from the Salesforce Campaign object.

There are two types of Campaign Send workflows:

- **Segmented Send:** Users can personalize and send messages to smaller groups (segments) of their entire target audience. Segments can contain up to 500 recipients.
- **Bulk Send:** Users can personalize and send messages to up to 25,000 recipients at once with more limited personalization options.

One workflow typically makes more sense than the other based on the use case and type of content the user wants to send. However, you can use the two workflows together. For example, use the Segmented Send workflow first to make targeted personalizations to specific individuals or groups of individuals. Then use the Bulk Send workflow to target the rest of the audience. Recipients can't be included in a Bulk Send and Segmented Send at the same time.

Not all features are available in both workflows, so use this information to determine which workflow is right for your organization.

Segmented Send	Bulk Send	Segmented Send and Bulk Send
This workflow offers more control and flexibility for audience and content manipulation. For example, use Segmented Send to send individual or group personalization messages, sometimes called profile-based personalization. In this case, use data filters to segment the target audience, and then modify messages for that segment Segmented Sends work well when there are nuances to the type of messages certain individuals receive. Segmented Sends also work well when the user adding individuals to the campaign isn't the same user who sends the campaign. For example, another team member creates the audience for you to review, or corporate marketing pre-loads the campaign with suggested recipients based on business logic or automation. With this workflow, users can opt recipients out of messaging without removing them from the campaign.	This workflow offers a more efficient way to get messages out to your book of business, but less flexibility in audience and content manipulation. Users can modify content for the entire audience. Users can also review the entire audience before sending, but can't personalize for individuals or groups. For example, use Bulk Send when the user has a target audience of more than 1,000 and the content doesn't require granular modifications such as an event invitation.	You can use both workflows together. For example, use both options when your audiences consist of high-touch and standard clients and where the general content is sent to all clients, but your high-touch clients require more specific personalization.

Scale considerations:

Segmented Send	Bulk Send	Segmented Send and Bulk Send
If you're sending more than 5,000 segmented messages per		Consider scale for Segmented and Bulk Sends together when

Segmented Send	Bulk Send	Segmented Send and Bulk Send
day, consider using bulk send. We recommend using no more than 20 personalization attributes across all campaign messages.		using both workflows in a single campaign.

Example use cases for Segmented Sends, Bulk Sends, and using both together.

Segmented Send Use Cases	Bulk Send Use Case	Segmented Send and Bulk Send Use Case
Monthly Newsletter with VIP Webinar: A Cumulus financial advisor wants to send the monthly newsletter to 300 clients. Later that month, Cumulus is hosting a webinar for households with more than \$1 million under management. Cumulus has a custom contact field that categorizes clients as standard, high-touch, or lighthouse clients based on assets under management (AUM). Also, Cumulus shows the AUM to advisors. The advisor wants to provide the webinar information to 50 lighthouse clients and not the other 250 clients. Rather than sending two newsletters, the advisor can use the segmented send workflow to filter 300 clients down to the 50 lighthouse clients and make the webinar-specific personalization. And then the advisor can modify the newsletter for the remaining 250 clients.	Simple Holiday Card: A Cumulus financial advisor wants to send a holiday card to 2,000 clients. The advisor decides that a simple thinking of you note is enough for all clients. The advisor can type one message for all 2,000 clients. Cumulus uses campaigns to manage this workflow to tie this activity to ROI (Campaign Influence). If ROI isn't important, or if the total audience was less than 25,000, the advisor can also use Quick Sends to do the same send.	High-Volume Newsletter with VIP Webinar: A Cumulus financial advisor wants to send a monthly newsletter to 5,000 clients. Later that month, Cumulus is hosting a webinar for households with more than \$1 million (US dollars) under management. Cumulus has a custom contact field that categorizes clients as standard, high, or lighthouse clients based on AUM. Also, Cumulus shows the AUM to advisors. The advisor wants to provide the webinar information to 50 lighthouse clients and not the other 4,050 clients. The 4,050 remaining clients can be targeted using the segmented send workflow. However, using the bulk send workflow would be more efficient because it involves clicking send one time versus nine times using segmented sends.

Segmented Send Use Cases	Bulk Send Use Case	Segmented Send and Bulk Send Use Case
Cross-Team Sending: The Cumulus marketing team uses AI to pre-populate campaigns for advisors based on custom business logic. A Cumulus financial advisor prepares to send a market update email to 200 suggested clients. The advisor can review the suggested clients and optionally opt certain recipients out of receiving the message.		

Use this table to determine which channels work with Segmented and Bulk Sends.

Channel	Segmented Send Use Cases	Bulk Send Use Case
Email	Yes	Yes
SMS	Yes, limit one custom SMS per campaign	Yes, limit one custom SMS per campaign
Custom	No	No

Use this table to determine which features work with Segmented and Bulk Sends.

Feature	Segmented Send	Bulk Send
Sending: Send to Campaign Members	Yes, maximum 500 at once. You can limit the total number of messages sent using the Message Cap defined in Distributed Marketing Administration.	Yes, maximum 25,000 at once. You can limit the total number of messages sent using the Message Cap defined in Distributed Marketing Administration.
Sending: Send from {X} Distributed Marketing supports sending from record owner and running user.	Yes	Yes

Feature	Segmented Send	Bulk Send
Sending: Schedule sends Scale considerations: - Don't schedule more than a single Bulk Send for the same time. - Don't schedule more than 50 unique Segmented Sends for the same time. - Don't schedule Segmented and Bulk Sends for the same time.	Yes, if manual approvals are disabled. If you're a single user, don't schedule more than 50 unique Segmented Sends for the same time. Also, don't schedule Segmented and Bulk Sends for the same time.	Yes, if manual approvals are disabled. If you're a single user, don't schedule more than a single Bulk Send for the same time. Also, don't schedule Segmented and Bulk Sends for the same time.
Message Personalization: Per-individual modifications Example: Select a single campaign member and modify the email.	Yes	No
Message Personalization: Per-group modifications Example: From 100 campaign members, select 5, and modify the email for the selected 5.	Yes	No
Message Personalization: Per batch modifications Example: Select all campaign members, and modify the email for all selected members.	Yes The Submission Cap defined in Distributed Marketing Administration can limit the maximum selectable members (batch size).	Yes
Message Personalization: Default modifications	Yes, through Campaign defaults.	Yes, through Campaign defaults.
Compliance & Approvals: Manual Approvals	Yes, if scheduled sends are disabled.	No, messages are sent regardless of approval setting.

Feature	Segmented Send	Bulk Send
Scale consideration: Each message must be approved individually. If approvals are required, campaigns with more than 5 messages can become operationally unusable.		
Compliance & Approvals: Restricted Words	Yes	Yes
Compliance & Approvals: Submission Cap	Yes	No
Compliance & Approvals: Message Cap	Yes	Yes
Extend Distributed Marketing: Custom Personalization Interaction	Yes	No
Extend Distributed Marketing: Extend Entry Source Data	Yes	Yes

After a Campaign Send, you can view these Campaign Send Statistics.

- Submitted: The number of members to whom the campaign was sent
- Rejected: In a Segmented Send, the number of members for whom the campaign wasn't sent based on the user choosing the Reject option
- Failed: The number of Submitted members who weren't injected into the journey for any reason
- Waiting: The number of members for which no action's been taken yet. In a Segmented Send, their status is Pending

[Set Up Campaign Messages](#)

Customize your Campaigns page layout for Distributed Marketing to include the Distributed Marketing MCDM Campaign Messages component. This component provides access to review Marketing Cloud Engagement messages within the connected journey, preview content, send messages, and more. Think of the Campaign Messages component as a Distributed Marketing campaign's home base for campaign sends.

[Enable Journeys for Campaign Send](#)

To share single or multistep journeys, connect a Salesforce campaign to a Marketing Cloud Engagement Journey. This connection exposes marketing content to your owners, partners, and sellers for personalization in Distributed Marketing.

[Change Journey Connected to a Campaign](#)

Before or after campaign members are added to a campaign or a child campaign is created, you can change the journey connected to the campaign through Distributed Marketing. After saving, an

association between a campaign and a journey is required.

Set Up Collaborative Campaigns (Auto Send)

Coordinate with your business users to plan your campaign launch at a specified date and time. With the proper permission set, you can set up an Auto Send for a Campaign. At the selected date and time, all campaign members not yet sent to and not part of a scheduled or bulk send are added to the Auto Send campaign journey. Your business users can add up to 25,000 members for an Auto Send campaign. If more than one campaign is scheduled by the same person for the same time and date, your business users can still send to a total of 25,000 members.

See Also

[Sender Profile](#)

[Guided Setup: Distributed Marketing for Experience Cloud](#)

Set Up Campaign Messages

Customize your Campaigns page layout for Distributed Marketing to include the Distributed Marketing MCDM Campaign Messages component. This component provides access to review Marketing Cloud Engagement messages within the connected journey, preview content, send messages, and more. Think of the Campaign Messages component as a Distributed Marketing campaign's home base for campaign sends.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To create, edit, and delete page layouts:	Customize Application

 **Note** All users with the DM Standard permission set and licenses are able to perform a Segmented Send. To allow your users to perform a Bulk Send, assign the DM Bulk Send permission set.

1. In Salesforce, navigate to **Setup**.
2. Enter *Lightning App Builder* in Quick Find, and click **Lightning App Builder**.

 **Note** Distributed Marketing installs a sample record page: ConnectedCampaign. To use that default Distributed Marketing record page for campaigns, click **View** on the ConnectedCampaign Lightning page, and begin with step 13. Otherwise, continue to the next step to create a custom layout.

3. Click **New**.
4. Click **Record Page**.
5. Click **Next**.
6. Create a Label, for example *Distributed_Marketing_Campaign*.
7. Select **Campaign** as the Object.
8. Click **Next**.
9. Click **Choose Page Template** or **Clone Salesforce Default Page**.
10. Click **Finish**.

11. Drag the **MCDM Campaign Messages** component onto the page.
12. Save.
13. Click **Activation**.
14. Assign a default page setting.
15. To return to Setup, click .

Enable Journeys for Campaign Send

To share single or multistep journeys, connect a Salesforce campaign to a Marketing Cloud Engagement Journey. This connection exposes marketing content to your owners, partners, and sellers for personalization in Distributed Marketing.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To connect campaigns:	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace)

1. In Salesforce, navigate to the campaign to connect.
2. Select **Connect Campaign** in the Campaign Messages component.
3. Search for and select a Marketing Cloud Engagement business unit.
4. Search for and select an active Marketing Cloud Engagement journey from the selected business unit.



Note

- Search results are based on journey name and description.
- You can connect journeys to campaigns before you add campaign members and before you create child campaigns. You can't remove journeys from campaigns after they're connected.



Tip To select a journey from a different business unit, remove the selected journey. Then, search for and select a new business unit and the new journey.

5. Save.

The journey is connected. Send Email and Send SMS activities on the connected journey populate the Campaign Messages component.

See Also

[Graded Browser Support](#)

[Installing AppExchange Packages](#)

Change Journey Connected to a Campaign

Before or after campaign members are added to a campaign or a child campaign is created, you can change the journey connected to the campaign through Distributed Marketing. After saving, an association between a campaign and a journey is required.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To change the connected journey:	DMAdministrator License permission set and Administrator permission (mcdm_15 namespace)
----------------------------------	---

1. In Salesforce, navigate to the campaign to reconnect.
2. Under Settings, click **Manage Journey**.
 -  **Note** Child campaigns inherit the connected journey from their parent campaigns. The connected journey can't be modified.
3. Search for and select the Marketing Cloud Engagement journey associated with this campaign.
 -  **Tip** To select a journey from a different business unit, remove the selected journey. Then, search for and select a new business unit and a new journey.
4. Save.
The journey is connected. Send email activities on the connected journey populate the Campaign Messages component.

Set Up Collaborative Campaigns (Auto Send)

Coordinate with your business users to plan your campaign launch at a specified date and time. With the proper permission set, you can set up an Auto Send for a Campaign. At the selected date and time, all campaign members not yet sent to and not part of a scheduled or bulk send are added to the Auto Send campaign journey. Your business users can add up to 25,000 members for an Auto Send campaign. If more than one campaign is scheduled by the same person for the same time and date, your business users can still send to a total of 25,000 members.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To set up a collaborative campaign:	DMAdministrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace), and the DM Auto Send permission set.
-------------------------------------	--

1. In Salesforce, navigate to your campaign.
2. Click the cog wheel icon, and select Auto Send.
 -  **Note** You can set up one Auto Send per campaign.
3. Choose the send date and time for the campaign to launch.
4. Submit your changes.



Example Your insurance company has a centralized marketing team and individual smaller marketers or teams at dealerships who sell their insurance. You want the centralized marketing team to configure the automatic sending date and time when a Distributed Marketing Campaign is released to the insurance reps. The individual reps can then add up to 25,000 members to the campaign. The campaign sends at the time and date that the centralized marketing team set up.

Quick Send Messages

Quick Send messages enable your business users to rapidly send a single, personalized Marketing Cloud Engagement email or SMS message to contacts, leads, and person accounts from throughout the Salesforce platform.

There are two types of Quick Send workflows:

1. **Audience First:** Users select the audience they want to target first. Then they search for the email or SMS message that they want to send.
2. **Content First:** Users select the email or SMS message they want to send first. Then they select the audience to target.

Each of the following workflows has different audience size considerations. And each is designed to help users quickly send content depending on where they are on the platform.



Note We recommend that customers attempt no more than 10,000 sends per minute (600,000 sends per hour) across all users. One send equates to an injection onto the journey. This volume is rarely seen. If you believe your users as a whole have the potential to exceed this volume, talk to your account team.

Workflow Name	Workflow Type	When Would You Use this Workflow?	Use Case Examples
Quick Send from Contacts, Leads, and Person Accounts	Audience	Send a message to one individual from a contact, lead, or person account record.	Meeting Follow-up: A Cumulus financial advisor had a 1:1 meeting discussing future investment options. The advisor has the client's contact record open and follows up directly, sending a pre-built white paper that discusses 401k vs IRAs.
DM Approval Mode	Audience	To select the override mode for these approvals.	
DM Manual Approval Threshold	Audience	To set an audience threshold if an approval override is set.	

Workflow Name	Workflow Type	When Would You Use this Workflow?	Use Case Examples
Quick Send from Contacts, Leads, and Person Accounts	Audience	Send a message to one individual from a contact, lead, or person account record.	Meeting Follow-up: A Cumulus financial advisor had a 1:1 meeting discussing future investment options. The advisor has the client's contact record open and follows up directly, sending a pre-built white paper that discusses 401k vs IRAs.
Quick Send from List Views	Audience	Send a message to 1 through 75 individuals from a standard or custom list view. This workflow isn't available in Experience Cloud experiences. We recommend Bulk Send for sending to list views.	Market Update to High-Touch Clients: A Cumulus financial advisor uses a market update template to inform high-touch clients of significant market changes. The advisor navigates to a pre-built list view (must be fewer than 75 results), selects the template, and sends.
Quick Send from Cases	Audience	Send a message to the primary contact, lead, or person account on a case from a case record.	Requests for Service: Northern Trail Outfitters (NTO) uses cases in Service Cloud to manage inbound requests for product inquiries and support. Service reps, who spend most of their day on cases, can reply to inquiries using a pre-built template that includes inventory options and an interactive survey directly from the case objects. All sends are logged on the case for future reference.
Quick Send from Opportunities	Audience	Send a message to a contact associated with an opportunity from an opportunity record.	Information in an Open Deal Cycle: Cumulus financial advisors use opportunities to manage selling cycles. They're able to send messages with product and service offerings,

Workflow Name	Workflow Type	When Would You Use this Workflow?	Use Case Examples
			surveys, appointment scheduling, and more from the context of the opportunity. All sends are logged on the opportunity for future reference.
Single Quick Send from Quick Send Messages	Content	Send a message to one individual from a Quick Send message record.	Meeting Follow-up: A Cumulus financial advisor had a 1:1 meeting discussing future investment options. The advisor remembers seeing a new shared template called Investing After COVID-19 earlier that week. The advisor navigates to the content marketplace, selects New, finds the template, and sends it to the client.
Bulk Quick Send from Quick Send Messages	Content	Send a message to 1 through 100,000 individuals from a Quick Send message record.	Happy Holidays! A Cumulus financial advisor has 10,000 clients and wants to send a simple holiday card. The advisor decides that a simple thinking of you note is enough for all clients. The advisor can type the note one time for all 10,000 clients. Cumulus uses Quick Sends to manage this workflow because their reps like how simple it's to find and send assets. However, they can also use Bulk Campaign Sends to tie this activity to ROI (Campaign Influence), or if the total audience is greater than 100,000.
Bulk Send from List Views	Audience	Send a message to 1 through 100,000 individuals from a standard or custom contact, lead, or	Market Update to High-Touch Clients: A Cumulus financial advisor uses a market update template to inform

Workflow Name	Workflow Type	When Would You Use this Workflow?	Use Case Examples
		person account list view.	high-touch clients of significant market changes. The advisor navigates to a pre-built list view (must be fewer than 100,000 results), selects the template, and sends.

Each Quick Send message you enable with Distributed Marketing gets represented as a record on the Quick Send message custom object. This object behaves like a standard object, so you can add or remove fields to help bring important information to the surface for your users. You can also apply sharing rules to control the content that individual users see.

All Quick Send messages use Marketing Cloud Engagement Journeys with a single email or SMS message activity for sending.

When setting up Quick Send, keep these considerations in mind.

- You can't send to the Recently Viewed list view.
- You can't send to a list view or opportunity record in Experience Cloud.
- You can't send to business accounts.
- To control the individual Quick Send messages users can access and send, create sharing rules.
- If person accounts are enabled, the record appears in the Contact list view and the Account list view.

When setting up Quick Send, keep these scale considerations in mind to tell your users:

- Don't schedule more than a single Bulk Send for the same time.
- Don't schedule more than 50 unique Segmented Sends for the same time.
- Don't schedule Segmented and Bulk Sends for the same time.

Use this table to review which features are available in quick send workflows.

Feature	Contact/ Lead/ Person Account	List Views	Cases	Opportunities	Single Quick Send From Message Record	Bulk Send Quick Send From Message Record
Sending: Send to contact, lead, or person accounts	Yes, maximum one recipient.	Yes, maximum 75 recipients.	Yes, maximum one recipient	Yes, maximum one recipient	Yes, maximum one recipient.	Yes, maximum 100,000 recipients.

Feature	Contact/ Lead/ Person Account	List Views	Cases	Opportunities	Single Quick Send From Message Record	Bulk Send Quick Send From Message Record
	You can limit the total number of messages sent using the Frequency Cap defined in Distributed Marketing Administration.	You can limit the total number of messages sent using the Frequency Cap defined in Distributed Marketing Administration.	related to the case. You can limit the total number of messages sent using the Frequency Cap defined in Distributed Marketing Administration.	related to the opportunity. You can limit the total number of messages sent using the Frequency Cap defined in Distributed Marketing Administration.	You can limit the total number of messages sent using the Frequency Cap defined in Distributed Marketing Administration.	You can limit the total number of messages sent using the Frequency Cap defined in Distributed Marketing Administration.
Sending: Send from {X} Distributed Marketing supports sending from record owner and running user.	Yes	Yes	Yes	Yes	Yes	Yes
Sending: Schedule send	Yes	Yes	Yes	Yes	Yes	Yes
Message Personalization: Per-individual modifications Example: Select a single recipient and modify the email.	Yes	Yes	Yes	Yes	Yes	Yes

Feature	Contact/ Lead/ Person Account	List Views	Cases	Opportunities	Single Quick Send From Message Record	Bulk Send Quick Send From Message Record
Message Personalization: Per-group modifications Example: From 100 recipients, select 5 and modify the email for the selected 5.	N/A	No	N/A	N/A	N/A	No
Message Personalization: Per batch modifications Example: Modify the email for all selected recipients.	N/A	Yes	N/A	N/A	N/A	Yes
Message Personalization: Default modifications	Yes, through Quick Send defaults.	Yes, through Quick Send defaults.	Yes, through Quick Send defaults.	Yes, through Quick Send defaults.	Yes, through Quick Send defaults.	Yes, through Quick Send defaults.
Compliance & Approvals: Manual Approvals	Yes	Yes	Yes	Yes	Yes	Yes
Compliance & Approvals: Restricted Words	Yes	Yes	Yes	Yes	Yes	Yes
Compliance & Approvals: Submission Cap	Yes	Yes, but sending is disabled if the target audience is greater than your remaining	Yes	Yes	Yes	Yes, but sending is disabled if the target audience is greater than your remaining

Feature	Contact/ Lead/ Person Account	List Views	Cases	Opportunities	Single Quick Send From Message Record	Bulk Send Quick Send From Message Record
		sends.				sends.
Compliance & Approvals: Message Cap	N/A	N/A	N/A	N/A	N/A	N/A
Extend Distributed Marketing: Custom Personalization Interaction	Yes	Yes	Yes	Yes	Yes	No
Extend Distributed Marketing: Extend Entry Source Data	Yes	Yes	Yes	Yes	Yes	Yes

Set Up Quick Send from Contacts, Leads, and Accounts

To set up Quick Send to individuals, add the Quick Send Lightning component in Lightning App Builder or Experience Builder to Contact, Lead, or Account page layouts. You can't set up Quick Send for business accounts.

Set Up Quick Send from List Views

To set up Quick Send to List Views, add the Send Quick Send Message custom button to the Contact, Lead, or Person Account List View Search Layout in Lightning App Builder. Users can send up to 75 recipients at once.

Set Up Quick Send from Cases

To set up Quick Send from a case, add the MCDM Quick Send Message Lightning component to the Case page layout in the Lightning App Builder or Experience Builder to a Case.

Set Up Quick Send from Opportunity Records

To set up Quick Send to Opportunity Records, add the Send Quick Send Email custom button to the Contact, Lead, or Person Account List View Search Layout in Lightning App Builder. Quick Send to Opportunity Records isn't supported in Experience Cloud.

Set Up Quick Send from Quick Send Message Records

To set up Quick Send from a Quick Send Message Record, add the MCDM Quick Send Audience component to the Quick Send Message page layout in the Lightning App Builder or Experience Builder. When enabled, users can search for, select, and send a single contact, lead, or person account without leaving the message.

Enable Journeys for Quick Send

Marketers can make up to 1,000 Marketing Cloud Engagement journeys per connected Business Unit available in Distributed Marketing Quick Send workflows. Journeys are available in all Distributed Marketing Quick Send workflows and can be shared with users using sharing rules.

Set Up Quick Send from Contacts, Leads, and Accounts

To set up Quick Send to individuals, add the Quick Send Lightning component in Lightning App Builder or Experience Builder to Contact, Lead, or Account page layouts. You can't set up Quick Send for business accounts.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To create and save Lightning pages in the Lightning App Builder:	Customize Application

1. In Salesforce Setup, enter *Lightning App Builder* in the Quick Find box, and select **Lightning App Builder**.
2. Click **New**.
You can also modify an existing page instead of creating one.
3. Click **Record Page**.
4. Click **Next**.
5. Create a label, for example, *Contact_Quick_Send*.
6. Select the Contact, Lead, or Account object, and click **Next**.
7. Select **Choose Page Template** and select a template, or select **Clone Salesforce Default Page** and select a view.
8. Click **Finish**.
9. Drag the component **MCDM Quick Send Message** onto the page.
10. To modify the phone number used for SMS messages, enter the API name of the field that Distributed Marketing uses as the phone number for SMS sends.
 - a. For Quick Send workflows, modify the Mobile Number API Name.
 - b. For Campaign workflows, modify the Mobile Number API Name for Contact or Mobile Number API Name for Lead sections.
11. Save your changes.
12. Activate the page.
13. Assign a default page setting.

See Also

- [Set Up Quick Send from List Views](#)
- [Set Up Quick Send from Cases](#)
- [Set Up Quick Send from Quick Send Message Records](#)
- [Set Up Quick Send from Opportunity Records](#)

Set Up Quick Send from List Views

To set up Quick Send to List Views, add the Send Quick Send Message custom button to the Contact, Lead, or Person Account List View Search Layout in Lightning App Builder. Users can send up to 75 recipients at once.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To change search layouts:	Customize Application

Considerations:

- Quick Send to List Views isn't supported in Experience Cloud experiences. Search layouts are defined globally. If search layouts are enabled for CRM users, the quick action can't be hidden for Experience Cloud users.
 -  **Note** Bulk Quick Send also allows users to send to List Views and has a larger audience cap. Consider using Bulk Quick Send instead, especially if you have CRM and Community Distributed Marketing users.
 - When sending a Quick Send SMS message, Distributed Marketing uses the phone number defined in the Quick Send from Contact or Lead workflows.
 - If you use Shield Platform Encryption, you can use Quick Send from List Views. Make sure that the list view has a non-encrypted field for the first field.
- In Salesforce, from Setup, select **Object Manager**.
 - Select the Contact, Lead, or Account object.
 - Select **Search Layouts** for Salesforce Classic.
 - Edit the List View layout.
 - Under Custom Buttons, select **Send Quick Send Message**, and click **Add** to add the button to the Available Buttons.
 - Click **Save**.

See Also

- [Set Up Quick Send from Contacts, Leads, and Accounts](#)
- [Set Up Quick Send from Cases](#)
- [Set Up Quick Send from Quick Send Message Records](#)
- [Set Up Quick Send from Opportunity Records](#)

Set Up Quick Send from Cases

To set up Quick Send from a case, add the MCDM Quick Send Message Lightning component to the Case page layout in the Lightning App Builder or Experience Builder to a Case.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To create and save Lightning pages in the Lightning App Builder:	Customize Application

- In Salesforce, navigate to Setup.

2. In Salesforce Setup, type *Lightning App Builder* in the Quick Find box and click **Lightning App Builder**.
3. Click **New**.

 **Note** You can modify an existing page instead of creating one.
4. Click **Record Page**.
5. Click **Next**.
6. Create a label, for example, `Distributed_Marketing_Case`.
7. Select **Case** as the object.
8. Click **Next**.
9. Select **Choose Page Template** and select a template, or select **Clone Salesforce Default Page** and select a view.
10. Click **Finish**.
11. Drag the MCDM Quick Send Message component onto the page layout.
12. To modify the phone number used for SMS messages, enter the API name of the field for Distributed Marketing to use as the phone number for SMS sends.
 - a. For Quick Send workflows, modify the Mobile Number API Name.
 - b. For Campaign workflows, modify the Mobile Number API Name for Contact or Mobile Number API Name for Lead sections.
13. Save your changes.
14. Activate the page.
15. Assign a default page setting.

See Also

- [Set Up Quick Send from Contacts, Leads, and Accounts](#)
- [Set Up Quick Send from List Views](#)
- [Set Up Quick Send from Quick Send Message Records](#)
- [Set Up Quick Send from Opportunity Records](#)

Set Up Quick Send from Opportunity Records

To set up Quick Send to Opportunity Records, add the Send Quick Send Email custom button to the Contact, Lead, or Person Account List View Search Layout in Lightning App Builder. Quick Send to Opportunity Records isn't supported in Experience Cloud.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To set up Quick Send from Opportunity Records:	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace)
To create and save Lightning pages in the Lightning App Builder	Customize Application
To view Lightning pages in the Lightning App	View Setup and Configuration

USER PERMISSIONS NEEDED

Builder

1. In Salesforce, navigate to the App Builder.
2. In the search box, find and select Lightning App Builder.
3. Click **New**.
4. Click **Record Page**.
5. Click **Next**.
6. Create a label. For example, Distributed_Marketing_Opportunity.
7. Select **Opportunity** as the object.
8. Click **Next**.
9. Select **Choose Page Template**, and select a template. Or select **Clone Salesforce Default Page**, and select a view.
10. Click **Finish**.
11. Drag the MCDM Quick Send Message component onto the page layout.
12. To modify the phone number used for SMS messages, enter the API name of the field for Distributed Marketing to use.
 - a. For Quick Send workflows, modify the Mobile Number API Name.
 - b. For Campaign workflows, modify the Mobile Number API Name for Contact or Mobile Number API Name for Lead sections.
13. Save your changes.
14. Activate the page, and assign a default page setting.

See Also

- [Set Up Quick Send from Contacts, Leads, and Accounts](#)
- [Set Up Quick Send from Cases](#)
- [Set Up Quick Send from List Views](#)
- [Set Up Quick Send from Quick Send Message Records](#)

Set Up Quick Send from Quick Send Message Records

To set up Quick Send from a Quick Send Message Record, add the MCDM Quick Send Audience component to the Quick Send Message page layout in the Lightning App Builder or Experience Builder. When enabled, users can search for, select, and send a single contact, lead, or person account without leaving the message.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To create and save Lightning pages in the Lightning App Builder:	Customize Application
--	-----------------------

1. In Salesforce, navigate to Setup.
2. In Salesforce Setup, type *Lightning App Builder* in the Quick Find box and click **Lightning App**

Builder.

3. Click **New**.



Note You can modify an existing page instead of creating one.

4. Click **Record Page**.
5. Click **Next**.
6. Create a label, for example, Distributed_Marketing_Case.
7. Select **Quick Send Message** as the object.
8. Click **Next**.
9. Select **Choose Page Template** and select a template, or select **Clone Salesforce Default Page** and select a view.
10. Click **Finish**.
11. Drag the MCDM Quick Send Audience component onto the page layout.
12. Save your changes.
13. Activate the page.
14. Assign a default page setting.

Bulk Quick Send from Quick Send Message Records

Allow Marketing Cloud Engagement Distributed Marketing business users to send a single, personalized quick send message to up to 100,000 contacts, leads, or person accounts at once from any Quick Send message record. When enabled, users can send to a single custom or standard Salesforce list view that contains from 1 through 100,000 results.

Quick Send Message Default Values

Default personalizations allow users to streamline their Distributed Marketing experience by creating default customizations for Quick Send messages. You can modify these customizations for individual recipients before sending through any of the Quick Send workflows you can access.

See Also

- [Set Up Quick Send from Contacts, Leads, and Accounts](#)
- [Set Up Quick Send from List Views](#)
- [Set Up Quick Send from Cases](#)
- [Set Up Quick Send from Opportunity Records](#)

Bulk Quick Send from Quick Send Message Records

Allow Marketing Cloud Engagement Distributed Marketing business users to send a single, personalized quick send message to up to 100,000 contacts, leads, or person accounts at once from any Quick Send message record. When enabled, users can send to a single custom or standard Salesforce list view that contains from 1 through 100,000 results.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To manage permission set assignments:	Assign Permission Sets

When enabling Bulk Quick Send, keep these considerations in mind:

- Access to Bulk Quick Sends is granted using a custom permission set: DM Bulk Send.
- Bulk Quick Sends don't support Distributed Marketing manual approval workflow settings. However, restricted words are supported.
- Business users can preview content for the first 100 recipients in the list view, regardless of total audience size.
- Modifications made using Distributed Marketing content blocks apply to all recipients. Per-individual modifications by business users aren't supported.
- Custom Personalization Interactions aren't supported. However, external entry source data is supported.
- Users can send to person accounts using Contact list views but not Account list views.
- If the user who prepares the send is different from the user who starts the send, the User ID stored in the Marketing Cloud Engagement event data extension (sfUserId) is the user who prepares the send.



Note Configure the MDCM Quick Send Audience component to make this workflow visible to users. See [Set Up Quick Send from Quick Send Message Records](#).

1. In Salesforce, navigate to Setup.
2. In Salesforce Setup, type Permission Sets in the Quick Find box, and click **Permission Sets**.
3. Click **DM Bulk Send**.
4. Click **Manage Assignments**.
5. Assign the permissions set to your Distributed Marketing business users. Users can now access to the Bulk tab in the MCDM Quick Send Audience component.



Note If your organization uses the Collaborative Campaigns (Auto Send) feature, you can add up to 100,000 members for a given Auto Send campaign, or a total of 100,000 members across campaigns scheduled at the same time by the same person. If you exceed the 100,000 member limit, the Auto Send only sends 100,000. If your audience is greater than 100,000 members total across multiple campaigns to send to, consider staggering the sends in 5-minute intervals.

Quick Send Message Default Values

Default personalizations allow users to streamline their Distributed Marketing experience by creating default customizations for Quick Send messages. You can modify these customizations for individual recipients before sending through any of the Quick Send workflows you can access.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To create and save Lightning pages in the Lightning App Builder	Customize Application
To view Lightning pages in the Lightning App Builder	View Setup and Configuration

1. In Salesforce, navigate to Setup.
2. In Salesforce Setup, type Lightning App Builder in the Quick Find box and click Lightning App Builder.
3. Edit the page layout for the Quick Send Message object.
4. Drag the MCDM Quick Send Defaults component onto the page layout.
5. Save your changes.

Enable Journeys for Quick Send

Marketers can make up to 1,000 Marketing Cloud Engagement journeys per connected Business Unit available in Distributed Marketing Quick Send workflows. Journeys are available in all Distributed Marketing Quick Send workflows and can be shared with users using sharing rules.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To enable a journey for Quick Send:	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace)

Follow these steps to enable journeys for Quick Send:

1. From the App Launcher, find and open **Distributed Marketing Administration**.
2. Navigate to Quick Send.
3. Select a business unit.
4. Select a journey and click **Add**.

 **Tip** To add journeys from multiple business units at once, select up to 30 journeys across the available business units.
5. Click **Apply Changes**.

Use Distributed Marketing to Organize Content with Topics

Assign one or more topics to each Quick Send to create content lists that you can easily search and manage.

1. In Salesforce, from the App Launcher, search for and open **Distributed Marketing Administration**.
2. Navigate to the **Configuration** section, click **Content Topics**.

3. Select one or more Quick Send templates to manage.
4. Click the **Tag** icon to view and create topics.
5. To create a topic, click **New**, label the topic, and click **Add**.
6. Select one or more topics to categorize your Quick Send templates.



Note For an admin to assign Topics to a Quick Send, you must manually enable Topics for the Quick send Message object.

7. Click **Apply Changes**.

Use Distributed Marketing with Tokenized Sending

Keep these considerations in mind when you use Distributed Marketing with Marketing Cloud Engagement accounts that use tokenized sending.

General Considerations:

- The Distributed Marketing entry source data extensions and personalization data extensions can't have encrypted fields. This setup is typical.
- Journeys must be configured to use tokenized email addresses and phone numbers. Review considerations for each supported channel for journey configuration changes.
- Sometimes users can't send to new or updated recipients immediately. Contacts, leads, and person accounts (recipients) must be synchronized into Marketing Cloud Engagement and exist on your token server before sending through Distributed Marketing. When using synchronized data extensions, Marketing Cloud Engagement polls objects on a configurable interval. This interval is the minimum amount of time a user must wait before sending through Distributed Marketing after adding a recipient. It's also the minimum wait time when updating the email address or mobile number of an existing recipient.

Email Considerations:

- Configure journeys to use the tokenized email address. The email address used for the recipient is the email address on the Marketing Cloud Engagement contact record. It's not the email address normally seen in the Distributed Marketing entry event data extension. When creating the journey's event data extension, don't include the email field. When configuring journey settings, set the Default Email Address to Use email attribute from Contacts, and select the appropriate field.
-
- Note** If the email address stored in your CRM or Experience Cloud environment is the tokenized email address, you can configure journeys using the standard Distributed Marketing configuration.
- Configure a unique journey for each object type you support. When synchronizing CRM contacts, leads, or person accounts into Marketing Cloud Engagement, each is represented as a separate object in Marketing Cloud Engagement Contact Model. If your distributed marketing users send to more than one CRM object, you must configure a unique journey for each object type, where the Default Email Address is selected from the respective object.
 - Ensure that the email address is in your token server. When sending in tokenized environments, Marketing Cloud Engagement doesn't send to the plain text email address. It sends to the token,

which is resolved at send time.

SMS Considerations:

- Configure journeys to use the correct mobile number. The mobile number used for the recipient is the mobile number on the contact record, not the mobile number normally used in the Distributed Marketing entry event data extension. When configuring journey settings, set the Default Mobile Number to Use mobile number attribute from Contacts, and select the appropriate field.
-  **Note** If the mobile number stored in your CRM or Experience Cloud environment is the tokenized number, you can configure journeys using the standard Distributed Marketing configuration.
- Configure a unique journey for each object type you support. When synchronizing CRM contacts, leads, or person accounts into Marketing Cloud Engagement, each is represented as a separate object in Marketing Cloud Engagement Contact Model. If your distributed marketing users send to more than one CRM object, you must configure a unique journey for each object type, where the Default Mobile Number is selected from the respective object.
- Ensure that the mobile number is in your token server. Similar to an email address, Marketing Cloud Engagement sends to the tokenized number, not the plain-text number.
- Ensure that the tokenized mobile number and Contact Key are opted in before sending. In Distributed Marketing, the Contact Key is the Contact Id or Lead Id in CRM. The Contact Key is represented as the id in the event data extension. The id relates to the subscriber on the Subscriber Key.

See Also

[Synchronized Data Sources in Contact Builder](#)
[Create a Mobile Opt-In Message in MobileConnect](#)
[Tokenized Sending](#)

Use Distributed Marketing with Field Level Encryption

Keep these considerations and limitations in mind when you use Distributed Marketing with Marketing Cloud Engagement accounts that use Field Level Encryption.

General Considerations:

- The Distributed Marketing entry source data extensions and personalization data extensions can't have encrypted fields.
- Journeys must be configured to use encrypted email addresses and phone numbers. Review considerations for each supported channel for journey configuration changes.
- A value must exist for email addresses and phone numbers in CRM. This value is included in the Distributed Marketing injection payload (API). If the event data extension is configured without the fields (see channel considerations), this value isn't stored in Marketing Cloud Engagement by Distributed Marketing. Also, this value can be encrypted.
- Recipients including Contacts, Leads, and Person Accounts must be synchronized into Marketing Cloud Engagement before sending through Distributed Marketing. When using synchronized data extensions, Marketing Cloud Engagement polls objects on a configurable interval. This interval is the minimum amount of time a user must wait before sending through Distributed Marketing after adding

a recipient. It's also the minimum wait time when updating the email address or mobile number of an existing recipient.

Email Considerations:

- Configure journeys to use the encrypted email address. The email address used for the recipient is the email address on the Marketing Cloud Engagement contact record, not the email address normally seen in the Distributed Marketing entry event data extension. When creating the journey's event data extension, don't include the email field. When configuring journey settings, set the Default Email Address to Use email attribute from Contacts, and select the appropriate field.
- Configure a unique journey for each object type you support. When synchronizing CRM Contacts, Leads, or Person Accounts into Marketing Cloud Engagement, each is represented as a separate object in Marketing Cloud Engagement Contact Model. If your distributed marketing users send to more than one CRM object, you must configure a unique journey for each object type, where the Default Email Address is selected from the respective object.

SMS Considerations:

- Configure journeys to use the correct mobile number. The mobile number used for the recipient is the mobile number on the contact record, not the mobile number normally used in the Distributed Marketing entry event data extension. When configuring journey settings, set the Default Mobile Number to Use mobile number attribute from Contacts, and select the appropriate field.
- Configure a unique journey for each object type you support. When synchronizing CRM contacts, leads, or person accounts into Marketing Cloud Engagement, each is represented as a separate object in Marketing Cloud Engagement Contact Model. If your Distributed Marketing users send to more than one CRM object, you must configure a unique journey for each object type, where the Default Mobile Number is selected from the respective object.
- Ensure that the tokenized mobile number and Contact Key are opted in before sending through Distributed Marketing. In Distributed Marketing, the Contact Key is the Contact Id or Lead Id in CRM. The Contact Key is represented as the id in the event data extension. The id relates to the subscriber on the Subscriber Key.

Manage Settings

Distributed Marketing allows you to enhance your CRM with Marketing Cloud Engagement content to send relevant, on-brand content at every touchpoint. With administrator access, typically granted to marketers, connect a Marketing Cloud Engagement journey to a campaign, enable Quick Send, and customize Distributed Marketing to fit your needs.

1. [Administer Default Greeting Options](#)

To help control voice and tone, select the greeting options for standard Distributed Marketing users to choose from. Distributed Marketing automatically includes First Name and Full Name options, which can't be edited or removed. If you use custom fields, such as Preferred Name, add up to eight more greeting options.

2. [Administer Org-Wide Pending Member Table Defaults](#)

After contacts, leads, or person accounts are added to campaigns, standard Distributed Marketing

users review campaign members to personalize content and to approve or reject them for receiving messages. You can define the default fields your users see. By default, the list of pending campaign members is sorted by the creation date, which is when the member was added to the campaign.

3. **[Administer Compliance and Approvals](#)**

Ensure that your content remains on brand and legally compliant. Use a Salesforce Approval Process to route Distributed Marketing content to other Salesforce users to review, automatically block sends containing customer-defined restricted words, and define a list of domains that user-defined images can come from.

4. **[Administer the Personalization Experience Default Mode](#)**

Help business users more efficiently engage with distributed content by defining whether their personalization experience opens in edit or preview mode.

5. **[Administer the Email Header](#)**

Show business users who an email is going to, and who it is sent from, as part of the Distributed Marketing preview. The To information displays the standard Name and Email Address fields on the recipient's contact or lead record. The From information displays the standard Name and Address fields on the record of the running user or record owner.

6. **[Administer Frequency Capping](#)**

Define the maximum number of sends a user can initiate through Distributed Marketing. Users see the number of messages remaining before they send a message. When the cap is reached, sending is disabled until the cap is reset. The frequency send cap can be reset daily, weekly, or monthly. The cap resets at midnight in the user's time zone and is a rolling reset. Sends are credited back 1, 7, or 30 days after they're consumed. If your organization uses Bulk Sends, users can't target an audience with more recipients than remaining sends.

7. **[Administer the Campaign Send Audience Batch Cap](#)**

Set the maximum number of campaign members that can be sent to at once when performing a Segmented Send. Reducing the number of individuals included in segments can help improve performance for customers who have backend processes based on campaigns or campaign members. If your organization uses Bulk Send, the batch cap doesn't apply.

8. **[Track Activities with Distributed Marketing Reports](#)**

Distributed Marketing administrators can enable tracking for Distributed Marketing sends to provide visibility on what activities Distributed Marketing uses most.

9. **[Enable Send Scheduling](#)**

Allow business users to schedule single and bulk send Quick Send messages for a future time and date. Messages are scheduled and sent in the running user's time zone. Messages must be scheduled at least 5 minutes in the future and can be canceled up to 5 minutes before the send.

10. **[Enable Segmented Sends](#)**

You can specify which users can view segmented sends within a campaign. Segmented sends were previously the default.

11. **[Restrict Sending](#)**

Prevent business users from temporarily using content, or retire content permanently.

See Also

[Quick Send Messages](#)

Administer Default Greeting Options

To help control voice and tone, select the greeting options for standard Distributed Marketing users to choose from. Distributed Marketing automatically includes First Name and Full Name options, which can't be edited or removed. If you use custom fields, such as Preferred Name, add up to eight more greeting options.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To set default personalization and options:	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace)

1. In Salesforce, from the App Launcher, find and open **Distributed Marketing Administration**.



Tip You can also access Distributed Marketing Administration by clicking **Administration** from the Campaign Messages component on a Campaign record page.

2. To add custom greeting options, click **Add Another Greeting**.



Note Each greeting requires an associated field for every object.

3. To set a default greeting option, click **Set Default** for that option.

4. To save your changes, click **Apply Changes**.



Tip You can remove any greeting option that isn't set as the default option.

Administer Org-Wide Pending Member Table Defaults

After contacts, leads, or person accounts are added to campaigns, standard Distributed Marketing users review campaign members to personalize content and to approve or reject them for receiving messages. You can define the default fields your users see. By default, the list of pending campaign members is sorted by the creation date, which is when the member was added to the campaign.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To customize the pending member table:	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace)

1. In Salesforce, from the App Launcher, find and open **Distributed Marketing Administration**.
2. In the Pending Campaign Member Table section, move fields between **Available Fields** and **Visible Fields** using the left and right arrows.
3. Reorder the fields using the up and down arrows.



Tip You can't remove Created Date or Name fields, but you can change where they show up in the table.

4. Select **Apply Changes**.

Administer Compliance and Approvals

Ensure that your content remains on brand and legally compliant. Use a Salesforce Approval Process to route Distributed Marketing content to other Salesforce users to review, automatically block sends containing customer-defined restricted words, and define a list of domains that user-defined images can come from.

Enable Manual Approval

Ensure that content sent through Distributed Marketing is compliant by routing sends through other Salesforce users for review. To enable manual approval, create an approvals process for Distributed Marketing content. Then enable manual approvals in the Distributed Marketing Administration app. Designated approvers review content before it's sent.

Define Restricted Words

Define a list of words that, when detected in Distributed Marketing rich or plain text areas, automatically disable sending through Distributed Marketing. You can define specific words to restrict, and you can use standard regular expressions to prevent business users from sending information that's deemed sensitive, such as account numbers.

Define Valid Image Domains

Provide up to 10 domains that business users can add images from when providing a custom image via a URL. If a business user enters a URL with an invalid domain, sending features are disabled.

Enable Manual Approval

Ensure that content sent through Distributed Marketing is compliant by routing sends through other Salesforce users for review. To enable manual approval, create an approvals process for Distributed Marketing content. Then enable manual approvals in the Distributed Marketing Administration app. Designated approvers review content before it's sent.



Note Enabling the approval process affects the max number of individuals that can be sent to at once, during a Segmented Send.

Here are some considerations when enabling manual approval:

- Manual approval uses a Salesforce Approval Process. Take the [Flow Builder](#) module in Trailhead.
- If you have the DM Approver permission set, you can see the preview on the approval record.
- Approval can be required all the time or only when certain conditions apply.
- If a send cap is defined, sends are consumed when the business user submits the send for approval, not when the send is approved or rejected. If a send is rejected, the send isn't credited back to the business user until the cap is reset.
- When a message is assigned to an approver, the approver can preview, approve, or reject the content. Approvers don't require access to the rest of Distributed Marketing.
- When a business user submits a single email for approval, such as when sending a message using

Quick Send, the email is sent after the content is approved. If the email is rejected, the message isn't sent.

- When a business user submits multiple messages for approval using campaign sends, emails are sent after all emails on the journey are approved. If any of the emails are rejected, no messages are sent. The associated campaign members are available for resubmission on the Pending Submissions Page (formerly the Pending Approvals page).
- If a message is rejected, approvers can leave rejection reasons using the standard approval process comments feature. The submitter doesn't currently receive a notification.
- If there's an error sending a message, such as when a required field is missing, the submitter receives a notification to the email address listed on their user record.
- If the approval process is enabled, the maximum number of individuals that can be sent to at once in the campaign decreases. Consider lowering the cap or selecting fewer members for submission. Results can vary, but 200 is likely the max when approvals are on.

Create an Approval Process for Distributed Marketing

Define the Salesforce users who are responsible for approving Distributed Marketing content and the workflow they follow. You can create a simple approval process for Distributed Marketing, or a more complex approval process, to support your specific business needs by modifying approver and action selections.

Enable Manual Approval for Distributed Marketing

You can enable manual approval for Marketing Cloud Engagement Distributed Marketing. Bulk sends are also supported in manual approval.

Create a Bulk Send Approval Process for Distributed Marketing

Specify the Salesforce users who are responsible for bulk approving Distributed Marketing content, and configure the workflow that they follow.

Create an Approval Process for Distributed Marketing

Define the Salesforce users who are responsible for approving Distributed Marketing content and the workflow they follow. You can create a simple approval process for Distributed Marketing, or a more complex approval process, to support your specific business needs by modifying approver and action selections.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To create an approval process:	Customize Applications
--------------------------------	------------------------

1. In Salesforce, navigate to Setup.
2. In Quick Find, search for and select **Approval Processes**.
3. In Manage Approval Processes For: select **MCDM Submission**.
 - For bulk send, select **Bulk Send Job**.
4. From the Create New Approval Process picklist, select **Use Jump Start Wizard**.
5. Name the approval process (required).

6. Choose an approver.
 - a. To assign to a specific user such as a compliance team, select **Automatically assign to approver(s)** and specify the user.
 - b. To assign to a user based on the submitter's hierarchy field, select **Automatically assign an approver using a standard or custom hierarchy field**, and then pick an option from the dropdown.
-  **Note** Manually choosing the approver isn't supported.
7. Click **Save**.
8. Click **View Approval Process Detail Page**.
9. In the Final Approval Actions section, select **Edit** on the Record Lock action.
10. Select **Unlock the record for editing**.
11. Click **Save**.
12. In the Final Approval Actions section, select **Add New** then **Field Update**.
13. Name the field update. For example, "Send".
14. In the Field to Update picklist, select **Status**.
15. In the Specify New Field Value list, select **A specific field**.
16. In the picklist, select **Send**.
17. Click **Save**.
18. In **Final Rejection Actions**, select **Add New** and then **Field Update**.
19. Name the field update. For example, **Reject**.
20. In the Field to Update picklist, select **Status**.
21. In the Specify New Field Value list, select **A specific value**.
22. In the picklist, select **Reject**.
23. Click **Save**.
24. Click **Activate** and accept the dialogue.

Enable Manual Approval for Distributed Marketing

You can enable manual approval for Marketing Cloud Engagement Distributed Marketing. Bulk sends are also supported in manual approval.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To enable manual approval:	Installed Package DMAdministrator License and Administrator permission (mcdm_15 namespace).

1. In the Salesforce App Launcher, find and open **Distributed Marketing Administration**.
2. Navigate to the Compliance and Approvals section
3. Choose an option for Enable Manual Approval.
 - a. Select **Never** to send through Distributed Marketing without manual approval.
 - b. Select **Always** to require approval for all Distributed Marketing sends.
 - c. Select **Only when content is modified** to require approval when the business user modifies content. Content is considered modified if it's different from the content in Marketing Cloud Engagement. Differences include modifications made by defining default values for campaign

sends.

- d. Select **Target audience is greater than or equal to** option to require approval when business users target a certain audience size. If you select this option, define a value from 2 to 250.



Note Create at least one approval process associated with the MCDM Submission object before you enable manual approval.

Create a Bulk Send Approval Process for Distributed Marketing

Specify the Salesforce users who are responsible for bulk approving Distributed Marketing content, and configure the workflow that they follow.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To create an approval process:

Customize Applications

1. From Setup, in the Quick Find box, search for and select **Approval Processes**.
2. In Manage Approval Processes For, select **Bulk Send Job**.
3. For Create New Approval Process, select **Use Jump Start Wizard**.
4. Give your approval process a unique name.
5. Select an approver.
 - To assign to a specific user such as a compliance team, select **Automatically assign to approver(s)** and specify the user.
 - To assign to a user based on the submitter's hierarchy field, select **Automatically assign an approver using a standard or custom hierarchy field**, and then pick an option from the dropdown.
6. Click **Save**.
7. Click **View Approval Process Detail Page**, and then click **Edit**.
8. In the dropdown, select **Approver Field and Record Editability**.
9. In the Record Editability Properties section, select who can edit records.
10. Click **Save**.
11. In the Final Approval Actions section, select **Edit**.
12. Select **Unlock the record for editing** and click **Save**.
13. In Final Approval Actions, select **Add New → Field Update**.
 - a. Name the field.
 - b. For Field to Update, select **Is Approved**.
 - c. For Specify New Field Value, select **A specific value**.
 - d. For Send, select **True**.
 - e. Click **Save**.
14. In the Final Rejection Actions section, select **Add New → Field Update**.
 - a. Name the field.
 - b. For Field to Update, select **Is Reject**.
 - c. For Specify New Field Value, select **A specific value**.
 - d. For Send, select **True**.
 - e. Click **Save**.

15. Click **Save**.

Define Restricted Words

Define a list of words that, when detected in Distributed Marketing rich or plain text areas, automatically disable sending through Distributed Marketing. You can define specific words to restrict, and you can use standard regular expressions to prevent business users from sending information that's deemed sensitive, such as account numbers.

Keep these considerations in mind when defining restricted words:

- Words must be alphanumeric characters. Punctuation and special characters aren't supported.
- Separate words by new lines, commas, or spaces.
- Words are case insensitive.
- The word limit is approximately 900,000 words, or about 6 million characters, including the delimiters in the .csv file.

Enter Restricted Words or Regular Expressions Manually

You can manually enter restricted words and standard regular expressions for Distributed Marketing.

Upload a List of Restricted Words or Regular Expressions

You can upload a list of restricted words. Enter at least one restricted word manually to enable this option.

Enter Restricted Words or Regular Expressions Manually

You can manually enter restricted words and standard regular expressions for Distributed Marketing.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To enter restricted words or regular expressions:	Installed Package DM Administrator License and Administrator permission (mcdm_15 namespace).

1. In Salesforce, from the App Launcher, find, and open **Distributed Marketing Administration**.
2. Navigate to the Compliance and Approvals section.
3. Turn on the option to disable sending when a message includes a restricted word.
4. Manually enter restricted words and regular expressions separated by new lines, spaces, or commas.

Upload a List of Restricted Words or Regular Expressions

You can upload a list of restricted words. Enter at least one restricted word manually to enable this option.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To upload a list of restricted words or regular expressions:	Installed Package DM Administrator License and Administrator permission (mcdm_15 namespace).

1. In Salesforce, from the App Launcher, find, and open **Distributed Marketing Administration**.
2. Navigate to the Compliance and Approvals section.
3. Enable restricted words.
4. Select **Advanced Setup**. The system opens the Distributed Marketing Restricted Words record.
5. Select **Related**.
6. Select the Distributed_Marketing_Restricted_Words .csv file.



Note When you create a CSV file, be aware that the file can contain restricted words and regular expressions. Enter the list of words first, followed by this: ---BLOCKLIST_SEPARATOR--- . Then list the regular expressions. Restricted words can be separated by a space or a new line. Each regular expression must be on a separate line.

7. Select **Upload New Version**.



Note Distributed Marketing uses the latest version of the first created file on this record. Uploading a new CSV file doesn't update the blocklist. Upload the file as a new version of the first created file.

8. Select your own CSV file (comma or new line separated files are supported). The new list of restricted words is used, and shows in the Compliance and Approvals section in Distributed Marketing Administration.

Define Valid Image Domains

Provide up to 10 domains that business users can add images from when providing a custom image via a URL. If a business user enters a URL with an invalid domain, sending features are disabled.

Here are some considerations when defining valid image domains:

- Domains are explicit. For example, <https://salesforce.com> and <https://www.salesforce.com> are considered two separate domains.
- Domains must contain <https://>.
- If you don't specify any domains, Distributed Marketing accepts any domain.

To provide a valid domain, follow these steps.

1. In Salesforce, from the App Launcher, find and open **Distributed Marketing Administration**.
2. In the Compliance and Approvals section, enter up to 10 domains.
3. Click Apply Changes.

Administer the Personalization Experience Default Mode

Help business users more efficiently engage with distributed content by defining whether their personalization experience opens in edit or preview mode.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To define the default personalization experience default mode:	Installed Package DM Administrator permission

1. In Salesforce, navigate to AppLauncher.
2. Select **Distributed Marketing Administration**.
3. In the Personalization Modal section, select the default mode.
4. Select **Apply Changes**.



Tip If you've created content with lots of Distributed Marketing content blocks for collaboration, consider changing the default mode to **Edit** to reduce clicks.

Administer the Email Header

Show business users who an email is going to, and who it is sent from, as part of the Distributed Marketing preview. The To information displays the standard Name and Email Address fields on the recipient's contact or lead record. The From information displays the standard Name and Address fields on the record of the running user or record owner.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To Administer the Email Header	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace) are required.

Here are some considerations for displaying the email header information:

- Display the email header information only if you're using the standard Distributed Marketing sender profile. The email header information doesn't update to show custom solutions, such as dynamic sender profiles.
- When enabled, email header information appears in the Distributed Marketing personalization modal preview. It's not shown when editing.
- This global setting applies to all users.

Follow these steps to administer the email header:

1. In Salesforce, from the App Launcher, find and open **Distributed Marketing Administration**.
2. Select the **Email Header** section.
3. To display Send To information, enable the **Display “Send To” Information?** option.
4. To display Send From information, enable the **Display “Send From” Information?** option and select the Send From options to enable for your users. A default option is required.

Administer Frequency Capping

Define the maximum number of sends a user can initiate through Distributed Marketing. Users see the number of messages remaining before they send a message. When the cap is reached, sending is disabled until the cap is reset. The frequency send cap can be reset daily, weekly, or monthly. The cap resets at midnight in the user’s time zone and is a rolling reset. Sends are credited back 1, 7, or 30 days after they’re consumed. If your organization uses Bulk Sends, users can’t target an audience with more recipients than remaining sends.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To administer frequency capping:	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace)

To define the audience batch cap, follow these steps:

1. In App Launcher, search for and select Distributed Marketing Administration.
2. In the Configuration section, select Compliance & Approvals.
3. In the Frequency Capping section, enter a maximum number of sends per user.
4. Select the duration.
5. Click Apply Changes.



Example

1. If today is May 26 and the send cap allows you 10 messages daily, anything that you send on May 26 is counted for that day. At 12:00:00 AM on May 27, the send cap resets and you can send 10 more messages.
2. If the send cap is set to 6 messages weekly, your sends could look like this:
 - Monday: you send 2 messages
 - Tuesday: you send 0 messages
 - Wednesday: you send 4 messages
 - Thursday: blocked - you reached your weekly limit
 - Friday: blocked - you reached your weekly limit
 - Saturday: blocked - you reached your weekly limit
 - Sunday: blocked - you reached your weekly limit
 - Monday: you now have 2 sends available

- Tuesday: you still have 2 sends available
- Wednesday: you now have 6 sends available

Administer the Campaign Send Audience Batch Cap

Set the maximum number of campaign members that can be sent to at once when performing a Segmented Send. Reducing the number of individuals included in segments can help improve performance for customers who have backend processes based on campaigns or campaign members. If your organization uses Bulk Send, the batch cap doesn't apply.

User Permissions Needed	
To administer the campaign send audience batch cap:	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace)

To define the audience batch cap, follow these steps:

1. In App Launcher, search for and select Distributed Marketing Administration.
2. In the Configuration section, select Compliance & Approvals.
3. In the Campaign Send Audience Batch Cap section, enter from 1 through 500.



Note If manual approvals are enabled the maximum number of individuals that can be sent to at once in the campaign decreases. Results can vary, but 200 is likely the max when approvals are on.

4. Click Apply Changes.




Example Define a campaign batch cap of 300. When users perform a segmented send, they can select, personalize, and submit up to 300 campaign members at once.

Track Activities with Distributed Marketing Reports

Distributed Marketing administrators can enable tracking for Distributed Marketing sends to provide visibility on what activities Distributed Marketing uses most.



Note Enabling this tracking adds to storage consumption limits. We recommend tracking consumption and deleting older objects that are no longer needed.

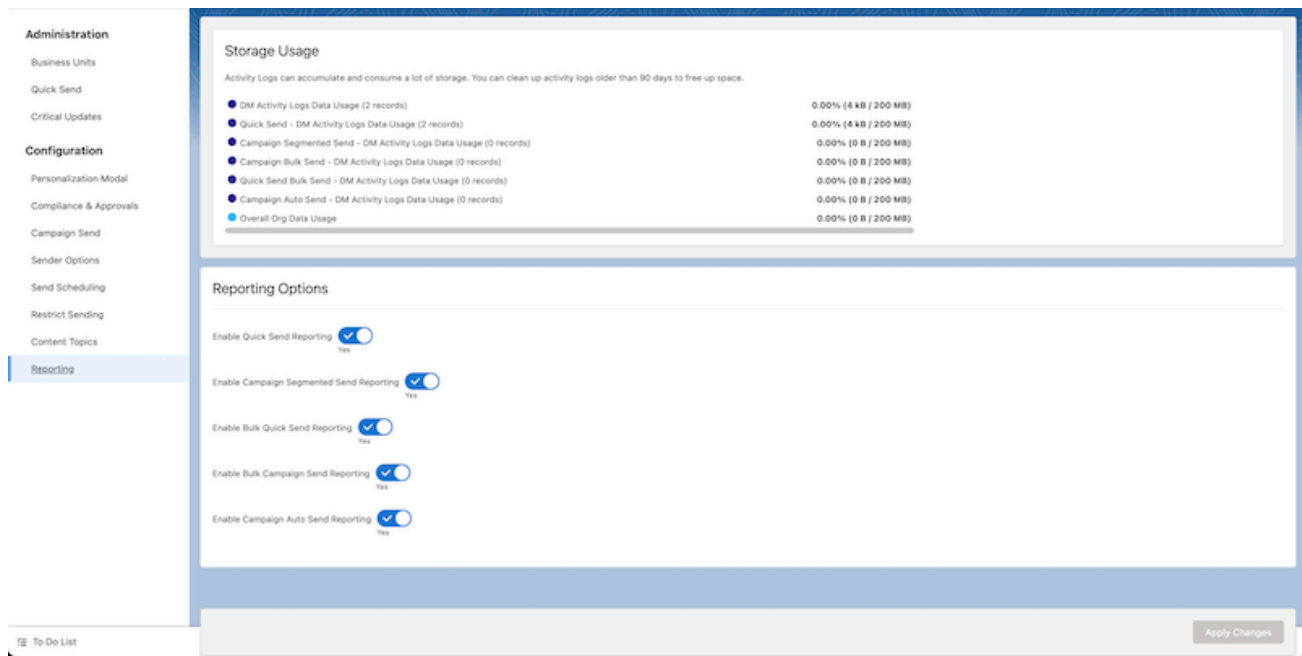

Track Quick Send Activities with Distributed Marketing

You can enable tracking Distributed Marketing sends to monitor what Quick Send Distributed Marketing uses most. You have two options to view adoption records for leads and contacts. The option you choose depends on whether you're using Experience Cloud or Communities and whether you need to display the adoption records. Tracking activities adds to your storage consumption limits. To stay within your limits, we recommend deleting objects that are no longer needed.

Distributed Marketing Activity Log Objects

Distributed Marketing for Marketing Cloud Engagement uses these tracking objects.

Enable Engagement Tracking in Distributed Marketing

Track your customer engagement in Distributed Marketing (DM).

Create a Dashboard for Distributed Marketing Engagement Tracking

To enable reporting on individual email results (IERs) with Distributed Marketing (DM) activity log data, create a custom report type with IERs and DM Activity Logs.

Track Quick Send Activities with Distributed Marketing

You can enable tracking Distributed Marketing sends to monitor what Quick Send Distributed Marketing uses most. You have two options to view adoption records for leads and contacts. The option you choose depends on whether you're using Experience Cloud or Communities and whether you need to display the adoption records. Tracking activities adds to your storage consumption limits. To stay within your limits, we recommend deleting objects that are no longer needed.

If your organization does display Distributed Marketing records in Sales Cloud or Experience Cloud, follow these steps.

1. Go to a Contact or Lead record page.
2. If you display Distributed Marketing records in Sales Cloud or Experience Cloud, use these steps.

- a. At the top of the page, click the Setup cog, and select **Edit Object**.
 - b. Select **Page Layouts**, and select the page that you want to modify.
 - c. Click **Related Lists**, and drag DM Activity Log to the page.
 - d. Select the fields that you want to display in the log.
Because users aren't creating these records manually, we recommend deselecting **New** and **Change Owner**.
 - e. Click **Save**.
3. If your org doesn't need to display Distributed Marketing records in Experience Cloud, use these steps.
- a. At the top of the page, click the Setup cog, and select **Edit Page**.
 - b. Drag a Dynamic Related List - Single component to the page.
 - c. Set the related list to DM Activity Log, and configure the type as list.
Up to 30 records can be displayed.
 - d. Select up to 10 fields to display.
Only the List Type in a main region can display more than four fields.
 - e. To display fields from lookups directly in the list, add formula fields to the DM Activity Log and expose those fields. You can then select the fields when configuring the Dynamic Related List in the page editor.
 - f. Click **Save**.

Distributed Marketing Activity Log Objects

Distributed Marketing for Marketing Cloud Engagement uses these tracking objects.

Field or Object Name	Description
Activity Send Type	The type of activity for this send, either Email or SMS.
Approver	The user that approved the Distributed Marketing send.
Bulk Send Job	Lookup to the Bulk Send job if this activity was triggered by a bulk send job.
Bulk Send Job ID	ID of the bulk send job, saved in the event the Bulk Send Job lookup is deleted.
Campaign	Lookup to the campaign if the activity is related to a campaign sending flow.
Campaign ID	ID of the campaign, saved in the event the campaign lookup is deleted.
Campaign Linked Journey	Lookup to the linked journey if this activity is related to a campaign-linked journey.
Campaign Linked Journey ID	ID of the campaign linked journey Journey ID, saved in the event the Campaign Linked Journey

Field or Object Name	Description
	ID lookup is deleted.
Campaign Member ID	ID of the campaign member if sent via a campaign sending flow.
Case	Lookup to the case object if this activity is related to a quick send from Case.
Case ID	ID of the Case record saved in the event the Case lookup is deleted.
DM Activity Log	Contains metadata for sends through DM for selected sending flows. A single record is created for each email and member on any injection into a Marketing Cloud Engagement journey. You can report on this object and create visualizations in the form of dashboards and reports. The metadata included provides information about the send type, recipient, sender, and activity (email). See individual field descriptions or Distributed Marketing Salesforce Help for more information.
DM Action ID	Unique ID that is the same for an entire DM sending action. Can be used in reports to group DM sends by a sending action.
DM Auto Send	Lookup to the DM auto send if this activity is related to a DM auto send.
DM Auto Send ID	ID of the DM auto send, saved in the event the DM Auto Send lookup is deleted.
DM Error For future use.	Stores DM-specific error messages that occurred during or after injection.
DM Scheduled Send	Lookup to the DM scheduled send if this activity is related to a scheduled sending flow.
DM Scheduled Send ID	ID of the DM scheduled send, saved in the event the DM Scheduled Send, lookup is deleted.
DM Submission	Lookup to the DM submission object if this activity is related to an approval sending flow.
DM Submission ID	ID of the DM submission record saved in the event the DM submission lookup is deleted.

Field or Object Name	Description
DM Tracking ID	Unique ID for this DM injection that is stored in the DM Entry Source DE. It can be used to tie back Marketing Cloud Engagement data to the DM Activity Logs.
Email ID	ID of the Marketing Cloud Engagement email activity.
Email Name	Name of the Marketing Cloud Engagement email activity.
Email Subject Line	The email's main subject line is stored here.
Has Injection Error	This activity had errors while injecting into a journey.
Has P13n Field Mappings For future use.	This activity has DM P13n Field Mappings applied to it via Extending the Entry Source DE.
Has Personalizations For future use.	This activity has DM personalizations applied.
IER Linking ID	For future use to link engagement data with IER records in the Marketing Cloud Engagement Connect package.
Initial Sender	Lookup to the user that initiated the DM Send for this activity (possibly doesn't match with Send From User).
Injected Contact	Lookup to the contact that was injected into the journey.
Injected Lead	Lookup to the lead that was injected into the journey.
Is Approval	This activity was sent through an Approvals flow.
Is Auto Send	This activity was sent through an Auto Send flow.
Is Bulk Send	This activity was sent through a Bulk Send flow.
Is Campaign Send	This activity was sent through a Campaign sending flow.
Is Contact	This activity was sent to a contact.

Field or Object Name	Description
Is Lead	This activity was sent to a lead.
Is List View Send	This activity was sent through a List View Mass Action flow.
Is Person Account	This activity was sent to a person account.
Is Quick Send	This activity was sent through a Quick Send flow.
Is Scheduled	This activity was scheduled.
Is Segmented Send	This activity was sent through a Segmented Send flow.
MCDM Send Type	The type of Distributed Marketing send.
MC Journey ID	ID of the Marketing Cloud Engagement journey.
MC Journey Name	Name of the Marketing Cloud Engagement journey.
MC Journey Version	Version number of the Marketing Cloud journey.
MC Triggered Send ID	ID of the Marketing Cloud Engagement triggered send ID associated with this activity.
Member Email	Email of the member that was injected into the journey.
Member Name	Name of the member that was injected into the journey.
Member Phone	Phone number of the member that was injected into the journey.
Member Phone Field Used	API Name of the phone number field used in this activity.
Opportunity	Lookup to the Opportunity object if this activity was related to a quick send from Opportunity.
Opportunity ID	ID of the Opportunity record saved in the event the Opportunity lookup is deleted.
Quick Send Message	Lookup to the Quick Send Message object if this activity was related to a quick send flow.
Quick Send Message ID	ID of the Quick Send Message record saved in the event the Quick Send Message lookup is deleted.
Send From Email	Email of the Send From User (Running User or Record Owner).

Field or Object Name	Description
Send From Name	Name of the Send From User (Running User or Record Owner).
Send From User	Lookup to the user determined by the DM Send From User settings. This object can be the Running User or the Record Owner.
SMS ID	ID of the Marketing Cloud Engagement SMS activity.
SMS Name	Name of the Marketing Cloud Engagement SMS activity.

Enable Engagement Tracking in Distributed Marketing

Track your customer engagement in Distributed Marketing (DM).

Install and configure Marketing Cloud Connect and enable individual email reporting (IER).

1. In Marketing Cloud Engagement, enable the sendLog data extension in your MIDs. You can also enable your entire EID.
2. For each journey that you want to track, add a VARCHAR(50) attribute named *dmTrackingId* to the entry event data extension.

For an existing journey, tracking starts after *dmTracking* is added to the entry event data extension and all enablement steps for tracking are completed.

3. Add a column to the sendLog DE named *dmTrackingId* mapped as a VARCHAR(50) attribute. The name is case-sensitive.
4. In Sales and Service Cloud, open DM Administration and click **Reporting**.
5. Enable Activity Log Reporting Options for any DM sending flows you want to track engagement for.
6. Link IERs with DM activity log records by creating a Lookup field to DM Activity Log on the IER object.
 - a. Add a custom field with the type Lookup.
 - b. Select **DM Activity Log** as the object.
 - c. Enable field-level security Distributed Marketing users.

DM tracking is enabled automatically for the first send for each connected campaign or quick send. DM tracking is manually enabled on a connected campaign or quick send by clicking the quick send CTA and enabling tracking. If the journey version is updated for the connected DM journey, it attempts to enable tracking again for the latest version.

In some cases, IERs are sent to Sales and Service Cloud without the DM activity ID. To resolve this issue, select **Request Tracking Immediately** in the Triggered Send object in Marketing Cloud Connect. There might be delays in sendLog for higher volume sends.

Create a Dashboard for Distributed Marketing Engagement Tracking

To enable reporting on individual email results (IERs) with Distributed Marketing (DM) activity log data, create a custom report type with IERs and DM Activity Logs.

1. [Create a custom report type](#) with DM Activity Logs as the primary object.
2. Add IERs as the secondary object.
3. You can also create custom report types that have Quick Send Messages with DM Activity Logs with IERs, or other related lookups to DM Activity Logs.

Enable Send Scheduling

Allow business users to schedule single and bulk send Quick Send messages for a future time and date. Messages are scheduled and sent in the running user's time zone. Messages must be scheduled at least 5 minutes in the future and can be canceled up to 5 minutes before the send.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To enable send scheduling	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace)

Considerations:

- Send scheduling can't be enabled if manual approvals are enabled and vice versa.
- Campaign sends can't be scheduled.
- Users can't have more than 25,000 messages scheduled for the same date and time. If more than 25,000 messages are scheduled for the same date and time, the send fails.
- If a custom send cap is defined, the sends are deducted at the time of scheduling. If the cancellation is within the same time window as the schedule, sends that are canceled before the send are credited back to the user.

To enable Quick Send scheduling, follow these steps:

1. In Salesforce, navigate to App Launcher.
2. Search for and select Distributed Marketing Administration.
3. In the Send Scheduling section, enable send scheduling.



Example

1. A user has a cap of 10 sends per day. At 8:00 AM on Day 1, the user schedules 10 sends. The user can schedule more sends at 12:01 AM on Day 2.
2. A user has a cap of 10 sends per day. At 8:00 AM on Day 1, the user schedules 10 sends. The user cancels 5 sends at 2:00 PM. The user can now schedule or initiate up to 5 sends before 12:01 AM

on Day 2.

3. A user has a cap of 10 sends per day. At 8:00 AM on Day 1, the user schedules 10 sends for 3:00 PM Day 3. The user can't schedule or initiate any sends until 12:01 AM on Day 2. At 8:00 AM on Day 2, the user schedules 10 more sends for 3:00 PM on Day 3. Now the user can't schedule or initiate any sends until 12:01 AM on Day 3. At 8:00 AM on Day 3, the user schedules 5 more sends for 3:00 PM Day 3. At 3:00 PM, 25 messages are sent. The user can schedule or initiate up to 5 more sends before 12:01 AM on Day 4.
4. A user has a cap of 10 sends per week. At 8:00 AM on Day 1, the user schedules 10 sends. The user can't schedule or initiate any sends until 12:01 AM on Day 8.
5. A user has a cap of 10 sends per week. At 8:00 AM on Day 1, the user schedules 10 sends. The user can't schedule or initiate any sends until 12:01 AM on Day 8. On Day 5, the user cancels 5 sends. The user can now schedule or initiate up to 5 sends before 12:01 AM on Day 8.
6. A user has a campaign with 50,000 campaign members. The user schedules two bulk sends with 25,000 individuals each for 8:00 AM on Day 1. The send fails at the scheduled time or date. Instead, the user can schedule one bulk send for 8:00 AM and the second bulk send for 8:30 AM.

See Also

[How to Enable the Distributed Marketing Scheduled Sends Tab](#)

Enable Segmented Sends

You can specify which users can view segmented sends within a campaign. Segmented sends were previously the default.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To enable segmented sends:	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace)

1. In Salesforce, navigate to App Launcher.
2. Search for and select **Distributed Marketing Administration**.
3. On the Campaign Sends page, turn on **Allow permission set to control Segmented Send flow**. Segmented Send is now disabled for all users, unless they have the Distributed Marketing Segmented Send Permission Set assigned to them.

When you enable this setting, you must assign the Distributed Marketing Segmented Permission set to users who need access to segmented sends.

Restrict Sending

Prevent business users from temporarily using content, or retire content permanently.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To restrict sending	Installed Package DM Administrator License and Administrator permission (mcdm_15 namespace).

Considerations:

- You can restrict sending for Quick Send messages and for Campaigns.
- Restrict sending by using either the active flag or a date range.
- If business users try to choose a restricted message, they see a message that the Campaign or Quick Send message is no longer active.

To restrict sending, follow these steps:

1. From the App Launcher, find and select Distributed Marketing Administration.
2. From Restrict Sending, choose what you want to restrict and how. You can use an active flag or a date range.



Example Your organization promotes a holiday sale. The Campaign dates are October 15 to January 1. Use this feature to restrict business users from sending the content before or after these dates.

Distributed Marketing Content

Distributed Marketing allows you to extend powerful and dynamic content to distributed teams. You can also use it to allow those teams to interact with that content safely and efficiently.

Use one or more Distributed Marketing Content Blocks alongside standard or custom content areas to create moments of collaboration that blend seamlessly into branded email messages. For example, let a user jazz up a holiday card with their own personal note and image, or provide some compelling context to market update messages.

Use Distributed Marketing with AMPscript to allow users to create custom SMS messages.

Marketing teams still manage the structure of messages, ensuring that everything is cohesive, on brand, and compliant. By augmenting this framework with collaborative content, brands are able to safely give flexibility to distributed teams. We like to call that “flexibility within a framework”.

How you choose to use Distributed Marketing content is up to you and can evolve over time. Because each message is independently configurable, you can start with assets you already have and up-level them with collaboration points when it makes sense.



Note Distributed Marketing uses JavaScript ES6 to enable message personalization for business users. Prevent Cross-Site Tracking must be disabled in Safari. Block third-party cookies must be disabled in Chrome.

1. **Enable Email Personalization with Distributed Marketing Content Blocks**
Use Distributed Marketing Content Blocks in Marketing Cloud Engagement to create sections of content for Distributed Marketing business users to personalize.
2. **Enable Custom SMS Messages**
Add AMPscript to SMS messages to allow a user to write and send a custom SMS message through Distributed Marketing. SMS messages are sent through journeys using the MobileConnect SMS message activity.
3. **Personalization Data Extension**
Distributed Marketing creates personalization data extensions in Marketing Cloud Engagement to store personalization data Distributed Marketing users enter when personalizing email messages. We automatically create a personalization data extension for you when you first connect a journey to a campaign or enable a journey for quick send. Custom SMS messages aren't stored here, but are available on the journey's event data extension.
4. **Use Legacy Personalization**
You can continue to use the legacy Introduction, Conclusion, and Greeting personalization options until End of Support is announced.

Enable Email Personalization with Distributed Marketing Content Blocks

Use Distributed Marketing Content Blocks in Marketing Cloud Engagement to create sections of content for Distributed Marketing business users to personalize.

You can drag Distributed Marketing content blocks onto any email canvas. And you can use them with any content block available in your Marketing Cloud Engagement account, allowing you to deliver dynamic highly relevant content.



Note Create one or more unique blocks in an email. Don't copy blocks in the same email or you receive an error to remove duplicated blocks, even if you change the content in the block.



Important If the same email is used in multiple activities within a single journey, Distributed Marketing can't provide unique personalization per message. To provide unique personalization, duplicate the email and use it in subsequent activities.



Note Customers can continue to use the legacy "introduction", "conclusion", and "greeting" text areas.

Distributed Attachment Block

To help your Marketing Cloud business users personalize a message, they can choose their own image using the distributed attachment block and select the attachments to use in a message.

Distributed Image Block

To help your Marketing Cloud Engagement business users personalize a message, they can choose their own image using the distributed image block and select the image to use in a message. Options include traditional images, offers, head shots, and more.

Distributed Plain Text Block

Give Marketing Cloud Engagement business users more flexibility when personalizing messages with

the ability to enter plain text in a message. Use this text block to let users contextualize images and marketing content, create their own messages and personal notes, and more.

[Distributed Rich Text Block](#)

Give Marketing Cloud Engagement business users more flexibility when personalizing messages with the ability to enter formatted text in a message. Use this to let users contextualize images and marketing content, create their own messages and personal notes, and more.

[Distributed Phrases Block](#)

Create a single template to reuse for similar emails with the new Phrases content block in Distributed Marketing.

[Distributed Multivariate Block](#)

Give Marketing Cloud Engagement business users the ability to interact with content variations using the multivariate content block. First, define a variable and up to 12 value options for the variable. Then, use the variable in your email AMPscript to define content variations, similar to dynamic content. Business users select from the options you define.

[Reference a Distributed Marketing Content Block](#)

You can use Distributed Marketing content blocks as reference blocks. Reference blocks allow marketers to create a content block one time, and then use it again in multiple emails. When you change the content block, emails referencing that content block are automatically updated.

See Also

[Personalization with AMPscript](#)

[Add a Distributed Marketing Content Block Package](#)

[Use Legacy Personalization](#)

Distributed Attachment Block

To help your Marketing Cloud business users personalize a message, they can choose their own image using the distributed attachment block and select the attachments to use in a message.

To use attachments, enable them in Your Marketing Cloud account. After they're enabled, update the connection information in the Distributed Marketing admin page.

[Add a Distributed Marketing Attachment Block](#)

Follow these steps to add the Distributed Marketing attachment block to Content Builder.

[Add a Distributed Marketing Attachment Block to an Email Template](#)

Add a Distributed Marketing attachment block to an email template so that business users can choose the attachments used in the email.

Add a Distributed Marketing Attachment Block

Follow these steps to add the Distributed Marketing attachment block to Content Builder.

REQUIRED EDITIONS

To use attachments, enable them in Your Marketing Cloud Engagement account. After they're enabled, update the connection information in the Distributed Marketing admin page.

USER PERMISSIONS NEEDED

To add the Distributed Marketing Text Block:	Installed Package Administer permission.
--	--

1. In Marketing Cloud Engagement, navigate to **Setup**.
2. Select **Apps** under Platform Tools.
3. Select **Installed Packages**.
4. Select the Distributed Marketing Package.
5. Select **Add Component**.
6. Select **Custom Content Block**.
7. Select **Next**.
8. Name the block.
9. Add a description, such as *Allow DM business users to attach files*.
10. Click the appropriate link. A window opens showing the URL you must copy and paste into your browser.
 - a. If your organization uses Hyperforce, use this link: `https://distributed-marketing-content-blocks.s1.marketingcloudapps.com/attachment-block/v1/`
 - b. If your organization doesn't use Hyperforce, use this link: `https://distributed-marketing-content-blocks.{{stackKey}}.marketingcloudapps.com/attachment-block/v1/`

Add a Distributed Marketing Attachment Block to an Email Template

Add a Distributed Marketing attachment block to an email template so that business users can choose the attachments used in the email.

1. In Content Builder, drag the attachment block onto the canvas. Only one attachment block can be added to an email.
2. For Guidance Message, enter the message shown to business users while personalizing the content.
3. To choose attachments that users can select from when editing the email, click **Browse**.
4. Select at least one attachment to make available.
5. Click **Select**.
6. To add more attachments for users to choose from, select **Add Attachments**.
7. You can add up to 20 attachments per block. The max size for each attachment is 5 MB. Up to 5 default attachments can be selected.



Note The number of attachments that can be sent depends on the total size of the attachments. The max total attachment size is 20 MB.

Distributed Image Block

To help your Marketing Cloud Engagement business users personalize a message, they can choose their own image using the distributed image block and select the image to use in a message. Options include traditional images, offers, head shots, and more.

Keep these design considerations in mind:

- Distributed Marketing only supports HTTPS images. Configure your custom hosting domain to serve up HTTPS secured links.
- Images default to scale-to-fit, centered in the block area. This setting can't be modified.
-  **Note** There's a known issue where Outlook doesn't respect scale-to-fit and displays an image's true dimension.
- The first image in the block is the default image, which is used when the business user doesn't specify a different image.
- Users who provide a custom image via a URL can define a custom redirect link URL. The redirect opens when the recipient clicks the image.
- If the admin enables this option, users can add images from their computer.

Image Content Block Options

Admins can set up an image library for users to choose from up to 12 images. Or, to add their own, they can use a URL or upload an image from their computer.

Add a Distributed Marketing Image Block

Follow these steps to add the Distributed Marketing image block to Content Builder.

Add a Distributed Marketing Image Block to an Email Template

Add a Distributed Marketing image block to an email template so that business users can choose the image used in the email. You can define up to 12 images per block area for business users to select from in the Image Library. At least one image must be defined. You can also let users add their own image using a URL or by uploading an image from their computer.

Image Content Block Options

Admins can set up an image library for users to choose from up to 12 images. Or, to add their own, they can use a URL or upload an image from their computer.

In Salesforce, navigate to the Image Block for a message. Choose either Image Library, URL, or Local.

Choose Image Library:

1. Click **Library**.
2. Select one of the available images from the dropdown menu. An admin can provide up to 12.

Choose URL:

1. Click **URL**.
2. Paste the URL into the text box.

3. Choose whether to link to the URL when the image is clicked.

Choose Local

1. Click **Local**.
2. Click **Browse** and locate the image on your computer. We recommend limiting the image size to about 3 MB.
3. The Upload Image window appears. Drag the red corner dots to crop the image.
4. Click **Upload**.



Note Image processing can take up to one minute. You see a message that the upload was successful and to wait while the image is published.

Add a Distributed Marketing Image Block

Follow these steps to add the Distributed Marketing image block to Content Builder.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To add the Distributed Marketing Image Block	Installed Package Administer permission
--	---

1. In Marketing Cloud Engagement, navigate to Setup.
2. Select **Apps** under Platform Tools.
3. Select **Installed Package**.
4. Select the Distributed Marketing Package, such as Distributed Marketing.
5. Select **Add Component**.
6. Select **Custom Content Block**.
7. Select **Next**.
8. Name the block, such as *Distributed Image*.
9. Add a description, such as *Allow DM business users to enter images*.
10. Click the appropriate link. A window opens showing the URL you must copy and paste into your browser.
 - a. If your organization uses Hyperforce, use this link: `https://distributed-marketing-content-blocks.s1.marketingcloudapps.com/image-block/v1/`
 - b. If your organization doesn't use Hyperforce, use this link: `https://distributed-marketing-content-blocks.{{stackKey}}.marketingcloudapps.com/image-block/v1/`

See Also

[Distributed Plain Text Block](#)

Add a Distributed Marketing Image Block to an Email Template

Add a Distributed Marketing image block to an email template so that business users can choose the image used in the email. You can define up to 12 images per block area for business users to select from

in the Image Library. At least one image must be defined. You can also let users add their own image using a URL or by uploading an image from their computer.

1. In Content Builder, drag the image block onto the canvas.
2. In Guidance Message, provide a message shown to business users while personalizing content.
3. To let users provide their own image using a URL, select **Allow users to provide their own image from a URL**.
4. Allow users to provide their own image from a local storage location.
5. To choose an image that users can select from when editing the email, click **Browse**. At least one image is required.
6. Select the image you want to make available.
7. Click **Select**.
8. In Selection Name, name the image.
9. In Alternate Text, enter the text to show for accessibility readers or if the image doesn't display.
10. In Link URL, enter the URL to open if the image is clicked.
11. To add more images for users to choose, select **Add Image**. You can add up to 12 images per block.

See Also

[Distributed Marketing Plain Text Block](#)

[Distributed Marketing Rich Text Block](#)

Distributed Plain Text Block

Give Marketing Cloud Engagement business users more flexibility when personalizing messages with the ability to enter plain text in a message. Use this text block to let users contextualize images and marketing content, create their own messages and personal notes, and more.

Add a Distributed Marketing Text Block

Follow these steps to add the Distributed Marketing text block to Content Builder.

Add a Distributed Marketing Plaintext Block to an Email Template

Add a plaintext block to your email templates so that users can enter custom plaintext.

Add a Distributed Marketing Text Block

Follow these steps to add the Distributed Marketing text block to Content Builder.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To add the Distributed Marketing Text Block:	Installed Package Administer permission.

To prevent marketers from sending emails with empty text blocks, navigate to Compliance & Approvals in Administration and enable the Prevent Empty Text Blocks feature.

1. In Marketing Cloud Engagement, navigate to Setup.

2. Select **Apps** under Platform Tools.
3. Select **Installed Packages**.
4. Select the Distributed Marketing Package, such as Distributed Marketing.
5. Select **Add Component**.
6. Select **Custom Content Block**.
7. Select **Next**.
8. Name the block, such as *Distributed Text*.
9. Add a description, such as *Allow DM business users to enter text*.
10. Click this link. A window opens showing the URL you must copy and paste into your browser.
 - a. If your organization uses Hyperforce, use this link: <https://distributed-marketing-content-blocks.sl.marketingcloudapps.com/free-text-block/v1/>
 - b. If your organization doesn't use Hyperforce, use this link: <https://distributed-marketing-content-blocks.{{stackKey}}.marketingcloudapps.com/free-text-block/v1/>

Add a Distributed Marketing Plaintext Block to an Email Template

Add a plaintext block to your email templates so that users can enter custom plaintext.

1. In Content Builder, drag the block onto the canvas.
2. For Guidance Message, enter the message shown to business users while personalizing content.
3. For Selection Name, name the text area.
4. In Character Limit, enter the maximum number of characters the user can enter in the text block.

See Also

[Distributed Marketing Image Block](#)

[Distributed Marketing Rich Text Block](#)

Distributed Rich Text Block

Give Marketing Cloud Engagement business users more flexibility when personalizing messages with the ability to enter formatted text in a message. Use this to let users contextualize images and marketing content, create their own messages and personal notes, and more.

[Add A Distributed Marketing Rich Text Block](#)

Follow these steps to add the Distributed Marketing rich text block to Content Builder.

[Add a Distributed Marketing Rich Text Block to an Email Template](#)

Add a rich text block to your email template so that business users can enter formatted text, including apply bold, italic, or underline formatting, set the justification, and embed hyperlinks.

Add A Distributed Marketing Rich Text Block

Follow these steps to add the Distributed Marketing rich text block to Content Builder.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To add the Distributed Marketing Rich Text Block: Installed Package | Administer permission.

1. In Marketing Cloud Engagement, navigate to Setup.
2. Select **Apps** under Platform Tools.
3. Select **Installed Package**.
4. Select the Distributed Marketing Package, such as Distributed Marketing.
5. Select **Add Component**.
6. Select **Custom Content Block**.
7. Select **Next**.
8. Name the block. For example: Distributed Rich Text.
9. Add a description. For example: Allow DM business users to enter formatted text.
10. Click the appropriate link. A window opens showing the URL you must copy and paste into your browser.
 - a. If your organization uses Hyperforce, use this link: `https://distributed-marketing-content-blocks.s1.marketingcloudapps.com/rich-text-block/v1/`
 - b. If your organization doesn't use Hyperforce, use this link: `https://distributed-marketing-content-blocks.{{stackKey}}.marketingcloudapps.com/rich-text-block/v1/`

See Also

[Distributed Image Block](#)

[Distributed Plain Text Block](#)

Add a Distributed Marketing Rich Text Block to an Email Template

Add a rich text block to your email template so that business users can enter formatted text, including apply bold, italic, or underline formatting, set the justification, and embed hyperlinks.

1. In Content Builder, drag the rich text block onto the canvas.
2. For Guidance Message, enter the message shown to business users while personalizing content .
3. For Selection Name, name the text area .
4. In Character Limit, enter the maximum number of characters the user can enter in the text block.

See Also

[Distributed Image Block](#)

[Distributed Plain Text Block](#)

Distributed Phrases Block

Create a single template to reuse for similar emails with the new Phrases content block in Distributed Marketing.

[Add a Distributed Marketing Phrases Block](#)

Add a phrase block to Content Builder so that users can enter custom phrases.

Add a Distributed Marketing Phrase Block to an Email Template

Add a phrase block to your email template

Add a Distributed Marketing Phrases Block

Add a phrase block to Content Builder so that users can enter custom phrases.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To add the Distributed Marketing Phrases Block	Installed Package Administer permission

1. In Marketing Cloud Engagement, go to Setup.
2. Under Platform Tools, select **Apps**.
3. Select **Installed Package**.
4. Select the Distributed Marketing Package.
5. Select **Add Component**.
6. Select **Phrases Block**, and click **Next**.
7. Name the block, such as *Distributed Phrase*.
8. Add a description, such as *Allow DM business users to enter phrases*.
9. Click the link, and copy the appropriate URL into your browser.
 - If your organization uses Hyperforce, use this link: <https://distributed-marketing-content-blocks.s1.marketingcloudapps.com/phrases-block/v1/>
 - If your organization doesn't use Hyperforce, use this link: <https://distributed-marketing-content-blocks.{{stackKey}}.marketingcloudapps.com/phrases-block/v1/>

Add a Distributed Marketing Phrase Block to an Email Template

Add a phrase block to your email template

1. In Content Builder, drag the Phrases block onto the canvas.
2. In Guidance Message, enter a message to business users while personalizing the content.
3. To provide a phrase that users can select when editing the email, click **Browse**. At least one phrase is required.
4. Select the phrase you want to make available.
5. Click **Select**.
6. In Selection Name, name the phrase.
7. Enter the maximum number of characters that the user can enter in the Phrases block.
8. To add more phrases for users to choose, select **Add Phrase**. You can add up to 12 phrases per block.

Distributed Multivariate Block

Give Marketing Cloud Engagement business users the ability to interact with content variations using the

multivariate content block. First, define a variable and up to 12 value options for the variable. Then, use the variable in your email AMPscript to define content variations, similar to dynamic content. Business users select from the options you define.

Here are examples of how you can use the multivariate content block.

- **Subject Line options:** Provide your business users with different subject line options.
- **Singular or Plural emails:** If your organization has individual users and teams of users, you can create a single email template that has a singular and a plural version of the email's body copy. For example, one version can say, I hope. And another version can say, We hope. Then, users can pick which version to send based on whether they're acting alone or as part of a team.
- **Language:** Provide your business users with a list of supported languages so they can choose the email's language for an individual or a group of individuals.
- **Tone:** Your organization favors using locked down content over user-created content, but your business users still want some control over the voice and tone of the content they send. Create different versions of email body copy to provide some flexibility without risking brand or legal compliance, such as a formal version, a brief version, and a friendly version.

Add a Distributed Marketing Multivariate Block

Follow these steps to add the Distributed Marketing multivariate block to Content Builder.

Add a Distributed Marketing Multivariate Block to an Email Template

Add a multivariate block with up to 12 options to your email templates so that business users can choose between content variations.

Add a Distributed Marketing Multivariate Block

Follow these steps to add the Distributed Marketing multivariate block to Content Builder.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To add the Distributed Marketing Multivariate Block	Installed Package Administer permission

1. In Marketing Cloud Engagement, navigate to Setup.
2. Select **Apps** under Platform Tools.
3. Select **Installed Package**.
4. Select the Distributed Marketing Package, such as Distributed Marketing.
5. Select **Add Component**.
6. Select **Custom Content Block**.
7. Select **Next**.
8. Name the block, such as *Distributed Content Variations*.
9. Add a description, such as *Allow DM business users to choose from content variations*.
10. Click this link. A window opens showing the URL you must copy and paste into your browser.
 - a. If your organization uses Hyperforce, use this link: <https://distributed-marketing-content->

`blocks.sl.marketingcloudapps.com/message-settings-block/v1/`

- b. If your organization doesn't use Hyperforce, use this link: `https://distributed-marketing-content-blocks.{{stackKey}}.marketingcloudapps.com/message-settings-block/v1/`

Add a Distributed Marketing Multivariate Block to an Email Template

Add a multivariate block with up to 12 options to your email templates so that business users can choose between content variations.

1. In Content Builder, drag a Distributed Multivariate block onto the canvas.
2. Enter a selection name.
3. Enter a guidance message, if applicable.
4. Enter the variable name. Variable names can be 50 alphanumeric characters with no spaces or special characters.
5. Provide at least two options for the business user. Options can contain a maximum of 80 characters.
6. Click Done Editing. The variable is now available for use in AMPscript throughout the content.



Tip Define Multivariate blocks before the variable is used in the content. As a best practice, place all multivariate blocks at the top of the email.



Example Your organization wants to provide its business users with a blank Happy Birthday email using Quick Send. Instead of using a single subject line, you can provide the users with subject line options. You can also add free-form text to your subject line by clicking the **Free-Form Text** option. First, create the email in Content Builder and drag a Distributed Marketing Multivariate block on the canvas. Configure it with something like the following:

- Selection Name: Subject Line
- Guidance Message: Select the subject line for this email
- Variable Name: customSubjectLine
- Option 1: Happy Birthday!
- Option 2: It's Your Special Day!
- Option 3: Enjoy this birthday treat on us!

Then, in the subject line, enter AMPscript using your new variable instead of a static subject line. For example, `%%=v(@customSubjectLine)=%%`.

Reference a Distributed Marketing Content Block

You can use Distributed Marketing content blocks as reference blocks. Reference blocks allow marketers to create a content block one time, and then use it again in multiple emails. When you change the content block, emails referencing that content block are automatically updated.

For example, if you create a Distributed Marketing Image Block that contains a full-color and gray-scale version of your logo, you can reference that block on all Distributed Marketing content. To update your logo for a holiday, update the Distributed Marketing Content Block one time, and all content referencing

that block automatically has the updated logo.

Follow these steps to use a content block as a reference block.

1. In Content Builder, drag the Reference Content Block to a content area.
2. Click the block to edit.
3. Select a Distributed Marketing Content Block.
4. Click Select.
5. Click Done Editing or Save.

Enable Custom SMS Messages

Add AMPscript to SMS messages to allow a user to write and send a custom SMS message through Distributed Marketing. SMS messages are sent through journeys using the MobileConnect SMS message activity.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To enable a custom SMS message:	Access to App Builder or Experience Builder

Considerations:

- Custom SMS messages are available in all Quick Send workflows except Quick Send Bulk Send where SMS isn't supported.
- The default maximum character limit is 160. You can configure this limit to up to 500 characters in [Settings](#).
- Distributed Marketing is optimized for GSM characters only. Distributed Marketing doesn't programmatically prevent users from entering or sending non-GSM characters. However, the maximum character count doesn't automatically update to reflect new character limits per message. If a user includes non-GSM characters, up to three messages can be sent.

To enable a custom SMS message, configure an SMS message activity with the following settings in Journey Builder:

1. In Message Definition, enter this AMPscript in the message:

```
%%[Set @smsValue = AttributeValue("smsValue")]%%%v(@smsValue)=%%
```

2. In Delivery Options, select the **Send only to contacts who are subscribed currently** subscriber option-in option.
3. Finish creating the SMS activity.



Note smsValue must be included in the journey's entry event data extension.

See Also

[Create Entry Event Data Extension](#)

[Create the SMS Activity in Journey Builder](#)

Personalization Data Extension

Distributed Marketing creates personalization data extensions in Marketing Cloud Engagement to store personalization data Distributed Marketing users enter when personalizing email messages. We automatically create a personalization data extension for you when you first connect a journey to a campaign or enable a journey for quick send. Custom SMS messages aren't stored here, but are available on the journey's event data extension.

You can find these data extensions in a folder nested under your root Data Extension folder. The folder is named **Distributed Marketing <sfOrgId> Data Extensions**, where <sfOrgId> equals your Org ID. For example, **Distributed Marketing 00D1I000002xfLyUAI Data Extensions**. By default, these data extensions don't include a retention policy.

Each journey has a unique personalization data extension named **PersonalizationDE_<sfOrgId>_<journeyId>**. For example, **PersonalizationDE_00D560000004xlfEAA_f960e193-c696-4247-8cba-ea6b83cc891c**. If this data extension is deleted or renamed, an error message displays stating that we can't locate the data extension. If a connected campaign is modified to connect to a different journey, the personalization data extension for the newly connected journey is used. If the data extension doesn't exist, a new one is created.

Each row in the personalization data extension contains one piece of personalization data per recipient, per running user. For example, you select a unique image for two members in a Journey with ID 1234 from Org ID ABC. Two rows are then created in the data extension called **PersonalizationDE_ABC_1234** in the folder **Distributed Marketing ABC Data Extensions**.

Each data extension row contains two columns, id and value:

	id	value
Description	Identifies what variable it is, such as hero_image, and is a combination of the CampaignMemberId, emailID, and blockId. For example, 00v1F000000Im0MQAS19059intro.	Contains the personalized content.
Primary Key	Yes	No
Type	Text	Text
Length	100	4000
Nullable	No	No

Use Legacy Personalization

You can continue to use the legacy Introduction, Conclusion, and Greeting personalization options until End of Support is announced.

 **Important** Support of legacy personalization options ends when the Distributed Marketing content blocks reach feature parity. We don't recommend using legacy personalization on any new content created. End of Support is announced on normal release communications.

 **Important** If you're using legacy personalization, corresponding profile attributes must still be used.

Enable Legacy Personalization

Use this procedure if you need to use the previous Introduction and Conclusion personalization methods. These methods will eventually be discontinued. We recommend using Distributed Marketing Content Blocks.

Update Content with Personalization AMPscript

Add AMPscript to messages in Marketing Cloud Engagement to create sections of content for standard Distributed Marketing users to personalize, such as greeting, introduction, and conclusion.

See Also

[Use Distributed Marketing Content Blocks](#)

Enable Legacy Personalization

Use this procedure if you need to use the previous Introduction and Conclusion personalization methods. These methods will eventually be discontinued. We recommend using Distributed Marketing Content Blocks.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To enable legacy personalization:	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace)
-----------------------------------	--

1. In Salesforce, from the App Launcher, find and open **Distributed Marketing Administration**.
2. In the Legacy Personalization section, enable **Legacy Personalization**.

Update Content with Personalization AMPscript

Add AMPscript to messages in Marketing Cloud Engagement to create sections of content for standard Distributed Marketing users to personalize, such as greeting, introduction, and conclusion.

 **Important** If the same email is used in multiple activities within a single journey, Distributed

Marketing can't provide unique personalization per message. To provide unique personalization, duplicate the email and use it in subsequent activities.

1. To create an introduction for personalization, enter this AMPscript in the email:

```
%%[
Set @sfOrgId = sfOrgId
Set @intro = intro
Set @objectId = IIF(EMPTY(sfCampaignMemberId), id, sfCam
paignMemberId)
Set @journeyId = RegExMatch(journeyId,"^[0-9a-f]{8}-
[0-9a-f]{4}-[1-5][0-9a-f]{3}-[89ab][0-9a-f]{3}-[0-9a-f]{12}$",1)
Set @personalizeDE = Concat("PersonalizationDE", "_" ,
@sfOrgId, "_", @journeyId)
Set @personalizeId = Concat(@objectId,_emailId,"intro")
IF EMPTY(@intro) THEN
set @introMsg = Lookup(@personalizeDE,"value","id",@pers
onalizeId)
ELSE THEN
set @introMsg = @intro
ENDIF
]%%
%%=v(@introMsg)=%%
```

2. To create a conclusion for personalization, enter this AMPscript in the email:

```
%%[
Set @sfOrgId = sfOrgId
Set @closing = closing
Set @objectId = IIF(EMPTY(sfCampaignMemberId), id, sfCam
paignMemberId)
Set @journeyId = RegExMatch(journeyId,"^[0-9a-f]{8}-
[0-9a-f]{4}-[1-5][0-9a-f]{3}-[89ab][0-9a-f]{3}-[0-9a-f]{12}$",1)
Set @personalizeDE = Concat("PersonalizationDE", "_" ,
@sfOrgId, "_", @journeyId)
Set @personalizeId = Concat(@objectId,_emailId,"closin
g")
IF EMPTY(@closing) THEN
set @closingMsg = Lookup(@personalizeDE,"value","id",@pe
rsonalizeId)
ELSE THEN
set @closingMsg = @closing
```

```
ENDIF  
] %%  
%%=v (@closingMsg) =%%
```

3. To enable greeting for personalization, enter this AMPscript in the email: %%greeting%%

See Also

[Introduction to AMPscript](#)

Enhance Distributed Marketing

Enhance Distributed Marketing functionality to fit your company's needs. To extend the message personalization flow, create custom personalization interactions. Extend the Distributed Marketing payload to include more data for journey decisions, content personalization, and more.

Add Custom Personalization Interactions

The Distributed Marketing personalization flow includes these interaction tabs: Edit and Send Settings. Add one or more interaction tabs for more complex use cases, such as carbon copying or sending to alternate email addresses. To extend Distributed Marketing interactions, create a custom external integration Lightning component, register it with Distributed Marketing, and name the new tab in Distributed Marketing Administration.

Add Custom Personalization Interactions for Bulk Sends

You can make custom personalization interaction tabs available in the Bulk Send workflow, including Auto Send. To extend Distributed Marketing interactions, create an Apex class. Then register the new Apex class, a custom interaction Lightning component, with Distributed Marketing. Optionally, name the new tab in Distributed Marketing Administration. Custom personalization interactions can be approved individually or for all quick sends.

Extend Entry Source Data

Distributed Marketing includes a standard set of fields used to populate the associated journey's entry source data extension. You can add fields to the standard set to include data from contact or lead objects. When a campaign member is approved through Distributed Marketing or when a Quick Send message is sent, the values of the additional data fields for the underlying contact or lead are added to the entry source data extension in Marketing Cloud Engagement. Use this data for Marketing Cloud Engagement journey decisions, content personalization, and more.

Add Custom Personalization Interactions

The Distributed Marketing personalization flow includes these interaction tabs: Edit and Send Settings. Add one or more interaction tabs for more complex use cases, such as carbon copying or sending to alternate email addresses. To extend Distributed Marketing interactions, create a custom external integration Lightning component, register it with Distributed Marketing, and name the new tab in Distributed Marketing Administration.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To add custom personalization interactions:	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace)

All Custom Personalization Interactions can add and modify the same custom data properties for each member. Two separate custom tabs can overwrite each other if you save changes using the same data properties. This can cause conflicts or, if intentional, can enable multiple tabs to work together.

1. [Configure an External Integration Component](#)

The first step to create an interaction in Distributed Marketing is to configure an external integration component. Your component works with Distributed Marketing as follows.

2. [Register Component with Distributed Marketing](#)

After building the external integration component for the new interaction tab, register your component with Distributed Marketing. This registration allows Distributed Marketing to render your custom interaction within the personalization modal. Insert a

`mcdm_15__JourneyApprovalsPlugin__c` record for the external integration component.

3. [Name the Custom Tab](#)

To complete the setup of your new personalization interaction in Distributed Marketing, name the custom tab for the component you created and registered. If you don't name the tab, the tab name defaults to More.

4. [Remove a Custom Personalization Interaction](#)

To remove your custom interaction from the personalization modal in Distributed Marketing, delete the registered external integration component.

5. [Custom Personalization Interaction Examples](#)

Use these common use case examples to guide your custom personalization interaction setup in Marketing Cloud Engagement.

See Also

[Components](#)

Configure an External Integration Component

The first step to create an interaction in Distributed Marketing is to configure an external integration component. Your component works with Distributed Marketing as follows.

1. When the personalization window is loaded, Distributed Marketing calls an interface method on the integration component with the list of selected members.
2. Standard Distributed Marketing users interact with the external integration component as you define. For example, select a value from a pick list populated with available alternate email addresses.
3. The external integration component can fire an event anytime with custom data for individual campaign members. To set custom data for multiple members, multiple events can fire.

Your custom component must be flagged as global and implement the

`mcdm_15:MessagePersonalizationHandler` interface.

To use this interface, create an `Aura.Action` attribute named `personalizationReadyHandler` with a default method to capture the list of selected members when the personalization window loads. Each selected member object contains properties such as the campaign member's name and ID. Your component can use these properties to further customize your user experience.

```
<aura:component access="GLOBAL" implements="mcdm_15:MessagePersonalizationHandler">

    <aura:attribute
        access="GLOBAL"
        name="personalizationReadyHandler"
        type="Aura.Action"
        default="{!c.messagePersonalizationReady}"
    />

    Hello, world!
</aura:component>
```

This example controller method accepts the list of selected pending campaign members and sets custom data for each member by firing an `mcdm_15:JourneyApprovalsDataProvided` event for each one. Each approved member's record in the associated journey's event data extension receives the value `bar` for the custom field `foo`.

```
({
    //Handler for action personalizationReadyHandler to receive member data
    messagePersonalizationReady: function(component, data) {
        // Get array of members (JourneyApproval objects)
        var members = data.getParam('arguments').members;

        // Loop through each member
        members.forEach(function(member) {
            // Get, configure and Fire an event (e.mcdm_15:JourneyApprovalsDataProvided)
            // with updated custom data for each member.
            $.get('e.mcdm_15:JourneyApprovalsDataProvided')
                .setParams({
                    id: member.campaignMemberId,
                    data: {
                        'foo' : 'bar'
                    }
                })
                .fire();
        });
    }
})
```

```

        });
    }
})

```

This outline includes the shape of each selected member object, called a JourneyApproval object. You can reference this data within your external integration component.

```

JourneyApproval: {
    /**
     * The ID of the Marketing Cloud Engagement Journey.
     *
     * @type {String}
     */
    externalJourneyId,

    /**
     * The Salesforce ID of the associated Contact or Lead object.
     *
     * @type {String}
     */
    objectId,

    /**
     * The type of Campaign Member object, e.g. Lead or Contact.
     *
     * @type {String}
     */
    objectType,

    /**
     * The Salesforce ID of the associated Campaign.
     *
     * @type {String}
     */
    campaignId,

    /**
     * The Salesforce ID of the associated Campaign Member
     *
     * @type {String}
     */
    campaignMemberId,

    /**

```

```

    * The first name of the associated Campaign Member.
    *
    * @type {String}
    */
    firstName,

    /**
     * The last name of the associated Campaign Member.
     *
     * @type {String}
     */
    lastName,

    /**
     * Maps messages to personalization values via their ID's.
     *
     * e.g., introduction and closing values for the message
     * with ID 'abc' can be accessed on a JourneyApproval object
     * using the following syntax:
     * journeyApproval.messages['abc'].introduction
     * journeyApproval.messages['abc'].closing
     *
     * @type {Object}
     */
    messages,

    /**
     * The currently selected greeting option.
     *
     * This object contains the following properties:
     * greeting.label - The UI display text
     * greeting.value - The greeting payload
     *
     * @type {Object}
     */
    greeting,

    /**
     * A map of key value pairs set by a registered
     * plugin component
     *
     * @type {Object}
     */
    customData,

```

```

    /**
     * The current status (Pending, Rejected, Failed) of
     * the associated Campaign Member.
     *
     * @type {String}
     */
    status
}

```

See Also[Components](#)

Register Component with Distributed Marketing

After building the external integration component for the new interaction tab, register your component with Distributed Marketing. This registration allows Distributed Marketing to render your custom interaction within the personalization modal. Insert a `mcdm_15__JourneyApprovalsPlugin__c` record for the external integration component.

1. In Salesforce, navigate to **Developer Console**.
2. Click **Debug**.
3. Click **Open Execute Anonymous Window**.
4. Enter this code in the window, updating `c:example` with the name of your component.

```

mcdm_15__JourneyApprovalsPlugin__c mapping = new
mcdm_15__JourneyApprovalsPlugin__c(mcdm_15__Component_Name__c='c:example');
insert mapping;

```

5. Execute the code.

Name the Custom Tab

To complete the setup of your new personalization interaction in Distributed Marketing, name the custom tab for the component you created and registered. If you don't name the tab, the tab name defaults to More.

1. From the App Launcher, find and select **Distributed Marketing Administration**.
2. From Configuration, in the Personalization Modal, find Customer Personalization Interactions and provide a tab name for each registered component.
3. Apply the changes.

Your new interaction tab is active in Distributed Marketing.

Remove a Custom Personalization Interaction

To remove your custom interaction from the personalization modal in Distributed Marketing, delete the registered external integration component.

1. In Salesforce, navigate to **Developer Console**.
2. Click **Debug**.
3. Click **Open Execute Anonymous Window**.
4. Enter this code in the window.

```
mcdm_15__JourneyApprovalsPlugin__c[] results = [SELECT mcdm_15__Component_Name__c FROM mcdm_15__JourneyApprovalsPlugin__c WHERE mcdm_15__Component_Name__c = 'c:example'];
delete results;
```

5. Execute the code.

Custom Personalization Interaction Examples

Use these common use case examples to guide your custom personalization interaction setup in Marketing Cloud Engagement.

Example 1: Custom Subject Line

This Custom Personalization Interaction example allows a user to specify a custom subject to override the default subject. There's an entry for the custom subject in your Marketing Cloud Engagement Data Extension and in your Profile Attributes. In this example we use the customSubjectLine field. In Marketing Cloud Engagement, edit the email and select a dynamic subject. Click the lightning bolt below the subject.

Specify a default subject and create a rule. The subject for this new rule is `%%customSubjectLine%%`. Drag in the customSubjectLine profile attribute into the filters and change "is equal to" to "isn't empty." Save all the changes and save the email.

```
customSubjectLine.cmp
<aura:component access="GLOBAL" implements="mcdm_15:MessagePersonalizationHandler">
    <aura:attribute
        access="GLOBAL"
        name="personalizationReadyHandler"
        type="Aura.Action"
        default="{!c.messagePersonalizationReady}"
    />
```

```

<aura:attribute name="customSubjectLine" access="private" type="String" description="Custom email subject line"/>
    <aura:attribute name="selectedMembers" access="private" type="Object[]" description="The currently selected object"/>

    <aura:handler name="init" value="{!this}" action="{!c.init}"/>
<lightning:spinner variant="brand" size="large" aura:id="mySpinner"/>

    <div class="slds-card">
        <div class="slds-card__header">
            <div class="slds-media slds-media_center">
                <div class="slds-media__figure">
                    <lightning:icon iconName="custom:custom24" size="large"/>
                </div>
                <div class="slds-media__body">
                    <p class="slds-text-heading_small">Custom subject line demo component</p>
                    <p>Every change fires a <span class="slds-theme_shade">mcd
m_15:JourneyApprovalsDataProvided</span> event</p>
                </div>
            </div>
        </div>

        <div class="slds-card__body slds-card__body_inner">
            <div>
                <p class="slds-text-title slds-text-align_center">'!{v.selectedMembers.length}' user(s) selected</p>
            </div>
            <div class="slds-m-around_medium">
                <lightning:input class="slds-m-bottom_small" label="Custom Subject Line" value="{!v.customSubjectLine}" onchange="{!c.handleInputChanged}"/>
            </div>
        </div>
    </div>
</aura:component>
customSubjectLineController.js
({
    init: function(cmp) {
        cmp.set('v.selectedMembers', []);
    },

    // Handler called when component is ready and receives a list of
    // members being personalized including all relevant information
    // required to customize member personalization

```

```

messagePersonalizationReady: function(cmp, event) {
    var selectedMembers = event.getParam('arguments').members;
    cmp.set('v.selectedMembers', selectedMembers);
    if (selectedMembers.length) {
        // In this example, the custom subject applies to all members
        // so we can grab the customData from the first member
        var data = selectedMembers[0].customData || {};
        cmp.set('v.customSubjectLine', data.customSubjectLine || '');
    }
    var spinner = cmp.find('mySpinner');
    $A.util.addClass(spinner, 'slds-hide');
},

// Handles changes to the text field (Subject)
// On each key down, this handler will store the custom
// subject changes in each members custom data
handleInputChanged: function(cmp) {
    var data = {
        customSubjectLine: cmp.get('v.customSubjectLine')
    };

    var selectedMembers = cmp.get('v.selectedMembers'),
        id,
        dataProvidedEvent;

    // Loop through each member and fire an event to update its custom
    // data with the new changes
    selectedMembers.forEach(function(member) {
        dataProvidedEvent = $A.get('e.mcdm_15:JourneyApprovalsDataProvide
d');

        // Depending on whether we're dealing with a campaign or quick send
        // use the campaignMemberId or fallback to the objectId which will
        // be present in all other cases.
        id = member.campaignMemberId || member.objectId;
        dataProvidedEvent.setParams({
            id: id,
            data: data
        });
        dataProvidedEvent.fire();
    });
}
})

```

Example 2: Custom Send From (Team Sending)

This Custom Personalization Interaction example allows a user to change who the email is coming from by specifying a member of the same group.

Create an apex class to retrieve the group members.

```

GroupMemberController.apxc
public with sharing class GroupMembersController {
    @AuraEnabled
    public static List<User> getGroupMembers() {
        String currentUser = UserInfo.getUserId();
        GroupMember myGroup = [SELECT GroupId FROM GroupMember WHERE UserOrGroupId = :currentUser];

        List<User> groupMembers = [
            SELECT Name, Email from User WHERE Id in (SELECT userorgroupid from groupmember where group.Id = :myGroup.GroupId)
        ];

        return groupMembers;
    }
}

sendFromGroupMember.cmp
<aura:component access="GLOBAL" implements="mcdm_15:MessagePersonalizationHandler" controller="GroupMembersController">
    <aura:attribute access="GLOBAL" name="personalizationReadyHandler" type="Aura.Action" default="{!c.messagePersonalizationReady}"/>

    <aura:attribute name="selectedMembers" access="private" type="Object[]" description="The currently selected object"/>
    <aura:attribute name="groupMembers" access="private" type="List" description="List of group members"/>
    <aura:attribute name="sendFromValue" access="private" type="Integer" default="0" description="Value of selected send from" />

    <aura:handler name="init" value="{!this}" action="{!c.init}"/>

    <lightning:spinner variant="brand" size="large" aura:id="mySpinner"/>

    <div class="slds-card">
        <div class="slds-card__header">
            <div class="slds-media slds-media_center">
                <div class="slds-media__figure">
                    <lightning:icon iconName="custom:custom24" size="large"/>
                </div>
                <div class="slds-media__body">

```



```

        <p class="slds-text-heading_small">Send From Group Member D
emo</p>

        <p>Every change fires a <span class="slds-theme_shade">mcd
m_15:JourneyApprovalsDataProvided</span> event</p>
    </div>
</div>
</div>

<div class="slds-card__body slds-card__body_inner">
    <div>
        <p class="slds-text-title slds-text-align_center">' {!v.selected
Members.length}' user(s) selected</p>
    </div>
    <div class="slds-m-around_medium">
        <lightning:select aura:id="selectGroupMembers" class="slds-m-bo
ttom_small" name="selectGroupMembers" label="Send From Group Member" valu
e="{!v.sendFromValue}" onchange="{!c.handleSelectChanged}">
            <option value="">-- None --</option>
            <aura:iteration items="{!v.groupMembers}" var="member">
                <option value="{!_index}" text="{!member.Name}"></optio
n>
            </aura:iteration>
        </lightning:select>
    </div>
</div>
</div>
</aura:component>
sendFromGroupMemberController.js
({
    init: function(cmp, event, helper) {
        cmp.set('v.selectedMembers', []);
    },

    // Handler called when component is ready and receives a list of
    // members being personalized including all relevant information
    // required to customize member personalization
    messagePersonalizationReady: function(cmp, event, helper) {
        var selectedMembers = event.getParam('arguments').members;
        cmp.set('v.selectedMembers', selectedMembers);

        helper.fetchGroupMembers(cmp)
            .then(function(groupMembers) {
                if (selectedMembers.length) {
                    // In this example, the custom subject applies to all members

```

```

        // so we can grab the customData from the first member
        var data = selectedMembers[0].customData || {};

        // Go through group members update selected value if a value
        // was previously selected
        for (var i=0; i<groupMembers.length; i++) {
            if (groupMembers[i].Email == data.customSendFromEmail) {
                cmp.find("selectGroupMembers").set("v.value", i);
            }
        }
    }
    var spinner = cmp.find('mySpinner');
    $A.util.addClass(spinner, 'slds-hide');
});
},

// Handles changes to send from group member drop down
// and updates all members custom data
handleSelectChanged: function(cmp, event) {
    var members = cmp.get('v.groupMembers'),
        selectedMembers = cmp.get('v.selectedMembers'),
        id,
        dataProvidedEvent,
        value = cmp.find('selectGroupMembers').get('v.value'),
        data;

    if (value != "") {
        cmp.set('v.sendFromValue', value);
        data = {
            customSendFromEmail: members[value].Email,
            customSendFromName: members[value].Name
        };
    } else {
        data = {};
    }

    // Loop through each member and fire an event to update its custom
    // data with the new changes
    selectedMembers.forEach(function(member) {
        dataProvidedEvent = $A.get('e.mcdm_15:JourneyApprovalsDataProvide
d');

        // Depending on whether we're dealing with a campaign or quick send
        // use the campaignMemberId or fallback to the objectId which will
        // be present in all other cases.

```

```

        id = member.campaignMemberId || member.objectId;
        dataProvidedEvent.setParams({
            id: id,
            data: data
        });
        dataProvidedEvent.fire();
    });
}
})
sendFromGroupMemberHelper.js
({
    // Fetches members in the same group as the logged in user and returns
    // a promise.
    // https://developer.salesforce.com/docs/atlas.en-us.lightning.meta/lightning/js_promises.htm
    fetchGroupMembers : function(cmp) {
        return new Promise($A.getCallback(function(resolve, reject) {
            var action = cmp.get('c.getGroupMembers');
            action.setCallback(this, function(response) {
                if (!cmp.isValid() || response.getState() !== 'SUCCESS') {
                    reject(response.getError());
                } else {
                    cmp.set('v.groupMembers', response.getReturnValue());
                    resolve(response.getReturnValue());
                }
            });

            $A.enqueueAction(action);
        }));
    }
})

```

Example 3: Modify Specific Members

This Custom Personalization Interaction example allows a user to customize different values for each member.

```

modifySpecificMember.cmp
<aura:component access="GLOBAL" implements="mcdm_15:MessagePersonalizationHandler">
    <aura:attribute access="GLOBAL" name="personalizationReadyHandler" type="Aura.Action" default="{!c.messagePersonalizationReady}"/>

    <aura:attribute name="selectedMembers" access="private" type="Object[]" des

```

```

cription="The currently selected object"/>
    <aura:attribute name="selectedMemberIndex" access="private" type="Integer"
default="null" description="Index of the selected member"/>
    <aura:attribute name="selectedMemberId" access="private" type="String" desc
ription=""/>
    <aura:attribute name="selectedMemberData" access="private" type="String" de
scription="Custom data for member"/>

    <aura:handler name="init" value="{!this}" action="{!c.init}"/>

    <lightning:spinner variant="brand" size="large" aura:id="mySpinner"/>

    <div class="slds-card">
        <div class="slds-card__header">
            <div class="slds-media slds-media_center">
                <div class="slds-media__figure">
                    <lightning:icon iconName="custom:custom24" size="large"/>
                </div>
                <div class="slds-media__body">
                    <p class="slds-text-heading_small">Modify specific members
demo</p>
                    <p>Every change fires a <span class="slds-theme_shade">mcd
m_15:JourneyApprovalsDataProvided</span> event</p>
                </div>
            </div>
        </div>

        <div class="slds-card__body slds-card__body_inner">
            <div>
                <p class="slds-text-title slds-text-align_center">' {!v.selected
Members.length}' user(s) selected</p>
            </div>
            <div class="slds-m-around_medium">
                <lightning:select aura:id="member" class="slds-m-bottom_small"
name="memberCustom" label="member custom data" onchange="{!c.handleMemberChang
ed}" value="{!v.selectedMemberIndex}">
                    <option value="">Select a member</option>
                    <aura:iteration items="{!v.selectedMembers}" var="member">
                        <option value="{!_index}" text="{!member.firstName + '
' + member.lastName}"></option>
                    </aura:iteration>
                </lightning:select>

                <aura:if isTrue="{!not(empty(v.selectedMemberId))}">

```

```

        <lightning:input class="slds-m-bottom_small" label="Custom
Member Data" value="{!v.selectedMemberData}" onchange="{!c.handleInputChange
d}"/>

        </aura:if>
    </div>
</div>
</div>
</aura:component>
modifySpecificMemberController.js
({
    init: function(cmp, event, helper) {
        cmp.set('v.selectedMembers', []);
    },

    // Handler called when component is ready and receives a list of
    // members being personalized including all relevant information
    // required to customize member personalization
    messagePersonalizationReady: function(cmp, event) {
        var selectedMembers = event.getParam('arguments').members;
        cmp.set('v.selectedMembers', selectedMembers);

        var spinner = cmp.find('mySpinner');
        $A.util.addClass(spinner, 'slds-hide');
    },

    // Handle change in member list drop down. Restore previously saved
    // custom data for member. Display text input box for selected
    // member.
    handleMemberChanged: function(cmp, event) {
        var selectedMemberIndex = parseInt(cmp.get('v.selectedMemberIndex'));
        var selectedMembers = cmp.get('v.selectedMembers');

        if(!isNaN(selectedMemberIndex)) {
            // Set member id (contact or campaignMemberId)
            cmp.set('v.selectedMemberId', selectedMembers[selectedMemberIndex].campaignMemberId || selectedMembers[selectedMemberIndex].objectId);

            // Check if we've previously stored custom data for member. if so,
            // restore it
            if (selectedMembers[selectedMemberIndex].customData.customValue != undefined) {
                cmp.set('v.selectedMemberData', selectedMembers[selectedMemberIndex].customData.customValue);
            } else {

```

```

        cmp.set('v.selectedMemberData', "");
    }
} else {
    cmp.set('v.selectedMemberIndex', null);
    cmp.set('v.selectedMemberId', "");
}
},

// Handles changes to member custom data. Fired every change
handleInputChanged: function(cmp, event) {
    var dataProvidedEvent = $A.get('e.mcdm_15:JourneyApprovalsDataProvide
d');

    var selectedMembers = cmp.get('v.selectedMembers');
    var selectedMemberId = cmp.get('v.selectedMemberId');
    var selectedMemberIndex = parseInt(cmp.get('v.selectedMemberIndex'));

    // Also store local value so we can repopulate field if we change
    // members without reloading the CPI. Fired events store the
    // members custom data outside the CPI context and is only retrieved
    // on component load.
    selectedMembers[selectedMemberIndex].customData.customValue = cmp.ge
t('v.selectedMemberData');

    dataProvidedEvent.setParams({
        id: selectedMemberId,
        data: {
            customValue: cmp.get('v.selectedMemberData')
        }
    });
    dataProvidedEvent.fire();
}
})

```

Add Custom Personalization Interactions for Bulk Sends

You can make custom personalization interaction tabs available in the Bulk Send workflow, including Auto Send. To extend Distributed Marketing interactions, create an Apex class. Then register the new Apex class, a custom interaction Lightning component, with Distributed Marketing. Optionally, name the new tab in Distributed Marketing Administration. Custom personalization interactions can be approved individually or for all quick sends.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To add custom personalization interactions for Bulk Sends:	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace)

The Custom Personalization Interaction for Bulk Send workflow accepts input on the front end using a customer-defined Lightning Component. This front-end input gets passed to the back end in the customer-defined Apex class. Implement the Apex class in the Distributed Marketing (mcdm_15) BulkSendPlugin interface. After the CPI component is registered as a Bulk Send Plugin, it processes on the back end even when no input is provided on the front end. The customer's defined class determines how to process the data. Back-end processing executes in the order that the CPI components are registered. Each successive component processing class can access the previously processed data.

Create an Apex Class to Process Custom Personalization Information Input

For every Custom Personalization Interaction component that's registered, you must provide an Apex class, which implements the Distributed Marketing (mcdm_15) BulkSendPlugin interface.

Configure an External Integration Component for Bulk Sends

To create an interaction for bulk sends in Distributed Marketing, configure an external integration component.

Register Component with Distributed Marketing for Bulk Sends

To see your component on the personalization window, register your Custom Integration Component with Distributed Marketing after building it.

Custom Personalization Interaction Examples for Bulk Sends

Use these common use case examples to guide your custom personalization interaction setup for bulk sends.

Create an Apex Class to Process Custom Personalization Information Input

For every Custom Personalization Interaction component that's registered, you must provide an Apex class, which implements the Distributed Marketing (mcdm_15) BulkSendPlugin interface.

The Apex class you create must be global, and it must implement this getBulkSendPluginData method:

```
global static Map<String, Map<String, String>>
getBulkSendPluginData(List<mcdm_15.JourneyApproval> approvals
Map<String, String> pluginData)
```

This method takes a list of JourneyApproval objects and a map of the input plugin data. You then decide how to process that data. Here are some examples.

- You can have multiple CPI plugin components registered, each one using a different Apex class for processing.
- CPI plugins process in the order they're registered.

- Each successive plugin has access to the processed value of the previous plugin. Therefore, you can build on the processed custom plugin data with each plugin in the chain.
- The same `getBulkSendPluginData` method is called when the Bulk Send or Auto Send job processes and when the personalization preview appears during the Bulk Send workflow. Currently, there's no preview for the bulk custom plugin during an Auto Send workflow.
- Don't execute DML in this method. If you do, it breaks the Bulk Send workflow.
- Governor limits apply. Bulk sends are batched in up to 500 members per batch. You can execute SOQL calls in this method, but they must be bulkified as in [these examples](#).
- To avoid governor limit exceptions, use the Apex Limits class. `Limits.getQueries()` and `Limits.getLimitQueries()` help you determine if particular limits are close. We provide a custom exception called `mcdm_15.BulkSendCustomPluginException` that can be used from this method. Error messages for this exception show on the personalization preview or the Bulk Send job or Auto Send job details after processing.
- If a governor limit is thrown during processing, the job fails. We have a transaction Finalizer that runs at the end of a Bulk Send or Auto Send job. If an error is found, the error message appears on the job details. The status for all relevant campaign members is reset to allow for resending, and you receive a notification in your org.

Configure an External Integration Component for Bulk Sends

To create an interaction for bulk sends in Distributed Marketing, configure an external integration component.

Your Custom Personalization Interaction component must have its controller set to an Apex class name that implements the `BulkSendPlugin` interface for back-end processing. See “`BulkSendPluginImplOne`” in the `<aura:component>` in the code.

```
<aura:component access="GLOBAL" implements="mcdm_15:MessagePersonalizationHandler" controller="BulkSendPluginImplOne">
    <aura:attribute access="GLOBAL" name="personalizationReadyHandler" type="Aura.Action" default="{!c.messagePersonalizationReady}"/>

    <aura:attribute name="foo1" access="private" type="String" description="Variable foo1"/>

    <aura:attribute name="selectedMembers" access="private" type="Object[]" description="The currently selected object"/>

    <aura:handler name="init" value="{!this}" action="{!c.init}"/>

    <lightning:spinner variant="brand" size="large" aura:id="mySpinner"/>

    <div class="slds-card">
        <div class="slds-card__header">
```



```

        <div class="slds-media slds-media_center">
            <div class="slds-media__figure">
                <lightning:icon iconName="custom:custom24" size="large"/>
            </div>
            <div class="slds-media__body">
                <p class="slds-text-heading_small">Bulk Plugin One - foo
1</p>
                <p>Every change fires a <span class="slds-theme_shade">mcd
m_15:JourneyApprovalsDataProvided</span> event</p>
            </div>
        </div>
    </div>

    <div class="slds-card__body slds-card__body_inner">
        <div>
            <p class="slds-text-title slds-text-align_center">'!v.selecte
dMembers.length}' user(s) selected</p>
        </div>
        <div class="slds-m-around_medium">
            <lightning:input class="slds-m-bottom_small" label="foo1" valu
e="!v.foo1" onchange="!c.handleInputChanged"/>
        </div>
    </div>
</div>
</aura:component>

```

Input from the Custom Personalization Interaction component is tracked differently depending on the workflow. In Bulk Send for Campaign or Bulk Send for Quick Send List View, the CPI input is tracked as part of the customData on the selectedMember record. Auto Send has no selectedMember records in context, so CPI input is tracked in a separate customData parameter.

```

({
    init: function(cmp) {
        cmp.set('v.selectedMembers', []);
    },

    messagePersonalizationReady: function(cmp, event) {
        var selectedMembers = event.getParam('arguments').members;
        var customData = event.getParam('arguments').customData;
        cmp.set('v.selectedMembers', selectedMembers);

        if (selectedMembers.length) {
            var data = selectedMembers[0].customData || {};
            cmp.set('v.foo1', data.foo1 || '');
        }
    }
})

```

```

    } else if (customData != null) {
        var data = customData.autosend || {};
        cmp.set('v.fool', data.fool || '');
    }

    var spinner = cmp.find('mySpinner');
    $A.util.addClass(spinner, 'slds-hide');
},

handleInputChanged: function(cmp) {
    var data = {
        fool: cmp.get('v.fool')
    };

    var selectedMembers = cmp.get('v.selectedMembers'),
        id,
        dataProvidedEvent;

    if (selectedMembers.length) {
        selectedMembers.forEach(function(member) {
            dataProvidedEvent = $A.get('e.mcdm_15:JourneyApprovalsDataProvid
ided');

            id = member.campaignMemberId || member.objectId;
            dataProvidedEvent.setParams({
                id: id,
                data: data
            });
            dataProvidedEvent.fire();
        });
    } else {
        dataProvidedEvent = $A.get('e.mcdm_15:JourneyApprovalsDataProvide
d');

        dataProvidedEvent.setParams({
            id: 'autosend',
            data: data
        });
        dataProvidedEvent.fire();
    }
}
})
})

```

Register Component with Distributed Marketing for Bulk Sends

To see your component on the personalization window, register your Custom Integration Component

with Distributed Marketing after building it.

1. In Salesforce, navigate to **Developer Console**.
2. Click **Debug**.
3. Click **Open Execute Anonymous Window**.
4. Enter this code in the window, updating `c:BulkPluginOne` with the name of your component and updating `c:BulkSendPluginImp` with the name of your Apex class. To designate this plugin as available for Bulk Send and Auto Send workflows, ensure that `mcdm_15__IsBulkSendPlugin__c` is set to true.

```
SObject mapping = new mcdm_15__JourneyApprovalsPlugin__c(
    mcdm_15__Component_Name__c='c:BulkPluginOne',
    mcdm_15__ApexClassName__c = 'BulkSendPluginImplOne',
    mcdm_15__IsBulkSendPlugin__c = true);

insert mapping;
```

5. Execute the code.

Custom Personalization Interaction Examples for Bulk Sends

Use these common use case examples to guide your custom personalization interaction setup for bulk sends.

Example 1: Custom Subject Line with Title

This Bulk Send Custom Personalization Interaction example allows a user to specify a custom subject to override the default subject. This example includes adding the first name, last name, and title for the contacts or leads to the custom subject. There's an entry for the custom subject in your Marketing Cloud Engagement Data Extension and in your Profile Attributes. In this example, we use the `customSubjectLine` field.

In Marketing Cloud Engagement, edit the email and select a dynamic subject. Click the lightning bolt below the subject. Specify a default subject and create a rule. The subject for this new rule is `%%customSubjectLine%%`. Drag the `customSubjectLine` profile attribute into the filters and change “is equal to” to “isn't empty.” Save all the changes and save the email.

In this example, the Apex class is `BulkSendCustomTitleCPI.cls`.

```
// This plugin assumes a column is created on the DM Entry Source DE with "cus
tomSubjectLine"
// It returns a Map<String, Map<String, String>> which is the approval.objectI
d mapped to the key / value pairs
// that belong to your CPI, and the keys should map to DE Entry Source DE colu
```

```

mns if you add more.
global class BulkSendCustomTitleCPI implements mcdm_15.BulkSendPlugin {
    global static Map<String, Map<String, String>> getBulkSendPluginData(List<mcdm_15.JourneyApproval> approvals, Map<String, String> pluginData) {
        Map<String, Map<String, String>> IdsToCustomData = new Map<String, Map<String, String>>();
        Map<String, String> processedCustomData = new Map<String, String>();
        // Custom data passed in from front end component
        String key = 'customSubjectLine';

        // Here we get the title map from the contact / lead in context for each approval in the approvals list
        processedCustomData = getTitle(approvals);

        if (pluginData.size() > 0 && pluginData.get(key) != null && pluginData.get(key) != '') {
            for (mcdm_15.JourneyApproval approval : approvals) {
                Map<String, String> titleMap = new Map<String, String>();

                // Here we build the custom title which is title of the contact / lead + first name + last name + the value passed in from front end component
                // ex: Doctor John Doe, We are happy to have you!
                // Doctor is the title of John Doe contact
                // "We Are happy to have you!" is the custom text passed in
                titleMap.put(key, processedCustomData.get(approval.objectId) + ' ' + approval.campaignMemberFields.get('FirstName') + ' ' + approval.campaignMemberFields.get('LastName') + ', ' + pluginData.get(key));
                IdsToCustomData.put(approval.objectId, titleMap);
            }
        } else {
            // If no input is provided from the front end component, show a default title
            for (mcdm_15.JourneyApproval approval : approvals) {
                Map<String, String> titleMap = new Map<String, String>();
                titleMap.put(key, 'No Input from Bulk CPI');
                IdsToCustomData.put(approval.objectId, titleMap);
            }
        }

        // Return a map of approval object IDs to the custom data map of customSubjectLine -> value
        return IdsToCustomData;
    }
}

```

```

// In this example, we get the title for each contact
private static Map<String, String> getTitle(List<mcdm_15.JourneyApproval>
approvals) {
    Map<String, String> approvalsToTitle = new Map<String, String>();
    List<String> contactIds = new List<String>();
    List<String> leadIds = new List<String>();

    // Get the contact and lead IDs from the JourneyApproval records passe
d in
    for (mcdm_15.JourneyApproval approval : approvals) {
        if (approval.objectType == Schema.SObjectType.Contact.getName()) {
            contactIds.add(approval.objectId);
        } else if (approval.objectType == Schema.SObjectType.Lead.getNam
e()) {
            leadIds.add(approval.objectId);
        }
    }

    if (contactIds.size() > 0) {
        if (Limits.getQueries() == Limits.getLimitQueries()) {
            // Example of throwing a custom exception to handle govener li
mits in this custom plugin class
            throw new mcdm_15.BulkSendCustomPluginException('SOQL limit of
' + Limits.getLimitQueries() + ' reached.');
```

```

        // Get the title and return the map of contactId to title
        List<Lead> leads = [SELECT Id, Title FROM Lead WHERE Id IN :leadId
s];

        for (Lead lead : leads) {
            approvalsToTitle.put(lead.Id, lead.Title == null ? '' : lead.T
itle);
        }

        return approvalsToTitle;
    }
}

```

Here, the Aura Component is BulkSendCustomTitleCPI.cmp.

```

<aura:component access="GLOBAL" implements="mcdm_15:MessagePersonalizationHand
ler" controller="BulkSendCustomTitleCPI">
    <aura:attribute access="GLOBAL" name="personalizationReadyHandler" type="A
ura.Action" default="{!c.messagePersonalizationReady}"/>
    <aura:attribute name="customSubjectLine" access="private" type="String" de
scription="Custom subject line used in bulk CPI logic"/>
    <aura:attribute name="selectedMembers" access="private" type="Object[]" de
scription="The currently selected member"/>
    <aura:handler name="init" value="{!this}" action="{!c.init}"/>
    <lightning:spinner variant="brand" size="large" aura:id="mySpinner"/>
    <div class="slds-card">
        <div class="slds-card__header">
            <div class="slds-media slds-media_center">
                <div class="slds-media__figure">
                    <lightning:icon iconName="custom:custom24" size="large"/>
                </div>
                <div class="slds-media__body">
                    <p class="slds-text-heading_small">Bulk CPI - Custom subje
ct demo</p>
                </div>
            </div>
        </div>
        <div class="slds-card__body slds-card__body_inner">
            <div>
                <p class="slds-text-title slds-text-align_center">'!v.selecte
dMembers.length}' user(s) selected</p>
            </div>
            <div class="slds-m-around_medium">
                <lightning:input class="slds-m-bottom_small" label="customSubj

```

```

ectLine" value="{!v.customSubjectLine}" onchange="{!c.handleInputChanged}"/>
    </div>
  </div>
</div>
</aura:component>

```

Here, the Aura Component Controller is BulkSendCustomTitleCPI.js.

```

({
  init: function(cmp) {
    cmp.set('v.selectedMembers', []);
  },

  messagePersonalizationReady: function(cmp, event) {
    var selectedMembers = event.getParam('arguments').members;
    var customData = event.getParam('arguments').customData;
    cmp.set('v.selectedMembers', selectedMembers);

    if (selectedMembers.length) {
      var data = selectedMembers[0].customData || {};
      cmp.set('v.customSubjectLine', data.customSubjectLine || '');
    } else if (customData != null) {
      var data = customData.autosend || {};
      cmp.set('v.customSubjectLine', data.customSubjectLine || '');
    }

    var spinner = cmp.find('mySpinner');
    $A.util.addClass(spinner, 'slds-hide');
  },

  handleInputChanged: function(cmp) {
    // Get the data set from the component in the modal to pass to the
    // apex class for bulk send CPI, this will be appended to the logic
    // performed in the apex class.
    var data = {
      customSubjectLine: cmp.get('v.customSubjectLine')
    };

    var selectedMembers = cmp.get('v.selectedMembers'),
        id,
        dataProvidedEvent;

    if (selectedMembers.length) {
      selectedMembers.forEach(function(member) {

```

```

        dataProvidedEvent = $A.get('e.mcdm_15:JourneyApprovalsDataProv
ided');
        // Handles campaign vs quick send object IDs for preview updat
es
        id = member.campaignMemberId || member.objectId;
        dataProvidedEvent.setParams({
            id: id,
            data: data
        });
        dataProvidedEvent.fire();
    });
} else {
    dataProvidedEvent = $A.get('e.mcdm_15:JourneyApprovalsDataProvide
d');
    // Supports autosend flow
    dataProvidedEvent.setParams({
        id: 'autosend',
        data: data
    });
    dataProvidedEvent.fire();
}
}
})

```

Register using this anonymous Apex code.

```

SObject mapping = new mcdm_15__JourneyApprovalsPlugin__c(
    mcdm_15__Component_Name__c='c:BulkSendCustomTitleCPI',
    mcdm_15__ApexClassName__c = 'BulkSendCustomTitleCPI',
    mcdm_15__IsBulkSendPlugin__c = true);

insert mapping;

```

Extend Entry Source Data

Distributed Marketing includes a standard set of fields used to populate the associated journey's entry source data extension. You can add fields to the standard set to include data from contact or lead objects. When a campaign member is approved through Distributed Marketing or when a Quick Send message is sent, the values of the additional data fields for the underlying contact or lead are added to the entry source data extension in Marketing Cloud Engagement. Use this data for Marketing Cloud Engagement journey decisions, content personalization, and more.

Supported objects include Contact, Lead, Account (Person Account), Campaign, Case, Opportunity, and

Quick Send (API name for quick send `mcdm_15__QuickSendJourney__c`) related to the send, and Add Campaign Member.

For example, you can personalize messages with a custom phone number from the underlying lead or contact. Add the custom field to the Distributed Marketing payload by following these steps for each object.

1. In Salesforce, navigate to **Setup**.
2. Open **Developer Console**.
3. Click **Debug**.
4. Click **Open Execute Anonymous Window**.
5. Copy and paste the following Apex code. For `mcdm_15__DestinationName__c`, enter the name of the new data extension column as it appears in Marketing Cloud Engagement. For `mcdm_15__ObjectName__c`, enter the name of the underlying object containing the data. For `mcdm_15__SourceName__c`, enter the API name of the object field you'd like to add to your data extension.

```
mcdm_15__PersonalizationFieldMap__c personalizationFieldMap = new mcdm_15__PersonalizationFieldMap__c (
    mcdm_15__DestinationName__c='[Custom DE Column]',
    mcdm_15__ObjectName__c='[Lead or Contact]',
    mcdm_15__SourceName__c='[API Name of Field on Lead or Contact]'
);

insert personalizationFieldMap;
```

6. Execute the code.
7. In Marketing Cloud Engagement **Contact Builder**, locate the entry source data extension for the journey.
8. Add corresponding fields to the entry source data extension.
You can use the data in Marketing Cloud Engagement.



Example For example, to include a custom phone number field `companyContactPhone__c` in the standard injection payload, this code is executed in the Developer Console and `companyContactPhone__c` is added to the entry source data extension.

```
mcdm_15__PersonalizationFieldMap__c companyPhoneToDeColumnMapping = new mcdm_15__PersonalizationFieldMap__c (
    mcdm_15__DestinationName__c='companyPhoneNumber',
    mcdm_15__ObjectName__c='Contact',
    mcdm_15__SourceName__c='companyContactPhone__c'
);
```

```
insert companyPhoneToDeColumnMapping;
```

A column *companyPhoneNumber* is added to the default Distributed Marketing personalization table, which is used to generate the payload. When a campaign member is approved for receiving messages, the underlying contact's corresponding *companyContactPhone__c* is included in the Distributed Marketing payload and added to the data extension in Marketing Cloud Engagement.

See Also

[Entry Sources](#)

[Contact Builder in Marketing Cloud Engagement](#)

Use Distributed Marketing

Distributed Marketing provides tools, workflows, and experiences that help you better serve and engage your entire book of business.

Depending on how your organization configured Distributed Marketing, you can perform these tasks:

- Send a quick, one-off email to an individual or a segment of your book of business.
- Send multiple messages to a group of individuals without the worry of managing the touchpoint cadence.
- Collaborate on marketing approved content by typing your own message or choosing the image you want to use.

Discover Distributed Marketing Content

If your organization is set up to use Content Marketplaces, you can use them to easily find assets you can send. Each marketplace shows a collection of single messages or campaigns that you can access. Assets are sorted by their creation date, and each marketplace displays up to 9 assets at once. You can page through marketplaces with more than 9 assets, or select View All to see the complete list at once. To send the message, simply click the tile.

Interact with Distributed Marketing Content

Whether you're nurturing a lead sending a new customer a personalized welcome campaign, or just wishing a long-time client happy birthday, Distributed Marketing provides an easy-to-use interface to preview and send compelling emails and SMS messages. If your marketing teams have enabled content collaboration, simply click on the areas of the content you want to interact with and make it your own. Depending on your set-up, you can add personal notes, select the images used in email, send on behalf of other team members, and more.

Send Distributed Marketing Content

Distributed Marketing offers different workflows designed to help you reach your customers wherever you are in your Salesforce experience. After your marketing team sets up the workflows that make sense for you, use Quick Sends or Campaign Sends to send the perfect, personalized messages to your customers.

Discover Distributed Marketing Content

If your organization is set up to use Content Marketplaces, you can use them to easily find assets you can send. Each marketplace shows a collection of single messages or campaigns that you can access. Assets are sorted by their creation date, and each marketplace displays up to 9 assets at once. You can page through marketplaces with more than 9 assets, or select View All to see the complete list at once. To send the message, simply click the tile.

Interact with Distributed Marketing Content

Whether you're nurturing a lead sending a new customer a personalized welcome campaign, or just wishing a long-time client happy birthday, Distributed Marketing provides an easy-to-use interface to preview and send compelling emails and SMS messages. If your marketing teams have enabled content collaboration, simply click on the areas of the content you want to interact with and make it your own. Depending on your set-up, you can add personal notes, select the images used in email, send on behalf of other team members, and more.

Edit an Email in Distributed Marketing

Follow these steps to edit an email in Distributed Marketing. Editing options become available when your organization enables collaborative content for the email message.

Edit an SMS Message in Distributed Marketing

Follow these steps to edit an SMS message in Distributed Marketing. Editing options are available only if your organization has enabled collaborative SMS messages.

Edit Send Settings

If your organization enables the Send Settings option, you can choose to send emails from an individual's record owner or from yourself. The name and email address of the user you select is visible in preview mode, and appear in the From field in your customer's email inbox.

Set Default Message Greeting

As a standard Distributed Marketing user, you can customize your Distributed Marketing experience by setting a preferred default for how your campaign message recipients are greeted.

Edit an Email in Distributed Marketing

Follow these steps to edit an email in Distributed Marketing. Editing options become available when your organization enables collaborative content for the email message.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To edit an Email in Distributed Marketing:	DMAdministrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is

USER PERMISSIONS NEEDED

required.

1. To enter edit mode, click the pencil icon. The preview updates, highlighting any editable areas.
2. Click the area of the email you want to edit. The corresponding editing experience appears in the edit pane.
3. To preview modifications, click the eyeball icon.
4. If your organization created a custom personalization interaction, click the plug icon. The corresponding editing experience appears in the edit pane.

 **Note** If you navigate from the email, modifications aren't saved.

Edit an SMS Message in Distributed Marketing

Follow these steps to edit an SMS message in Distributed Marketing. Editing options are available only if your organization has enabled collaborative SMS messages.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To edit an SMS message in Distributed Marketing Installed Package | Administrator permission

1. To enter edit mode, click the pencil icon. The preview shows placeholder text.
2. Type the SMS message you want to send in the inbox box.
3. To preview the message, click the eyeball icon.

Edit Send Settings

If your organization enables the Send Settings option, you can choose to send emails from an individual's record owner or from yourself. The name and email address of the user you select is visible in preview mode, and appear in the From field in your customer's email inbox.

 **Note** If you don't see these options, your organization might have a custom solution in place.

1. In Salesforce, navigate to a Distributed Marketing send workflow.
2. Select the Send Settings gear icon.
3. Select an option from the Send from dropdown. This setting applies to all selected individuals.

Set Default Message Greeting

As a standard Distributed Marketing user, you can customize your Distributed Marketing experience by setting a preferred default for how your campaign message recipients are greeted.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To set default message greeting:	DMAdministrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.

Choose between greeting your recipients by their first name, full name, or other custom options that your company allows. This setting is the default for all campaign messages. You can change the default for individual campaigns or for individual recipients when you review them before sending.

1. In Salesforce, from the App Launcher, find and open **Distributed Marketing Settings**.



Tip You can also access settings from the Campaign Messages component on a campaign record. To set the default message greeting for all campaigns, click **Global Settings**. To set default personalizations for individual campaigns, click **Message Settings**.

2. Select a default setting for Greeting.



Note Selecting **System Default** automatically uses the default setting established by your company.

3. Click **Apply Changes**.

Send Distributed Marketing Content

Distributed Marketing offers different workflows designed to help you reach your customers wherever you are in your Salesforce experience. After your marketing team sets up the workflows that make sense for you, use Quick Sends or Campaign Sends to send the perfect, personalized messages to your customers.

Quick Send

Use Quick Send to personalize and send a single message to contacts, leads, or person accounts from throughout the Salesforce platform. Your access to email messages, SMS messages, or both depends on your organization's configuration.

Campaign Sends

Use Campaign Sends created by your Marketing teams to send your customers single or multi-touch engagements. Campaign Sends use data and real-time engagement feedback to send your customers the right message at the right time. If collaborative content is enabled, you can modify content. Personalize content for individuals or segments, preview content exactly how individuals see it in their inbox or text message, and more.

Quick Send

Use Quick Send to personalize and send a single message to contacts, leads, or person accounts from

throughout the Salesforce platform. Your access to email messages, SMS messages, or both depends on your organization's configuration.

There are two types of Quick Send workflows:

1. **Audience First:** Select the audience you want to target. Then, search for the content you want to send them.
2. **Content First:** Select the message you want to send. Then select the audience you want to target.

Each of the following workflows has different audience size considerations, and is designed to help you quickly distribute content to individuals or groups.

Workflow Type	Workflow Name	Workflow
Audience	Quick Send from Contacts, Leads, and Person Accounts	Send a message to one individual from a contact, lead, or person account record.
Audience	Quick Send from List Views	Send a message to between one and 75 individuals from a standard or custom list view.
Audience	Quick Send from Cases	Send a message to the primary contact, lead, or person account on a case from a case record.
Audience	Quick Send from Opportunities	Send a message to a contact associated with an opportunity from an opportunity record.
Content	Quick Send from Quick Send Messages	Send a message to one individual from a quick send message record.
Content	Bulk Quick Send from Quick Send Messages	Send a message to between one and 25,000 individuals from a quick send message record.

If your organization configured collaborative content, there could be areas of the email or SMS message you can edit and personalize. If not, some messages don't have anything to personalize. Even if you can't personalize the message, you can still send it.

[Send a Message from a Contact, Lead, or Person Account Record](#)

Send a single message to an individual from a contact, lead, or person account record.

[Send a Message from a List View](#)

Send a single message to up to 75 individuals at once from a contact or lead list view.

[Send a Message from a Case](#)

Send a single message to the primary contact or lead on a Case.

Send a Message from a Quick Send Message Record

Send a single message to a single contact, lead, or person account from a Quick Send Message Record.

Send a Message from an Opportunity Record

Send a single message from an opportunity record.

Bulk Send a Message from a Quick Send Message Record

Send a single message to up to 100,000 contacts, leads, or person accounts from any Quick Send message record using Salesforce list views. SMS messages aren't available in Bulk Quick Send.

Bulk Send a Message from a List View

Business users can start a bulk Quick Send message directly from a contact, lead, or account list view. List views can contain up to 100,000 recipients, and they support audience-level user personalization.

Review the Audience for a Bulk Quick Send Message

By default, you can view the first 2,000 results of a list view when you create the list view. For Bulk Send, you can review all recipients before sending in the Bulk Send Audience component on the Bulk Send Batch records linked to the Bulk Send Job.

View Send Errors for a Bulk Quick Send Message

If something happens to prevent Distributed Marketing from adding an individual to a journey, you can review errors on a record-by-record basis. For example, errors can happen if an individual is missing an email address or SMS mobile phone number.

Set Default Personalization for a Quick Send Message

Default personalizations allow you to streamline your Distributed Marketing experience by creating default customizations for Quick Send messages. You can modify these customizations for individual recipients before sending through any of the Quick Send workflows you can access.

Schedule a Quick Send Message

Schedule a single or bulk send Quick Send message. Messages are scheduled in your time zone and must be scheduled at least 5 minutes in the future. You can cancel a send up to 5 minutes before the scheduled time.

Send a Message from a Contact, Lead, or Person Account Record

Send a single message to an individual from a contact, lead, or person account record.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To use Quick Send:	DMAdministrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.

1. Navigate to a contact, lead, or person account record.
2. In the Quick Send Messages component, select a business unit.

 **Tip** Your organization determines the business units you can access. You may not see this option.

3. Select a message type.

 **Tip** Your organization determines the message types you can access. You may not see this option.

4. Search for and select a message.

5. Click the pencil icon.

6. Optionally, customize the message.

 **Note** Your organization determines the content you can customize, so there's a chance you can't modify some messages. You can still send the message.

7. To send the message, click **Send**.

 **Note** If your organization uses manual approvals, there's a Submit button to click instead. Your message sends after it's approved

See Also

[Send a Message from a List View](#)

[Send a Message from a Case](#)

[Send a Message from a Quick Send Message Record](#)

[Send a Message from an Opportunity Record](#)

Send a Message from a List View

Send a single message to up to 75 individuals at once from a contact or lead list view.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To use Quick Send:	DM Administrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.

1. In Salesforce, navigate to a contact or lead list view. All recipients that fit the specified filter criteria appear.

2. Select at least one recipient.

3. Select the Send Quick Send Message quick action.

4. Select a business unit.

 **Note** Your organization determines the business units you can access, so it's possible you don't see this option.

5. Select a message type.

 **Note** Your organization determines the message types you can access, so it's possible you don't see this option.

6. Search for and select a message.
7. Click the pencil icon.
8. Optionally, customize the message.
 -  **Note** Your organization determines the content you can customize, so it's possible you can't modify some messages. You can still send the message.
9. To send the message, click Send.
 -  **Note** If your organization uses manual approvals, you could see a Submit button to click instead. Your message sends after it's approved.

See Also

[Send a Message from a Contact, Lead, or Person Account Record](#)
[Send a Message from a Case](#)
[Send a Message from a Quick Send Message Record](#)
[Send a Message from an Opportunity Record](#)

Send a Message from a Case

Send a single message to the primary contact or lead on a Case.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To use Quick Send:	DM Administrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.

1. Navigate to a case record.
2. In the Quick Send Messages component, select a message type.
 -  **Note** Your organization determines the message types you can access. You may not have this option.
3. Search for and select a message.
4. Click the pencil icon.
5. Optionally, customize the message.
 -  **Note** Your organization determines the content you can customize, so there's a chance you can't modify some messages. You can still send the message.
6. To send the message, click Send.
 -  **Note** If your organization uses manual approvals, there's a Submit button to click instead. Your message sends after it's approved.

See Also

[Send a Message from a Contact, Lead, or Person Account Record](#)[Send a Message from a List View](#)[Send a Message from a Quick Send Message Record](#)[Send a Message from an Opportunity Record](#)

Send a Message from a Quick Send Message Record

Send a single message to a single contact, lead, or person account from a Quick Send Message Record.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To use Quick Send:	DM Administrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.

1. In Salesforce, navigate to a Quick Send message record.
2. In the Audience component, select the Single Send tab.
3. Search for and select a single contact, lead, or person account.
4. Click the pencil icon.
5. Optionally, customize the message.
 -  **Note** Your organization determines the content you can customize, so there's a chance you can't modify some messages. You can still send the message.
6. To send the message, click Send.
 -  **Note** If your organization uses manual approvals, there's a Submit button to click instead. Your message sends after it's approved.

See Also

[Send a Message from a Contact, Lead, or Person Account Record](#)[Send a Message from a List View](#)[Send a Message from a Case](#)[Send a Message from an Opportunity Record](#)

Send a Message from an Opportunity Record

Send a single message from an opportunity record.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To create and save Lightning pages in the	Customize Application

USER PERMISSIONS NEEDED

Lightning App Builder:

1. In Salesforce, navigate to an Opportunity record.
2. In the Quick Send Messages component, select a business unit.
 **Note** Your organization determines the business units you can access. You may not have this option.
3. Select a message type.
 **Note** Your organization determines the message types you can access. You may not have this option.
4. Search for and select a message.
5. Search for and select a recipient.
6. Click the pencil icon.
7. Optionally, customize the message.
 **Note** Your organization determines the content you can customize, so there's a chance you can't modify some messages. You can still send the message.
8. To send the message, click Send.
 **Note** If your organization uses manual approvals, there's a Submit button to click instead. Your message sends after it's approved.

See Also[Send a Message from a Contact, Lead, or Person Account Record](#)[Send a Message from a Case](#)[Send a Message from a List View](#)[Send a Message from a Quick Send Message Record](#)**Bulk Send a Message from a Quick Send Message Record**

Send a single message to up to 100,000 contacts, leads, or person accounts from any Quick Send message record using Salesforce list views. SMS messages aren't available in Bulk Quick Send.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To use Bulk Quick Send:

- DM Administrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.
 - DM Bulk Send permission set
-

USER PERMISSIONS NEEDED

- API Enabled system permission
-

1. In Salesforce, navigate to a Quick Send message record.
2. In the Audience component, select the **Bulk Send** tab.
3. Search for and select any list view.

 **Tip** Contact or lead list view names are prefixed with the object type. For example, Contact - White Glove Contacts. If you're using person accounts, you target the contact list views. Account list views aren't available.

4. Click the pencil icon.
5. Optionally, customize the message.

 Note

- Your organization determines the content you can customize, so it's possible you can't modify certain messages. You can still send the message.
- You can preview for the first 100 recipients.
- Any customizations made apply to all recipients.

6. Select **Prepare Bulk Send**. The system redirects you to the new Bulk Send Job record. The message is ready to send when the system updates the Status field to Waiting.
 - If the user who prepares the send is different from the user who starts the send, the User ID stored in the Marketing Cloud Engagement event data extension (sfUserId) is the user who prepares the send.
 - If your organization uses the Collaborative Campaigns (Auto Send) feature, you can add up to 100,000 members for a given Auto Send campaign, or a total of 100,000 members across campaigns scheduled at the same time by the same person. If you exceed the 100,000 member limit, the Auto Send only sends 100,000. If your audience is greater than 100,000 members total across multiple campaigns to send to, consider staggering the sends in 5-minute intervals.
7. To start the send, select **Start** on the Bulk Send component. The send is complete when the Bulk Send Job's Status changes to Complete. Sending is complete when the system updates the Status field to Complete. You can view send errors after the Bulk Send is finished

Bulk Send a Message from a List View

Business users can start a bulk Quick Send message directly from a contact, lead, or account list view. List views can contain up to 100,000 recipients, and they support audience-level user personalization.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To use Bulk Send from a List View:

- DM Administrator License permission set and
-

USER PERMISSIONS NEEDED

Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.

- DM Bulk Send permission set
 - API Enabled system permission
-

1. In Salesforce, navigate to a list view.
2. Select the **Bulk Quick Send** button.
3. Select a message.
4. Click the pencil icon.
5. Optionally, customize the message.

 Note

- Your organization determines the content you can customize, so it's possible you can't modify certain messages. You can still send the message.
- You can preview for the first 100 recipients.
- Any customizations made apply to all recipients.

6. Select **Prepare Bulk Send**. The system redirects you to the new Bulk Send Job record. The message is ready to send when the system updates the Status field to Waiting.

 Note

- If the user who prepares the send is different from the user who starts the send, the User ID stored in the Marketing Cloud Engagement event data extension (sfUserId) is the user who prepares the send.
- If your organization uses the Collaborative Campaigns (Auto Send) feature, you can add up to 100,000 members for a given Auto Send campaign, or a total of 100,000 members across campaigns scheduled at the same time by the same person. If you exceed the 100,000 member limit, the Auto Send only sends 100,000. If your audience is greater than 25000 members total across multiple campaigns to send to, consider staggering the sends in 5-minute intervals.

7. To start the send, select **Start** on the Bulk Send component. The send is complete when the Bulk Send Job's Status changes to Complete.



Note Sending is complete when the system updates the Status field to Complete. You can view send errors after the Bulk Send is finished.

Review the Audience for a Bulk Quick Send Message

By default, you can view the first 2,000 results of a list view when you create the list view. For Bulk Send, you can review all recipients before sending in the Bulk Send Audience component on the Bulk Send Batch records linked to the Bulk Send Job.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To use Review the Audience:	DM Administrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.
-----------------------------	--

1. In Salesforce, navigate to a Quick Send message record.
2. Select the Bulk Send Job record in the Bulk Send Jobs component.
3. Select the Audience tab. This tab shows groups of 500 individuals per group.
4. Select a Bulk Send Batch records. You can view the individuals, their status, record type, email address, and any error received while trying to add them to the journey.

 **Note** The CSV file is also available in Notes and Attachments.

View Send Errors for a Bulk Quick Send Message

If something happens to prevent Distributed Marketing from adding an individual to a journey, you can review errors on a record-by-record basis. For example, errors can happen if an individual is missing an email address or SMS mobile phone number.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED

To use Quick Send:	DM Administrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.
--------------------	--

1. In Salesforce, navigate to a Quick Send message record.
2. Select the Bulk Send Job record in the Bulk Send Jobs component. If there are errors, the Has Errors checkbox is checked.
3. In the Related List, select a Bulk Send Batch with the Has Errors checkbox checked.
4. View any errors in the Bulk Send Batch Audience Component or in the Error Message field on the Bulk Send Batch object.

 **Note** After you fix the error, you can retarget the individual with the same message using another quick send workflow. For example, using Quick Send to a contact, lead, or person account.

Set Default Personalization for a Quick Send Message

Default personalizations allow you to streamline your Distributed Marketing experience by creating default customizations for Quick Send messages. You can modify these customizations for individual recipients before sending through any of the Quick Send workflows you can access.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To set default personalization for a Quick Send Message	DMAdministrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.

To set a default personalization for a Quick Send message, follow these instructions.

1. In Salesforce, navigate to a Quick Send message record.
2. In the Quick Send defaults component, click Edit.
3. Click Save and Close when you're finished modifying the content.

Schedule a Quick Send Message

Schedule a single or bulk send Quick Send message. Messages are scheduled in your time zone and must be scheduled at least 5 minutes in the future. You can cancel a send up to 5 minutes before the scheduled time.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To schedule a Quick Send message:	DM Administrator and DM Administrator License permission set or DM Standard and DM Standard License permission

Considerations

- You can send up to 25,000 messages for the same date and time.
- If your organization has enabled a send cap, sends are deducted when you schedule the send.

To schedule a Quick Send message, follow these steps.

1. In Salesforce, navigate to a Distributed Marketing Quick Send workflow.
2. Select the Send Settings gear icon.
3. Select a date and time.

Campaign Sends

Use Campaign Sends created by your Marketing teams to send your customers single or multi-touch engagements. Campaign Sends use data and real-time engagement feedback to send your customers the right message at the right time. If collaborative content is enabled, you can modify content. Personalize content for individuals or segments, preview content exactly how individuals see it in their inbox or text message, and more.



Note If your organization uses the Collaborative Campaigns (Auto Send) feature, you can add up to 25,000 members for a given auto send campaign. Or you can add a total of 25,000 members across campaigns scheduled at the same time by the same person. If you exceed the 25,000 member limit, the auto send only sends 25,000.

Send a Segmented Send

Use a Segmented Send when you want more control and flexibility over your audience, content, or both. Segmented Sends allow you to use data filters to select a subset of your entire target audience and then personalize messages for that subset. You can also use these data filters to opt certain individuals out of messaging without removing them from the campaign entirely. You can message these members later or not at all.

Bulk Send a Campaign Send

Use a Bulk Campaign Send when you want to message large groups of individuals at once without making individual modifications. You can modify content for the entire audience, and you can review the entire audience before sending. However, you can't personalize messages for individuals or groups. Bulk Campaign Sends are optimized for speed, and they work best when your target audience is more than 1,000 individuals.

Set Default Personalization for a Campaign

As a standard Distributed Marketing user, streamline your Distributed Marketing experience by creating default customizations for message templates within specific campaigns. These customizations can be modified for individual recipients when you review them before sending.

Send a Segmented Send

Use a Segmented Send when you want more control and flexibility over your audience, content, or both. Segmented Sends allow you to use data filters to select a subset of your entire target audience and then personalize messages for that subset. You can also use these data filters to opt certain individuals out of messaging without removing them from the campaign entirely. You can message these members later or not at all.



Example Your marketing or ops team uses business rules to pre-load campaigns for you with qualified recipients. You just got off the phone with a longtime client and know that messaging them right now does not make sense. You could remove them from the campaign entirely, but segmented sends allow you to easily opt that recipient out of messaging for now.

Review Pending Campaign Members

After contacts, leads, or person accounts are added to campaigns, review the new campaign members and personalize messages before sending. Use data filters to personalize messages for segments of campaign members, or select a single campaign member to make modifications for just one recipient.

Personalize Campaign Messages

As a Distributed Marketing user, you can personalize the message content for contacts, leads, or person accounts to receive campaign messages.

Customize Pending Member Table

After contacts, leads, or person accounts are added to campaigns, standard Distributed Marketing users review pending campaign members to personalize content and to approve or reject them for receiving messages. You can add fields to the pending member table to provide context when personalizing and approving campaign members. By default, the list of pending campaign members is sorted by the creation date, which is when the member was added to the campaign.

Update Campaign Member Details

As a standard Distributed Marketing user, you review contacts, leads, or person accounts to receive campaign messages through Distributed Marketing. Click a campaign member to view and update their record details.

Review Pending Campaign Members

After contacts, leads, or person accounts are added to campaigns, review the new campaign members and personalize messages before sending. Use data filters to personalize messages for segments of campaign members, or select a single campaign member to make modifications for just one recipient.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To review pending campaign members:	DMAdministrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.

1. In Salesforce, navigate to your campaign.
2. In the Campaign Messages component, click **Segmented Send**.
 -  **Note** If this option isn't available, there aren't any campaign members to review.
3. To add columns to your Pending Member Table, click the settings gear on the table, and then click **Select Fields to Display** to add, remove, or reorder accessible fields.
4. To search, enter the first or last name of a campaign member in the Quick Search box.
5. To sort, click the header of any field. Click the header again to reverse the sort order. Results are sorted alphabetically or in ascending or descending order based on the field type. You can sort unencrypted fields.
6. To filter pending members, click the filter icon, select a campaign member field, and enter a filter value. You can filter on unencrypted fields.

 **Tip** To filter on multiple criteria at once, select **Add Filter**. Filter criteria use the AND operator.

7. To personalize messages for campaign members, select campaign members, and click **Personalize**.
8. To approve campaign members for receiving messages, select campaign members, and click **Ready**.
9. To opt campaign members out of receiving messages, select campaign members, and click **Reject**.

 **Tip** If you approved or rejected a campaign member and want to reset the status, select the campaign member, and click **Reset to Pending**.

10. Click **Submit Members**.

 **Tip** If your organization uses manual approvals, sometimes you see a Submit button to click instead. Your messages send after they're approved.

11. Repeat this process to message more segments.

 **Tip** Your organization can decide how many individuals you can include in a segment, up to 500 per segment. If your total audience is more than the maximum segment size, create and submit your first segment. You can then create a segment to personalize and submit.

See Also

[Personalize Campaign Messages](#)

[Set Default Personalization for a Campaign](#)

Personalize Campaign Messages

As a Distributed Marketing user, you can personalize the message content for contacts, leads, or person accounts to receive campaign messages.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To personalize messages:	DMAdministrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.

1. In Salesforce, navigate to a campaign.

 **Tip** The Campaign Messages component displays all **Email** and **Text (SMS)** messages that can be sent as part of the campaign.

- Under **Preview**, Email messages display the subject line. Text (SMS) messages display the message to send.
- Text (SMS) messages can't be modified.

2. In the Campaign Messages component, click **Segmented Send**.

 **Note** If View Pending Members isn't an option, there aren't any campaign members to review.

3. To personalize messages for specific campaign members, select up to 500 campaign members and

click **Personalize**.

4. Click the pencil icon on the left navigation column to edit.
5. Hover over and select any highlighted content area to edit it.



Note The personalization you enter applies to all selected campaign members.

6. On campaigns with multiple messages, click the dropdown on the top navigation bar to select another message.



Tip To preview your customizations without annotation, click the eye icon on the left navigation column.

7. Save personalization changes.

See Also

[Review Pending Campaign Members](#)

[Set Default Personalization for a Campaign](#)

Customize Pending Member Table

After contacts, leads, or person accounts are added to campaigns, standard Distributed Marketing users review pending campaign members to personalize content and to approve or reject them for receiving messages. You can add fields to the pending member table to provide context when personalizing and approving campaign members. By default, the list of pending campaign members is sorted by the creation date, which is when the member was added to the campaign.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To customize the pending member table:	DMAdministrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.

1. In Salesforce, navigate to a campaign and select **Segmented Send**.
2. On the Pending Member Campaign Table, click the settings gear and then click **Select Fields to Display**.
3. Move fields between **Available Fields** and **Visible Fields** using the left and right arrows.



Tip You can't remove Created Date or Name fields, but you can change where they show up in the table.

4. Reorder the fields using the up and down arrows.
5. Select **Save**.

See Also

[Manage Custom Settings Data](#)

Update Campaign Member Details

As a standard Distributed Marketing user, you review contacts, leads, or person accounts to receive campaign messages through Distributed Marketing. Click a campaign member to view and update their record details.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To update campaign member details:	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.

1. In Salesforce, navigate to your campaign.
2. In the Campaign Messages component, click **View Pending Members**.
 -  **Note** If View Pending Members isn't an option, there aren't any campaign members to review.
3. To view the campaign member record details, click the name of a pending campaign member.
4. To edit campaign member details, click  next to a field.
5. Save your changes.
6. To view Chatter feed posts for this campaign member, click **Feed**.
7. To view attachments, cases, opportunities, and more for the campaign member, click **Related Lists**.
8. To return to Pending Approvals, click .

Bulk Send a Campaign Send

Use a Bulk Campaign Send when you want to message large groups of individuals at once without making individual modifications. You can modify content for the entire audience, and you can review the entire audience before sending. However, you can't personalize messages for individuals or groups. Bulk Campaign Sends are optimized for speed, and they work best when your target audience is more than 1,000 individuals.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To send a Bulk Campaign Send:	• DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace)

USER PERMISSIONS NEEDED

- DM Bulk Send
 - API Enabled system permission
-

To send a Bulk Send message:

1. In Salesforce, navigate to a Campaign record.
 2. In the Campaign Messages component, select the **Bulk Send** button.
 -  **Note** If Bulk Send isn't an option, there aren't any campaign members available to send to.
 3. Optionally, customize the message.
 -  **Note**
 - Your organization determines the content you can customize, so in certain cases you can't modify some of the messages. You can still send the message.
 - You can preview for the first 100 recipients.
 - Any customizations made apply to all recipients.
 - You can customize one SMS message per campaign.
 4. Select **Prepare Bulk Send**. The system redirects you to the new Bulk Send Job record. The message is ready to send when the system updates the Status field to Waiting.
 -  **Note** If your organization uses the Collaborative Campaigns (Auto Send) feature, you can add up to 100,000 members for a given Auto Send campaign, or a total of 100,000 members across campaigns scheduled at the same time by the same person. If you exceed the 100,000 member limit, the Auto Send only sends 100,000. If your audience is greater than 25,000 members total across multiple campaigns to send to, consider staggering the sends in 5-minute intervals.
 5. To start the send, select **Start** on the Bulk Send component. The send is complete when the Bulk Send Job's Status changes to Complete.
 -  **Note** Sending is complete when the system updates the Status field to Complete. You can view send errors after the Bulk Send is finished.
-  **Example** You manage a large book of business and work for an organization that publishes thought leadership articles and resources regularly. You publish a monthly newsletter that helps filter through the noise and highlight the most relevant topics and trends. This workflow is great because you want to reach your entire book quickly without personalizing for subsegments of individuals.

Set Default Personalization for a Campaign

As a standard Distributed Marketing user, streamline your Distributed Marketing experience by creating default customizations for message templates within specific campaigns. These customizations can be modified for individual recipients when you review them before sending.

REQUIRED EDITIONS

USER PERMISSIONS NEEDED	
To set default personalization for campaign messages:	DMAAdministrator License permission set and Administrator permission (mcdm_15 namespace) or DMStandard License permission set and Standard permission (mcdm_15 namespace) is required.

1. In Salesforce, navigate to your campaign.
2. In the Campaign Messages component, click **Message Settings** in the Settings menu.
 -  **Tip** You can also click the eyeball icon to open up message defaults for specific messages.
3. On the Edit tab, select a message to preview.
4. To open a preview where editable content areas are highlighted, select Edit.
5. Hover over and select any highlighted content area to edit it.
 -  **Tip** You can modify customizations for individual campaign members when you review them before sending.
6. For campaigns with multiple messages, click  to select another message.
7. Save your campaign personalization defaults.

See Also

[Personalize Campaign Messages](#)

[Review Pending Campaign Members](#)

Marketing Cloud Connect

Marketing Cloud Connect for Marketing Cloud Engagement combines the digital marketing capabilities of Engagement with the data management, segmentation, and campaign management tools in Salesforce. Create unitary customer relationships with more data-driven, personalized conversations and the ability to automate the customer journey. With Marketing Cloud Connect, access powerful Engagement tools directly within Sales or Service Cloud. Ensure a consistent branding and messaging experience, while engaging customers in relevant conversations and ultimately driving more leads into Salesforce.

Help documentation is based on the latest managed package. Learn about [upgrading to Marketing Cloud Connect](#).

Marketing Cloud Connect features work in Salesforce Classic. Those using Lightning Experience with Salesforce are automatically redirected to Salesforce Classic when Marketing Cloud Connect tabs are clicked.

[Upgrade to the Latest Marketing Cloud Connect Release](#)

To make sure that you have the most recent features and bug fixes before each release, we

automatically update the managed package in your production org to the previously released version. In addition, your non-production org is upgraded to the newest version when the managed package is released. This process provides you with a full release cycle to test the new package before we auto-update your production org.

[Connect Clouds with Marketing Cloud Connect](#)

Get familiar with requirements, install the latest managed package, and configure your Salesforce accounts to start using Marketing Cloud Connect for Marketing Cloud Engagement.

[Manage Marketing Cloud Connect Settings](#)

Admins access Marketing Cloud Connect for Marketing Cloud Engagement settings and send configuration by navigating to the Engagement object in the Sales or Service Cloud. Admins can configure these settings, including sends, tracking, users, and business units, after the installation and setup process to enable sending through Marketing Cloud Connect.

[Email Sends](#)

Integrated users send Marketing Cloud Engagement emails through the Sales or Service Cloud with Marketing Cloud Connect. Send single emails to leads, contacts, and person account records, or send to a list through campaigns and reports.

[Frequently Asked Questions](#)

Review frequently asked questions about Marketing Cloud Connect for Marketing Cloud Engagement.

[Troubleshooting Guide](#)

Review troubleshooting tips for Marketing Cloud Connect for Marketing Cloud Engagement.

[Tutorials](#)

Practice Marketing Cloud Connect for Marketing Cloud Engagement features with these tutorials for specific use cases.

See Also

- [Upgrade to Marketing Cloud Connect](#)
- [Upgrade to the Latest Marketing Cloud Connect Release](#)
- [Upgrade to Connected App](#)
- [Connect Clouds with Marketing Cloud Connect](#)
- [Marketing Cloud Connect Features](#)

Upgrade to the Latest Marketing Cloud Connect Release

To make sure that you have the most recent features and bug fixes before each release, we automatically update the managed package in your production org to the previously released version. In addition, your non-production org is upgraded to the newest version when the managed package is released. This process provides you with a full release cycle to test the new package before we auto-update your production org.



Note These dates are subject to change. Some features are made available to your org within a week of the release, while some fixes and enhancements are delivered between releases.

Upcoming Package Upgrades

Marketing Cloud Engagement Release	Supported API Version	Marketing Cloud Engagement Release Date	Non-Production Environment Package Upgrade	Production Environment Package Upgrade
Spring '24 (248)	59.0	February 16–March 8, 2024	March 10, 2024	March 30, 2024
Summer '24 (250)	60.0	June 7–28, 2024	July 13, 2024	August 3, 2024
Winter '25 (252)	61.0	October 5–25, 2024	October 26, 2024	April 19, 2025
Spring '25 (254)	62.0	February 22–March 14, 2025	April 5, 2025	April 19, 2025
Summer '25 (256)	63.0	June 7–July 11, 2025	July 12, 2025	July 26, 2025
Winter '26 (258)	64.0	September 12–November 1, 2025	January 10, 2026	Excluded
Spring '26 (260)	65.0	January 16–February 27, 2026	March 7, 2026	March 21, 2026
Summer '26 (262)	66.0	May 15–June 19, 2026	June 27, 2026	July 11, 2026
Winter '27 (264)	67.0	September 18–October 16, 2026	October 24, 2026	November 7, 2026
Spring '27 (266)	68.0	January 15–February 26, 2027	March 6, 2027	March 20, 2027

After a major Marketing Cloud Engagement release, your developer, trial, demo, and sandbox orgs are upgraded to the latest version. Use these orgs to test the new version before the update is applied to your production org. The supported Salesforce API version for Marketing Cloud Connect is updated to the next version 2–3 weeks after the Production environment package upgrade. For example, the version supported in Summer '25 (256) is 63.0.

If you have Salesforce admin permissions, you can manually upgrade the package by completing these steps.

1. Review the latest features and considerations.
2. [Install the managed package in Sales Cloud and Service Cloud.](#)

3. [Make sure that the IP range allowlist has up-to-date information.](#)

We recommend that you use [tenant-specific endpoints \(TSEs\)](#) for all new managed package and Marketing Cloud Connect integrations. The addresses in this document apply to only existing customers who use legacy connections.

See Also

[Marketing Cloud Release Notes](#)

Connect Clouds with Marketing Cloud Connect

Get familiar with requirements, install the latest managed package, and configure your Salesforce accounts to start using Marketing Cloud Connect for Marketing Cloud Engagement.

Marketing Cloud Connect is available in Salesforce Unlimited, Enterprise, Performance Editions, or Developer Edition Sandbox. Marketing Cloud Connect is available in Marketing Cloud Core Edition, Advanced Edition, Agency Edition, Enterprise 1.0 Lock and Publish, Enterprise 2.0 Edition, Reseller Edition, or Marketing Cloud Sandbox.

Lightning Experience is not supported for Marketing Cloud Connect features. Those using Lightning Experience with Salesforce are automatically redirected to Salesforce Classic when any Marketing Cloud Connect tabs are clicked. Lightning Professional Edition is supported by Salesforce Integration V2 and not supported by Marketing Cloud Connect. Government Cloud requires a custom installation. To schedule, contact your account executive at least 30 days before planned installation. Marketing Cloud Connect doesn't support CipherCloud.

Next Topic: [Review Prerequisites and Install Package](#)

1. [Review Prerequisites and Marketing Cloud Connect Install Package](#)

Review the system requirements and key Marketing Cloud Connect for Marketing Cloud Engagement concepts to understand user types. Choose a data access option for configuration. Install the latest managed package and begin the setup process.

2. [Configure Marketing Cloud and Marketing Cloud Connect](#)

The Marketing Cloud Engagement admin performs these tasks to configure Engagement for use with Marketing Cloud Connect.

3. [Configure the CRM](#)

The Salesforce CRM admin performs these tasks to configure Sales or Service Cloud for Marketing Cloud Connect for Marketing Cloud Engagement.

4. [Configure Settings](#)

Configure Marketing Cloud Connect for Marketing Cloud Engagement settings after installation and setup.

5. [Test the Connection in Marketing Cloud Connect](#)

Make sure that Marketing Cloud Connect for Marketing Cloud Engagement is set up correctly for sending.

6. [Upgrade to Marketing Cloud Connect](#)

Learn the benefits of upgrading to Marketing Cloud Connect for Marketing Cloud Engagement from

an earlier version of the connector. Marketing Cloud Connect is a more efficient and effective way to manage your connection to the Sales or Service Cloud.

7. **Disconnect Account**


The ability to disconnect a Marketing Cloud Engagement account from a Sales or Service Cloud account is only available for Enterprise 2.0, Core, and Lock & Publish accounts. Install managed package version 5.493 or later. The account must use connected app authentication. The Engagement admin can disconnect the accounts by editing the Salesforce Integration in the Email Studio admin. Disconnecting takes from 5 minutes to several hours depending on the number of synchronized data extensions. The Sales or Service Cloud admin then uninstalls the package.

8. **Authentication Between Clouds**

Connected App Authentication is a secure authentication mechanism used by Marketing Cloud Connect to connect from Marketing Cloud Engagement to Sales or Service Cloud. Now your users are authenticated automatically without Sales or Service Cloud user password management.

Review Prerequisites and Marketing Cloud Connect Install Package

Review the system requirements and key Marketing Cloud Connect for Marketing Cloud Engagement concepts to understand user types. Choose a data access option for configuration. Install the latest managed package and begin the setup process.



1. **Prerequisites**

Review these prerequisites before installing Marketing Cloud Connect for Marketing Cloud Engagement.

2. **Install Connected App in Marketing Cloud Connect**

This process is only required if your Marketing Cloud Connect tenant is deployed in Hyperforce.

3. **Marketing Cloud Connect User Types and Permissions**

To use most Marketing Cloud Connect functionality, users need a license for Marketing Cloud Engagement and a license for Sales or Service Cloud. Understand the user types and permissions associated with Marketing Cloud Connect.

4. **Account Configuration for User Data Access**

Marketing Cloud Engagement administrator and Sales or Service Cloud administrator review these options for configuring Marketing Cloud Connect data. Choose to set the account as scope by user or non-scope by user.

5. **Install the Marketing Cloud Connect Managed Package**

Install the Marketing Cloud Connect for Marketing Cloud Engagement managed package in your account.


6. **Set Up the Salesforce System User in Marketing Cloud Connect**

The Sales or Service Cloud administrator creates the Salesforce System User. This user connects the accounts for the Marketing Cloud Connect for Marketing Cloud Engagement configuration.

Prerequisites

Review these prerequisites before installing Marketing Cloud Connect for Marketing Cloud Engagement.

- Marketing Cloud Connect requires a relationship between a single Engagement account and one or more Salesforce orgs. Your Engagement account must be provisioned and enabled for use with Marketing Cloud Connect before connection.
- Subscriber Key is required for Marketing Cloud Connect. If it isn't enabled in your Engagement account, complete a Subscriber Key Migration before proceeding with the connection process.
- Ensure that four custom tabs are available in your Salesforce org.
- To use most Marketing Cloud Connect functionality, users need an Engagement license and a Sales or Service Cloud license.

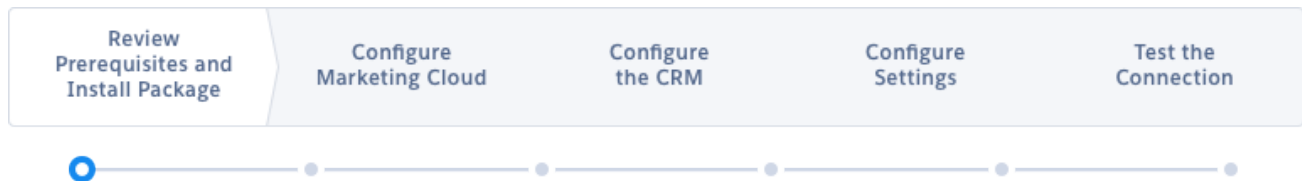

See Also

[Marketing Cloud Connect Features](#)

Install Connected App in Marketing Cloud Connect

This process is only required if your Marketing Cloud Connect tenant is deployed in Hyperforce.

1. Determine your [Hyperforce Stack](#).
2. Install the Connected App for your Hyperforce Stack.
 - MJ401: `https://login.salesforce.com/packaging/installPackage.apexp?p0=04t8Z000000xQ2P`
 - MJ402: `https://login.salesforce.com/packaging/installPackage.apexp?p0=04tHn000001eOYM`
 - MJ403: `https://login.salesforce.com/packaging/installPackage.apexp?p0=04tHn000000r3s4`
 - MJ406: `https://login.salesforce.com/packaging/installPackage.apexp?p0=04taj0000002mOn`
3. Log in with your Sales/Service Cloud admin credentials.
The Connected App automatically installs after you log in.

Marketing Cloud Connect User Types and Permissions

To use most Marketing Cloud Connect functionality, users need a license for Marketing Cloud Engagement and a license for Sales or Service Cloud. Understand the user types and permissions associated with Marketing Cloud Connect.

- Marketing Cloud administrator

The Engagement admin sets up and configures the Engagement account and users. This admin works with the Salesforce CRM administrator to install and set up Marketing Cloud Connect.

- **Salesforce CRM (Sales or Service Cloud) administrator**

The Sales or Service Cloud admin sets up and configures a Salesforce CRM account and users. This admin works with an Engagement administrator to install and set up Marketing Cloud Connect.

- **Marketing Cloud Connect API user**

The Marketing Cloud Connect API user completes the account-level connection between the Sales or Service Cloud and Marketing Cloud. If possible, use a dedicated system user as the Marketing Cloud Connect API user. If the Sales or Service Cloud org is connected to a Marketing Cloud Enterprise 2.0 account, the Marketing Cloud Connect API user's business unit access in the Marketing Cloud determines which business units are available for use within the Sales or Service Cloud.

- **Salesforce system user**

This Sales or Service Cloud user, previously called the tracking user, is required to complete the account-level connection between Engagement and Sales or Service Cloud. This user makes Marketing Cloud tracking data available in CRM. This user type is exclusively for sending to CRM audiences from Engagement in non-scope-by-user accounts. If possible, use a dedicated system user as the Salesforce system user, which does consume a user license.

- **Marketing Cloud Connect administrator**

This person manages the setup of Marketing Cloud Connect within the Sales or Service Cloud.

- **Marketing Cloud Connect user**

This person accesses Marketing Cloud Connect functionality in the Sales or Service Cloud, Engagement, or both. Access to Marketing Cloud Connect functionality in the Sales or Service Cloud is managed through CRM permissions and page layouts. Access to Marketing Cloud Connect functionality in Engagement is managed through Marketing Cloud Connect permissions. A license for both Engagement and Sales or Service Cloud is required at a minimum.

- **Marketing Cloud for AppExchange Admin Permission**


This Salesforce CRM admin permission lets admins view all data and send to any contact, lead, campaign, or report.

- **Marketing Cloud for AppExchange User Permission**

This non-admin permission lets Salesforce CRM users access the Marketing Cloud Connect interface, enabling them to perform sends. If the account is configured as "scope by user," users view and send to only the records they own.

- **Connected App Authentication Permission**

The Salesforce CRM admin creates this permission set during Marketing Cloud Connect installation and setup. Assign this permission to all Marketing Cloud Connect users. The connected app manages all cross-cloud authentication from Engagement into Sales or Service Cloud.

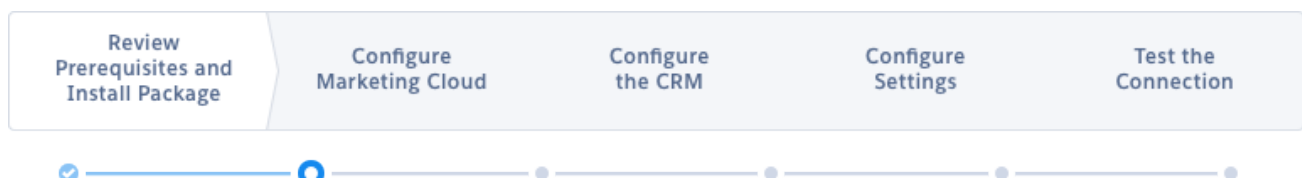

See Also

[Marketing Cloud Connect Features](#)

[Account Configuration for User Data Access](#)

[Manage Users](#)[Permission-Based Access](#)

Account Configuration for User Data Access

Marketing Cloud Engagement administrator and Sales or Service Cloud administrator review these options for configuring Marketing Cloud Connect data. Choose to set the account as scope by user or non-scope by user.

These options for Marketing Cloud Connect set the level of data access for your users.

- Non-scope by user
- Scope by user

Understanding the important differences between the two account configuration options is critical to determining how you want Marketing Cloud Connect to be used after installation. This option is selected during the Marketing Cloud Connect configuration process and can be altered in the Engagement Email Studio Setup, under Platform Tools > Apps > Salesforce Integration at any time.

Option 1: Non-Scope by User

This option configures data access on the Salesforce system user, typically an administrator. Choose this option to allow Marketing Cloud Connect users to send to all subscribers in a report or campaign that the Salesforce system user can access. Subscribers aren't filtered based on the user running the report.

Examples:

- You create a report based on My Contacts, but the Salesforce system user can't access the contacts in that report. The report is empty and so you can't send to My Contacts. You don't receive an error message, but the subsequent email-send report shows "0" contacts sent.
- You can access an existing report containing records shared with other users. You see only your own records on that report. If you send to that report intending only to send to the records you see, you can inadvertently send to other shared records.

Considerations:

- Within Engagement, report or campaign lists aren't limited to what is visible to the user initiating the send.
- Within Engagement, returned subscribers aren't limited to what is visible to the user initiating the send.
- Password policies aren't in effect, making this configuration easy to maintain because passwords don't expire.
- An administrator can set up a user without entering a password.
- You can mistakenly send to report or campaign members who aren't visible to that user without notice.
- This send behavior is the default for v2 accounts, so this option is favorable for existing v2 customers

migrating to Marketing Cloud Connect.

Option 2: Scope by User

This option configures data access on the Marketing Cloud Connect user initiating the send. Reports and campaigns that are visible to the user are available for selection as a target audience for sending. The list of subscribers returned is limited to what the user initiating the send has access to view.


Implications on Salesforce Data Extension Import Activities

Import Salesforce data extensions into Engagement through Interactions. Create import activities only with Sales or Service Cloud reports you can access. For example, reports in the Engagement Admin folder in Sales or Service Cloud aren't available for use if you can't access it in Engagement.

Manual and automated imports behave differently in Scope by User accounts:

- Scope by User doesn't affect the configured backend processes for data and objects returned by Salesforce Data Event, Sales and Service Cloud Activities in Journey Builder, and Synchronized Data Sources.
- Manual import activities respect scoping, so the number of records that appear in the report are specific to the user who is running the import.
- All automated import activities are executed as the Engagement API user. Therefore, the number of records reflects the Salesforce system user's level of access to data.

With non-scope by user accounts, imports return results based on the Salesforce system user's data access.

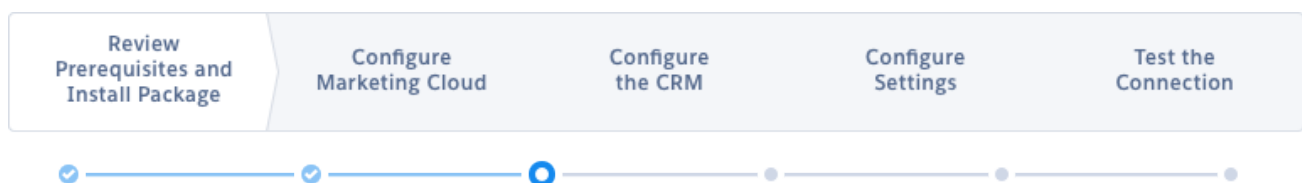

Install the Marketing Cloud Connect Managed Package

Install the Marketing Cloud Connect for Marketing Cloud Engagement managed package in your account.

To ensure that the managed package installs correctly, enable Custom Platform Events in your org.

If you're upgrading Marketing Cloud Connect, [review these considerations](#) before installing the latest managed package.

1. Install the managed package for your account.
 - For Production accounts, [install this package](#).
 - For Sandbox accounts, [install this package](#).

2. Select which users to install the package for.
3. Click **Install**.
4. If prompted, grant access to third-party websites.
5. Click **Continue**.

See Also

[Graded Browser Support](#)


[Known Issue - Limit of 50 Triggered Send Executions](#)

Set Up the Salesforce System User in Marketing Cloud Connect

The Sales or Service Cloud administrator creates the Salesforce System User. This user connects the accounts for the Marketing Cloud Connect for Marketing Cloud Engagement configuration.

The Salesforce System User, previously called the tracking user, makes Engagement tracking data available in CRM. This user type is exclusively for sending to CRM audiences from Engagement in non-scope-by-user accounts.

1. In the Sales or Service Cloud, click **Setup**.
2. Under Build in the Setup menu, click **Customize**.
3. Click **Users**.
4. Click **Page Layouts** and edit the user page layout.
5. Add the Marketing Cloud for AppExchange User field and save your changes.
6. Under Administer in the Setup menu, click **Manage Users**.
7. Click **Users**.
8. Create a user or update an existing user with these settings and save your changes
 - User License: Salesforce
 - Profile: System Administrator
9. Edit the Salesforce system user.
10. Enable Marketing Cloud for AppExchange User.
11. Enable Marketing Cloud for AppExchange Admin.
12. Save your changes.

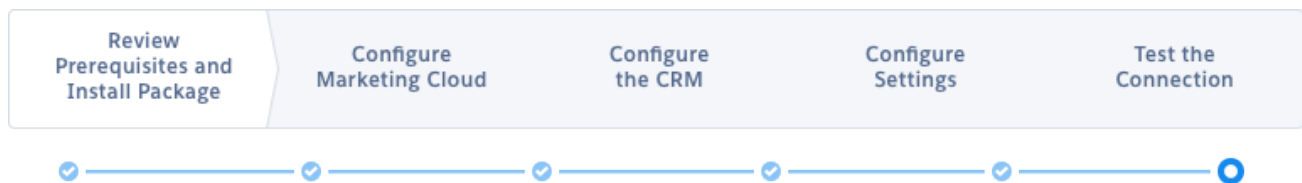

See Also


[Marketing Cloud Connect User Types and Permissions](#)

Configure Marketing Cloud and Marketing Cloud Connect

The Marketing Cloud Engagement admin performs these tasks to configure Engagement for use with Marketing Cloud Connect.

Complete this next set of tasks in the installation and setup process after reviewing all prerequisites and installing the managed package.

Confirm with your account representative that your Engagement account is provisioned and enabled for use with Marketing Cloud Connect before connection.

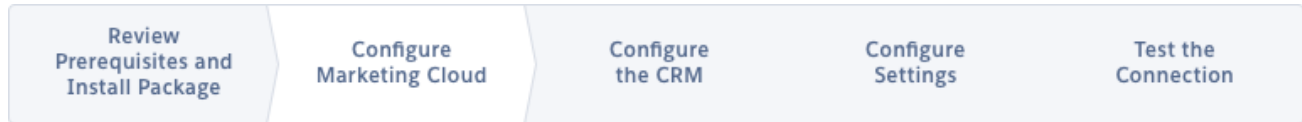

1. [Use Marketing Cloud Connect to Connect Accounts](#)

Connect your Marketing Cloud Engagement account to the corresponding Sales or Service Cloud org at the account level to continue Marketing Cloud Connect setup.

2. [Create a Marketing Cloud API User in Marketing Cloud Connect](#)

Create a Marketing Cloud API user in Marketing Cloud Connect for Marketing Cloud Engagement.

3. [Connect the Marketing Cloud API User in Marketing Cloud Connect](#)

Connect the Marketing Cloud API user to the Salesforce system user to enable core system communication activities in Marketing Cloud Connect for Marketing Cloud Engagement. These activities include pushing tracking data from Engagement into your Sales or Service Cloud.

4. [Assign Business Units](#)

For Marketing Cloud Engagement Enterprise 2.0 accounts, assign applicable business units to the Marketing Cloud Engagement API user. The Marketing Cloud Connect API user's business unit access in Engagement determines which business units are available for use within Sales or Service Cloud.

Use Marketing Cloud Connect to Connect Accounts

Connect your Marketing Cloud Engagement account to the corresponding Sales or Service Cloud org at the account level to continue Marketing Cloud Connect setup.

Complete the remaining authentication setup steps during the Configure CRM process to ensure that Connected App Authentication is set up properly.

1. Log in to the Sales or Service Cloud org that you're connecting to Engagement using the Salesforce system user account.


During this process, the system connects to any active Salesforce session. To prevent an incorrect connection, log out of any active Sales or Service Cloud sessions other than the Salesforce system user session used for this process. Closing the tab doesn't end an active session.

2. In a separate tab, log in to Engagement.
3. Navigate to **Email Studio**.
4. Click **Admin**.
5. Click **Salesforce Integration**.
6. Click **Edit**.
7. Select **Scope by User** if applicable for your data access configuration.
8. If prompted, click **Upgrade to Connected App**.

9. Click **Connect Account**.
10. If you aren't logged in to the Sales or Service Cloud as your Salesforce system user in another tab, you're prompted to log in. Click **OK** and log in as the system user.

If you're using a company-specific login URL, such as `https://mycompany.my.salesforce.com`, select **Use Custom Domain** and enter the domain address before entering the Salesforce system user credentials.

11. Click **Allow** to grant access for the Salesforce system user to access the Marketing Cloud account.

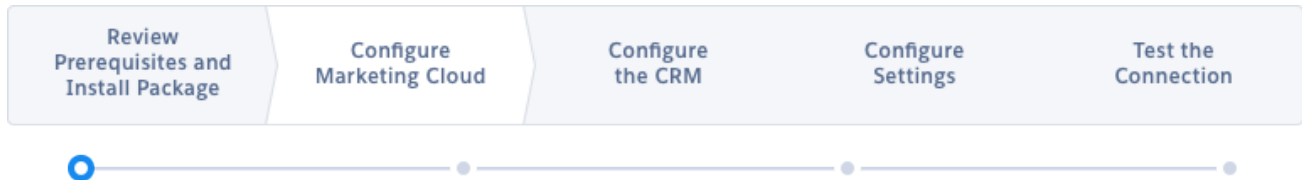

See Also

[Account Configuration for User Data Access](#)

Create a Marketing Cloud API User in Marketing Cloud Connect

Create a Marketing Cloud API user in Marketing Cloud Connect for Marketing Cloud Engagement.


Create the [Marketing Cloud API User](#), which is typically a unique user that connects to the Salesforce System User in Marketing Cloud Connect Setup.

1. In Engagement, go to Email Studio.
2. Click **Admin**.
3. Click **My Users**.
4. Click **Create**.
5. Name the user to identify it easily.
6. Enter your email address as the Reply Email and Notification Email Addresses.
7. Enter a unique username.
8. Leave the External ID field blank, unless required by your organization.
9. Set a Time Zone.
10. Set a Culture Code.
11. Select **API User**.
12. Create a temporary password.
13. If you're not using an Enterprise 2.0 account, set these roles and permissions on this page.
 - User Permissions: NONE
 - Marketing Cloud Permissions and Roles: NONE
 - Select **Email Application**
 - Select **Mobile Connect** if applicable
 - Select **Marketing Cloud Administrator** role
14. Save the new Marketing Cloud API user.



Note If you're using an Enterprise 2.0 account, continue to set roles and permissions.


15. Click **My Users** from Email Studio Admin.
16. Select the Marketing Cloud API User.
17. Click **Manage Roles**.
18. Click **Edit Roles**.
19. Assign Administrator and Market Cloud Administrator roles.
20. Save the roles for the Marketing Cloud API user.

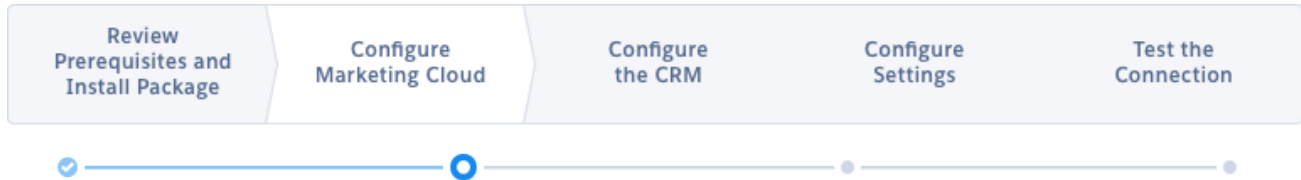

Connect the Marketing Cloud API User in Marketing Cloud Connect

Connect the Marketing Cloud API user to the Salesforce system user to enable core system communication activities in Marketing Cloud Connect for Marketing Cloud Engagement. These activities include pushing tracking data from Engagement into your Sales or Service Cloud.

1. In Engagement, go to Email Studio.
2. Click **Admin**.
3. Expand Account Settings and click **My Users**.
4. Select the API user.
5. Click **Integrate** for Salesforce.com Status.
6. Enter the Salesforce system user username.
7. Save the settings.
8. The Salesforce.com Status field updates to Integrated if the connection is successful.

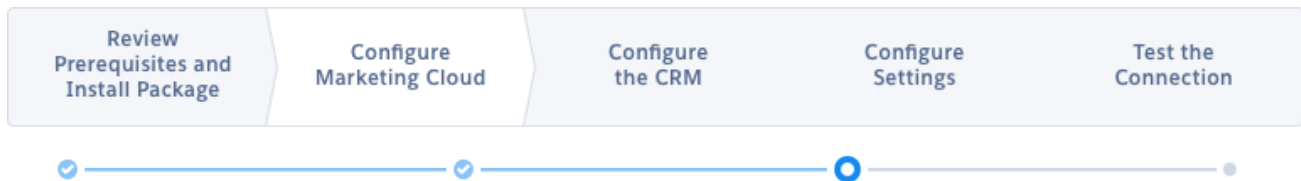

Assign Business Units

For Marketing Cloud Engagement Enterprise 2.0 accounts, assign applicable business units to the Marketing Cloud Engagement API user. The Marketing Cloud Connect API user's business unit access in Engagement determines which business units are available for use within Sales or Service Cloud.




Note If your Engagement account isn't Enterprise 2.0, proceed to the next topic. Not sure what type of account you have? Review Marketing Cloud Engagement editions to learn your account type or talk to your account representative.

1. In Engagement, go to **Email Studio**.

2. Click **Admin**.
3. Click **My Users**.
4. Select the Marketing Cloud Engagement API User.
5. Click **Manage Business Units** at the top of the Users table.
6. Ensure that the selection under Default Business Unit is the top-level business unit.
7. In the Associated Business Units section, select all business units to be used with Marketing Cloud Connect.
8. Save the changes to the Marketing Cloud Engagement API User.


 **Note** Repeat this process when creating business units in the future for use with Marketing Cloud Connect.

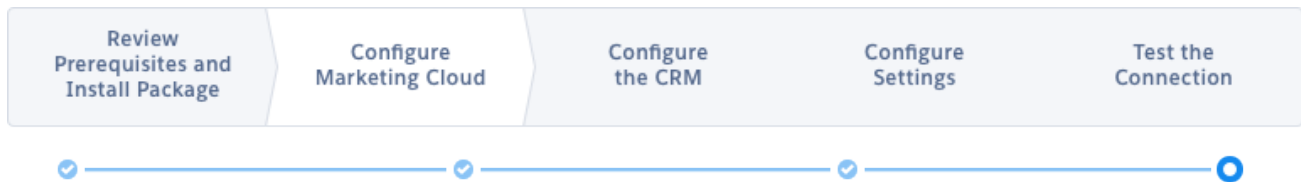

Configure the CRM

The Salesforce CRM admin performs these tasks to configure Sales or Service Cloud for Marketing Cloud Connect for Marketing Cloud Engagement.

Complete this next set of tasks in the installation and setup process after configuring Engagement.

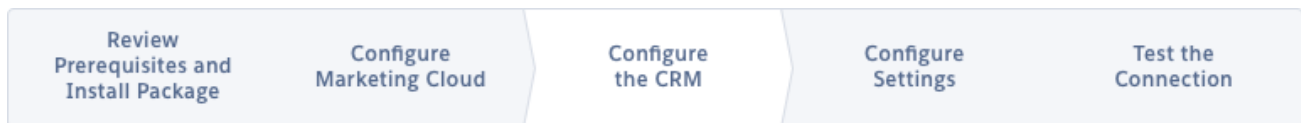

1. **Set Up Connected App Authentication**
Set up connected app authentication for Marketing Cloud Connect for Marketing Cloud Engagement. This mechanism authenticates between Sales Cloud, Service Cloud, and Engagement without requiring you to store passwords in Engagement. It also prevents SOAP and REST API calls made by Marketing Cloud Connect from counting against your rolling 24-hour limit.
2. **Update Field-Level Security**
To send Marketing Cloud emails through Marketing Cloud Connect for Marketing Cloud Engagement, you must make the email opt-out field visible on leads and contacts.
3. **Update User Page Layouts**
Add email and mobile send tracking to contact and lead pages to continue configuration of Sales and Service Cloud for Marketing Cloud Connect for Marketing Cloud Engagement.
4. **Update Lead Page Layouts**
Configure the lead page to ensure Marketing Cloud Connect users can see the relevant Marketing Cloud Connect fields.
5. **Update Contact Page Layouts**
Configure the contact page to ensure Marketing Cloud Connect users can see the relevant Marketing Cloud Connect fields.

6. **Launch the Setup Wizard**

To configure Marketing Cloud Connect for Marketing Cloud Engagement in Sales or Service Cloud, launch the setup wizard in Salesforce Classic UI.

7. **Connect to Marketing Cloud**

The Sales or Service Cloud admin connects the Sales or Service Cloud account with the Marketing Cloud Engagement account using the Marketing Cloud API user credentials. This task completes the account-level connection for Marketing Cloud Connect.

Set Up Connected App Authentication

Set up connected app authentication for Marketing Cloud Connect for Marketing Cloud Engagement. This mechanism authenticates between Sales Cloud, Service Cloud, and Engagement without requiring you to store passwords in Engagement. It also prevents SOAP and REST API calls made by Marketing Cloud Connect from counting against your rolling 24-hour limit.


1. In the Sales or Service Cloud, click **Setup**.
2. Under Administer, click **Manage Apps**.
3. Click **Connected Apps**.
4. Click **Salesforce Marketing Cloud**.
5. Click **Edit Policies**.
6. Under Permitted Users, select **Admin approved users are pre-authorized**.
7. If a warning message appears, click **OK**.
8. Under IP Relaxation, select **Relax IP restrictions**.
9. Under Refresh Token Policy, select **Immediately expire refresh token**.
10. Save changes.
11. From Setup, click **Manage Users** under Administer.
12. Click **Permission Sets**.
13. Click **New**.
14. Give the permission set a memorable name. For example, Marketing Cloud Connected App.
15. Validate the generated API name and ensure that this field contains the desired value.
16. Save the permission set.
Apply the permission sets to the API User: Marketing Cloud Connected App, Marketing Cloud Connector, Marketing Cloud Connector Admin, and Marketing Cloud System User.
17. From Setup, click **Manage Users** under Administer.
18. Click **Permission Sets**.
19. Click the name of the newly created permission.
20. Click **Manage Assignments**.
21. Click **Add Assignments**.
22. Select the users who need access to the connected app, typically those users who access Marketing Cloud Connect.
23. Make sure that the Salesforce system user is selected for access.
24. Click **Assign**.
25. Click **Done**.
26. In the Sales or Service Cloud, click **Setup**.
27. Under Administer, click **Manage Apps**.

28. Click **Connected Apps**.
29. Click **Salesforce Marketing Cloud**.
30. Click **Manage Permission Sets**.
31. Select the newly created permission set.
32. Save changes.



Warning During this process, the system connects to any active Engagement session to establish the Marketing Cloud Connect API user. To prevent an incorrect connection, log out of all active Engagement sessions. Closing the tab doesn't end an active session.

33. In Sales or Service Cloud, go to the Marketing Cloud tab.
34. Click **Connect to Marketing Cloud**.
35. Enter the username and password for the Marketing Cloud Connect API User.
36. Click **Login**.

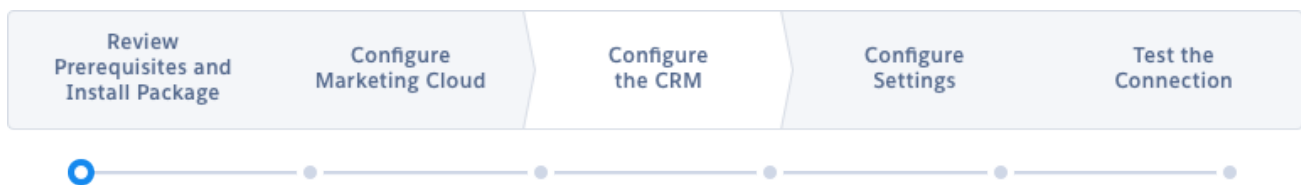

See Also

[Marketing Cloud Connect User Types and Permissions](#)

[Test the Connection in Marketing Cloud Connect](#)

[Manage Marketing Cloud Connect Settings](#)

Update Field-Level Security

To send Marketing Cloud emails through Marketing Cloud Connect for Marketing Cloud Engagement, you must make the email opt-out field visible on leads and contacts.

1. In Sales or Service Cloud, go to **Setup**.
2. Click **Customize** under Build.
3. Click **Contacts**.
4. Click **Fields**.
5. Click **Email Opt Out**.
6. Click **Set Field-Level Security**.
7. Enable Visibility for all applicable profiles.
8. Save.
9. Click **Customize** under Build in the Setup menu.
10. Click **Leads**.
11. Click **Fields**.
12. Click **Email Opt Out**.
13. Click **Set Field-Level Security**.
14. Enable Visibility for all applicable profiles.
15. Save.



Update User Page Layouts

Add email and mobile send tracking to contact and lead pages to continue configuration of Sales and Service Cloud for Marketing Cloud Connect for Marketing Cloud Engagement.


The Sales or Service Cloud admin performs this task to update the page layouts for contacts and leads to include Marketing Cloud Connect functionality.

1. In the Salesforce CRM org click **Setup**.
2. Enter Users in the Quick Find box and select **Users** under Build > Customize.
3. Click **Page Layouts**.
4. Under User Page Layouts, click Edit next to User Layout.
5. Scroll down to view the Additional Information section of the user page layout.
6. Drag **Marketing Cloud Engagement for AppExchange Admin** from the palette to the Additional Information section of the user page layout.
7. Drag **Marketing Cloud Engagement for AppExchange User** to the same section.
8. Click **Save**.



Note The Marketing Cloud Connect managed package includes page layout elements that are no longer needed and can be deleted if desired.

- @deprecated / et4ae5.Default_MID
- @deprecated / et4ae5.ExactTarget_OAuth_Token
- Default Marketing Cloud Page / et4ae5.Default_ET_Page
- Marketing Cloud Username / et4ae5.ExactTargetUsername
- Valid Marketing Cloud Admin / et4ae5.ExactTargetAdmin
- Valid Marketing Cloud User / et4ae5.ExactTargetUser

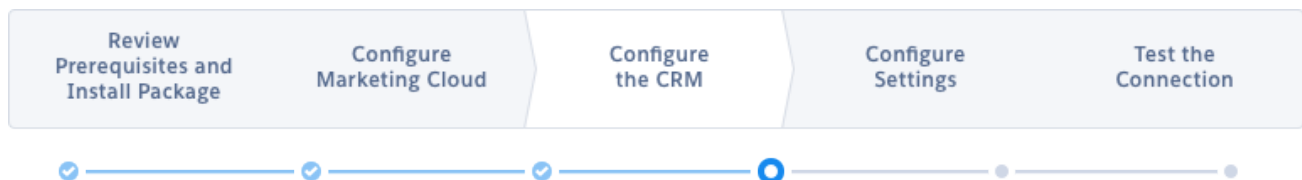

See Also

[Page Layouts](#)

Update Lead Page Layouts

Configure the lead page to ensure Marketing Cloud Connect users can see the relevant Marketing Cloud

Connect fields.

The Sales or Service Cloud admin performs this task to update the page layouts for contacts and leads to include Marketing Cloud Connect functionality.

1. In the Salesforce CRM org click **Setup**.
2. Enter Users in the Quick Find box and select **Users** under Build > Customize > Leads.
3. Click **Page Layouts**.
4. Under Lead Page Layout, click **Edit** next to Lead Layout.
5. In the layout you selected, from the tool palette options select **Related Lists**.
6. Drag **Email Sends** from the palette to the Additional Information section of the lead page layout to create a new related list.
7. Drag **Individual Email Results** to the same section.
8. Select **Visualforce Pages** from the palette options.
9. Drag **LeadActions** from the palette to the Description Information section of the Lead page.
10. Click **Save**.
11. Click **Yes** to **Overwrite Users' Related List Customizations?**

Update Contact Page Layouts

Configure the contact page to ensure Marketing Cloud Connect users can see the relevant Marketing Cloud Connect fields.

The Sales or Service Cloud admin performs this task to update the page layouts for contacts and leads to include Marketing Cloud Connect functionality.

1. In the Salesforce CRM org click **Setup**.
2. Enter Users in the Quick Find box and select **Users** under Build > Customize > Contacts.
3. Click **Page Layouts**.
4. Under Lead Page Layout, click **Edit** next to Contact Layout.
5. In the layout you selected, from the tool palette options select **Related Lists**.
6. Drag **Email Sends** from the palette to the Additional Information section of the lead page layout to create a new related list.
7. Drag **Individual Email Results** to the same section.
8. Select **Visualforce Pages** from the palette options.
9. Drag **ContactActions** from the palette to the Description Information section of the Contact page.
10. Click **Save**.
11. Click **Yes** to **Overwrite Users' Related List Customizations?**

Launch the Setup Wizard

To configure Marketing Cloud Connect for Marketing Cloud Engagement in Sales or Service Cloud, launch the setup wizard in Salesforce Classic UI.

This process launches the setup wizard to automatically add required IP addresses to the allowlist, create required workflows, and set up new permission sets.


 **Important** Lightning Experience doesn't support the setup wizard.

 **Note** Custom domains aren't required to use the setup wizard. However, if you don't use the setup wizard, manually add IP Addresses to the allowlist and create workflows.

1. In the Sales or Service Cloud Setup menu, click **Security Controls** under Administer.
2. Click **Session Settings**.
3. Save without changing anything.
4. In the Sales or Service Cloud, navigate to the **Marketing Cloud** tab.
5. Agree to verify the Metadata API remote site.
6. Start the automatic setup wizard.
7. Ensure that you completed the pre-install tasks.
8. Agree to the terms.
9. To run the setup wizard, click **Configure Marketing Cloud Connect**.
10. Click **Okay** when the wizard is complete.

 **Note** If you couldn't automatically verify the Metadata API remote site, follow these steps to install the remote site manually.

11. In the Sales or Service Cloud Setup menu, click **Security Controls** under Administer.
12. Click **Remote Site Settings**.
13. Click **New Remote Site**.
14. Edit the new remote site with this information.
 - Remote Site Name: MetadataAPI
 - Remote Site URL: `https://{domain}.salesforce.com`
 - Description: Remote site setting to make callouts
15. Save the remote site.

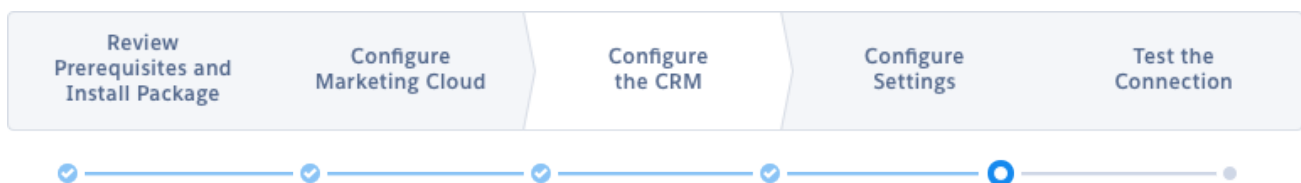

Add IP Addresses to Allowlist in Marketing Cloud Connect

If you didn't use the Marketing Cloud Connect Setup Wizard, follow these steps to manually add IP addresses to your allowlist. The allowlist identifies them as safe and grants access to trusted networks, allowing Marketing Cloud Connect for Marketing Cloud Engagement to communicate across networks.

Add IP Addresses to Allowlist in Marketing Cloud Connect

If you didn't use the Marketing Cloud Connect Setup Wizard, follow these steps to manually add IP addresses to your allowlist. The allowlist identifies them as safe and grants access to trusted networks, allowing Marketing Cloud Connect for Marketing Cloud Engagement to communicate across networks.

1. In the Sales or Service Cloud Setup menu, click **Security Controls**.

2. Click **Network Access**.
3. Enter the IP address ranges [listed here](#).
4. Save the allowlisted IP address ranges.

Connect to Marketing Cloud


The Sales or Service Cloud admin connects the Sales or Service Cloud account with the Marketing Cloud Engagement account using the Marketing Cloud API user credentials. This task completes the account-level connection for Marketing Cloud Connect.

1. In Sales or Service Cloud, go to the Marketing Cloud tab.
2. Click **Show Advanced Settings**.
3. Enable Tenant-Specific OAuth Endpoints.

When you enable Tenant-Specific OAuth Endpoints, your Marketing Cloud Connector Settings are removed. If you're reintegrating, record your settings before enablement.

4. Enter the Marketing Cloud API user credentials.
5. To connect the accounts, click **Connect**.

You can now manage Marketing Cloud Connect settings and test the connection to complete the setup.

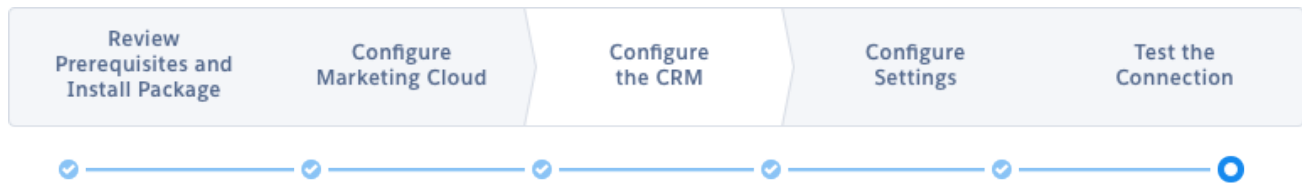


Configure Settings

Configure Marketing Cloud Connect for Marketing Cloud Engagement settings after installation and setup.

1. [Manage Settings](#)
Configure these settings after installation to enable sending.
2. [Map Attribute Fields](#)
Personalize communications by linking Contact and Lead fields with Engagement attributes.
3. [Service Cloud Setup](#)
If you're using Service Cloud, follow these steps to complete Marketing Cloud Connect integration.
4. [Business Unit Management](#)
Map business units from Engagement Enterprise 2.0 accounts across clouds to enable them in Marketing Cloud Connect.

Next topic: [Test Connection](#)

Previous topic: [Connect to Marketing Cloud](#)

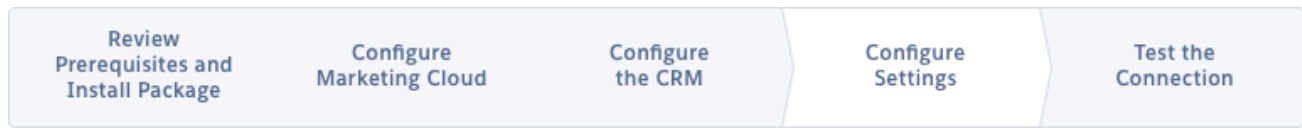

Test the Connection in Marketing Cloud Connect

Make sure that Marketing Cloud Connect for Marketing Cloud Engagement is set up correctly for sending.

[Map field attributes](#) in Engagement and ensure that you configured Marketing Cloud Connect settings before completing this test.

1. To create an email for this test, go to Email Studio in Marketing Cloud.
2. Click **Content** and create an email. For example:

```

Sent to: %%emailaddr%% <br> JobID: %%jobid%% <br> <table cellpadding="2"
cellspacing="0" width="600" ID="Table5" Border=0><tr><td><font face="verdana"
size="1" color="#444444">This email was sent by:
<b>%%Member_Busname%%</b><br>%%Member_Addr%% %%Member_City%%, %%Member_State%%,
%%Member_PostalCode%%, %%Member_Country%%<br><br></font></td></tr></table>
%%jobid%%<br><br> <a href="%%unsub_center_url%%"
alias="Unsubscribe">Unsubscribe</a> <custom name="opencounter"
type="tracking">
  
```


3. Select **Text Only**.
4. Name the email and click **Next**.
5. Enter a subject line, for example, *Integration Test*.
6. To test field mapping and personalization, enter the profile attributes that you mapped and System Attributes.
7. Select these System Snippets: **Physical Mailing Address (Required)**, **Profile Center (Required)**, and **Forward to a Friend**.
8. Save the email.
9. To create a lead and report for this test, navigate to the **Leads** object in Sales Cloud.
10. Create a lead with your name, email address, and ZIP code.
11. Navigate to the **Reports** object.
12. Create a report that displays only your lead record. Include Contact or Lead ID in the report. For example, create a Lead Report where Last Name = your last name and ZIP code = your ZIP code.
13. Save the report to the Marketing Cloud Admin report folder.
14. If your account is configured for non-scope by user, filter the report to show all leads.
15. To test the connection by sending an email, navigate to the **Marketing Cloud** object.
16. To select the email you created for this test, click **Find**.
17. Select **Report** for Recipients and search for the report you created for this test.
18. Select your email address for the From email address list.
19. Certify that all of these people have opted in.
20. Send the email.
21. To verify the test in the Sales Cloud, navigate to the **Email Sends** object.



Note The test send can take up to 60 minutes to complete.

22. Click the Email Send Number in the Recently Viewed list that corresponds with the test send.
23. To confirm that send was completed, check the status of the email.
24. Check the test email that you received to ensure the personalization populated correctly.

Previous Topic: [Configure Settings](#)

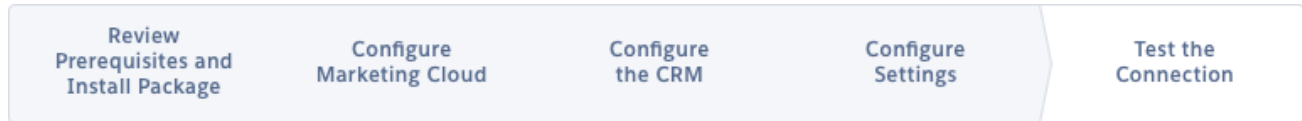

Upgrade to Marketing Cloud Connect

Learn the benefits of upgrading to Marketing Cloud Connect for Marketing Cloud Engagement from an earlier version of the connector. Marketing Cloud Connect is a more efficient and effective way to manage your connection to the Sales or Service Cloud.

Benefits of Upgrading

- Marketing Cloud Connect is integrated with Journey Builder, allowing use of Salesforce CRM data to power your cross-cloud journeys.
- Use your Salesforce CRM data in Engagement for segmentation and sending. Use Salesforce data extensions in interactions, Automation Studio, and guided sends.
- Use triggered sends to automatically send emails based on changes made to your Salesforce CRM data.
- Synchronized data tools bring data from standard or custom Salesforce objects into Engagement for direct access without manually exporting, importing, or setting up automations.
- Use Dynamic Send Preview to see fully rendered and personalized Engagement emails with real data inside the Sales Cloud or Service Cloud.
- Connect individual Enterprise 2.0 Engagement business units with a single Salesforce org, independent of their parent account or any other business unit.
- A/B testing from Marketing, Sales, or Service Cloud provides an opportunity to test differences in emails with customers to determine which version performs best.
- Manage the storage of Engagement tracking data stored in the Sales or Service Cloud.
- Admins have access through the Sales or Service Cloud to manage Engagement users and business units that can access Marketing Cloud Connect.

See Also

[Marketing Cloud Connect Features](#)

Disconnect Account

The ability to disconnect a Marketing Cloud Engagement account from a Sales or Service Cloud account is only available for Enterprise 2.0, Core, and Lock & Publish accounts. Install managed package version

5.493 or later. The account must use connected app authentication. The Engagement admin can disconnect the accounts by editing the Salesforce Integration in the Email Studio admin. Disconnecting takes from 5 minutes to several hours depending on the number of synchronized data extensions. The Sales or Service Cloud admin then uninstalls the package.



Note There's a known issue with Google Chrome. If you cancel after clicking Disconnect Account and try disconnecting again, the process fails.

Disconnecting does the following:

- Removes the connection between your Engagement account and the Sales or Service Cloud org.
- Removes the Salesforce system user's credentials and resets the connection at the account level.
- Removes user mappings in the disconnected business unit and synchronized data extensions.
- Cancels tracking subscriptions. Any tracking for previous sends isn't pushed to the previous Sales or Service Cloud org. Tracking isn't affected in Engagement.



Important Background processes and activities, such as active triggered sends, continue functioning until you inactivate them.

If needed for a new connection, remap all disconnected business units, orgs, and users, and reconfigure synchronized data extensions.

If a new connection is made, tracking for previous sends isn't pushed to the new org.

See Also

[Uninstall a Managed Package](#)

Authentication Between Clouds

Connected App Authentication is a secure authentication mechanism used by Marketing Cloud Connect to connect from Marketing Cloud Engagement to Sales or Service Cloud. Now your users are authenticated automatically without Sales or Service Cloud user password management.

Authentication tools connect your users automatically between Engagement, Sales Cloud, and Service Cloud to create a secure, seamless experience working with Marketing Cloud Connect. After Salesforce admins complete the initial setup and configuration, users log in once to Marketing Cloud Connect and are automatically authenticated in the future.

Authentication from Engagement into the Sales and Service Clouds

Connected App Authentication is a secure authentication mechanism used by Marketing Cloud Connect. It removes SOAP and REST API limits for Marketing Cloud Connect. Connected App Authentication doesn't lift BULK API limits. API calls made into Engagement don't count against your daily limit.

Connected App authentication is required for all Marketing Cloud Connect customers as of June 1,

2016. It's available with all versions of Marketing Cloud Connect. New customers who complete all steps to connect clouds installed Connected App authentication. If you're an existing customer with an older version of the managed package, complete all steps to upgrade to Connected App Authentication.

Authentication from the Sales and Service Cloud into Engagement

Tenant-specific OAuth Authentication uses the JWT bearer token flow and access tokens to provide a secure connection between the clouds, without storing Engagement user passwords within Sales and Service Clouds. This enhanced authentication is available with the 220 or newer managed package release.

To reduce downtime or impact to your business, follow these steps if you're upgrading from an older version of the managed package.

- Allow all scheduled sends to complete before starting the upgrade, if possible.
- Ensure that you can log in to Engagement using the current API user credentials.
- To minimize downtime if an unexpected error occurs, schedule the upgrade during off-peak hours.
- Install the managed package.
- In Sales or Service Cloud in the Marketing Cloud Configuration Settings, enable tenant-specific OAuth Endpoints.
- Click **Connect to Marketing Cloud**.
- Enter the API user credentials.
- Click **Log-in**.

When the upgrade completes, verify that Marketing Cloud Connect API user credentials converted to the new authentication framework by navigating to the Marketing Cloud tab in Sales or Service Cloud. If the API user didn't migrate, you're prompted to enter the API user credentials. If you have an Enterprise 2.0 Engagement account, click Manage Business Units and confirm that previously active business units are active. Add business units if needed and save. Also, confirm the API user migration for non-Enterprise 2.0 accounts by completing a triggered send test.

[Upgrade to Connected App](#)

Upgrade your account to use Connected App Authentication, which is required for all Marketing Cloud Connect for Marketing Cloud Engagement accounts as of June 1, 2016.

[Troubleshoot Connected App](#)

Follow these tips to troubleshoot your Connected App authentication for Marketing Cloud Connect for Marketing Cloud Engagement.

See Also

[Connected Apps](#)

[Authorize Apps with OAuth](#)

[Set Up Connected App Authentication](#)

Upgrade to Connected App

Upgrade your account to use Connected App Authentication, which is required for all Marketing Cloud Connect for Marketing Cloud Engagement accounts as of June 1, 2016.

If "My Documents in Content" is enabled for your account, view migration details in files named with the date and `migrationsuccess.csv` or `migrationfailures.csv`.

 **Important** Schedule a 2-hour sending outage for the upgrade. The connection between the Sales, Service, and Marketing Cloud Engagement isn't available during the upgrade process, so ensure that all Marketing Cloud Connect activities are paused. All sends to reports, campaigns, contacts, leads, and Salesforce data extensions fail. Marketing Cloud Engagement sends that do not involve Marketing Cloud Connect aren't affected.

The Engagement admin completes steps 1–11. The Sales or Service Cloud admin completes the remaining steps.

1. In the Marketing Cloud, navigate to **Email Studio**.
2. Click **Admin**.
3. Click **Salesforce Integration**.
4. Click **Upgrade to Connected App**.

 **Warning** During this process, the system automatically connects to any active Salesforce session. To prevent incorrect connection, log out of any active Sales or Service Cloud sessions, other than the Salesforce system user session for this process. Closing the tab doesn't end an active session. If you are using a company-specific login URL, such as `https://mycompany.my.salesforce.com`, log in to the org that you're connecting to using the Salesforce system user credentials before connecting your accounts.

5. Click **Connect Account**.
6. Acknowledge the changes to your account and begin the upgrade process.
7. Log in to your Sales or Service Cloud org using the Salesforce system user credentials if prompted.
8. Allow the Salesforce Marketing Cloud Connected App to access your data if prompted.
9. Select **Migrate Existing Users** to automatically reconnect any previously connected users, if available. Auto-connection is available for 14 days after the upgrade.
10. To begin the auto-connection process, click **Connect**.
11. To close the auto-connection results popup window, click **OK**.
12. In the Sales or Service cloud, click **Setup**.
13. Search for **Connected Apps** in the Quick Find box and click **Connected Apps**.
14. Click **Salesforce Marketing Cloud**.
15. Click **Edit**.
16. Under Permitted Users, select **Admin approved users are pre-authorized**.
17. Under IP Relaxation, select **Relax IP restrictions**.
18. Under Refresh Token Policy, select **Immediately expire refresh token**.
19. Click **Save**.
20. From Setup, search for **Permission Sets** in the Quick Find box and click **Permission Sets**.

21. Create a new permission set.



Note This permission set is used to associate users to the Salesforce Marketing Cloud Connected App and can remain empty.

22. Name the permission set, for example, **Marketing Cloud Connected App**.
23. Validate the auto-generated API, which is generated using the permission set name.
24. Save the changes.
25. Click the name of the newly created permission set.
26. Click **Manage Assignments**.
27. Click **Add Assignments**.
28. Select the users who need access to the Connected App, typically all users with access to Marketing Cloud Connect.
29. Click **Assign**.
30. Click **Done**.
31. From Setup, search for **Connected Apps** in the Quick Find box and click **Connected Apps**.
32. Click **Salesforce Marketing Cloud**.
33. Click **Manage Permission Sets**.
34. Select the newly created permission set.
35. Click **Save**.

The Connected App authentication upgrade is complete. Send a test email to yourself to validate the connection and monitor your API usage.

See Also

[Connected Apps](#)

Troubleshoot Connected App

Follow these tips to troubleshoot your Connected App authentication for Marketing Cloud Connect for Marketing Cloud Engagement.

Users Can't Access Marketing Cloud Connect

Ensure that you granted users the Marketing Cloud for AppExchange User permission and the permission set created during the Connected App Authentication process. Apply this same permission to the Marketing Cloud Connected App.

If those permissions have been granted to the users, check to see if you changed your connected Engagement account or business unit. It's possible that the system is attempting to log in the users to a previously connected Engagement account or business unit. Salesforce uses tokens stored in a protected custom setting to authenticate between Engagement and other clouds. Resetting your connection doesn't reset those tokens.

Refreshing the API user connection resets Marketing Cloud Connect users tokens account-wide. Go to the Marketing Cloud Connect configuration page and click **Change API User**. Reenter the credentials for your existing Marketing Cloud API user.

Reconnect any connected business units after refreshing the user.

Users Receive a Login or Credential Exception When Sending a Marketing Cloud Email

Grant users access to the permission set, created during the Connected App authentication process, to send using Marketing Cloud Connect.

See Also

[Permission-Based Access](#)

[Manage Users](#)

[Map Business Units](#)

Manage Marketing Cloud Connect Settings

Admins access Marketing Cloud Connect for Marketing Cloud Engagement settings and send configuration by navigating to the Engagement object in the Sales or Service Cloud. Admins can configure these settings, including sends, tracking, users, and business units, after the installation and setup process to enable sending through Marketing Cloud Connect.

Field	Description
Username	The username of the Marketing Cloud Engagement API user who connects the accounts.
Marketing Cloud Type	Engagement edition type.
Send Types	Type of sends available for use through Marketing Cloud Connect. Email must be selected to ensure that sends are enabled for users.
Alternate 'Reply-to' Options	Allows you to select from a configurable list of names and email addresses to have replies sent. Reply Mail Management must be enabled and configured in Engagement for Reply-To Options to work.
Marketing Cloud Deep Link Access	These Edit, New Email, and Go To Marketing Cloud links automatically log in users to Engagement to perform those functions. Use this configuration setting to restrict the use of these deep links within the Marketing Cloud Connect installation.
Target Audience	Recipient type that can be selected for sending. Select Report and Campaign to enable sending

Field	Description
	through Marketing Cloud Connect. Only active campaigns are sendable. With scope by user configuration, you need access to folders containing the desired report to send to them.
Exclusion Audience	Audience type that can be excluded from targeted audiences.
Retry Failed Sends	If this option is selected, the system retries sending if the system is temporarily unavailable. The option to cancel a send is provided to prevent it from being retried. Retry is only available when a support ticket recipient has been added to this settings page.
My Personal Custom Reports	Enabling this option allows sending to reports saved in My Personal Custom Reports folder. This option is available for scope by user account configuration only, as system admins don't have access to this folder.
Restriction	Select the desired restriction level of Marketing Cloud Connect triggered sends to only admins or admins and users. This restriction applies only to the administration of triggered sends, not sending them.
Enabled Objects	Set the list of objects that triggered sends can be created for within Marketing Cloud Connect.
Support Ticket Recipient	Set an email address of the Salesforce support resource in your company who gets notifications of issues or problems with Marketing Cloud Connect.
Logging	Selecting this option starts logging all package-related API calls and associated details. Logging is disabled 60 minutes after it's enabled. After logging is enabled, the Initiate Logging button changes to a hyperlink that links to the Documents object. From Documents, select Marketing Cloud Documents.
Tracking Detail	Select the desired level of tracking data to return to the Sales or Service Cloud from Engagement.
Tracking Frequency	Set the desired frequency for tracking data to be

Field	Description
	updated. We recommend hourly.
Number of Days Tracked	Set the number of days that tracking data is returned to the Sales or Service Cloud after the send, up to 365 days. Tracking data is retained in Salesforce after this time period has expired. We recommend 90 days.
Campaign Member Tracking	Allows for setting campaign member status based on tracking data.
(Advanced setting) Tenant-Specific OAuth Endpoints	Enable tenant-specific OAuth endpoints or remove to use generic endpoints. Use these endpoints to enable security interactions for your integration and protect against service disruptions in authentication.

Map Attribute Fields

To personalize communications, map Sales Cloud Contact, Lead, and Account objects in Marketing Cloud Engagement to share attributes across the clouds and enable personalization for Marketing Cloud Connect communications. Multi-org doesn't support Web Collect or custom field and attribute mapping.

Set Up Service Cloud for Marketing Cloud Connect

Create an app in Service Cloud for Marketing Cloud Engagement.

Map Business Units

Map business units from Marketing Cloud Engagement Enterprise 2.0 accounts across clouds to enable them in Marketing Cloud Connect.

See Also

[Reply Mail Management for Marketing Cloud Email Tracking and Analytics](#)
[Campaign Member Integration](#)

Map Attribute Fields

To personalize communications, map Sales Cloud Contact, Lead, and Account objects in Marketing Cloud Engagement to share attributes across the clouds and enable personalization for Marketing Cloud Connect communications. Multi-org doesn't support Web Collect or custom field and attribute mapping.

1. In Engagement, go to Email Studio.
2. Click **Subscribers**.
3. Click **Profile Management**.
4. Select an attribute or create one.
5. In the New Attribute Properties window, click the **Salesforce** tab within the attribute properties.

The Salesforce tab is only available if you already connected your Marketing Cloud account with your Sales or Service Cloud org through Marketing Cloud Connect.

6. To map the attribute, select the field.



Note The maximum length of the Profile Attribute must match the maximum length of the Salesforce object. Mismatched lengths can cause errors with a triggered send or a Journey Builder send.

7. Repeat to map each attribute to a field in the Sales or Service Cloud.

Set Up Service Cloud for Marketing Cloud Connect

Create an app in Service Cloud for Marketing Cloud Engagement.

1. In Service Cloud, navigate to **Setup**.
2. Click **Create**.
3. Click **Apps**.
4. Click **New**.
5. Enter *Marketing Cloud* for the app label and name to create the app.
6. Add a logo if desired.
7. Customize tabs and add *Marketing Cloud*, *Email Sends*, and *Send Analytics*.
8. Assign these tabs to the applicable profiles, making the new custom app visible in the Salesforce AppExchange menu.
9. Save the changes.

Map Business Units

Map business units from Marketing Cloud Engagement Enterprise 2.0 accounts across clouds to enable them in Marketing Cloud Connect.

Before installation and configuration, confirm that the Marketing Cloud Engagement API user can access these items.

- Top-level default parent business unit
- All business units that are enabled for sends through Marketing Cloud Connect

1. In Sales or Service Cloud, go to the Marketing Cloud tab.
2. Click **Configure Marketing Cloud Connector**.
3. Click **Manage Business Units**.
4. Select business units to enable.
5. Save the selections.

This page only supports 4,000 business units. If you have more than 4,000, create a business unit tab as a custom solution to accommodate more. You can use a single integration user for a maximum of five business units.

See Also

[Assign Business Units](#)

[Enterprise 1.0 Overview](#)

Manage Users

After completing the Marketing Cloud Connect for Marketing Cloud Engagement installation and setup, integrate Engagement and Sales or Service Cloud users to enable access to Marketing Cloud Connect.

Marketing Cloud Connect users need a license for Engagement and a license for Salesforce CRM to use most Marketing Cloud Connect functionality.

Enterprise 2.0 Marketing Cloud Accounts

The Marketing Cloud admin follows this process to set up users in Enterprise 2.0 Marketing Cloud accounts for Marketing Cloud Connect.

1. In Marketing Cloud, go to Email Studio.
 2. Click **Admin**.
 3. Click **My Users**.
 4. Select the user to connect.
 5. Click **Integrate** for Salesforce.com Status.
 6. Enter the Sales or Service Cloud username.
 7. Save the settings.
 8. From My Users, select the user.
 9. Click **Manage Roles**.
 10. Select the applicable business unit.
 11. Click **Edit Roles**.
 12. Select these minimum permissions required for sending through Marketing Cloud Connect.
 - **Content Creator**
 - **Data Manager**
 - **Marketing Cloud Content Editor/Publisher**
-  **Note** You can also allow Email > Integrations permissions for any users that need to send from your connected Salesforce org.
13. Save the roles.

All Other Marketing Cloud Accounts

The Marketing Cloud admin follows this process to set up users in all non-Enterprise 2.0 Marketing Cloud accounts for Marketing Cloud Connect.

1. In Marketing Cloud, go to Email Studio.
2. Click **Admin**.
3. Click **Account Settings**.

4. Click **My Users**.
5. Click the applicable user.
6. Click **Integrate** for Salesforce.com Status.
7. Enter the Sales or Service Cloud username.
8. Save the settings.
9. Click **Edit**.
10. Select **Enabled**.
11. Select **API User**.
12. Under User Permissions, select these minimum permissions.
 - **Grant the user access to the web services**
 - **Administrative Data Management**
 - **Manage Data Extension Data and Retention Policy**
13. Under Marketing Cloud Permissions and Roles, select **Email** for applications.
14. Under Marketing Cloud Permissions and Roles, select **Marketing Cloud Content Editor/Publisher** or **Administrator** for roles.
15. Save the changes.
16. Repeat this process for all integration users.

Integrate Users with Marketing Cloud

The Marketing Cloud Connect admin finishes the user setup process in Marketing Cloud Connect.

1. In Sales or Service Cloud, go to the Marketing Cloud tab.
2. Click **Configure Marketing Cloud Connector**.
3. Click **Manage Users**.
4. Select each applicable user.
5. To complete the setup, save your changes.

Remove Users

Admins in Sales Cloud, Service Cloud, or Experience Cloud can remove user access to Marketing Cloud Connect for Marketing Cloud Engagement.

1. Go to the Marketing Cloud tab.
2. Click **Configure Marketing Cloud Connector**.
3. Click **Manage Users**.
4. Deselect the user.
5. Save your work.

Update Marketing Cloud Engagement API User

Change the Marketing Cloud Engagement API User for the Marketing Cloud Connect for Marketing Cloud Engagement integration.



Warning When you update Marketing Cloud Engagement API user credentials, email send processing stops and can result in failed triggered or scheduled sends. Before updating the API user, pause all email sends and deactivate triggered sends.

1. Log out of all active Engagement sessions in your browser.
2. In Sales or Service Cloud, go to the Marketing Cloud tab.
3. Click **Configure Marketing Cloud Connector**.

If your integration token expired, click **Connect to Marketing Cloud** and enter the API user credentials to log in to Engagement and refresh the token.

4. Click **Change API User**.



Important If you're logged in to an active Engagement session in another tab, the system connects to that user. Log out of that session if it isn't the Marketing Cloud Engagement API user.

5. Enter the updated Marketing Cloud Engagement API user credentials.
6. Click **Update API User**.

All Marketing Cloud Connect users are asked to reauthenticate the next time they log in to Marketing Cloud Connect.

Permission-Based Access

If you purchased Marketing Cloud Engagement Licensing after our September 2016 Release, you can access Marketing Cloud Connect functionality. You can access the features when your Marketing Cloud and CRM users are connected: enter a valid username in the Salesforce.com status field on the Marketing Cloud user record.

New Feature Locations

When connected, you see Marketing Cloud Connect features in the following locations:

- Email Studio Email Admin
- Account Administration
- Global Navigation (Beta)  in Engagement Setup.

The Salesforce.com Status screen and field are available after connecting accounts through the Salesforce Integration page. From Email Studio, navigate to the user records in Email Admin.

Marketing Cloud Connect functionality is available after connecting individuals on the Salesforce.com Status field of the user record.

User Experience Changes

Changed Marketing Cloud Connect features and functionality include:

Changed Area	Release of Change	Changes and Notes
Salesforce (CRM) Reports • Salesforce (CRM) Campaigns • Salesforce Data Extensions (+ shared) • Guided Sends • Triggered Sends • Salesforce Sends • A/B Test • Salesforce Journey Builder Activities	September 2016	Visible after user is connected
Automation Studio	October 2016	• Visible always (no change to current behavior) • Shows an error if user is not connected • If the user who configured the automation remains connected, non-connected users can run automations using CRM audiences.
Email Send Flow	October 2016	• Visible always (no change to current behavior) • If the account is connected, Email Send Flow shows Salesforce Reports, Campaigns, and Data Extensions.

Account-level and user-level connection to Salesforce CRM determines access to specific functionality and data.

	Account Enabled	Account Enabled + Account Connected	Account Enabled + Account Connected + User Connected
Salesforce Integration Email > Admin	Available	Available	Available
Salesforce.com Status Email Admin > My Users > User	Not available	Available	Available
Salesforce Data Extension Sends*	Not available	Available	Available
Imports from Salesforce Objects and Reports**	Not available	Available (Non-Scope by User accounts only)	Available
Engagement Functionality	Not available	Not available	Available

*Salesforce Data Extensions (SFDEs) become visible and available for sending for all users once account-level connection is complete. Complete sends from Marketing Cloud email send flow, Salesforce Sends, guided sends, triggered sends, and A/B test sends.

**Importing Salesforce Objects and Reports via Interactions is available for all users in Non-Scope By User accounts. Importing Salesforce Objects and Reports via Interactions is available for connected users in Scope By User accounts.

Granting User Permissions

Engagement users need active Sales or Service Cloud user accounts to access Marketing Cloud Connect functionality. Grant users access by entering their corresponding Sales or Service Cloud username in their Engagement user record.

See Also

[Configure Marketing Cloud and Marketing Cloud Connect](#)

Email Sends

Integrated users send Marketing Cloud Engagement emails through the Sales or Service Cloud with Marketing Cloud Connect. Send single emails to leads, contacts, and person account records, or send to a list through campaigns and reports.

Send from Sales or Service Clouds

Send emails from any of the following:

- Running User: the person currently logged in to Salesforce.
- Record Owner: the user who created the record as the sender.
- Org-wide Email Address: a list of users in the Sales or Service Cloud whose email address qualifies as a possible sender.
- Send Classification: uses the sender profile associated with it.



Note Ensure that all default sender profiles, delivery profiles and send classifications aren't deleted or renamed. Marketing Cloud Connect must recognize Default Commercial and Default Transactional send classifications.

The first time a message is sent through Marketing Cloud Connect to a contact, lead, or person account from Sales or Service Cloud, that recipient is added to the All Subscribers list in Engagement. For example, when an Engagement email is sent from Sales Cloud to a report containing contacts, those contacts are added to the All Subscribers list. The Engagement status for that subscriber is set to Active in the All Subscribers list.

Also, the first time a message is sent through Marketing Cloud Connect to a contact, lead, or person account from Sales or Service Cloud, a unique Engagement subscriber key is created to identify that individual based on the LeadID or ContactID fields. Email tracking history, email opt-out, and preferences for that individual are tied to the subscriber key. If you use a lead conversion process to convert leads to contacts in Sales Cloud, when the ContactID is sent to Engagement, a new subscriber is added with a new subscriber key. Therefore, the tracking data, opt-out, and preferences aren't automatically transferred for that individual.

Send from Engagement

You can also send Engagement classic emails and Content Builder emails to Salesforce reports, campaigns, and data extensions directly in Email Studio.

After your Engagement and Sales or Service Cloud user accounts are integrated, reports, campaigns, and Salesforce data extensions are available recipient options. Use one of these methods to send:

- Complete a Guided Send for classic emails
- Complete a Send Flow for Content Builder emails
- Select Salesforce Send Emails under Interactions for both classic emails and Content Builder



Note Not seeing this functionality? It's available after users are connected to the CRM on their User Detail record. Salesforce.com Status is **Integrated**.

Send a Single Email with Marketing Cloud Connect

Send a single Marketing Cloud Engagement email from within Sales or Service Cloud through Marketing Cloud Connect.

Send Emails to Campaigns or Reports

Send a Marketing Cloud Engagement email from Sales or Service Cloud to a campaign or report through Marketing Cloud Connect. Reports must contain Contact ID, ContactID, Lead ID, or LeadID fields. Store reports in a custom Salesforce folder for sending and ensure that the user who executes the send can access the folder. Marketing Cloud Connect doesn't support sending to joined reports or reports stored in standard Salesforce folders.

Triggered Sends

Use triggered email sends to create and send automated messages to Salesforce contacts, leads, or person accounts when object records are created or updated.

Marketing Cloud Sends to Campaigns or Reports

Use this Marketing Cloud Connect for Marketing Cloud Engagement feature to create a Salesforce Send Definition and send to Salesforce campaigns or reports in Engagement. Reports must contain Contact ID, ContactID, Lead ID, or LeadID fields. Store reports in a custom Salesforce folder for sending and ensure that the user who executes the send can access the folder. Marketing Cloud Connect doesn't support sending to joined reports or reports stored in standard Salesforce folders.

Dynamic Sender Profile

With Marketing Cloud Connect for Marketing Cloud Engagement, map Salesforce attributes with Engagement preference attributes. Send emails to reports or campaigns from multiple email addresses using sender profiles.

Tokenized Sending Across Clouds

Tokenized Sending lets you use data for your messages that is deemed too sensitive to store in Salesforce due to laws, regulations, or security policies. To protect sensitive information across clouds, use tokenized sending with Marketing Cloud Connect for Marketing Cloud Engagement.

See Also

[Send an Email](#)

[Send Flow](#)

[Interactions](#)

[Salesforce Data Extensions in Marketing Cloud Connect](#)

Send a Single Email with Marketing Cloud Connect

Send a single Marketing Cloud Engagement email from within Sales or Service Cloud through Marketing Cloud Connect.

1. In Sales or Service Cloud, navigate to a lead, contact, person account, or campaign.
2. Click **Send Marketing Cloud Email**.

3. To access emails, click **Find**.
4. Select an email.
5. Select a From email address.
6. Select a Reply-to email address.

Ensure that Reply Mail Management is configured for your account.

7. If you want to prevent creating subscriber-level tracking for the send, select **Disable Individual Level Tracking**.
8. Set the time and date for sending.

This setting determines the date and time the process starts, not the actual date and time the email is sent. You can update and cancel a scheduled send.

9. Verify that you have permission to send an email to the recipient.
10. Send the email.

Send Emails to Campaigns or Reports

Send a Marketing Cloud Engagement email from Sales or Service Cloud to a campaign or report through Marketing Cloud Connect. Reports must contain Contact ID, ContactID, Lead ID, or LeadID fields. Store reports in a custom Salesforce folder for sending and ensure that the user who executes the send can access the folder. Marketing Cloud Connect doesn't support sending to joined reports or reports stored in standard Salesforce folders.

When you send to a report or campaign, Marketing Cloud Connect creates a data extension for the send. The data extension is deleted after 5 days.

1. In Sales or Service Cloud, go to the Marketing Cloud tab.
2. If you're not automatically redirected, click **Email Send**.
3. If you're using an Enterprise 2.0 account, use the look-up tool to select a business unit from which the email send originates.
4. To select an Engagement email, click **Find**.
5. To see the email before sending, click **Preview Email**.
6. Edit the subject line if needed.
7. Add up to 10 reports or campaigns to **Recipients**.
8. If needed, add reports or campaigns to the Exclusions field to exclude recipients from the send.
9. To create an email linkage, select **Remember recipients and exclusions for this email**. This selection associates an email to this specific list of recipients and exclusions. On subsequent sends, selecting this email automatically populates the Recipients and Exclusions fields with the reports or campaigns chosen here.
10. Select a From email address or send classification.

If a contact has the Email Opt Out flag set, they don't receive Engagement emails unless it's a transactional send classification. The transactional send classification requires Marketing Cloud Connect version 5.18 or later.

11. Choose the Reply-to email address, used for receiving replies to this email.
12. To prevent sending more than one email to the same email address in this send, select **Dedupe Subscribers**.
13. To prevent subscriber level tracking for this send, select **Disable Individual Tracking**.
14. Set the **Send Date and Time** for the email send process to start.

Update or cancel a scheduled send as needed.

15. Certify that all recipients have opted in and provided permission to receive the email.
16. Send the email.

Triggered Sends

Use triggered email sends to create and send automated messages to Salesforce contacts, leads, or person accounts when object records are created or updated.

1. [Marketing Cloud Connect Triggered Sends](#)
Automatically send relevant, timely, personalized messages using triggered sends. Welcome emails to new customers or thank you notes for purchases are examples of how triggered sends are commonly used. Review important prerequisites and learn how to effectively use triggered sends with Marketing Cloud Connect for Marketing Cloud Engagement.
2. [Configure Objects and Triggers](#)
Complete the steps to create triggers, enable objects, and configure triggers with Marketing Cloud Connect for Marketing Cloud Engagement.
3. [Create a Salesforce Triggered Send in Marketing Cloud Connect](#)
To send an automated message through Marketing Cloud Connect for Marketing Cloud Engagement, build the Triggered Send.
4. [Personalize with Custom Objects](#)
Use custom objects and AMPscript to personalize your messages in Marketing Cloud Connect for Marketing Cloud Engagement.
5. [Testing an Object Trigger Before Sending](#)
Before sending a triggered email through Marketing Cloud Connect for Marketing Cloud Engagement, use a test script. Repeat the script for each object with a trigger setup. Ensure that the object's defined properties account for all required properties on an object.
6. [Tracking Triggered Sends](#)
Find related lists to help track the triggered sends through Marketing Cloud Connect for Marketing Cloud Engagement.

Marketing Cloud Connect Triggered Sends

Automatically send relevant, timely, personalized messages using triggered sends. Welcome emails to new customers or thank you notes for purchases are examples of how triggered sends are commonly used. Review important prerequisites and learn how to effectively use triggered sends with Marketing Cloud Connect for Marketing Cloud Engagement.

Create triggered sends on objects with a lookup to a Contact ID or Lead ID, or to an Account object if person accounts are enabled. After you create a trigger for each object, messages are sent each time an update or insert event occurs on the objects.

You can use many features of triggered sends within the Sales or Service Cloud.

- Create and edit triggered sends.
- View existing triggered sends across clouds.
- Review aggregate tracking data for triggered sends across clouds.
- Add subscribers to specific data extensions for more marketing opportunities. If no destination data extension is selected, the subscriber is added to the All Subscribers list in Engagement. If the user that activated the send doesn't have access to the All Subscribers list, the contact or lead isn't added to that list.

Before you begin...

- Acquire access to the All Subscribers list in Engagement.
- Ensure that triggered sends are enabled in Engagement.
- Set up send classifications in Engagement for triggered sends. If needed, overwrite send classifications in Marketing Cloud Connect using **Override from Name/Email Address**.
- The email associated with the triggered send must pass validation in Engagement.



Tip Follow these best practices and guidelines.

- Triggered sends only work with events that occur after updates and inserts.
- To change the filter criteria or select a new email for your triggered send after creating it through Marketing Cloud Connect, update the triggered send in Sales or Service Cloud. Editing a triggered send in Engagement after creating it in Sales Cloud changes the ID associated with the triggered send, which prevents updates.
- Triggered sends use Apex code. Write and test triggers in a Salesforce developer environment, sandbox, or trial org before publishing to production.
- Triggered sends don't support bulk updates or inserts.
- Marketing Cloud Connect is governed by SOQL query limits. Each evaluation of a triggered send uses one query toward the SOQL limit of 100 at one time. To reduce the number of queries performed, use the `automateByName` Apex method.
- You can execute up to 50 triggered sends within a transaction, including a bulk record update or sends that meet filter criteria for a single record.

See Also

[Triggers and Order of Execution](#)

[Triggered Emails in Email Studio](#)

[Introducing Apex](#)

Configure Objects and Triggers

Complete the steps to create triggers, enable objects, and configure triggers with Marketing Cloud

Connect for Marketing Cloud Engagement.

Permission for Triggered Sends Configuration is required to complete these tasks.

1. From Sales or Service Cloud, click **Setup**.
2. Under Build, click **Customize**.
3. Select the object.
4. Click **Triggers**.
5. Click **New**.
6. In the Apex Trigger window, select **Is Active**.
7. Enter the following code, substituting the desired object name where indicated with **Object Name**.

```
trigger Trig_Object Name on Object Name (after insert, after update) { et4ae
5.triggerUtility.automate('Object Name'); }
```

For example:

```
trigger Trig_Lead on Lead (after insert, after update) { et4ae5.triggerUtili
ty.automate('Lead'); }
```

8. Save the trigger.
The trigger is created for the object.
9. Click the **Marketing Cloud** tab.
10. Click **Configure Marketing Cloud Connect**.
11. Click **Edit Settings**.
12. Under Triggered Sends, select **Restriction** to set user permissions and restrictions.
13. Under Triggered Sends, add **Enabled Objects** to be used for triggered sends.
14. Save the settings and selections.
The restrictions are set and objects enabled.

Use Apex to Create Triggers

A trigger is Apex code that executes before or after the following types of operations: insert, update, delete, merge, upsert, and undelete. Developer environments, sandboxes, and trial orgs can create, edit, and delete Apex classes and triggers directly in the Salesforce CRM user interface. Unlimited Edition and Enterprise Edition production orgs can execute and view Apex in the user interface, but modifying Apex in the user interface is not allowed.

Use Apex to Create Triggers

A trigger is Apex code that executes before or after the following types of operations: insert, update, delete, merge, upsert, and undelete. Developer environments, sandboxes, and trial orgs can create, edit, and delete Apex classes and triggers directly in the Salesforce CRM user interface. Unlimited Edition and Enterprise Edition production orgs can execute and view Apex in the user interface, but modifying Apex in the user interface is not allowed.

Write Apex classes and triggers first in a developer environment, sandbox, or trial org, then tested with

appropriate test methods before deploying to production. Install the Marketing Cloud Connect for Marketing Cloud Engagement package in your production org before deploying triggers to ensure that classes are referenced properly.

See Also

[Introducing Apex](#)

[Testing Apex](#)

[Deploying Apex](#)

Create a Salesforce Triggered Send in Marketing Cloud Connect

To send an automated message through Marketing Cloud Connect for Marketing Cloud Engagement, build the Triggered Send.

Permission for Triggered Sends Configuration is required to complete these tasks.

1. From Sales or Service Cloud, click the **Marketing Cloud** tab.
2. Click **Triggered Sends**.
3. Click **New**.
4. Enter a **Name**.
5. Choose an **Object**.



Tip If you select an object with more than 1,000 fields, only the first 1,000 fields are available for selection.

6. Select the **Recipient Lookup** source field that has the lookup relationship to the recipient source. For example, select **Contact ID** for the Contact Object, or select **Lead ID** for the Lead Object. Only one lookup field can be selected.
7. Customize **Field Criteria** for the event trigger as necessary, to a maximum of 9 criteria.
 - a. To add field logic options, click **+**.
 - b. To specify whether each criteria is in addition (AND) or an alternative (OR), click . For example, 1 AND 2.

8. To determine the actions on the record that warrant evaluation for a send, select an option for **Trigger send when**. For example, you configure a trigger and intend for it to send a single time for the first match found. You configure the trigger to send an email when Checkbox A is set to Yes. If you set the **Trigger send when** to **new record is created or existing record is updated**, when Checkbox A is set to **Yes**, the Triggered Send email is triggered every time that record is updated, as long as Checkbox A is set to **Yes**.
9. Choose a **Business Unit** if applicable.
10. Select an **Email** for sending when the trigger activates.
11. To review emails with dynamic, personalized content using real Contact or Lead data before sending, click **Preview Email**.

12. **Subject line** populates with the subject of the selected email. You can overwrite the subject line as necessary.
13. Select a **Send Classification**.
14. Specify the **Send Time**.
15. Certify that all recipients opted in to receive the email.
16. Save the triggered send.
17. To begin sending the triggered send, click **Activate**.

Deactivate the triggered send before editing.

See Also

[Dynamic Send Preview](#)

[Personalize Triggered Sends with Object Data](#)

Personalize with Custom Objects

Use custom objects and AMPscript to personalize your messages in Marketing Cloud Connect for Marketing Cloud Engagement.

Use custom objects associated to a contact or lead for personalization in triggered sends from the Sales and Service Clouds. Use AMPscript with custom objects for more personalization.

For example, instead of sending generic replies such as, “Susan, your case has been closed,” use custom objects to personalize the reply as “Susan, your Case ABC123XYZ, ‘Unable to Send’ was closed at 11:29PM by John Smith.”

Sample:

```
%%[
Set @mySObject = SObject
Set @myRecordId = RecordId
set @Case = RetrieveSalesforceObjects(SObject,"Subject,Status","Id", "=", Reco
rdId)
Set @CaseRow = Row(@Case, 1)
Set @Subject = FIELD(@CaseRow, "Subject")
Set @Status = FIELD(@CaseRow, "Status")
]%%
<br><br>
SObject From API Call: %%=v(@mySObject)=%% <br>
RecordId From API Call: %%=v(@myRecordId)=%% <br>
Subject From RetrieveSalesforceObjects: %%=v(@Subject)=%% <br>
Status From RetrieveSalesforceObjects: %%=v(@Status)=%% <br>
```

See Also

[Introduction to Programmatic Marketing Content](#)

Testing an Object Trigger Before Sending

Before sending a triggered email through Marketing Cloud Connect for Marketing Cloud Engagement, use a test script. Repeat the script for each object with a trigger setup. Ensure that the object's defined properties account for all required properties on an object.

This example script checks the Contact object, where LastName='TestExample'.

```
{  
  
    private static testmethod void ContactTriggerTest()  
  
    {  
  
        insert new et4ae5__Configuration__c(et4ae5__Support_Ticket_Recipien  
t__c = 'example@example.com');  
  
        Test.startTest();  
  
        Contact c = new Contact(LastName='TestExample');  
  
        // Insert contact  
  
        insert c;  
  
        // If no exceptions occurred, it was successful  
  
        System.assert(!String.isBlank(c.Id));  
  
        Test.stopTest();  
  
    }  
  
}
```

Tracking Triggered Sends

Find related lists to help track the triggered sends through Marketing Cloud Connect for Marketing Cloud Engagement.

Triggered sends are listed in multiple places within the Sales or Service Cloud and Marketing Cloud Connect for tracking.

- Individual Email Result related list on the contact or lead record of the Sales or Service Cloud

- Individual Email Result and Aggregate Link Level Details related lists on the Triggered Send Definition

Triggered sends created in the Sales or Service Cloud return tracking from Engagement to Sales or Service Cloud. Triggered sends created in Engagement don't return tracking to Sales or Service Cloud. For example, an API call to Engagement doesn't return tracking to Sales or Service Cloud.



Tip View a thumbnail preview of triggered sends on the Individual Email Results record. Previews include triggered sends created with Content Builder after the 209 managed package release. Thumbnails don't include rendering of any personalization or AMPscript.

See Also

[Triggered Emails in Email Studio](#)
[Triggered Sends Tracking](#)

Marketing Cloud Sends to Campaigns or Reports

Use this Marketing Cloud Connect for Marketing Cloud Engagement feature to create a Salesforce Send Definition and send to Salesforce campaigns or reports in Engagement. Reports must contain Contact ID, ContactID, Lead ID, or LeadID fields. Store reports in a custom Salesforce folder for sending and ensure that the user who executes the send can access the folder. Marketing Cloud Connect doesn't support sending to joined reports or reports stored in standard Salesforce folders.

Send to up to 10 Salesforce campaigns or reports in Engagement.

1. In Engagement, go to Email Studio.
2. Click **Salesforce Send Emails** under Interactions.
3. Click **Create**.
4. Enter a name and description for the email.
5. Select an email to send.
6. Select a send classification.
7. Click **Edit Recipients**.
8. Add Salesforce reports, campaigns, or data extensions to the **Targeted** recipient list.
9. Select a report, campaign, or data extension from the lookup window.



Tip To return all reports or campaigns, leave the search field blank and click **Find Now**.

10. Add Salesforce reports, campaigns, or data extensions to the **Exclusions** list if needed.
11. Save the recipients list.
12. Save the Salesforce send definition.
The Salesforce send definition is created.
13. In Engagement, go to Email Studio.

Any changes made to an email after you've scheduled a send are reflected in your scheduled send.

14. Click **Salesforce Send Emails** under Interactions.
15. Select a Salesforce send definition.
16. Click **Send**.
17. Select the date and time to start the send.

18. Certify that all recipients have opted to receive the email.
19. Click **Send**.
The send is complete.

See Also

[Send an Email](#)
[Send Flow](#)
[Interactions](#)
[Salesforce Data Extensions in Marketing Cloud Connect](#)

Dynamic Sender Profile

With Marketing Cloud Connect for Marketing Cloud Engagement, map Salesforce attributes with Engagement preference attributes. Send emails to reports or campaigns from multiple email addresses using sender profiles.

Send Classifications are user-specified email parameter templates that allow you to pre-define a delivery profile, sender profile, and CAN-SPAM classification. Send classifications are reusable, and are combined with content and audience information to quickly create email sends. A sender profile is a record where you specify the from-information for a send in a central location. The sender profile reuses that information across multiple sends, without needing to select it each time.

For example, a Northern Trail Outfitters marketer wants to create personalized email sends to their contacts using the names of specific customer service representatives. While the content of the send is the same for all recipients, the marketer wants the From Name to be customized for each recipient. The marketer creates FromName and FromEmail attributes in Engagement for the customers to hold the From information they want to include in the send. These attributes correspond to fields in the Sales Cloud. Then the marketer creates a sender profile that uses AMPscript to dynamically pull information from the subscriber attributes populated by Sales Cloud information. If no attribute information is present, the sender profile uses system default information.

To use dynamic sender profiles with Marketing Cloud Connect, create and map attributes across clouds, and build a sender profile with those attributes. When sending the email, override the default sender profile with the custom sender profile you created.

See Also

[Map Attribute Fields](#)
[Send Classifications for Marketing Cloud Email](#)
[Profile and Preference Attributes in Marketing Cloud](#)
[Send Email Messages from Multiple Addresses Via Sender Profiles and Data Extensions](#)
[Introduction to Programmatic Marketing Content](#)

Tokenized Sending Across Clouds

Tokenized Sending lets you use data for your messages that is deemed too sensitive to store in Salesforce

due to laws, regulations, or security policies. To protect sensitive information across clouds, use tokenized sending with Marketing Cloud Connect for Marketing Cloud Engagement.

For example, sensitive information can include:

- Personally Identifiable Information (PII)
- Protected Health Information (PHI)
- Any other information you prefer to retain on your own servers

The tokenized sending process transmits information from your data systems to Engagement at send time using an API call. Data is never stored in Salesforce. Instead, your Salesforce org stores a single token, resembling a standard email address, per subscriber. Each token can contain a collection of attributes about that subscriber. Sensitive data received from the token exchange is discarded from memory and not retained in Marketing Cloud. However, all tracking and deliverability data is available in Engagement, identified by the subscriber key.

If tokenized sending is provisioned for your account, keep these considerations in mind when using it with Marketing Cloud Connect.

- Recommended for use only with new accounts.
- Works with all Engagement account types using subscriber keys.
- Contact, Lead, and Person Account records in Sales and Service Clouds must use the token as the main email address.

Review all other Engagement considerations and best practices for tokenized sending.



Warning When using tokenized sending with Marketing Cloud Connect, the standard email address field for contacts and leads is populated with a token. This token can cause non-Engagement (traditional CRM) emails to not send correctly. To avoid disruption if you enable tokenized sending, send all emails from Sales or Service Cloud through Marketing Cloud Connect or send directly from Engagement.

See Also

[Tokenized Sending](#)

Tracking and Analytics

Marketing Cloud Connect for Marketing Cloud Engagement tracking information is located in multiple places in Sales or Service Cloud. Use tracking data directly from Engagement for your business-critical processes. Marketing Cloud Connect tracking data is a subset of all tracking data available for a send and is a replication of data from Engagement.

- Single-send objects, such as Lead, Contact, and Person Account records, provide tracking information about individual records. Go to a specific lead, contact, or person account to view tracking for a single send. Two related lists provide detailed information about Individual Email Results and Email Sends for that specific record.
- The Email Sends tab provides a record of each email send with tracking information.

- The Send Analytics tab provides reports on historical and time-based engagement for aggregate, email, or subscriber data.

Types of tracking include:

- **Aggregate Level**
This tracking provides a comprehensive summary of email send statistics and is available on the Email Send record.
- **Individual Level**
This tracking provides email performance information at the Contact or Lead level. It's viewed in the Individual Email Result record, accessible from the Related List on the Email Send record or from the Contact or Lead record.
- **Track Link Details**
This optional data on individual lead or contact link tracking, such as links clicked, is stored in the CRM and it consumes more storage. Link Level Detail is also tracked at the aggregate level.
- **Track Sent Events**
This optional data on individual subscriber-level tracking data is stored in the CRM after an email is sent. This tracking option can consume a large amount of data. If this option isn't selected, the data is stored in the CRM after a subscriber opens an email or clicks a link.

Tracking data returned to Sales Cloud from Engagement doesn't count toward API limits.

Here's a list of returned tracking tables.

- Aggregate: SOAP and Rest APIs - Not Counted
- Individual Email Results: SOAP and Rest APIs - Not Counted
- Aggregate Link-Level Details: SOAP and Rest APIs - Not Counted
- Individual Link-Level Details: BULK API - Not Counted

Email Send Records

In Marketing Cloud Connect for Marketing Cloud Engagement, go to the Email Send tab in Sales or Service Cloud to access a specific Email Send record. An Email Send record includes related lists with tracking information on individual email results, aggregate link level details, and support requests that have been opened for the send.

- Tracking data is typically available within a few hours after the send, depending on send volume and system load. Use the Request Tracking Immediately option to expedite it.
- Deleting an email send also deletes individual email results, aggregate link level details, and any support requests associated with the send.
- If needed, initiate a support request on a send.
- If the send wasn't successful, only the support request is available.

This information is included in an email send record.

Section	Description
Email Send Detail	Detailed information about the email send, including a system-generated number that identifies the record.
Email Info	Information about the sender, business units, and recipient opt-in information.
Tracking Info	Job details and send performance statistics including delivery rate, open rates, and click-through rates.
Related Individual Result Reports	• Sent • Delivered • Opened • Did not open • Clicked • Did not click • Hard Bounced • Soft Bounced
System Info	States who created the email send and when it was sent.
Individual Email Results	This list of recipients is linked to more detailed information about each individual.
Aggregate Link Level Details	A listing of links that were clicked and click information. This listing is linked to more detailed information about link activity.
Support Requests	A list of Support Requests that were initiated against this email send.

Email Send Statuses

When completing email sends through Marketing Cloud Connect for Marketing Cloud Engagement, the status of the email send in Engagement can differ from the status in Sales or Service Cloud. These statuses are based on the latest managed package.



Tip Email status is listed in these locations:

- The Send Status field on the email send detail page in Sales or Service Cloud
- The Status column of the Tracking page in Engagement

Status in Marketing Cloud	Status in Sales or Service Cloud	Description
--	Scheduled	The Salesforce send definition is created and scheduled to send in Sales Cloud only.
Pending, Scheduled	Queued for Processing	The scheduled send reached the designated send time and is awaiting the Sales Cloud workflow to call sync subscribers.
In Process	Processing Data	The sync subscribers request is processing.
Scheduled	Send Queued	The send is queued in Engagement.
In Process	Sending	The request to queue the send in Engagement is complete. The send can't be canceled.
Completed	Pending Tracking Subscription	Engagement completed the send, but it isn't subscribed for tracking yet.
Completed	Completed	Engagement notified Sales Cloud that the send is complete.
Paused	Paused	The send is paused in Engagement.
Failed	Failed	The send failed, and an error message provides details.
Canceled	Canceled	The Salesforce send definition is canceled.
Deleted	Deleted	The send is deleted in Engagement.

Send Analytics

Access the Marketing Cloud Connect Send Analytics tab within the Sales or Service Cloud. This tab provides aggregate tracking data for all sends, specific subscriber activities, and specific email send activities. Marketing Cloud Connect for Marketing Cloud Engagement reports are based on tracking data stored in the CRM.

Data	Description
Historical Engagement	Historical Engagement displays aggregate data beginning on the date the account was created to the present. This section contains the total number of subscribers to whom emails were sent, delivered emails, bounced emails, unique opens, unique clicks, and total clicks.
Time Based Engagement	Time Based Engagement displays data for a specified time. Specify a time period to see data on the total number of emails sent, emails delivered, bounces, unique opens, and unique clicks. Because Sales or Service Cloud doesn't store the date and time a subscriber clicks a link, this data is calculated using the original last-clicked date.
Aggregate Analytics	Select Aggregate to see data for the number of total opens. This data isn't shown in subscriber analytics. The Sales or Service Cloud tracks whether an email is opened, not how many times a specific subscriber opens it.
Subscriber Analytics	Select Subscriber to view data for a specific subscriber. • Date of first email sent to the subscriber. • Date of the most recent email sent to the subscriber. • Date the subscriber unsubscribed, if applicable. • Date the subscriber was created.
Email Analytics	Select Email to view data about a specific email. • Number of emails sent. This data refers to the number of send definitions containing the specified email and not the number of subscribers to whom an email was sent. • Number of total opens. This data isn't shown in subscriber analytics. The Sales or Service Cloud tracks whether an email is opened, but doesn't track how many times a specific subscriber opens it.

Data	Description
	• Date the email was first sent. • Date the email was most recently sent.

Manage Data Storage

Use Tracking Data Cleanup to manage the storage of Marketing Cloud Connect for Marketing Cloud Engagement tracking data in Sales or Service Cloud. Managing storage data helps reduce data storage costs.



Note Tracking data only shows for emails that are older than the expiration date. This date is set based on the Number of Days to Track field in Marketing Cloud Connect configuration. For example, if you enter *200* for Number of Days to Track, tracking data isn't available to manage until 200 days after the email send date. Tracking generated by a Triggered Send Definition is not included in this tool.

1. In Sales or Service Cloud, navigate to the Marketing Cloud tab.
2. Click **Configure Marketing Cloud Connector**.
3. Click **Tracking Data Cleanup**.
4. Select the tracking data to delete.
5. Click **Delete Selected Tracking Data**.



Note To delete all tracking data, click **Delete All Tracking Data**.

6. In the dialog box, select the types of data to delete.



Tip Individual Email Results provides email performance information at the Contact or Lead level. Aggregate Link Details provides a comprehensive summary of email send statistics.

7. If needed, select a filter option to delete tracking information for Individual Email Results.
8. To receive confirmation of the data cleanup, add email addresses.
9. Confirm that you understand that this action permanently deletes the selected send tracking data.
10. Click **Delete**.

If you added email addresses, Marketing Cloud Connect sends a confirmation after the tracking data cleanup completes.

Custom Settings for the Tracking Data Cleanup Tool

In Marketing Cloud Connect for Marketing Cloud Engagement, the Tracking Data Cleanup Tool includes custom settings for batch size and cascade-delete.

To access the settings for batch size and cascade-delete, in Setup, go to **Custom Settings**. Then click **Manage** for ET4AE Configuration.

Field	Description
Enable Cascade-Delete	Automatically delete parent and child tracking data records when using the Tracking Data Cleanup Tool. To avoid Apex governor limits on batch delete jobs, disable cascade-delete.
Tracking Data Cleanup Batch Size	Enter the number of records to delete per batch. Delete up to 2,000 records per batch. We recommend a batch size of 200. If you input a number less than 1, the batch size defaults to 1. If you enter a number greater than 2,000, the batch size defaults to 200.

Consider both the speed of tracking data deletion and Apex governor limits when you configure these settings. Larger batch sizes require less time overall because fewer iterations are used to delete the records. However, larger batch sizes risk reaching Apex governor limits. For example, if your custom trigger or code causes errors, reduce the batch size and try again.

Deferment Notices

Deferment occurs when an account using Marketing Cloud Connect for Marketing Cloud Engagement is unable to authenticate or contact Sales or Service Cloud when attempting to share tracking data or synchronizing data from Sales or Service Cloud.

When a customer initiates a send, the send is subscribed for tracking. In all Marketing Cloud Connect accounts, an email notification is sent to the designated internal recipient when Marketing Cloud Connect tracking encounters an issue that must be resolved.

When a customer synchronizes data from Sales or Service Cloud and a deferment occurs, the synchronization pauses for six hours. A message appears on the Sync Activity page.

The process repeats every six hours until resolution occurs.

Deferred accounts are sent an email outlining the reason, which can include the following:

- **Invalid Credentials**
The connection between Engagement and Sales or Service Cloud couldn't be completed due to invalid or expired credentials. Check and update the Salesforce System (Tracking) User credentials.
- **Storage Limit Exceeded**
If your account is out of space, tracking can't create records. To resolve this issue, delete data within your account or contact Salesforce to request more storage space. Manage tracking data easily using the Marketing Cloud Connect Tracking Data Management tool.
- **Request Limit Exceeded**
If your account exceeds the Concurrent API limit, API calls to your org are suspended. Accounts are allotted a specific number of API calls, measured during any 24-hour period.

Consult the System Overview or “API Calls Made Within Last 7 Days” report to help investigate the reason for deferment.

See Also

[Authentication Between Clouds](#)

[API Request Limits and Allocations](#)

Marketing Cloud Connect Features

Learn about edition compatibility with Marketing Cloud Connect for Marketing Cloud Engagement and what features are available.

Connector Versions for Engagement

Connector Version	Marketing Cloud Connect
Integration Version Notes	Our newest version, previously called V5, is for all Engagement customers using Salesforce Enterprise Edition or later.

Supported Marketing Cloud Packages

Engagement Package	Marketing Cloud Connect
Basic	✓
Pro	✓
Corporate	✓
Enterprise	✓

Supported Engagement Editions

Engagement Edition (Legacy Terminology)	Marketing Cloud Connect
Core	✓
Advanced	✓
Agency	✓
Enterprise 1.0 Lock & Publish	See Note
Enterprise 1.0 On Your Behalf	See Note
Enterprise 2.0	✓
Marketing Cloud Sandbox	✓



Note Enterprise 1.0 Lock & Publish account functions as a Core account for compatibility with Marketing Cloud Connect. Enterprise 1.0 On Your Behalf isn't supported. Customers can simulate

the On Your Behalf use case by sending from the record owner. The record owner can see tracking.

Supported Salesforce Editions

Salesforce Edition	Marketing Cloud Connect
Professional	-
Enterprise	✓
Performance	✓
Unlimited	✓
Salesforce Developer Edition Sandbox	✓

 **Note** CloudForce.com and Lightning Platform orgs aren't supported. Enable Custom Platform Events in your org to ensure that the managed package installs correctly.

Supported User Interfaces

User Interface	Marketing Cloud Connect
Salesforce Classic	✓
Lightning Experience	See note

 **Note** Lightning Experience isn't supported for Marketing Cloud Connect features. Those using Lightning Experience with Salesforce are automatically redirected to Salesforce Classic when Marketing Cloud Connect tabs are clicked.

Account Configuration Features

Account Configuration	Marketing Cloud Connect
Manage Business Units in Salesforce	✓ (Enterprise 2.0)
Manage Tracking Data Storage Options	✓
Manage Reply To Options	✓
Manage Subscriber Visibility Options	Scope by User and Non-Scope by User
Manage Send Classifications	✓
Connected App Authentication	✓

Account Configuration	Marketing Cloud Connect
Multi-Org Configuration	✓

Subscriber Features

Subscribers	Marketing Cloud Connect
Profile Center	✓ (email only)
Custom Profile Center	Recommended for Journey Builder customers
Subscription Center	✓ (Marketing Cloud based sends)
Custom Subscription Center	Recommended
Engagement Subscriber Status Source	All Subs list
Engagement-CRM Subscriber Status Sync	Unsubscribes
Subscriber Key	✓
Data Extensions and Data Relationships	✓ (sending only)
Synchronized Data Extensions (CRM data synced to Engagement)	✓
Suppression Lists	✓
Send Logging	✓
SmartCapture	Requires custom Services engagement

Email Content Features

Content	Marketing Cloud Connect
Dynamic Content	✓
Personalization Strings	✓
Email Send Preview	✓ (static and dynamic)

Content	Marketing Cloud Connect
AMPscript	✓
Email Attachments	✓ (requires AMPscript)
Sender Authentication Package	✓
International Sends	✓
A/B Testing	✓

Interaction Features

Interactions	Marketing Cloud Connect
Triggered Emails	✓
Automation	✓
Automated Interaction Management (AIM) - Parent of Activities and Programs; reporting, queries, extracts, scheduling	Engagement email only (imports and user-initiated sends)
Distributed Sending	-

Journey Builder Integration Features

Journey Builder Integration	Marketing Cloud Connect
Salesforce Entry Events	✓
Custom Salesforce Entry Events	✓
Sales and Service Activities	✓
Custom Sales and Service Activities	✓

Salesforce CRM Features

More Features in Salesforce CRM	Marketing Cloud Connect
Segmentation / Target Audiences	Campaign / Reports
Single Sends	Leads / Contacts / Person Accounts
Salesforce Exclusions	✓
Marketing Cloud Suppression Lists	-
Multiple Audience / Exclusions	✓

More Features in Salesforce CRM	Marketing Cloud Connect
View Sent Email Template	✓
Global Resubscribe	✓
Remove Duplicate Subscribers (dedupe)	✓
Dynamic Owner Send "From" user record owner or alias	✓
Send Classifications	✓
Send to Salesforce Reports or Campaigns from Engagement	✓
Salesforce Object mapping: Support for Personalization and Dynamic Content	✓
Salesforce Object Sending: Sendable Custom Objects and Entities	-
Detailed Error Logging	✓
Sending Log	✓
Campaign Member Management	✓
Quick Link to Engagement	✓
Quick Link to Engagement Email Editor	✓
Salesforce Mobile App Access	-

Tracking Features

Tracking	Marketing Cloud Connect
View Tracking data at the individual and aggregate level (including sends, delivered, bounces (hard, soft, technical), unique opens, total opens, unique clicks, total clicks, and unsubscribes)	✓
View link level detail at the individual and aggregate level (including email name, date sent, date opened, number of clicks, and number of unique clicks)	✓
Rolling or scheduled tracking data updates	✓
Request tracking data on-demand	✓

Tracking	Marketing Cloud Connect
Tracking suppression	 (configurable per job or globally)
View tracking data using charts, graphs, and reports	
Journey Builder Engagement Data	

See Also

[Salesforce Editions](#)

[Marketing Cloud Release Notes](#)

A/B Test Email Sends

Use A/B Testing through Marketing Cloud Connect for Marketing Cloud Engagement to test differences in emails and determine which version of an email performs best. Access A/B test options through the Marketing Cloud tab in the Sales or Service Cloud. Select a test type: subject lines, emails, content areas, from names, or send dates and times. Then set up a test of two versions for the type selected. For example, a test two unique subject lines for one send. The A/B test sends each version to a random segment of the message recipients. Then it measures the open and click performance, selects the best performer, and sends the winning option to the remaining recipients.



Important List building and splitting occur when you save the A/B send definition. If you use a date time split, there's a time gap between list building and the actual email send. Subscribers who unsubscribe during this gap still receive the email. To avoid this scenario, schedule the sends as close as possible to the time you save the A/B send definition.

When setting up an A/B test, you can send the winning version to the remaining recipients automatically when the system determines the winner. Or, you can manually select a winner and send the remainder. If you select the system to determine the winner automatically and the test ends in a tie, option A is automatically declared as the winner.

You can enter an email address to receive email notifications during the test to monitor the progress. Enter an email address to receive notifications and select which to receive:

- When an email is sent to the conditions you defined
- When a winner is declared
- When an email is sent to the remainder
- If an error occurs



Note A/B test notification emails come from the Marketing Cloud Global notification account.

A/B Test Content Area

Follow these steps to A/B test two email content areas for a send through Marketing Cloud Connect for Marketing Cloud Engagement.

A/B Test Emails

Follow these steps to use an A/B Test on two email messages for a send through Marketing Cloud Connect for Marketing Cloud Engagement.

A/B Test From Name

Follow these steps to A/B test two From Names for a send through Marketing Cloud Connect for Marketing Cloud Engagement.

A/B Test Send Date and Time

Follow these steps to A/B test two send dates or times for a send through Marketing Cloud Connect for Marketing Cloud Engagement.

A/B Test Subject Lines

Follow these steps to A/B test two subject line options for an email send through Marketing Cloud Connect for Marketing Cloud Engagement.

Cancel an A/B Test

Cancel a previously scheduled A/B test through Marketing Cloud Connect for Marketing Cloud Engagement.

Modify A/B Test Send

Modify a scheduled send of the winning email from automatically to a scheduled time through Marketing Cloud Connect for Marketing Cloud Engagement.

Select an A/B Test Winner

Manually select the winner of an A/B test through Marketing Cloud Connect for Marketing Cloud Engagement.

Track A/B Test Results

Access tracking for a Marketing Cloud Connect for Marketing Cloud Engagement A/B test send in Sales or Service Cloud. View tracking information for test condition A, test condition B, and the remainder sent. Tracking information includes opens, unique click-through rates, delivery rates, and unsubscribes.

A/B Test Content Area

Follow these steps to A/B test two email content areas for a send through Marketing Cloud Connect for Marketing Cloud Engagement.

1. In Sales or Service Cloud, navigate to the **Marketing Cloud** tab.
2. From the Email Send page, click **A/B Tests**.
3. Click **New**.
4. Click **Content Area**.
5. Enter a name and description.
6. To select an email, click **Find**.



Note The email must contain A/B content areas.

7. Select an option for Content Area A.
8. Select an option for Content Area B.
9. Select the email recipients from reports or campaigns.
10. Add reports or campaigns to exclude from the send if needed.
11. Select the percentage of recipients to include in the test.
12. Select the criteria for determining the winning content area.
13. Set a duration of time to determine the winning content area.
14. Select whether to send the winning email to the remainder of recipients automatically or manually.
 -  **Note** Selecting **Manually** allows you to choose the winner and send the email to the remaining recipients. Selecting **Automatically** sends the winning email to the remainder when the winner is declared or at a scheduled time. If your test ends in a tie, option A is automatically declared as the winner.
15. Select a sender for the email.
16. Select a recipient for email replies.
17. Set a date and time for the send.
18. Enable **Dedupe Subscribers** if needed.
 -  **Note** Enabling this flag prevents sending more than one email to the same email address.
19. Enter an email address and select options to receive notifications about the test progress.
20. Certify that all recipients opted in to receive the email.
21. Click **Send**.

A/B Test Emails

Follow these steps to use an A/B Test on two email messages for a send through Marketing Cloud Connect for Marketing Cloud Engagement.

1. In Sales or Service Cloud, navigate to the **Marketing Cloud** tab.
2. From the Email Send page, click **A/B Tests**.
3. Click **New**.
4. Click **Email**.
5. Enter a name and description.
6. Click **Find** to select an email for Email A.
7. Click **Find** to select an alternate email for Email B.
8. Select to use one subject line or a unique subject line for each email.
9. Enter the subject line.
10. Select the email recipients from reports or campaigns.
11. Add reports or campaigns to exclude from the send if needed.
12. Select the percentage of recipients to include in the test.
13. Select the criteria for determining the winning email.
14. Set a duration of time to determine the winning email.
15. Select whether to send the winning email to the remainder of recipients automatically or manually.
 -  **Note** Selecting **Manually** allows you to choose the winner and send the email to the remaining recipients. Selecting **Automatically** sends the winning email to the remainder when the winner is

declared or at a scheduled time. If your test ends in a tie, option A is automatically declared as the winner.

16. Select a sender for the email.
17. Select a recipient for email replies.
18. Set a date and time for the send.
19. Enable **Dedupe Subscribers** if needed.

 **Note** Enabling this flag prevents sending more than one email to the same email address.

20. Enter an email address and select options to receive notifications about the test progress.
21. Certify that all recipients opted in to receive the email.
22. Click **Send**.

A/B Test From Name

Follow these steps to A/B test two From Names for a send through Marketing Cloud Connect for Marketing Cloud Engagement.

1. In Sales or Service Cloud, navigate to the **Marketing Cloud** tab.
2. From the Email Send page, click **A/B Tests**.
3. Click **New**.
4. Click **From Name**.
5. Enter a name and description.
6. To select an email, click **Find**.
7. Select an email address or send classification for **From Name A**.
8. Select an email address or send classification for **From Name B**.
9. Select the email recipients from reports or campaigns.
10. Add reports or campaigns to exclude from the send if needed.
11. Select the percentage of recipients to include in the test.
12. Select the criteria for determining the winning From Name.
13. Set a duration of time to determine the winning From Name.
14. Select whether to send the winning email to the remainder of recipients automatically or manually.

 **Note** Selecting **Manually** allows you to choose the winner and send the email to the remaining recipients. Selecting **Automatically** sends the winning email to the remainder when the winner is declared or at a scheduled time. If your test ends in a tie, option A is automatically declared as the winner.

15. Select a sender for the email.
16. Select a recipient for email replies.
17. Set a date and time for the send.
18. Enable **Dedupe Subscribers** if needed.

 **Note** Enabling this flag prevents sending more than one email to the same email address.

19. Enter an email address and select options to receive notifications about the test progress.
20. Certify that all recipients opted in to receive the email.
21. Click **Send**.

A/B Test Send Date and Time

Follow these steps to A/B test two send dates or times for a send through Marketing Cloud Connect for Marketing Cloud Engagement.

 **Important** List building and splitting occur when you save the A/B send definition. If you use a date time split, there's a time gap between list building and the actual email send. Subscribers who unsubscribe during this gap still receive the email. To avoid this scenario, schedule the sends as close as possible to the time you save the A/B send definition.

1. In Sales or Service Cloud, navigate to the **Marketing Cloud** tab.
2. From the Email Send page, click **A/B Tests**.
3. Click **New**.
4. Click **Send Date/Time**.
5. Enter a name and description.
6. To select an email, click **Find**.
7. Select a date and time for **Send Date A**.
8. Select a date and time for **Send Date B**.
9. Select the email recipients from reports or campaigns.
10. Add reports or campaigns to exclude from the send if needed.
11. Select the percentage of recipients to include in the test.
12. Select the criteria for determining the winning date and time.
13. Set a duration of time to determine the winning date and time.
14. Select whether to send the winning email to the remainder of recipients automatically or manually.

 **Note** Selecting **Manually** allows you to choose the winner and send the email to the remaining recipients. Selecting **Automatically** sends the winning email to the remainder when the winner is declared or at a scheduled time. If your test ends in a tie, option A is automatically declared as the winner.

15. Select a sender for the email.
16. Select a recipient for email replies.
17. Enable **Dedupe Subscribers** if needed.

 **Note** Enabling this flag prevents sending more than one email to the same email address.

18. Enter an email address and select options to receive notifications about the test progress.
19. Certify that all recipients opted in to receive the email.
20. Click **Send**.

A/B Test Subject Lines

Follow these steps to A/B test two subject line options for an email send through Marketing Cloud Connect for Marketing Cloud Engagement.

1. In Sales or Service Cloud, navigate to the **Marketing Cloud** tab.
2. From the Email Send page, click **A/B Tests**.

3. Click **New**.
4. Click **Subject Line**.
5. Enter a name and description.
6. To select an email, click **Find**.
7. Enter a subject line in **Subject A**.
8. Enter an alternative subject line in **Subject B**.
9. Select the email recipients from reports or campaigns.
10. Add reports or campaigns to exclude from the send if needed.
11. Select the percentage of recipients to include in the test.
12. Select the criteria for determining the winning subject line.
13. Set a duration of time to determine the winning subject line.
14. Select whether to save the winning option back to the email.
15. Select whether to send the winning email to the remainder of recipients automatically or manually.



Note Selecting **Manually** allows you to select the winner and send the email. Selecting **Automatically** sends the winning email to the remainder when the winner is declared or at a scheduled time. If your test ends in a tie, option A is automatically declared as the winner.

16. Select a sender for the email.
17. Select a recipient for email replies.
18. Set a date and time for the send.
19. Enable **Dedupe Subscribers** if needed.



Note Enabling this flag prevents sending more than one email to the same email address.

20. Enter an email address and select options if you want to receive notifications about the test progress.
21. Certify that all recipients have opted in to receive the email.
22. Click **Send**.

Cancel an A/B Test

Cancel a previously scheduled A/B test through Marketing Cloud Connect for Marketing Cloud Engagement.

1. In Sales or Service Cloud, go to the Marketing Cloud tab.
2. From the Email Send page, click **A/B Tests**.
3. Select an A/B test record.
4. Click **Cancel**.

Modify A/B Test Send

Modify a scheduled send of the winning email from automatically to a scheduled time through Marketing Cloud Connect for Marketing Cloud Engagement.

1. In Sales or Service Cloud, go to the Marketing Cloud tab.
2. From the Email Send page, click **A/B Tests**.
3. Select an A/B test record to edit.
4. Click **Edit** under Details.

5. Click **Schedule Now**.
6. Select **At a Scheduled Time**.
7. Enter a date and time.

You can't select a date and time that occurs before the set date and time for declaring a winner.

Select an A/B Test Winner

Manually select the winner of an A/B test through Marketing Cloud Connect for Marketing Cloud Engagement.

1. In Sales or Service Cloud, go to the Marketing Cloud tab.
2. From the Email Send page, click **A/B Tests**.
3. Select an A/B test record.
4. Select an option as the winner.

The email sends to the remaining recipients.

Track A/B Test Results

Access tracking for a Marketing Cloud Connect for Marketing Cloud Engagement A/B test send in Sales or Service Cloud. View tracking information for test condition A, test condition B, and the remainder sent. Tracking information includes opens, unique click-through rates, delivery rates, and unsubscribes.

1. In Sales or Service Cloud, go to the Marketing Cloud tab.
2. From the Email Send page, click **A/B Tests**.
3. Select an A/B test record.
4. To view the email send record for each condition, click **Tracking Details**.

Automation Studio Support

Marketing Cloud Connect supports automated Salesforce sends through Automation Studio in Marketing Cloud Engagement by creating a Salesforce send definition. Next, define an automation with the Send Salesforce Email activity that includes the send definition. After sending, view tracking results in the Sales or Service Cloud.

Automation Studio is an Engagement application used to execute multi-step marketing and data management activities on an immediate, triggered, or scheduled basis. Use Automation Studio's workflow canvas to build simple or multi-step automations.

Using Automation Studio to manage sends to Salesforce reports and campaigns helps maintain a single view of the customer and manage relationships in Salesforce. For example, schedule standard welcome email messages to send to all new customers. Then send a personalized follow-up email to new contacts after a specific interaction. Last, send a notification email to current contacts after a specific event or interaction.

Data Access Considerations

Manual import activities respect your account configuration for scope by user or non-scope by user. However, automated import activities in Automation Studio do not respect the scope-by-user configuration. The automation runs at the Salesforce tracking user's level of access, which is typically greater than a regular user's access.

For example, if you manually start an import in Email Studio interactions in the Marketing Cloud, the import respects a scope-by-user configuration. However, if you schedule an automated import using Automation Studio in Marketing Cloud Engagement, the import completes as a non-scope-by-user account configuration.

Consider this data access configuration if you test your imports manually and then schedule the import in Automation Studio. To see actual results while testing, log in to Engagement as the API user to test the import manually. This method provides the same results as the scheduled automation.

You cannot create an import activity using a Salesforce report that you do not have permission to access. For example, reports in the Engagement admin folder in Salesforce are not available for use if you do not have access to that folder.

See Also

[Automation Studio](#)

[Permission-Based Access](#)

[Marketing Cloud Sends to Campaigns or Reports](#)

Campaign Member Integration

Campaign member integration provides insight into customer engagement behavior with a single view of a contact or lead, called a subscriber in Marketing Cloud Engagement. View historical results of a campaign for all email interactions and members, including: date sent, bounce, date bounced, date opened, date unsubscribed, link name, and last clicked. Customize Marketing Cloud Connect to define and track events with campaign member status using the Activity or Status field. Plan how values are mapped to statuses and ensure that they're available for all campaigns before configuring.

Campaigns are linked to Marketing Cloud Connect Email Sends when an email is sent to a list of campaign members within CRM. When an email is sent to Salesforce Data Extensions from Engagement, links to campaigns aren't created.

Contacts, leads, and person accounts are supported for campaign member integration. When a person account is added to a campaign, a campaign member record is created. The status of a person account within a campaign is updated on the campaign member record.

1. [Campaign Member Status Hierarchy](#)

Understand the campaign member status hierarchy for processing rules and how mapped values are updated through Marketing Cloud Connect for Marketing Cloud Engagement.

2. [Update Campaign Member Page Layout](#)

Through Marketing Cloud Connect for Marketing Cloud Engagement, modify the campaign member page layout to include the Status or Activity field and the activity history.

3. **Configure a Campaign Member Picklist**

Through Marketing Cloud Connect for Marketing Cloud Engagement, define tracking events by customizing the campaign member picklist values for the Activity or Status field.

4. **Configure Campaign Member Tracking**

Edit the Marketing Cloud Connect for Marketing Cloud Engagement configuration to enable campaign member tracking and map the status fields.

5. **View Campaign Member Tracking**

Through Marketing Cloud Connect for Marketing Cloud Engagement, track the status of all campaign members from the campaign record in Sales or Service Cloud.

Campaign Member Status Hierarchy

Understand the campaign member status hierarchy for processing rules and how mapped values are updated through Marketing Cloud Connect for Marketing Cloud Engagement.

The processing rules for multiple Individual Email Results updates are based on the following hierarchy. The mapped values for the tracking events are updated in this order:

- Sent
- Soft Bounce
- Hard Bounce
- Open
- Click
- Unsubscribe

Considerations

- Updates don't revert to a previous value.
- If a contact or lead is resubscribed, the campaign member status or activity field retains an unsubscribed value.
- Activity History is based on Individual Email Result and Individual Link Detail records for a contact or lead from each campaign email sent.
- Activity and Status field values are used consistently for all campaigns.

Update Campaign Member Page Layout

Through Marketing Cloud Connect for Marketing Cloud Engagement, modify the campaign member page layout to include the Status or Activity field and the activity history.

1. In Sales or Service Cloud, click **Setup**.
2. Use Quick Find to navigate to **Campaign Members**.
3. Click **Customize fields on the campaign member page**.
4. Edit the campaign member page layout.

5. Drag **Section** from Fields onto the page layout.
6. Enter **Campaign Member History** for Section Name.
7. Select **One-Column** format.
8. Click **OK**.
9. Click **Visualforce Pages** in the page layout options.
10. Drag **Campaign Member History** into the newly created Campaign Member History section.
11. If you're using the Activity field to track campaign members, click **Fields** in the page layout options.
12. Drag **Activity** onto the page layout.
13. Save the page layout changes.

Configure a Campaign Member Picklist

Through Marketing Cloud Connect for Marketing Cloud Engagement, define tracking events by customizing the campaign member picklist values for the Activity or Status field.



Note If you're using the Status field, you don't have to configure the Activity field.

1. In Sales or Service Cloud, click **Setup**.
2. Use Quick Find to navigate to **Campaign Members**.
3. Click **Fields**.
4. Click **Activity** or **Status**.
5. Add new values to the picklist.
6. Customize the Activity or Status field as needed.



Note When you configure the Activity field, add the Picklist values to the individual campaign to map to the corresponding value created in the Campaign Member fields.

1. In Sales or Service Cloud, open the desired Campaign.
2. Click **Advanced Setup**.
3. Click **Edit**.
4. Click **Add More**.
5. Enter a new Member Status value.
6. Select **Responded**, if applicable.
7. Select **Default**, if applicable.

Configure Campaign Member Tracking

Edit the Marketing Cloud Connect for Marketing Cloud Engagement configuration to enable campaign member tracking and map the status fields.

1. In Sales or Service Cloud, go to the Marketing Cloud tab.
2. Click **Configure Marketing Cloud Connector**.
3. Click **Edit Settings**.
4. Enable **Campaign Member Tracking**.

5. Save the changes.
6. Click **Configure** for Campaign Member Tracking.
7. Map the tracking event to Campaign Member Activity or Status.
8. Map Engagement subscriber status fields to CRM status or activity picklist values.
9. Save the configuration.

View Campaign Member Tracking

Through Marketing Cloud Connect for Marketing Cloud Engagement, track the status of all campaign members from the campaign record in Sales or Service Cloud.

To view status and campaign member history, click an individual campaign member.

Dedupe Subscribers

Deduplication prevents sending more than one email to the same email when using reports or campaigns through Marketing Cloud Connect for Marketing Cloud Engagement. To enable this feature when executing a send, select the Dedupe Subscriber flag.

Consider the following about the Dedupe Subscribers setting:

- When sending to multiple reports, if the same contact appears in both reports, the contact receives only one email regardless of whether Dedupe subscribers is selected. For example, you're sending an email to two reports, one containing all contacts in the Midwest and the other containing all contacts in Indianapolis. There is a contact in the Indianapolis report that also appears in the Midwest report. By default, this contact receives only one email.
- For a report or campaign that contains two contacts with the same email address and you don't select Dedupe Subscribers, both contacts receive an email. For example, two family members both opt into your email list using the same email address. Two emails are sent to that email address.
- For a report or campaign that contains two contacts with same email address and you select Dedupe Subscribers, only the first contact receives the email. For example, a husband and wife both opted into your email list using the same email address. Only one email is sent to that email address.

Dynamic Send Preview

Use Dynamic Send Preview with Marketing Cloud Connect for Marketing Cloud Engagement to see personalized content based on real data, such as contacts or leads, in an email before sending. The preview renders exactly as the email recipient sees it.

Options to preview emails include the ability to view as:

- Static–View email with AMPscript coding and no personalization
- Dynamic–View email with all personalization applied
- Desktop optimized
- Mobile optimized

- HTML
- Text

Preview an email in these configurations with Dynamic Send Preview.

	Dynamic	Static
HTML	Desktop and Mobile	Desktop only
Text Only	Desktop and Mobile	–

Dynamic Send Preview is available when sending a single Engagement email from a Contact or Lead record and automatically displays personalized data from that record. It's also available when sending from the Email Send tab and allows you to select a single Contact or Lead to preview actual data.

To access the Dynamic Send Preview on the Email Send page, click Preview Email after finding the email to send. You can change the preview mode on the Send Preview page by selecting dynamic, static, desktop, mobile, HTML, or Text Only.

Encryption

Enable Encrypted Data Sending (EDS) permissions in Marketing Cloud Engagement to identify encrypted fields from Sales or Service Cloud using Classic or Platform Encryption. Re-encrypt those fields in Engagement. Marketing Cloud Connect supports these encryption methods.

- Classic Encryption
- Shield Platform Encryption
- Field-Level Encryption

Combine Classic or Shield Platform Encryption in Sales or Service Cloud with Encrypted Data Sending in Engagement for cross-cloud data encryption.

Encryption requirement	Applicable product
Encrypt specific fields in Engagement with granularity by data extension	Field-Level Encryption
Encrypt custom text fields in Sales or Service Clouds	Classic Encryption
Encrypt certain fields on the Account, Contact, Case, and Case Comment objects in Sales or Service Clouds	Shield Platform Encryption

Encrypted Sales or Service Cloud Data in Engagement

Sales or Service Cloud encrypted data appears as either unencrypted text or as asterisks in Engagement.

The data appearance depends on the permissions of the user who completes the send through Marketing Cloud Connect. Engagement stores encrypted data in the same format that the running user sees in Sales or Service Cloud.

For example, User A has the View Encrypted Data permission in Sales Cloud, but User B doesn't. Both people are Marketing Cloud Connect users. In Sales or Service Cloud, User A sees the encrypted data, but User B sees masked values, or asterisks, for that data.

If User A sends to a report containing encrypted data, Engagement stores that encrypted data as regular text. If User B sends to that same report, Engagement stores that encrypted data as asterisks.

Field-Level Encryption

Using Synchronized Data Sources, enable Field-Level Encryption permissions in Engagement to identify encrypted fields from Sales or Service Cloud. Then re-encrypt those fields in Engagement. Use this synchronized data in messages sent through Engagement.

Synchronized Data Sources doesn't support Shield-encrypted dates or datetimes.

Considerations

- Engagement always encrypts the email address field when sending from the Sales and Service Cloud with Field-Level Encryption enabled. This encryption occurs regardless of whether the Sales or Service Cloud encrypts that field or if you don't enable Shield Platform or Classic Encryption.
- Engagement denotes email addresses as read-only in the All Subscribers list and profile center when Field-Level Encryption is enabled. To allow subscribers to update their email address with EDS enabled, map a new profile attribute to the Lead and Contact email address. Include the attribute in the profile center.

See Also

[Field-Level Encryption in Marketing Cloud](#)

[Classic Encryption for Custom Fields](#)

[Strengthen Your Data's Security with Shield Platform Encryption](#)

Journey Builder Integration

Journey Builder is a Marketing Cloud Engagement application used for creating responsive automated multichannel campaigns. Use Journey Builder to design a communication plan that reaches customers at every stage of their journey with your brand. Configure Marketing Cloud Connect for Marketing Cloud Engagement in your org to access specific Journey Builder features within the Sales or Service Cloud. For example, add a lead, contact, or a user to a journey, or update a Salesforce object as a step in the journey.

See Also

[Sales and Service Cloud Activities](#)

[The Salesforce Data Event](#)

Multi-Org Account Configuration in Marketing Cloud Connect

Multi-Org is an Enterprise 2.0 account configuration. This configuration allows individual Marketing Cloud Engagement business units to connect with a single Salesforce org, independent of the parent account or other business units. Using Marketing Cloud Connect for Marketing Cloud Engagement, this configuration includes two setup scenarios.



Important Multi-org configuration isn't compatible with Government Cloud. Government Cloud accounts require a 1:1 relationship.

- Multiple business units connected to multiple orgs.
We support up to 5 business units to the same Salesforce system user in a multi-org environment. If you use more than 5 business units, service can be degraded and can negatively impact the servers. If you must connect more than 5 business units, designate additional system users.
- Multiple business units connected to a single org.

Multi-Org is available for Enterprise 2.0 accounts. It requires Connected App Authentication and Custom Profile Centers. Not sure what type of account you have? Review Engagement editions for more information.

These best practices are recommended when configuring multi-org.

- Control access to the All Subscribers list.
The All Subscribers list is a comprehensive list of all subscribers, even in a multi-org account. To prevent users from seeing subscribers outside of an org they can access, remove non-admin users' access to All Subscribers and use Subscriber Business Unit Filters.
- Plan your business unit and user connections.
While disconnecting accounts is supported, plan your Salesforce org to Engagement business unit and user connections carefully before implementation.
- Use dedicated API users.
Assign each connected business unit a dedicated API user to reduce confusion after connecting. If multiple business units are connected to the same Salesforce org, use a shared API User.



Warning If you use Synchronized Data Sources with multi-org configuration, when you disconnect a business unit from Sales or Service Cloud, synchronized data extension names can change. To ensure that they continue working, update query activities that reference those synchronized data extensions.

See Also

[Business Units in Marketing Cloud](#)
[Profile Center Marketing Cloud](#)
[Enterprise 1.0 Overview](#)

Upgrade to a Multi-Org Account

With Marketing Cloud Connect for Marketing Cloud Engagement, multi-org accounts offer flexibility, but upgrading impacts the underlying structure of your Enterprise 2.0 account. Before upgrading, review these considerations for compatibility. The upgrade requires a minimum of 2 hours.

Before you begin, ensure that your account meets these requirements.

- Enterprise 2.0 Engagement account with multi-org is enabled.
- Marketing Cloud Connect managed package version 5.494 or later is installed.
- Your Engagement admin configures your custom profile.
- Multiple Sales or Service Cloud orgs exist.
- Licenses are available for Engagement API users and Salesforce system users.
- Multi-org doesn't support custom fields in webcollect. If the form contains custom fields, we can't collect the data supplied by the subscribers.



Important You can't turn off multi-org after it's turned on.

1. Log a support ticket in Salesforce Help for the upgrade.
2. Pause all Engagement email sends through the Sales or Service Cloud until the upgrade completes.
3. If you use Synchronized Data Sources, pause data synchronization across clouds until the upgrade completes.



Important When using multi-org with Synchronized Data Sources, ensure that the tracking user is connected to less than five business units.

4. To improve performance, after you upgrade to multi-org in an existing account, reconnect previously connected business units.


See Also

[Upgrade to Connected App](#)

[Profile Center Marketing Cloud](#)


Multi-Org Account and User Configuration

Through Marketing Cloud Connect for Marketing Cloud Engagement, multi-org supports connections for one Engagement business unit to one Sales or Service Cloud org. Multi-org also supports many Engagement business units to one Sales or Service Cloud org. Multi-org doesn't support connections for a single business unit to multiple Sales or Service Cloud orgs, or business units of multiple Enterprise 2.0 accounts to the same org. Multi-org supports various user mappings based on these business unit configurations.

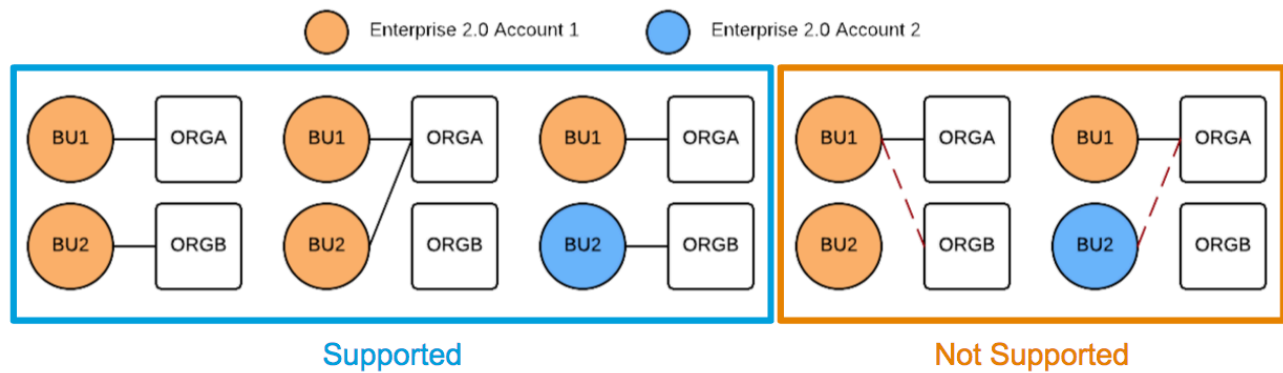

Multi-Org User Configurations


A single Engagement user can access multiple Engagement business units. Business unit access determines the ability to access multiple orgs.

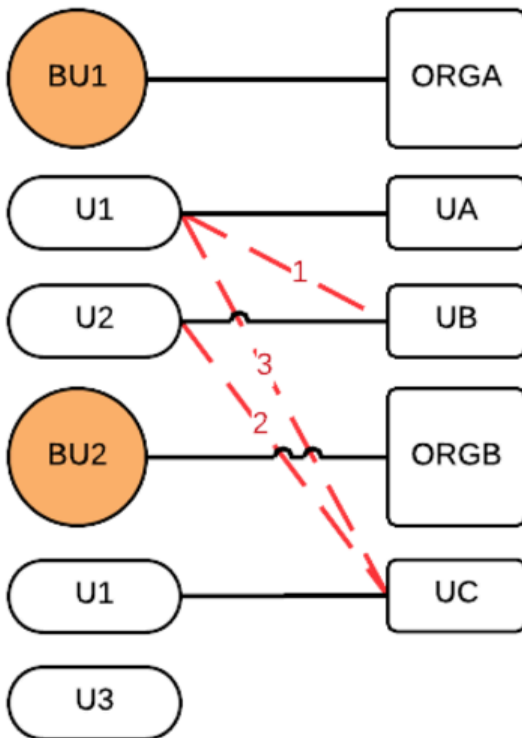

- You can't map a single Engagement user to more than one Sales or Service Cloud user within one org. In this example, U1 is mapped to UA and can't be mapped to any other user in the same org, shown by broken line 1.
- You can't map an Engagement user to a Sales or Service Cloud user if that org is connected to a business unit that the Engagement user can't access. In this example, U2 doesn't have access to BU2, so U2 can't map to UC, shown by broken line 2.
- You can map users to multiple orgs through multiple business units. However, users can access only

the org that is connected to the business unit that the user is logged in to. In this example, U1 can access BU1 and BU2, but can't map to UC while logged in to BU1, shown by broken line 3. U1 must log in to BU2 to connect to UC.

- An unconnected Engagement user accesses Engagement only. In this example, U3 can't access Sales or Service Cloud orgs.

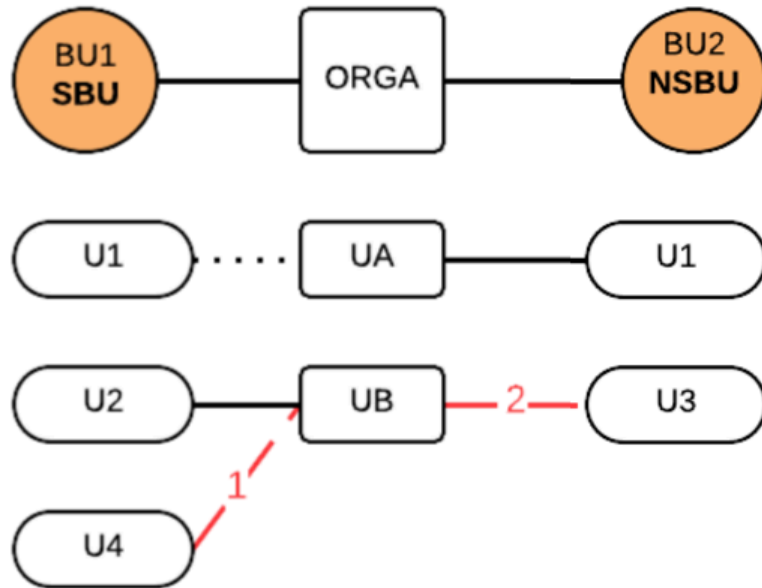


- You can map an Engagement user to the same Sales or Service Cloud user if the Engagement user can access multiple connected business units. In this example, user U1 accesses multiple business units in the same Enterprise 2.0 account. These business units are connected to the same Sales or Service Cloud org. U1 can connect to the same Sales or Service Cloud user UA through either business unit.
- You can't map multiple Engagement users to the same Sales or Service Cloud user. In this example, U2 is connected to UB, so U3 and U4 can't connect to UB.

Multi-Org Examples

These Marketing Cloud Connect for Marketing Cloud Engagement scenarios show guidelines for disconnecting and reconnecting multi-org accounts.

Multiple Business Units Connected to Multiple Orgs

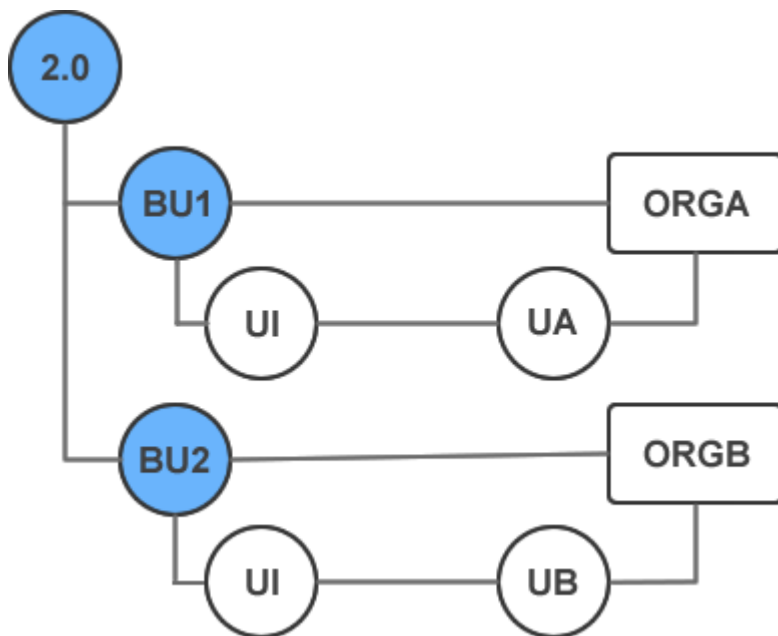


In this example, both business units, BU1 and BU2, belong to the same Enterprise 2.0 account. Each business unit is connected to a unique Sales or Service Cloud org, ORGA and ORGB, using connected app authentication. A user has access to the following:

- BU1 and BU2 through Engagement user account, U1.
- ORGA through Sales or Service Cloud user account, UA.
- ORGB through Sales or Service Cloud account, UB.

If BU1 and ORGA are disconnected, U1 and UA are disconnected. However, if BU2 and ORGB remain connected, and U1 remains connected to UB through BU2, then BU1, ORGA, U1, and UA can reconnect.

Multiple Business Units Connected to a Single Org

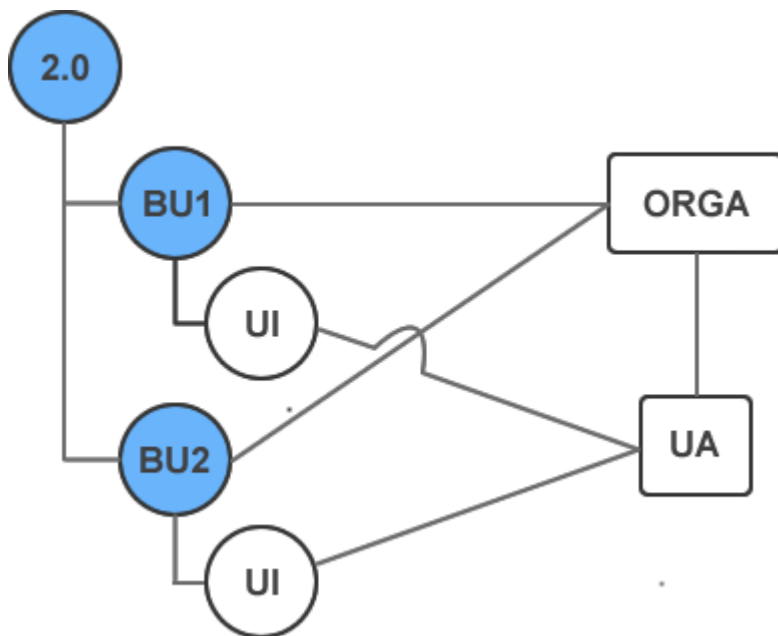

In this example, both business units, BU1 and BU2, belong to the same Enterprise 2.0 account. Both business units are connected to the same Sales or Service Cloud Org, ORGA, using connected app authentication. A user, U1, has access to both business units. Because both business units are connected to ORGA, U1 must be connected to the same Sales or Service Cloud user account, UA.

If BU1 and ORGA are disconnected, U1 and UA are disconnected in BU1. U1 remains connected to UA in BU2. BU2 remains connected to ORGA. BU1, ORGA, U1, and UA can reconnect using the multi-org connection rules.

Other Scenarios

Business units can't be connected or disconnected independently of the parent account in non-multi-org accounts. Disconnecting the parent account disconnects all child business units and connected users.

The ability to disconnect an Engagement account from the Sales or Service Cloud account is only available for Enterprise 2.0, Core, and Lock & Publish accounts. Install Marketing Cloud Connect package version 5.493+. The Marketing Cloud Connect account must use connected app authentication.

Profile Center and Marketing Cloud Connect

Use the Profile Center with Marketing Cloud Connect. Create custom fields in the Sales or Service Cloud and map them to Marketing Cloud Engagement attributes for use in the Profile Center. Every Engagement email to a Salesforce contact, lead, report, or campaign includes a link to the Profile Center where customers manage their attributes and subscription preferences. These changes update Salesforce contact and lead data. You can also manage the opt-in preference on behalf of leads and contacts using Marketing Cloud Connect.

This Profile Center is based on the Engagement attributes that are mapped to fields in Sales or Service Cloud. Data extensions aren't supported with the default Profile Center.

1. Create custom fields in Sales or Service Cloud to input preferences.
2. Create profile and preference attributes in Engagement that align with the custom preference fields in Sales or Service Cloud.
3. Map Engagement attributes to the custom fields in Sales or Service Cloud.
4. Preview how the Profile Center looks to the email recipient.

See Also

[Create Custom Fields for Preferences](#)
[Profile and Preference Attributes in Marketing Cloud](#)
[Map Attribute Fields](#)
[Profile Center Marketing Cloud](#)

Create Custom Fields for Preferences

Create custom fields in Sales or Service Cloud for the communication preferences you want to include in the Profile Center to use with Marketing Cloud Connect for Marketing Cloud Engagement. You can create different custom fields for contacts and leads.

1. In Sales Service Cloud, click **Setup**.
2. Under Build, click **Customize**.
3. Under Contacts or Leads, click **Fields**.
4. Create a custom field.
5. Select the **Checkbox** data type.
6. Click **Next**.
7. Leave the default value set to **Unchecked**.
8. Enter the field, label, description, and attributes of the field and click **Next**.
9. Set the security levels for your field and click **Next**.
10. Select the location of your field.
11. Save the field.

Reports

View a list of standard Marketing Cloud Connect for Marketing Cloud Engagement reports and report types.

Standard Marketing Cloud Connect Reports

These standard Marketing Cloud Connect reports are located in their respective Salesforce reports folder.

Marketing Cloud Connect Admin

- IERs (for an Email Send)

- IERs Delivered (for an Email Send)
- IERs Not Opened (for an Email Send)
- IERs Opened (for an Email Send)
- IERs with Clicks (for an Email Send)
- IERs with Hard Bounces (for Email Send)
- IERs without Clicks (for an Email Send)
- Outstanding Sends

Marketing Cloud Connect Subscriber Reports

- Campaign Performance over Time
- Email Sends by User over Time
- Subscriber Engagement over Time
- Unengaged Subscribers over Time

Marketing Cloud Connect Tracking Reports

- Recent Email Sending Summary

Standard Marketing Cloud Connect Report Types

These report types are available to create your own reports.

- Aggregate Link Level Details
- Aggregate Link Level Details with Send Definition
- Individual Email Results
- Individual Email Results with Contacts
- Individual Email Results with Leads
- Individual Email Results with Send Definition
- Individual Link Level Details
- Individual Link Level Details with Individual Email Result
- Email Sends
- Email Sends with Campaign
- Email Sends with Exclusion Campaign
- Email Sends with Contact
- Email Sends with Lead
- Email Sends with A/B Test
- Email Sends with Support Requests
- Email Send History
- AB Tests
- Users with or without Email Sends

See Also

[Schedule Reports in Salesforce Classic](#)

Salesforce Data Extensions in Marketing Cloud Connect

A data extension is a table that contains your data. With Marketing Cloud Connect for Marketing Cloud Engagement, push tracking data from Engagement back to your Sales or Service Cloud orgs using a Salesforce data extension (SFDE). Push any tracking data for emails sent to SFDE audiences using Salesforce Sends to the Salesforce Contact or Lead record in the connected org. An SFDE can use the same Engagement segmentation and filtering tools as a standard data extension. Data extensions created from sends to reports or campaigns have a hard-coded retention policy of 5 days.



Note Connect users to the CRM on their User Detail record in Engagement to access this functionality. The User Detail record shows Integrated for Salesforce.com Status.

Prerequisites

Before you get started with Salesforce data extensions, check the subscriber key, Email field, and field names.

- Use an 18-digit Salesforce Contact or Lead ID (not 15-digit) to map to the subscriber key. If the report field containing the Contact or Lead ID is called Contact ID or Lead ID, subscriber Keys automatically convert from 15 to 18 digits. A field labeled 'ID' uses the 15-digit Contact or Lead ID, which can result in duplicate IDs in Engagement. Contact or Lead IDs that are imported into a standard data extension using a manual flat file import aren't automatically converted from a 15-digit to an 18-digit subscriber key.
- To import into an SFDE, the email field must be set to type 'email address'. If not, the report is imported into a standard data extension and tracking isn't returned to the Sales or Service Cloud.
- Field names can't contain the ? or % characters.

Importing Salesforce Data Extensions

Import Salesforce data extensions into Engagement through Interactions. Create import activities with accessible Sales or Service Cloud reports. For example, if you can't access a report in Engagement, you can't access it in the Marketing Cloud Admin folder of Sales or Service Cloud.

Manual and automated imports behave differently in scope-by-user accounts:

- Manual import activities respect scoping, so the number of records that appear in the report are specific to the user who is running the import.
- All automated import activities are executed as the Marketing Cloud API user. Therefore, the number of records reflect the Salesforce system user's (tracking user) level of access to data.

With non-scope-by-user accounts, imports return results based on the Salesforce system user's data access.

See Also

[Permission-Based Access](#)

[Data Extensions with Enhanced Subscriber Features in Marketing Cloud](#)

[Create a Data Extension in Email Studio \(Enhanced\)](#)

Send to a Salesforce Data Extension or Filter

With Marketing Cloud Connect for Marketing Cloud Engagement, sending to a Salesforce data extension or filter is a two-step process. First, create a Salesforce send email definition and then schedule the send.

Create a Send Definition

1. In Engagement, go to Email Studio.
2. Under Interactions, click **Salesforce Send Emails**.
3. Click **Create**.
4. Enter a name.
5. Under Messages, select the email.
6. Select a send classification.
7. Click **Edit Recipients**.
8. Expand Salesforce Data Extensions, and select the data extension or filter.
9. Add the selection to Targeted.
10. Save the definition.

Send to a Salesforce Data Extension or Filter

1. In Engagement, go to Email Studio.
2. Under Interactions, click **Salesforce Send Emails**.
3. Select the Salesforce data extension or filter.
4. Click **Send**.
5. Select to send immediately or schedule a time to send.
6. Certify opt in.
7. Click **Send**.

Salesforce Sends

There are many benefits of using the Salesforce Sends option in Marketing Cloud Engagement through Marketing Cloud Connect. Keep sending behavior consistent between Sales Cloud, Service Cloud, and Engagement. Share tracking data from Engagement by selecting the Salesforce Sends option within Email Studio Interactions.

When you use Salesforce Sends to create profile attributes for new subscribers, they aren't available for grouping and filtering because this data isn't synchronized or maintained through sending. To filter and group by profile attributes, use Synchronized Data Extensions.

Salesforce Send benefits include:

- Subscriber records are stored in the All Subscribers list instead of the managed list, providing more opportunities for future communications.
- Each send includes enhanced status updates.
- Administrators can better organize and access send definitions that are based in the Sales Cloud, Service Cloud, or Engagement with extra storage location.

Not seeing Salesforce Sends? Connect users to the CRM on their User Detail record of Engagement to access this functionality. The Salesforce.com Status of the User Detail Record shows Integrated.

Subscriber Key

A subscriber key is a text field that contains a value that uniquely identifies a subscriber in your Marketing Cloud Engagement account. Marketing Cloud Connect for Marketing Cloud Engagement uses the subscriber key to identify the Sales or Service Cloud record associated with the tracking data returned from Engagement.

The Contact ID, Lead ID, and User ID are converted into the 18-digit subscriber key that is stored in Engagement during sends. These IDs must be included when sending to reports, campaigns, or Salesforce data extensions through Marketing Cloud Connect.

Best Practices for Sending from Multiple Clouds

- Send to a Sales or Service Cloud report, campaign, or Salesforce data extension when sending through Marketing Cloud Connect.
- If manually importing Sales or Service Cloud data files into Engagement, create a custom formula field for Contact and Lead records to generate an 18-digit ID based on the Contact ID, Lead ID, or User ID. Use a text field and input "CASESAFEID(Id)" as the formula, with the Contact or Lead ID in parentheses. When exporting data out of Sales or Service Cloud to import into Marketing Cloud, include this value to use as the subscriber key.
- Send only from a single cloud for each subscriber. For example, use Sales Cloud to send to subscribers who exist first as a contact or lead. Use Engagement to send to subscribers who didn't originate in Sales Cloud.
- If you want to send to the same recipients from both Engagement and Sales or Service Cloud, implement extra measures to manage subscriptions across clouds. Contact your Engagement account executive for further assistance.

See Also

[Subscriber Key in Marketing Cloud](#)

Synchronized Data Sources

Use Synchronized Data Sources with Marketing Cloud Connect for Marketing Cloud Engagement to access data from Sales and Service Clouds in Engagement for use in your marketing activities. As changes occur in the Sales or Service Cloud, Engagement receives those updates.

To use this feature, enable these prerequisites:

- Marketing Cloud Connect installed and configured using version 5.493 or later
- Updated Salesforce System user

See Also

[Create Synchronized Data Sources in Contact Builder](#)

[Synchronized Data Sources in Contact Builder](#)

[Edit Synchronization Settings](#)

Synchronized Data Sources Best Practices

Follow these best practices to synchronize data into Marketing Cloud Connect for Marketing Cloud Engagement using Synchronized Data Sources.

Synchronize Only Necessary Fields

Synchronize only the information necessary for your Engagement activities because the process required to synchronize more fields slows performance. We recommend no more than 20 fields per object for optimum performance. If more fields are required, limit the maximum number of fields per object to 250.

Add Fields into Your Synchronized Data Sources from the Original Source

Add fields and update rows in your Sales or Service Cloud source before you synchronize the data with Marketing Cloud Engagement. After you complete this process, add the fields within the synchronized data source in Engagement. This best practice prevents synchronizing fields with empty values and then synchronizing more values. You don't need to refresh or pause your data sources as part of this step.

Delete Fields from Your Engagement Synchronized Data Sources First

Remove the field from your Engagement synchronized data source first before the original source. This step prevents you from including out-of-date data in your marketing activities. When you delete a field from the Salesforce source first, that data remains in the Engagement data source. You receive a warning about the lack of updates, but the most recent version of the synchronized data remains in your account.

Disconnect Your Synchronized Data Sources Connection for Sandbox Instances Only

If you refresh a sandbox instance, disconnect and reconnect your account. Don't disconnect and reconnect the production account as part of normal business activities.

Pause Your Synchronized Data Sources Connection for Major Changes Only

You can pause your Synchronized Data Sources connection and prevent Engagement from receiving updated information. Only pause when you make significant data or architecture changes to the Salesforce source. After you complete the changes, resume the synchronization process. If the pause lasts longer than 15 days, you must refresh the data source.

Refresh Your Synchronized Data Sources Connection When Necessary

Refreshing a synchronized data source entirely clears the Engagement synchronized data extension and then repopulates the data. To avoid performance issues, only refresh when not performing any sends or automations using this synchronized data source. Any refresh performed in a multi-org environment affects all business units integrated using the same active Salesforce System user. Consider all affected business units before performing the refresh.

Use Synchronized Data Sources in Journey Events

Engagement can't use synchronized data sources as sendable data extensions. Use a query activity to move information from a synchronized data source into a sendable data extension. Update the result of the query activity to ensure that you use the most up-to-date data.

Share Synchronized Data Sources to Business Units

To make synchronized data available at the business-unit level, use a query activity. Move information from a synchronized data source in the parent account into a shared data extension. Create the query activity that moves the data into a new data extension. Next, share that new data extension to the business unit. Update the result of the query activity to ensure that you use the most up-to-date data.

Avoid Breaking the Synchronized Data Sources Synchronization Process

Don't rename or change the API name for the Sales or Service Cloud object included in the Synchronized Data Sources synchronization process. Renaming prevents the process from occurring.

Don't delete the Sales or Service Cloud object used as part of the synchronization process without first pausing the object in Engagement. Otherwise, your account could continue to use out-of-date information in your marketing activities.

Don't delete any reference ID field from a synchronized Sales or Service Cloud object included in the Synchronized Data Sources synchronization process. This step corrupts the relationships in your synchronized contact model.

If you delete fields not required by Engagement as reference IDs in your Sales or Service Cloud objects, Synchronized Data Sources synchronizes changes without errors. If your contact model requires the deleted field as a reference ID, such as an email address or mobile number, you receive an error. The

Activity page logs all actions for review and troubleshooting purposes.

Plan Marketing Activities Around Data Refreshes and Large Updates

When a synchronized data source attempts to add, modify, or delete more than 600,000 rows in a minute, Synchronized Data Sources automatically refreshes the data source. This refresh ensures that all fields within that data source update accurately. This refresh process causes the associated synchronized data extension to contain no information until the refresh process completes. The amount of time necessary to complete the refresh process varies depending on the number of records to update. Ensure that you allow enough time between a bulk update of a synchronized data source and any marketing activities using the synchronized data extension. Otherwise, the marketing activity might not access any data during the scheduled performance time.

Understand How Contact Deletion Functions with Synchronized Data Sources

If you delete contacts in Engagement and a data source synchronizes before the deletion process completes, the process adds a contact record in All Contacts. This record includes an 128-bit UUID. To prevent this occurrence, delete contact records from Sales or Service Cloud before you delete them from Engagement. You can also turn off the data synchronization process for that data source. These new records include the Salesforce ID in the `ID` field of the synchronized data source. The `_contactkey` field contains the UUID-style contact key used in All Contacts.

If you stop syncing a contact in Marketing Cloud Engagement, the contact is removed from the synchronized data extensions but not from Contacts. To remove a contact, [submit a contact delete request](#).

Understand How Formula Fields Update with Synchronized Data Sources

Formula fields contained in Synchronized Data Sources update only when an update for another field on the object occurs. Formula fields don't trigger a change to an object or update last modified date fields. When an update occurs, Marketing Cloud Engagement evaluates and updates all synchronized formula fields for that object as necessary. These evaluations take place for every field update. For best performance, use optimized SOQL statements in synchronized formula fields.

Filter Synchronized Records to Prevent Duplication of Records

Synchronized Data Sources creates separate contact records for each LeadID, ContactID, and UserID that you synchronize from Sales or Service Cloud. You can filter records that don't include email addresses to prevent creating duplicate entries for the same contact. Use the **Record Collection** buttons when you create or modify a synchronized data source to implement a filter. For example, you can eliminate imported leads that don't have an email address, since you can't send email messages to those contacts. You can also use Boolean values to filter records or sync records created after a specified date to include only the records that are necessary for your use case.

Some users include Apex to populate a Boolean field in Sales Cloud to control which records are synced. For example, Apex can populate a field called Marketable for all records where Email Address is NOT empty. You can then use the Boolean filter in Engagement to import only those records where Marketable equals True. Editing an object that has already been synchronized initiates a refresh for that object.

To optimize performance, we recommend that you use boolean filters exclusively when filtering large data sources. We also recommend that you avoid using date filters with large data sets.

See Also

[Build a Formula Field](#)

Unsubscribes

The first time a message is sent through Marketing Cloud Connect to a contact, lead, or person account from Sales or Service Cloud, the recipient is added to the All Subscribers list in Marketing Cloud Engagement. For example, when an Engagement email is sent from Sales Cloud to a report containing contacts, those contacts are added to the All Subscribers list. The Engagement status for that subscriber is set to Active in the All Subscribers list.

The status of a subscriber changes from Active to Unsubscribed in Engagement, and the Email Opt Out field is enabled in Sales or Service Cloud when any of the following occurs:

- A subscriber clicks the Unsubscribe link in an email or the profile center.
- You click **Marketing Cloud Unsubscribe** on a contact, lead, or person account record in Sales or Service Cloud.

Enabling the Email Opt Out field only in Sales or Service Cloud doesn't synchronize the subscriber status in Engagement. Always click **Marketing Cloud Unsubscribe** on the record.

Marketing Cloud Connect doesn't support list unsubscribe. Use master unsubscribe to unsubscribe a recipient.

An unsubscribed status prevents all sends to the recipient unless you configure the system to only allow transactional sends, for example, a receipt of purchase. View the status of the subscriber from the All Subscribers list in Engagement.



Note Transactional sending requires Marketing Cloud Connect version 5.18 or later.

Marketing Cloud Connect supports the Active or Unsubscribed status only for a subscriber.

Other Unsubscribes

- A subscriber can be unsubscribed in Engagement by updating the subscriber properties. This unsubscribe doesn't synchronize the status in the Sales or Service Cloud. However, Engagement prevents Engagement email sends to the subscriber.

- Marketing Cloud Connect doesn't support business unit-level unsubscribes for Enterprise 2.0 accounts. Subscribers are included in the All Subscribers list at the enterprise level and unsubscribed from all business units in the enterprise.

Reactivating a Subscriber

In Sales or Service Cloud, click **Marketing Cloud Resubscribe** on the contact, lead, or person account record. This action disables the Email Opt Out field and changes the subscriber status to Active in the Marketing Cloud All Subscriber list.



Note Disabling the Email Opt Out field doesn't synchronize the status in Marketing Cloud. Always click **Marketing Cloud Resubscribe**.

How Can I See Contacts Who Have Unsubscribed?

In Sales Cloud, build a report where the Email Opt Out field = True.

Or, in Engagement, query _Subscribers data view and return status.

See Also

[Unsubscribes](#)

[Subscribers with Enhanced Subscriber Features in Marketing Cloud](#)

[Update Subscriber Status in Marketing Cloud](#)

Frequently Asked Questions

Review frequently asked questions about Marketing Cloud Connect for Marketing Cloud Engagement.

[Account, Edition, and Other Compatibility FAQs](#)

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement compatibility with product editions, accounts, and more.

[Advanced FAQs](#)

Answers to your advanced questions about Marketing Cloud Connect for Marketing Cloud Engagement.

[Authentication FAQs](#)

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement authentication, including Connected Apps and OAuth 2.0.

[Email Sends and Reports](#)

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement email sends and reports.

[Encryption](#)

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement encryption.

Industry Compliance and Regulations

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement industry compliance and regulations.

Installation and Setup FAQs

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement installation and setup.

Multi-Org FAQs

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement multi-org configuration.

Tracking and Unsubscribes

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement tracking and unsubscribes.

Upgrade FAQs

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement upgrade.

Account, Edition, and Other Compatibility FAQs

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement compatibility with product editions, accounts, and more.

What Marketing Cloud Engagement Editions Work with Marketing Cloud Connect?

Marketing Cloud Connect works with all Engagement editions. Review [product features](#) for a complete list of compatibility for Marketing Cloud Connect.

What Salesforce Editions Work with Marketing Cloud Connect?

Marketing Cloud Connect works with Salesforce Performance, Unlimited, Enterprise, and Developer Edition Sandbox accounts. It doesn't currently work with Professional Edition. Review [product features](#) for a complete list of compatibility for Marketing Cloud Connect.

Does Marketing Cloud Connect Work in Lightning Experience?

The Marketing Cloud Connect User Interface within Sales/Service Cloud are created with Visualforce and are considered Salesforce Classic experiences. Visualforce pages can be used within Lightning Experience. However, you're redirected to Salesforce Classic Experiences when you click Marketing Cloud Connect tabs.

What Languages Are Supported?

Versions 5.494.1 (January 2016 Release) and earlier support English, French, and Japanese. Versions

5.495.1 (March 2016 Release) and later support English, French, Japanese, Spanish, Spanish (Mexico), Portuguese (Brazil) Italian, and German.

Is Marketing Cloud Connect Supported in the Salesforce Mobile App?

No.

Advanced FAQs

Answers to your advanced questions about Marketing Cloud Connect for Marketing Cloud Engagement.

Can I Use Personalization with Marketing Cloud Connect?

Yes. Map attributes between Engagement and Salesforce CRM to use personalization.

Can I Map Custom Attributes Between Engagement and Sales or Service Cloud for Advanced Personalization?

Yes. Custom attributes that are based on the Lead, Contact, Account, or Person Accounts objects can be mapped. Mapping to custom objects isn't currently available.

Can I Use Data Extensions with Marketing Cloud Connect?

Yes. Data extensions can be used when email sends are performed within Marketing Cloud Engagement. Data Extensions can be populated using synchronized data extensions or Automation Studio imports.

Can I Use Custom Links and Server-Side JavaScript Buttons in Page Layouts with Marketing Cloud Connect?

No. Replace custom links and Server-Side JavaScript buttons with Visualforce pages that provide secure and appropriate links and buttons.

Can Engagement Help with App Changes?

Engagement doesn't help with app development or modification but does recommend using one of our development partners. Speak with your account representative for more information.

Why Do I Need to Install the Metadata API?

Salesforce uses the Metadata API remote site to automatically allowlist IP addresses and create time-based workflows through the configuration wizard. If we're unable to add the remote site automatically, add it manually. If you perform IP allowlisting and workflow creation manually, you don't need to install the Metadata API remote site.

How Do I Install the Metadata API Remote Site Manually?

Search for Remote Site Settings in the Sales or Service Cloud setup. Select **New Remote Site** and edit it with the following information:

- Remote Site Name: *MetadataAPI*
- Remote Site URL: *https://MyDomainName.my.salesforce.com*
- Description: Remote Site setting to make callouts.

Can Integrated Accounts Be Disconnected?

Yes. The ability to disconnect an Engagement account from the Sales or Service Cloud account is only available for Enterprise 2.0, Core, and Lock & Publish accounts with version 5.493 or greater of the package. The account must use connected app authentication. The Engagement admin can disconnect the accounts by editing the Salesforce Integration in the Marketing Cloud Email Studio admin. There's a known issue with Google Chrome. If you cancel after clicking Disconnect Account and try disconnecting again, the process will fail.

What Happens After Disconnecting an Integrated Account?

After disconnecting, the Salesforce system user's credentials are removed, resetting the connection at the account level. User mappings in the disconnected business unit and synchronized data extensions are removed. All disconnected business units, orgs, and users can be remapped and synchronized data extensions can be reconfigured in a new connection as needed.

Is Tracking Maintained After Disconnecting an Account?

Tracking subscriptions are canceled. Any tracking for previous sends isn't pushed to the previous Sales or Service Cloud org. If a new connection is made, tracking for previous sends isn't pushed to the new org. Tracking isn't affected in Engagement.

How Do I Refresh an Integrated Sandbox Org?

Follow these steps to refresh an integrated sandbox org.

1. [Disconnect the integration.](#)

The ability to disconnect an Engagement account from the Sales or Service Cloud account is only available for Enterprise 2.0, Core, and Lock & Publish accounts with version 5.493+ of the package. The account must use connected app authentication.

2. [Refresh the sandbox.](#)

Sandbox refreshes complete in hours, days, or even more than a week, depending upon the number of customizations, data size, number of objects, configuration choices, and server load. Also, sandbox refreshes are queued, so there could be a delay after your request.

3. [Reconnect the accounts.](#)

This process connects your Engagement account to the corresponding Sales or Service Cloud org.

4. [Complete Connected App authentication setup.](#)

Complete these steps to finalize the connected app authentication setup, which manages all cross-

cloud authentication from Engagement into the Sales and Service Clouds.

5. Synchronize data sources.

If you use Synchronized Data Sources, all synched objects and data are deleted after disconnecting the integration and must be recreated.

Can I Restrict My Connectivity to a Specific Stack or Set of IPs in Engagement with Marketing Cloud Connect?

For connectivity from Sales or Service Cloud to Engagement through Marketing Cloud Connect, use the Advanced Setting for Tenant-Specific Endpoints. This setting ensures stack-specific connectivity. When using Connected App for connectivity from Engagement to Sales or Service Cloud, apply the IP allowlist ranges to the Connected App user's profile. The ranges are enforced at the time of initial connectivity. Marketing Cloud Connect currently doesn't maintain application-level or profile-level allowlist support.

Does Marketing Cloud Connect Support Single Sign-on?

Single sign-on is supported for customers that salesforce-sites.com, site.com, and vf.force.com domains for their single sign-on. Custom domains aren't supported for single sign-on through Marketing Cloud Connect.

Authentication FAQs

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement authentication, including Connected Apps and OAuth 2.0.

How Do We Authenticate Between the Clouds?

Marketing Cloud Connect uses Connected App and OAuth 2.0, trusted authentication tools. These tools allow you to work seamlessly across Sales Cloud, Service Cloud, and Engagement without the need to store credentials. Connected App authenticates users from Engagement into Sales and Service Clouds. OAuth 2.0 authenticates users from Sales and Service Clouds into Engagement.

What Are Connected Apps?

Connected Apps are Salesforce managed packages used to connect applications to Salesforce using APIs.

What Are the Benefits of Connected App Authentication?

Connected App authentication is a secure connection and authentication mechanism between Sales Cloud, Service Cloud, and Engagement. Connected App doesn't require you to store Sales or Service Cloud passwords in Engagement. It also prevents SOAP and REST API calls made by Marketing Cloud Connect from counting against your rolling 24-hour limit.

Does Connected App Authentication Remove All API Limits?

No. Connected App Authentication only excludes SOAP, REST, and BULK API calls made by Marketing Cloud Connect. Concurrent API request limits are still enforced. Most calls made by Marketing Cloud Connect are SOAP and REST. BULK API calls are only used by Synchronized Data Extension Refresh when the feature is enabled.

Is Connected App Authentication Required?

Yes. As of June 1, 2016, all Marketing Cloud Connect customers are required to use Connected App Authentication.

Can I Send to CRM Audiences While Upgrading to Connected App Authentication?

No. The connection between Sales Cloud, Service Cloud, and Marketing Cloud Engagement is broken during the upgrade process, so ensure that all Marketing Cloud Connect activities are paused. All sends to reports, campaigns, contacts, leads, and Salesforce data extensions fail. Marketing Cloud Engagement sends that don't involve Marketing Cloud Connect aren't affected. We suggest scheduling a 1–2 hour outage depending on your number of connected users.

Can I Send to Traditional Engagement Audiences While Upgrading My Account Authentication?

Yes. Normal Engagement sends continue to work.

Can Connected App Authentication Be Rolled Back After It's Enabled?

No. After you authenticate using Connected App Authentication, you can't revert to legacy authentication.

What Is OAuth 2.0?

OAuth 2.0 Authentication uses access tokens to provide a secure connection between the clouds, without storing any Engagement user passwords in Sales and Service Clouds.

When Is OAuth Implemented? Will the User Experience Change?

This enhanced authentication is available starting with the 208.1 managed package release. After upgrading, existing Marketing Cloud Connect users are prompted to reenter their Marketing Cloud Engagement credentials the next time they access Marketing Cloud Connect. The rest of the user experience remains the same.

Is OAuth 2.0 Authentication Required?

Yes. All accounts that are upgraded to the 208.1 managed package or newer use OAuth 2.0.

How Do I Download and Complete This Update?

To reduce downtime or impact to your business, follow these steps if you're upgrading from an older version of the managed package:

1. To understand feature changes in the 208.1 managed package, review the [latest releases](#) page.

2. To minimize downtime if an unexpected error occurs, schedule the upgrade during off-peak hours.
3. Allow all scheduled sends to complete before starting the upgrade, if possible.
4. Ensure that you can log in to Engagement using the current API user credentials.
5. Follow the steps on the [Install Managed Package](#) page.

After upgrading, existing Marketing Cloud Connect users are prompted to reenter their Engagement credentials the next time they access Marketing Cloud Connect.

6. Verify that Marketing Cloud Connect API user credentials migrated after upgrading by navigating to the Marketing Cloud tab in Sales or Service Cloud.

How Can I Verify That Marketing Cloud Connect API User Credentials Migrated After Upgrading to OAuth 2.0?

If the user didn't migrate, non-Enterprise 2.0 accounts are prompted to enter Marketing Cloud Connect API user credentials. Enterprise 2.0 accounts follow these steps to confirm:

1. In Sales or Service Cloud, navigate to the Marketing Cloud tab.
2. Click **Configure Marketing Cloud Connector**.
3. Click **Manage Business Units**.
4. Confirm that previously active Business Units are still active.
5. If Marketing Cloud Connect API user credentials didn't migrate, click **Change API User** from the configuration page.
6. Enter the Marketing Cloud Connect API user credentials and save.
7. Click **Manage Business Units**.
8. Confirm that previously active Business Units are now active.

See Also

[Authentication Between Clouds](#)

[Upgrade to Connected App](#)

[Connected Apps](#)

[API Request Limits and Allocations](#)

[Authorize Apps with OAuth](#)

Email Sends and Reports

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement email sends and reports.

How Do I Send Engagement Emails from the Sales or Service Clouds?

After Marketing Cloud Connect is configured, send emails to campaigns and reports through the Marketing Cloud tab. Send emails from a Campaign, Contact, or Lead by clicking **Send Marketing Cloud Email** after adding the custom Visualforce page to the page layouts.

Can I Send to Sales or Service Cloud Campaigns or Reports?

Yes. You can send to one or more campaigns or reports from the Marketing Cloud tab. Reports must contain either a Lead ID or Contact ID field, and you must have permission to view the report.

Can I Send to Multiple Reports and Campaigns at the Same Time?

Yes. You can send to up to 10 campaigns, reports, or a combination of both from the Marketing Cloud tab.

Can I Send to Reports in My Personal Custom Reports Folder?

Yes, but only if the **Scope by User** option was selected when integrating or the **Tracking User** and the **View My Personal Custom Reports** options were enabled during configuration of Marketing Cloud Connect.

Can I Send to Sales or Service Cloud Person Accounts?

Yes. You can send to Person Accounts.

Can I Send to a Single Sales or Service Cloud Contact or Lead?

Yes. Click Send Marketing Cloud Email on the Lead or Contact record after adding the custom Visualforce page to the appropriate page layout.

What Objects Can I Send to in Salesforce?

You can send to Contacts, Leads, Campaigns, and Person Account objects.

Can I Create Emails in Sales or Service Cloud to Send Through Marketing Cloud Connect?

No. Email content must be created in Marketing Cloud for use within Marketing Cloud Connect sends.

Can I Preview Emails in Sales or Service Cloud Before Sending?

Yes. You can preview a thumbnail version after selecting an email. If you select an email and report or campaign, a dynamic preview with subscriber-specific content is also available.

Can I Verify My Counts in Sales or Service Cloud Before Sending?

Yes. If you can access the report you're sending to, you can verify counts in advance.

Can I Associate an Email with a Report or Campaign?

Yes. Associate email content with a list of recipients (reports or campaigns) through email linkages. Check the box for “Remember recipients and exclusions for this email” after selecting an email and a recipient list from the Send Email page. The audience box is automatically populated the next time you select the email content.

Are Joined Reports Supported by Marketing Cloud Connect?

No. Learn more about [joined reports](#).

What Are Exclusions?

Exclusions allow you to exclude specific customers from a send. Both reports and campaigns can be excluded at time of send.

What Are My Options for a Send-From Address?

You can send from your own email address, the owner of a record, an organization-wide email address, or an Engagement send classification.

What Time-Based Options Are Available for Sending?

You can send immediately or schedule a future time and date.

Can I View a Thumbnail Preview of My Triggered Sends?

View a thumbnail preview of triggered sends on the Individual Email Results record. Previews include triggered sends created with Content Builder after the 209 managed package release. Thumbnails don't include rendering of any personalization or AMPscript.

Encryption

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement encryption.

What Versions of TLS Encryption Protocols Are Supported by Marketing Cloud Connect?

TLS version 1.2 or higher is required.

Previously, Marketing Cloud Connect has recommended deactivating the "Require TLS 1.2 or Higher" critical update. As of February 2017, deactivation of this critical update is no longer required as the

integration is TLS 1.2+ compliant. No impact or actions by the client are necessary to ensure that the integration continues to function.

Industry Compliance and Regulations

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement industry compliance and regulations.

What is the CAN-SPAM Act?

The CAN-SPAM Act is a law setting the rules for commercial email. It establishes requirements for commercial messages, giving recipients the right to stop you from emailing them, and defines tough penalties for violations. See *United States Federal Trade Commission Business Guidance: [CAN-SPAM Act: A Compliance Guide for Business](#)*.

Are There Any Restrictions Regarding the Use of Marketing Cloud Connect?

Yes. Before each email send, verify that recipients have expressly provided direct consent or otherwise gave you or your company express permission in a verifiable manner to send email messages to them in accordance with the CAN-SPAM Act.

Installation and Setup FAQs

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement installation and setup.

How Do I Install Marketing Cloud Connect?

Review the [Connect the Clouds](#) section to learn about installing Marketing Cloud Connect.

Who Installs Marketing Cloud Connect?

Installation requires administrative rights to both Engagement and Sales or Service Cloud.

How Do I Get Marketing Cloud Connect Tabs to Appear in Sales or Service Cloud?

After the Marketing Cloud Connect managed package is installed, customize your tabs in the main navigation with the Marketing Cloud, Email Sends, and Send Analytics tabs. Add these tabs to the list of Selected Tabs. Learn how to [customize your tabs](#) in Salesforce. Adding Marketing Cloud Connect tabs to your main navigation isn't required to use Marketing Cloud Connect.

Multi-Org FAQs

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement multi-org configuration.

Is Multi-Org Enabled by Default?

No. Multi-Org must be requested from Support. We examine your account to ensure that Multi-Org is right for you.

Who Can Upgrade to a Multi-Org Account?

Multi-Org is an Enterprise 2.0 account configuration. It requires version 5.494 or later of Marketing Cloud Connect and Connected App Authentication.

What Are the Benefits of Multi-Org?

Multi-Org connects multiple Salesforce orgs to a single Enterprise 2.0 account, with all the Enterprise 2.0 account benefits. Your Sales or Service Cloud connections are managed at the Business Unit level. Multi-Org is a great solution to centralize your marketing content in Engagement, but maintain separate CRM data throughout your organization.

Why Upgrade to Multi-Org?

Customers with multiple Sales or Service Cloud instances that hold different data or serve different business functions can typically benefit from upgrading.

Can I Enable Multi-Org for an Existing Account?

Yes. Upgrading an existing Enterprise 2.0 account is possible, but any previously connected business unit must be manually reconnected. The top-level (parent) account remains connected.

Example: I have a standard Enterprise 2.0 Engagement account with five Business Units connected to a single Sales Cloud org. The top-level (parent) account is connected to the same org. In a non-Multi-Org account, all five Business Units could inherit the parent-level connection. Enabling Multi-Org removes the Business Unit connections inheritance, breaking any existing Business Unit connection. The top-level (parent) account remains connected. Each Business Unit must be individually reconnected to the appropriate Sales Cloud org after upgrading. Also, reconnect user mappings at the Business Unit level.

Does Multi-Org Require a New or Separate Installation of Marketing Cloud Connect?

No. Multi-Org is available for any existing Marketing Cloud Connect customers using version 5.494 or

higher. When Multi-Org is enabled, your accounts are disconnected. Disconnecting your account removes existing user mappings, attribute mappings, and tracking subscriptions.

Can I Disable Multi-Org?

No. After your account is upgraded to Multi-Org, you can't turn it off.

How Do I Get Multi-Org Improvements?

All Multi-Org improvements and enhancements are automatically pushed to your account with every Marketing Cloud release.

What Are Multi-Org Best Practices?

We recommend controlling All Subscriber List access, using a custom profile center, and carefully planning your account and user setup. Review [Multi-Org Account Configuration](#).

Do Child Business Units Inherit Parent Mappings?

No. Parent-mapping inheritance isn't currently supported. All connections must be managed at the Business Unit level. While upgrading, suspend all sending through Marketing Cloud Connect as any in-flight sends fail.

Are There Restrictions When Connecting Users?

Yes. Establish a one-to-one connection between Sales and Engagement customers. However, more complex connection schemes are supported depending on your business unit connections.

Can I Disconnect My Accounts?

Yes. You can disconnect any Business Unit from your Sales or Service Cloud using the Salesforce Integration screen in Engagement. Disconnecting your account removes existing user mappings, attribute mappings, and tracking subscriptions. After it's disconnected, that Business Unit can connect to any eligible org.



Warning If you use Synchronized Data Sources with multi-org configuration, when you disconnect a business unit from Sales or Service Cloud, synchronized data extension names can change. To ensure that they continue working, update query activities that reference those synchronized data extensions.

Are There Best Practices for Reconnecting?

Yes. If you're disconnecting and reconnecting to a different Salesforce org, click **Disconnect** in Marketing Cloud Connect settings before reconnecting. Pause any Synchronized Data Sources during the process.

Is Sharing Salesforce Data Extensions (SFDEs) Across Business Units (BUs) Allowed?

No. Sharing SFDEs in a Multi-Org account isn't supported, even between BUs connected to the same org. Sharing standard Data Extensions and content is supported. Review and move data extensions under the Shared Salesforce Data Extensions folder. Access is removed when multi-org is enabled

Is Personalization Supported in Multi-Org?

Yes, for standard fields only. Using custom fields from the Sales Cloud requires AMPscript.

Is the Standard Profile Center Supported in Multi-Org?

No. Custom Profile Centers are required for Multi-Org.

Is Web Collect Supported?

No.

Is One Custom Profile Center (CPC) Per Business Unit Required?

No. One CPC per Business Unit is an option, but isn't required. Other options include one CPC that manages business unit unsubscribes, or multiple CPCs that align with key departments, publications, or verticals in your business. It's important that you manage unsubscribes to remain CAN-SPAM compliant.

Can I Use Multi-Org with My Sandbox and Production Accounts?

Yes, but consider the following:

- Sandbox promotions aren't possible in Engagement. Org sandboxes can be promoted into production orgs. You can't promote changes in a 'test' business unit into another 'prod' business unit.
- Sandboxes are often used for testing items that are high risk for adversely affecting accounts, such as load tests, performance tests, or volume tests. Connecting your production account to your sandbox org elevates the risk of harming your production account.
- Engagement business units aren't data-isolated. Test data and production data are co-mingled when using a sandbox, which impacts data cleanliness and adds complexity to reporting, audience creation, and so on.
- All business units receive code at the same time. You can test Sales or Service Cloud changes before

the release. However, Engagement changes go live at the same time, regardless of whether the business unit is tied to a Sandbox.

Do Deep Links Work with Multi-Org Accounts?

Yes, but consider the following. When using deep links with multi-org accounts, you're logged in to your default Engagement business unit. This login is regardless of whether that business unit is configured for use with the Sales or Service Cloud by Marketing Cloud Connect. To access a business unit other than your default, log directly in to the desired Engagement business. To avoid changing in the incorrect business unit, avoid using deep links.

See Also

[Multi-Org Account Configuration in Marketing Cloud Connect](#)

Tracking and Unsubscribes

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement tracking and unsubscribes.

What Options Are Available for Tracking?

Under tracking preferences in Marketing Cloud Connect settings, you can specify the level of tracking: aggregate, individual, link detail and sent events. A time-based utility for deleting tracking data is also available through the Configure Integration section of the Marketing Cloud tab in the CRM.

Can Users Turn Off Tracking?

Yes. Tracking options can be deselected from the tracking preferences section in Marketing Cloud Connect settings. If reducing data storage is a higher priority than tracking individual results, you can also override individual level tracking during a send.

How Can a Subscriber Unsubscribe?

There are multiple ways to unsubscribe a subscriber from receiving communications.

- A subscriber opts out by clicking the link to the profile center included in each email. The user is unsubscribed in the Marketing Cloud and the Email Opt Out flag is checked in the CRM.
- A subscriber can click a link to a custom profile center and opt in or out of specific communications.
- A Salesforce user can unsubscribe or opt out a subscriber manually within the CRM.
- An Engagement user can unsubscribe or opt out a subscriber manually in Engagement.
- A Salesforce user can unsubscribe or opt out a subscriber manually within the CRM by clicking the Unsubscribe/Resubscribe link in the ContactActions Visualforce Page if it has been added to the Lead/Contact page layout.

A Marketing Cloud user can unsubscribe or opt out a subscriber manually in Marketing Cloud, but the opt-out flag in CRM isn't set. This action can cause the subscriber to become out of sync.

See Also

[Reports](#)

[Schedule Reports in Salesforce Classic](#)

Upgrade FAQs

Answers to your questions about Marketing Cloud Connect for Marketing Cloud Engagement upgrade.

How Long Does It Take to Upgrade from v2 to Marketing Cloud Connect?

Upgrading v2 to Marketing Cloud Connect is mostly self-service. Expect a 2–3 hour send outage for all sends to Salesforce recipients including reports, campaigns, contacts, leads, and Salesforce data extensions.

How Long Does It Take to Upgrade from v3 to Marketing Cloud Connect?

Marketing Cloud Connect is typically installed in 1-2 hours without migrating historical tracking data. If historical tracking data is migrated, the process can take an entire day. An internal Salesforce service team performs the upgrade.

Troubleshooting Guide

Review troubleshooting tips for Marketing Cloud Connect for Marketing Cloud Engagement.

[Initiate Logging](#)

Marketing Cloud Connect for Marketing Cloud Engagement includes an option for logging all package-related API calls and associated details, which is useful for monitoring and troubleshooting. Enable the log through the Marketing Cloud Connect Configuration page.

[Troubleshoot Email Sends and Tracking in Marketing Cloud Connect](#)

Tips for troubleshooting sending emails and tracking with Marketing Cloud Connect for Marketing Cloud Engagement.

[Troubleshoot Installation and Configuration](#)

Tips for troubleshooting installation and configuration with Marketing Cloud Connect for Marketing Cloud Engagement.

[Troubleshoot API Calls and Data Load Jobs](#)

Tips for troubleshooting bulk API calls and data load jobs, and using API request logs with Marketing Cloud Connect for Marketing Cloud Engagement.

[Troubleshoot User Access and Permissions](#)

Tips for troubleshooting user access and permissions with Marketing Cloud Connect for Marketing Cloud Engagement.

Advanced Troubleshooting

Tips for advanced troubleshooting with Marketing Cloud Connect for Marketing Cloud Engagement.

Initiate Logging

Marketing Cloud Connect for Marketing Cloud Engagement includes an option for logging all package-related API calls and associated details, which is useful for monitoring and troubleshooting. Enable the log through the Marketing Cloud Connect Configuration page.



Important Marketing Cloud Connect retired this logging capability with the 234.0 Package release. We recommend these alternatives to troubleshoot your integrations:



Note Logging is disabled 60 minutes after it's enabled.

1. In Sales or Service Cloud, navigate to **Setup** object.
2. Click **Apex Jobs**.
3. In the Apex Class column, review entries for triggered sends or *JBIntBulkManager*, which is the Journey Builder Entry Event.
 - a. If you can't find these entries, it's likely that the records aren't meeting the injection or trigger criteria. There can also be an issue in the evaluation process, such as custom triggers or flow errors.
 - b. If these entries show that injection or sending still isn't happening, it's likely that there's a configuration issue or that the contact is being rejected by the journey or that they've unsubscribed.

Troubleshoot Email Sends and Tracking in Marketing Cloud Connect

Tips for troubleshooting sending emails and tracking with Marketing Cloud Connect for Marketing Cloud Engagement.

Troubleshoot Tracking

Review these options to investigate and troubleshoot tracking for email sends.

- Confirm Sales or Service Cloud configuration tracking options.
You can customize tracking preferences in the Sales or Service Cloud within the Marketing Cloud Connect configuration page. We recommend setting the tracking frequency to hourly and the number of days to track at 90. You can override individual tracking configurations on each email send. Learn more about Tracking options.
- Check Engagement tracking configuration.
To ensure that the Salesforce system user and Marketing Cloud API user are set up and connected, follow the [Connect the Clouds configuration steps](#).
- Test emails to see if sends are using contacts or leads.
Ensure that email recipients are pulled from a Salesforce campaign, report, contact, lead, or person account. Marketing Cloud Connect doesn't support sends to objects other than Lead, Contact, or Person Account. If the email send is using a Salesforce data extension, ensure that the subscriber key

is an 18-digit Contact or Lead ID.

- Confirm that you're using Marketing Cloud Connect
Some tracking features aren't available in earlier versions of Marketing Cloud Connect. To upgrade to Marketing Cloud Connect, speak with your account representative.

Email Send Is Stuck in a Send Queued Status or Failed with an Error Message

The send process was able to create a data extension, populate it with data, and create the user-initiated send definition. However, it failed to execute the send using that definition. You see an error message:

`Errors could not be resolved within 12 hours.` There are a few possible causes:

- The email didn't pass validation, which prevents sending. Correct the validation issue and retry the send.
- Ensure that the user initiating the send has API User selected on the user record in Engagement.
- If the account is configured as scope-by-user, verify that the user initiating the send has permission to send within Engagement. This permission includes the ability to access and execute user-initiated emails.
- Locate the send in the account. If the data extension for the send isn't deleted due to retention policies, starting this email send definition in Engagement provides error details. Attempt this process only if it's OK for the send to execute, because this test could result in the issue resolution and send execution.

Send Shows Failed Status with Creating Send Definition Error

If sending to a report, the Report is missing a field for Contact or Lead Id. To resolve this issue, update the report with the ID field for Lead or Contact.

Send Status Stuck at Processing Data with a Retried Data Retrieval Message

If your account is configured as scope-by-user, ensure that the user initiating the send has an updated password on the user record within Engagement. For example, if a connected user's Sales Cloud password is updated, the Engagement password must also be updated.

In Sales or Service Cloud, navigate to **Setup** to customize the Lead and Contact fields by selecting **Email Opt Out**, **Set Field-Level Security**, and **Visible** to enable for all roles.

Email Doesn't Send

Check these items. To further troubleshoot, log in as the Salesforce system user and try to view the report you're sending to check data accessibility.

- If sending to a report, ensure that the report includes the LeadID or ContactID field. The status remains Failed without these fields.

- If sending to a report, check what it's displaying under Show for the report. Filter records by criteria other than **MY RECORDS**. For example, **My Leads** data is not visible to the Salesforce system user.
- Make sure that **Email Opt Out** isn't selected for the subscriber in Sales or Service Cloud.
- Make sure that the subscriber isn't unsubscribed in Engagement.
- Make sure that **API User** is selected on the Engagement user record. If it isn't, the send status stays at Send Queued.

Error Sending Email Due to Name Length

Use 80 characters or less for the email name when sending through Marketing Cloud Connect.

Email Send Status Is Failed with Message

Sending emails from an email address that contains invalid characters, such as a plus sign + causes the email send status to fail with a message `Error Creating Sender Profile`. Use a different From Address to send the email.

Unable to Access Send Screen

You receive this error message `No Send Classifications were found in the Marketing Cloud. Contact your system administrator. Check the following:`

- In Sales or Service Cloud, navigate to the Marketing Cloud Connect configuration page. Verify that the Send Types value is **Email**.
- In Marketing Cloud Email Studio, confirm that the user is integrated by viewing the user record. Ensure that the Salesforce.com Status is set to **Integrated** and enter the Salesforce.com username.

Unable to Select an Email When Performing a Send

- Verify that the Marketing Cloud API user has the correct permissions to be able to see emails
- Certain versions of Internet Explorer, specifically IE11, causes this issue. Use a supported browser.
- If you're using Approvals, only approved emails are accessible in Sales Cloud.

Campaign Sending Not Enabled

You receive the message: `Campaign sending not enabled. This Marketing Cloud integration is not configured to send to a campaign. Contact your system administrator. Check if the Send Marketing Cloud Email link is enabled for campaigns but it isn't selected as a valid recipient type in the configuration. Use these options to resolve it.`

- Remove the link from campaigns. In Sales or Service Cloud, update campaign page layout by removing **Send Marketing Cloud Email** from the Custom Links section.
- Allow sending to campaigns. Log in to Sales or Service Cloud as a Marketing Cloud Connect admin. Go to the Marketing Cloud configuration page and select **Campaign** for the Target Audience under the

Sends section.

Unable to Select an Email When Performing a Send

- Verify that the Marketing Cloud API user has the correct permissions to access emails.
- Using certain versions of Internet Explorer, specifically IE11, causes this issue. Use a supported browser.

Integration Package Not Installed

You receive this message: Be advised, the integration package has not been installed in your Salesforce Org. Tracking data for this send is not pushed back to Salesforce. Check whether users aren't correctly mapped across clouds. Review [Manage Users](#) to set up users correctly.

No Thumbnail Preview Display for Triggered Send

Thumbnail previews display only for triggered sends created with Content Builder after the 209 managed package release. Thumbnails don't include a rendering of any personalization or AMPscript.

Concurrent Session Limit Policy and Individual Email Responses

If the Concurrent Session Limit setting is enabled within Transaction Security Policies in Sales or Service Cloud, it can affect activities that are active through Marketing Cloud Connect. Don't enable this setting when using Marketing Cloud Connect.

Troubleshoot Installation and Configuration

Tips for troubleshooting installation and configuration with Marketing Cloud Connect for Marketing Cloud Engagement.

Salesforce Not Accepting Calls

You receive the message: We are sorry, but Salesforce is not accepting calls to confirm and retrieve your Salesforce Org ID. Try again. If IP allowlist information is missing, you get this error when setting the Salesforce system user in Engagement. Allowlist a range of IP addresses to identify them as safe and grant network access to trusted networks. The allowlist lets Marketing Cloud Connect to communicate across networks. Learn more about adding [IP addresses](#) to the allowlist.

No ApexClass Found When Installing Package

You receive the message: `ExactTarget Integration: In field: apexClass - no ApexClass named SubscriberAnalyticsController found` when installing package. A configuration issue on the Sales or Service Cloud account causes this issue. Contact Salesforce Global Support to enable the permission **Remoting for Apex Controllers** for the integration to install correctly. Then reattempt the package installation.

Connection Error

You receive the message: `Connection Error - Salesforce is unable to connect to the Marketing Cloud. Contact your system administrator to ensure that the API user credentials are correct. Check whether the Marketing Cloud API user for the account integration has an expired password or if the user is disabled. If the issue continues, check security events for recent login failures and API logs for more details.`

- If Marketing Cloud Connect uses scope-by-user configuration, the Marketing Cloud API user can log in to Marketing Cloud and update the password.
- If Marketing Cloud Connect uses non-scope-by-user configuration, the Marketing Cloud API user logs in to Sales or Service Cloud to update the Marketing Cloud API user password. Confirm that the password is updated in Engagement.

Setup Wizard Error

You receive the message: `Web service callout failed: WebService returned a SOAP Fault: INVALID_SESSION_ID: Invalid Session ID found in SessionHeader: Illegal Session faultcode=sf:INVALID_SESSION_ID faultactor=` when attempting to run the setup wizard using Lightning Experience. Switch to Salesforce Classic UI before launching the Marketing Cloud Connect setup wizard.

Troubleshoot API Calls and Data Load Jobs

Tips for troubleshooting bulk API calls and data load jobs, and using API request logs with Marketing Cloud Connect for Marketing Cloud Engagement.

[Troubleshoot Bulk Data Load Jobs with Marketing Cloud Connect](#)

The Bulk API pushes tracking data back to Sales or Service Cloud from Marketing Cloud Engagement.

Troubleshoot Bulk Data Load Jobs with Marketing Cloud Connect

The Bulk API pushes tracking data back to Sales or Service Cloud from Marketing Cloud Engagement.

To track Marketing Cloud Connect issues related to missing individual link level detail records, view the bulk data load job details. For example, a Bulk API record isn't written when a URL is longer than the field

defined on an object. To track the status of completed or in-progress bulk data load jobs, go to Setup and enter *Bulk Data Load Jobs* in the Quick Find box. Then select **Bulk Data Load Jobs** and click a Job ID link for a job.

See Also

[Monitor Bulk Data Load Jobs](#)

Troubleshoot User Access and Permissions

Tips for troubleshooting user access and permissions with Marketing Cloud Connect for Marketing Cloud Engagement.

Insufficient User Permissions

You receive the message: `Insufficient User Permissions - Your Marketing Cloud user account does not have the required access to perform ET Sends. Contact your system administrator. - Salesforce is unable to connect to the Marketing Cloud. Contact your system administrator to ensure that the API user credentials are correct. This error is with the individual integrated user, not the Salesforce system user, or Marketing Cloud API user.`

- To set up users correctly, review [Manage Users](#).
- Confirm that the Engagement user record isn't disabled.
- Confirm that the user permission for Email Send isn't disabled.

Insufficient User Permissions During Configuration

During setup, admin selecting Marketing Cloud tab results in error `Insufficient User Permissions. You have not been designated as an integrated Marketing Cloud user. Contact your system administrator. The admin only has the Marketing Cloud for AppExchange Admin option selected, but also needs Marketing Cloud for AppExchange User. In Sales or Service Cloud, modify the user record to include Marketing Cloud for AppExchange User.`

Advanced Troubleshooting

Tips for advanced troubleshooting with Marketing Cloud Connect for Marketing Cloud Engagement.

Marketing Cloud Connect Doesn't Work After September 2016 Release

As of the September 2016 Marketing Cloud release, configure Connected App Authentication to ensure that Connect continues working in your account. If your Connected App OAuth Policies aren't correctly configured, authentication from Engagement into Salesforce CRM is broken. Core Engagement functionality including triggered sends, automations, and Journey Builder sends are offline until OAuth

Policies are configured correctly.

- How do I complete the Connected App Authentication?
Don't disconnect and reconnect your account. Have your Salesforce CRM Admin complete all steps for setting up Connected App Authentication. When completed, Marketing Cloud Connect resumes full functionality.
- Is there a specific error in Sales or Service Cloud?
No. However, all Marketing Cloud Connect functionality that requires authentication from Engagement into Sales or Service Cloud fails.
- Is there a specific error in Engagement?
No, but you can perform a quick account verification test by performing a guided send to a Salesforce Report. If the account is configured correctly, the send completes. If configuration isn't complete, you receive this error: An embedded page at `members.exacttarget.com` says: An exception occurred while retrieving Salesforce credentials or attempting to log in to Salesforce. Confirm your Salesforce credentials and if the problem persists, contact your System administrator.

Do Deep Links Work with Enterprise 2.0 Multi-Org Accounts?

Yes, but consider the following.

- When using deep links with Enterprise 2.0 multi-org accounts, you're logged in to your default Engagement business unit. This login happens, regardless of whether that business unit has been configured for use with the Sales or Service Cloud by Marketing Cloud Connect.
- To access a business unit other than your default, log directly in to the desired Engagement business unit instead of using deep links to avoid changing the incorrect business unit.

Tutorials

Practice Marketing Cloud Connect for Marketing Cloud Engagement features with these tutorials for specific use cases.

[Personalize Triggered Sends with Object Data](#)

Use standard and custom object data to personalize triggered sends through Marketing Cloud Connect for Marketing Cloud Engagement.

[Link-Based Campaign from Custom Report](#)

This Marketing Cloud Connect for Marketing Cloud Engagement tutorial shows how to create a custom report in Sales or Service Cloud. Use the report to identify contacts who clicked a link in an Engagement email send.

[Drip Campaign](#)

This Marketing Cloud Connect tutorial shows how to use email send definitions and programs in Marketing Cloud Engagement to automate and schedule sends to Sales or Service Cloud reports and campaigns.

Personalize Triggered Sends with Object Data

Use standard and custom object data to personalize triggered sends through Marketing Cloud Connect for Marketing Cloud Engagement.

You need permission to create data extensions in Engagement and to understand how to use triggered sends. This functionality requires Marketing Cloud Connect version 5.496 or later.



Note Custom objects require a lookup relationship to a Contact record.

1. **Create a Triggered Send Data Extension**

For this Marketing Cloud Connect for Marketing Cloud Engagement tutorial example, create a dynamic triggered send for new and closed cases using the same email content and triggered send definition.

2. **Create a Personalized Email with Standard Object Data**

For this Marketing Cloud Connect for Marketing Cloud Engagement tutorial example, create a personalized email from a case with standard object data using AMPscript.

3. **Create a Personalized Email with Custom Object Data**

For this Marketing Cloud Connect for Marketing Cloud Engagement tutorial example, create a personalized email from a case with custom object data using AMPscript.

4. **Create a Personalized Triggered Send**

For this Marketing Cloud Connect for Marketing Cloud Engagement tutorial example, create a triggered send with personalization from a case and a custom object.

Create a Triggered Send Data Extension

For this Marketing Cloud Connect for Marketing Cloud Engagement tutorial example, create a dynamic triggered send for new and closed cases using the same email content and triggered send definition.

One triggered send definition and one email can generate two different emails based on the case status.

1. In Marketing Cloud, navigate to **Email Studio**.
2. Under Subscribers, click **Data Extensions**.
3. Click **Create**.
4. Select **Standard Data Extension (Default)**.
5. Click **OK**.
6. Select **Create from Template**.
7. Select **TriggeredSendDataExtension**.
8. Click **OK**.
9. Rename the new data extension. For example, Case Closed Send Email.
10. Click **Next**.
11. Select **Data Retention Policies** or accept the default as **Off**.
12. Click **Next**.
13. Add two new text fields named *sObject* and *RecordId* with Nullable selected for each.
14. Set Data Type as **Text**.
15. Set Length as **50**.

16. Set Nullable as **Selected**.
17. Under Send Relationship, select **Subscriberkey relates to Subscribers on Subscriber Key**.
18. Click **Create**.

Create a Personalized Email with Standard Object Data

For this Marketing Cloud Connect for Marketing Cloud Engagement tutorial example, create a personalized email from a case with standard object data using AMPscript.

1. In Engagement, go to Email Studio.
2. Click **Content**.
3. Click **Create**.
4. Click **HTML Paste**.
5. Enter a name and a subject.
6. In the email content area, insert this AMPscript.

```
%%[
Set @mySObject = SObject
Set @myRecordId = RecordId
set @Case = RetrieveSalesforceObjects(SObject,"Subject,Status","Id", "=", RecordId)
Set @CaseRow = Row(@Case, 1)
Set @Subject = FIELD(@CaseRow, "Subject")
Set @Status = FIELD(@CaseRow, "Status")
]%%
<br>
<br>
SObject From API Call: %%=v(@mySObject)=%%
<br>
RecordId From API Call: %%=v(@myRecordId)=%%
<br>
Subject From RetrieveSalesforceObjects: %%=v(@Subject)=%%
<br>
Status From RetrieveSalesforceObjects: %%=v(@Status)=%%
<br>
```

7. Save the email.
8. Modify the AMPscript example to include extra customizations. To add more fields from the case, follow this format. For example, include the Description field.

```
set @Case = RetrieveSalesforceObjects(SObject,"Subject,Status,Description","Id", "=", RecordId)
```

9. To set the Description variable, add another line of code. For example, under line 6 add this code.

```
Set @Description = FIELD(@CaseRow, "Description").
```

Add this code within the closing tag `</%%>`.

- To print the Description field in an email, add another line of code under the last line.

```
Status From RetrieveSalesforceObjects: %%=v(@Description)=%% <br>
```

New AMPscript looks like this example.

```
%%[
Set @mySObject = SObject
Set @myRecordId = RecordId
set @Case = RetrieveSalesforceObjects(SObject,"Subject,Status","Id", "=", RecordId)
Set @CaseRow = Row(@Case, 1)
Set @Subject = FIELD(@CaseRow, "Subject")
Set @Status = FIELD(@CaseRow, "Status")
Set @Description = FIELD(@CaseRow, "Description")
]%%
<br>
<br>
SObject From API Call: %%=v(@mySObject)=%%
<br>
RecordId From API Call: %%=v(@myRecordId)=%%
<br>
Subject From RetrieveSalesforceObjects: %%=v(@Subject)=%%
<br>
Status From RetrieveSalesforceObjects: %%=v(@Status)=%%
<br>
Description From RetrieveSalesforceObjects: %%=v(@Description)=%%
<br>
```



Tip Validate a newly created email containing AMPscript against the newly created data extension. Triggered sends don't activate if the email content doesn't pass validation.

See Also

[Introduction to Programmatic Marketing Content](#)

Create a Personalized Email with Custom Object Data

For this Marketing Cloud Connect for Marketing Cloud Engagement tutorial example, create a personalized email from a case with custom object data using AMPscript.

Assume that you have a custom object called *Application* with a lookup to the Contact object. The Application custom object has two fields: *University_Name__c* and *Course_Name__c*.

- In Engagement, go to Email Studio.

2. Click **Content**.
3. Click **Create**.
4. Select **HTML Paste**.
5. Enter an email name and subject line.
6. In the email content area, insert this AMPscript.

```
%%[

    Set @mySObject = SObjectSet

        @myRecordId = RecordIdset

        @Application = RetrieveSalesforceObjects(@mySObject,"University_Nam
e__c,Course_Name__c","Id", "=", @myRecordId)

    Set @ApplicationRow = Row(@Application, 1)

    Set @University_Name = FIELD(@ApplicationRow, "University_Name__c")

    Set @Course_Name = FIELD(@ApplicationRow, "Course_Name__c")

]%%<br>

<br>SObject From API Call: %%=v(@mySObject)=%%

<br>RecordId From API Call: %%=v(@myRecordId)=%%

<br>University Name From RetrieveSalesforceObjects: %%=v(@University_Nam
e)=%%

<br>Course Name From RetrieveSalesforceObjects: %%=v(@Course_Name)=%% <br>
```

When referencing custom object fields, include the Sales Cloud field name and the underscore _. For example, *University_Name__c*.

7. Save the email.

Create a Personalized Triggered Send

For this Marketing Cloud Connect for Marketing Cloud Engagement tutorial example, create a triggered send with personalization from a case and a custom object.

1. From Sales or Service Cloud, go to the Marketing Cloud tab.
2. Click **Triggered Sends**.
3. Click **New**.
4. Enter a name.
5. Select **Case** for the Object.
6. Select **Contact** for the Recipient Lookup.
7. Select the newly created triggered send data extension.

8. To create a triggered send that is sent when a new Case is opened or closed, set your Field Criteria to: **Status equals Closed OR Status equals New**
9. Enter **1 OR 2** for Filter Criteria filter logging.

Triggered Send

[A/B Tests](#) | [Email Send](#) | [Triggered Sends](#) | [Configure Marketing Cloud Cor](#)


10. Include an if/else statement in your email content.

```
%%[Set @mySObject = SObjectSet @myRecordId = RecordIdset @Case = RetrieveSales
forceObjects(SObject,"Subject,Status,Priority,CaseNumber","Id", "=", RecordI
d)Set @CaseRow = Row(@Case, 1)Set @Subject = FIELD(@CaseRow,"Subject")Set @Sta
tus = FIELD(@CaseRow,"Status")Set @Priority = FIELD(@CaseRow,"Priority")Set @C
aseNumber = FIELD(@CaseRow,"CaseNumber")]%%<br><br>%%[ if @Status == "New" the
```

```
n ]%%A new case has been created.%%[ else ]%%Your case has been updated.%%[ en  
dif]%%<br>Case #:%%=v(@CaseNumber)=%% <br>Case Subject:%%=v(@Subject)=%% <br>C  
ase Status:%%=v(@Status)=%%<br><br>
```

This code creates a dynamic triggered send that is sent for both new and closed cases, generated from one triggered send definition and one email.

This example email displays a new case created with the status of New.

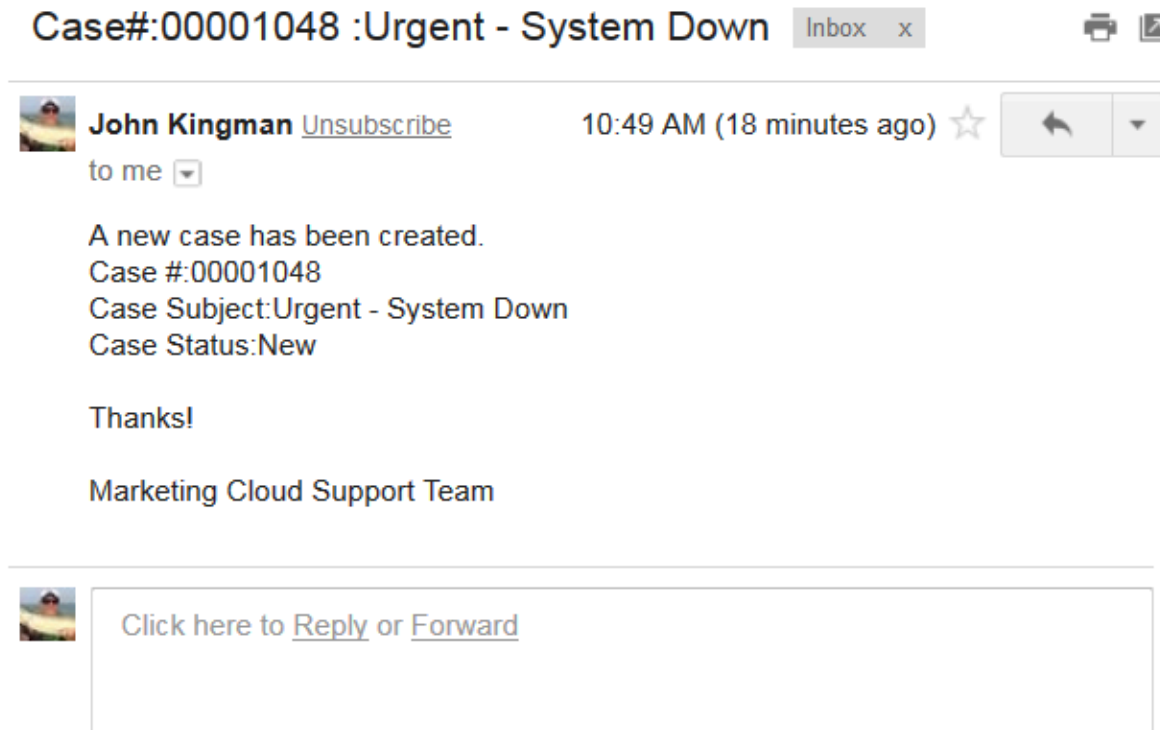

This example email displays an existing case updated to the status of Closed.

Case#:00001048 :Urgent - System Down

Inbox x

**John Kingman**

10:52 AM (0 minutes ago)

to me ▾

Your case has been updated.

Case #:00001048

Case Subject:Urgent - System Down

Case Status:Closed

Thanks!

Marketing Cloud Support Team

[Click here to Reply or Forward](#)

Link-Based Campaign from Custom Report

This Marketing Cloud Connect for Marketing Cloud Engagement tutorial shows how to create a custom report in Sales or Service Cloud. Use the report to identify contacts who clicked a link in an Engagement email send.

In this example, Northern Trail Outfitters (NTO) manages contacts in Sales Cloud and creates and sends emails in Engagement. An NTO marketer sends an email with three links for spring, fall, and winter apparel. The marketer creates a report to identify contacts who have clicked the fall apparel link to use as a list for sending a follow-up email.

Create Custom Report Type

1. In Sales or Service Cloud, click **Setup**.
2. Click **Create**.
3. Click **Report Types**.
4. Click **New Custom Report Type**.
5. Select **Contacts** for Primary Object.
6. Enter **Contacts with Links Clicked** for Report Type Label.
7. Enter a description.
8. To store the report type, select **Accounts & Contacts** category.
9. Select **Deployed** for Deployment Status.
10. Click **Next**.
11. Select **Click to relate another object**.
12. Select **Individual Email Results** for Object.
13. Select **Each "A" record must have at least one related "B" record**.

14. Select **Click to relate another object**.
15. Select **Individual Link Level Details** for Object.
16. Select **"B" records may or may not have related "C" records**.
17. Save the new report type.

New Custom Report Type

Contacts with Links Clicked

Step 2. Define Report Records Set

This report type will generate reports about Contacts. You may define which related records from other objects are returned in report results by choosing a relationship to another object.

A Contacts
Primary Object

B Individual Email Results

A to B Relationship:

☒ Each "A" record must have at least one related "B" record.

☐ "A" records may or may not have related "B" records.

C Individual Link Level Details

B to C Relationship:

☐ Each "B" record must have at least one related "C" record.

☒ "B" records may or may not have related "C" records.

The selected object has no further relatable objects. [More Info](#)

Create Report

1. In Sales or Service Cloud, navigate to **Reports**.
2. Click **New Report**.
3. To select the newly created report type, enter **Contacts with Links Clicked**.
4. Click **Create**.
5. Select which contacts to **Show**.
6. Select **Created Date** for Date Field.
7. Specify a date range.
8. Add a filter as **Link Name contains Fall**.
9. Drag the **Contact ID** and **Date Opened** fields into the report table.
10. Save the new report.

 **Tip** Reporting across multiple emails can result in duplicate contacts. To prevent duplicates, select Dedupe Subscribers on the email send screen, or filter the report results by email address and manually eliminate duplicates.

Drip Campaign

This Marketing Cloud Connect tutorial shows how to use email send definitions and programs in Marketing Cloud Engagement to automate and schedule sends to Sales or Service Cloud reports and campaigns.

Use this tutorial to create a drip campaign, a series of automated messages, to communicate with subscribers over an extended time. Use the messages to encourage subscriber participation in further actions or sales.

In this example, Northern Trail Outfitters (NTO), an outdoor gear store, manages customer relationships in Sales Cloud and sends emails in Engagement. NTO offers a 30-day free trial program and sends three emails about the program each day:

- A welcome email message to contacts who signed up for the program
- A follow-up email to contacts who signed up for the program 14 days ago.
- A follow-up email with a reminder about the trial expiration to contacts who signed up for the program 27 days ago.

NTO sends the emails automatically from Engagement, using Sales Cloud reports that filter contacts by corresponding dates.

1. [Tutorial Prerequisites](#)

Complete these prerequisites before starting the Marketing Cloud Connect for Marketing Cloud Engagement Drip Campaign tutorial.

2. [Create a Report](#)

Create reports to use in this Marketing Cloud Connect for Marketing Cloud Engagement tutorial for drip campaigns.

3. [Create Salesforce Email Send Interactions](#)

Create Salesforce email send interactions to use in this Marketing Cloud Connect for Marketing Cloud Engagement tutorial for drip campaigns.

4. [Create an Automation](#)

Create an automation to use in this Marketing Cloud Connect for Marketing Cloud Engagement tutorial for drip campaigns.

Tutorial Prerequisites

Complete these prerequisites before starting the Marketing Cloud Connect for Marketing Cloud Engagement Drip Campaign tutorial.

Complete these items before starting the Drip Campaign tutorial:

- Install and set up Marketing Cloud Connect.
- Ensure that Automation Studio is included in Engagement.
- Create three test emails in Engagement for Day 1, Day 14, and Day 27 messages.
- Create a test contact with a Simulation Date of today, a test contact with a Simulation Date of 14 days ago, and a test contact with a Simulation Date of 27 days ago.



Note In this example, Contact includes a custom date field called *Simulation Date* that uses a relative date value. You can use another date field, such as *Create Date*, for this tutorial.

Create a Report

Create reports to use in this Marketing Cloud Connect for Marketing Cloud Engagement tutorial for drip campaigns.

1. In Sales or Service Cloud, go to Reports.
2. Click **New Report**.
3. Select **Contacts & Accounts** for Report Type.
4. Click **Create**.
5. Select **My Contacts** for Show.

If Marketing Cloud Connect is configured as non-scope-by-user, select **All Contacts**.

6. Select **All Time** for Created Date Range.
7. Add a filter for **Simulation Date equals today**.
8. Save the report as *Day 1 Test*.
9. Repeat steps 1 through 7 with the filter set as **Simulation Date equals 14 days ago**.
10. Save the report as *Day 14 Test*.
11. Repeat steps 1 through 7 with the filter set as **Simulation Date equals 27 days ago**.
12. Save the report as *Day 27 Test*.

Create Salesforce Email Send Interactions

Create Salesforce email send interactions to use in this Marketing Cloud Connect for Marketing Cloud Engagement tutorial for drip campaigns.

The Salesforce email send interaction, or send definition, includes Sales or Service Cloud reports and objects as options for sending. It sends tracking data from Engagement to Sales or Service Cloud. A Salesforce send definition is an activity option in Automation Studio and can be added to an automation.

1. In Engagement, go to Email Studio.
2. Click **Interactions**.
3. Click **Salesforce Sends**.
4. Click **Create**.
5. Enter *Day 1 Test* as the name.
6. Select the **Day 1 Test** email.
7. Click **Edit Recipients**.
8. Add **Salesforce reports** to Targeted.
9. Search for **Simulation Date equals today** report and select.
10. Click **OK** and save.
11. Repeat steps 1 through 8 to create a Salesforce Email Send Interaction for Day 14.
12. Select **Simulation Date equals 14 days ago** report.
13. Click **OK** and save.
14. Repeat steps 1 through 8 to create a Salesforce Email Send Interaction for Day 27.
15. Select **Simulation Date equals 27 days ago** report.

16. Click **OK** and save.

Create an Automation

Create an automation to use in this Marketing Cloud Connect for Marketing Cloud Engagement tutorial for drip campaigns.

1. In Engagement, go to Automation Studio.
2. Click **New Automation**.
3. Select **Schedule**.
4. Click **Ok**.
5. Name the Automation.
6. Drag **Salesforce Email Send** activity onto the canvas.
7. Click **Choose**.
8. Select **Day 1 Test**.
9. Click **Done**.
10. Drag **Salesforce Email Send** activity onto the canvas.
11. Click **Choose**.
12. Select **Day 14 Test**.
13. Click **Done**.
14. Drag **Salesforce Email Send** activity onto the canvas.
15. Click **Choose**.
16. Select **Day 27 Test**.
17. Click **Done**.
18. Click **Schedule**.
19. Select a start date and time.
20. Select a frequency for repeating the Automation activity.
21. Click **Save**.
22. Confirm the settings and **Continue**.

To include more emails in the campaign, create a report with the contacts to target. Create the email and Salesforce Email Send Interaction. Pause the automation and edit it with the new activity. Then restart the automation.

The drip campaign is now configured to send.