

Vaibhav Gupta(vgupta1@presidio.com) Github Link

Swagger

The image displays two screenshots of the Swagger UI for a Library Management API, running on localhost. The top screenshot shows the main API overview with the title 'librarymanagement I v1' and version '1.0.0 OAS 3.1'. The 'Servers' section is set to 'http://localhost:5004/'. The API is categorized into 'Books' and 'Members'.

Books Endpoints:

- GET /api/Books
- POST /api/Books
- GET /api/Books/{id}
- GET /api/Books/search/{searchText}

Members Endpoints:

- GET /api/Members
- POST /api/Members

The bottom screenshot shows the 'Schemas' section, detailing the data models for 'Book' and 'Member'.

Book Schema:

```
Book ^ Collapse all object
  bookId integer | string int32 matches ~(?:0|[1-9]\d*)$
  title string
  author string
  isbn string
  publicationYear integer | string int32 matches ~(?:0|[1-9]\d*)$
  availableCopies integer | string int32 matches ~(?:0|[1-9]\d*)$
```

Member Schema:

```
Member ^ Collapse all object
  memberId integer | string int32 matches ~(?:0|[1-9]\d*)$
  name string
  email string
  phoneNumber string
  membershipJoinedDate string date-time
```

DATABASE

The screenshot shows the pgAdmin 4 interface. The left sidebar displays the 'Object Explorer' with the 'public' schema expanded, showing tables 'Books', 'Members', and '___EFMigrationsHistory'. The main pane shows a query window with the following SQL:

```
1 SELECT * FROM public."Books"
2 ORDER BY "BookId" ASC
```

The 'Data Output' tab shows the results of the query, displaying 4 rows. The status bar indicates 'Total rows: 4' and 'Query complete 00:00:00.163'.

BookId [PK] integer	Title text	Author text	ISBN text	PublicationYear integer	AvailableCopies integer
1	intro to C#	kailash	s345678okjbvc	2022	2
2	Clean Code	Sakshi	9780132350884	2008	5
3	Physics	HC Ver...	9780132350dj...	2009	4
4	Introduction to C...	Verma	132350djH4	2011	8

The screenshot shows the pgAdmin 4 interface. The left sidebar displays the 'Object Explorer' with the 'public' schema expanded, showing tables 'Books', 'Members', and '___EFMigrationsHistory'. The main pane shows a query window with the following SQL:



```
1 SELECT * FROM public."Members"
2 ORDER BY "MemberId" ASC
```

The 'Data Output' tab shows the results of the query, displaying 2 rows. The status bar indicates 'Total rows: 2' and 'Query complete 00:00:00.119'.

MemberId [PK] integer	Name text	Email text	PhoneNumber text	MembershipJoinedDate timestamp with time zone
1	vaibh...	vaibhav@vaibh...	1234567890	2026-05-20 17:19:20.404+05:...
2	sk	sk@sk	4567890123	2026-05-20 21:11:04.737+05:...

API ENDPOINTS

1. Add Book

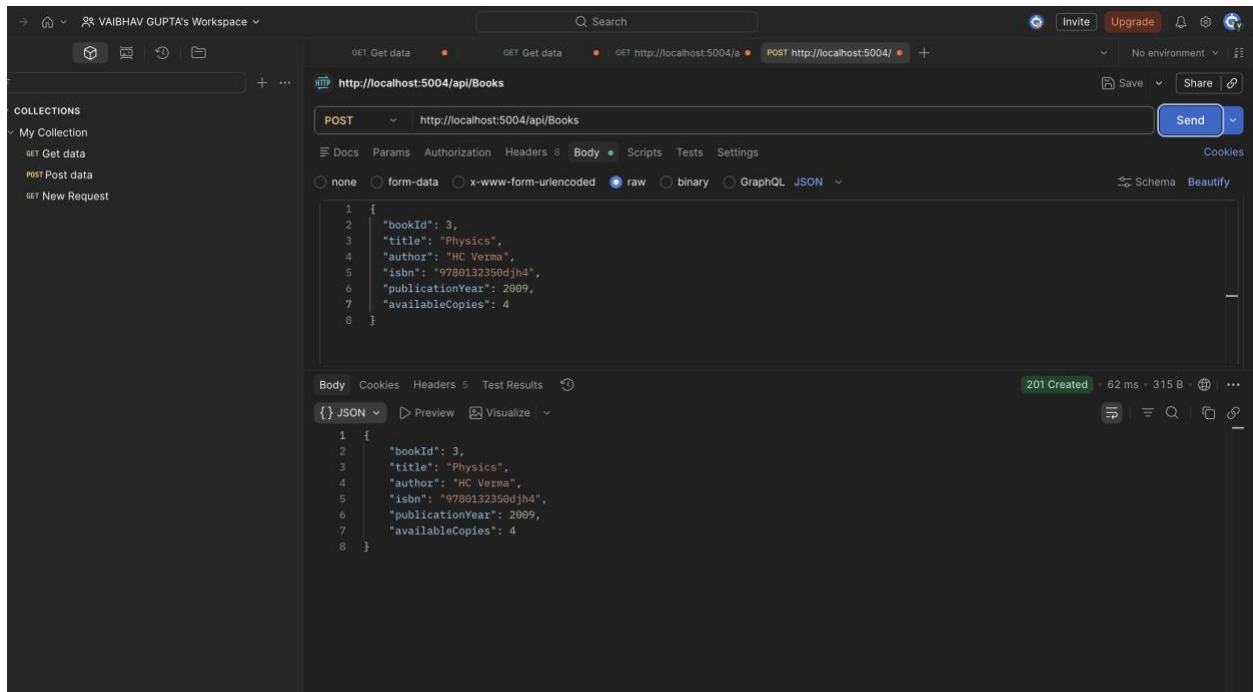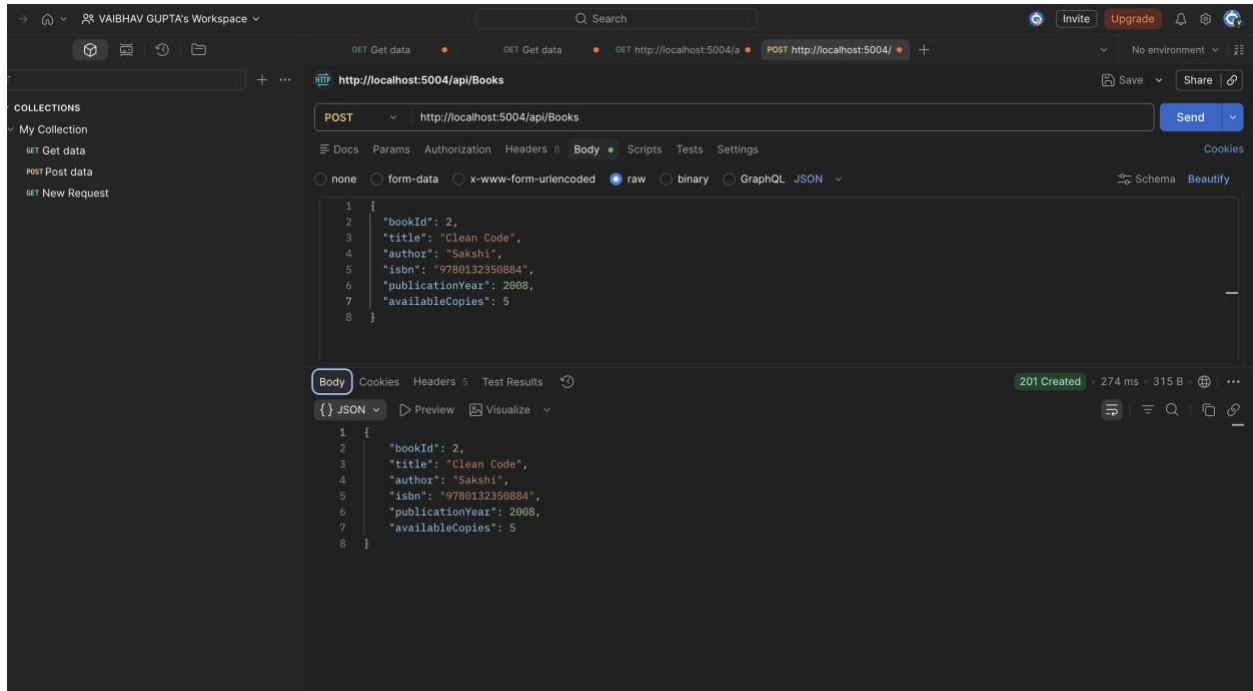

2. Get all books

GET Get data

GET http://localhost:5004/api/Books

Send

Headers 6 hidden

Key	Value	Description	Bulk Edit	Presets	...
Key	Value	Description			

Body Cookies Headers 4 Test Results 1/1

200 OK · 65 ms · 505 B

Save Response

```
{
  "books": [
    {
      "bookId": 1,
      "title": "Intro to C#",
      "author": "Kailash",
      "isbn": "s345678okjbvc",
      "publicationYear": 2022,
      "availableCopies": 2
    },
    {
      "bookId": 2,
      "title": "Clean Code",
      "author": "Sakshi",
      "isbn": "9780132350884",
      "publicationYear": 2008,
      "availableCopies": 5
    },
    {
      "bookId": 3,
      "title": "Physics",
      "author": "HC Verma",
      "isbn": "9780132350884",
      "publicationYear": 2009,
      "availableCopies": 4
    }
  ]
}
```

3. Find Book by Id

GET Get data

GET http://localhost:5004/api/Books/2

Send

Params

Query Params

Key	Value	Description	Bulk Edit	...
Key	Value	Description		

Body Cookies Headers 4 Test Results 1/1

200 OK · 124 ms · 265 B

Save Response

```
{
  "bookId": 2,
  "title": "Clean Code",
  "author": "Sakshi",
  "isbn": "9780132350884",
  "publicationYear": 2008,
  "availableCopies": 5
}
```

4. Search Book

The image displays two screenshots of a REST client interface, likely Postman, showing the results of a GET request to a book search API.

Top Screenshot: The request is `GET http://localhost:5004/api/Books/search/intr`. The response is a 200 OK status with a response time of 794 ms and a body size of 392 B. The JSON response is as follows:

```
[
  {
    "bookId": 1,
    "title": "intro to C#",
    "author": "kailash",
    "isbn": "s345678okjbvc",
    "publicationYear": 2022,
    "availableCopies": 2
  },
  {
    "bookId": 4,
    "title": "Introduction to C++",
    "author": "Verma",
    "isbn": "132350djhd",
    "publicationYear": 2011,
    "availableCopies": 8
  }
]
```

Bottom Screenshot: The request is `GET http://localhost:5004/api/Books/search/sh`. The response is a 200 OK status with a response time of 69 ms and a body size of 387 B. The JSON response is as follows:

```
[
  {
    "bookId": 1,
    "title": "intro to C#",
    "author": "kailash",
    "isbn": "s345678okjbvc",
    "publicationYear": 2022,
    "availableCopies": 2
  },
  {
    "bookId": 2,
    "title": "Clean Code",
    "author": "Sakshi",
    "isbn": "9780132350884",
    "publicationYear": 2008,
    "availableCopies": 5
  }
]
```

5. Add Member

The screenshot shows the Postman interface with a POST request to `http://localhost:5004/api/Members`. The request body is a JSON object with the following fields:

```
1 {
2   "memberId": 2,
3   "name": "sk",
4   "email": "sk@sk",
5   "phoneNumber": "4567890123",
6   "membershipJoinedDate": "2026-05-20T15:41:04.737Z"
7 }
```

The response is a 201 Created status with a response time of 160 ms and a body size of 319 B. The response body is a JSON object identical to the request body.

Body Cookies Headers 5 Test Results

201 Created · 160 ms · 319 B

JSON Preview Visualize

```
1 {
2   "memberId": 2,
3   "name": "sk",
4   "email": "sk@sk",
5   "phoneNumber": "4567890123",
6   "membershipJoinedDate": "2026-05-20T15:41:04.737Z"
7 }
```

6. Get All Members

The screenshot shows the Postman interface with a GET request to `http://localhost:5004/api/Members`. The response is a 200 OK status with a response time of 39 ms and a body size of 404 B. The response body is a JSON array containing two member objects.

Body Cookies Headers 4 Test Results

200 OK · 39 ms · 404 B

JSON Preview Visualize

```
1 [
2   {
3     "memberId": 1,
4     "name": "vaibhav",
5     "email": "vaibhav@vaibhav",
6     "phoneNumber": "1234567890",
7     "membershipJoinedDate": "2026-05-20T11:49:20.484Z"
8   },
9   {
10    "memberId": 2,
11    "name": "sk",
12    "email": "sk@sk",
13    "phoneNumber": "4567890123",
14    "membershipJoinedDate": "2026-05-20T15:41:04.737Z"
15  }
16 ]
```

7. Get Member by Id

The screenshot shows the Postman interface with a GET request to `http://localhost:5004/api/Members/2` successfully executed. The response is a JSON object representing a member.

Request:

- Method: GET
- URL: `http://localhost:5004/api/Members/2`

Response:

Status: 200 OK, 67 ms, 267 B

```
{
  "memberId": 2,
  "name": "sk",
  "email": "sk@sk",
  "phoneNumber": "4567890123",
  "membershipJoinedDate": "2026-05-20T15:41:04.737Z"
}
```