

PAPER

2D interpolation and extrapolation of discrete magnetic measurements with toroidal harmonics for equilibrium reconstruction in a tokamak

To cite this article: Blaise Faugeras *et al* 2014 *Plasma Phys. Control. Fusion* **56** 114010

View the [article online](#) for updates and enhancements.

You may also like

- [The JOEREK non-linear extended MHD code and applications to large-scale instabilities and their control in magnetically confined fusion plasmas](#)
M. Hoelzl, G.T.A. Huijsmans, S.J.P. Pamela et al.
- [MHD instabilities in 3D tokamaks](#)
E. Strumberger, S. Günter and C. Tichmann
- [Progress in pedestal and edge physics: Chapter 3 of the special issue: on the path to tokamak burning plasma operation](#)
M.E. Fenstermacher, L.R. Baylor, E. de la Luna et al.

2D interpolation and extrapolation of discrete magnetic measurements with toroidal harmonics for equilibrium reconstruction in a tokamak

Blaise Faugeras¹, Jacques Blum¹, Cedric Boulbe¹, Philippe Moreau²
and Eric Nardon²

¹ Laboratoire J.A. Dieudonné, UMR 7351, Université Nice Sophia-Antipolis, Parc Valrose, 06108 Nice Cedex 02, France

² CEA, IRFM, F-13108, Saint-Paul-lez-Durance, France

E-mail: Blaise.Faugeras@unice.fr

Received 11 September 2013, revised 15 November 2013

Accepted for publication 21 November 2013

Published 17 October 2014

Abstract

We present a method based on the use of toroidal harmonics and on a modelization of the poloidal field coils and divertor coils for the 2D interpolation and extrapolation of discrete magnetic measurements in a tokamak. The method is generic and can be used to provide the Cauchy boundary conditions needed as input by a fixed domain equilibrium reconstruction code like Equinox (Blum *et al* 2012 *J. Comput. Phys.* **231** 960–80). It can also be used to extrapolate the magnetic measurements in order to compute the plasma boundary itself. The proposed method and algorithm are detailed in this paper and results from numerous numerical experiments are presented. The method is foreseen to be used in the real-time plasma control loop on the WEST tokamak (Bucalossi *et al* 2011 *Fusion Eng. Des.* **86** 684–8).

Keywords: tokamak, plasma equilibrium, plasma boundary, toroidal harmonics, magnetic measurements, inverse problem

(Some figures may appear in colour only in the online journal)

1. Introduction

Equilibrium reconstruction codes are fundamental for the analysis and the control of fusion experiments in a tokamak [3]. The state variable of interest in the modelization of such an equilibrium under the usual axisymmetric assumption is the poloidal flux $\psi(r, z)$, which is related to the poloidal magnetic field by the relation $B = (1/r)(-\partial_z \psi, \partial_r \psi)$ in the cylindrical coordinate system (r, ϕ, z) . The basic inputs used to achieve the numerical reconstruction of the equilibrium are magnetic measurements taken at several locations surrounding the vacuum vessel.

Basically equilibrium codes can be of two types. The first one is the full domain type in which the reconstruction is performed in the whole right-half plane ($r > 0$) and relies on the use of Green's functions. A drawback of this method is that nonlinear ferromagnetic structures, which can be present

in certain tokamaks, are complicated to deal with. An iron model has to be introduced [4] and these codes can hardly run in real time. The second type of code is the bounded domain one in which computations are performed in a fixed domain containing the plasma but restricted to a limited region. A difficulty is that Cauchy boundary conditions ($g = \psi$, $h = \partial_n \psi$) have to be provided on a fixed closed contour defining the boundary of the computation domain (this contour, called Γ in the remaining part of this paper, can link some of the B probes, for example). These boundary conditions have to be computed from the discrete magnetic measurements. If these measurements are numerous enough and regularly located on a smooth contour, a direct linear interpolation can be considered [5, 6]. However, this method is not robust in case of defective sensors. Moreover, it cannot be used in today's machines like JET, in which the measurement points

are scattered in some annular region surrounding the vacuum vessel. Another approach that can be considered is to use the plasma boundary identification code of a particular machine if it exists. Such a code will, in fact, compute the poloidal flux ψ in the vacuum surrounding the plasma and can be used to evaluate ψ and its normal derivative on any given fixed closed contour Γ . This is the approach followed until now for the equilibrium reconstruction code Equinox [1]. The computations rely on the boundary conditions g and h provided by the plasma boundary reconstruction codes Xloc at JET [7, 8] and the Apolo code at Tore Supra [9]. The main drawback of this approach is that these two boundary reconstruction codes are extremely machine dependent and are not transportable to a generic platform such as the ITM [10]. Moreover, concerning the particular case of Tore Supra, a new numerical method has to be developed since the machine is going to be upgraded to WEST [2].

The aim of this paper is to investigate the possibility of using toroidal harmonics to perform the 2D interpolation and extrapolation of magnetic measurements in an annular domain surrounding the plasma to compute Cauchy boundary conditions on a given fixed closed contour Γ in order to be able to run in a second step an equilibrium reconstruction code such as Equinox in the bounded domain limited by Γ . In fact, at a given instant in time, the fictitious inner boundary of the annular domain could be defined as being the plasma boundary itself, and the data interpolation problem is very closely connected to the ill-posed inverse problem of the identification of the plasma boundary. The latter is a Cauchy problem for the elliptic equation $\Delta^*\psi = 0$, and various solution methods have been proposed to solve it, to compute ψ in the vacuum surrounding the plasma and to identify the plasma boundary (see [11] for a review). The ill-posed nature of the problem usually imposes the use of a regularization technique and an *a priori* representation of plasma current density and the flux it generates, called the internal solution, for example using filaments of current or a fictitious current sheet, or also a decomposition in toroidal harmonics. The latter seems particularly attractive since these functions provide explicit solutions to the equation $\Delta^*\psi = 0$. Toroidal harmonics [12, 13] were used in a number of papers in the plasma physics literature in the 1980s and 1990s [14–20] and more recently in [21].

Apart from [16, 21], authors using toroidal harmonics do not use any regularization procedure. Our point of view is that the small number of harmonics needed to represent the flux in the vacuum is in itself a regularizing procedure. Our numerical experiments confirm this point. In fact the number of toroidal harmonics used to represent the internal solution in some way can be seen as the regularization parameter. A too small number might lead to a smooth solution that possibly does not fit the data very well and does not give a very accurate plasma boundary, whereas a too large number might lead to an irregular solution that fits the data well but gives an irregular plasma boundary.

Another ingredient of the method to which the solution is quite sensitive is the location of the pole of the toroidal coordinates system. In fact, together with the number of

internal toroidal harmonics it is the only parameter of the internal solution that can be tuned, and curiously it is generally kept fixed in the literature apart from in [19], in which an optimization method is proposed to identify a proper location of the pole. In this paper we propose two simple methods to do so.

Finally, in order to represent the flux ψ in the vacuum, some authors use a pure decomposition in toroidal harmonics [14–16, 20] whereas others add a term coming from the modelization of the flux generated by the poloidal field coils [17, 19]. In this paper, we discuss this point together with the impact of the presence of nonlinear ferromagnetic material. Our numerical experiments show that it is important to take into account the divertor coils.

The paper is organized as follows. In the next section we introduce notations for a number of domains and contours that are needed. Section 3 deals with the decomposition of the flux in toroidal harmonics. In section 4, the proposed numerical algorithm is presented, and in the last section a number of numerical results are presented.

2. Mathematical setting

In order to get into the details of this work we first need to briefly recall the equilibrium reconstruction problem and introduce a number of contours and domains. **Therefore, a schematic representation of a poloidal cross-section of a tokamak is shown in figure 1 and is described below.**

The unknown plasma free boundary domain is noted Ω_p . The plasma boundary is the isoflux line whose value is defined either by the contact with the limiter or **as a magnetic separatrix (a hyperbolic line with an X-point represented by the dashed line inside the limiter contour in figure 1).** Poloidal field coils and divertor coils are denoted as Ω_{C_k} . **Poloidal field probes measure the local value of the poloidal magnetic field, and flux loops and saddle loops measure the local value of the flux ψ .** Flux and saddle loops, represented by triangles, and B probes, represented by cross-circles, are shown surrounding the limiter contour. All these measurement points can be included in a fictitious annular domain D , which neither contains the coils nor the plasma. **The inner boundary of D can, for example, be chosen to be the limiter contour.** The presence of divertor coils can impose the choice of a somehow tortured outer boundary (the dashed line labelled $\partial\Omega$). **The outer boundary of D also defines a domain Ω including D , Ω_p and the vacuum region lying between the plasma and D .** Eventually all these different domains will be included in the larger domain Ω_0 , outside of which nonlinear magnetic material like iron might be present. Its boundary is noted $\partial\Omega_0$.

Depending on the domain, the poloidal flux satisfies the partial differential equation

$$-\Delta^*\psi = 0 \quad \text{in } D \quad (1)$$

or

$$-\Delta^*\psi = j_p(\psi, r)\chi_{\Omega_p} \quad \text{in } \Omega \quad (2)$$

or

$$-\Delta^*\psi = j_p(\psi, r)\chi_{\Omega_p} + \sum_k j_{C_k}\chi_{\Omega_{C_k}} \quad \text{in } \Omega_0 \quad (3)$$

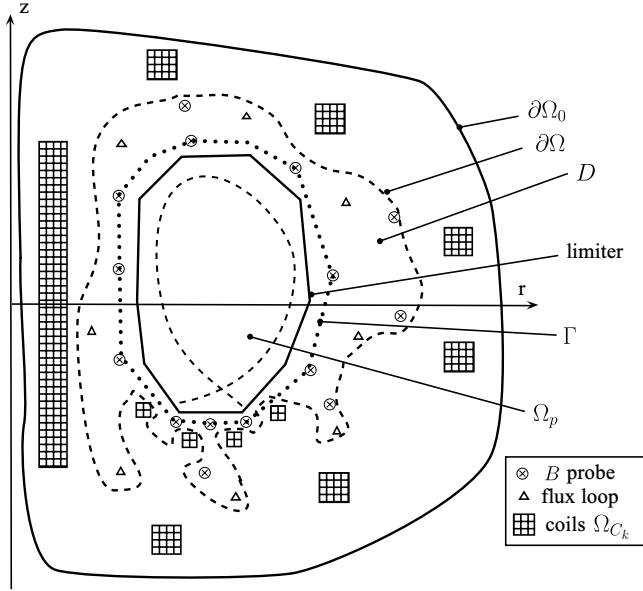


Figure 1. Schematic representation of a poloidal cross-section of a tokamak. See the text for details.

where the differential operator

$$\Delta^* = \frac{\partial}{\partial r} \left(\frac{1}{\mu_0 r} \frac{\partial}{\partial r} \right) + \frac{\partial}{\partial z} \left(\frac{1}{\mu_0 r} \frac{\partial}{\partial z} \right),$$

is linear, the right-hand side represents the toroidal component of the local current density and χ is the indicator function. If iron is present outside Ω_0 (like for JET and Tore Supra), μ_0 is no longer a constant but a function of $|B|$ and the operator Δ^* becomes nonlinear. This is why we restrict ourselves to Ω_0 where Δ^* is linear. In $\Omega_0 \setminus \{\Omega_p \cup \Omega_{C_k}\}$, the current is null. In the coils Ω_{C_k} , the densities j_{C_k} are measured and known. In the plasma Ω_p , the current density is unknown but according to the Grad–Shafranov equation takes the form

$$j_p(\psi, r) = r p'(\psi) + \frac{1}{\mu_0 r} (f f')(\psi) \quad (4)$$

in which p' and $f f'$ are unknown functions to be identified by an equilibrium reconstruction code.

As explained in the introduction, one of our goals is to compute Cauchy conditions ($g = \psi$, $h = \partial_n \psi$) on the contour Γ in order to provide inputs to the reconstruction code Equinox. Indeed, let us recall that this code solves the following problem:

find functions A and B defined on $[0, 1]$ which minimize the following regularized cost function

$$J(A, B) = \int_{\Gamma} (\partial_n \psi - h)^2 ds + \epsilon \left(\int_0^1 (A''(x))^2 + (B''(x))^2 dx \right)$$

where ψ satisfies

$$-\Delta^* \psi = \lambda \left(\frac{r}{r_0} A(\bar{\psi}) + \frac{r_0}{r} B(\bar{\psi}) \right) \chi_{\Omega_p(\psi)}, \quad \text{in } D_{\Gamma}$$

$$\psi = g \quad \text{on } \Gamma.$$

Here λ is a scaling factor, r_0 is a constant, A and B are related to p' and $f f'$, $\bar{\psi}$ is a normalized flux and D_{Γ} is the domain contained inside Γ . Equinox implements a finite element discretization method and identifies the full equilibrium (plasma boundary and current density) in the fixed domain D_{Γ} . This computation completely relies on the boundary conditions g and h deduced from the magnetic measurements.

3. Decomposition of the poloidal flux ψ in the annular domain D

In this section we recall the principle of the decomposition of the flux in toroidal harmonics in the region D . Moreover, we show that the nonlinearity induced by the presence of iron outside Ω_0 does not restrict the possibility of using a modelization of the flux generated by the different coils.

3.1. Toroidal harmonics

The toroidal coordinates system [13, 22] or bipolar coordinates system (if we ignore the angular toroidal variable) $(\zeta, \eta) \in \mathbb{R}_*^+ \times [0, 2\pi]$ about the pole $F_0 = (r_0, z_0)$ is related to the cylindrical coordinates system (r, z) by

$$r = \frac{r_0 \sinh \zeta}{\cosh \zeta - \cos \eta} \quad \text{and} \quad z - z_0 = \frac{r_0 \sin \eta}{\cosh \zeta - \cos \eta}.$$

In what follows, we assume that F_0 lies inside the region surrounded by the annular domain D and more precisely inside the plasma domain where the homogeneous equation, $-\Delta^* \psi = 0$, is not satisfied. In the domain D , this equation is satisfied. It is known that explicit solutions to this equation in an annular domain can be found in toroidal coordinates using a quasi separation of variables technique (see [23, 24] for details on the computations). Moreover the family of solutions found is complete [21, 24]. That is to say that, given any regular enough Dirichlet boundary condition u on ∂D , the solution to the boundary value problem

$$\begin{cases} -\Delta^* \psi = 0 & \text{in } D \\ \psi = u & \text{on } \partial D \end{cases} \quad (5)$$

can be uniquely decomposed as

$$\begin{cases} \psi = \psi_{\text{ext}} + \psi_{\text{int}} \\ \psi_{\text{ext}} = \frac{r_0 \sinh \zeta}{\sqrt{\cosh \zeta - \cos \eta}} \\ \quad \times \left[\sum_{n=0}^{\infty} a_n^e Q_{n-1/2}^1(\cosh \zeta) \cos(n\eta) \right. \\ \quad \left. + \sum_{n=1}^{\infty} b_n^e Q_{n-1/2}^1(\cosh \zeta) \sin(n\eta) \right] \\ \psi_{\text{int}} = \frac{r_0 \sinh \zeta}{\sqrt{\cosh \zeta - \cos \eta}} \\ \quad \times \left[\sum_{n=0}^{\infty} a_n^i P_{n-1/2}^1(\cosh \zeta) \cos(n\eta) \right. \\ \quad \left. + \sum_{n=1}^{\infty} b_n^i P_{n-1/2}^1(\cosh \zeta) \sin(n\eta) \right] \end{cases} \quad (6)$$

where $P_{n-1/2}^1$ and $Q_{n-1/2}^1$ are the associated Legendre functions of first and second kind, of degree one and half integer order [25], also called toroidal harmonics when evaluated at point $\cosh \zeta$. Functions $P_{n-1/2}^1$ have a singularity when $\zeta \rightarrow \infty$; that is to say at point F_0 and therefore ψ_{int} represents the flux generated by currents flowing inside D . On the contrary, functions $Q_{n-1/2}^1$ are singular when $\zeta \rightarrow 0$, that is to say on the axis $r = 0$, and therefore ψ_{ext} represents the flux generated by currents flowing outside D .

3.2. Including information from the knowledge of the currents in the coils

Let us denote by $x = (r, z)$ a point in the poloidal plane. For any scalar fields ψ and ϕ on Ω , two integrations by parts of the quantity $\phi \Delta^* \psi$ lead to the so called Green's second identity (or Green's theorem)

$$\int_{\Omega} (\phi \Delta^* \psi - \psi \Delta^* \phi) dx = \int_{\partial\Omega} \frac{1}{\mu_0 r} \left(\frac{\partial \phi}{\partial n} \psi - \frac{\partial \psi}{\partial n} \phi \right) ds. \quad (7)$$

Let $\bar{x} \in D$ and $G(x, \bar{x})$ be the free space Green's function which satisfies $-\Delta^* G(x, \bar{x}) = \delta(x - \bar{x})$ in the whole half plane $r > 0$ and $G(x, \bar{x}) \rightarrow 0$ when $|x| \rightarrow \infty$ or $r \rightarrow 0$.

The important point here is that even if the region external to Ω_0 contains nonlinear materials such as iron, the restriction of G to Ω can still be used as the function ϕ in equation (7). If ψ is chosen to be the solution to equation (2), one gets

$$\begin{aligned} \psi(\bar{x}) &= \int_{\Omega_p} j_p(\psi(x), r) G(x, \bar{x}) dx \\ &+ \int_{\partial\Omega} \frac{1}{\mu_0 r} \left(\frac{\partial G}{\partial n}(x, \bar{x}) \psi(x) - \frac{\partial \psi}{\partial n}(x) G(x, \bar{x}) \right) ds \end{aligned} \quad (8)$$

and this leads again to a decomposition of the type $\psi = \psi_{\text{int}} + \psi_{\text{ext}}$ with

$$\begin{cases} \psi_{\text{int}}(\bar{x}) = \int_{\Omega_p} j_p(\psi(x), r) G(x, \bar{x}) dx \\ \psi_{\text{ext}}(\bar{x}) = \int_{\partial\Omega} \frac{1}{\mu_0 r} \left(\frac{\partial G}{\partial n}(x, \bar{x}) \psi(x) - \frac{\partial \psi}{\partial n}(x) G(x, \bar{x}) \right) ds \end{cases} \quad (9)$$

ψ_{int} is another expression for the flux generated by currents running inside D and ψ_{ext} for those running outside. Moreover Green's theorem can also be applied in Ω_0 (the region including the plasma and the coils). One then gets the following expression for ψ in D : $\psi = \psi_{\text{int}} + \psi_{\text{ext}} + \psi_C$ with

$$\begin{cases} \psi_{\text{int}}(\bar{x}) = \int_{\Omega_p} j_p(\psi(x), r) G(x, \bar{x}) dx \\ \psi_{\text{ext}}(\bar{x}) = \int_{\partial\Omega_0} \frac{1}{\mu_0 r} \left(\frac{\partial G}{\partial n}(x, \bar{x}) \psi(x) - \frac{\partial \psi}{\partial n}(x) G(x, \bar{x}) \right) ds \\ \psi_C(\bar{x}) = \sum_k \int_{C_k} j_{C_k} G(x, \bar{x}) dx \end{cases} \quad (10)$$

where ψ_C represents the contribution of the coils to the total flux. In the annular domain D , $\tilde{\psi} = \psi - \psi_C = \psi_{\text{int}} + \psi_{\text{ext}}$

still satisfies

$$\begin{cases} -\Delta^* \tilde{\psi} = 0 & \text{in } D \\ \tilde{\psi} = \psi|_{\partial D} - \psi_C|_{\partial D} & \text{on } \partial D \end{cases} \quad (11)$$

and can thus be decomposed in toroidal harmonics.

This shows that the knowledge of the currents j_{C_k} in the coils can be used in the representation of the flux in the region D in the presence or absence of iron outside Ω_0 . In fact, if the coils are located very close to the measurement points such as the divertor coils, it is necessary to modelize them. Their contribution to the flux in D can theoretically be written as a series of toroidal harmonics, but many of them are needed in practice. This can be critical compared to the number of measurements, and the numerical resolution of the problem might become difficult.

4. Numerical method

Let us now present the numerical method which we implemented. At each discrete time step during a discharge, the magnetic measurements available are of three types:

- Flux loops provide N_f flux measurements at points x_i^f such that $\psi_i^{\text{meas}} \approx \psi(x_i^f)$;
- Saddle loops provide N_s flux variation measurements between two points such that $\delta_i \psi^{\text{meas}} \approx \psi(x_i^1) - \psi(x_i^2)$;
- B probes provide N_B measurements of the poloidal field at points x_i^B and directions d_i such that $B_i^{\text{meas}} \approx B(x_i^B) \cdot d_i$.

The first step of the algorithm consists in subtracting from the measurements a numerical approximation of the contribution from the coils.

$$\begin{cases} \tilde{\psi}_i^{\text{meas}} = \psi_i^{\text{meas}} - \hat{\psi}_C(x_i^f), & \text{for } i = 1, \dots, N_f \\ \delta_i \tilde{\psi}^{\text{meas}} = \delta_i \psi^{\text{meas}} - (\hat{\psi}_C(x_i^1) - \hat{\psi}_C(x_i^2)), & \text{for } i = 1, \dots, N_s \\ \tilde{B}_i^{\text{meas}} = B_i^{\text{meas}} - \hat{B}_C(x_i^B) \cdot d_i, & \text{for } i = 1, \dots, N_B \end{cases} \quad (12)$$

Here the contribution from each coil C_k is computed as follows. The known current density is given as $j_{C_k} = I_k / S_k$, where I_k is the total current in the coil and S_k its surface. The coil is divided into n_k subcoils $C_{k,l}$ of equal surface S_k / n_k and center $c_{k,l}$ on which the integrals are numerically evaluated as

$$\int_{C_{k,l}} \frac{I_k}{S_k} G(x, \bar{x}) dx \approx \frac{I_k}{n_k} G(c_{k,l}, \bar{x}). \quad (13)$$

This in fact consists of considering the contribution of the coils as a sum of the contributions from filaments of current

$$\hat{\psi}_C(\bar{x}) = \sum_k \sum_l \frac{I_k}{n_k} G(c_{k,l}, \bar{x}). \quad (14)$$

The second step consists of truncating the toroidal harmonics expansion of $\tilde{\psi}$ to approximate it by

$$\left\{ \begin{aligned} \hat{\psi} &= \hat{\psi}_{\text{ext}} + \hat{\psi}_{\text{int}}, \\ \hat{\psi}_{\text{ext}} &= \frac{r_0 \sinh \zeta}{\sqrt{\cosh \zeta - \cos \eta}} \\ &\times \left[\sum_{n=0}^{n_a^e} a_n^e Q_{n-1/2}^1(\cosh \zeta) \cos(n\eta) \right. \\ &\quad \left. + \sum_{n=1}^{n_b^e} b_n^e Q_{n-1/2}^1(\cosh \zeta) \sin(n\eta) \right] \\ \hat{\psi}_{\text{int}} &= \frac{r_0 \sinh \zeta}{\sqrt{\cosh \zeta - \cos \eta}} \\ &\times \left[\sum_{n=0}^{n_a^i} a_n^i P_{n-1/2}^1(\cosh \zeta) \cos(n\eta) \right. \\ &\quad \left. + \sum_{n=1}^{n_b^i} b_n^i P_{n-1/2}^1(\cosh \zeta) \sin(n\eta) \right] \end{aligned} \right. \quad (15)$$

and to evaluate each of the terms in the expansion of $\hat{\psi}$ and of the associated field $\hat{B}$ at the different measurement points in order to form a least squares cost function

$$J(u) = \sum_{i=1}^{N_f} \frac{(\hat{\psi}_i(u) - \tilde{\psi}_i^{\text{meas}})^2}{\sigma_f^2} + \sum_{i=1}^{N_s} \frac{(\delta_i \hat{\psi}(u) - \delta_i \tilde{\psi}^{\text{meas}})^2}{\sigma_s^2} + \sum_{i=1}^{N_B} \frac{(\hat{B}_i(u) - \tilde{B}_i^{\text{meas}})^2}{\sigma_B^2} \quad (16)$$

depending on

$$u = (a_0^e, \dots, a_{n_a^e}^e, b_1^e, \dots, b_{n_b^e}^e, a_0^i, \dots, a_{n_a^i}^i, b_1^i, \dots, b_{n_b^i}^i)$$

the unknown coefficients of the expansion in toroidal harmonics. The weights σ_f , σ_s and σ_B correspond to the assumed measurement errors. J is quadratic in u and is minimized by solving the associated normal equation to find the optimal set of coefficients u_{opt} .

In these computations the expressions for $\hat{\psi}_C$ and $\hat{B}_C$ are explicit [26]. The expression for $\hat{B}$ is also explicit. The numerical evaluation of half-integer order associated Legendre functions is not straightforward. We use the algorithm and the computer routine DTORH1 provided with [27]. This code enables an accurate and fast evaluation of the set $P_{n-1/2}^m(x)$, $Q_{n-1/2}^m(x)$ for real $x > 1$, integers $m \geq 0$ and $n = 0, \dots, N$.

Once u_{opt} is computed, an approximation of the flux can be obtained at any point of the vacuum surrounding the plasma by $\psi(x) = \hat{\psi}(x) + \hat{\psi}_C(x)$. In particular, one can evaluate ψ and its normal derivative on a fixed closed contour Γ in order to provide Cauchy boundary conditions to a fixed bounded domain equilibrium reconstruction code. Of course one can also identify the plasma boundary as the largest closed flux surface inside the limiter contour.

Such a procedure provides meaningful results if the pole F_0 lies inside the unknown plasma region and not too close to the boundary. The most natural choice is to put the pole at the location of the magnetic axis, but as the plasma boundary it is unknown, we propose the following procedure. At the first

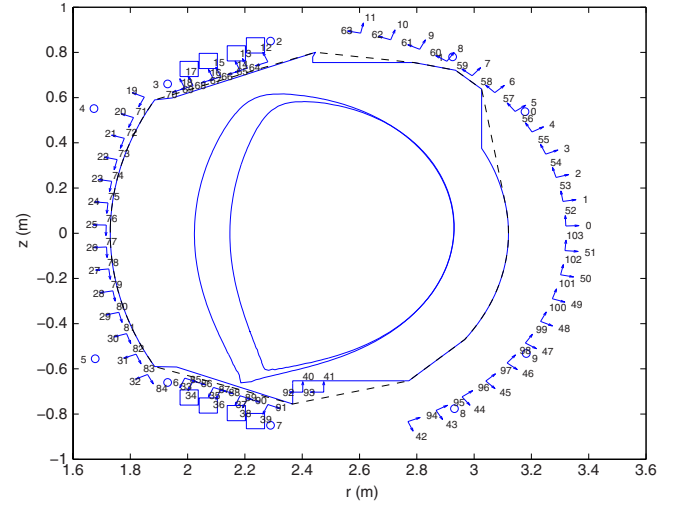


Figure 2. Poloidal section of the WEST tokamak. The two plasma boundaries correspond to case 1 (large plasma) and case 2 (smaller plasma). The B probes represented by arrows are numbered from 0 to 103 and the flux loops represented by small circles are numbered from 0 to 9. The four bottom divertor coils are shown as well as the top ones. The limiter contour is also plotted as well as its convex hull (dashed line), which will be used as the contour Γ , that is to say the boundary of the computation domain for the equilibrium reconstruction code Equinox.

time step, the pole is located at $(r_0, 0)$ where r_0 is the major radius of the tokamak. Then at time step t^{n+1} , the pole is located at the position of the magnetic axis computed at the previous time step t^n . This magnetic axis position is computed exactly if an equilibrium reconstruction code like Equinox is run at each time step. If this is not the case and one is only interested in the plasma boundary identification problem, or by an equilibrium reconstruction at a given instant in time, it can be approximated by the current center (r_c, z_c) defined as moments of the plasma current density [11, 28]. These quantities can be precisely computed as integrals on the contour Γ at every point of which the flux ψ and the field B can be evaluated:

$$\begin{aligned} I_p &:= \int_{D_r} j_p dx = \int_{\Gamma} \frac{1}{\mu_0} B_s ds, \\ z_c I_p &:= \int_{D_r} z j_p dx = \int_{\Gamma} \frac{1}{\mu_0} (-r \log r B_n + z B_s) ds, \\ r_c^2 I_p &:= \int_{D_r} r^2 j_p dx = \int_{\Gamma} \frac{1}{\mu_0} (2rz B_n + r^2 B_s) ds. \end{aligned}$$

5. Numerical results

5.1. Twin experiments for WEST

In view of the upgrade of the tokamak Tore Supra to WEST, we have conducted several numerical experiments to test the method. The code Cedres++ [29] is run to simulate four WEST equilibria. In the first case the X-point position is very close to the limiter whereas in the second one the plasma is smaller. Configurations 3 and 4 are limiter configurations. From these simulations the equivalent of magnetic measurements are extracted: 10 flux loops measurements and 104 Bprobes measurements (see figure 2). The reconstruction of the plasma

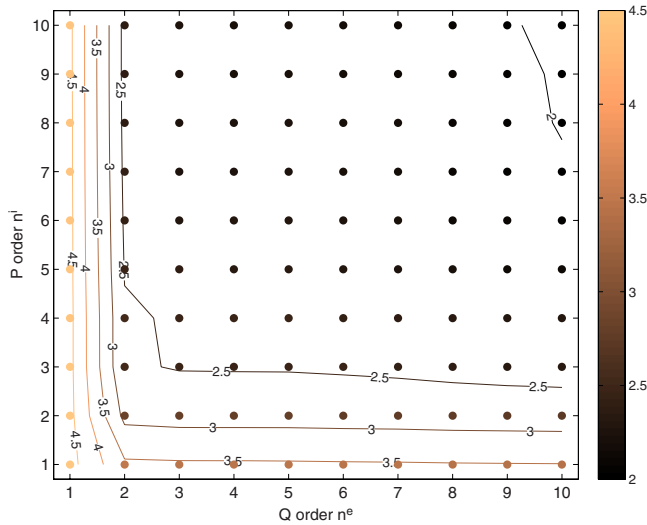


Figure 3. Contour and scatter plot of $\log(J(u_{\text{opt}}))$ as a function of the maximum order of the associated Legendre functions of first kind n^i and second kind n^e used for the representation of the flux.

boundary and the equilibrium can then be performed using these measurements as inputs, as well as the currents running in the coils. Using the notations of equation (16), we take $N_f = 10$, $\sigma_f = 10^{-3} \left(\frac{\text{Wb}}{2\pi}\right)$ and $N_B = 104$, $\sigma_B = 10^{-3}$ (T).

Let us first concentrate on the reconstruction of the flux in a vacuum for case 1 with the algorithm using toroidal harmonics (TH). Unless specified, we always take into account the values of the currents in the coils. Here we want to reconstruct a single equilibrium and thus do not have *a priori* at our disposal the knowledge of the magnetic axis position. As described in section 4, we proceed in two steps. First, we run TH setting the pole of the toroidal coordinate system to $P_0 = (r_0, 0)$, compute the current center $P_1 = (r_c, z_c)$ and re-run TH setting the pole to these new coordinates. This mimics the fact that during a whole pulse reconstruction the current center at the previous time step would play the role of P_0 , and if P_1 is too far from P_0 then the pole of the coordinate system is modified.

A first natural question which has to be answered is how many toroidal harmonics should be used to represent the flux ψ in the vacuum. In all the computations we choose the maximum order of the toroidal harmonics used in equation (15) to be $n^e := n_a^e = n_b^e$ and $n^i := n_a^i = n_b^i$. From figure 3 it appears that the value of the cost function at the optimal point, which is an indicator of the quality of the fit to the measurements, decreases very rapidly as we increase the maximum order from $n^e = n^i = 1$ to 4. Above this value, the benefit of adding new degrees of freedom is much less significant and the plot shows an almost flat region for orders greater than 4.

As a consequence we make the choice $n^e = n^i = 4$. This corresponds to the minimum number of degrees of freedom needed to obtain a good fit to the measurements. Numerical values for the optimal cost and corresponding root mean square (rms) errors are given for different choices of n^e and n^i in table 1. The corresponding computed plasma boundaries are also shown in figure 4. As already mentioned, adding interior functions (column (4, 9)) or exterior functions (column

Table 1. Minimization results for the default choice ($n^e = 4$, $n^i = 4$), as well as choices (4, 9), (9, 4) and (30, 4) without using any representation of the flux generated by the divertor and poloidal field coils (no c).

(n^e, n^i)	(4, 4)	(4, 9)	(9, 4)	(30, 4) no c
cost $J(u_{\text{opt}})$	2.783e + 02	1.666e + 02	2.004e + 02	3.352e + 02
rms B (T)	1.614e−03	1.233e−03	1.343e−03	1.624e−03
rms Flux $\left(\frac{\text{Wb}}{2\pi}\right)$	5.814e−04	6.663e−04	7.832e−04	1.657e−03

(9, 4)) does not significantly modify the rms. However, in the first case it deteriorates the plasma boundary reconstruction (figure 4). This is due to the fact that interior functions are involved with the ill-posed character of the inverse boundary reconstruction problem. The only regularization mechanism lies in the small number of toroidal harmonics used to represent the flux. The blow up of the interior harmonics accentuates with their order and the zone where the computed solution is not relevant spreads around the pole of the coordinate system, even reaching the plasma boundary in this case. This phenomenon disappears in the plasma boundaries computed by Equinox in all cases (see figure 5) which is due to the fact that the reconstruction of the boundary is not an ill-posed inverse problem in Equinox in which the equation for ψ is solved also in the plasma and the free boundary problem is a particular nonlinearity of the model.

The last column of table 1 shows the interest of using a modelization of the flux generated by the divertor and poloidal field coils. If we do not use this information in this particular case, a value of n^e of at least 30 has to be taken to achieve a fit to the measurements comparable to the one obtained with the choice (4, 4).

Figure 6 shows the fit to the measurements for the choice $n^e = n^i = 4$. It appears that the largest errors on the B probes measurements happen for those in the range 32–40 and 84–92, which correspond to the ones located close to the X-point. These numerical experiments therefore suggest that if some sensors could be added to the design of WEST, it would be desirable to put them, if possible, in the region of the divertor.

From table 2 it can be seen that the reconstruction of the X-point position is quite accurate (up to a few mm) with the default choice ($n^e = 4$, $n^i = 4$). More interestingly, it is also accurate with the choice (4, 9) where the plasma boundary shows some oscillations. This is still true for many other choices of (n^e, n^i) and is thus satisfying because it makes the determination of the X-point only very slightly dependant on the tuning of the TH algorithm. Table 2 also shows that the magnetic axis computed by Equinox is very close to the one given by Cedres, and that the computed pole for the toroidal coordinate system is also a good approximation of the magnetic axis position.

Finally, in order to get some insight into the impact of a noisy sensor on the reconstruction of the X-point position with the TH algorithm, we have conducted 104 + 10 numerical reconstructions, each time applying an offset on a different sensor. The results are displayed in figure 7. Adding an offset of 10 mT on a B-coil or of 200 mWb on a flux loop perturbs the X-point position by about a maximum of 1 mm. Again,

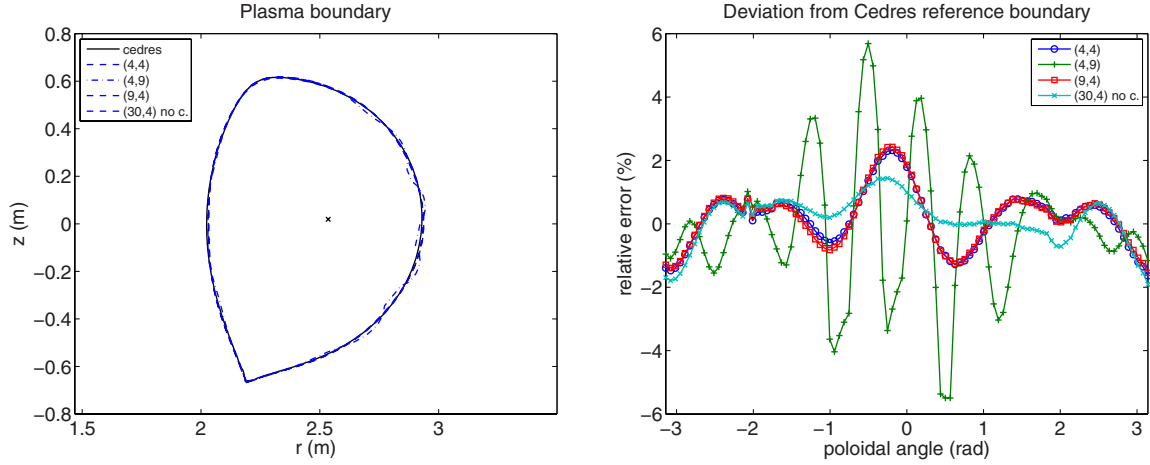


Figure 4. Left: plasma boundaries. Boundaries computed with $(n^e = 4, n^i = 4)$ or $(n^e = 9, n^i = 4)$ and $(n^e = 30, n^i = 4)$ without any PF coils modelization (no c) are almost superimposed with the reference boundary computed with Cedres. The boundary computed with $(n^e = 4, n^i = 9)$ shows some irregularity. Right: corresponding relative deviation from the Cedres++ boundary, $100(\rho - \rho_{\text{Cedres}})/\rho_{\text{Cedres}}$ as a function of the poloidal angle θ . The center of the polar coordinate system (ρ, θ) is the magnetic axis from Cedres++ (shown in the left-hand figure).

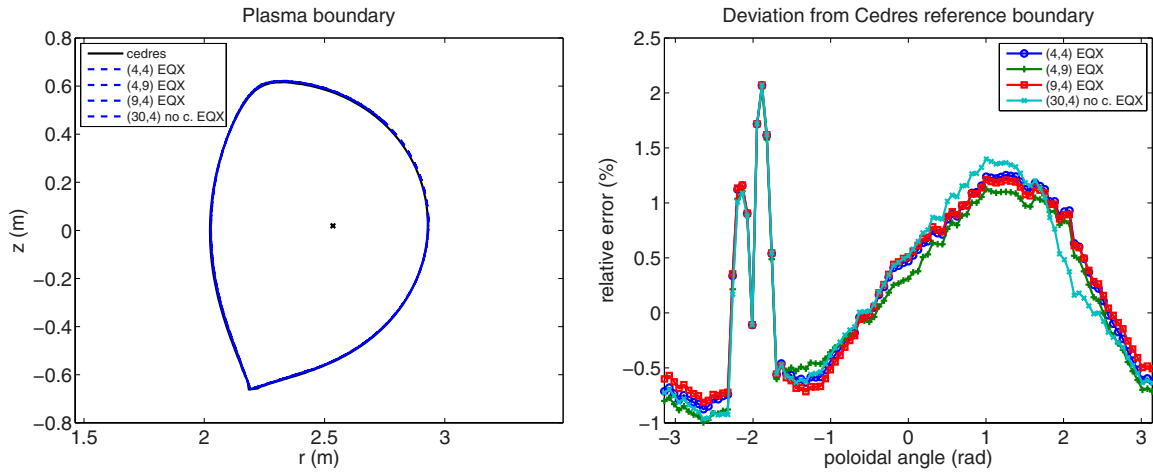


Figure 5. Left: plasma boundaries. Boundaries computed by Equinox (EQX) with $(n^e = 4, n^i = 4)$ or $(n^e = 9, n^i = 4)$ and $(n^e = 30, n^i = 4)$ without any PF coils modelization (no c) are almost superimposed with the reference boundary computed with Cedres++. The boundary computed with Equinox $(n^e = 4, n^i = 9)$ does not show any irregularities. Right: corresponding relative deviation from the Cedres++ boundary, $100(\rho - \rho_{\text{Cedres}})/\rho_{\text{Cedres}}$ as a function of the poloidal angle θ . The center of the polar coordinate system (ρ, θ) is the magnetic axis from Cedres++ (shown in the left-hand figure).

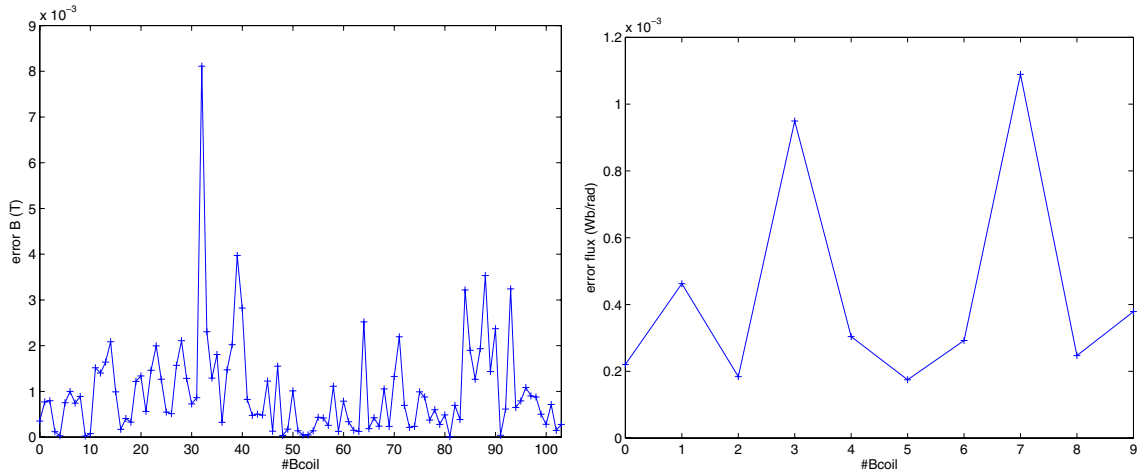


Figure 6. Comparison between measured and reconstructed values for WEST case 1 using $(n^e = 4, n^i = 4)$.

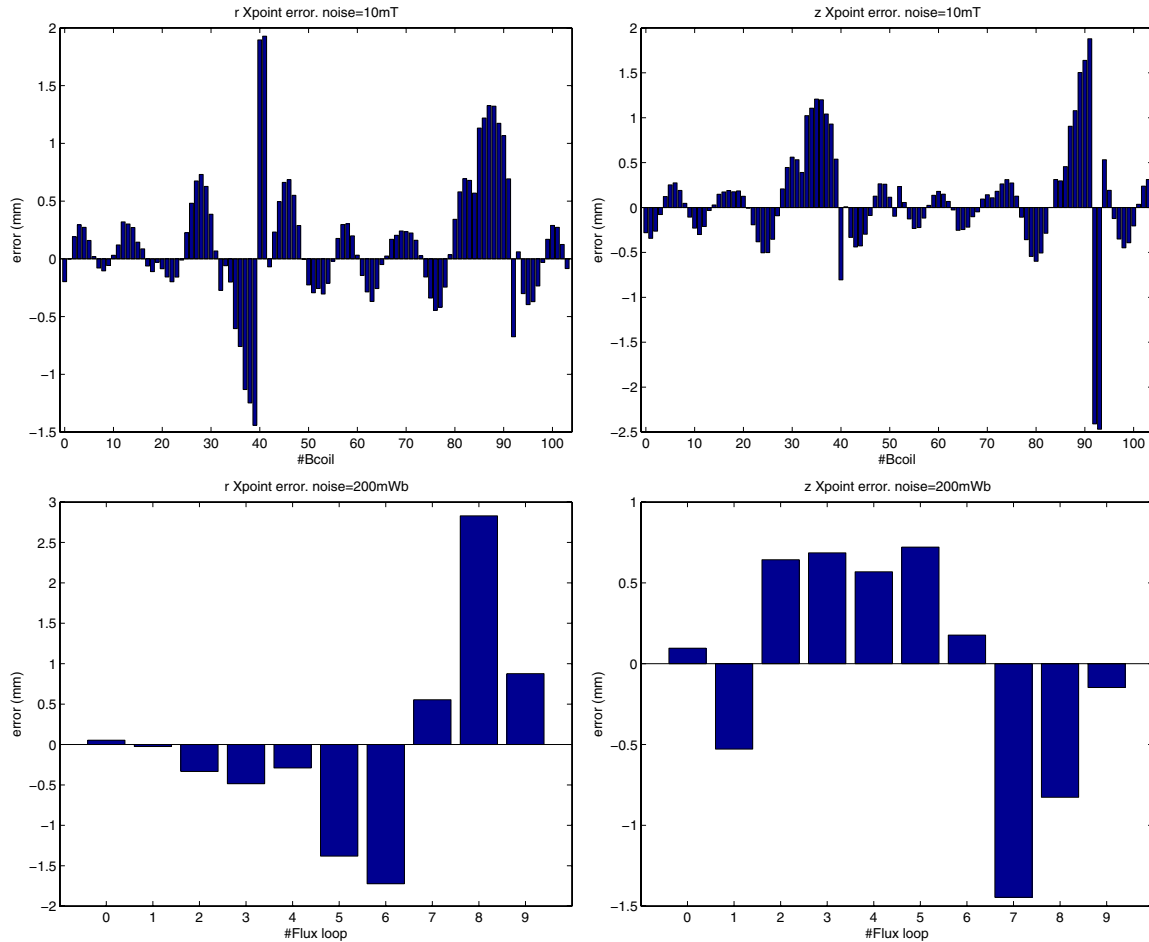


Figure 7. Error introduced on the X-point position reconstruction by adding a 10 mT offset on a single B -coil measurement or a 200 mWb offset on a single flux-loop measurement.

naturally the X-point position is more dependent on sensors that are in the divertor region than on others.

The numerical results for case 2 (the smaller plasma) are very similar to those presented above for case 1. It should be mentioned, however, that the plasma boundary reconstructed by the TH algorithm with the default ($n^e = 4, n^i = 4$) choice presents a small concavity on the high field side. Nevertheless it is small (a distance of maximum 2 cm from the Cedres boundary) and again disappears in the plasma boundary computed by Equinox (see figure 8). In cases 3 and 4 with a limiter configuration, the plasma boundary reconstructions are accurate (see figure 8).

5.2. Computing time

In view of the possible use of this method for the real-time control of the plasma position and shape in the WEST tokamak, it is important to evaluate the computing time for one boundary reconstruction. Each evaluation of the flux or the field at a given point has a cost in terms of computing time because the evaluation of the toroidal harmonics as well as the elliptic integrals involved in the expression of the flux generated by a filament of current have one. Therefore, in order to have an efficient code, all these functions are precomputed and stored in tables. The evaluation of a function then

Table 2. Rows 1 and 2: distance between the X-point given by Cedres and the one computed by the Toroidal Harmonics algorithm (TH) or the one re-computed by Equinox (EQX). Row 3: distance between the current center used as the pole of the toroidal coordinate system in TH and the magnetic axis given by Cedres. Row 4: distance between the magnetic axis given by Cedres and computed by Equinox.

(n^e, n^i)	(4, 4)	(4, 9)	(9, 4)	(30, 4) no c
$\ X_{pt_{TH}} - X_{pt_{Cedres}}\ $ (mm)	6.7	8.6	7.4	7.8
$\ X_{pt_{EQX}} - X_{pt_{Cedres}}\ $ (mm)	5.4	5.4	5.4	5.4
$\ C_{TH} - Mag_{Cedres}\ $ (mm)	18.5	18.3	18.5	19.3
$\ Mag_{EQX} - Mag_{Cedres}\ $ (mm)	4.4	3.6	4.5	4.0

just involves a linear interpolation between two entries of a table. A second point concerns parallelism. Many loops in the code (matrix assembly, integrals computations, boundary points computation, ...) can be parallelized. We have used OpenMP to do so. The program is tested on a laptop with two quadcore processors running at 2.4 GHz. With this material configuration, the code takes about 2 ms for one boundary reconstruction as shown in table 3. Although this is already in the range of computing time needed for the real-time control of the plasma on WEST, this result could still be improved using more threads or even GPU as proposed in [30].

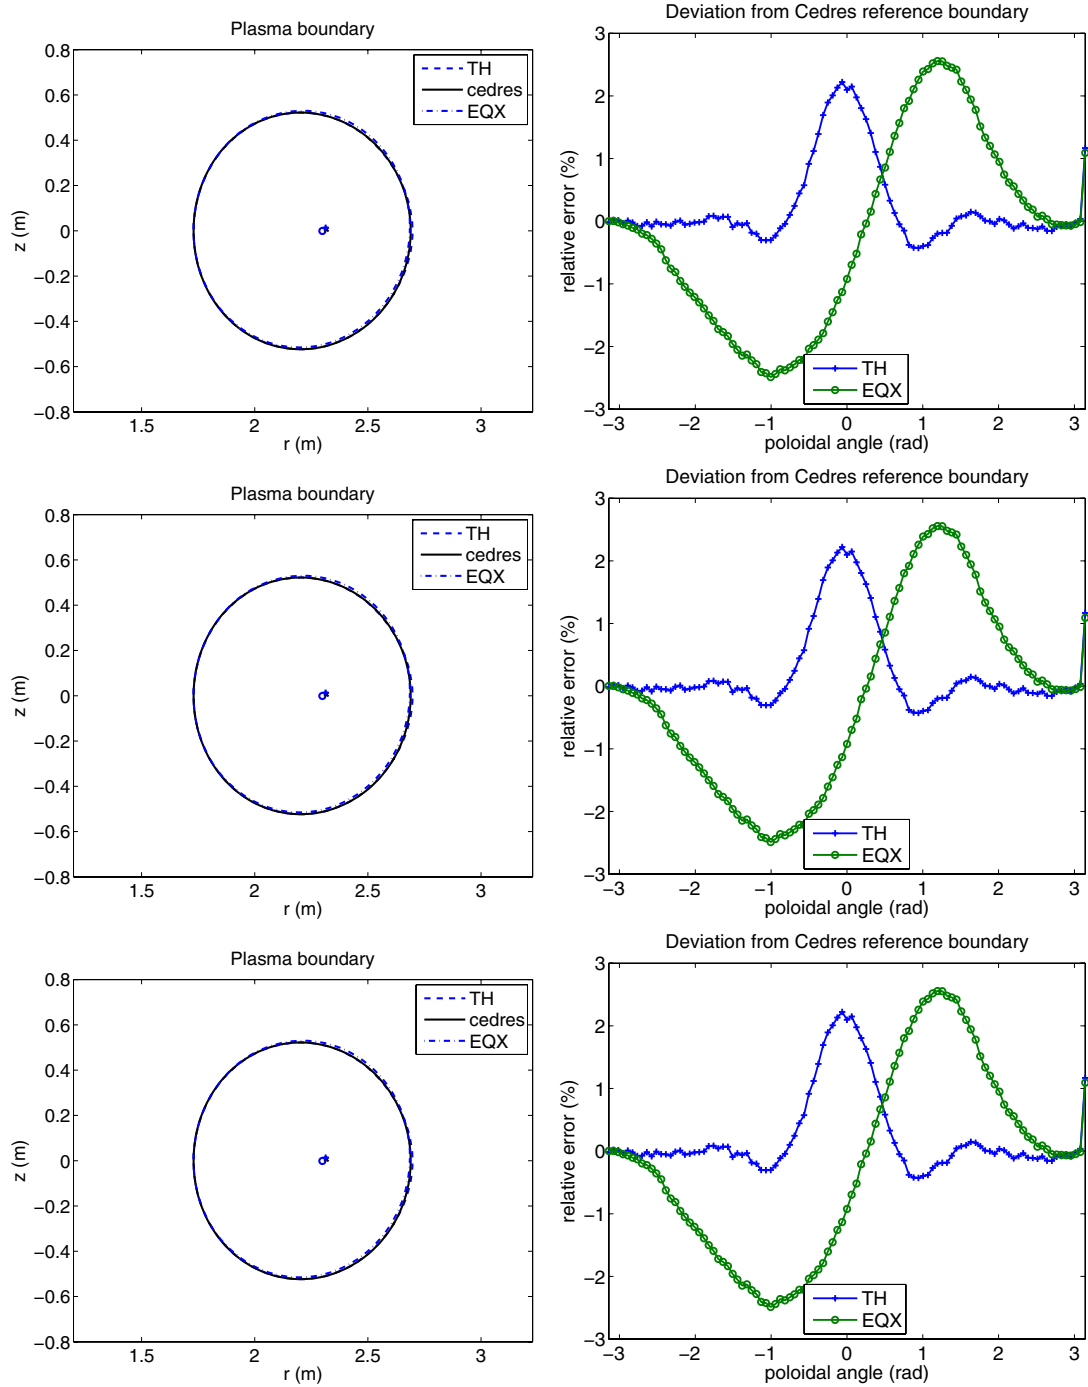


Figure 8. Row 1: case 2. Left: Cedres++ reference and boundaries reconstructed with toroidal harmonics (TH) and Equinox (EQX). The Cedres++ and Equinox magnetic axis as well as the computed plasma center taken as the pole of the toroidal coordinate system (circle) are also shown. Right: corresponding relative deviation from the Cedres++ boundary, $100(\rho - \rho_{\text{Cedres}})/\rho_{\text{Cedres}}$ as a function of the poloidal angle θ . The center of the polar coordinate system (ρ, θ) is the magnetic axis from Cedres++ (shown in the left-hand figure). Row 2: the same for case 3. Row 3: the same for case 4.

5.3. Equinox on the ITM platform

The method presented in this paper has also been tested on data provided in the ITM database. The aim is to be able to run the equilibrium reconstruction code Equinox directly from the discrete magnetic measurements.

During a first initialization phase all the geometric inputs are read from the database: the limiter contour, the PF-coils geometry and location, the B-probes orientation and location,

and the flux and saddle loops location. The convex hull of the limiter contour is computed. This is the Γ contour which is the boundary of the computation domain for the finite element part of Equinox. From this contour, a mesh is generated. Of course many other contours could be used as the boundary, and if desired one can define one's own, point by point. However the convex hull of the limiter has the advantage of being computed automatically.

Table 3. Wall-clock computing time. One boundary point corresponds to the following operations: update the normal equation matrix as the pole of the toroidal coordinate system changes, solve the normal equation, compute the new current center (to be given to the next time step), and compute the point defining the boundary isoflux value ψ_b (either limiter point or X-point). Then add to this the computation of 9, 19, 29 or 59 boundary points for the next columns.

Nbr of bnd pts	1	10	20	30	60
Comp. time (ms)	1.09	1.23	1.44	1.54	1.98

Then comes the time stepping. Each time step is made of two stages. In the first one at the discrete time t^n , the pole of the toroidal coordinate system is set to the magnetic axis location computed at time t^{n-1} . The contribution of the different PF coils to the flux is computed and subtracted from the magnetic measurements. The residuals are then fitted to a truncated series of toroidal harmonics.

Once this is done, the flux can be evaluated at any point of an unknown annular domain surrounding the plasma and therefore clearly on the contour Γ . We are thus able to compute Cauchy boundary conditions on Γ . Note that even if it is possible in principle, we do not compute the plasma boundary at this stage. Indeed, we want to run the finite element method of Equinox on a fixed domain which does not need to be re-meshed at each time step. The plasma boundary is thus computed during this second stage, along with all the parameters which characterize a plasma equilibrium (including the magnetic axis, which will be used at the next time step), which are then copied to the ITM database.

6. Conclusion

We have presented in this paper a method based on the use of toroidal harmonics and on a modelization of the poloidal field coils and divertor coils for the 2D interpolation of discrete magnetic measurements.

The method completely relies on the classical assumptions that the equilibrium is axisymmetric and that a negligible amount of the total current density flows in the plasma existing in the region of the sensors (i.e. $\Delta^*\psi = 0$ holds in this region). If the first assumption was to be defaulted with non-negligible 3D effects [31–35], the method might be destabilized. The same conclusion holds if the second assumption was to fail since the decomposition of the flux in a series of toroidal harmonics with constant coefficients is not exact anymore.

However under these assumptions our numerical results show that the method is quite stable even though it does not involve a classical regularization procedure. This is due to the fact that the ill-posed part of the method, that is to say the computation of the internal solution, only relies on the choice of the pole of the toroidal coordinate system and on the number of internal toroidal harmonics used to approximate the flux. Our numerical experiments show that the magnetic axis is a good and easy-to-compute choice for the first point, and, concerning the second point, that only a few toroidal harmonics are needed to accurately approximate the flux.

The method is generic and can be used to provide Cauchy boundary conditions needed as the input by a fixed domain equilibrium reconstruction code like Equinox. This is implemented in the ITM version of Equinox. The method can also be used to extrapolate the magnetic measurements to compute the X-point position and the plasma boundary. It is foreseen to be used in the real-time plasma control loop on the WEST tokamak.

Acknowledgments

We would like to thank the two anonymous reviewers for their constructive criticism from which the paper has benefitted significantly.

References

- [1] Blum J, Boulbe C and Faugeras B 2012 Reconstruction of the equilibrium of the plasma in a tokamak and identification of the current density profile in real time *J. Comput. Phys.* **231** 960–80
- [2] Bucalossi J *et al* 2011 Feasibility study of an actively cooled tungsten divertor in Tore Supra for ITER technology testing *Fusion Eng. Des.* **86** 684–8
- [3] Wesson J 2004 *Tokamaks (International Series of Monographs on Physics vol 118)* 3rd edn (New York: Oxford University Press)
- [4] O'Brien D P, Lao L L, Solano E R, Garribba M, Taylor T S, Cordey J G and Ellis J J 1992 Equilibrium analysis of iron core tokamaks using a full domain method *Nucl. Fusion* **32** 1351–60
- [5] Blum J 1989 *Numerical Simulation and Optimal Control in Plasma Physics with Applications to Tokamaks (Series in Modern Applied Mathematics)* (New York/Paris: Wiley/Gauthier-Villars)
- [6] Faugeras B, Ben Abda A, Blum J and Boulbe C 2012 Minimization of an energy error functional to solve a Cauchy problem arising in plasma physics: the reconstruction of the magnetic flux in the vacuum surrounding the plasma in a tokamak *ARIMA J.* **15** 37–60
- [7] O'Brien D P, Ellis J J and Lingertat J 1993 Local expansion method for fast plasma boundary identification in JET *Nucl. Fusion* **33** 467–74
- [8] Sartori F, Cenedese A and Milani F 2003 JET real-time object-oriented code for plasma boundary reconstruction *Fusion Eng. Des.* **66–68** 735–9
- [9] Saint-Laurent F and Martin G 2001 Real time determination and control of the plasma localisation and internal inductance in Tore Supra *Fusion Eng. Des.* **56–57** 761–5
- [10] Integrated Tokamak Modelling 2013 <http://portal.efda-itm.eu/>
- [11] Braams B J 1991 The interpretation of tokamak magnetic diagnostics *Plasma Phys. Control. Fusion* **33** 715–48
- [12] Fock V A 1932 *Fiz. Zh. Sovietunion* **1** 215
- [13] Morse P M and Feshbach H 1953 *Methods of Theoretical Physics* (Cambridge: Cambridge University Press)
- [14] Lee D K and Peng Y-K M 1981 An approach to rapid plasma shape diagnostics in tokamaks *J. Plasma Phys.* **25** 161–73
- [15] Deshko G N, Kilovataya T G, Kuznetsov Y K, Pyatov V N and Yasin I V 1983 Determination of the plasma column shape in a tokamak from magnetic measurements *Nucl. Fusion* **23** 1309–17
- [16] Bondarenko S P, Golant V E, Gryaznevich M P, Kuznetsov Y K, Pyatov V N, Taran V S, Shakhovets K G and Yasin I V 1984 Measurement of the shape of the plasma column in the tuman-3 tokamak *Sov. J. Plasma Phys.* **10** 520–4

- [17] Alladio F and Crisanti F 1986 Analysis of MHD equilibria by toroidal multipolar expansions *Nucl. Fusion* **26** 1143–63
- [18] Van Milligen B P 1990 Exact relations between multipole moments of the flux and moments of the toroidal current density in tokamaks *Nucl. Fusion* **30** 157–60
- [19] Kurihara K 1992 Improvement of tokamak plasma shape identification with a Legendre–Fourier expansion of the vacuum poloidal flux function *Fusion Technol.* **22** 334–49
- [20] Van Milligen B P and Lopez Fraguas A 1994 Expansion of vacuum magnetic fields in toroidal harmonics *Comput. Phys. Commun.* **81** 74–90
- [21] Fischer Y 2012 Identification de paramètres magnétiques à l'intérieur d'un tokamak *J. Eur. Syst. Automatisés* **46** 611–32
- [22] Lebedev N N 1972 *Special Functions and their Applications* (New York: Dover)
- [23] Braams B J 1986 Computational studies in Tokamak equilibrium and transport *PhD Thesis* University of Utrecht
- [24] Fischer Y 2011 Approximation dans des classes de fonctions analytiques généralisées et résolution de problèmes inverses pour les tokamaks *PhD Thesis* Université de Nice-Sophia Antipolis
- [25] Abramowitz M and Stegun I A 1964 *Handbook of Mathematical Functions* (Washington, DC: National Bureau of Standards)
- [26] Durand E 1968 *Magnétostatique* (Paris: Masson et Cie)
- [27] Segura J and Gil A 2000 Evaluation of toroidal harmonics *Comput. Phys. Commun.* **124** 104–22
- [28] Zakharov L E and Shafranov V D 1973 Equilibrium of a toroidal plasma with non-circular cross section *Sov. Phys. Tech. Phys.* **18** 151–8
- [29] Hertout P, Boulbe C, Nardon E, Blum J, Brémond S, Bucalossi J, Faugeras B, Grandgirard V and Moreau P 2011 The CEDRES++ equilibrium code and its application to ITER, JT-60SA and Tore Supra *Fusion Eng. Des.* **86** 1045–8
- [30] Yue X N, Xiao B J, Luo Z P and Guo Y 2013 Fast equilibrium reconstruction for tokamak discharge control based on GPU *Plasma Phys. Control. Fusion* **55** 9
- [31] Cooper W A, Graves J P and Sauter O 2011 Helical ITER hybrid scenario equilibria *Plasma Phys. Control. Fusion* **53** 024002
- [32] Cooper W A *et al* 2013 Bifurcated helical core equilibrium states in tokamaks *Nucl. Fusion* **53** 073021
- [33] Lazerson S and Chapman I T 2013 STELLOPT modeling of the 3D diagnostic response in ITER *Plasma Phys. Control. Fusion* **55** 084004
- [34] Hanson J D *et al* 2013 Non-axisymmetric equilibrium reconstruction for stellarators, reversed field pinches and tokamaks *Nucl. Fusion* **53** 083016
- [35] Turnbull A D *et al* 2013 Comparisons of linear and nonlinear plasma response models for non-axisymmetric perturbations *Phys. Plasmas* **20** 056114