

# **Building GDAL 1.4.2 for Windows using Visual Studio**

**V. 1.0**



**Daniele Romagnoli**

**Dott. Ing. Simone Giannecchini**

**Page 1 of 8**



**GeoSolutions S.A.S. --- Via Carignoni 51, 55041 Camaiore (LU) Italy**



## 1. Introduction

This simple guide will provide you some instructions about how to build GDAL 1.4.2 with support for the following formats:

- MrSID (v 6.0.7)
- ECW (v 3.3)
- Kakadu (v. 5.2.6)
- HDF4 (v. 4.2r1)

## 2. Preliminary steps

In order to add support for the listed formats, you need to achieve some preliminary steps for each format.

### 2.1 - ECW

Download the Image Compression SDK (source code) from ER Mapper site at this address:

<http://www.ermapper.com> (You need to be registered in order to download it).

From the main site, select the menu “products & downloads” -> “Image Compression SDK” from the Desktop section. Download the Image Compression SDK Source Code 3.3 file and extract this somewhere on your hard disk, as an instance on C:\ExternalLibraries\libecwj2-3.3. Finally, open the ready-to-use libecwj2\_win32\_net\_shared.vcproj Visual Studio Project available in C:\ExternalLibraries\libecwj2-3.3\Source\NCSBuildQmake and build it.

### 2.2 - MrSID

As a first requirement, you need the LizardTech Decoding Software Development Kit (DSDK).

You can download it free of charge from this site:

<http://developer.lizardtech.com> (You need to be registered in order to download it).

After logged in, select “Download” -> “Software Development Kits” -> “Download SDK's”.

Select the proper version of SDK to be download.

When your download is completed, unzip the DSDK somewhere on your hard disk, as an instance, on C:\ExternalLibraries\MrSid




## 2.3 - KAKADU

The visual studio solution for kakadu building allows to build a shared debug DLL.

We need to change some settings to build a shared Release DLL.

Otherwise, sometimes, memory allocations errors occurs since some libs use MSVCRT71D and some others MSVCR71.

First step is open the proper ready-to-use Visual Studio Solution<sup>1</sup> of kakadu coresys (located in kakadu\VERSION\coresys) and change the coresys configuration properties by changing the option C/C++->Code Generation -> RunTime Library from /MDd to /MD.

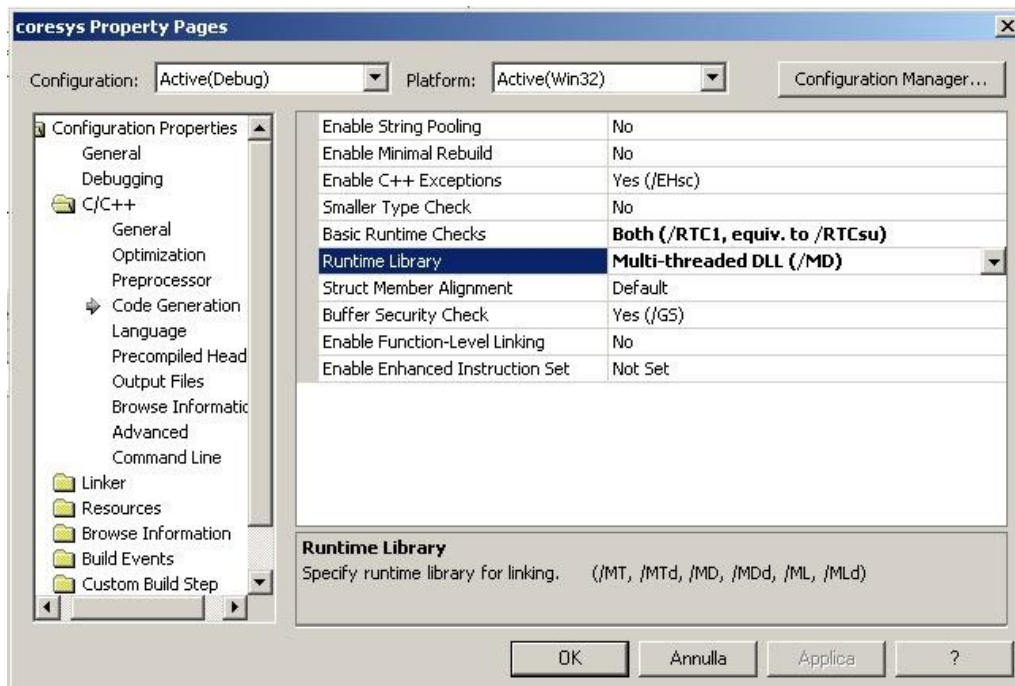

Then, you are ready to build your solution.

After you done this, open the Kakadu apps solution (located in kakadu\VERSION\apps). Change the Code Generation runtime library of each project from /MDd to /MD and build them.

Then, copy the produced .obj files in the kakadu\VERSION\apps\make folder. The required .obj and the location from where to get them are listed in the following table.

<sup>1</sup>As an instance, if you are using Visual Studio .Net 2003, open the coresys\_2003.sln solution file.



File	Originating location
args.obj	\v5_generated\v_compress\debug
2.obj	\v5_generated\v_compress\debug
mj2.obj	\v5_generated\v_compress\debug
image_in.obj	\v5_generated\compress\debug
palette.obj	\v5_generated\compress\debug
roi_sources.obj	\v5_generated\compress\debug
kdu_tiff.obj	\v5_generated\compress\debug
jpx.obj	\v5_generated\compress\debug
kdu_stripe_decompressor.obj	\v5_generated\buffer_expand\debug
image_out.obj	\v5_generated\expand\debug

## 2.4 - HDF4

As a first requirement, you need to download the binary distribution of HDF4 release from this site:

<http://hdf.ncsa.uiuc.edu/release4/obtain.html>

Scroll this page until you find the link to the binary distribution file for Windows.

When your download is completed, unzip the binary somewhere on your hard disk, as an instance, on C:\ExternalLibraries\HDF4

Then, enter in the `release` subfolder and create a `libpath` folder where you need to copy 4 \*.lib files contained in `release\lib` and `release\dll` subfolders. They are: `hd421.lib`, `hd421m.lib`, `hm421.lib`, `hm421m.lib`

This could seem a strange workaround but it avoid errors when building GDAL against HDF4.

It is finally worth to point out that HDF4 leverages on some external libs: JPEG, ZLIB, SZIP. Be sure you have them. <http://hdf.ncsa.uiuc.edu/release4/obtain.html> also contains 3 links where to download the required libraries. For each library, you need to select the “Pre-Compiled Binaries” link and select the proper version (for Windows).

## 3. Configuring GDAL

Firstly, you need to download GDAL 1.4.2 from OSGeo SVN at this location:

<https://svn.osgeo.org/gdal/tags/1.4.2/gdal>



You may use Tortoise SVN (available at: <http://tortoisesvn.net/downloads>) to download it.

Then, you need to apply the patch available at this location:

<https://imageio-ext.dev.java.net/svn/imageio-ext/trunk/patches/1.4.2GDAL.patch>

This patch contains several changes for:

- Kakadu support: Multithreading added; More Kakadu options supported. Makefile modified
- Java bindings: improved data access (read Dataset at once instead of read RasterBands at once; PixelSpace, LineSpace and BandSpace parameters now are allowed)

To apply the patch, supposing you already downloaded Tortoise SVN, you need to select the GDAL folder on your hard-disk, then right-button's click on it with your mouse and select TortoiseSVN ->Apply patch... At this point, you need to specify the previously downloaded 1.4.2GDAL.patch file and apply.

Finally, you need to modify your GDAL\NMAKE.opt as explained in the following sections.

### 3.1 - KAKADU SETTINGS

Find the KAKADU Setting properties by looking for the following line:

```
# Uncommment if you have Kakadu 4.0 or newer
```

Supposing your KAKADU library has been placed in C:\ExternalLibraries\kakadu, edit the next line, like this:

```
KAKDIR = C:\ExternalLibraries\kakadu\v5_2_6-90032L
```

Be sure the proper version subfolder is set. (In this case: v5\_2\_6-90032L).

To enable kakadu support we need to change only another property. Go ahead in the NMAKE.OPT and look for the following line:

```
# Any extra libraries needed on this platform?
```

Then, edit the ADD\_LIBS variable by adding the kakadu lib, like this:

```
ADD_LIBS = C:\ExternalLibraries\kakadu\lib\kdu_v52D.lib
```



### 3.2 - MrSID SETTINGS

Find the MrSID Setting properties by looking for the following line:

```
#Uncomment the following for MrSID support
```

Supposing your MrSID library has been placed in C:\ExternalLibraries\MrSid, edit the next lines, like this

```
MRSID_DIR = C:\ExternalLibraries\MrSid

MRSID_INCLUDE = -I$(MRSID_DIR)\include\base -I$(MRSID_DIR)\include\support \
               -I$(MRSID_DIR)\include\metadata \
               -I$(MRSID_DIR)\include\mrsid_readers \
               -I$(MRSID_DIR)\include\j2k_readers

MRSID_LIB = $(MRSID_DIR)\lib\Release_md\lti_dsdk_dll.lib advapi32.lib
user32.lib
```

### 3.3 - ECW SETTINGS

Find the ECW Setting properties by looking for the following line:

```
# Uncomment the following and update to enable ECW support.
```

Supposing your ECW library has been placed in C:\ExternalLibraries\libecwj2-3.3, edit the next 2 lines, like this:

```
ECWDIR  = E:\work\libecwj2-3.3

ECWLIB  = $(ECWDIR)\Source\NCSBuildQmake\Debug\libecwj2.lib
```

### 3.4 - HDF4 SETTINGS

Find the HDF4 Setting properties by looking for the following line:

```
# Uncomment the following and update to enable NCSA HDF Release 4 support.
```

Supposing your HDF4 library has been placed in C:\ExternalLibraries\HDF4, edit the next 2 lines, like this:

```
HDF4_DIR = c:\ExternalLibraries\HDF4\release

HDF4_LIB = /LIBPATH:$(HDF4_DIR)\libpath
```



## 4. Building GDAL

Now, you are ready to build GDAL. Open Visual Studio Command Prompt, and enter in your GDAL home folder. At this point, you are ready to start the build process by running the following command:

```
nmake /f makefile.vc
```

When the build is terminated, you need to generate JAVA bindings.

## 5. Generating Java Bindings

### 5.1 - Requirements

Be sure you have properly downloaded SWIG, the Simplified Wrapper and Interface Generator which allow to produce JAVA bindings for GDAL. You can download it from: <http://www.swig.org/>

You also need ANT which will be used in order to build a JAR containing all JAVA classes generated by SWIG. You can download it from: <http://ant.apache.org/>

### 5.2 - Variable settings

Be sure your `GDAL\NMAKE.opt` has the `SWIG` variable, properly set. Check this variable by finding the following lines:

```
# Set the location of your SWIG installation

!IFDEF SWIG

SWIG = C:\Programs\swig\swigwin-1.3.29\swig.exe

!ENDIF
```

Be sure `SWIG` variable refer to the proper `swig.exe` path.

Then, check your `GDAL\SWIG\JAVA\java.opt` is properly configured. (Basically, you need to check the `JAVA_HOME` and `ANT_HOME` variables)

### 5.3 - Running SWIG

Now, you are ready to generate java bindings. From the Command Line, enter in your `GDAL\SWIG` folder and run `nmake /f makefile.vc java`

This command will automatically generate wrappers and bindings.



## 6. Final Settings

At this point, you should have:

- some external DLLs (Kakadu: `kdu_v52D.dll`, ECW: `libecwj2.dll`, MrSID: `lti_dsdk_dll.dll`, HDF4: `hd421m.dll`, `hm421m.dll`)
- a GDAL DLL (`gdal14.dll`)
- 4 JNI DLL (`gdalconstjni.dll`, `gdaljni.dll`, `ogrjni.dll`, `osrjni.dll`)
- a jar file (`gdal.jar`)

You need to place all these DLLs in the folder where your application will look for libraries. A typical location where to place them is your `JAVA_HOME/JRE/BIN` if you are using JDK's JRE, or `JAVA_HOME/BIN` if you are using JRE.

Finally, `gdal.jar` needs to be used as dependency of your projects using GDAL Libraries and related java bindings.

