ALPHA PREMIER
GROUP OF COMPANIES

ALPHA PREMIER ATTENDANCE

USER MANUAL

RFID attendance kiosk, bathroom key log, live attendance viewer and intern payroll for the front desk.

Software version 0.2.14 · Windows 10 / 11
Manual edition 2 · October 2026
Unit 3104C, Tektite East Tower, Ortigas Center, Pasig

About this manual

How to use Alpha Premier Attendance every day and how to look after it. No technical knowledge is needed.

Who should read which part

You are…	Read
An intern tapping in and out	Chapter 4 (Recording attendance) and Chapter 5 (Bathroom keys).
Front-desk staff looking after the kiosk	Chapters 1–6, 15 and the Quick Reference Card.
An administrator (HR / office admin)	The whole manual, especially Chapters 7–14.
A manager who only views attendance	Chapter 6 (Live attendance and the office viewer).

Conventions used in this manual

Shown as	Means
Bold text	A button, tab, menu or field name exactly as it appears on screen.
`1` `Enter`	A key on the keyboard.
3	A numbered marker on a screenshot. The table or list next to the picture explains each number.
`config.toml`	A file name, folder or web address.
Admin → Payroll	Open **Admin**, then click the **Payroll** tab.

> ✓ **Tip**
> A shortcut or good habit that saves time.

> i **Note**
> Extra information that helps you understand what the system is doing.

> ! **Caution**
> An action that cannot be undone, or that can change pay. Read before you click.

About the pictures

Screenshots use made-up sample interns (for example "Alex Rivera", "DEMO-001") and a preview copy of the software, so a few status lines may differ slightly from the front-desk computer.

Important notices

- All times in the system use **Philippine time (Asia/Manila)**.
- Attendance and payroll data are stored **only on the front-desk computer**. Make regular backups (Chapter 12).
- Keep the administrator PIN and admin RFID cards private. Anyone with them can change attendance and payroll.
- Do not copy or delete program files while the app is running; use the backup tools.

Contents

01 **Introduction** 4

02 **Installing and starting the app** 6

03 **A tour of the kiosk screen** 7

04 **Recording attendance** 9

Messages after a tap 11

Manual entry and forgotten cards 12

05 **Bathroom key log (kiosk)** 13

06 **Live attendance and the office viewer** 14

07 **Administrator access** 16

Forgot PIN — resetting by email 17

The admin screen at a glance 18

08 **Users and RFID cards** 19

Adding a user from the Users tab 20

Editing, deactivating and deleting users 21

09 **Attendance corrections** 22

Adding missed attendance 24

10 **Payroll** 25

Reviewing, adjusting and finalizing 26

Printing the payroll PDF 27

11 **Bathroom key log (admin)** 28

12 **Data, backup and updates** 29

Moving to a new computer, DTR sync and updates 30

13 **Voice announcements** 31

14 **Attendance and pay rules** 32

15 **Troubleshooting** 33

Frequently asked questions 34

A **Appendix A — On-screen messages** 35

B **Appendix B — Files, shortcuts and glossary** 36

★ **Quick Reference Card** 37

CHAPTER 01

Introduction

Alpha Premier Attendance replaces the paper logbook at the front desk. Interns tap an RFID card, the screen shows their photo and greets them, and the time is saved.

What the system does

Attendance kiosk

Records one **time in** and one **time out** per intern per day with a card tap. It shows the photo, name and time, and speaks a greeting.

Bathroom key log

Tracks who has the male or female restroom key, when they took it and how long it has been out.


Live attendance

Shows today's time-ins and time-outs on the kiosk and, read-only, on any phone or PC on the office Wi-Fi.

Admin and payroll

Register cards, fix mistakes, add missed days, build semi-monthly intern payroll and print one payroll PDF per cutoff.

How it fits together

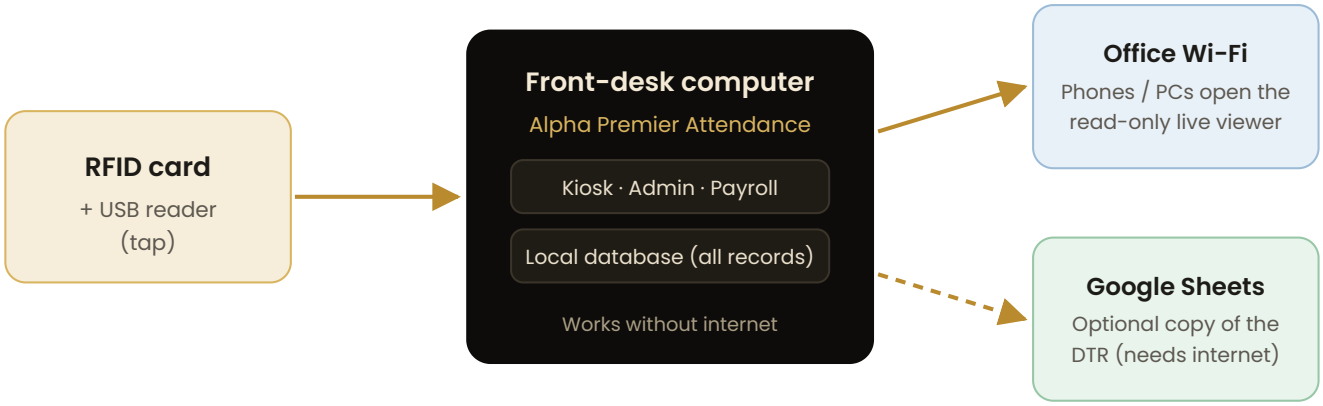

Solid arrow: always on. Dashed arrow: optional; scans never wait for it.

Who uses it

Role	What they do	Needs
Intern	Taps in and out; borrows and returns restroom keys.	A registered RFID card
Front desk	Keeps the kiosk running; helps with manual entry.	Access to the kiosk PC
Administrator	Registers cards, corrects attendance, runs payroll, makes backups.	Admin PIN or admin RFID card
Viewer (manager)	Watches today's attendance from another device.	The office Wi-Fi and viewer link

Five things to know before you start

1. **One tap in, one tap out.** The first tap of the day is the **time in**. The second is the **time out**. After that the card answers "Attendance is already complete for today."
2. **The kiosk window must be in front.** The card reader works like a keyboard. If another program is in front, the taps go there instead. You do not need to click any box first.
3. **No internet needed.** Every tap is saved on the front-desk computer straight away. The Google Sheets copy catches up later by itself.
4. **Office hours are 8:00 AM to 5:00 PM.** Lunch (12:00–1:00 PM) is unpaid. Tapping out at 6:00 PM or later flags the day for correction (Chapter 14).
5. **Closing the window does not stop it.** The X button hides the app to the system tray. Scanning keeps working whenever the window is shown again.

System requirements

Item	Requirement
Computer	Windows 10 or Windows 11, 64-bit.
Card reader	125 kHz EM4100 USB reader working in keyboard mode (sends 10 digits + Enter). This is the default reader.
Cards	One 125 kHz card per intern; at least one extra card to use as an **admin RFID card**.
Speakers	Optional, for spoken greetings.
Network	Optional. Office Wi-Fi for the live viewer; internet for updates, PIN-reset email and Google Sheets.
Installation rights	Windows administrator approval is needed once, when installing.

What's in this version

Version 0.2.14 is for **interns only**. Every person you register is paid as an intern at **PHP 80.00 per day**. The only payroll document is the **Intern Payroll PDF**; older employee payslips and spreadsheet payroll exports are no longer part of the app.

> **Note**
> The pay rules changed on **1 October 2026**: the old weekly 15-minute grace period was removed. Days before that date keep the old rules, so past pay never changes. See Chapter 14.

CHAPTER 02

Installing and starting the app

Do this once on the front-desk computer. It takes about 10 minutes.

Install

1. Download the latest `Alpha Premier Attendance_…_x64-setup.exe` from the company's GitHub Releases page (ask IT for the link).
2. Double-click the file. Approve the Windows administrator prompt.
3. Follow the installer. It installs for all users and adds the WebView2 component if it is missing.
4. Plug the USB card reader into the computer. No driver is needed.
5. Open **Alpha Premier Attendance** from the Start menu. The kiosk screen appears (Chapter 3).

Starting, closing and the system tray

You do	What happens
Turn on / log in to Windows	The app starts by itself (this is on by default; you can turn it off in Admin → Data and backup or the tray menu).
Click the window's **X**	The window hides to the tray. The app keeps running and saves an automatic backup.
Click the tray icon	The kiosk window comes back.
Open the app a second time	The window that is already running comes to the front. A second copy never starts.

Right-click the tray icon (near the clock, bottom-right of the screen) for this menu:

Menu item	Use
Show attendance app	Bring the kiosk window to the front.
Start on system startup	Tick or untick automatic start with Windows.
Check for updates…	Look for a newer version now (Chapter 12).
Exit application	Fully close the app. Cards will not register until it is opened again.

First-time setup checklist (administrator)

1. **Get admin access.** A new installation has no PIN. Open **Admin**, click **Forgot PIN?** and set the first PIN with the emailed code (Chapter 7).
2. **Register an admin RFID card** so you can unlock without the PIN (Chapter 8).
3. **Register every intern's card**, with photo and gender (Chapter 8).
4. **Test**: tap one intern card. You should see the photo and "Time In recorded successfully."
5. **Make the first backup** (Chapter 12) and, if wanted, share the live viewer link (Chapter 6).

CHAPTER 03

A tour of the kiosk screen

The kiosk is the screen the front desk sees all day. It waits for a card tap; nobody needs to touch the mouse.



Figure 3-1. The kiosk waiting for a card ("ready" state).

#	Part	What it shows or does
1	Company and office	Alpha Premier logo and the office address.
2	Mode tabs	**1 Attendance** (normal) or **2 Bathroom Key Log**. Click a tab or press `1` / `2`.
3	Reader status	**Ready** (green) means taps will be read. See the table on the next page for other states.
4	Date and clock	Current Philippine date and time.
5	Greeting	"Good morning / afternoon / evening". Changes to "Reading card..." while a tap is processed.
6	RFID reader box	Shows "Waiting for card...". It is locked on purpose — just tap the card on the reader.
7	Bottom buttons	Manual entry, Live attendance, Admin and Admin setup (next page).

The bottom buttons

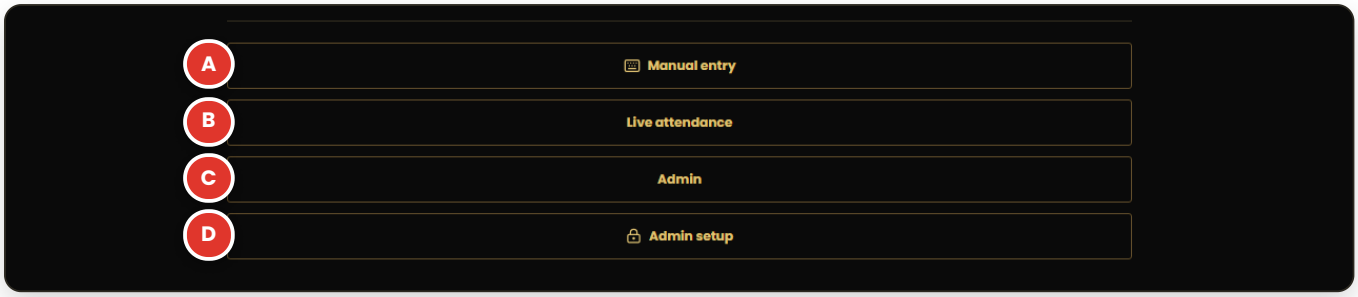


Figure 3-2. Bottom of the kiosk screen (scroll down if your screen is small).

#	Button	Use
A	**Manual entry**	Type a card number when the reader is not working (Chapter 4). Changes to **Use card reader** to switch back.
B	**Live attendance**	Opens today's attendance list (Chapter 6).
C	**Admin**	Opens the administrator area (Chapter 7). Needs the PIN or an admin card.
D	**Admin setup**	Quick way to register a new card or change the person on a card (Chapter 8).

Reader status (top-right pill)

Shows	Meaning	What to do
Ready	Waiting for a card.	Nothing.
Scanning	A tap is being read.	Wait one second.
Connecting…	The app is starting the reader.	Wait a few seconds.
Offline / **Error**	The reader cannot be used right now.	Check the USB cable, then see Chapter 15. Use Manual entry meanwhile.

Hover the mouse over the pill to see more detail.

Google Sheets (DTR) badge

Next to the reader status a small badge reports the optional Google Sheets copy, for example *"No DTR items queued"*, *"3 queued"* or *"Sheet syncing paused; attendance recording continues."* Taps are always saved on the computer first, so these messages never mean an attendance was lost. If it says *"Attendance needs admin attention for DTR sync"*, tell an administrator (Chapter 12).

Switching modes with the keyboard

Press `1` for Attendance or `2` for Bathroom Key Log. The shortcut is ignored while you are typing in a box or while a window is open, so a card number is never mistaken for a mode change.

CHAPTER 04

Recording attendance

For interns. It takes about one second.

To time in (arriving)

1. Check the kiosk shows **1 Attendance** and the green **Ready** pill.
2. Hold your card flat on the reader until it beeps.
3. Check the screen shows **your photo and name** and "**Time In recorded successfully.**" You will also hear a greeting.
4. Walk away. The screen returns to "ready" by itself after about 4 seconds.

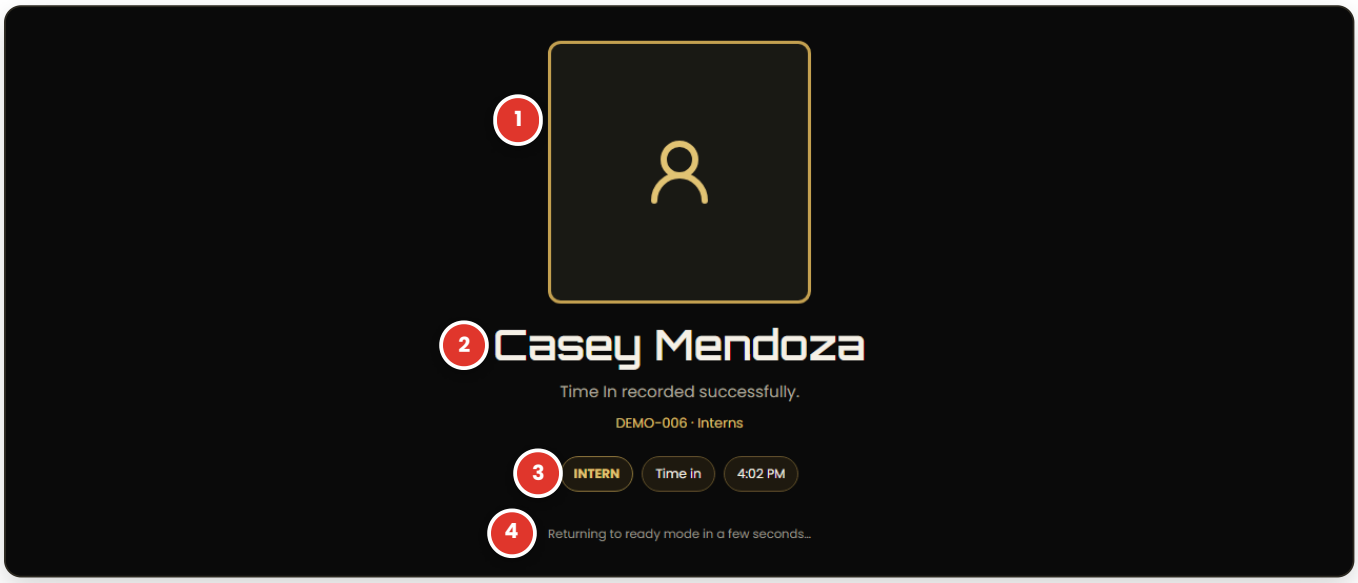


Figure 4-1. A successful time-in. 1 ID photo (an outline appears if no photo is on file) · 2 name and result · 3 type, action and time · 4 automatic return to ready.

To time out (leaving)

Tap the same card again at the end of the day. The screen shows "**Time Out recorded successfully.**" and you hear "Goodbye, *name*".

> **Tap out before 6:00 PM**
> A time-out at 6:00 PM or later is saved as LATE TIMEOUT. The kiosk still says "recorded successfully", but the voice warns that a manual correction is required and an administrator must fix the time (Chapter 9). The office does not pay overtime.

> **One time in and one time out per day**
> A third tap shows "Attendance is already complete for today." If you tapped out by mistake, ask an administrator to correct it.

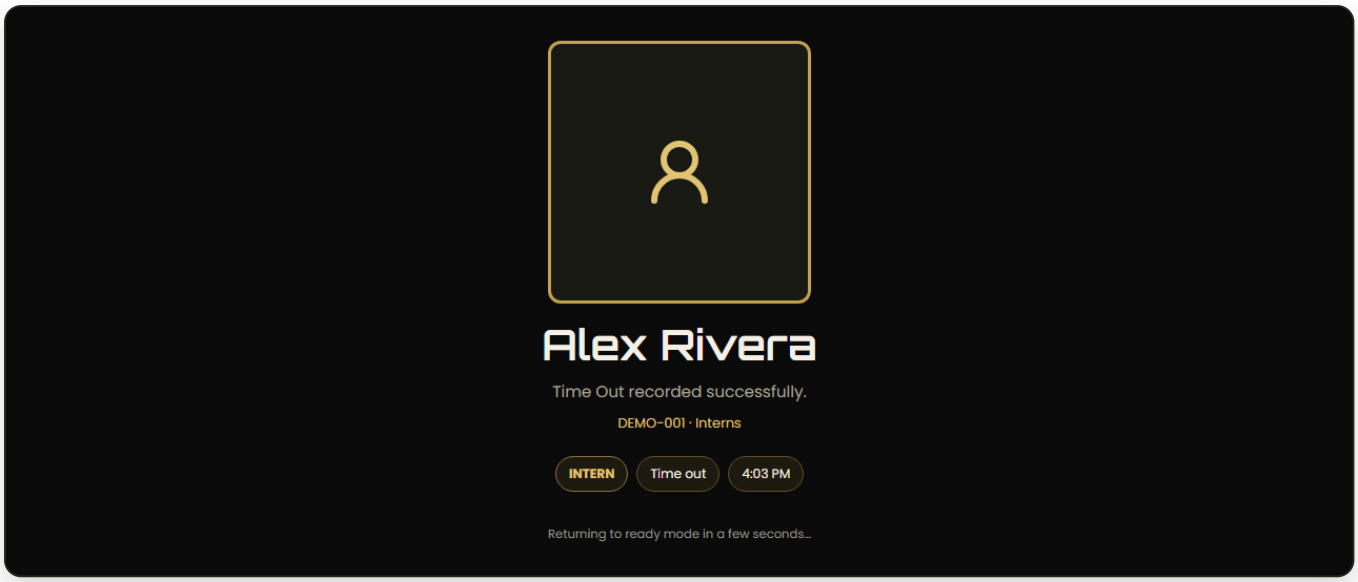


Figure 4-2. A successful time-out for the same intern later in the day.

What the voice says

Situation	Announcement (example)
Time in	"Good morning, Alex Rivera. Your time in has been recorded." It may add "You are late." or "You are the first arrival today."
Time out	"Goodbye, Alex Rivera. Your time out has been recorded."
Time out at/after 6 PM	"Your time out was recorded after office hours. Manual correction is required."
Problem	For example "This card is not registered." or "Card scanned too recently. Please wait."

Voice can be turned off or adjusted by an administrator (Chapter 13).

Good habits

- Tap **once** and wait for the result. Tapping again within 10 seconds only shows "This card was scanned too recently."
- Always look for **your own name** on the screen. If someone else's name appears, tell the front desk at once.
- Never tap for another person. Each tap is logged against the card used.
- Forgot your card? Ask an administrator for an **assisted** time in (page "Manual entry and forgotten cards").

Messages after a tap

If something is wrong, the screen shows a large message with a short code under it, then returns to ready after a few seconds.

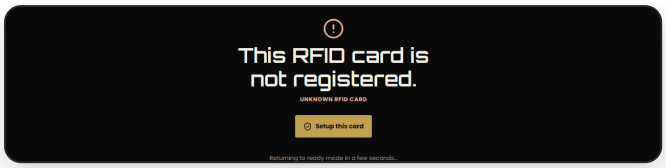


Figure 4-3. Card not registered, with **Setup this card**.

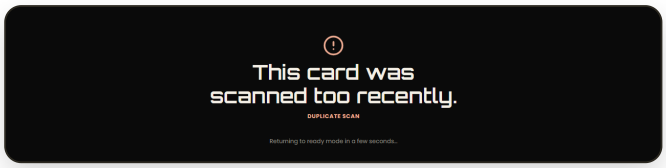


Figure 4-4. The same card was tapped again too soon.

Message (code)	Meaning and what to do
"This RFID card is not registered." (UNKNOWN RFID CARD)	The card is not linked to anyone. An administrator can click **Setup this card** to register it (Chapter 8).
"This card was scanned too recently." (DUPLICATE SCAN)	The card was tapped twice within 10 seconds. The first tap was saved. Do nothing.
"Attendance is already complete for today." (ATTENDANCE ALREADY COMPLETED)	Time in and time out are both done. Ask an administrator if a time is wrong.
"Attendance timed out after office hours and is pending manual correction."	Today was already flagged LATE TIMEOUT. An administrator must fix it.
"This user is inactive." (INACTIVE USER)	The person was set to Inactive. An administrator can reactivate them.
"Admin RFID cards cannot record attendance for themselves."	Admin cards are for unlocking and assisting only. In Attendance mode, tapping one opens the **Assisted Attendance** window.
"Card not recognized — check the reader format."	The reader sent something that is not a normal card number. Tap again; if it repeats, see Chapter 15.
"Attendance changed before the scan was saved." / "Attendance data is inconsistent." (ATTENDANCE DATA CONFLICT)	Rare timing clash. Tap again.
"Unable to save attendance." / "Unable to reach attendance service."	The app could not save. Tap again; if it repeats, restart the app and tell an administrator.

The full list of messages is in Appendix A.

Manual entry (when the reader is not working)

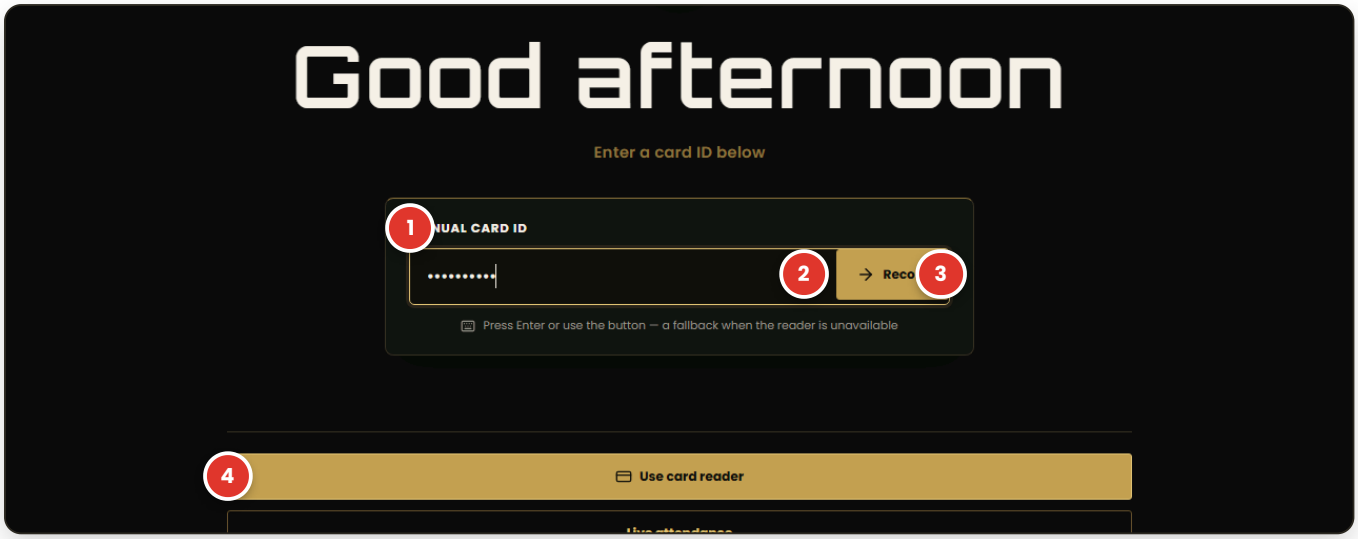


Figure 4-5. Manual card ID entry. 1 card number (hidden as dots) · 2 show/hide · 3 **Record** · 4 back to the reader.

1. While the kiosk is ready, click **Manual entry** at the bottom.
2. Type the card number printed on the card (usually 10 digits).
3. Press `Enter` or click **Record**. The result appears just like a tap.
4. Click **Use card reader** to go back to normal tapping. The reader is paused while manual entry is open.

Forgotten or broken card — assisted attendance

An administrator can record attendance for an intern who has no working card.

1. Make sure the kiosk is on **1 Attendance**. The administrator taps their **admin RFID card**.
2. The **Assisted Attendance** window opens. It closes by itself after **25 seconds** (see the "Auto-cancels in…" counter).
3. Search for the intern by name, ID or department and click their name.
4. Choose the **Reason for assisted scan**: *Forgot RFID card*, *Defective RFID card* or *Other reason…* (type the reason).
5. Click **Confirm attendance**. The kiosk shows the normal result plus "Assisted by *admin card*".

> **Audit trail**
> Assisted taps are marked **Assisted** in Attendance corrections with the admin card and reason, so they can be reviewed later.

CHAPTER 05

Bathroom key log (kiosk)

There is one male and one female restroom key. The kiosk records who has each key, so the old handwritten sign-out sheet is no longer needed.

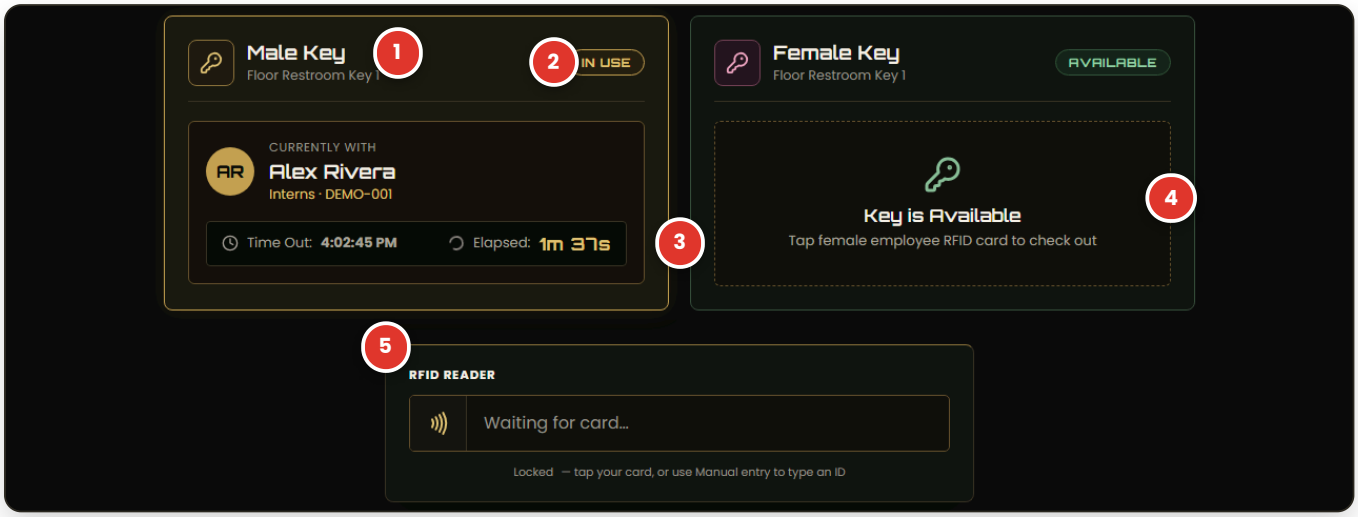


Figure 5-1. Bathroom Key Log mode. 1 key · 2 **IN USE** or **AVAILABLE** · 3 who has it, when they took it and the running timer · 4 free key · 5 reader.

To take a key

1. Press `2` or click **2 Bathroom Key Log** at the top of the kiosk.
2. Tap your card. The key that matches the **gender on your profile** is checked out to you ("Male floor key checked out").
3. Return within 15 minutes, as the voice reminds you.

To return a key

1. Put the key back and tap the **same card** again in Bathroom Key Log mode.
2. The screen shows "floor key returned" and how many minutes it was out.
3. Press `1` to switch the kiosk back to Attendance.

Message	What to do
"The male bathroom key is currently in use by *name*."	Wait until that person returns it.
"Card not registered. Please enroll in Admin Setup."	Ask an administrator to register the card.
"Admin Assist cards cannot checkout bathroom keys."	Use a personal card.
"Gender is not set for this card. Ask an administrator..."	An administrator sets **Gender** on the profile (Chapter 8). Until then, the admin can check the key out by hand (Chapter 11).

> **The key follows your profile**
> The key is chosen from the Gender field on your profile, so every intern needs it set. If you are holding a key, tapping always returns that key.

CHAPTER 06

Live attendance and the office viewer

See who is in today — on the kiosk itself, or on any phone or PC connected to the office Wi-Fi.

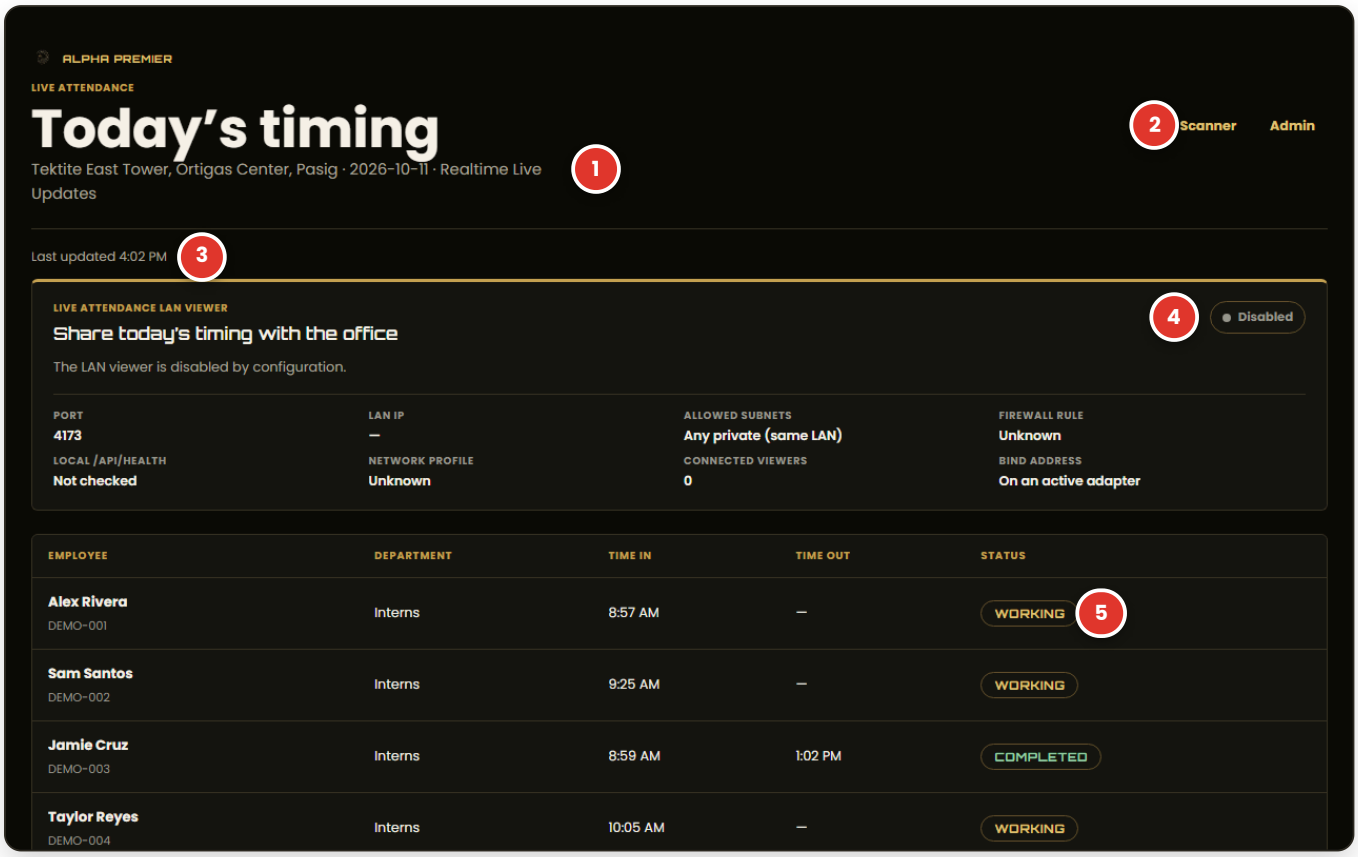


Figure 6-1. Live attendance on the kiosk (click **Live attendance** at the bottom of the kiosk).

#	Part	Meaning
1	Today's timing	Office, today's date and "Realtime Live Updates". The list refreshes after every tap and every 5 seconds.
2	Scanner / Admin	Back to the kiosk, or to the admin area.
3	Last updated	Time of the latest refresh. "Showing last successful update" means the newest data could not be loaded yet.
4	LAN viewer panel	Lets other devices watch this list (next page).
5	Status	WORKING timed in only · COMPLETED in and out · LATE TIMEOUT correction needed · MISSED no valid time in.

Sharing the list with the office (LAN viewer)

The front-desk computer can show today's list to managers on the same Wi-Fi. They only need a web browser; nothing is installed. The viewer is **read-only**: it never shows admin pages, payroll, photos or edit buttons.

1. On the kiosk, open **Live attendance**. The viewer starts automatically. If it shows **Stopped**, click **Start LAN viewer**.
2. When the panel shows **Running**, click **Copy URL**. The link looks like `http://192.168.1.25:4173/attendance`.
3. Send the link to the manager. They open it on a phone or PC connected to the **office Wi-Fi**.
4. Their page shows each time in and time out, newest first, with a status chip such as **Live — streaming**.

Other buttons: **Open Local Viewer** (test the page on this computer), **Stop viewer**, **Refresh status**.

If the office uses a viewer password

When IT has turned on password mode, add `?token=` and the password to the end of the link, for example `http://192.168.1.25:4173/attendance?token=YourPassword`. Without it the page says "Viewer access required". The copied link does not include the password; add it yourself.

Reading the panel facts

Fact	Good value	If not
LAN IP	An address such as 192.168.x.x	Connect the PC to the office Wi-Fi.
Network profile	**Private — office-ready**	"Public" blocks phones. Ask IT to set the Wi-Fi to Private (Chapter 15).
Firewall rule	**Allow rule found**	Ask IT to allow port 4173 (Chapter 15).
Local /api/health	**Reachable locally**	Restart the app.
Connected viewers	How many devices are watching	—

> **Who can open the link**
> Only devices on the office network. A phone on mobile data, or outside the allowed network, sees "Outside the office network". LAN settings (port, password, allowed networks) are changed by IT in `config.toml` and take effect after restarting the app.

> **If a manager's page stops updating**
> Their status chip shows "Reconnecting…" or "Offline". Refreshing the page or opening the link again fixes most cases.

CHAPTER 07

Administrator access

The admin area is protected. Unlock it with the administrator PIN or a registered admin RFID card.

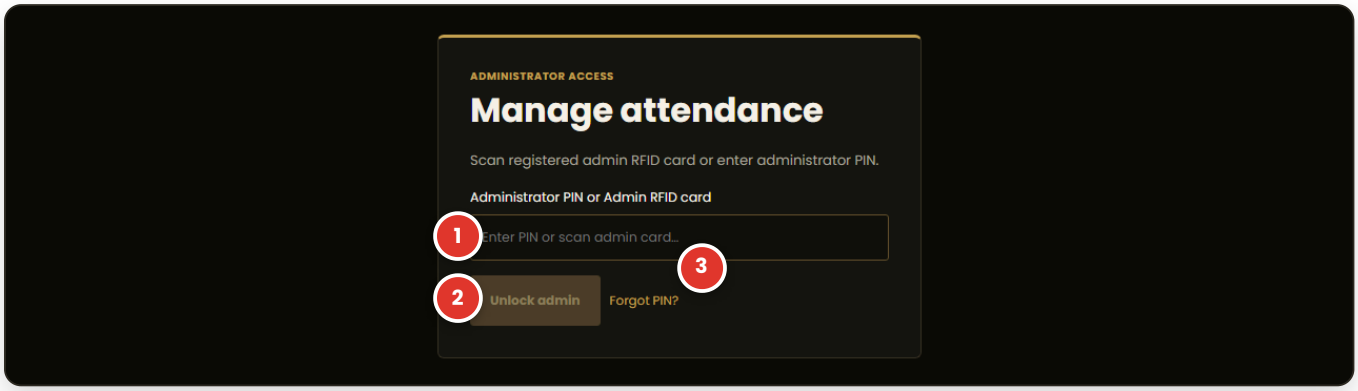


Figure 7-1. Unlock screen. 1 PIN or card · 2 **Unlock admin** · 3 **Forgot PIN?**

To unlock

1. On the kiosk, click **Admin** at the bottom.
2. Either **tap your admin RFID card** on the reader (it fills the box and unlocks by itself), or type the **PIN** and click **Unlock admin**.
3. The admin screen opens on the **Users and RFID** tab.

Sessions and locking

- An admin session lasts **15 minutes** from unlocking (it is not extended by activity). Afterwards you see "Admin session expired. Please unlock again."
- Click **Lock** (top-right) when you are done. Always lock before leaving the desk.
- If you go back to the kiosk and return to Admin, you may need to unlock again.

PIN rules

- 6 to 12 digits. Easy patterns such as 111111, 123456 or 654321 are refused.
- A new installation has **no PIN**; use an admin card or set one with **Forgot PIN?**
- The PIN belongs to **this computer only**; it is not shared with other installations. Changing it does not affect admin cards.
- A wrong PIN or unknown card shows "The administrator PIN is invalid."

Forgot PIN — resetting by email

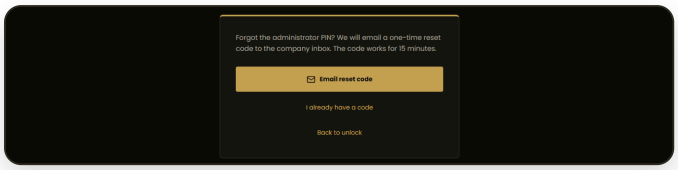


Figure 7-2. The Forgot PIN panel.

A one-time 6-digit code is emailed to the company inbox **thealphapremiergroup@gmail.com**. The computer needs internet for this.

The same **Forgot PIN?** link is in the kiosk's **Admin setup** window.

1. On the unlock screen, click **Forgot PIN?**, then **Email reset code**.
2. The screen shows a **request ID**. Open the company inbox and find the email whose subject has the same request ID.
3. Type the **Reset code**, then the **New PIN** twice (**Confirm new PIN**).
4. Click **Set new PIN**. You see "Admin PIN updated. Unlock with the new PIN." Unlock with the new PIN.

Already have a code from earlier? Click **I already have a code**. Need another? Click **Send a new code** — earlier codes then stop working.

Reset rules

- A code works for **15 minutes** and allows **5** wrong tries.
- Wait **1 minute** between requests. After **10** wrong codes in 24 hours, resets are blocked until the next day.
- Admin RFID cards keep working throughout — the easiest way back in.

Message	What to do
"That code is incorrect. Check the email and try again."	Use the code from the email with the matching request ID.
"That code expired or was entered wrong too many times."	Click **Send a new code**.
"A code was requested less than a minute ago…"	Use the newest email, or wait one minute.
"The reset email could not be sent…"	Check the internet connection; try again.
"The new PIN must be 6 to 12 digits and cannot be a repeated or sequential number…"	Choose a less predictable PIN.
"Too many wrong codes today…"	Use an admin card, wait until tomorrow, or ask IT.
"Administrator access is turned off on this kiosk."	IT has disabled admin access in the settings file. Contact IT.

The admin screen at a glance

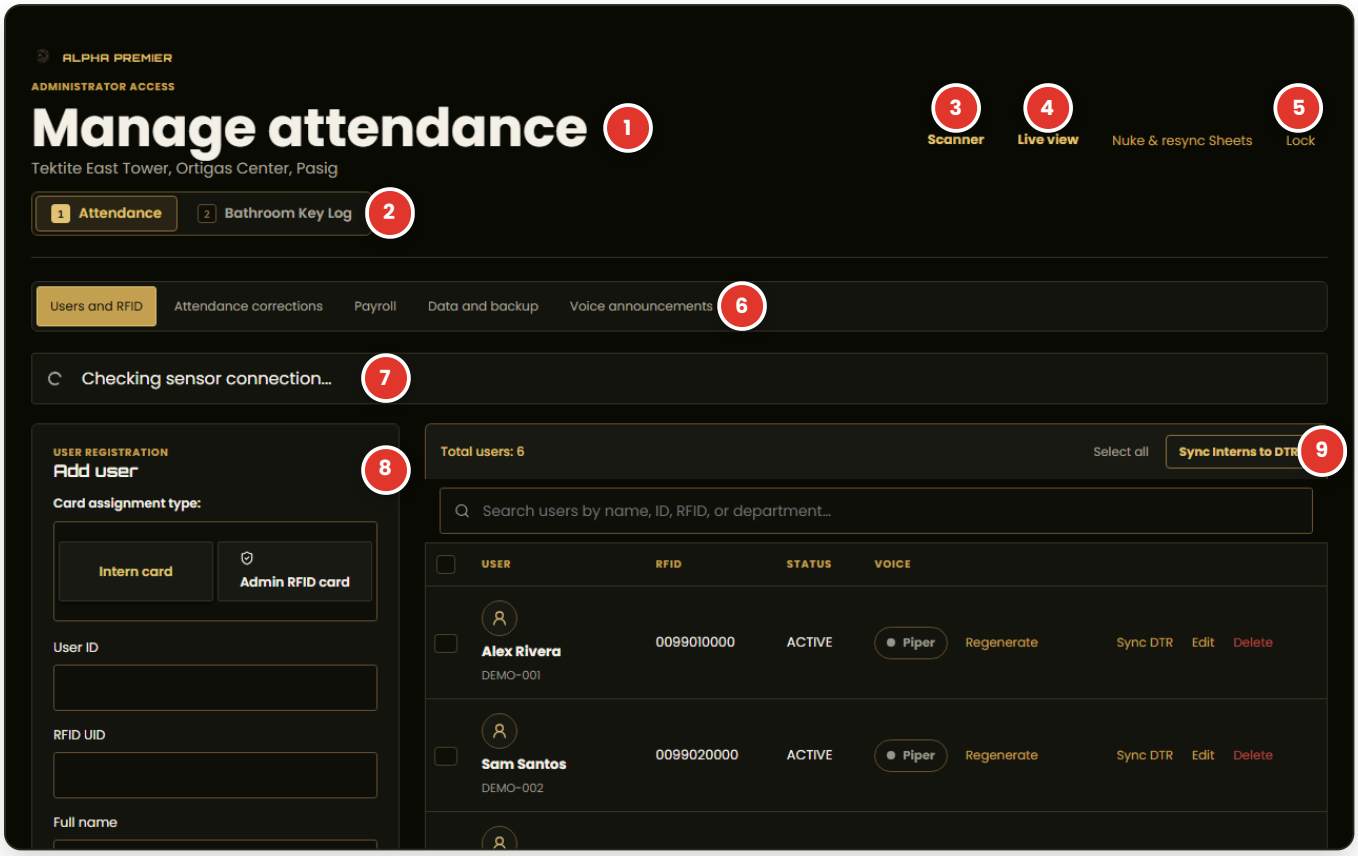


Figure 7-3. The admin screen, Users and RFID tab.

#	Part	Use
1	Manage attendance	You are in the admin area of this office.
2	Mode switch	**1 Attendance** shows the five tabs below; **2 Bathroom Key Log** shows the key log (Chapter 11). Keys `1` / `2` also work.
3	**Scanner**	Back to the kiosk screen.
4	**Live view**	Open Live attendance (Chapter 6).
5	**Lock**	End the admin session now.
6	Tabs	**Users and RFID** (Ch. 8) · **Attendance corrections** (Ch. 9) · **Payroll** (Ch. 10) · **Data and backup** (Ch. 12) · **Voice announcements** (Ch. 13).
7	Reader strip	Reader status: "Waiting for card", "Scan received", "Paused — this screen is typing", "Scanner unavailable" or "Scan error", with the last activity.
8	Work area	Changes with the tab. Here: the user registration form.
9	Lists and actions	Here: the user list with search, bulk actions and DTR sync.

The **Nuke & resync Sheets** link in the picture appears only in developer copies of the app; it is not on the front-desk computer.

CHAPTER 08

Users and RFID cards

Every intern needs a profile linked to their card. There are two ways to register: the quick **Admin setup** window on the kiosk (best for tapping new cards), or the **Users and RFID** tab.

Registering a card with Admin setup (recommended)

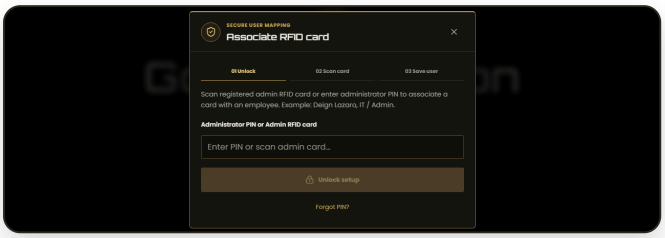


Figure 8-1. Step 01 — unlock.

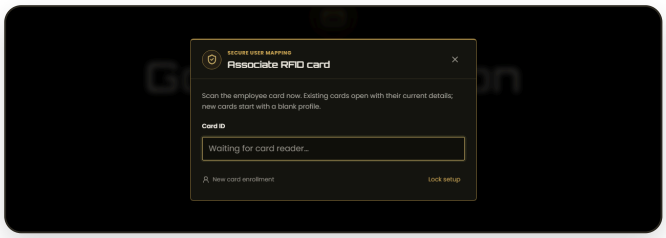


Figure 8-2. Step 02 — tap the card.

1. On the kiosk, click **Admin setup** (or **Setup this card** after tapping an unknown card). The **Associate RFID card** window opens.
2. **01 Unlock** — tap your admin card or type the PIN, then click **Unlock setup**.
3. **02 Scan card** — tap the intern's card on the reader. The window shows **New card** (blank profile) or **Existing card** (current details).
4. **03 Save user** — under **Register card as**, keep **Intern card** and fill in **User ID**, **Full name**, **Department / role**, **Status**, **Gender** and an optional **ID photo**.
5. Click **Save user**. You see "Card enrolled successfully." Click **Scan another card** for the next person, or **Lock setup** when finished.

> **Saving here never records attendance**
> Registering or updating a card only changes the user list. To make an **admin RFID card** instead, choose **Admin RFID card** in step 4, give it a label (for example "Front desk admin card #1") and click **Save admin card**.

Close the window with **X**, `Esc` or by clicking outside it. If unlocking Admin elsewhere replaces this session, you see "Your setup session expired or was replaced" — unlock again.

Adding a user from the Users tab

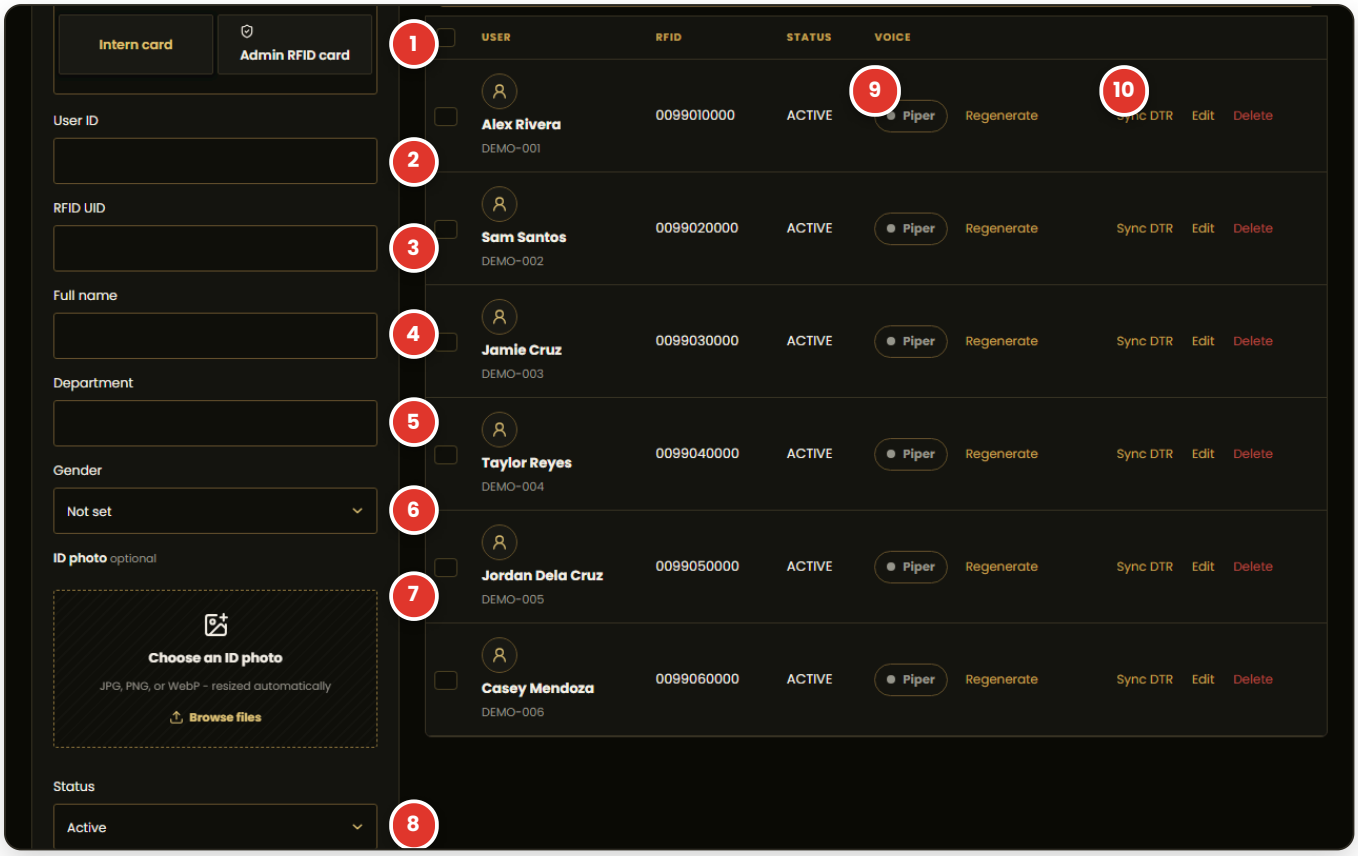


Figure 8-3. Admin → Users and RFID: the form (left) and user list (right).

#	Field	Rules
1	Card assignment type	**Intern card** for staff, **Admin RFID card** for unlock/assist cards (these never record their own attendance).
2	User ID	Required; letters, numbers, dash, underscore, dot. Cannot be changed later.
3	RFID UID	Required. The card number. Each card can belong to one person only.
4	Full name	Required. Capitalised automatically.
5	Department	Optional.
6	Gender	Not set / Male / Female. Decides which restroom key the person gets; with "Not set" the kiosk refuses restroom keys.
7	ID photo	Optional JPG, PNG or WebP under 25 MB; resized automatically. Enter the User ID first. Drag a file in or click **Browse files**.
8	Status	**Active** or **Inactive** (inactive cards are refused at the kiosk).
9	Voice	**Bea** = recorded name clip ready; **Queued**; **Piper** = the computer voice reads the name.
10	Row actions	**Regenerate** voice clip · **Sync DTR** · **Edit** · **Delete**.

Fill in the fields and click **Save user** at the bottom of the form. "This RFID card or User ID is already assigned to another user." means the card or ID is taken.

Editing, deactivating and deleting users

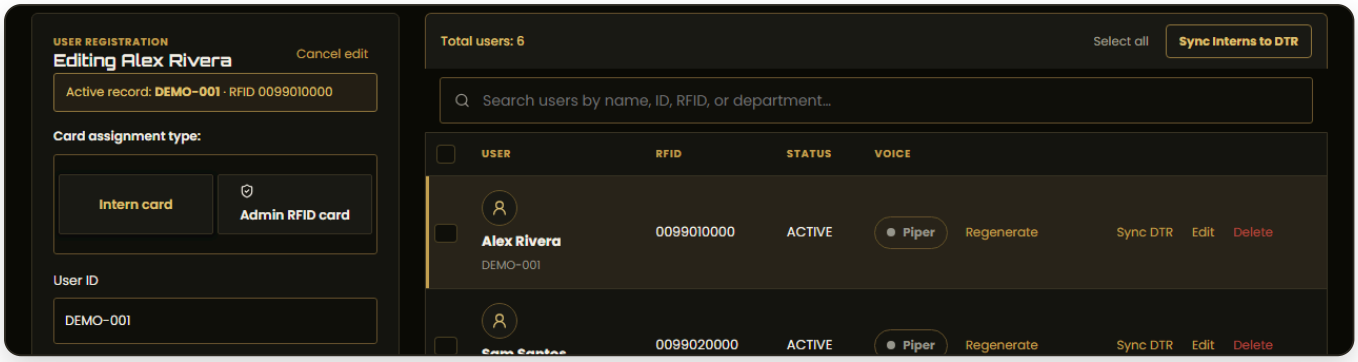


Figure 8-4. After clicking **Edit**, the form shows "Editing *name*" and the row is highlighted.

Edit a user or replace a lost card

1. Find the person with the search box ("Search users by name, ID, RFID, or department…").
2. Click **Edit** on their row. Change the details — for a replacement card, type the new card number in **RFID UID**.
3. Click **Save user**. Click **Cancel edit** to leave without saving.

Someone leaves

Set **Status** to **Inactive** and save. Their history and payroll stay; their card stops working.

> **Delete is permanent**
> **Delete** removes the user *and all of their attendance, bathroom logs and payroll*. It cannot be undone. Prefer **Inactive**. Make a backup first if you must delete.

Several users at once

Tick the boxes on the left of the rows, then use **Set Active (n)**, **Set Inactive (n)** or **Delete selected (n)**. **Clear selection** unticks all.

> **Select only some users**
> Type in the search box first, then click **Select all**: only the users shown by the search are selected. The count ("2 of 12 user(s) selected") confirms it before a bulk action.

Voice clips

Each intern's name can be spoken in the cloned "Ma'am Bea" voice. Click **Regenerate** to make a fresh clip (up to 2 minutes; "Queued…" or "Cloning…" is shown). Until it is ready the computer voice says the name.

Google Sheets DTR

Sync DTR (on a row) or **Sync Interns to DTR** (top of the list) copies interns to the "INTERN DTR" Google Sheet. Progress messages such as "Syncing intern 3 of 12" appear; it needs internet.

CHAPTER 09

Attendance corrections

Admin → **Attendance corrections**. View any day, fix wrong times, add days that were missed, and export to CSV.

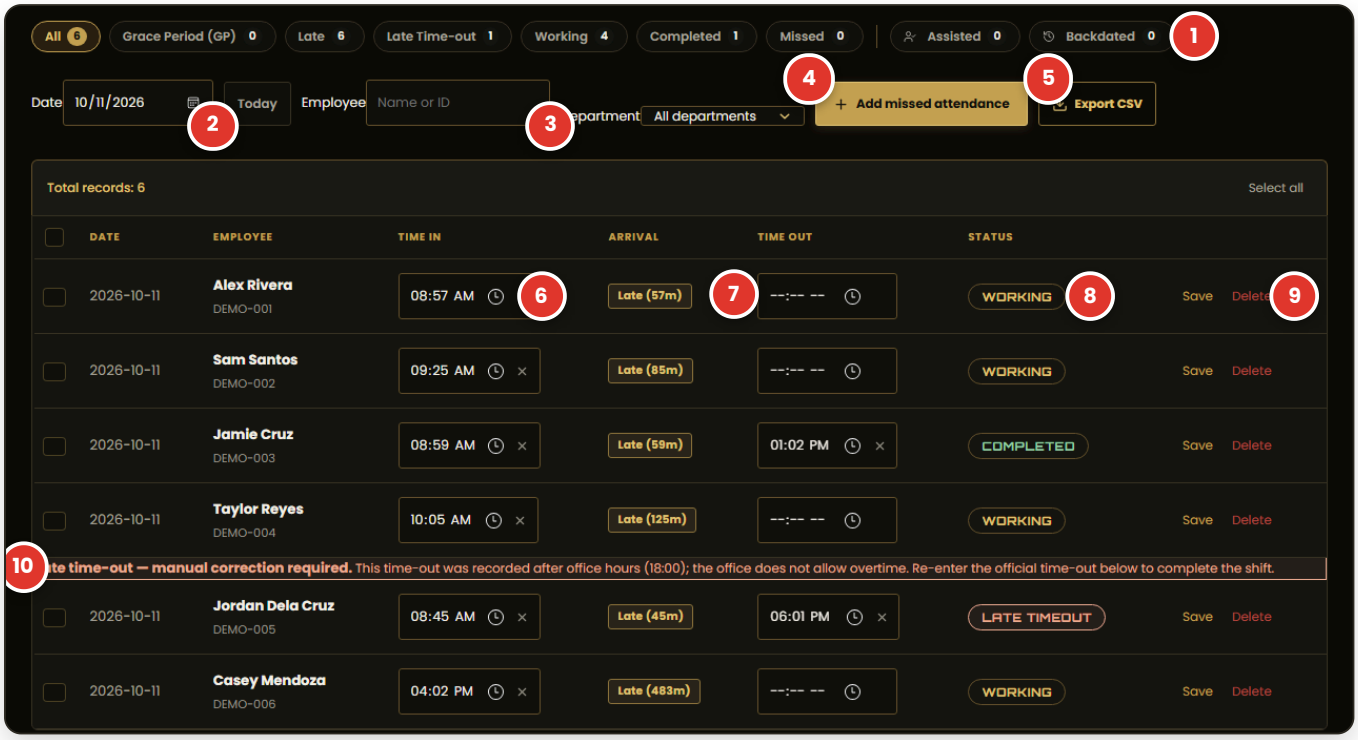


Figure 9-1. Attendance corrections for one day.

#	Part	Use
1	Filter chips	All, Grace Period (GP), Late, Late Time-out, Working, Completed, Missed, Assisted, Backdated — each with a count. GP only applies before 1 Oct 2026.
2	Date / Today	Choose the day to show.
3	Employee, Department	Narrow the list by name/ID or department.
4	**Add missed attendance**	Create a past day that was never tapped (next page).
5	**Export CSV**	Save the rows currently shown to a spreadsheet file.
6	Time in / Time out	Edit the times; the small **×** clears a time.
7	Arrival	On time, Grace Period (GP) or Late (minutes).
8	Status	Working, Completed, Late timeout or Missed.
9	**Save** / **Delete**	Save the row's new times, or delete the record.
10	Red banner	"Late time-out — manual correction required." The row below needs the official time-out.

To correct a time (for example a late time-out)

1. Pick the **Date**. Click the **Late Time-out** chip to see only the rows that need fixing.
2. In the person's row, change **Time out** to the official time (for example 5:00 PM).
3. Click **Save** on that row. You see "Saved" and the status changes to COMPLETED.
4. If you still enter a time at or after 6:00 PM, you see "Saved — time-out is still after office hours, correction remains required."

Saving also re-prices that day's pay straight away. Times you do not touch keep their exact original seconds.

Times saved	Status becomes
Time in and time out before 6:00 PM	COMPLETED
Time out at or after 6:00 PM	LATE TIMEOUT
Time in only	WORKING
No times	MISSED

> **If Save shows a message**
> "This record was changed by another update…" means someone else saved this row first: the list reloads by itself, so check the times and click **Save** again. "The date or time is not valid" means a time box is incomplete.

Deleting records

Click **Delete** on a row and confirm "Delete attendance record?". To delete several, tick the rows and click **Delete selected (n)**.

> **Permanent**
> A deleted time-in/time-out cannot be brought back. If only a time is wrong, correct it instead.

Exporting to CSV

1. Set the date and filters so the list shows what you need.
2. Click **Export CSV** (or tick rows and click **Export selected CSV (n)**).
3. A message confirms "Generated attendance-export-*date*.csv (*n* rows)." Open the file with Excel or Google Sheets (check the Downloads folder if no save window appears).

Columns: employee name and ID, department, date, time in, arrival, time out, status, total hours (whole hours, maximum 8, lunch not removed), source, recorded by, reason, recorded at, actual time in.

Adding missed attendance (backdated entry)

Use this when an intern worked on a past day but no tap was saved — for example they forgot their card and nobody used assisted attendance.



Figure 9-2. Add Missed Attendance. 1 employee · 2 past date · 3 time in · 4 time out (optional) · 5 reason · 6 save.

1. Click **+ Add missed attendance**.
2. Choose the **Employee** (active interns only) and the **Attendance Date** — yesterday or earlier.
3. Enter **Time In** and, if known, **Time Out** (defaults are 8:00 AM and 5:00 PM).
4. Type the **Reason**, for example "Forgot RFID card; confirmed by supervisor at 8:00 AM". It is required.
5. Click **Add missed attendance**. The list jumps to that date and the row is marked **Backdated**.

If you see	Why
"Backdated attendance date must be strictly in the past."	Today cannot be backdated; use the kiosk or assisted attendance.
"An attendance record already exists for this employee on this date…"	Correct the existing row instead.
"…date falls within a finalized payroll cutoff."	That pay period is already finalized.
"Time-out cannot precede time-in."	Check AM/PM.

CHAPTER 10

Payroll

Admin → **Payroll**. Intern pay is calculated automatically from attendance, twice a month: the **1st–15th** and the **16th–last day**.

1 · Fix attendance	2 · Generate drafts	3 · Review & finalize	4 · Print PDF
Chapter 9	this page	next page	Intern Payroll PDF

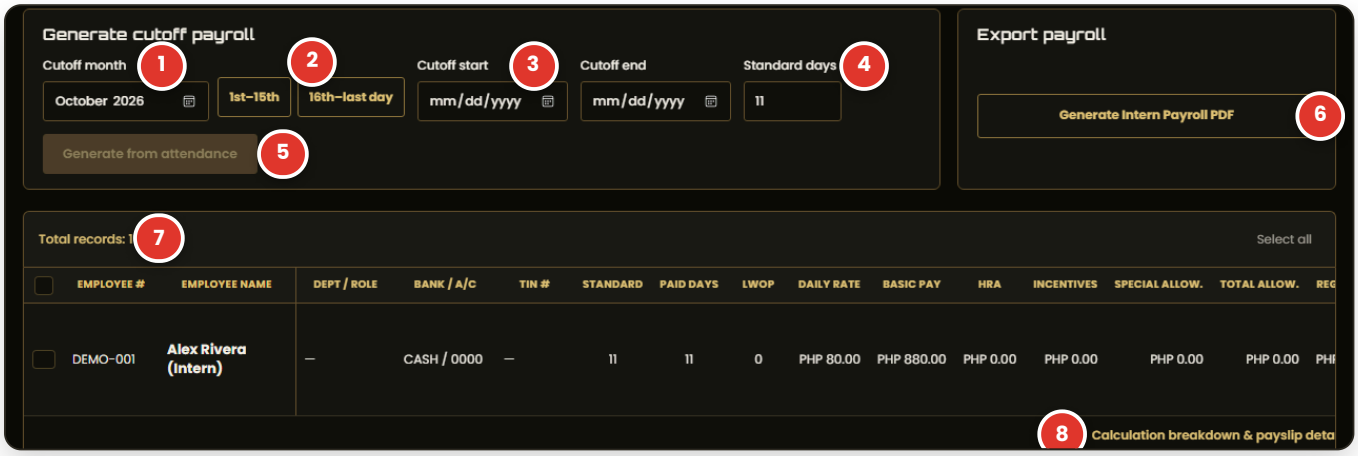


Figure 10-1. 1 month · 2 half-month buttons · 3 start/end dates · 4 standard days · 5 generate · 6 PDF · 7 payroll list · 8 day-by-day breakdown.

To generate a cutoff

1. Fix the period's attendance first: no LATE TIMEOUT or missing time-outs left (Chapter 9).
2. Choose the **Cutoff month**, then click **1st–15th** or **16th–last day**. Start and end dates fill in.
3. Check **Standard days**. It counts Monday–Friday automatically. **Subtract holidays yourself** (half days allowed, e.g. 10.5).
4. Click **Generate from attendance** and confirm. You see "Payroll drafts were generated from completed attendance."
5. If a note says some records "could not be priced and were left out", fix those days and generate again.

How each intern's pay is worked out

- Only interns with at least one completed day in the period get a row.
- **Absent days** = standard days - days worked. Each absence: -PHP 80.00.
- **Late** and **undertime**: -PHP 10.00 per hour; **half days**: -PHP 40.00 (rules in Chapter 14).
- **Net Pay** is never below zero for any single day. Open **Calculation breakdown & payslip detail** to see every deduction by date.

Columns such as HRA, SSS, PhilHealth, HDMF and Overtime are kept for the payroll sheet layout and are always PHP 0.00 for interns. Bank / A/C shows "CASH / 0000" when empty.

Reviewing and adjusting a draft

1. Click **Edit** on the row. The window shows the attendance basic pay, late deduction and absent / half-day amounts.
2. Enter a **Manual Adjustment (PHP)** — positive to add, negative to deduct — and the required **Adjustment Reason**.
3. Check Total Earnings, Total Deductions and Net Pay, then click **Save Changes**.

Only the manual adjustment can be edited. To change days, late hours or half days, correct the attendance and generate again.

Finalizing

1. When a row is correct, click **Finalize** and confirm "Finalize payroll?". Or tick rows and click **Finalize selected (n)**.
2. The row shows **Finalized** and can no longer be edited. Backdated attendance can no longer be added inside that period.

> **Regenerating keeps finalized pay**
> Clicking **Generate from attendance** again for the same cutoff rebuilds only the **draft** rows; finalized rows are kept as they are (the yellow banner says "finalized records are kept"). Late time-outs are paid up to 5:00 PM, as the confirmation window says.

> **To redo a finalized row**
> Delete that row on purpose (its **Delete** button stays available, for example when an intern leaves), then generate again. Make a backup first.

Deleting payroll records

Click **Delete** on a row, or **Delete all records for this cutoff (n)** in the yellow banner, or tick rows and click **Delete selected (n)**. Attendance is not affected; you can generate again afterwards.

Printing the payroll PDF

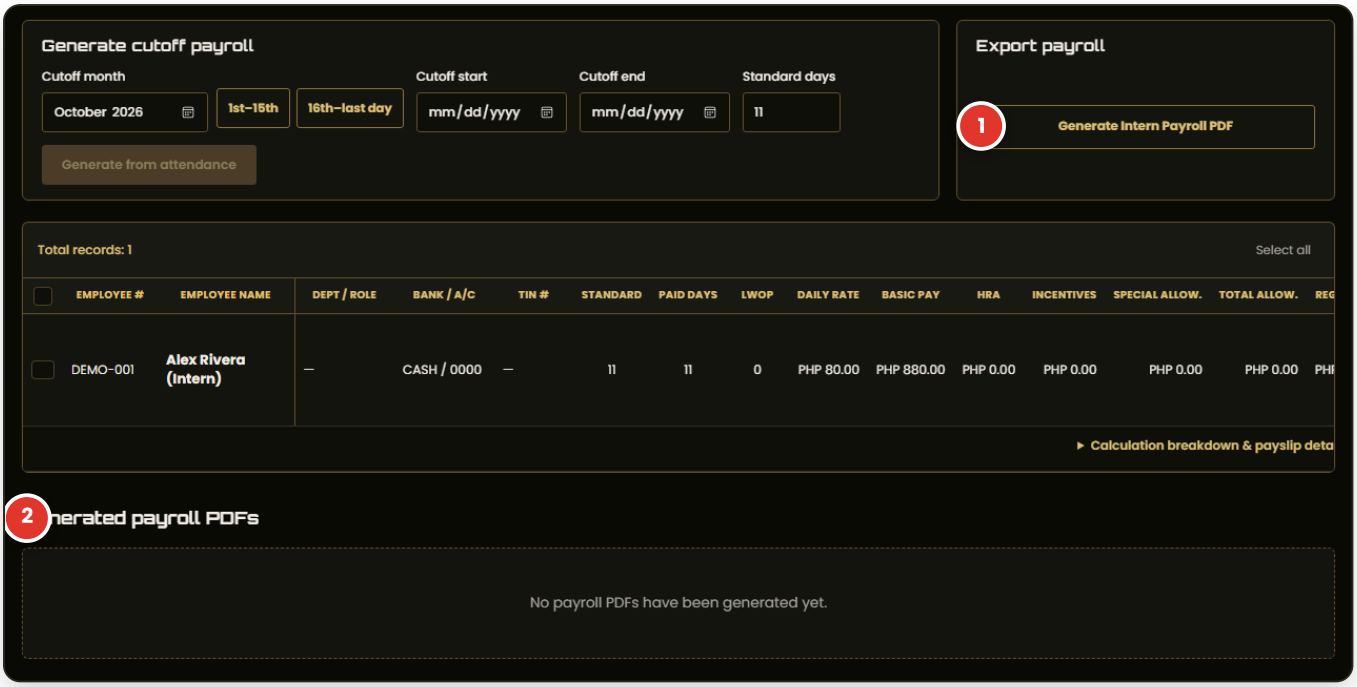


Figure 10-2. 1 **Generate Intern Payroll PDF** · 2 **Generated payroll PDFs** list.

1. Make sure the cutoff dates at the top are set to the period you want.
2. Click **Generate Intern Payroll PDF**. You see "Payroll PDF generated for *October 1–15, 2026*."
3. In **Generated payroll PDFs**, click **Open PDF** to view or print it, or **Show in Folder** to find the file.

The PDF contains	Details
Header	Company name, cutoff label, "Cut off 1-15th of the month / 16-31st".
One row per intern	Employee #, name, cut-off rate, daily rate, actual days, standard days, total compensation, late (10/hr), half day, undertime, absent, net compensation and a **Signature** column.
Grand Total	Sum of everyone's net pay, highlighted.
Layout	A4 landscape, up to 18 interns per page. Drafts and finalized rows are both included.

Files are named like `payroll_2026-10-16_09-30-12_intern.pdf` and saved in the app's **exports** folder (Appendix B). The list shows period, number of interns and total for each file.

If you see	Do this
"No payroll records to generate. Create and save a payroll first."	Generate the cutoff first (page "Payroll").
"No payroll records exist for these cutoff dates…"	Set the start/end dates to a cutoff you have generated, or generate it first.
"The file could not be found…"	The PDF was moved or deleted; generate it again.
"Administrator session expired…"	Unlock admin again.

CHAPTER 11

Bathroom key log (admin)

Admin → click **2 Bathroom Key Log** (or press 2). Check keys in and out by hand, view any day's log and correct times.

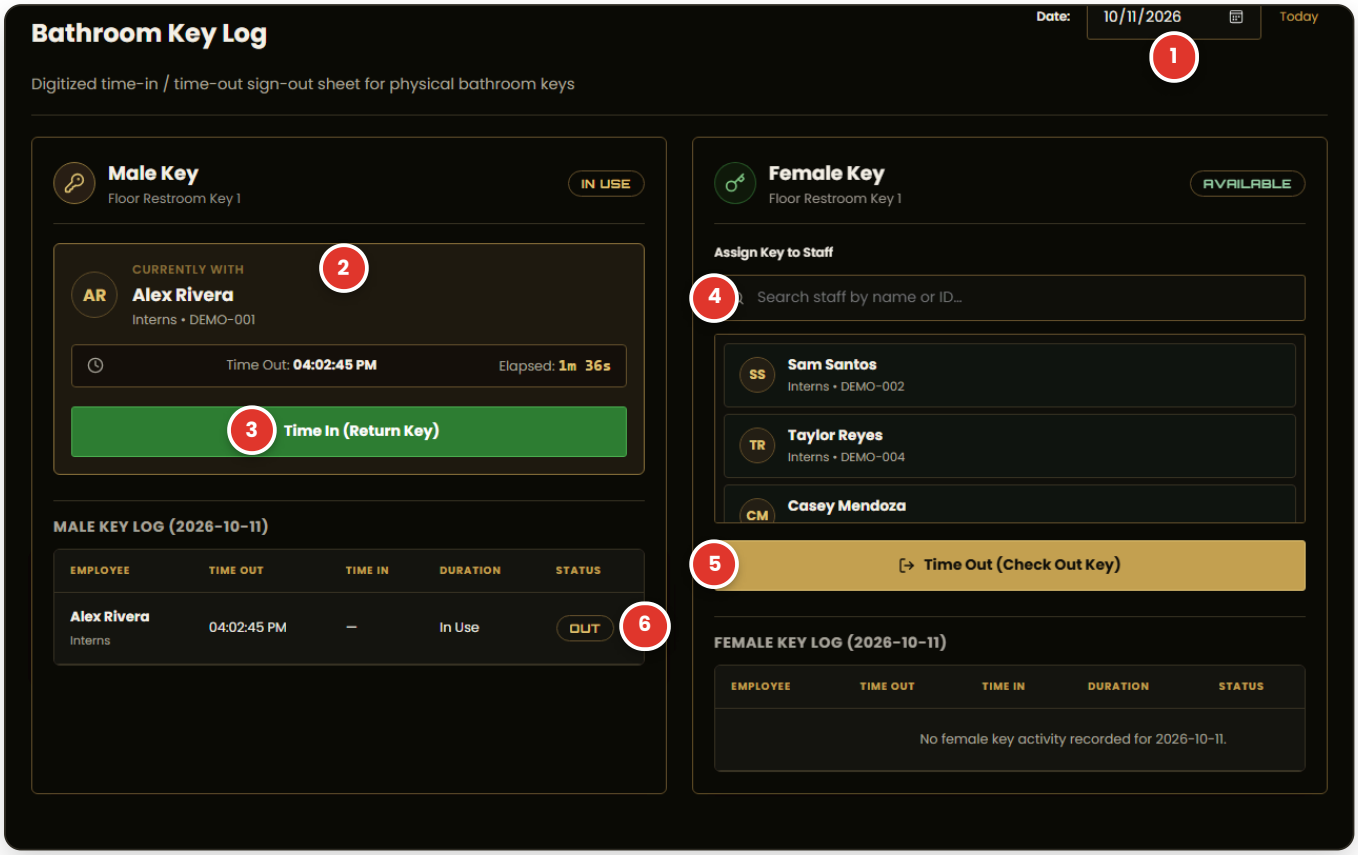


Figure 11-1. 1 date / Today · 2 key in use, with timer · 3 **Time In (Return Key)** · 4 staff search · 5 **Time Out (Check Out Key)** · 6 the day's key log.

Check a key out for someone

1. On the free key's panel, search for the person under **Assign Key to Staff** and click their name.
2. Click **Time Out (Check Out Key)**. You see "Checked out male key."

Return a key / correct a log

1. Click **Time In (Return Key)** on the panel of the key that is out.
2. To fix times, click **Edit** in the log table, change **Time Out (Checkout)**, **Time In (Return)** or **Notes / Reason**, and click **Save Changes**. Clearing the return time marks the key as OUT again.

Log columns: Employee, Time Out, Time In, Duration ("In Use" while out), Status (OUT / RETURNED). Return time cannot be earlier than checkout, and both must be on the log date.

CHAPTER 12

Data, backup and updates

Admin → **Data and backup**. All records live in one database on this computer. Back it up regularly.

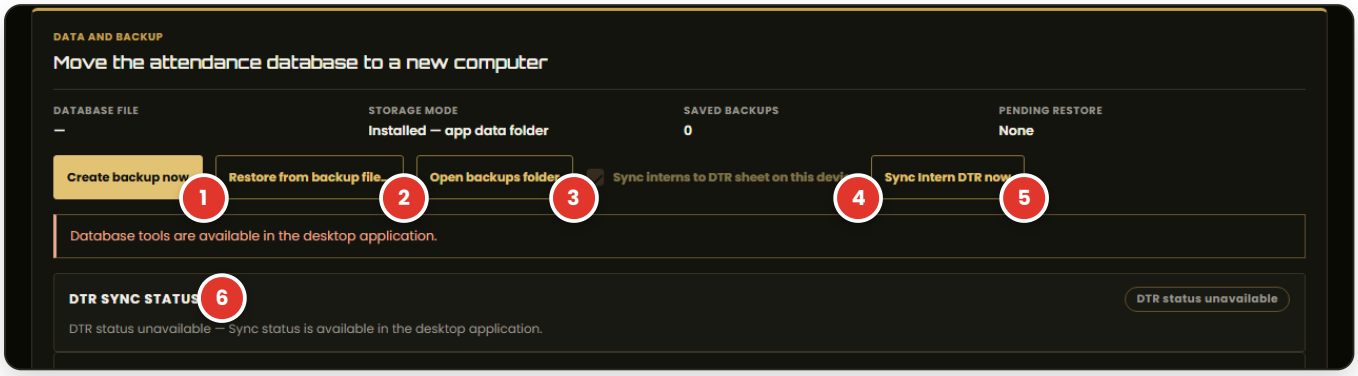


Figure 12-1. 1 **Create backup now** · 2 **Restore from backup file…** · 3 **Open backups folder** · 4 DTR sync on/off · 5 **Sync Intern DTR now** · 6 DTR sync status. (The red line appears only in the preview copy used for these pictures.)

The top of the tab shows the **Database file** location, **Storage mode** (Installed or Portable), number of **Saved backups** and any **Pending restore**.

Make a backup

1. Click **Create backup now**. It is safe while the kiosk is running.
2. You see "Backup created: attendance-backup-*date-time*.apbackup". Use **Open folder** or **Copy path** to find it.
3. Copy the file to a USB drive or shared folder kept away from this computer.

A backup file contains the database, photos, exports, sync state and settings. The app keeps the newest 10, and also makes one automatically every time the window is closed.

Restore a backup

1. Click **Restore from backup file…** and choose an `.apbackup` (or `.db`) file.
2. Confirm "Restore database from backup?". The app closes, restores and opens again.

> **Restoring replaces the current data**
> Everything on this computer is replaced by the backup. A copy of the old database is saved first as `backups/pre-restore-*.db`, so it can be recovered by IT. If a restore fails you see "Restore didn't go through — your current data is safe" with **Try again…** and **Dismiss**.

Moving to a new front-desk computer

1. On the **old** computer: Admin → Data and backup → **Create backup now**.
2. Copy the `attendance-backup-*.apbackup` file to a USB drive.
3. On the **new** computer: install the app (Chapter 2), then Admin → Data and backup → **Restore from backup file…** and pick the file.
4. The app restarts with all users, attendance, payroll and settings. Set a PIN again if needed — PINs are per computer — and test one card.

> **!** **Never copy the database by hand while the app is open**
> Always use Create backup / Restore.

Google Sheets DTR sync

If the office uses the Google Sheets daily time record, each tap is queued and copied in the background when internet is available. Taps are never lost while waiting.

- **Sync interns to DTR sheet on this device** — turn the copy on or off for this computer. When off, taps are kept in the queue and sent when it is turned back on.
- **Sync Intern DTR now** — send the queue immediately. If it stops part-way, a "Stopped at…" line appears with **Retry**.
- **DTR sync status** badge: *DTR idle* (all sent), *DTR pending*, *DTR paused*, *Syncing…* or *DTR attention*. "DTR sync failures: n" with **Retry sync now** means some items need another try.

Updates and automatic start

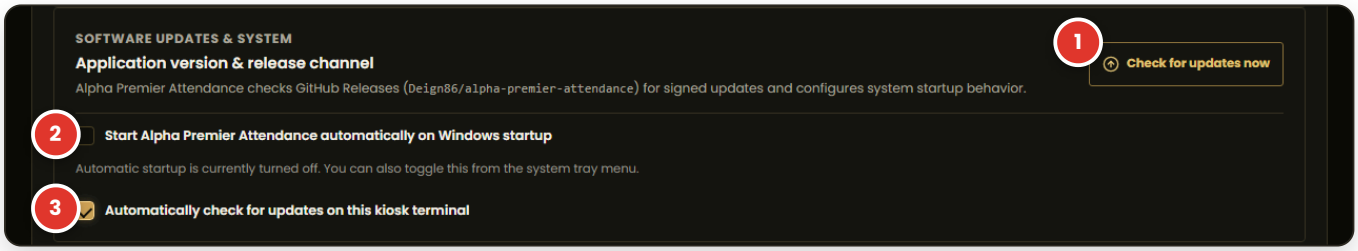


Figure 12-2. 1 **Check for updates now** · 2 start with Windows · 3 automatic update checks.

The app checks for a new version shortly after starting and every 8 hours. When one is ready, a banner says "Update available". Click **View & install**, read the notes, then **Download & restart** (or **Later**). Do not close the window while it says "Installing update…". Attendance data is kept.

> **✓** **Best time to update**
> Install updates outside office hours. Taps are not read while the app restarts.

CHAPTER 13

Voice announcements

Admin → **Voice announcements**. Control the spoken greetings. Everything runs on this computer; no internet is needed.

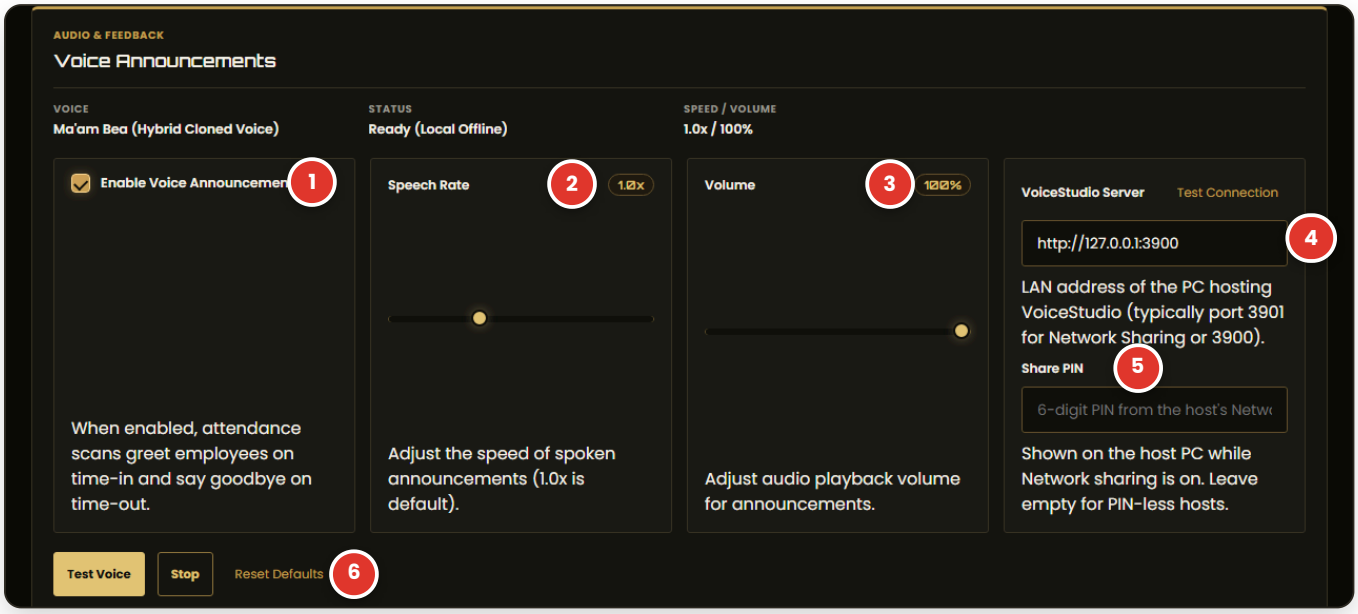


Figure 13-1. Voice settings.

#	Control	Use
1	**Enable Voice Announcements**	Turn greetings on or off.
2	**Speech Rate**	0.5× to 2.0× (1.0× is normal).
3	**Volume**	0% to 100%.
4	**VoiceStudio Server** + **Test Connection**	Address of the PC that makes the cloned "Ma'am Bea" name clips. Leave as set by IT.
5	**Share PIN**	6-digit PIN shown on the VoiceStudio PC, if it asks for one.
6	**Test Voice** / **Stop** / **Reset Defaults**	Play a sample, stop playback, or restore normal settings.

The status at the top shows the voice in use: **Ma'am Bea Ready**, **Piper TTS Ready**, **SAPI Ready** (Windows voice), **Voice Disabled** or **Offline TTS Unavailable**. Settings are saved on this computer.

> ✓ **No sound?**
> Click **Test Voice**. If you hear nothing, check the Windows volume and speakers. "Speech synthesis failed" means no voice engine is available — tell IT.

CHAPTER 14

Attendance and pay rules

These rules apply to attendance from **1 October 2026**. The app applies them automatically; this chapter explains the numbers you see.

Rule	How it works
Office hours	8:00 AM to 5:00 PM, Philippine time. A full day is 8 paid hours.
Lunch	12:00–1:00 PM is unpaid and never counted as work.
Daily rate	PHP 80.00 per day (PHP 10.00 per hour).
On time	Tapping in up to **8:00:59 AM**. Coming early earns nothing extra.
Late	From 8:01:00 AM, **every started hour** late costs PHP 10.00, counted from 8:00. 8:08 = 1 hour; 9:00:01 = 2 hours. There is no grace period.
Undertime	Each hour (or part) short of the 8-hour day costs PHP 10.00 — but hours already charged as late are not charged twice.
Half day	Arriving at **12:00 PM or later**, or leaving by 1:00 PM, counts as a half day: PHP 40.00 is deducted as undertime, not late.
Late time-out	Tapping out at **6:00 PM or later** marks the day LATE TIMEOUT for correction. Pay is worked out as if the time-out were 5:00 PM. No overtime.
Minimum	A day's pay never goes below PHP 0.00.
Absences	Each standard day not worked in the cutoff costs PHP 80.00.

Worked examples

Time in	Time out	Late	Undertime	Day's pay
8:00 AM	5:00 PM	—	—	**PHP 80.00**
8:00:59 AM	5:00 PM	— (on time)	—	**PHP 80.00**
8:08 AM	5:00 PM	1 h (-10)	—	**PHP 70.00**
10:30 AM	5:00 PM	3 h (-30)	—	**PHP 50.00**
9:30 AM	4:00 PM	2 h (-20)	1 h (-10)	**PHP 50.00**
8:00 AM	4:00 PM	—	1 h (-10)	**PHP 70.00**
8:00 AM	12:00 PM	—	half day (-40)	**PHP 40.00**
12:30 PM	5:00 PM	— (afternoon)	half day (-40)	**PHP 40.00**
8:00 AM	6:30 PM	—	— (paid to 5:00 PM)	**PHP 80.00** FIX

These examples match the payroll engine's official test cases.

> **Days before 1 October 2026**
> Older days keep the previous rules: once per Monday–Sunday week, an arrival up to 8:15 AM was free ("Grace Period (GP)"), and later arrivals were rounded differently. The app remembers which rules priced each day, so past pay never changes.

CHAPTER 15

Troubleshooting

Find the problem in the left column. Try the fixes in order.

Problem	Likely cause	Fix
Tapping a card does nothing	The kiosk window is not in front, or the app is hidden in the tray.	Click once on the kiosk window (or the tray icon) and tap again. Close other programs in front of it.
Still nothing; pill shows Offline/Error	Reader unplugged or faulty.	Unplug and replug the USB reader; try another USB port. Use **Manual entry** meanwhile.
"Card not recognized — check the reader format."	The reader sends a different number format.	Tap again. If it keeps happening, IT must match the reader settings (`[scanner]` in `config.toml`).
Digits appear in another program (e.g. Notepad)	That program had the focus.	Delete the digits there, click the kiosk window and tap again.
Wrong person's name appears	The card is linked to the wrong profile.	Admin → Users and RFID → search the card number → **Edit**. Fix the day in Attendance corrections.
Intern tapped out by mistake	The second tap is always a time-out.	Admin → Attendance corrections → clear **Time out** with × → **Save**.
Forgot to tap out	Day stays WORKING.	Enter the real time-out in Attendance corrections and **Save**.
Kiosk says "Gender is not set for this card"	The profile has no gender.	Edit the user and set **Gender**.
Can't unlock admin	Wrong or no PIN.	Tap an admin card, or use **Forgot PIN?** (Chapter 7).
Kicked out of admin	The 15-minute session ended.	Unlock again. Save your work before 15 minutes.
"This record was changed by another update"	Someone saved the row first.	The list reloads; check the times and click **Save** again.
Payroll is missing an intern	No completed day in the cutoff.	Fix that intern's attendance, then generate again.
Payroll shows too many absences	Standard days include a holiday.	Lower **Standard days** and generate again (before finalizing).
No voice	Muted or voice disabled.	Check Windows volume, then Admin → Voice announcements → **Test Voice**.

Live viewer problems (for IT)

Problem	Fix
Phones stay on "Connecting…"	Allow port 4173 in Windows Firewall. In PowerShell **as Administrator**: `netsh advfirewall firewall add rule name="Alpha Premier Live Attendance" dir=in action=allow protocol=TCP localport=4173`
Network profile shows **Public**	Windows Settings → Network & internet → Wi-Fi → the office network → set **Private network**.
"No reachable office LAN IP was detected."	Connect the kiosk PC to the office Wi-Fi, then **Refresh status**.
"Port 4173 is already in use."	Another program uses the port. Restart the PC, or IT changes `[lan] port`.
"Outside the office network"	The device is not on the office Wi-Fi (or the guest Wi-Fi isolates devices). Join the main office network.
"Viewer access required"	Add `?token=` + the viewer password to the link.

Frequently asked questions

Does the kiosk need internet?

No. Taps, admin and payroll all work offline. Internet is only for updates, PIN-reset email, voice clip creation and Google Sheets.

What happens if the power goes out?

Every tap is saved the moment it is shown on screen. When the PC comes back, the app starts by itself (if automatic start is on).

Can two computers record attendance?

No. The front-desk computer is the only one that records. Other devices can only view through the live viewer.

Can an intern see their own pay?

Not in the app. Administrators print the Intern Payroll PDF and share it as the office decides.

Why does a time show "Late (57m)" but only 1 hour deducted?

The Arrival column shows minutes late; pay deducts per started hour (Chapter 14).

We changed the pay rules. Will past pay change?

No. Each day remembers the rules that priced it. New rules need a software update from IT.

Where are my files?

See Appendix B. In Admin, **Show in Folder** and **Open backups folder** take you straight there.

APPENDIX A

On-screen messages

Messages not already explained in the chapters, in alphabetical order.

Message	Meaning / action
Admin session expired. Please unlock again.	15 minutes passed. Unlock again.
Cannot create attendance for an inactive user.	Reactivate the user first.
Choose a JPEG, PNG, or WebP photo.	Use one of those picture types.
Enter the User ID before uploading a photo.	Fill in User ID first.
Gender is not set for this card. Ask an administrator to set it in Users and RFID.	Set Gender on the profile; then the restroom key works.
Live attendance is temporarily unavailable.	The list could not refresh; it keeps showing the last data and retries.
No attendance matches the active filters; nothing was exported.	Change the date or filters.
Photo file must be under 25 MB.	Use a smaller picture.
This photo could not be compressed below the 500 KB upload limit.	Crop or resize the picture and try again.
Select a cutoff period first. / Cutoff start must be on or before cutoff end.	Set the payroll dates correctly.
Setup session expired. Unlock again to continue.	Unlock the Admin setup window again.
That User ID or RFID card is already in use by another user.	Use a different ID, or edit the existing user.
The User ID may only contain letters, numbers, dashes, underscores, and dots.	Remove spaces and other symbols.
The administrator PIN or admin RFID card is invalid.	Shown in the kiosk Admin setup window; retype the PIN or tap a registered admin card.
The selected file is not a valid Alpha Premier attendance database.	Choose an `.apbackup` made by this app.
This key is currently in use. Please return it before checking out again.	Return the key first.
Time-out cannot precede time-in.	Check AM/PM and the order of times.
Unable to connect to the update server…	No internet; try again later.
Unable to load administrator data.	Reload the page or restart the app.
USER_HAS_RECORDS … Deactivate the user instead.	Set the user Inactive rather than deleting.
Voice regeneration failed.	Check the VoiceStudio connection (Chapter 13) and try again.
Messages in CAPITALS_WITH_UNDERSCORES	A technical code shown as-is. Note it down and tell IT; your data is usually unaffected.

APPENDIX B

Files, shortcuts and glossary

Where things are saved

Item	Normal installation
Database, photos	`%LOCALAPPDATA%\com.alphapremier.attendance\` (`attendance.db` , `photos\`)
Backups	`…\com.alphapremier.attendance\backups\`
Payroll PDFs	`…\com.alphapremier.attendance\exports\`
Settings (IT)	`%APPDATA%\com.alphapremier.attendance\config.toml`

Portable copies (a `portable.dat` file next to the program) keep everything in a `Data\` folder beside the `.exe`. Paste a path into the File Explorer address bar to open it.

Keyboard shortcuts

Key	Where	Action
`1`	Kiosk, Admin	Attendance mode
`2`	Kiosk, Admin	Bathroom Key Log mode
`Enter`	Manual entry, unlock boxes	Record / unlock
`Esc`	Pop-up windows	Close the window

Glossary

Term	Meaning
Admin RFID card	A card that unlocks admin and assists others; it never records its own attendance.
Assisted	Attendance recorded by an admin card for someone without a working card.
Backdated	A past day added with **Add missed attendance**, with a reason.
Cutoff	A pay period: 1st–15th or 16th–last day of the month.
DTR	Daily Time Record — the optional Google Sheets copy.
Draft / Finalized	Payroll that can still be edited / payroll that is frozen for editing.
Kiosk	The always-on tap screen at the front desk.
LAN viewer	The read-only attendance page for devices on the office Wi-Fi.
LWOP	Leave without pay (absent days) in the payroll table.
RFID UID	The number stored on a card, usually 10 digits.
Standard days	Working days expected in a cutoff (weekdays minus holidays).
Tray	The icons beside the Windows clock, where the hidden app lives.

Quick Reference Card

Print this page and keep it at the front desk.

Interns — every day

1. **Arrive:** tap your card once. Check your photo and "Time In recorded successfully."
2. **Leave (before 6:00 PM):** tap again. Check "Time Out recorded successfully."
3. **Restroom key:** press `2`, tap to take the key, tap again to return it, press `1`.
4. **Forgot your card?** Ask an administrator for an assisted time in. Never use someone else's card.

Front desk — if something goes wrong

Tap does nothing	Click the kiosk window, tap again. Replug the reader.
"Not registered"	Admin clicks **Setup this card**.
"Scanned too recently"	Already saved — do nothing.
Reader broken	**Manual entry** → type card number → `Enter`.
Window disappeared	Click the tray icon by the clock.

Administrators — routine

Daily	Attendance corrections → **Late Time-out** chip → fix and **Save**. Lock when done.
Each cutoff (16th & 1st)	Fix attendance → Payroll → month + half → adjust Standard days for holidays → **Generate** → review → **Finalize** → **Generate Intern Payroll PDF**.
Weekly	Data and backup → **Create backup now** → copy to USB.
New intern	Kiosk → **Admin setup** → unlock → tap card → fill details incl. gender → **Save user**.
Intern leaves	Users → **Edit** → Status **Inactive** → Save (don't delete).
Forgot PIN	Tap admin card, or **Forgot PIN?** → code from company inbox.

Office hours 8:00 AM–5:00 PM · Lunch 12–1 unpaid · PHP 80/day · Late & undertime PHP 10/hour · Half day PHP 40 · Admin session 15 min.