



# SolaX Cloud API

for End-user

Version: V 1.0

## Version Information

Version	Editor	Time	Remark
V1.0	Jingke Li	2020-06-30	Creating

## Content

1	Introduction .....	3
2	Interface format and protocol .....	3
3	Interface permission .....	3
4	Interface content .....	4
	4.1 Request address.....	4
	4.2 Request parameter .....	4
	4.3 Output parameters .....	4
	4.4 Example.....	5
	Appendix .....	6

# 1 Introduction

Solax API interface document is a guide for clients to obtaining data from Solax cloud through Http protocol. Clients can use the Solax API service to obtain real-time info of your inverters.

## 2 Interface format and protocol

Solax API interface accesses Solax cloud platform data through the Http protocol, and the data is returned in JSON format.

Interface address: <https://www.solaxcloud.com:4443/proxy/api/>

Return object:

Parameter name	Type	Description
exception	String	Response from server
result	Object	Data return
success	Boolean	Whether the data request is successful

Table 1

## 3 Interface permission

User can get a specific range of information through the granted tokenID. Please obtain your tokenID on the API page of Solaxcloud.

## 4 Interface content

### 4.1 Request address

<https://www.solaxcloud.com:4443/proxy/api/getRealtimeInfo.do?tokenId={tokenId}&sn={sn}>

### 4.2 Request parameter

Parameter name	Importance	Type	Length	Description	Remark
sn	Required	STRING	10	Registration No. (module SN)	
tokenId	Required	STRING	23	tokenId from Solax	

Table 2

### 4.3 Output parameters

The Result section of the output parameters is described below.


API items	Description	Accuracy	Unit
<b>inverterSN</b>	Unique identifier of inverter (Serial No.)	-	-
<b>sn</b>	Unique identifier of communication module (Registration No.)	-	-
<b>acpower</b>	i[:].inverter.AC.power.total	1	W
<b>yieldtoday</b>	i[:].inverter.AC.energy.out.daily	0.1	KWh
<b>yieldtotal</b>	i[:].inverter.AC.energy.out.total	0.1	KWh
<b>feedinpower</b>	GCP.power.total	1	W
<b>feedinenergy</b>	GCP.energy.toGrid.total	0.01	KWh
<b>consumeenergy</b>	GCP.energy.fromGrid.total	0.01	KWh
<b>feedinpowerM2</b>	i[:].address2meter.AC.power.total	1	W
<b>soc</b>	i[:].inverter.DC.battery.energy.SOC	1	%
<b>peps1</b>	i[:].inverter.AC.EPS.power.R	1	W
<b>peps2</b>	i[:].inverter.AC.EPS.power.S	1	W
<b>peps3</b>	i[:].inverter.AC.EPS.power.T	1	W
<b>inverterType</b>	Inverter type, details refer to Table 4 in appendix	-	-
<b>inverterStatus</b>	Inverter status, details refer to Table 5 in appendix	-	-
<b>uploadTime</b>	Update time	(format 2016-10-26 17:33:01)	-

Table 3

## 4.4 Example

<https://www.solaxcloud.com:4443/proxy/api/getRealtimeInfo.do?tokenId=20200722185111234567890&sn=ABCDEFGHIJ>

### Output:

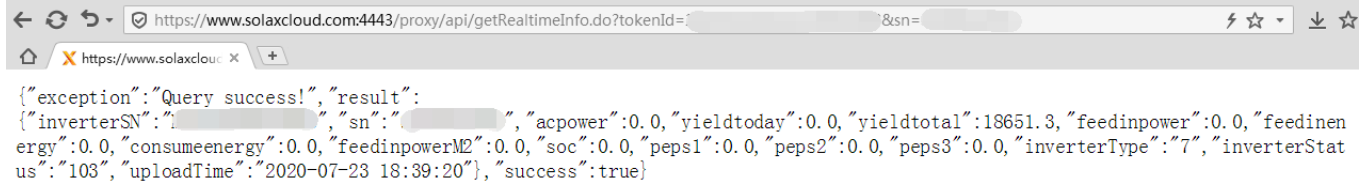

```
{
  "exception": "Query success!",
  "result": {
    "inverterSN": "...",
    "sn": "...",
    "acpower": 0.0,
    "yieldtoday": 0.0,
    "yieldtotal": 18651.3,
    "feedinpower": 0.0,
    "feedinenergy": 0.0,
    "consumeenergy": 0.0,
    "feedinpowerM2": 0.0,
    "soc": 0.0,
    "peps1": 0.0,
    "peps2": 0.0,
    "peps3": 0.0,
    "inverterType": "7",
    "inverterStatus": "103",
    "uploadTime": "2020-07-23 18:39:20"
  },
  "success": true
}
```

# Appendix

Inverter type	
Type code	Inverter type
1	X1-LX
2	X-Hybrid
3	X1-Hybrid/Fit
4	X1-Boost/Air/Mini
5	X3-Hybrid/Fit
6	X3-20K/30K
7	X3-MIC/PRO
8	X1-Smart
9	X1-AC
10	A1-Hybrid
11	A1-Fit
12	A1-Grid
13	J1-ESS

Table 4

Inverter status	
Status code	Inverter status
100	Wait Mode
101	Check Mode
102	Normal Mode
103	Fault Mode
104	Permanent Fault Mode
105	Update Mode
106	EPS Check Mode
107	EPS Mode
108	Self-Test Mode
109	Idle Mode
110	Standby Mode
111	Pv Wake Up Bat Mode
112	Gen Check Mode
113	Gen Run Mode

Table 5

## Communication

Solax Power Co., Ltd.

A: No. 525, Xixi Road, Hangzhou, Zhejiang Province, China, 310007

T: +86-571-56260033

W: [www.solaxpower.com](http://www.solaxpower.com)

E: [service@solaxpower.com](mailto:service@solaxpower.com)