


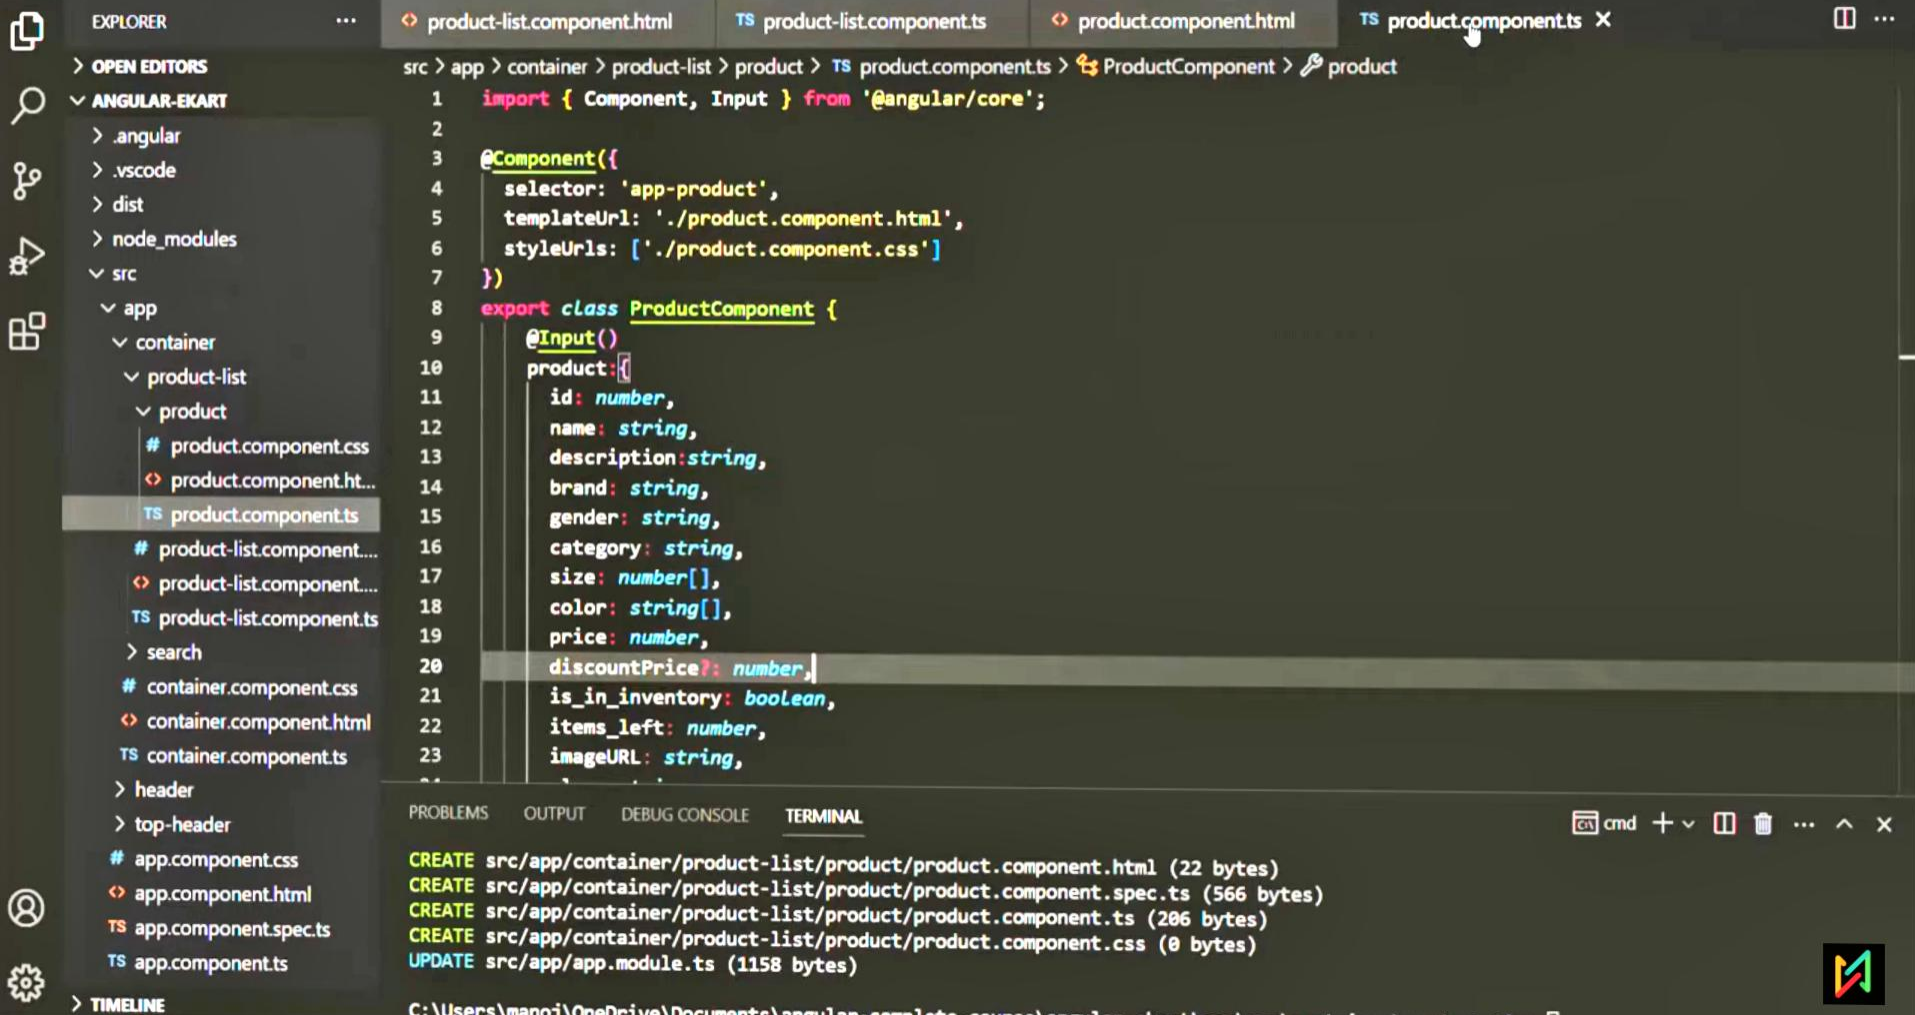

The image shows the Visual Studio Code interface with the following components:

- EXPLORER**: Shows the file structure of the project. The `src` folder is expanded, showing `app`, `container`, `product-list`, and `product`. The `product` folder is selected, showing `product.component.css`, `product.component.html`, and `product.component.ts`.
- EDITOR**: Displays the `product.component.ts` file. The code is as follows:

```
src > app > container > product-list > product > TS product.component.ts > ProductComponent > product
1  import { Component, Input } from '@angular/core';
2
3  @Component({
4    selector: 'app-product',
5    templateUrl: './product.component.html',
6    styleUrls: ['./product.component.css']
7  })
8  export class ProductComponent {
9    @Input()
10    product: {
11      id: number,
12      name: string,
13      description: string,
14      brand: string,
15      gender: string,
16      category: string,
17      size: number[],
18      color: string[],
19      price: number,
20      discountPrice?: number,
21      is_in_inventory: boolean,
22      items_left: number,
23      imageURL: string,
```
- TERMINAL**: Shows the output of the `ng build` command. The output is as follows:

```
CREATE src/app/container/product-list/product/product.component.html (22 bytes)
CREATE src/app/container/product-list/product/product.component.spec.ts (566 bytes)
CREATE src/app/container/product-list/product/product.component.ts (286 bytes)
CREATE src/app/container/product-list/product/product.component.css (0 bytes)
UPDATE src/app/app.module.ts (1158 bytes)
```

product-list  
(Parent Component)

```
<app-product [product] ="">
```

Custom property binding  
& @Input() Decorator

product  
(Child Component)

```
@Input()  
product;
```



product-list.component.html • TS product-list.component.ts filter.component.html TS filter.component.ts

EXPLORED

OPEN EDITORS

ANGULAR-EKART

- .angular
- .vscode
- dist
- node\_modules
- src
  - app
    - container
      - product-list
        - filter
          - filter.component.css
          - filter.component.html
          - TS filter.component.ts
          - product
          - product-list.component...
          - product-list.component...
          - TS product-list.component.ts
  - search
    - search.component.css
    - search.component.html
    - TS search.component.ts
    - container.component.css
    - container.component.html
    - TS container.component.ts
    - header
    - top-header

src > app > container > product-list > product-list.component.html > app-filter


Go to component

```
1 <app-filter [a11]="totalProductCount" [inStock]=""></app-filter>
2 <div class="ekart--products--container">
3   <app-product *ngFor="let prod of products" [product]="prod"></app-product>
4 </div>
5
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

```
CREATE src/app/container/product-list/filter/filter.component.html (21 bytes)
CREATE src/app/container/product-list/filter/filter.component.spec.ts (559 bytes)
CREATE src/app/container/product-list/filter/filter.component.ts (202 bytes)
CREATE src/app/container/product-list/filter/filter.component.css (0 bytes)
UPDATE src/app/app.module.ts (1263 bytes)
```

cmd  
cmd

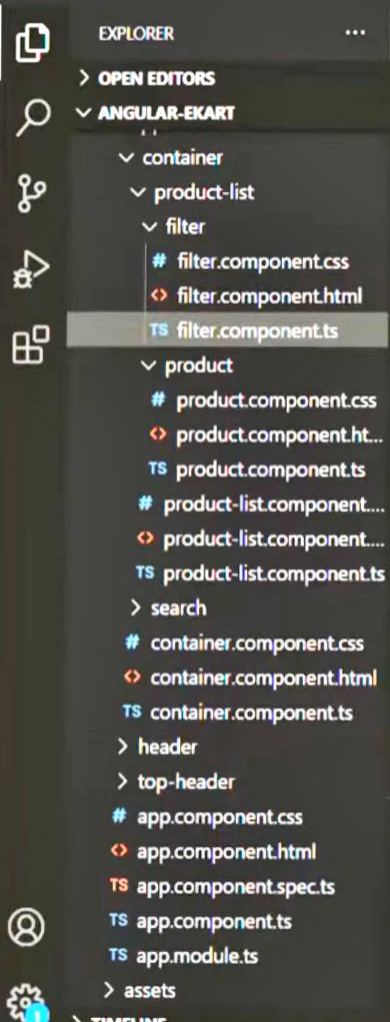

```
src > app > container > product-list > filter > TS filter.component.ts > FilterComponent > selectedFilterRadioButton
1  import { Component, Input } from '@angular/core';
2
3  @Component({
4    selector: 'app-filter',
5    templateUrl: './filter.component.html',
6    styleUrls: ['./filter.component.css']
7  })
8  export class FilterComponent {
9    @Input()
10    all: number = 0;
11
12    @Input()
13    inStock: number = 0;
14
15    @Input()
16    outOfStock: number = 0;
17
18    selectedFilterRadioButton: string = 'all';
19  }
20
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

```
CREATE src/app/container/product-list/filter/filter.component.html (21 bytes)
CREATE src/app/container/product-list/filter/filter.component.spec.ts (559 bytes)
CREATE src/app/container/product-list/filter/filter.component.ts (202 bytes)
CREATE src/app/container/product-list/filter/filter.component.css (0 bytes)
UPDATE src/app/app.module.ts (1263 bytes)
```

+ v ... ^ x

cmd

cmd



22% OFF



product-list  
(Parent Component)



Custom event binding  
& @Output() Decorator

filter  
(Child Component)



FileEditSelectionViewGoRunTerminalHelp

product-list.component.htmlfilter.component.html 3TS filter.component.ts

src > app > container > product-list > filter > filter.component.html > div.filter-container > input

7value="all"  
8[(ngModel)]="selectedFilterRadioButton"  
9(change)="onSelectedFilterRadioButtonChanged()  
10/  
11<span>{{'All ('+all+'')}}</span>  
12  
13<input  
14type="radio"  
15name="filter"  
16value="true"  
17[(ngModel)]="selectedFilterRadioButton"  
18(change)="onSelectedFilterRadioButtonChanged()  
19/  
20<span>{{'In Stock('+inStock+'')}}</span>  
21  
22<input  
23type="radio"  
24name="filter"  
25value="false"  
26[(ngModel)]="selectedFilterRadioButton"  
27(change)="onSelectedFilterRadioButtonChanged()  
28/  
29<span>{{'Out Of Stock('+outOfStock+'')}}</span>

PROBLEMSOUTPUTDEBUG CONSOLETERMINAL

CREATE src/app/container/product-list/filter/filter.component.html (21 bytes)  
CREATE src/app/container/product-list/filter/filter.component.spec.ts (559 bytes)  
CREATE src/app/container/product-list/filter/filter.component.ts (202 bytes)  
CREATE src/app/container/product-list/filter/filter.component.css (0 bytes)  
UPDATE src/app/app.module.ts (1263 bytes)

C:\Users\manoj\OneDrive\Documents\angular-complete-course\angular-ekart\src\app\container\product-list\

EXPLORER

OPEN EDITORS

ANGULAR-EKART

container

product-list

filter

# filter.component.css

filter.component.... 3

TS filter.component.ts

product

# product.component.css

product.component.ht...

TS product.component.ts

# product-list.component....

product-list.component....

TS product-list.component.ts

search

# container.component.css

container.component.html

TS container.component.ts

header

top-header

# app.component.css

app.component.html

TS app.component.spec.ts

TS app.component.ts

TS app.module.ts

assets

TIMELINE

cmd

cmd

File

Edit

Selection

View

Go

Run

Terminal

Help

filter.component.ts - angular-ekart - Visual Studio Code

product-list.component.html

TS product-list.component.ts

filter.component.html

TS filter.component.ts 1

EXPLOLER

> OPEN EDITORS

> ANGULAR-EKART

container

product-list

filter

# filter.component.css

filter.component.html

TS filter.component.ts 1

product

# product.component.css

product.component.ht...

TS product.component.ts

# product-list.component....

product-list.component....

TS product-list.component.ts

> search

# container.component.css

container.component.html

TS container.component.ts

> header

> top-header

# app.component.css

app.component.html

TS app.component.spec.ts

TS app.component.ts

TS app.module.ts

> assets

> TIMELINE

src > app > container > product-list > filter > TS filter.component.ts > ...

1

import { Component, Input, EventEmitter, Output } from '@angular/core';

2

3

@Component({

4

selector: 'app-filter',

5

templateUrl: './filter.component.html',

6

styleUrls: ['./filter.component.css']

7

})

8

export class FilterComponent {

9

@Input()

10

all: number = 0;

11

12

@Input()

13

inStock: number = 0;

14

15

@Input()

16

outOfStock: number = 0;

17

18

@Output

19

selectedFilterRadioButtonChanged: EventEmitter<string> = new EventEmitter<string>();

20

21

selectedFilterRadioButton: string = 'all';

22

23

onSelectedFilterRadioButtonChanged(){

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

CREATE src/app/container/product-list/filter/filter.component.html (21 bytes)

CREATE src/app/container/product-list/filter/filter.component.spec.ts (559 bytes)

CREATE src/app/container/product-list/filter/filter.component.ts (202 bytes)

CREATE src/app/container/product-list/filter/filter.component.css (0 bytes)

UPDATE src/app/app.module.ts (1263 bytes)

C:\Users\manoj\OneDrive\Documents\angular-complete-course\angular-ekart\src\app\container\product-list\

cmd

cmd



File

Edit

Selection

View

Go

Run

Terminal

Help

product-list.component.html - angular-ekart - Visual Studio Code

EXPLORER

...

> OPEN EDITORS

...

> ANGULAR-EKART

...

> container

> product-list

> filter

# filter.component.css

<> filter.component.html

TS filter.component.ts

> product

# product.component.css

<> product.component.html

TS product.component.ts

# product-list.component.html

# product-list.component.ts

<> product-list.component.html 1

TS product-list.component.ts 1

> search

# container.component.css

<> container.component.html

TS container.component.ts

> header

> top-header

# app.component.css

<> app.component.html

TS app.component.spec.ts

TS app.component.ts

TS app.module.ts

> assets

> TIMELINE

<> product-list.component.html 1

TS product-list.component.ts 1

<> filter.component.html

TS filter.component.ts

src > app > container > product-list > <> product-list.component.html > app-filter

Go to component

1 <app-filter

2 [all]="totalProductCount"

3 [inStock]="totalProductInStock"

4 [outOfStock]="totalProductOutOfStock"

5 (selectedFilterRadioButtonChanged)="onFilterChanged(\$event)">

6 </app-filter>

7 <div class="ekart--products--container">

8 <app-product \*ngFor="let prod of products" [product]="prod"></app-product>

9 </div>

10

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

CREATE src/app/container/product-list/filter/filter.component.html (21 bytes)

CREATE src/app/container/product-list/filter/filter.component.spec.ts (559 bytes)

CREATE src/app/container/product-list/filter/filter.component.ts (202 bytes)

CREATE src/app/container/product-list/filter/filter.component.css (0 bytes)

UPDATE src/app/app.module.ts (1263 bytes)

C:\Users\manoj\OneDrive\Documents\angular-complete-course\angular-ekart\src\app\container\product-list>

cmd

cmd

File

Edit

Selection

View

Go

Run

Terminal

Help

filter.component.ts - angular-ekart - Visual Studio Code

product-list.component.html

TS product-list.component.ts

filter.component.html

TS filter.component.ts X

EXPLORER

> OPEN EDITORS

> ANGULAR-EKART

> container

> product-list

> filter

# filter.component.css

filter.component.html

TS filter.component.ts

> product

# product.component.css

product.component.ht...

TS product.component.ts

# product-list.component....

product-list.component....

TS product-list.component.ts

> search

# container.component.css

container.component.html

TS container.component.ts

> header

> top-header

# app.component.css

app.component.html

TS app.component.spec.ts

TS app.component.ts

TS app.module.ts

> assets

> TIMELINE

src > app > container > product-list > filter > TS filter.component.ts > FilterComponent > selectedFilterRadioButton

4 selector: 'app-filter',

5 templateUrl: './filter.component.html',

6 styleUrls: ['./filter.component.css']

7 }}

8 export class FilterComponent {

9 @Input()

10 all: number = 0;

11

12 @Input()

13 inStock: number = 0;

14

15 @Input()

16 outOfStock: number = 0;

17

18 @Output()

19 selectedFilterRadioButtonChanged: EventEmitter<string> = new EventEmitter<string>();

20

21 selectedFilterRadioButton: string = 'all';

22

23 onSelectedFilterRadioButtonChanged(){

24 this.selectedFilterRadioButtonChanged.emit(this.selectedFilterRadioButton);

25 }

26 }

27

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

CREATE src/app/container/product-list/filter/filter.component.html (21 bytes)

CREATE src/app/container/product-list/filter/filter.component.spec.ts (559 bytes)

CREATE src/app/container/product-list/filter/filter.component.ts (202 bytes)


CREATE src/app/container/product-list/filter/filter.component.css (0 bytes)

UPDATE src/app/app.module.ts (1263 bytes)

C:\Users\manoj\OneDrive\Documents\angular-complete-course\angular-ekart\src\app\container\product-list>

cmd

cmd

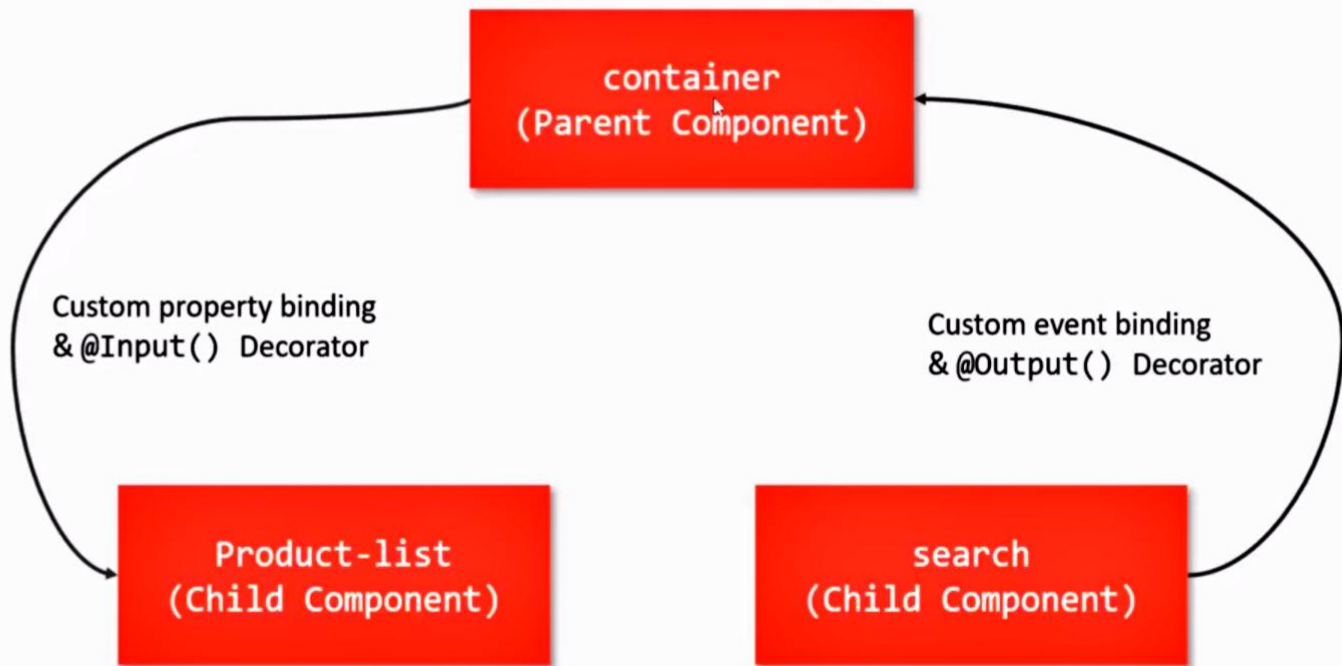





EXPLORER

OPEN EDITORS

ANGULAR-EKART

- .angular
- .vscode
- dist
- node\_modules
- src
  - app
    - container
      - product-list
        - filter
        - product
        - product-list.component....
        - product-list.component....
        - product-list.component.ts
      - search
        - search.component.css
        - search.component... 1
        - search.component.ts
      - container.component.css
      - container.component.html
      - container.component.ts
    - header
    - top-header
    - app.component.css
    - app.component.html
    - app.component.spec.ts

TIMELINE

search.component.html 1 • TS search.component.ts •

src > app > container > search > search.component.html > div.ekart--search--product > input.ekart-search-product-input

Go to component


```

1 <div class="ekart--search--product">
2   <input class="ekart-search-product-input" #searchInput>
3   <button class="btn btn-search" (click)="updateSearchText(searchInput)">Search</button>
4 </div>
5 <div class="ekart-search-result-for">
6   <p *ngIf="searchText != ''"><strong>Search result for:</strong> {{ searchText }}</p>
7 </div>
8
9 <!-- false, '', null, undefined, 0 -->
10

```

(reference) searchInput: HTMLInputElement



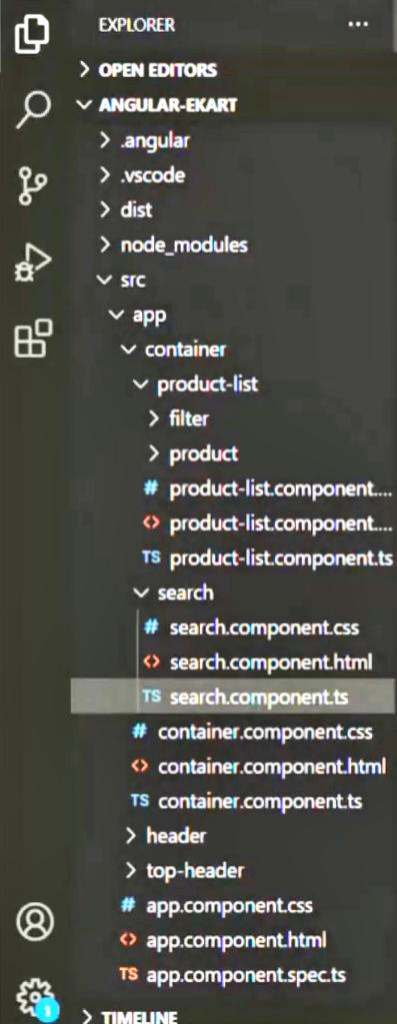

search.component.html TS search.component.ts X

```
src > app > container > search > TS search.component.ts > SearchComponent > updateSearchText
1  import { Component, EventEmitter, Output } from '@angular/core';
2
3  @Component({
4    selector: 'app-search',
5    templateUrl: './search.component.html',
6    styleUrls: ['./search.component.css']
7  })
8  export class SearchComponent {
9    searchText: string = '';
10
11    //1. Create an event
12    @Output()
13    searchTextChanged: EventEmitter<string> = new EventEmitter<string>();
14
15    onSearchTextChanged(){
16
17    }
18
19    updateSearchText(inputEL: HTMLInputElement){
20      //this.searchText = event.target.value;
21      //console.log(inputEl.value);
22      this.searchText = inputEL.value;
23      this.searchTextChanged.emit(this.searchText)
24    }
25  }
26
```



#30 Reference Variable on Component | Angular Component & Directives | A Complete Angula...

FileEditSelectionViewGoRunTerminalHelp

EXPLORER

2 unsaved

ANGULAR-EKART

angular

.vscode

dist

node\_modules

src

app

container

product-list

filter

product

product.component.css

product.component.ht...

product.component.ts

product-list.component....

product-list.component....

product-list.component.ts

search

container.component.css

container.component.html

container.component.ts

header

Models

Products.ts

top-header

app.component.css

TIMELINE

product.component.ts - angular-ekart - Visual Studio Code

product-list.component.ts

Products

product.component.ts

src > app > container > product-list > product > TS product.component.ts > ...

1import { Component, Input } from '@angular/core';

2import { Product } from '../Models/Product'

3

4@Component({

5  selector: 'app-product',

6  templateUrl: './product.component.html',

7  styleUrls: ['./product.component.css']

8})

9export class ProductComponent {

10  @Input()

11  product:{

12    id: number,

13    name: string,

14    description:string,

15    brand: string,

16    gender: string,

17    category: string,

18    size: number[],

19    color: string[],

20    price: number,

21    discountPrice?: number,

22    is\_in\_inventory: boolean,

23    items\_left: number,

24    imageUrl: string,

25    slug: string

26  };

27}

28

4:07 / 14:15

Scroll for details

HD

FileEditSelectionViewGoRunTerminalHelp

container.component.html - angular-ekart - Visual Studio Code

EXPLORER

OPEN EDITORS

ANGULAR-EKART

node\_modules

src

app

container

product-detail

# product-detail.compone...

< product-detail.compone...

TS product-detail.compone...

product-list

filter

product

# product-list.component....

< product-list.component....

TS product-list.component.ts

search

# container.component.css

< container.component.html

TS container.component.ts

header

Models

TS Product.ts

top-header

# app.component.css

< app.component.html

TS app.component.spec.ts

TIMELINE

container.component.html

TS product-list.component.ts

src > app > container > < container.component.html > div.ekart--product--container > product-detail

Go to component

1 <div class="ekart--product--container">

2 <!-- <img [src]="product.pImage">

3 <p>Name: {{ product.name }}</p>

4 <p>Price: {{ '\$' + product.price }}</p>

5 <p>Color: {{product.color}}</p>

6 <p>Discounted Price: {{ getDiscountedPrice().toFixed(2) }}</p>

7 <p>{{product.inStock > 0 ? 'Only' + product.inStock + ' items left': 'Not in Stock'}}</p>

8 <button (click)="decrementCartValue()"></button>

9 <span>{{ addToCart }}</span>

10 <button (click)="incrementCartValue()">+</button>

11 <input (input)="onNameChange(\$event)"><br>

12 <p>name={{name}}</p> -->

13 <app-search (searchTextChanged)="setSearchText(\$event)"></app-search>

14 <!-- <div \*ngFor="let item of listOfString">

15 | <p>Current element of array is: {{item}}</p>

16 </div> -->

17 <product-list [searchText]="searchText" #productListComponent></product-list>

18 <product-detail \*ngIf="productListComponent.selectedProduct"></product-detail>

19 </div>

20

21 <!--Disabled, Hidden, Checked-->



FileEditSelectionViewGoRunTerminalHelp

#34 ng-container in Angular | Angular Component & Directives | A Complete Angular Cour...

EXPLORER

app.component.html X

OPEN EDITORS

app.component.html src...

ANGULAR-NG-TEMPLATE

.angular

.vscode

node\_modules

src

app

app.component.css

app.component.html

app.component.spec.ts

app.component.ts

app.module.ts

assets

favicon.ico

index.html

main.ts

styles.css

.editorconfig

.gitignore

angular.json

package-lock.json

package.json

README.md

tsconfig.app.json

tsconfig.json

tsconfig.spec.json

TIMELINE

src > app > app.component.html > ng-container

Go to component

1 <h2>Learn NG Template</h2>

2

3 <ng-template #myTemplate>

4 <h3>This is a template</h3>

5 <p>This is an example paragraph to understand ng-template</p>

6 </ng-template>

7

8 <!--ngTemplateOutlet Directive-->

9 <ng-container \*ngTemplateOutlet="myTemplate"></ng-container>

Scroll for details

7:49 / 12:14

HD



EXPLORER

&gt; OPEN EDITORS

▼ ANGULAR-EKART

&gt; .angular

&gt; .vscode

&gt; dist

&gt; node\_modules

▼ src

▼ app

▼ container

▼ product-detail

# product-detail.compone...

&lt;&gt; product-detail.compone...

TS product-detail.compone...

▼ product-list

&gt; filter

&gt; product

# product-list.component...

&lt;&gt; product-list.component...

TS product-list.component.ts

&gt; search

# container.component.css

&lt;&gt; container.component.html

TS container.component.ts

&gt; header

&gt; Models

&gt; top-header

# app.component.css

▼ TIMELINE

&lt;&gt; product-detail.component.html


&lt;&gt; product-list.component.html X

src &gt; app &gt; container &gt; product-list &gt; &lt;&gt; product-list.component.html &gt; div.ekart--products--container &gt; ng-container &gt; app-product

Go to component

```
1 <app-filter
2   [all]="totalProductCount"
3   [inStock]="totalProductInStock"
4   [outOfStock]="totalProductOutOfStock"
5   (selectedFilterRadioButtonChanged)="onFilterChanged($event)">
6 </app-filter>
7 <div class="ekart--products--container">
8   <!-- *ngIf="selectedFilterRadioButton === 'all' || prod.is_in_inventory.toString() === selectedFilterRadioButton" -->
9   <ng-container *ngFor="let prod of products" >
10     <app-product
11       [product]="prod"
12       *ngIf="searchText === '' || prod.name.toLowerCase().includes(searchText)"
13       (click)="selectedProduct = prod"
14     ></app-product>
15   </ng-container>
16 </div>
17
```



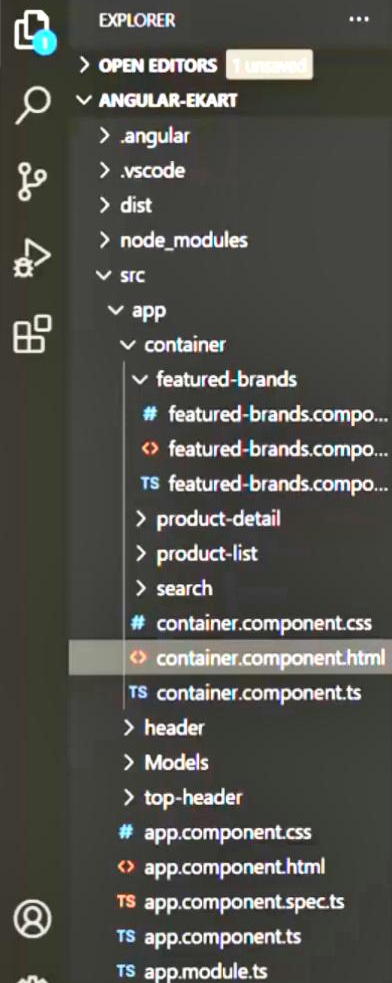

```
src > app > container > container.component.html > div.ekart-product-container > div.ekart-featured-products > featured-brands > button.call-to-action
18 <product-detail [ng1]= productListcomponent.selectedproduct [productListcomp]= productListcomponent ></product-detail>
19
20 <div class="ekart-featured-products">
21   <div class="ekart-featured-product-heading">
22     <h1>Latest Arrival in Pupolar Brands</h1>
23   </div>
24
25   <featured-brands>
26     <h3 class="title">New Arrivals in Nike</h3>
27     <button class="call-to-action">Show New Arrivals in Nike</button>
28   </featured-brands>
29   <featured-brands>
30     <h3 class="title">New Arrivals in Adidas</h3>
31     <button class="call-to-action">Show New Arrivals in Adidas</button>
32   </featured-brands>
33   <featured-brands>
34     <h3 class="title">New Arrivals in Reebok</h3>
35     <button class="call-to-action">Show New Arrivals in Reebok</button>
36   </featured-brands>
37 </div>
38 </div>
39
40 <!--Disabled, Hidden, Checked-->
```





EXPLORER

> OPEN EDITORS

✓ ANGULAR-EKART

- > .angular
- > .vscode
- > dist
- > node\_modules
- ✓ src
  - ✓ app
    - ✓ container
      - ✓ featured-brands
        - # featured-brands.compo...
        - ◀ featured-brands.compo...
        - TS featured-brands.compo...
      - > product-detail
      - > product-list
      - > search
    - # container.component.css
    - ◀ container.component.html
    - TS container.component.ts
    - > header
    - > Models
    - > top-header
  - # app.component.css
  - ◀ app.component.html
  - TS app.component.spec.ts
  - TS app.component.ts
  - TS app.module.ts

> TIMELINE

◀ container.component.html

◀ featured-brands.component.html •

src > app > container > featured-brands > ◀ featured-brands.component.html > div.ekart-featured-product-item > ng-content

Go to component

```

1 <div class="ekart-featured-product-item">
2   <ng-content select=".title"></ng-content>
3   <p class="description">
4     Lorem Ipsum is simply dummy text of the printing and typesetting industry.
5     Lorem Ipsum has been the industry's standard dummy text ever since the 1500s
6   </p>
7   <ng-content select=".call-to-action"></ng-content>
8 </div>
9

```

I







\$72

Michael Feburary SK8-Hi

MEN . CASUAL . Vans

5 Colors . Best Seller

Available in Stock

## Latest Arrival in Pupolar Brands

### New Arrivals in Nike

Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard dummy text ever since the 1500s

[Show New Arrivals in Nike](#)

### New Arrivals in Adidas

Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard dummy text ever since the 1500s

[Show New Arrivals in Adidas](#)

### New Arrivals in Reebok

Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard dummy text ever since the 1500s

[Show New Arrivals in Reebok](#)

# Content Projection

parent.component.html

```
<h2>Parent Component</h2>
<app-child>
  <h2>Some Heading</h2>
  <p #paragraph>This is a paragraph</p>
  <app-test></app-test>
</app-child>
```

child.component.html

```
<h2>Parent Component</h2>
<ng-content></ng-content>
```



# @ViewChild

parent.component.html

```
<h2>Parent Component</h2>
<app-child>
  <h2>Some Heading</h2>
  <p #paragraph>This is a paragraph</p>
</app-child>
```

child.component.ts

```
@Component({
  selector: 'app-child',
  templateUrl: './child.component.html',
  styleUrls: ['./child.component.css']
})
export class ChildComponent {
  title = 'Angular App';
  @ViewChild('paragraph') paraEl: ElementRef
}
```





...

child.component.html 1



2 unemployed

child.componentht... 1

```
> node_modules
```

child

<> child.component.ht... 1

TS main.ts

## > TIMELINE

7 &lt;/div&gt;







## EXPLORER

## OPEN EDITORS

TS child.component.ts src\...\n<img alt="HTML icon" data-bbox="75 165 85 175"/> parent.component.html...\nX TS parent.component.ts src...\n<img alt="HTML icon" data-bbox="75 230 85 240"/> child.component.html sr...

## ANGULAR-CONTENT-CHILD

> .angular\n> .vscode\n> node\_modules\n<img alt="Folder icon" data-bbox="55 395 65 405"/> src\n <img alt="Folder icon" data-bbox="60 425 70 435"/> app\n <img alt="Folder icon" data-bbox="65 455 75 465"/> parent\n <img alt="Folder icon" data-bbox="70 485 80 495"/> child\n # child.component.css\n <img alt="HTML icon" data-bbox="75 515 85 525"/> child.component.html\n TS child.component.ts\n # parent.component.css\n <img alt="HTML icon" data-bbox="75 545 85 555"/> parent.component.html\n TS parent.component.ts\n # app.component.css\n <img alt="HTML icon" data-bbox="75 575 85 585"/> app.component.html\n TS app.component.spec.ts\n TS app.component.ts\n TS app.module.ts\n > assets\n ★ favicon.ico\n <img alt="HTML icon" data-bbox="75 645 85 655"/> index.html

## &gt; TIMELINE

TS child.component.ts

&lt;img alt="HTML icon" data-bbox="350 60 360 70"/&gt; parent.component.html

TS parent.component.ts X

&lt;img alt="HTML icon" data-bbox="645 60 655 70"/&gt; child.component.html

src &gt; app &gt; parent &gt; TS parent.component.ts &gt; ParentComponent &gt; paraEl

```
1  import { Component, ViewChild, ElementRef } from '@angular/core';
2
3  @Component({
4    selector: 'app-parent',
5    templateUrl: './parent.component.html',
6    styleUrls: ['./parent.component.css']
7  })
8  export class ParentComponent {
9    @ViewChild('para') paraEl: ElementRef;
10
11    showParaValue(){
12      console.log(this.paraEl);
13    }
14  }
15
```





EXPLORER

&gt; OPEN EDITORS

▼ ANGULAR-CONTENT-CHILD

&gt; .angular

&gt; .vscode

&gt; node\_modules

▼ src

▼ app

▼ parent

▼ child

# child.component.css

&lt;&gt; child.component.html

TS child.component.ts

# parent.component.css

&lt;&gt; parent.component.html

TS parent.component.ts

▼ test

# test.component.css

&lt;&gt; test.component.html

TS test.component.spec.ts

TS test.component.ts

# app.component.css

&lt;&gt; app.component.html

TS app.component.spec.ts

TS app.component.ts

TS app.module.ts

&gt; assets

★ favicon.ico

&gt; TIMELINE

src &gt; app &gt; parent &gt; &lt;&gt; parent.component.html &gt; div &gt; app-child &gt; app-test

Go to component

```
1 <div>
2   <app-child>
3     <h3>Some Heading</h3>
4     <p #para>
5       Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor
6       incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud
7     </p>
8     <p #para>
9       Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor
10      incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud
11      exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.
12    </p>
13
14    <p #para>
15      Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor
16      exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.
17    </p>
18
19    <app-test [name]='Merry Jane'></app-test>
20    <app-test [name]='Mark Vought'></app-test>
21    <app-test [name]='John Smith'></app-test>
22  </app-child>
23  <!-- <button (click)="showParaValue()">Show Value</button> -->
24 </div>
25
```





EXPLORER

&gt; OPEN EDITORS

▼ ANGULAR-CONTENT-CHILD

&gt; .angular

&gt; .vscode

&gt; node\_modules

▼ src

▼ app

▼ parent

▼ child

# child.component.css

&lt;&gt; child.component.html

TS child.component.ts

# parent.component.css

&lt;&gt; parent.component.html

TS parent.component.ts

▼ test

# test.component.css

&lt;&gt; test.component.html

TS test.component.spec.ts

TS test.component.ts

# app.component.css

&lt;&gt; app.component.html

TS app.component.spec.ts

TS app.component.ts

TS app.module.ts

&gt; assets

★ favicon.ico

&gt; TIMELINE

TS child.component.ts

&lt;&gt; parent.component.html


TS test.component.ts

&lt;&gt; child.component.html

src &gt; app &gt; test &gt; TS test.component.ts &gt; TestComponent &gt; name

```
1  import { Component, Input } from '@angular/core';
2
3  @Component({
4    selector: 'app-test',
5    templateUrl: './test.component.html',
6    styleUrls: ['./test.component.css']
7  })
8  export class TestComponent {
9    @Input() name: string = '';
10 }
11
```




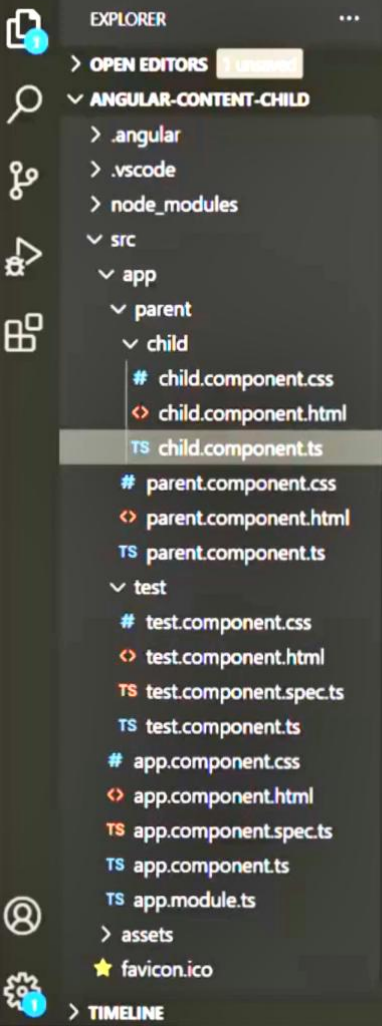

```
src > app > parent > child > TS child.component.ts > ChildComponent > StyleParagraph
1  import { Component, ContentChild, ElementRef, ContentChildren, QueryList } from '@angular/core';
2  import { TestComponent } from 'src/app/test/test.component';
3
4  @Component({
5    selector: 'app-child',
6    templateUrl: './child.component.html',
7    styleUrls: ['./child.component.css']
8  })
9  export class ChildComponent {
10    @ContentChild('para') paragraphEl: ElementRef;
11
12    @ContentChild(TestComponent) testEl: TestComponent;
13
14    @ContentChildren('para') paraElements: QueryList<ElementRef>;
15
16    @ContentChildren(TestComponent) testElements: QueryList<TestComponent>;
17
18    StyleParagraph() {
19      // console.log(this.paragraphEl.nativeElement);
20      // console.log(this.testEl.name);
21
22      //this.paraElements.forEach((el) => {console.log(el.nativeElement)});
23
24      this.testElements.forEach((el) => {console.log(el)});
25    }
26  }
27
```





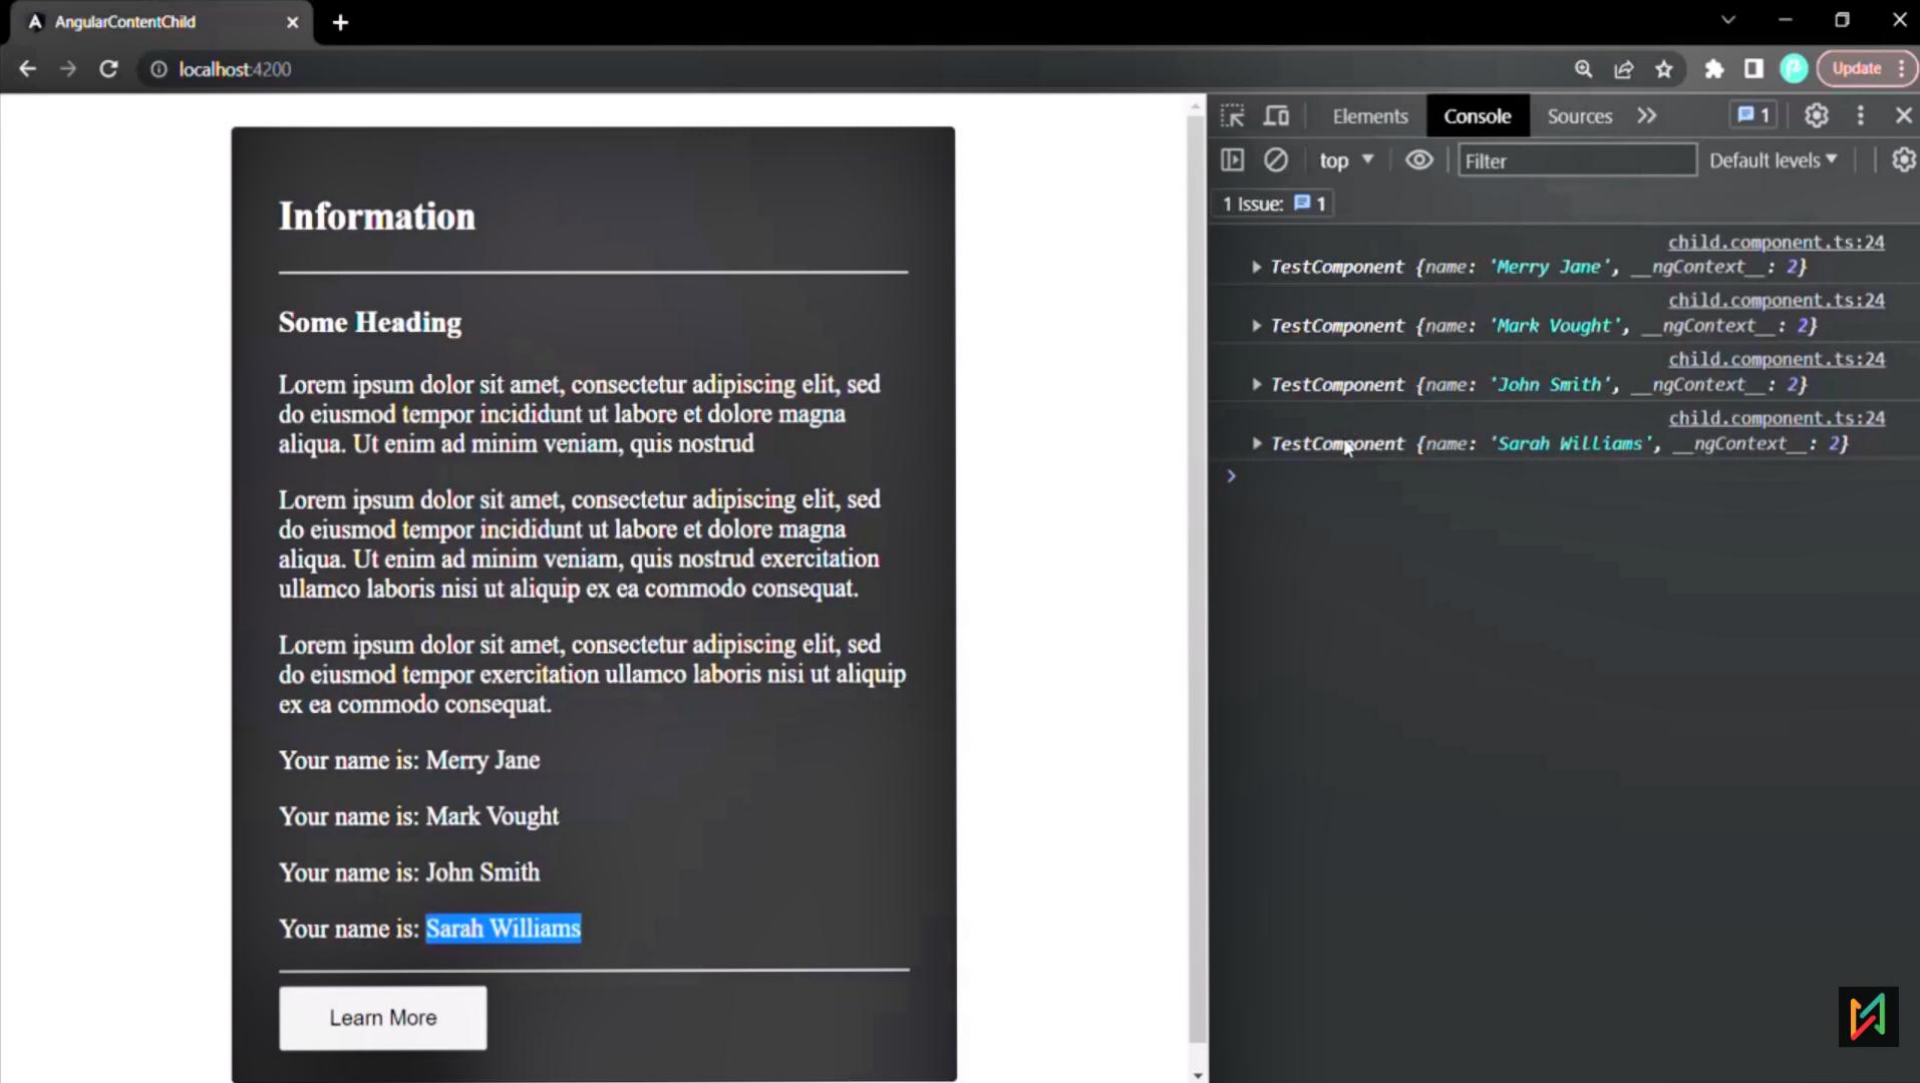

## Information

### Some Heading

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.

Your name is: Merry Jane

Your name is: Mark Vought

Your name is: John Smith

Your name is: Sarah Williams

[Learn More](#)

1 Issue: 1

```
child.component.ts:24
  ▶ TestComponent {name: 'Merry Jane', __ngContext__: 2}
child.component.ts:24
  ▶ TestComponent {name: 'Mark Vought', __ngContext__: 2}
child.component.ts:24
  ▶ TestComponent {name: 'John Smith', __ngContext__: 2}
child.component.ts:24
  ▶ TestComponent {name: 'Sarah Williams', __ngContext__: 2}
```



# @ViewChild

demo.component.html

```
<h2>Parent Component</h2>
<div>
  <h2>Some Heading</h2>
  <p #paragraph>This is a paragraph</p>
  <app-test></app-test>
</div>
```

demo.component.ts

```
@Component({
  selector: 'app-demo',
  templateUrl: './demo.component.html',
  styleUrls: ['./demo.component.css']
})
export class DemoComponent {
  title = 'Angular App';

  @ViewChild('paragraph') paraEl: ElementRef
}
```



# @ContentChild

parent.component.html

```
<h2>Parent Component</h2>
<app-child>
  <h2>Some Heading</h2>
  <p #paragraph>This is a paragraph</p>
  <app-test></app-test>
</app-child>
```

child.component.ts

```
@Component({
  selector: 'app-child',
  templateUrl: './child.component.html',
  styleUrls: ['./child.component.css']
})
export class ChildComponent {
  title = 'Angular App';

  @ContentChild('paragraph') paraEl: ElementRef
}
```

