



Promise vs Observable

Promise	Observable
▪ A promise is native to JavaScript.	▪ An Observable is not native to JavaScript. It is provided by a third party library called RxJS.
▪ Promise is eager. It returns the data as soon as a promise is created	▪ Observable is lazy. It only emits the data if there is a subscriber for that observable.
▪ Promise can emit only a single value.	▪ Observables can emit single or multiple values.
▪ Promise has methods for success & error.	▪ Observable has methods for success, error and completion.
▪ Promise always returns asynchronous data.	▪ An Observable can return both synchronous and asynchronous data based on how it is implemented.



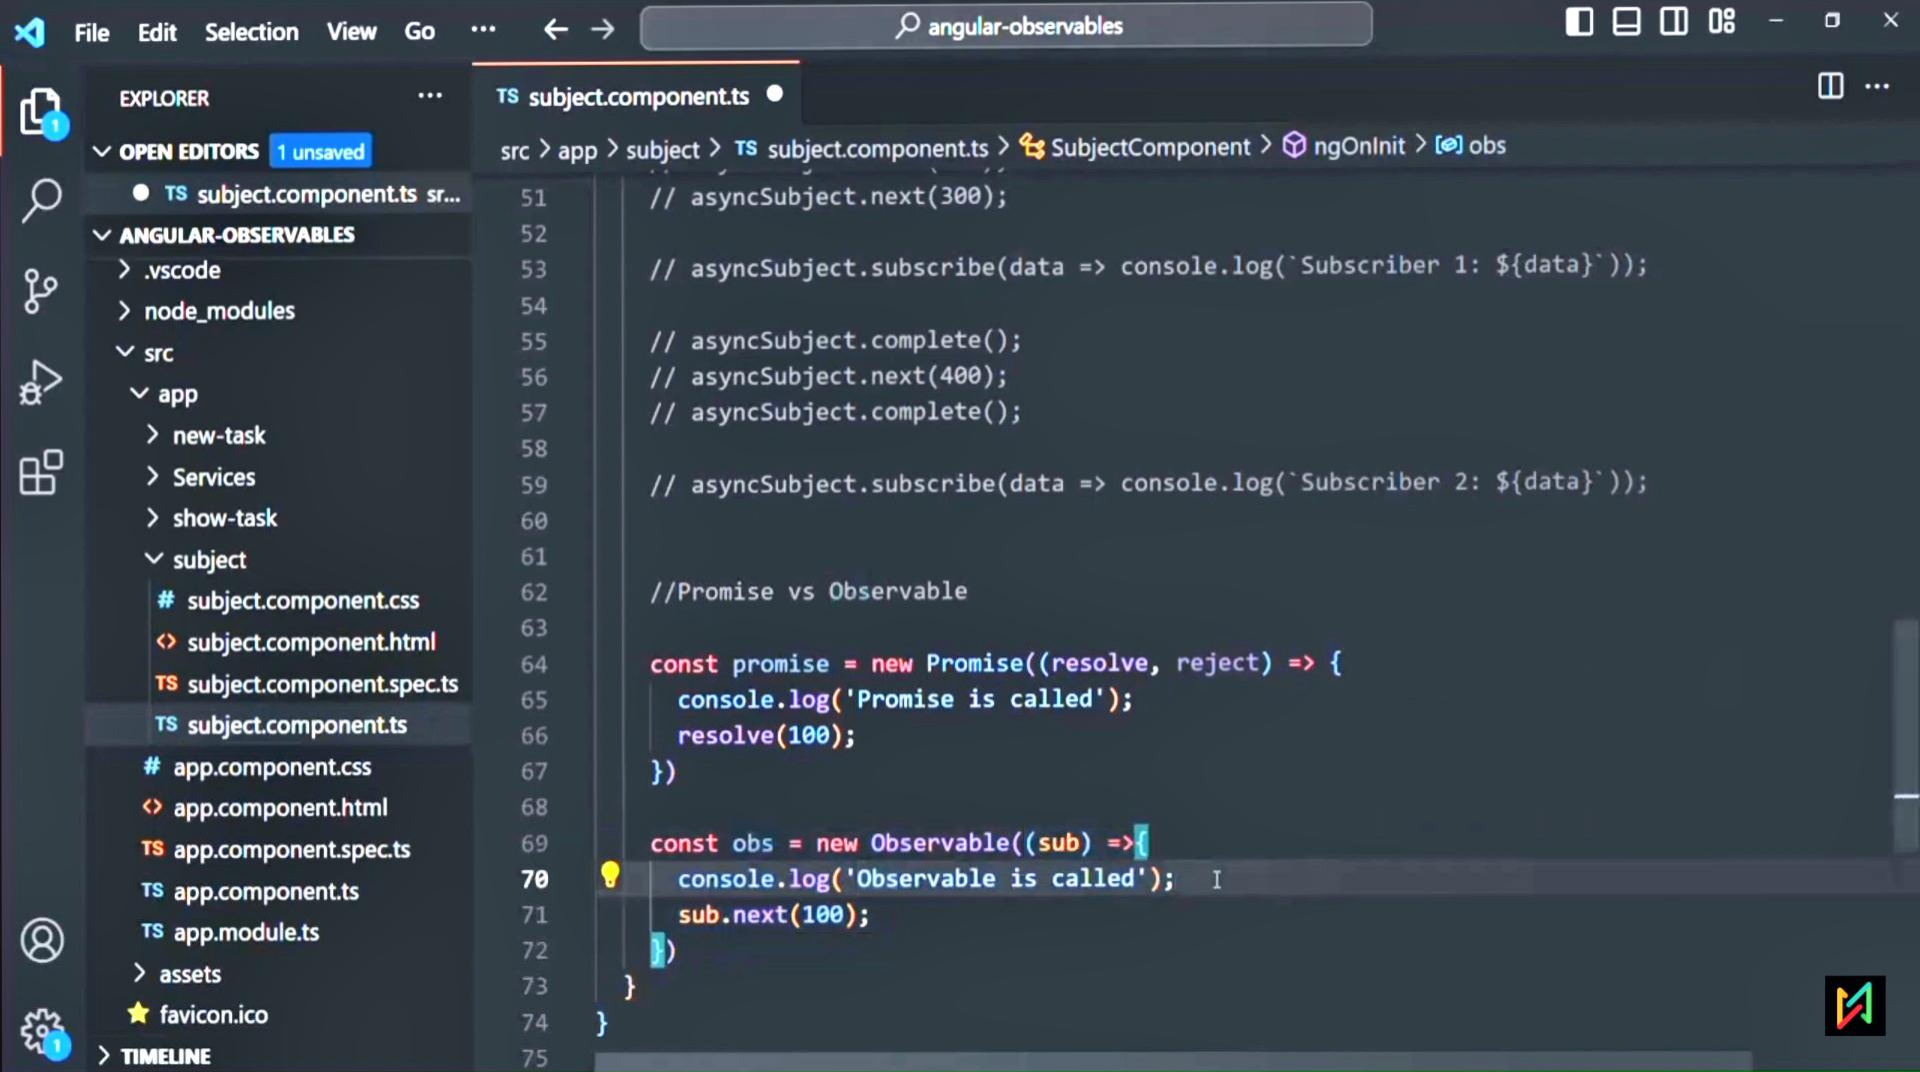

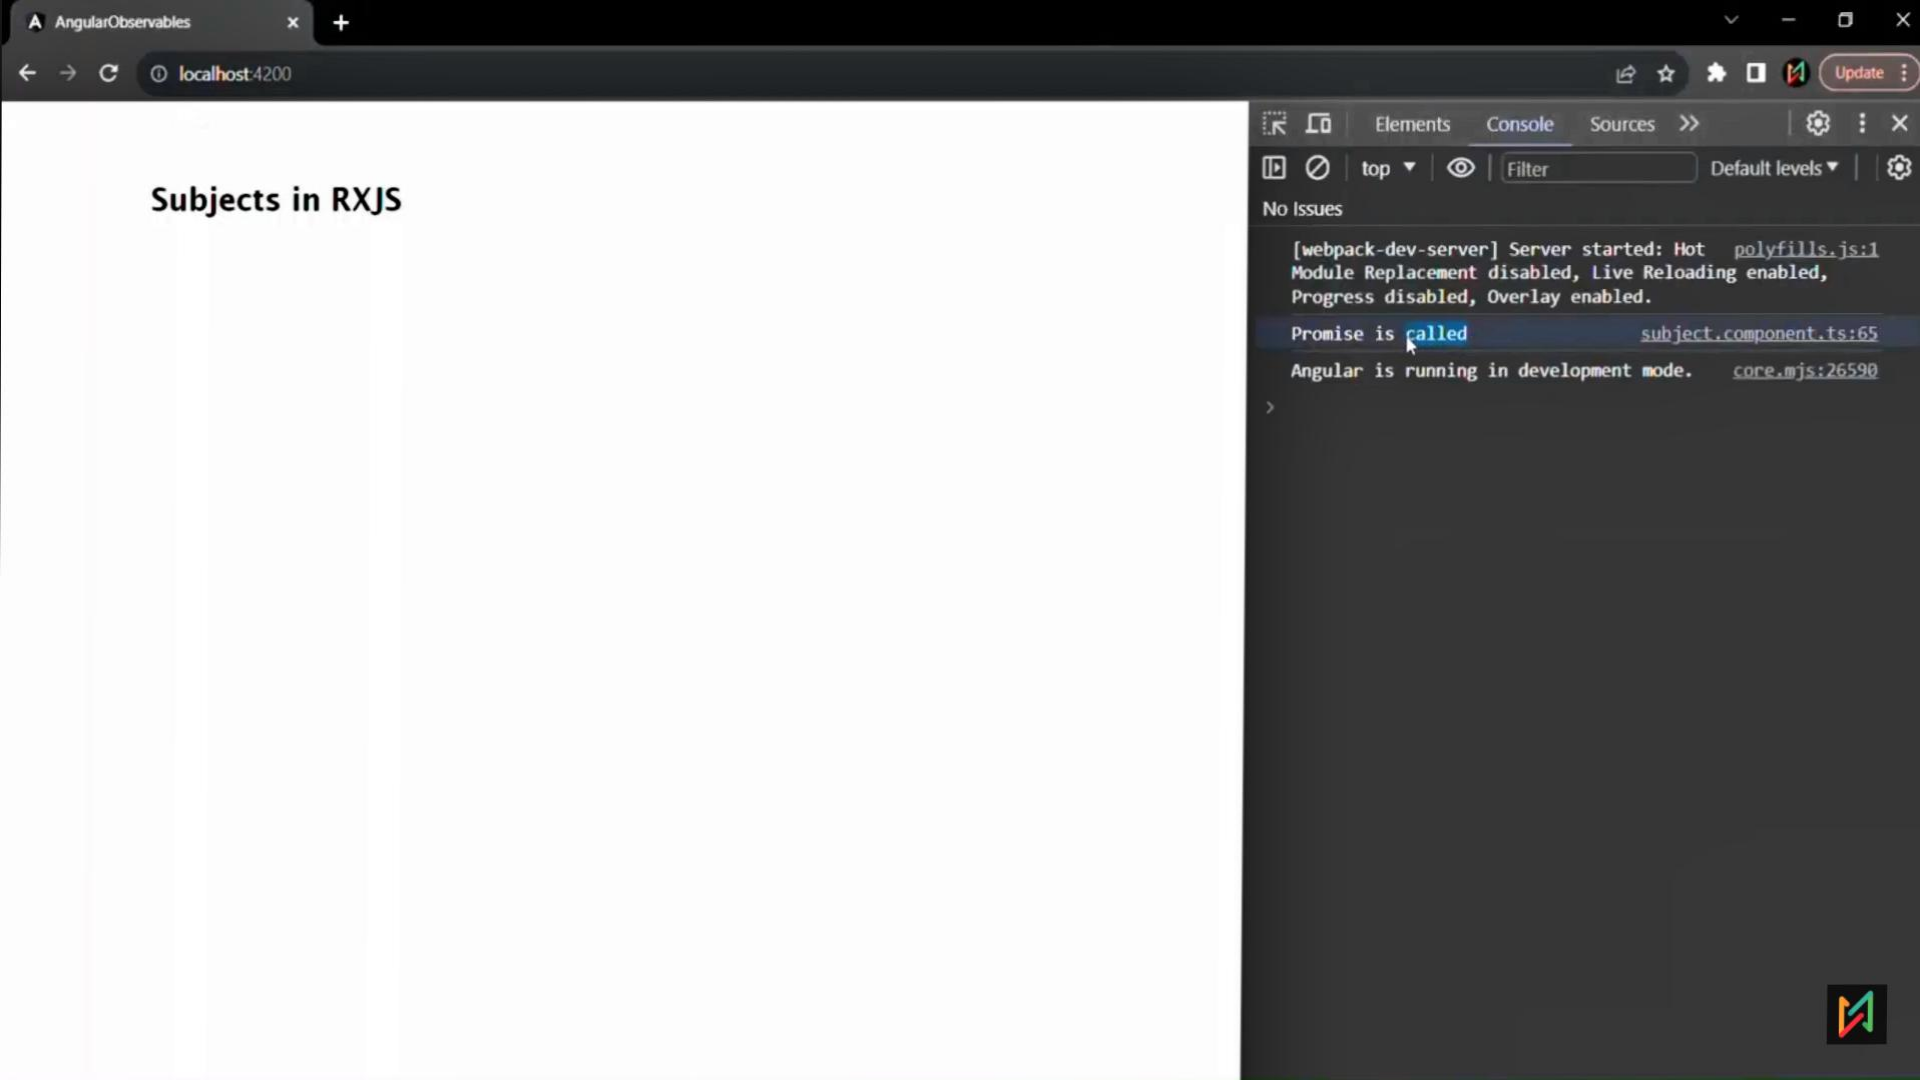

Subjects in RXJS

[webpack-dev-server] Server started: Hot module replacement disabled, Live Reloading enabled, Progress disabled, Overlay enabled.

Promise is called [subject.component.ts:65](#)

Angular is running in development mode. [core.mjs:26590](#)

File

Edit

Selection

View

Go

...

←

→

angular-observables

EXPLOLER

...

OPEN EDITORS

TS subject.component.ts sr...

ANGULAR-OBSERVABLES

.vscode

node_modules

src

app

new-task

Services

show-task

subject

subject.component.css

<> subject.component.html

TS subject.component.spec.ts

TS subject.component.ts

app.component.css

<> app.component.html

TS app.component.spec.ts

TS app.component.ts

TS app.module.ts

assets

★ favicon.ico

TIMELINE

TS subject.component.ts X

src > app > subject > TS subject.component.ts > SubjectComponent > ngOnInit

251 // asyncSubject.next(300);

252

253 // asyncSubject.subscribe(data => console.log(`Subscriber 1: \${data}`));

254

255 // asyncSubject.complete();

256 // asyncSubject.next(400);

257 // asyncSubject.complete();

258

259 // asyncSubject.subscribe(data => console.log(`Subscriber 2: \${data}`));

260

261

262 //Promise vs Observable

263

264 const promise = new Promise((resolve, reject) => {

265 console.log('Promise is called');

266 resolve(100);

267 })

268

269 const obs = new Observable((sub) =>{

270 console.log('Observable is called');


271 sub.next(100);

272 })

273 obs.subscribe();

274

275 }

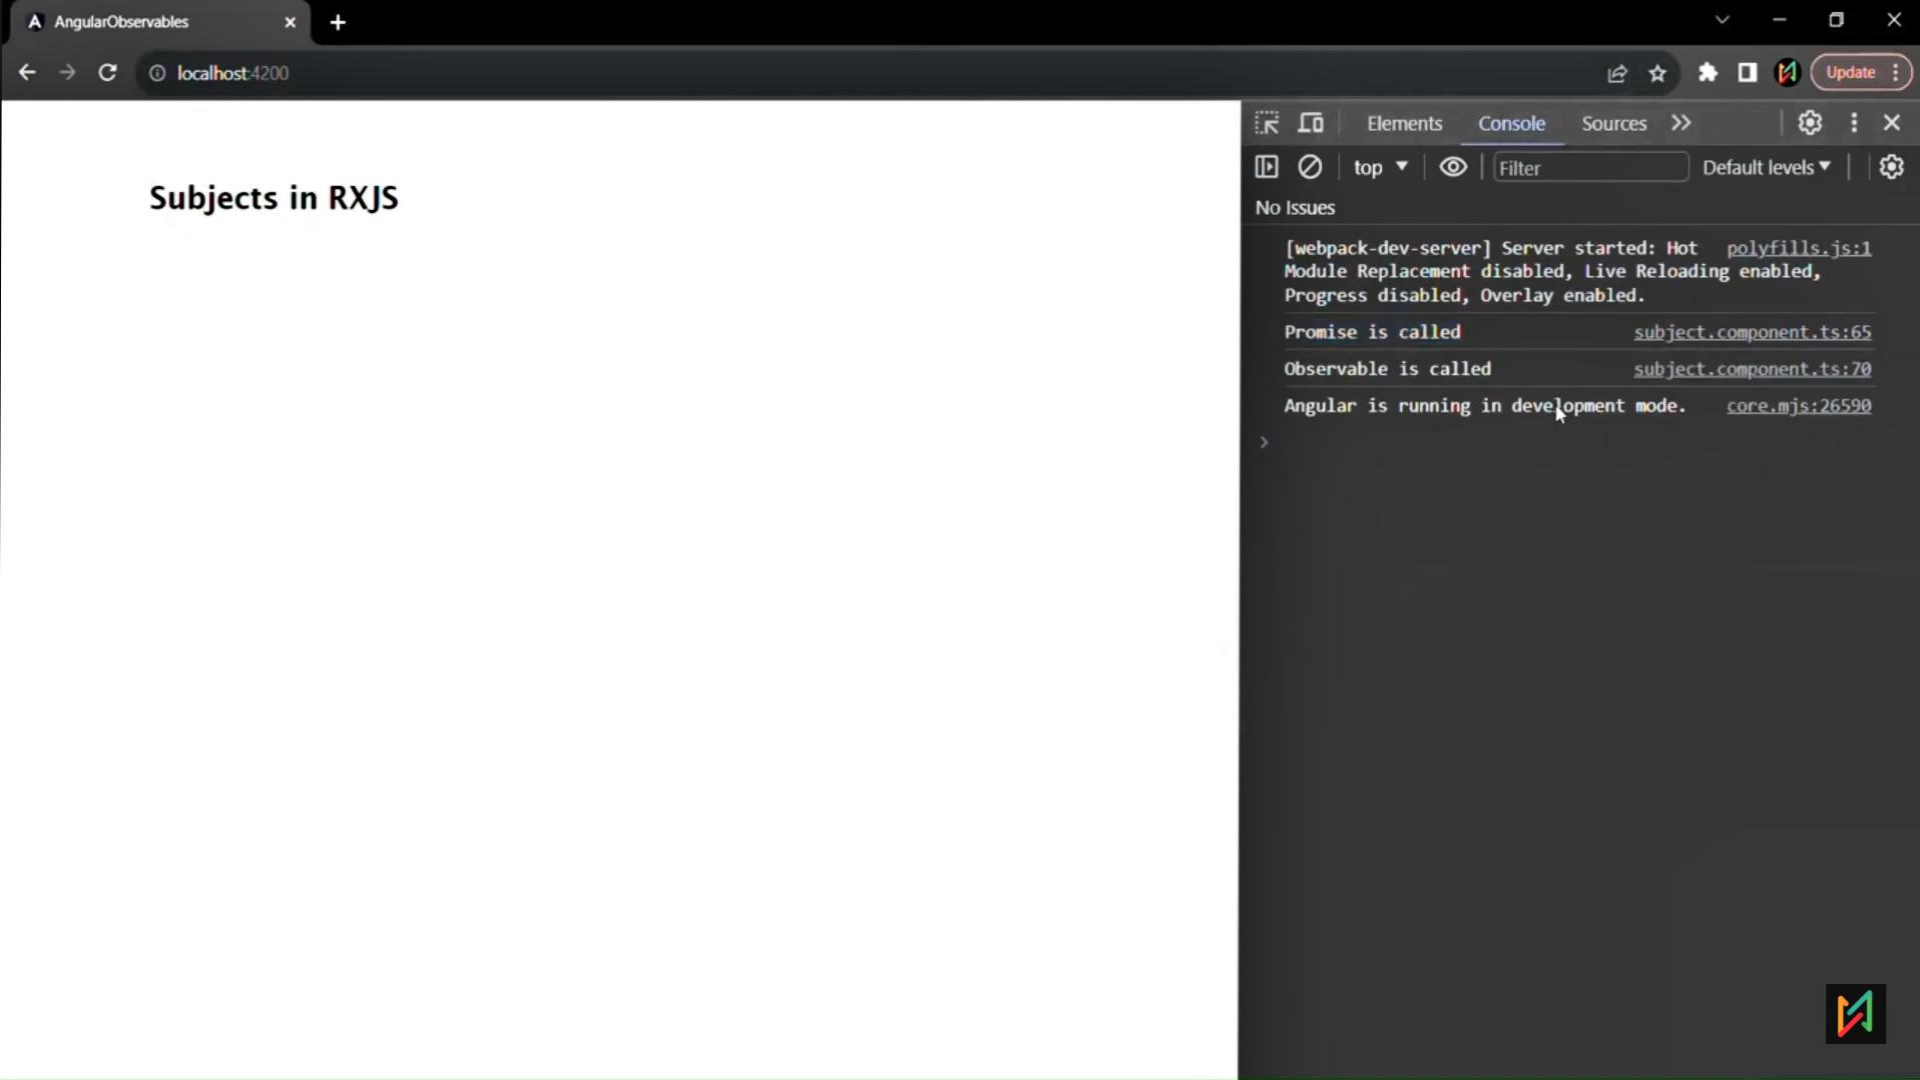

Subjects in RXJS


Elements Console Sources >> | Settings | Close


top | Filter | Default levels | Settings

No Issues

```
[webpack-dev-server] Server started: Hot polyfills.js:1
Module Replacement disabled, Live Reloading enabled,
Progress disabled, Overlay enabled.

Promise is called subject.component.ts:65
Observable is called subject.component.ts:70
Angular is running in development mode. core.mjs:26590
```

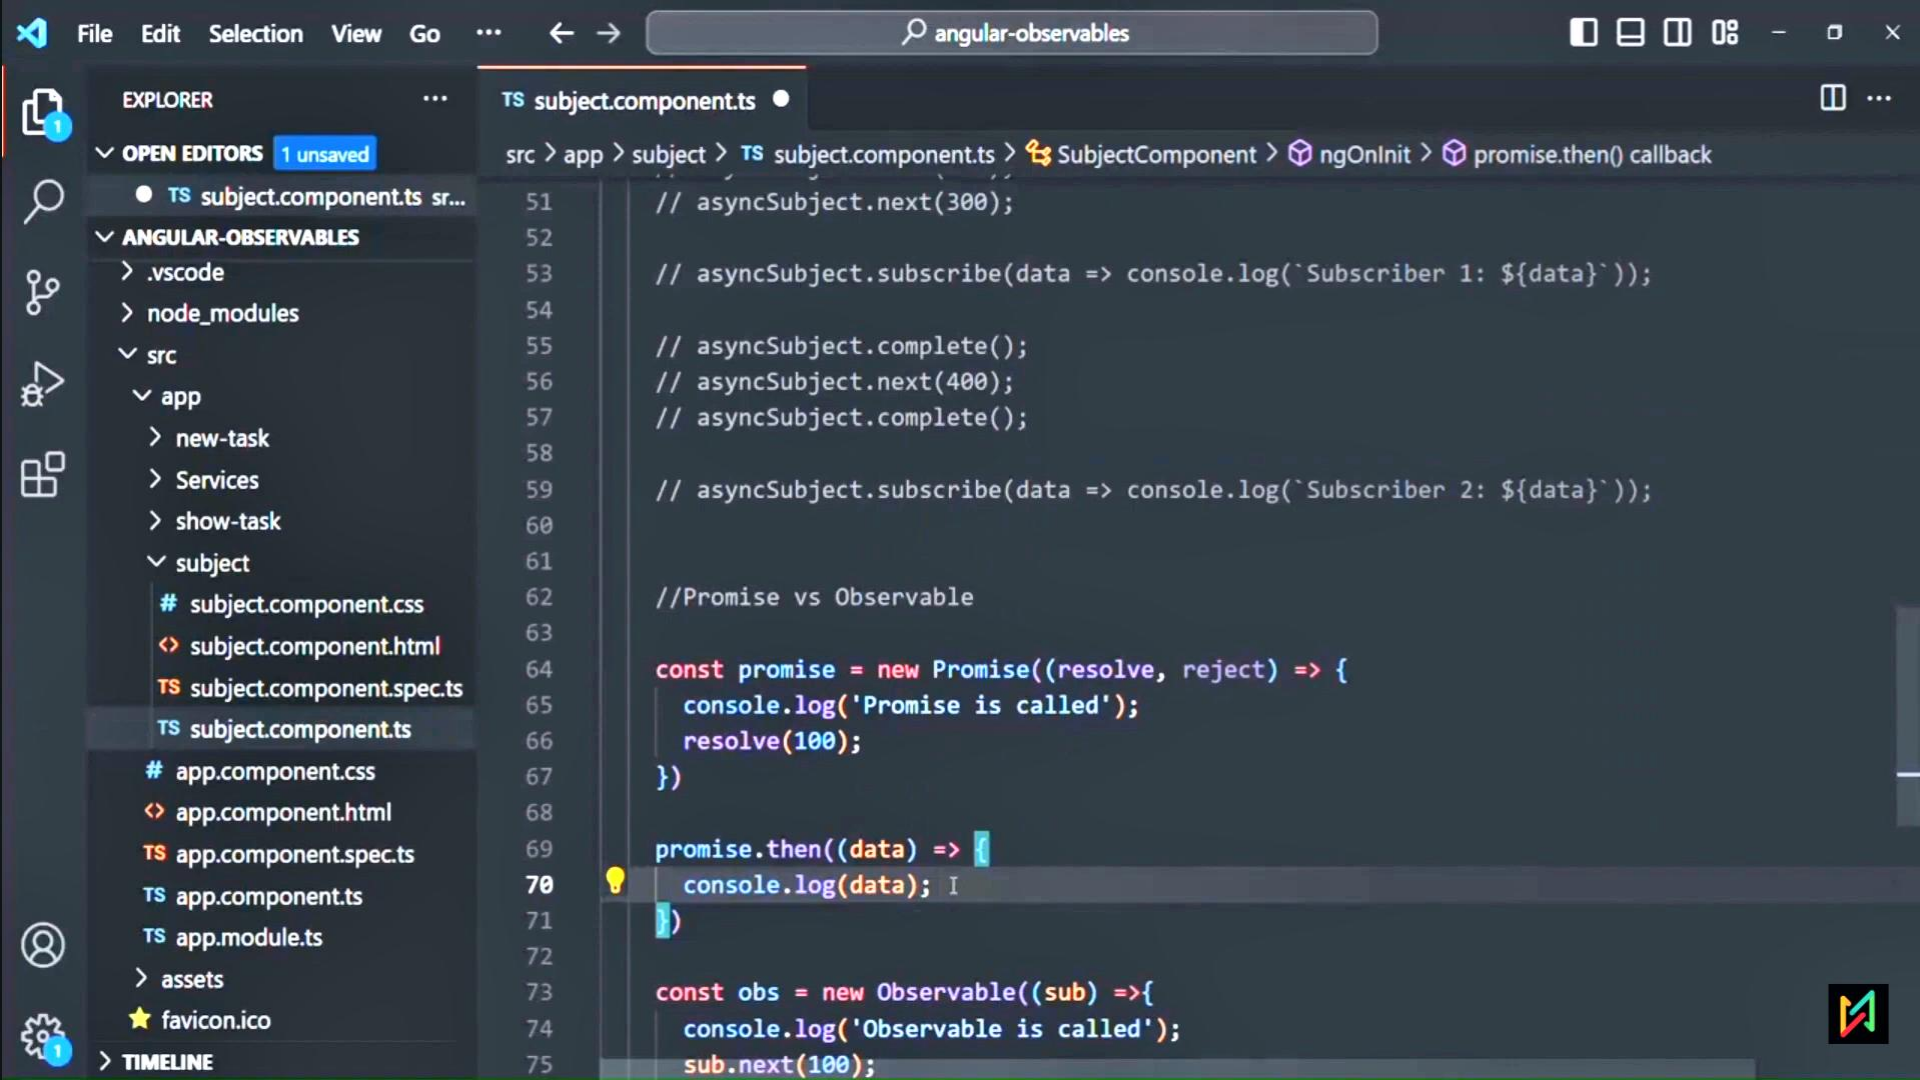

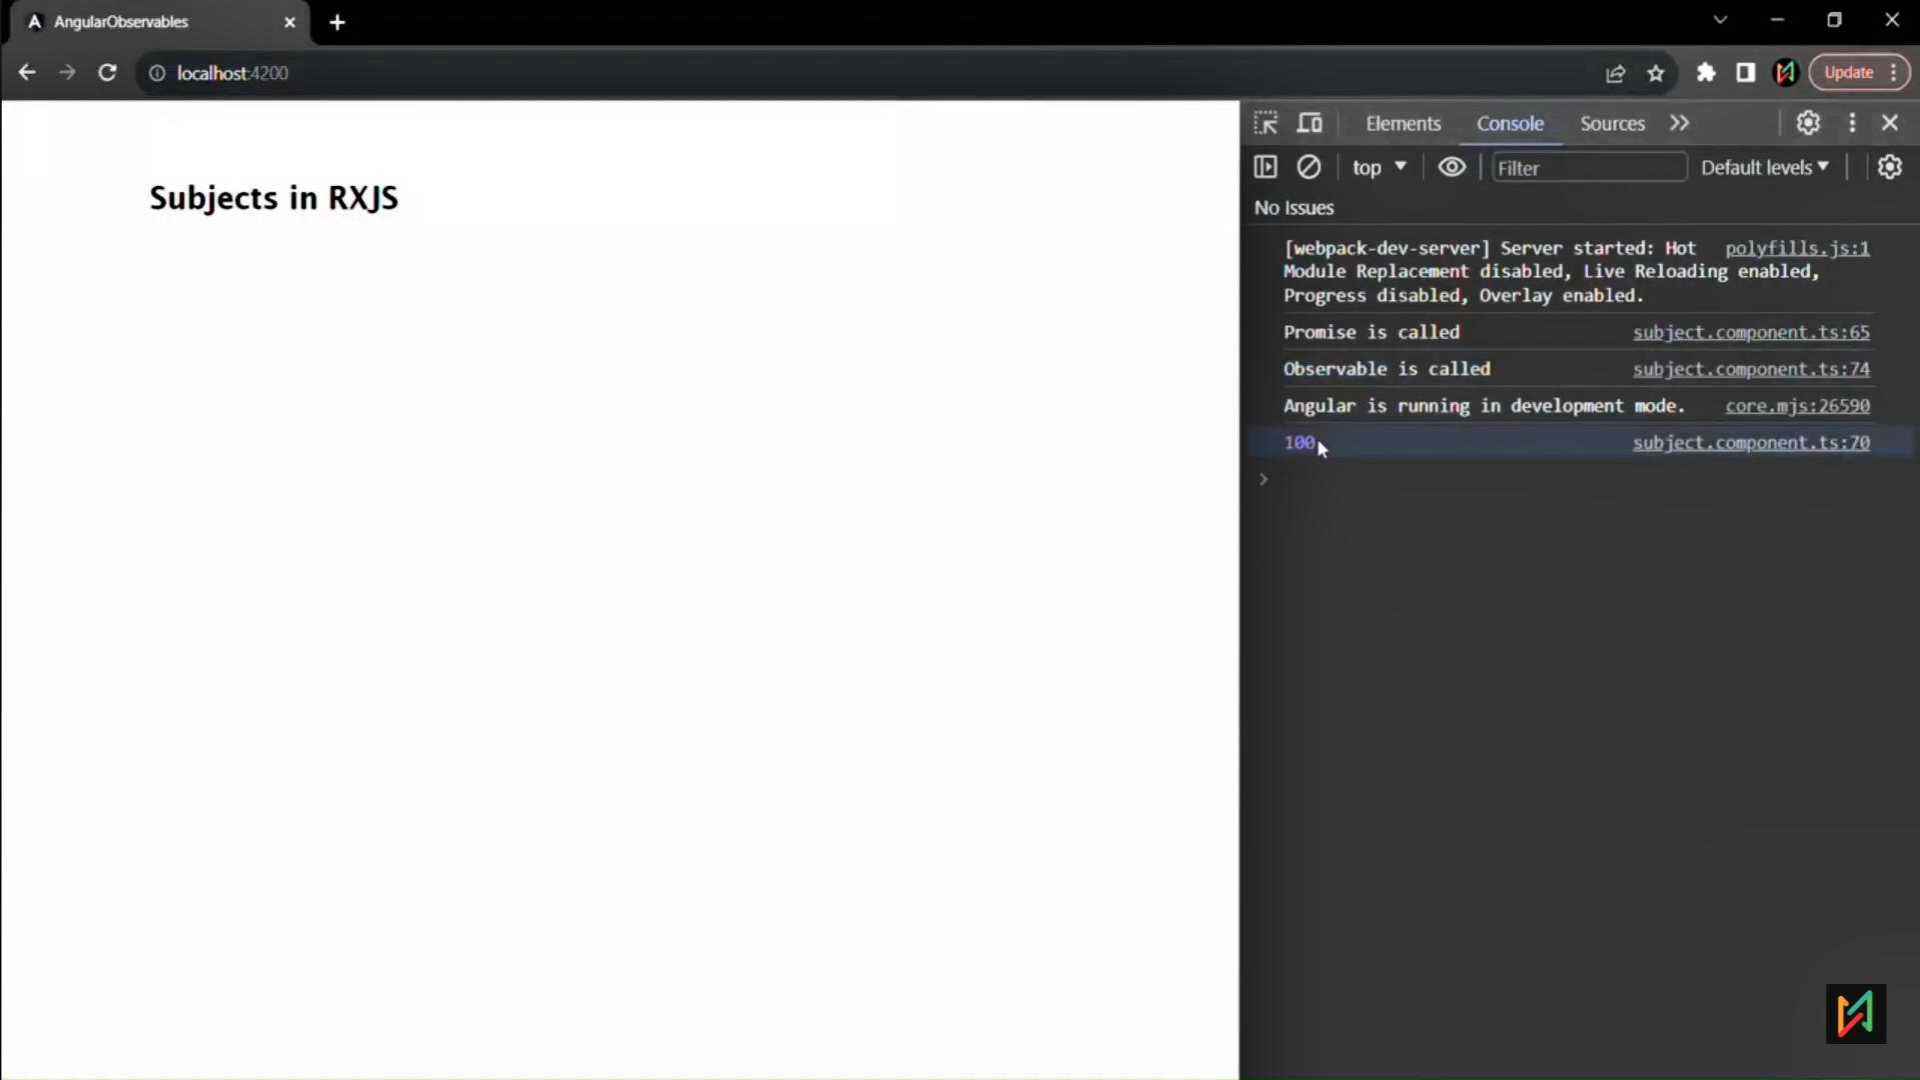

Subjects in RXJS


[webpack-dev-server] Server started: Hot polyfills.js:1
Module Replacement disabled, Live Reloading enabled,
Progress disabled, Overlay enabled.


Promise is called subject.component.ts:65

Observable is called subject.component.ts:74

Angular is running in development mode. core.mjs:26590

100 subject.component.ts:70

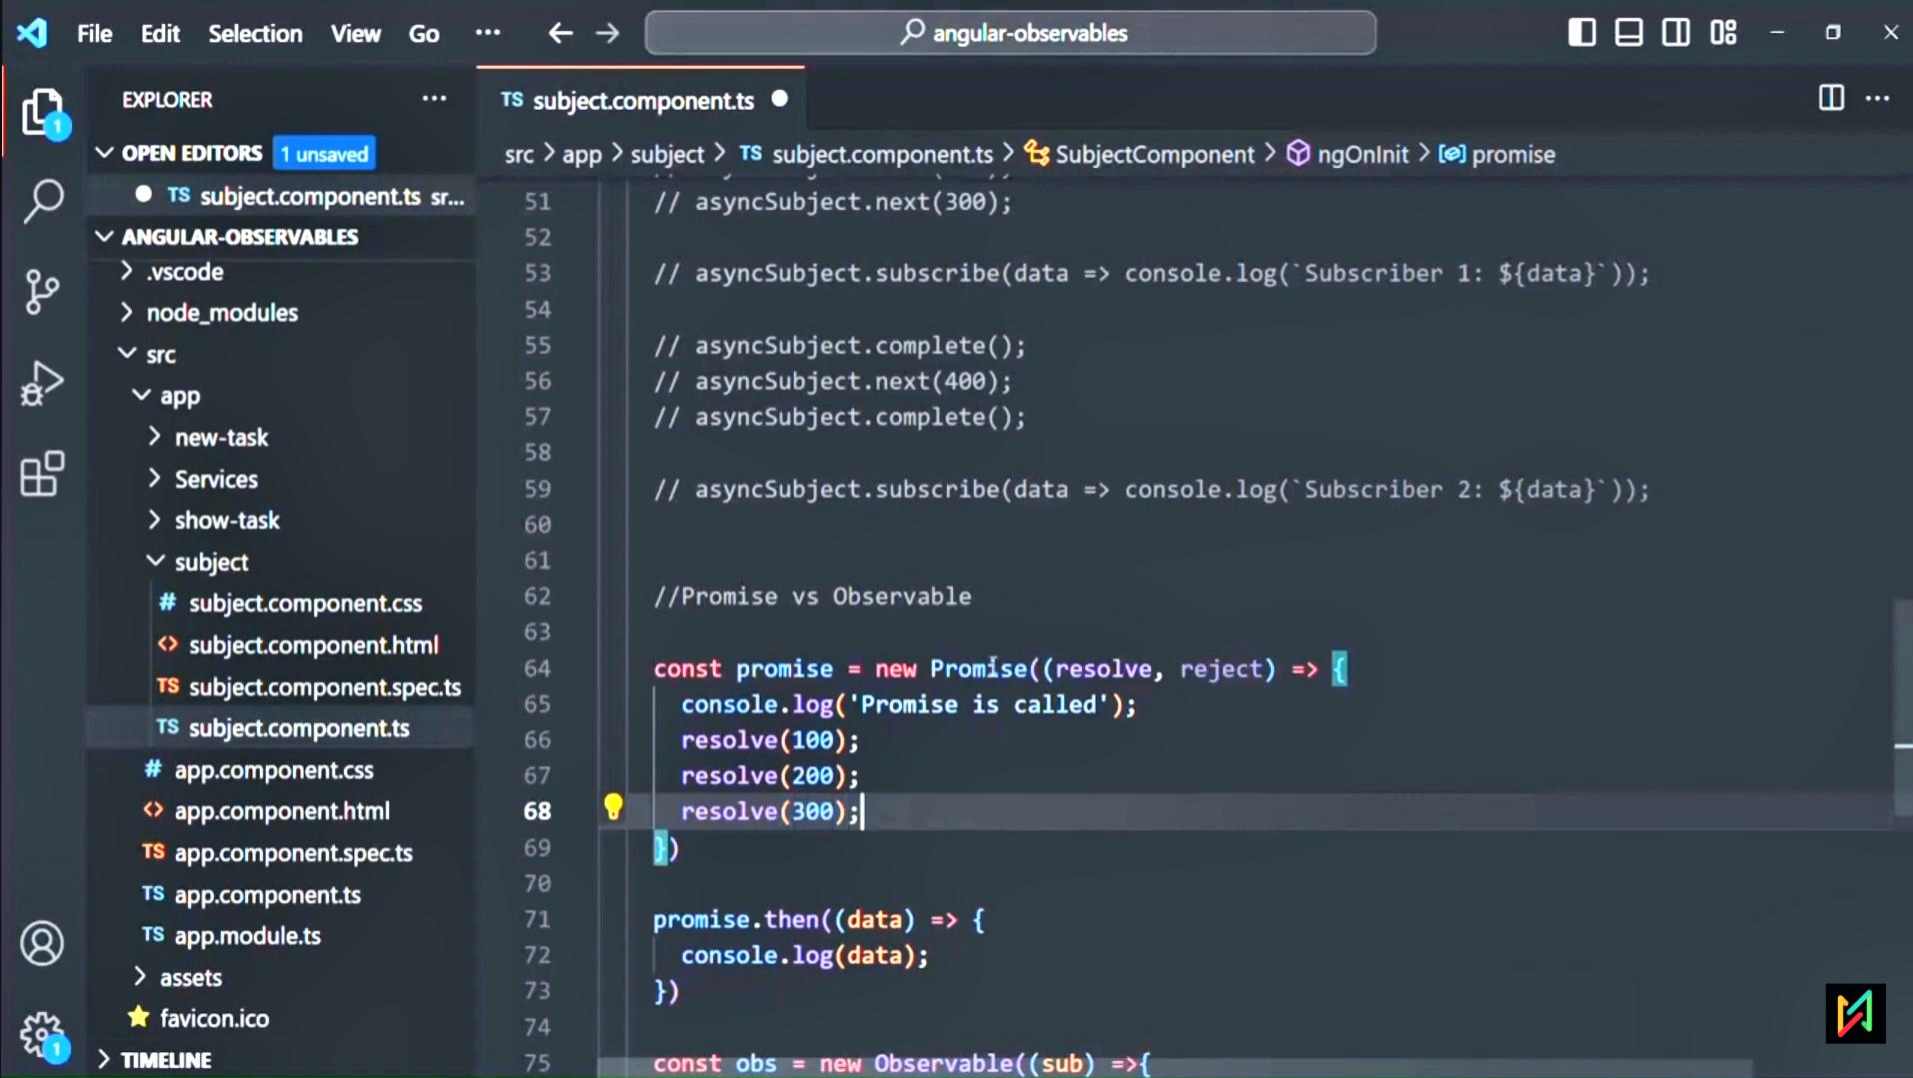

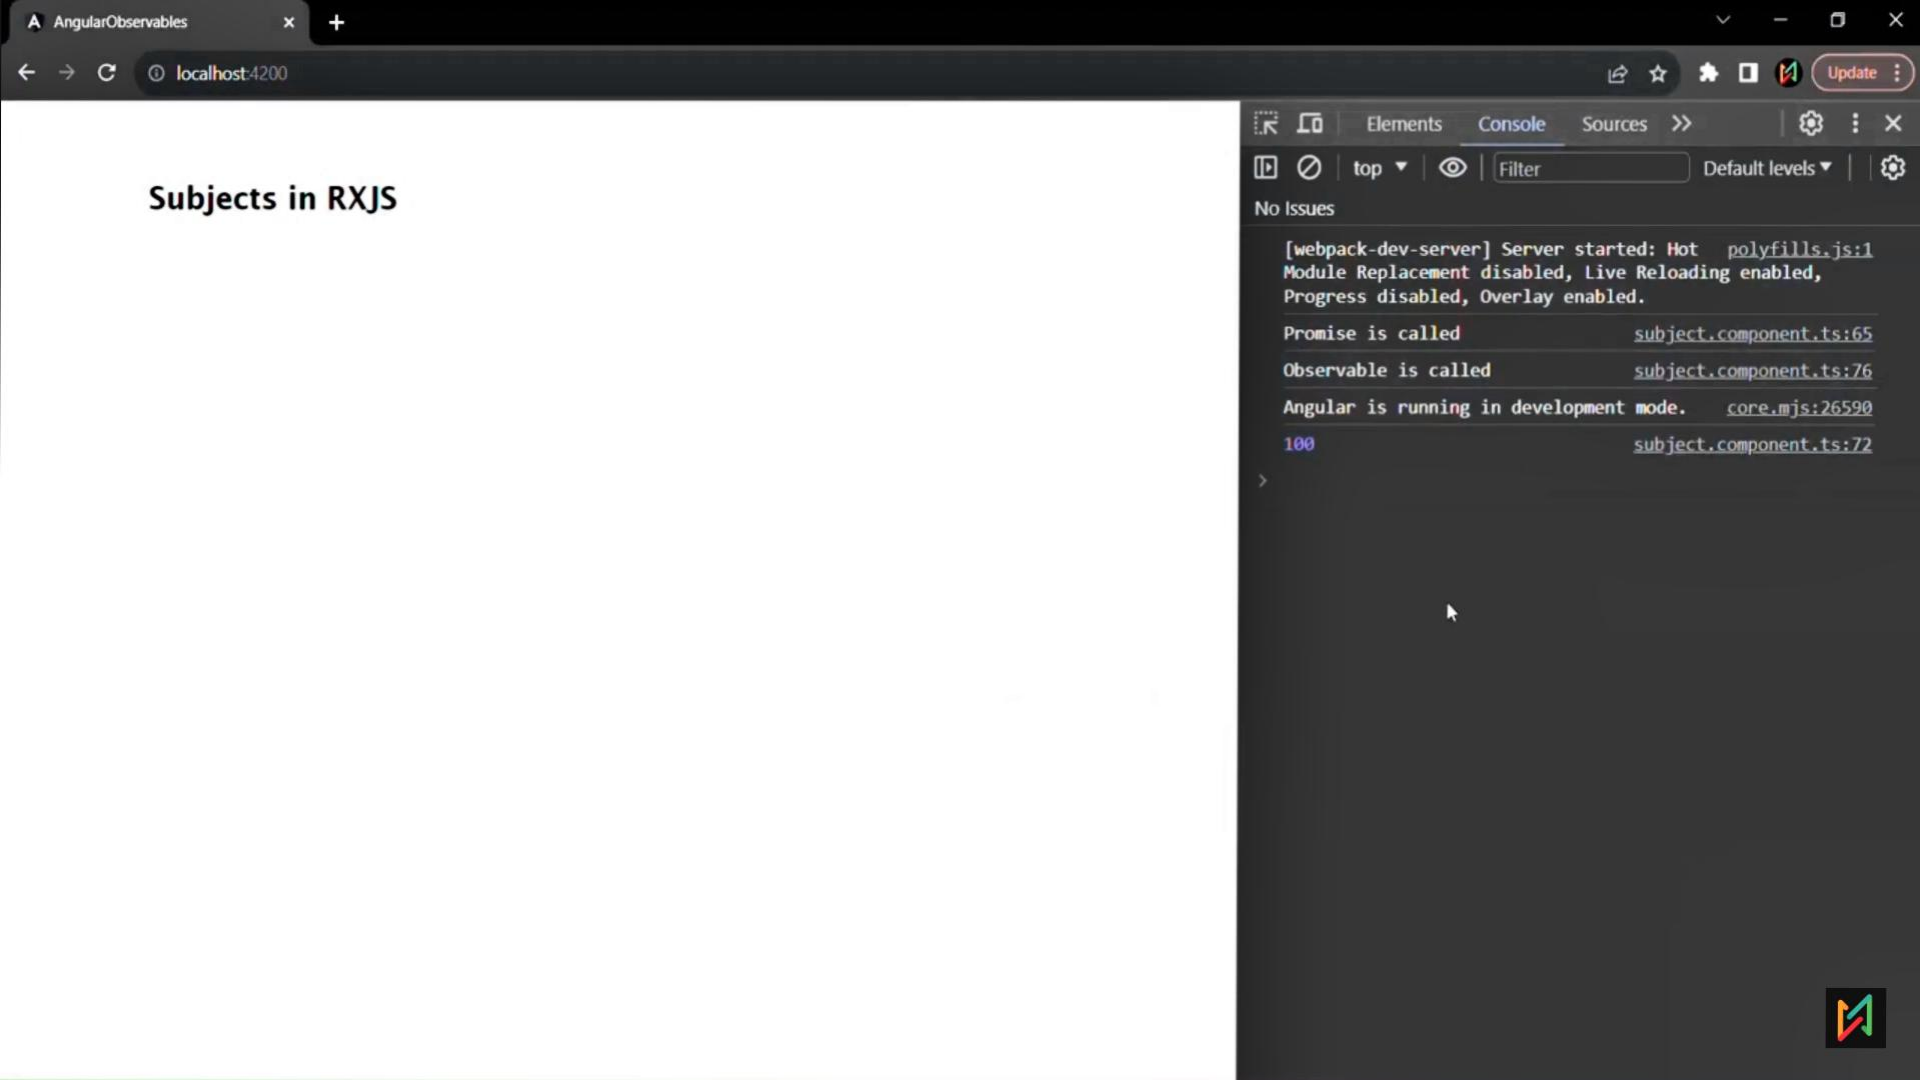

Subjects in RXJS

Elements Console Sources >> | Settings | More | Close

Filter Default levels | Settings

No Issues

[webpack-dev-server] Server started: Hot polyfills.js:1

Module Replacement disabled, Live Reloading enabled,

Progress disabled, Overlay enabled.

Promise is called subject.component.ts:65


Observable is called subject.component.ts:76


Angular is running in development mode. core.mjs:26590

100 subject.component.ts:72

>



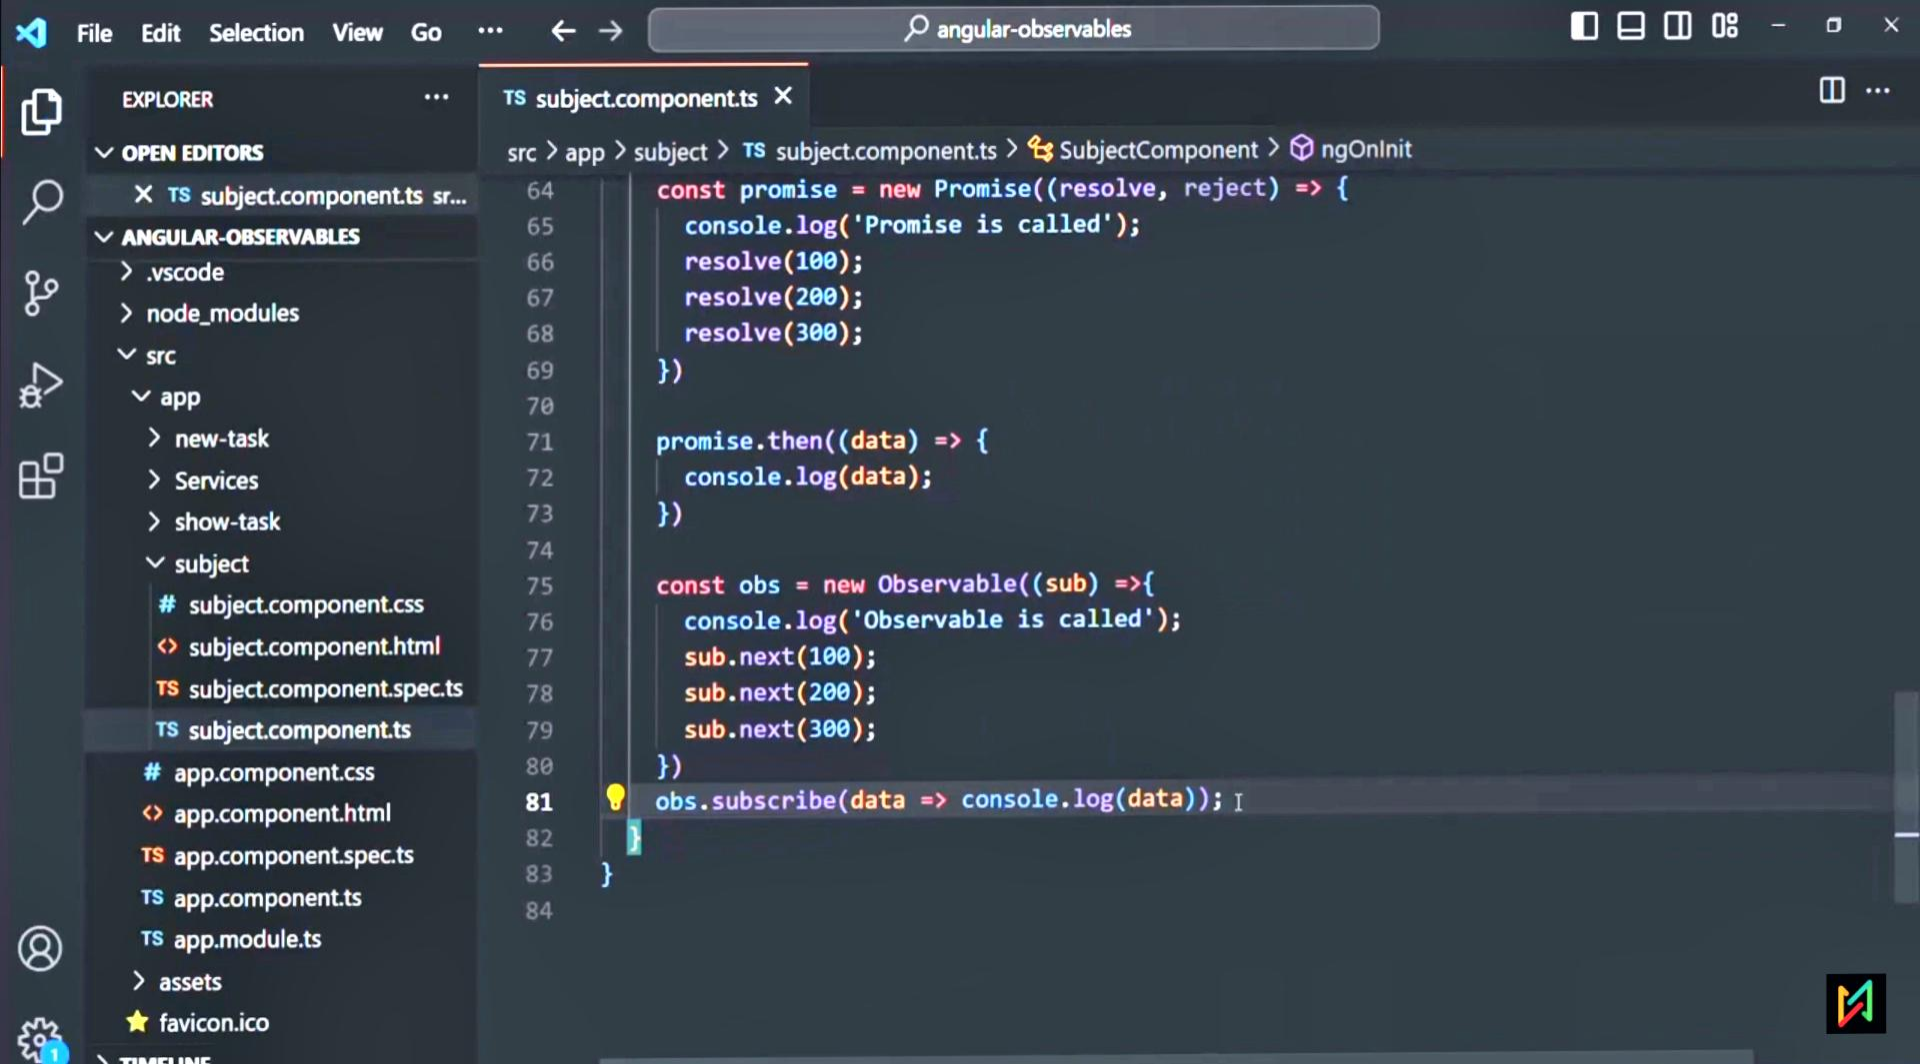

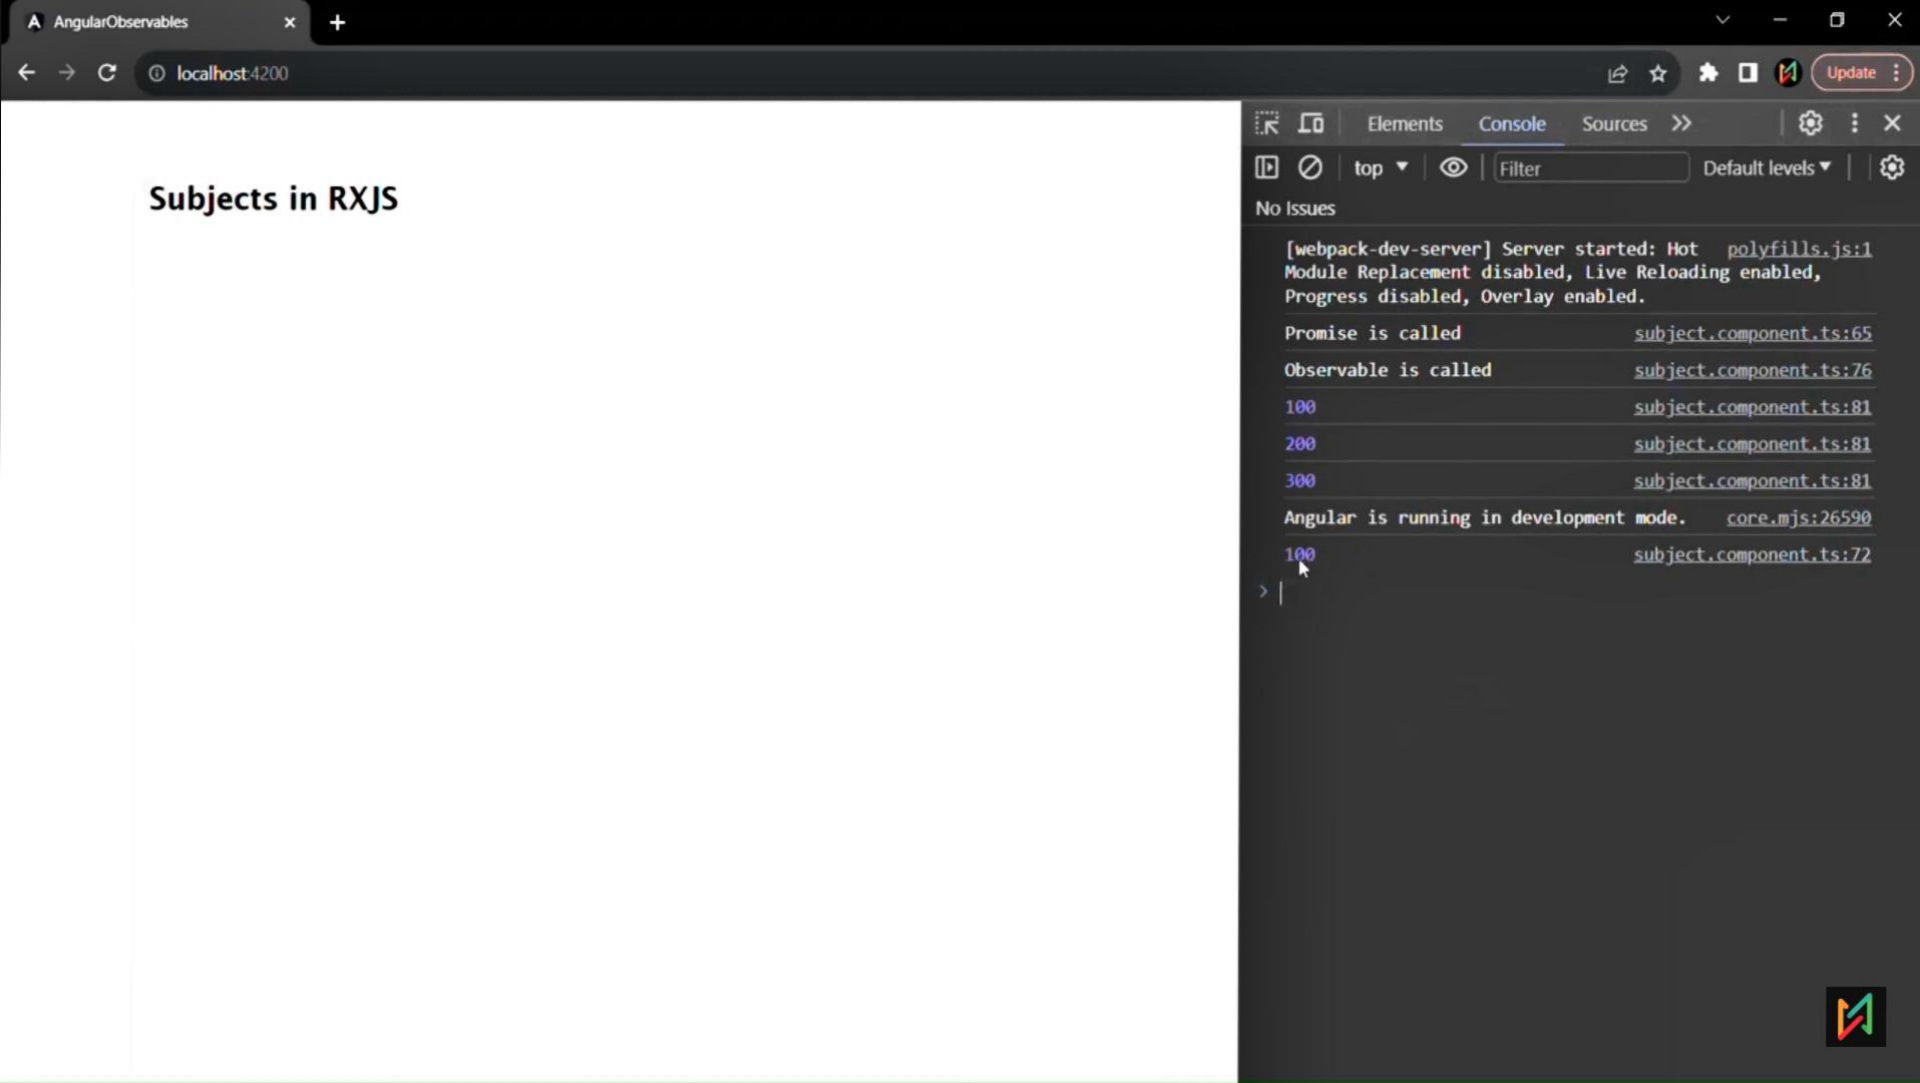

Subjects in RXJS

[webpack-dev-server] Server started: Hot polyfills.js:1
Module Replacement disabled, Live Reloading enabled,
Progress disabled, Overlay enabled.

Promise is called subject.component.ts:65

Observable is called subject.component.ts:76

100 subject.component.ts:81

200 subject.component.ts:81

300 subject.component.ts:81

Angular is running in development mode. core.mjs:26590

100 subject.component.ts:72

> |

File Edit Selection View Go ... angular-observables

EXPLORER

OPEN EDITORS

- TS unsubscribe.component.ts
- unsubscribe.component.html

ANGULAR-OBSERVABLES

- .angular
- .vscode
- node_modules
- src
 - app
 - new-task
 - Services
 - show-task
 - subject
 - unsubscribe
 - # unsubscribe.component.css
 - unsubscribe.component.h...
 - TS unsubscribe.component.ts

TS unsubscribe.component.ts

```
src > app > unsubscribe > TS unsubscribe.component.ts > UnsubscribeComponent > OnUnsubscribe
1  import { Component } from '@angular/core';
2  import { interval } from 'rxjs';
3
4  @Component({
5    selector: 'app-unsubscribe',
6    templateUrl: './unsubscribe.component.html',
7    styleUrls: ['./unsubscribe.component.css']
8  })
9  export class UnsubscribeComponent {
10    counter = interval(1000);
11    data: number[] = [];
12    subscriber1;
13
14    OnSubscribe(){
15      this.subscriber1 = this.counter.subscribe((val) => {
16        this.data.push(val);
17      })
18    }
19
20    OnUnsubscribe(){
21      this.subscriber1.unsubscribe();
22    }
23  }
24
```

Unsubscribing to an Observable

Subscriber 1

0

1

2

3

4

5

6

Subscribe

Unsubscribe



Unsubscribing to an Observable

Subscriber 1

0

1

2

3

4

5

6

0

1

