


Standalone Component

- What standalone component is all about?
- What standalone component is introduced in Angular?
- What problem does it solve?



Problem: Standard Angular Application

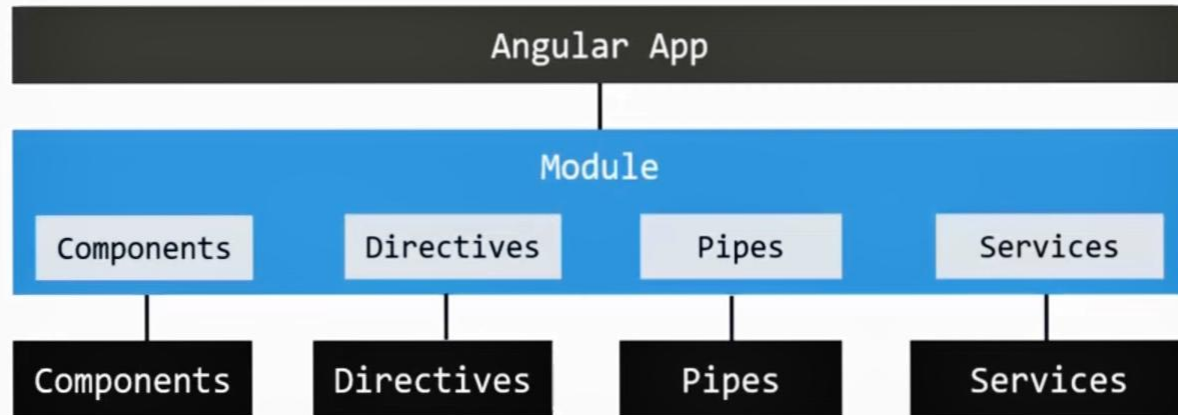



Standalone Component


A Standalone component is a special type of component that does not require to be declared in **NgModule** of a module class. It simplifies the development process by eliminating the need of NgModule.


- **No NgModules:** Standalone components don't need to be declared in any NgModule.
- **Simpler development:** They streamline the development experience by reducing boilerplate code.
- **Can be used with NgModules:** Standalone components can still be used alongside components within NgModules.




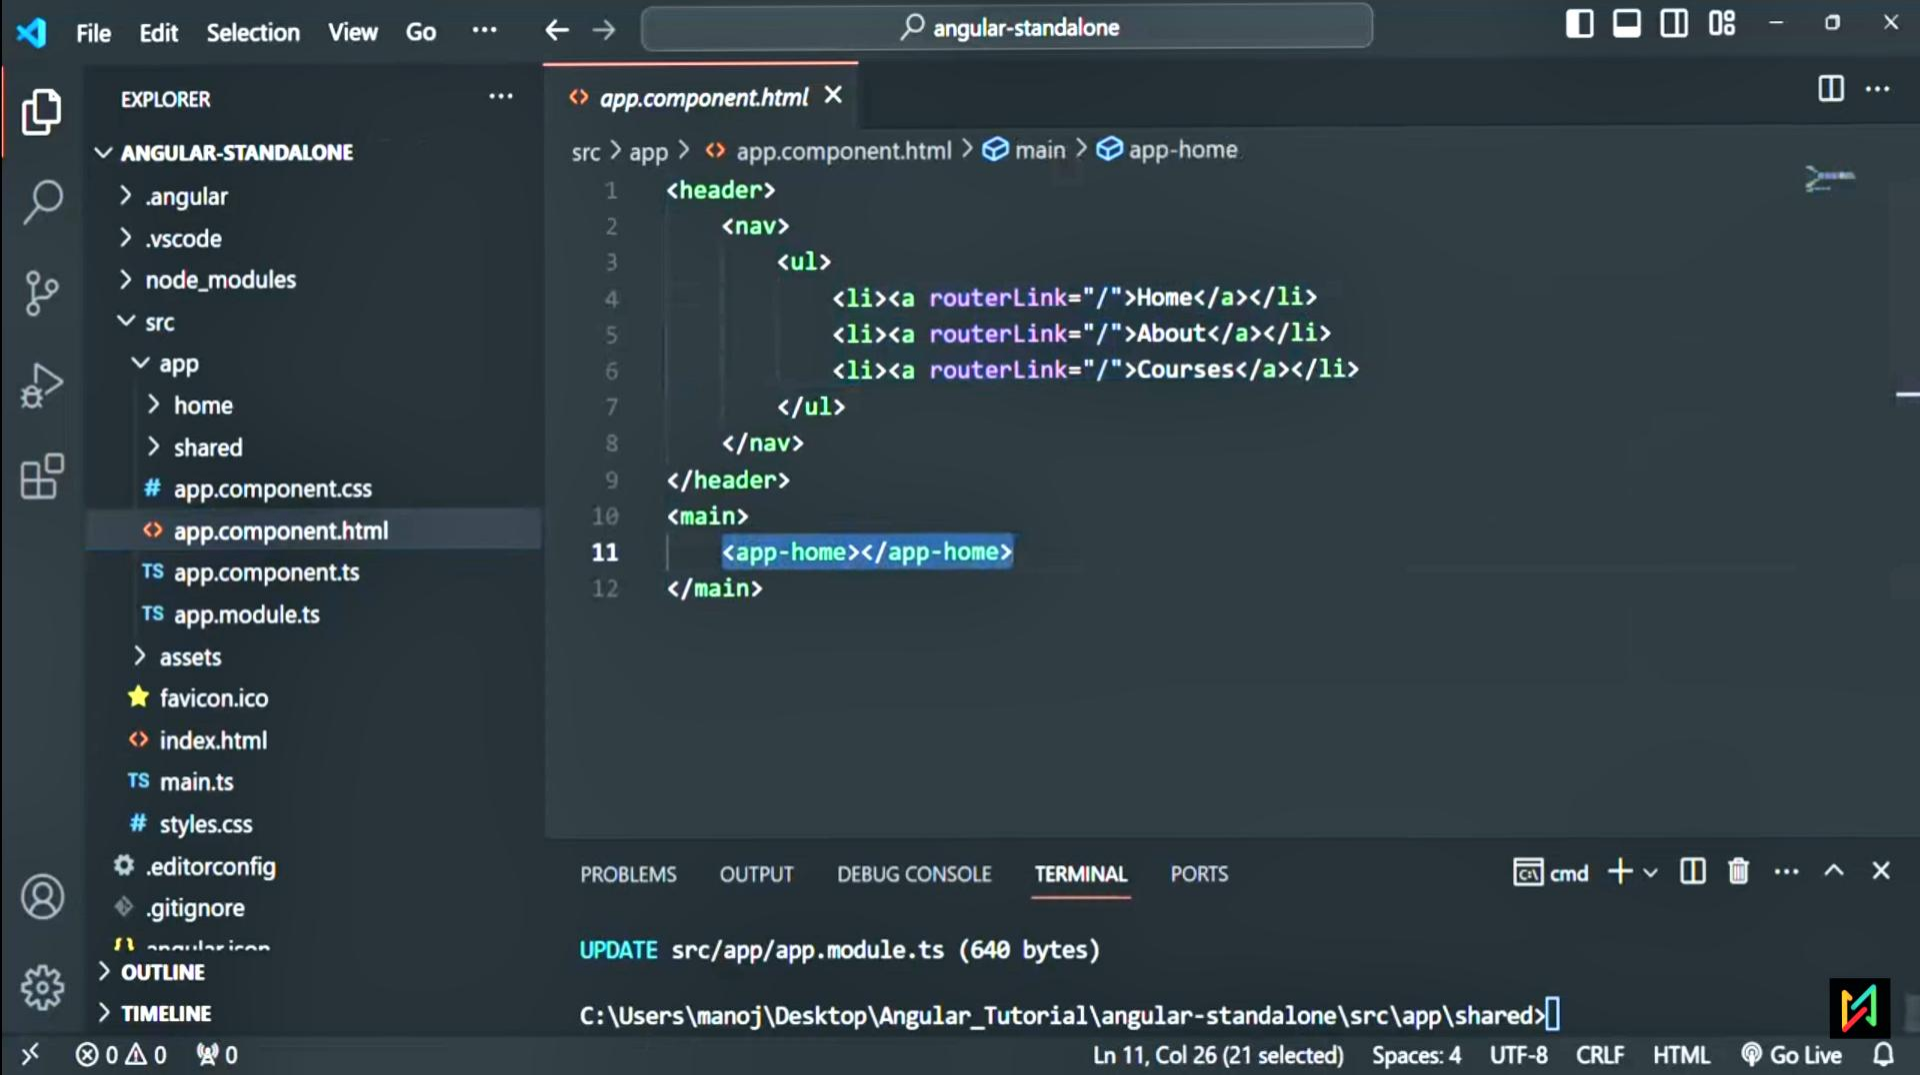


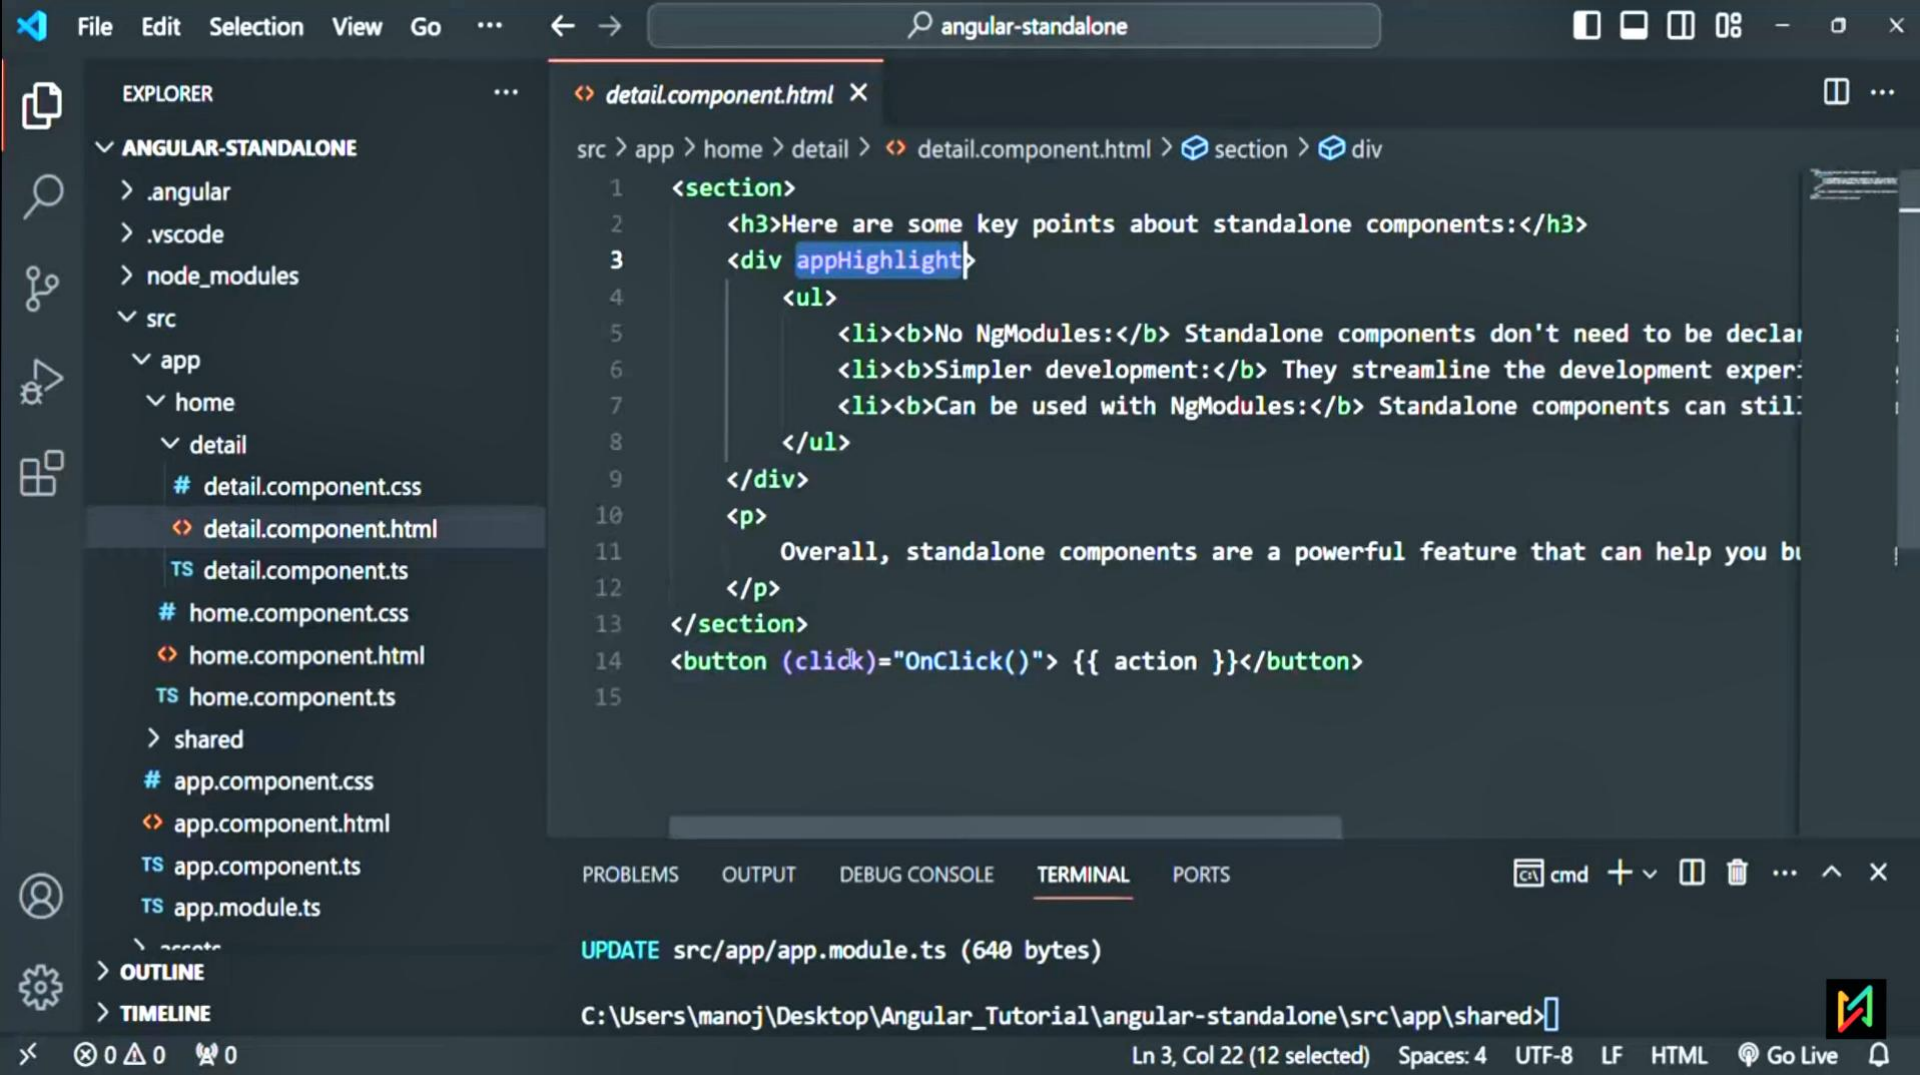

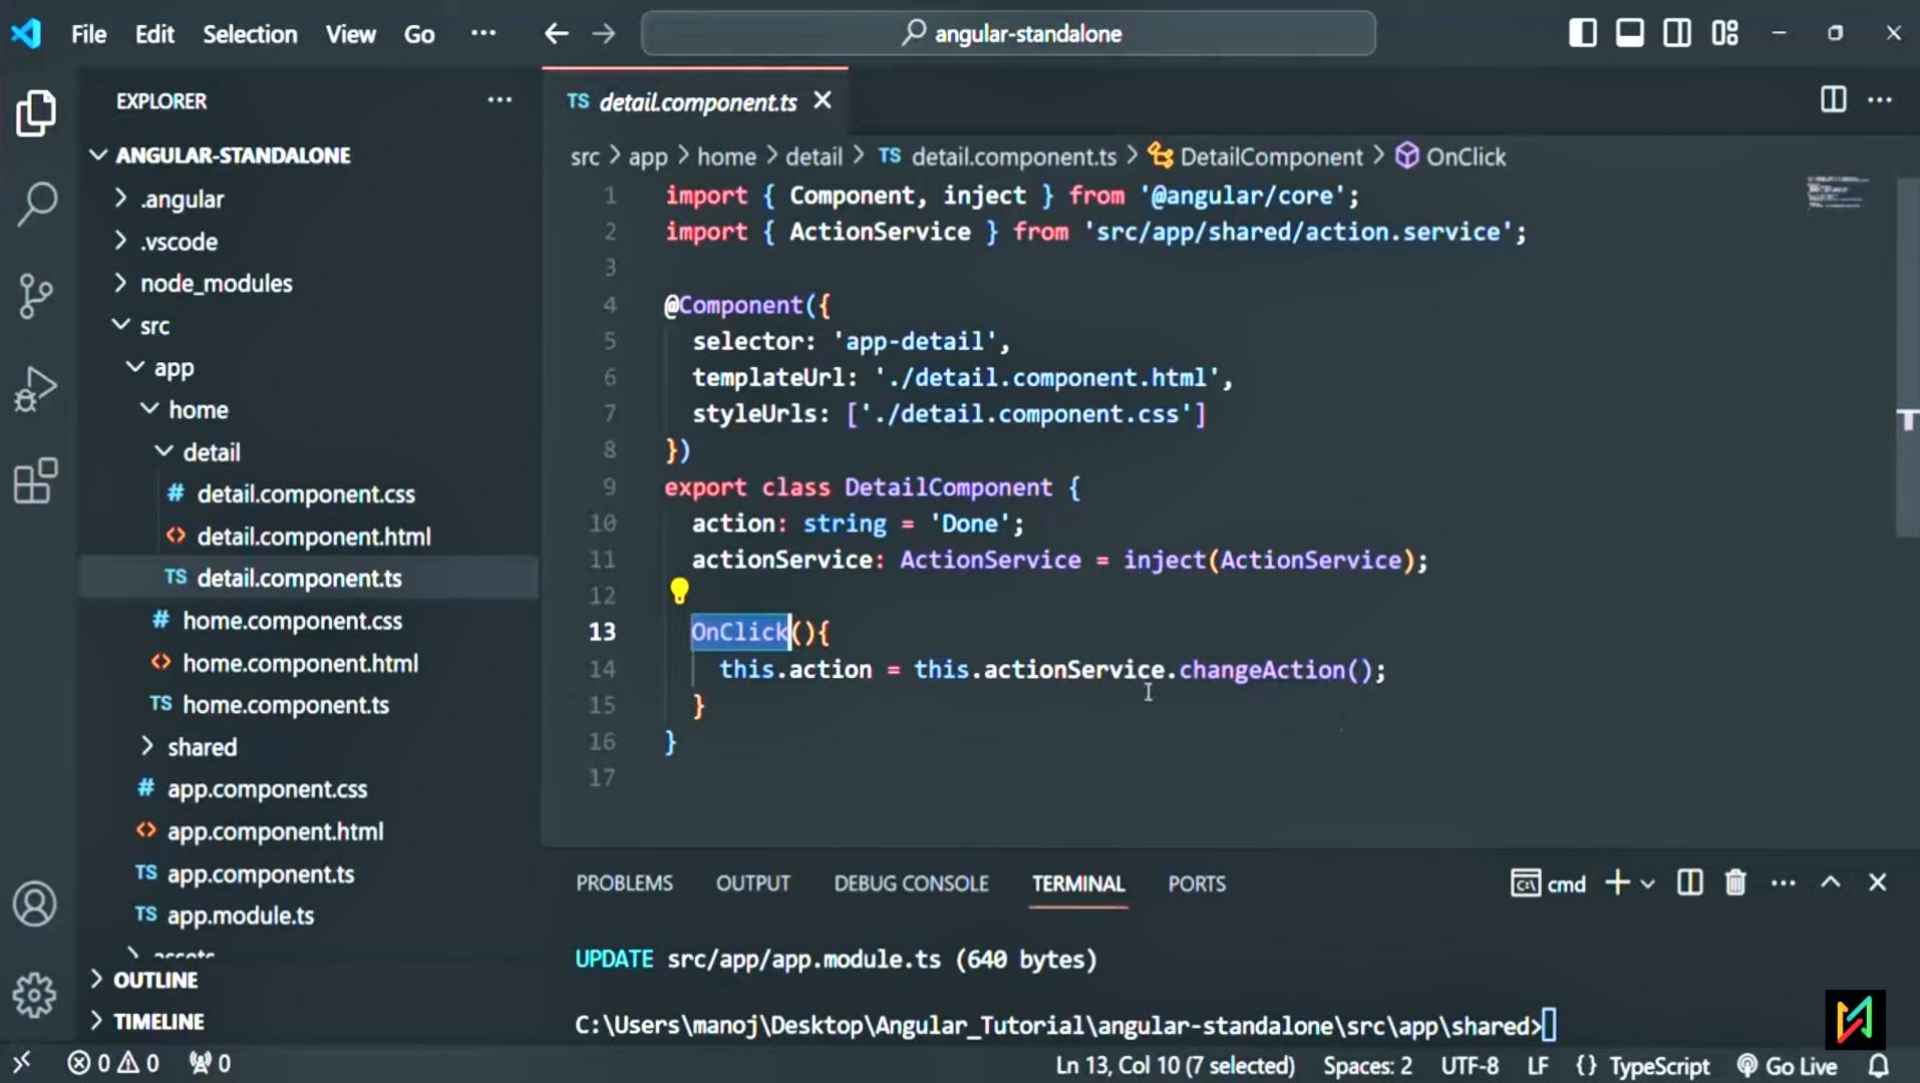

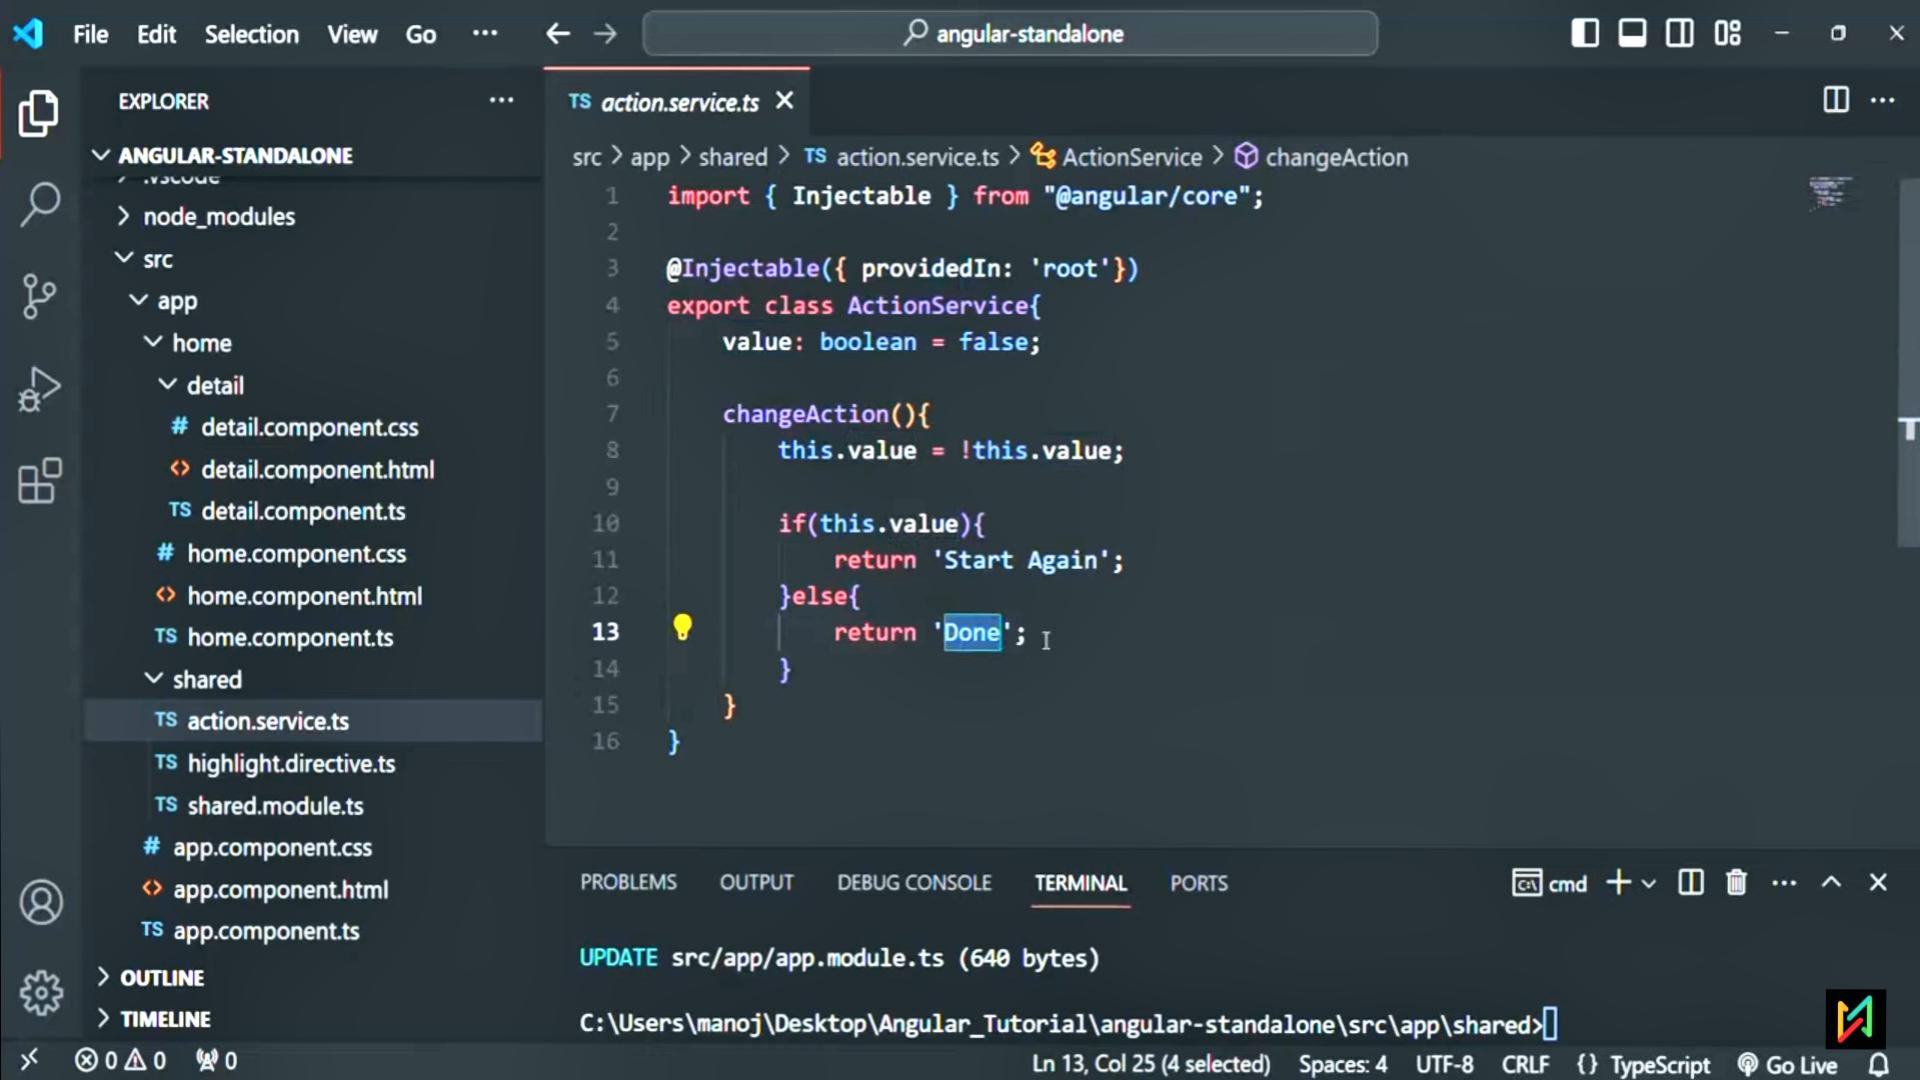

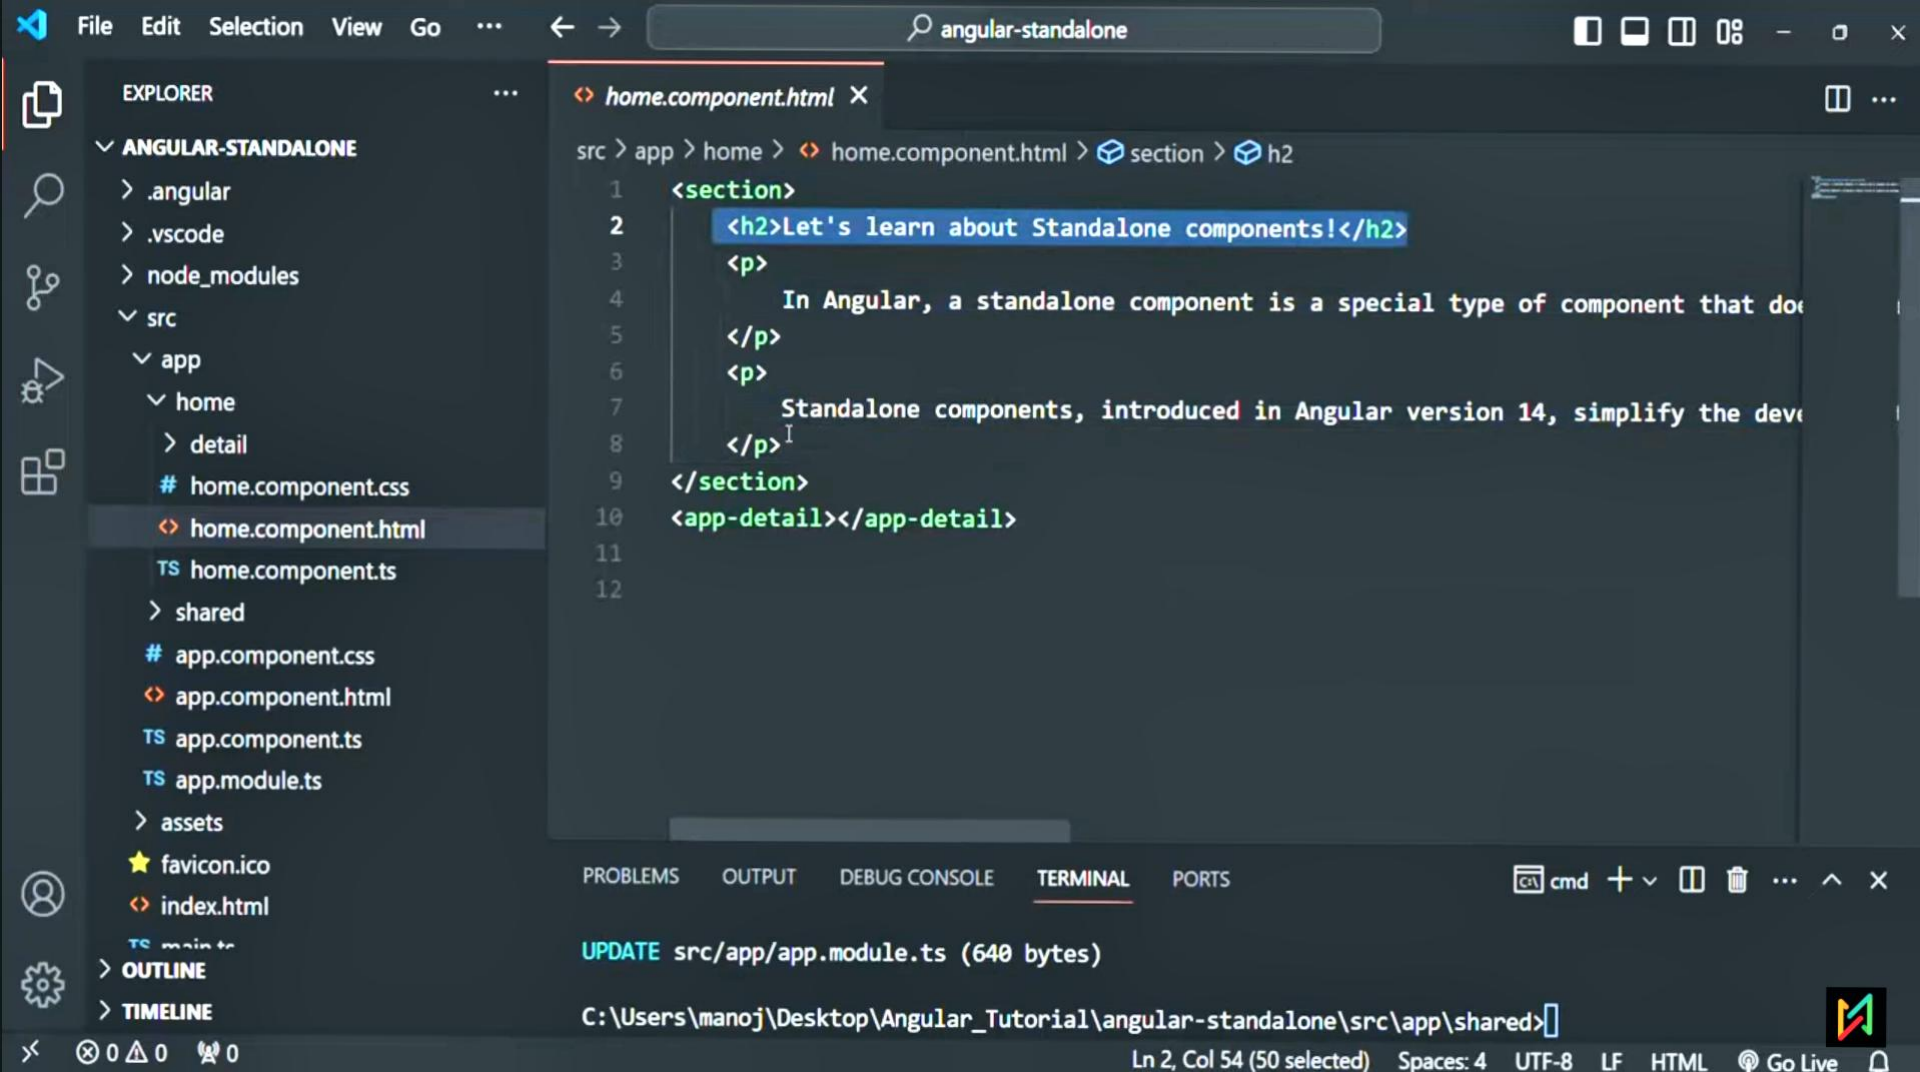

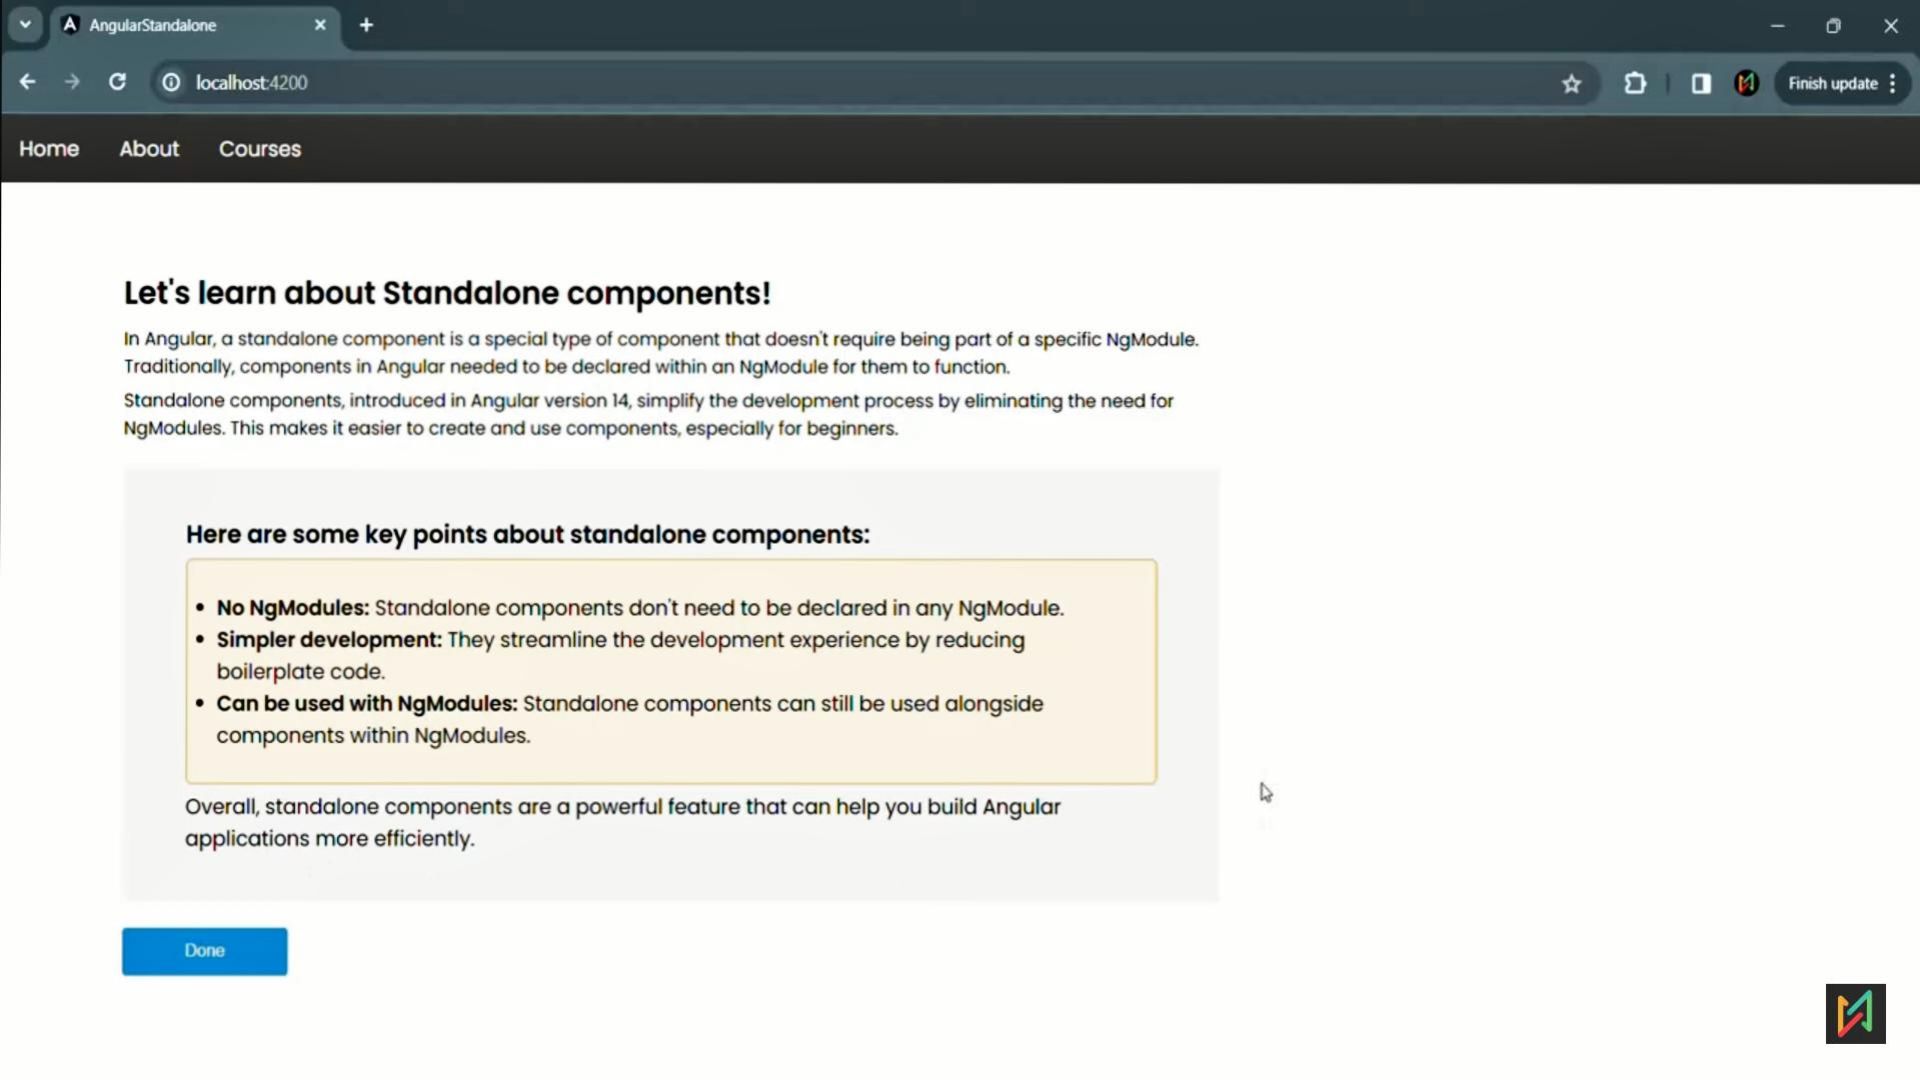

Let's learn about Standalone components!

In Angular, a standalone component is a special type of component that doesn't require being part of a specific NgModule. Traditionally, components in Angular needed to be declared within an NgModule for them to function.

Standalone components, introduced in Angular version 14, simplify the development process by eliminating the need for NgModules. This makes it easier to create and use components, especially for beginners.


Here are some key points about standalone components:

- **No NgModules:** Standalone components don't need to be declared in any NgModule.
- **Simpler development:** They streamline the development experience by reducing boilerplate code.
- **Can be used with NgModules:** Standalone components can still be used alongside components within NgModules.

Overall, standalone components are a powerful feature that can help you build Angular applications more efficiently.

Done



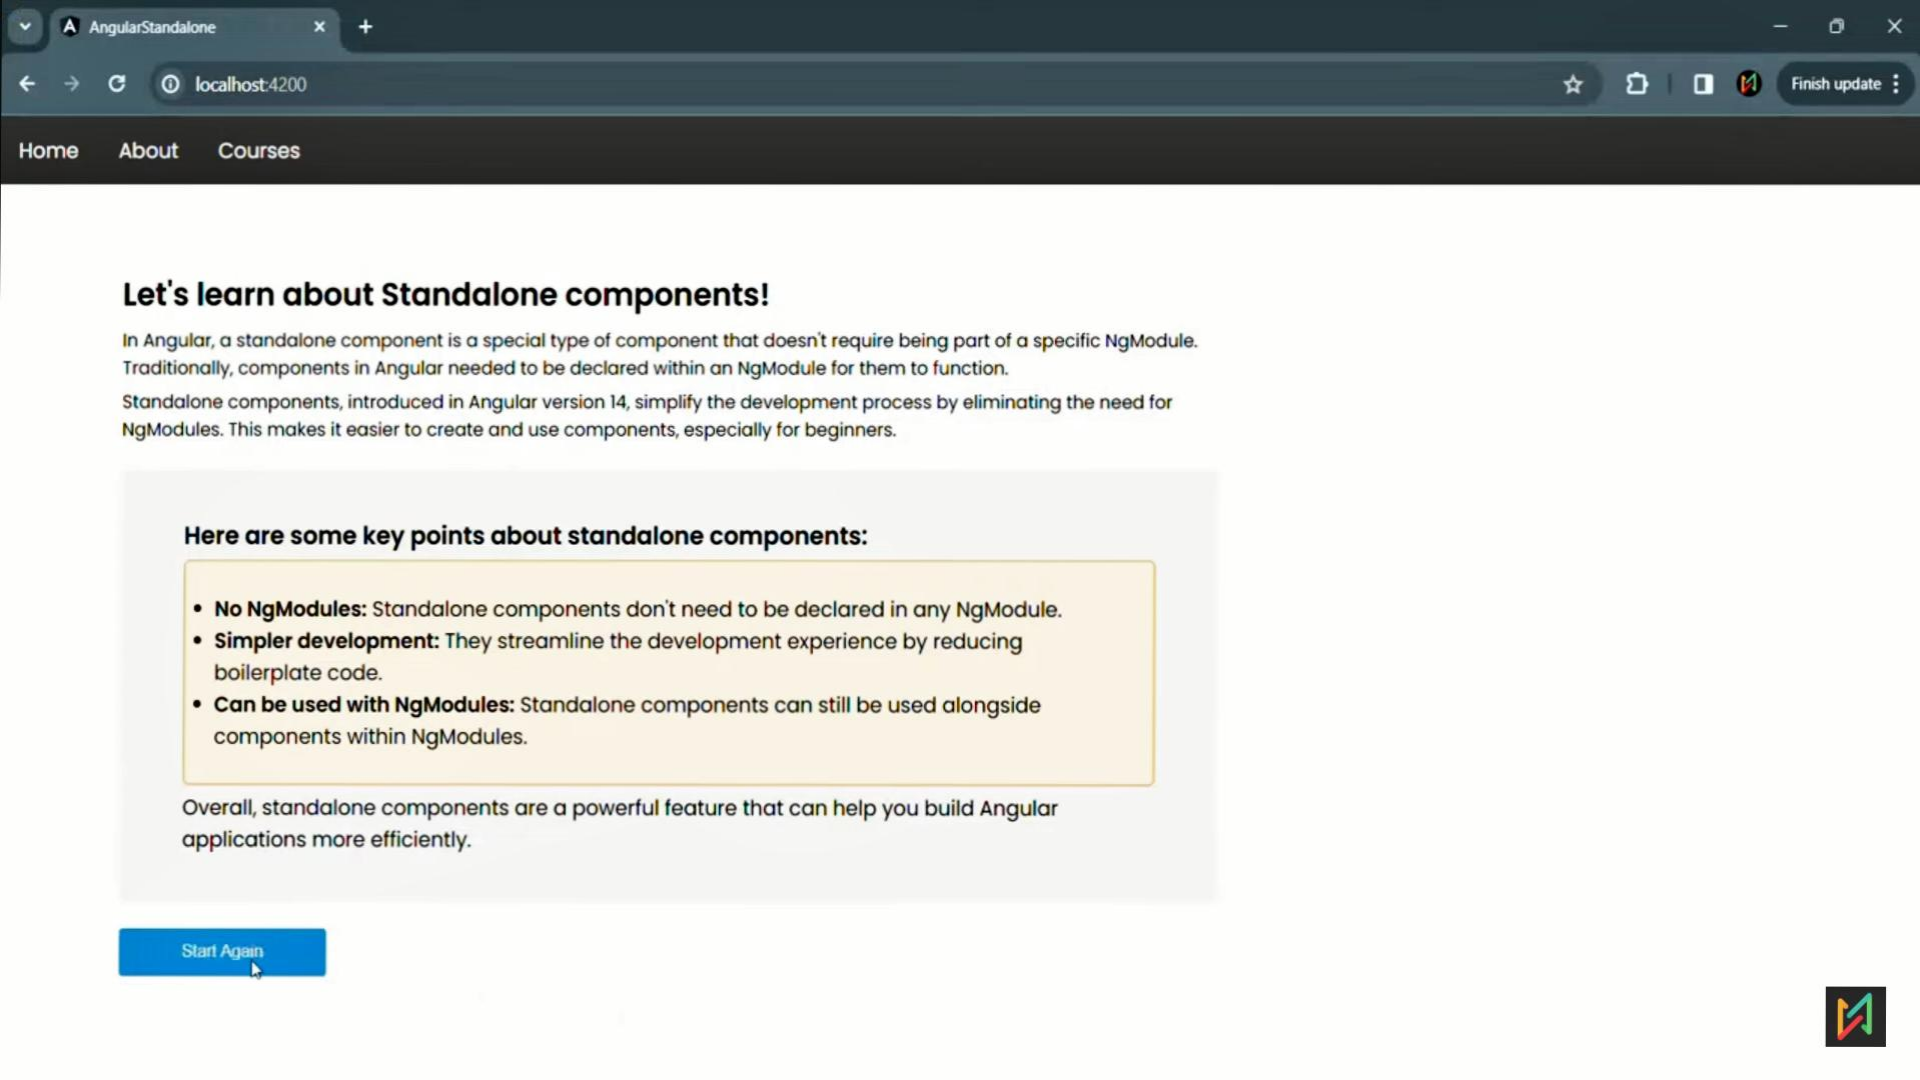

Let's learn about Standalone components!

In Angular, a standalone component is a special type of component that doesn't require being part of a specific NgModule. Traditionally, components in Angular needed to be declared within an NgModule for them to function.


Standalone components, introduced in Angular version 14, simplify the development process by eliminating the need for NgModules. This makes it easier to create and use components, especially for beginners.


Here are some key points about standalone components:


- **No NgModules:** Standalone components don't need to be declared in any NgModule.
- **Simpler development:** They streamline the development experience by reducing boilerplate code.
- **Can be used with NgModules:** Standalone components can still be used alongside components within NgModules.

Overall, standalone components are a powerful feature that can help you build Angular applications more efficiently.

[Start Again](#)

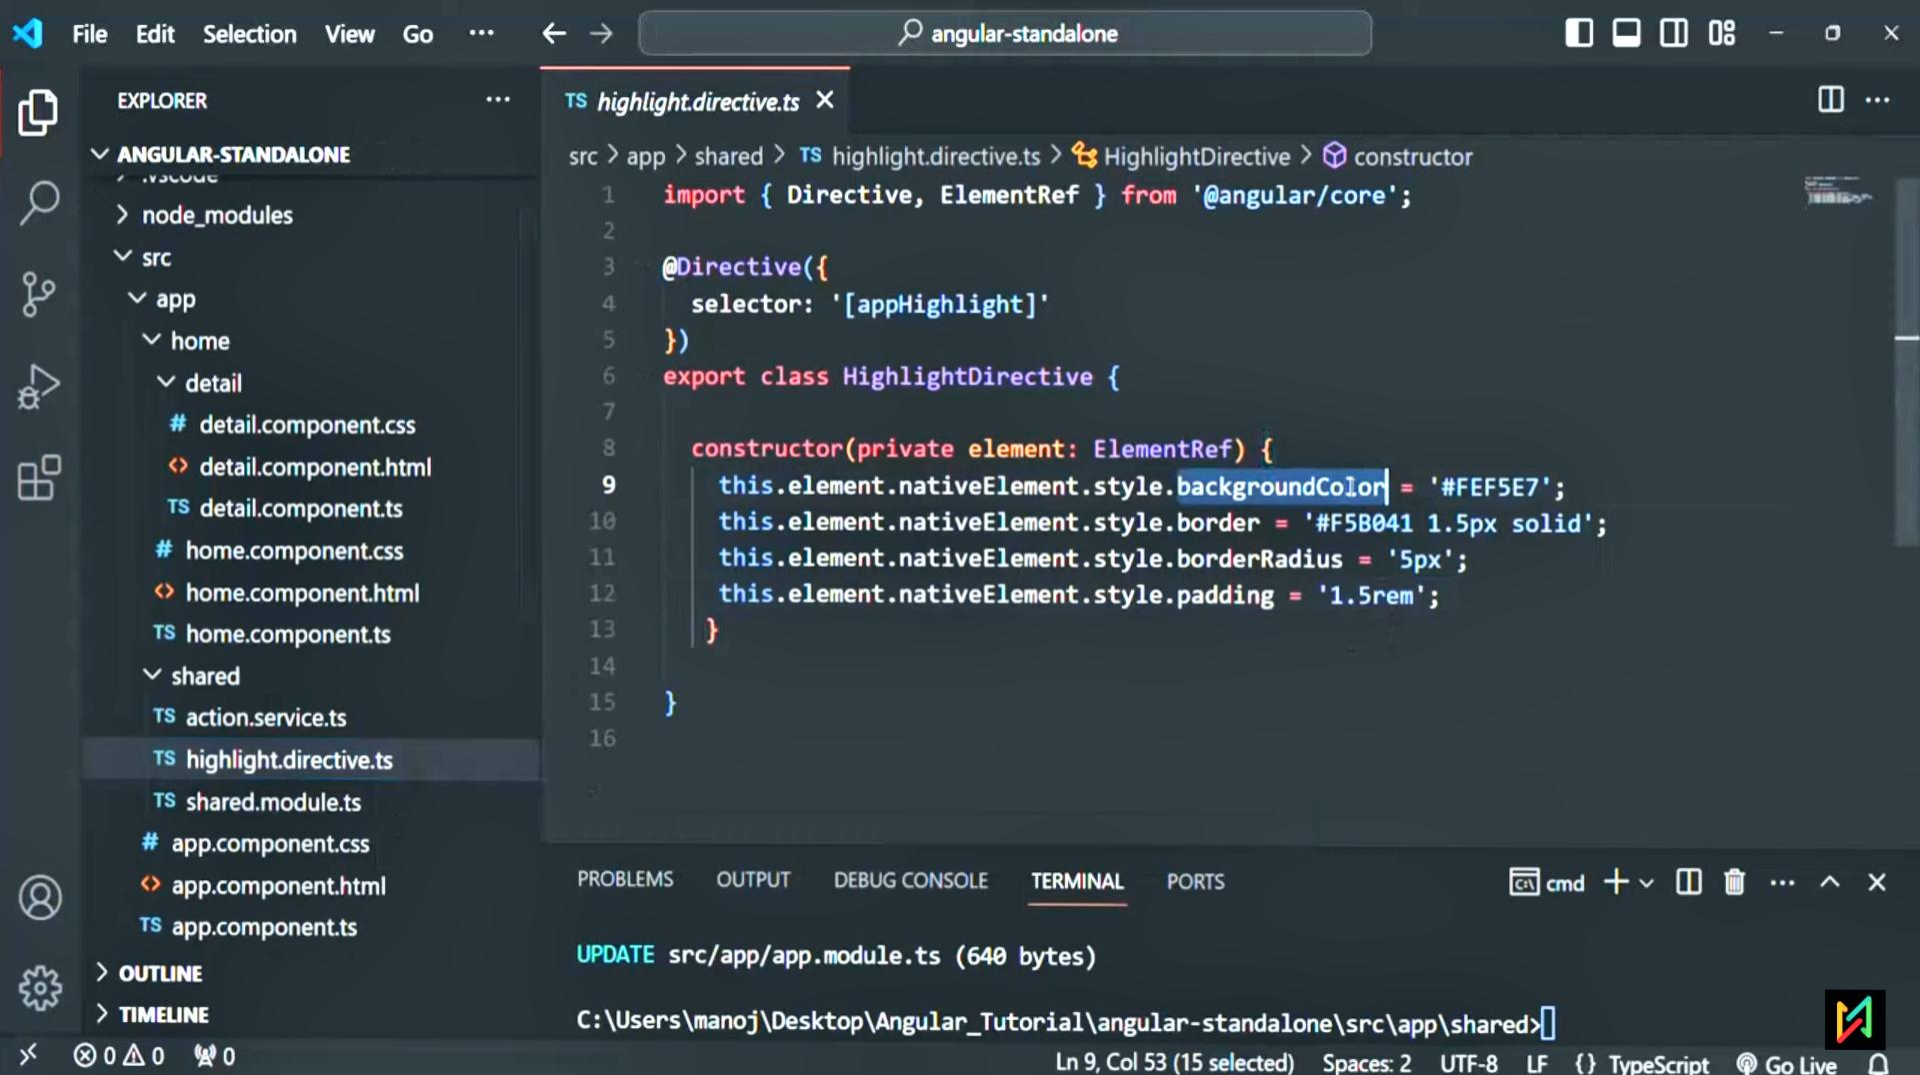

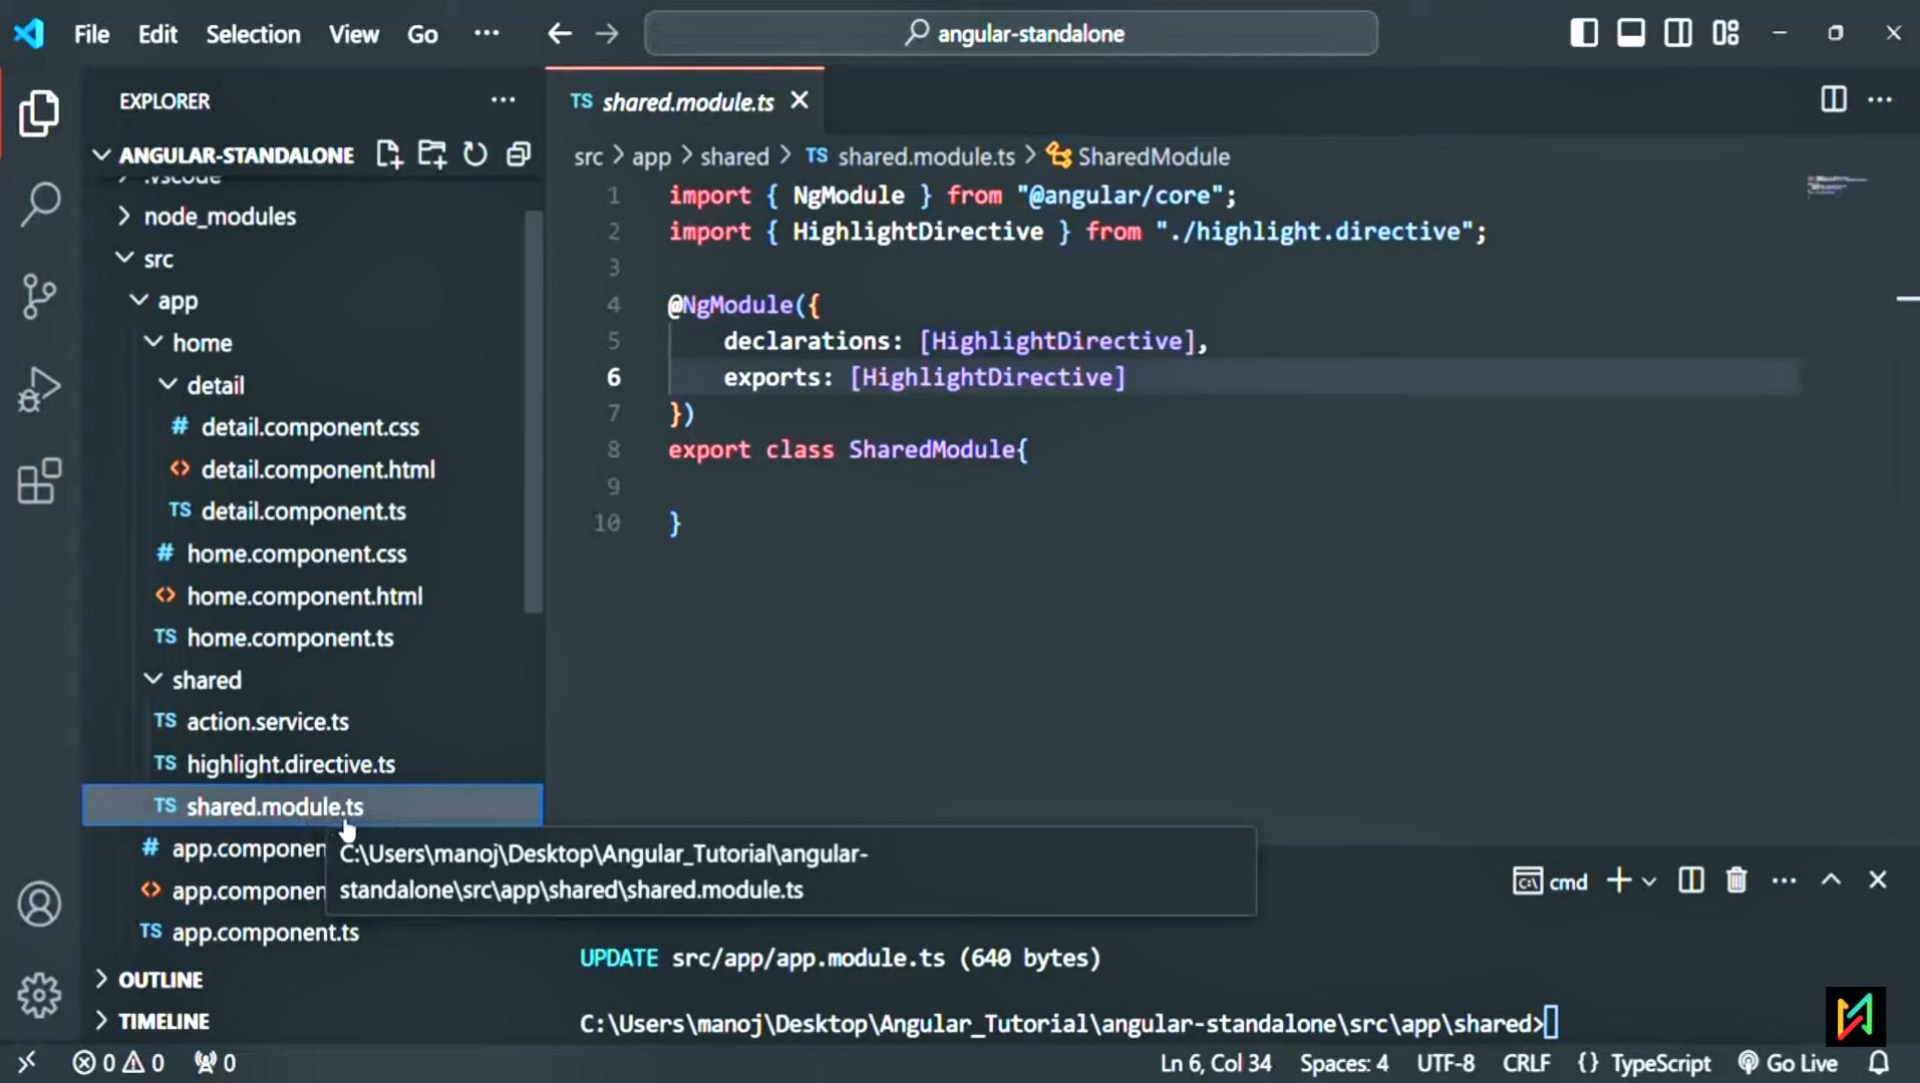

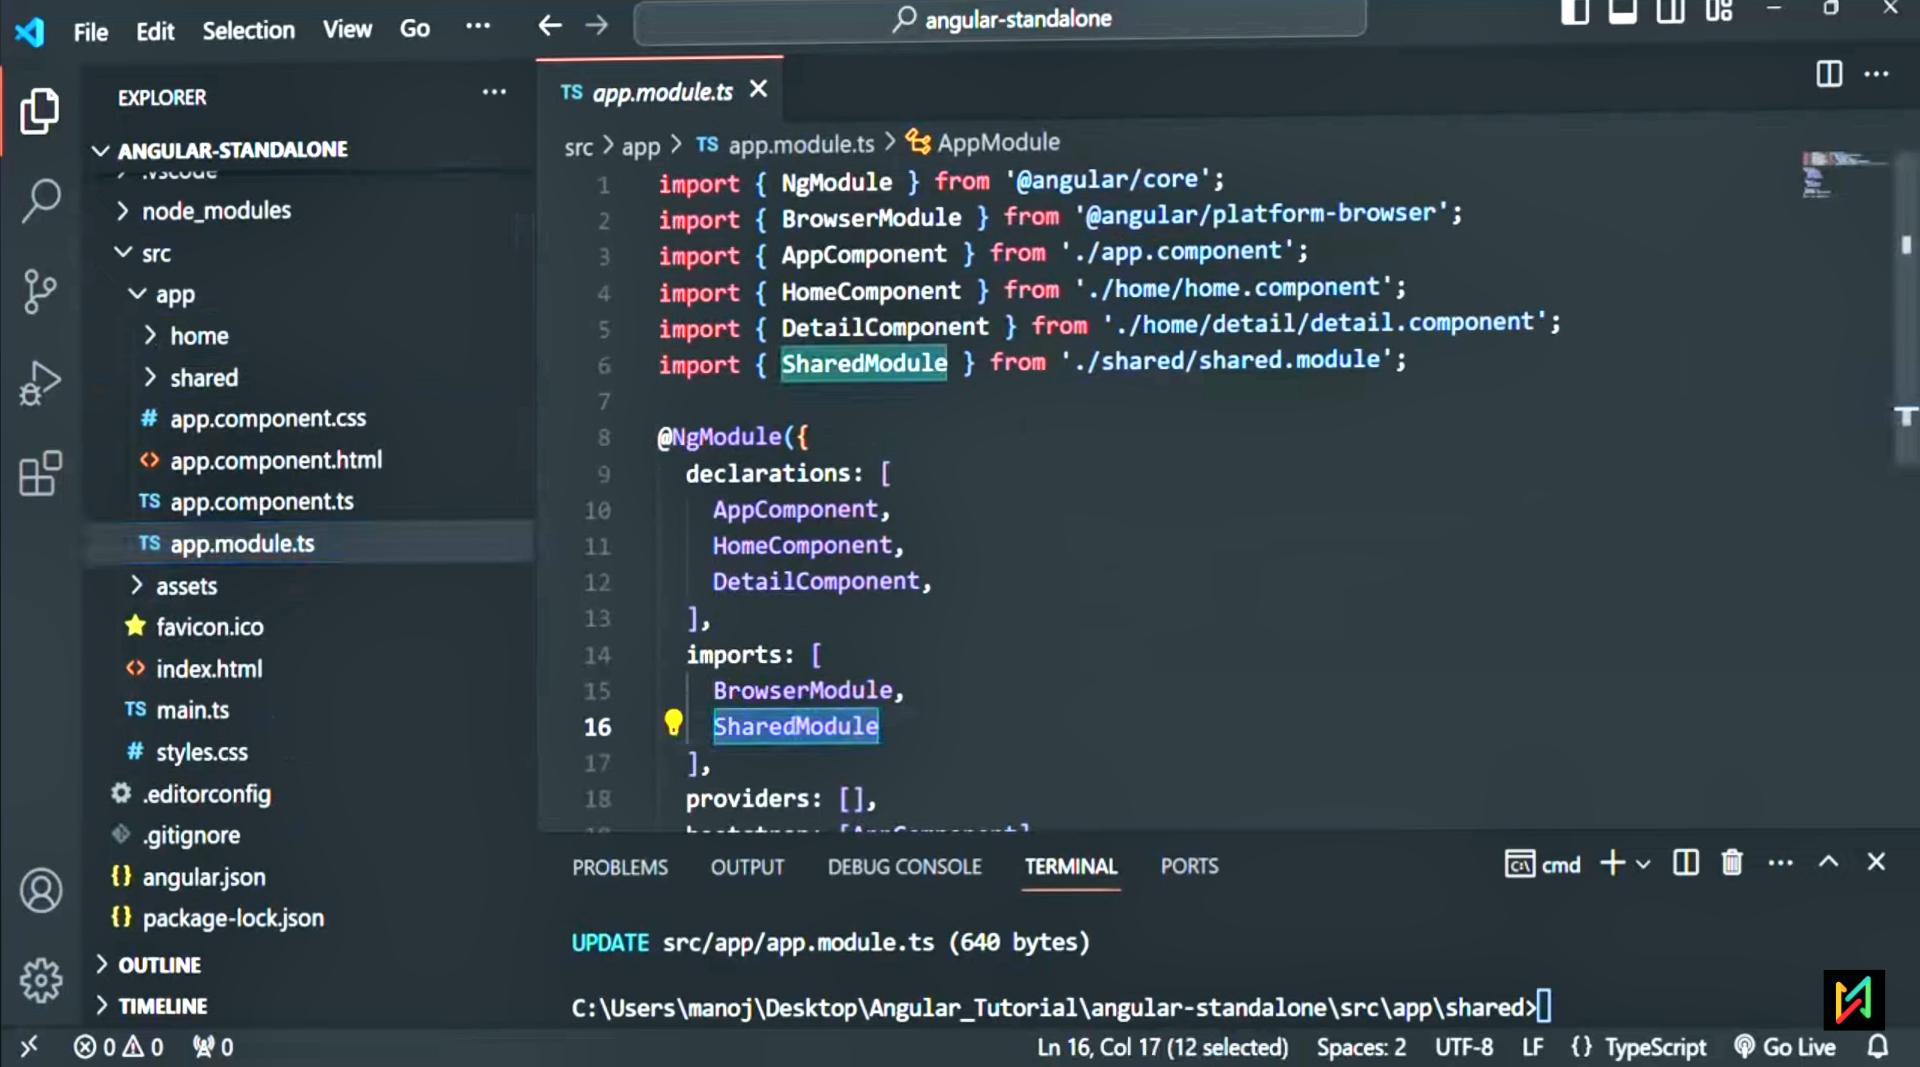

EXPLORER

ANGULAR-STANDALONE

> node_modules

src

app

> home

> shared

app.component.css

<> app.component.html

TS app.component.ts

TS app.module.ts

> assets

★ favicon.ico

<> index.html

TS main.ts

styles.css

⚙ .editorconfig

💎 .gitignore

{ } angular.json

{ } package-lock.json

> OUTLINE

> TIMELINE

TS app.module.ts X

src > app > TS app.module.ts > AppModule

```
1 import { NgModule } from '@angular/core';
2 import { BrowserModule } from '@angular/platform-browser';
3 import { AppComponent } from './app.component';
4 import { HomeComponent } from './home/home.component';
5 import { DetailComponent } from './home/detail/detail.component';
6 import { SharedModule } from './shared/shared.module';
```

```
7
8 @NgModule({
9   declarations: [
10     AppComponent,
11     HomeComponent,
12     DetailComponent,
13   ],
14   imports: [
15     BrowserModule,
16     SharedModule
17   ],
18   providers: [],
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

cmd + v + [icon] + [icon] + ... + ^ + X

UPDATE src/app/app.module.ts (640 bytes)

C:\Users\manoj\Desktop\Angular_Tutorial\angular-standalone\src\app\shared>

EXPLORER


ANGULAR-STANDALONE


- .angular
- .vscode
- node_modules
- src
 - app
 - home
 - detail
 - detail.component.css
 - detail.component.html
 - detail.component.ts
 - home.component.css
 - home.component.html
 - home.component.ts
 - shared
 - app.component.css
 - app.component.html
 - app.component.ts
 - app.module.ts
- OUTLINE
- TIMELINE


TS detail.component.ts


```
src > app > home > detail > TS detail.component.ts > DetailComponent
1  import { Component, inject } from '@angular/core';
2  import { ActionService } from 'src/app/shared/action.service';
3
4  @Component({
5    standalone: true,
6    selector: 'app-detail',
7    templateUrl: './detail.component.html',
8    styleUrls: ['./detail.component.css']
9  })
10 export class DetailComponent {
11   action: string = 'Done';
12   actionService: ActionService = inject(ActionService);
13
14   onClick(){
15     this.action = this.actionService.changeAction();
16   }
17 }
18
```



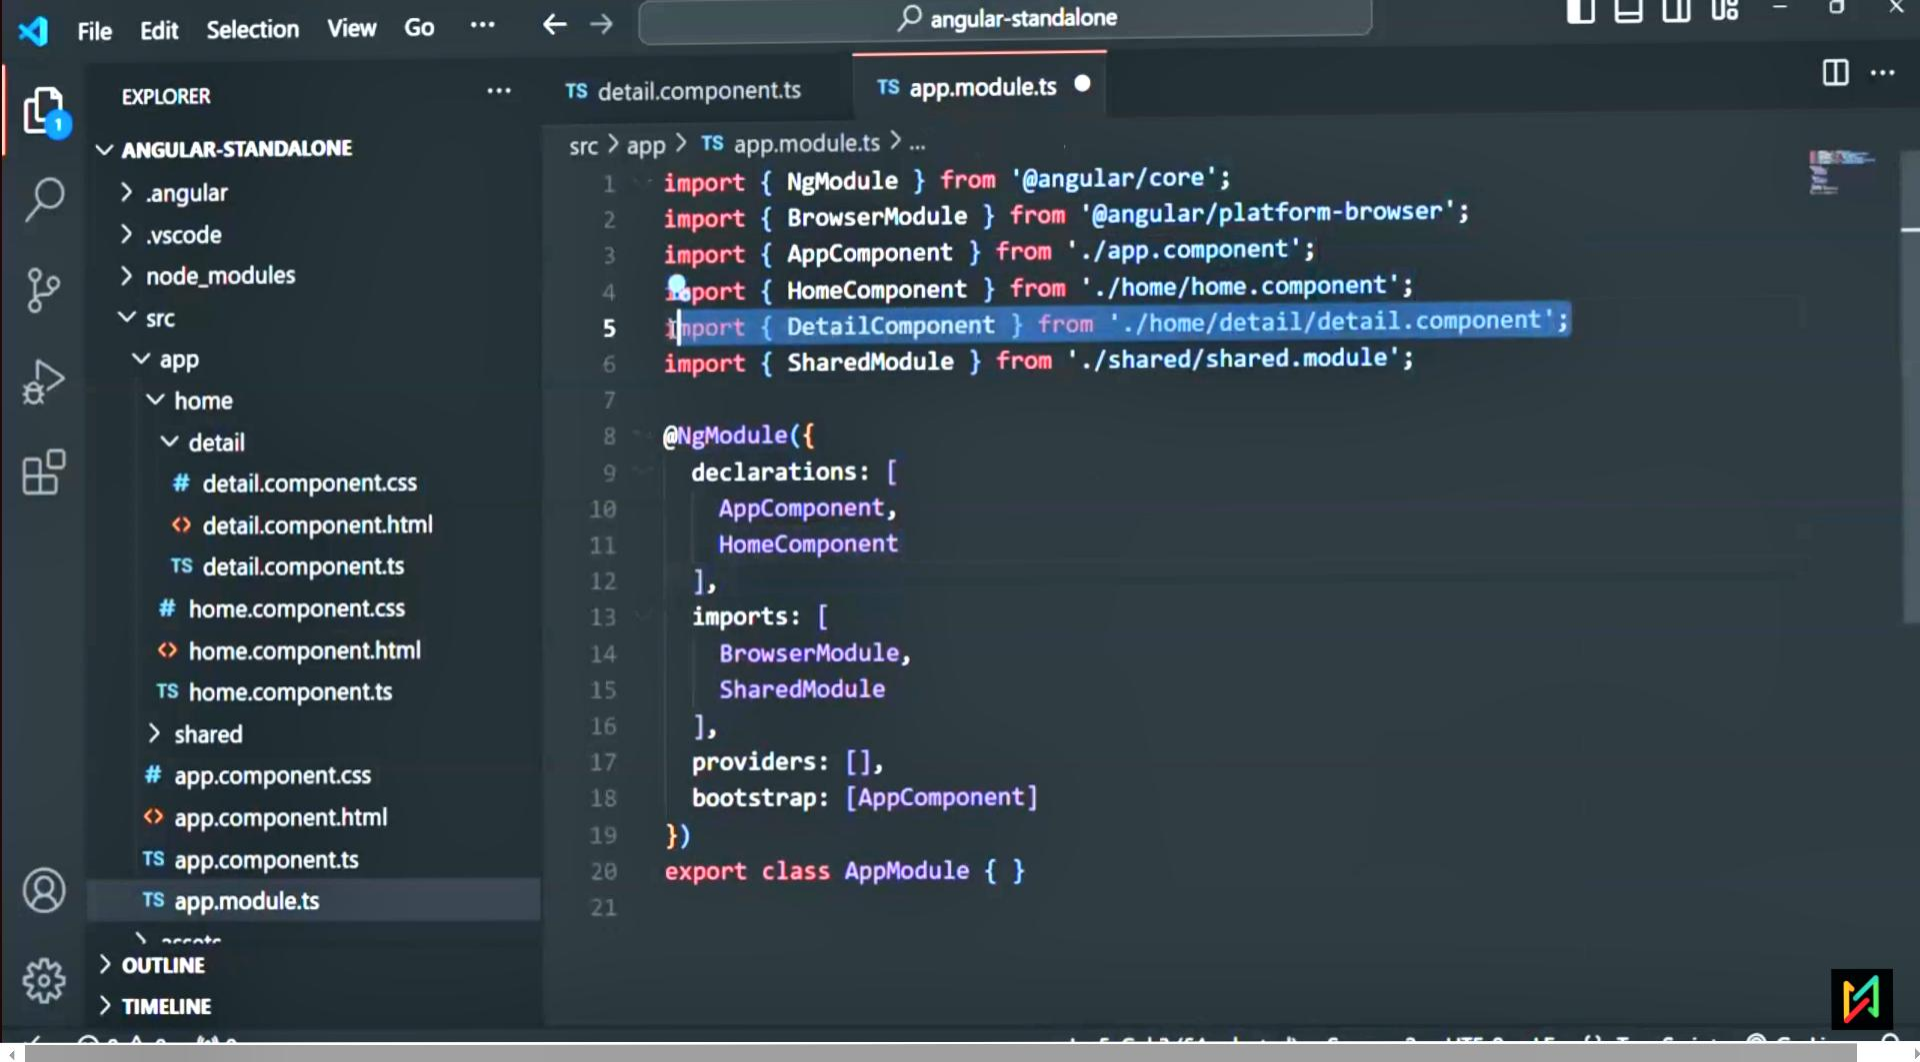

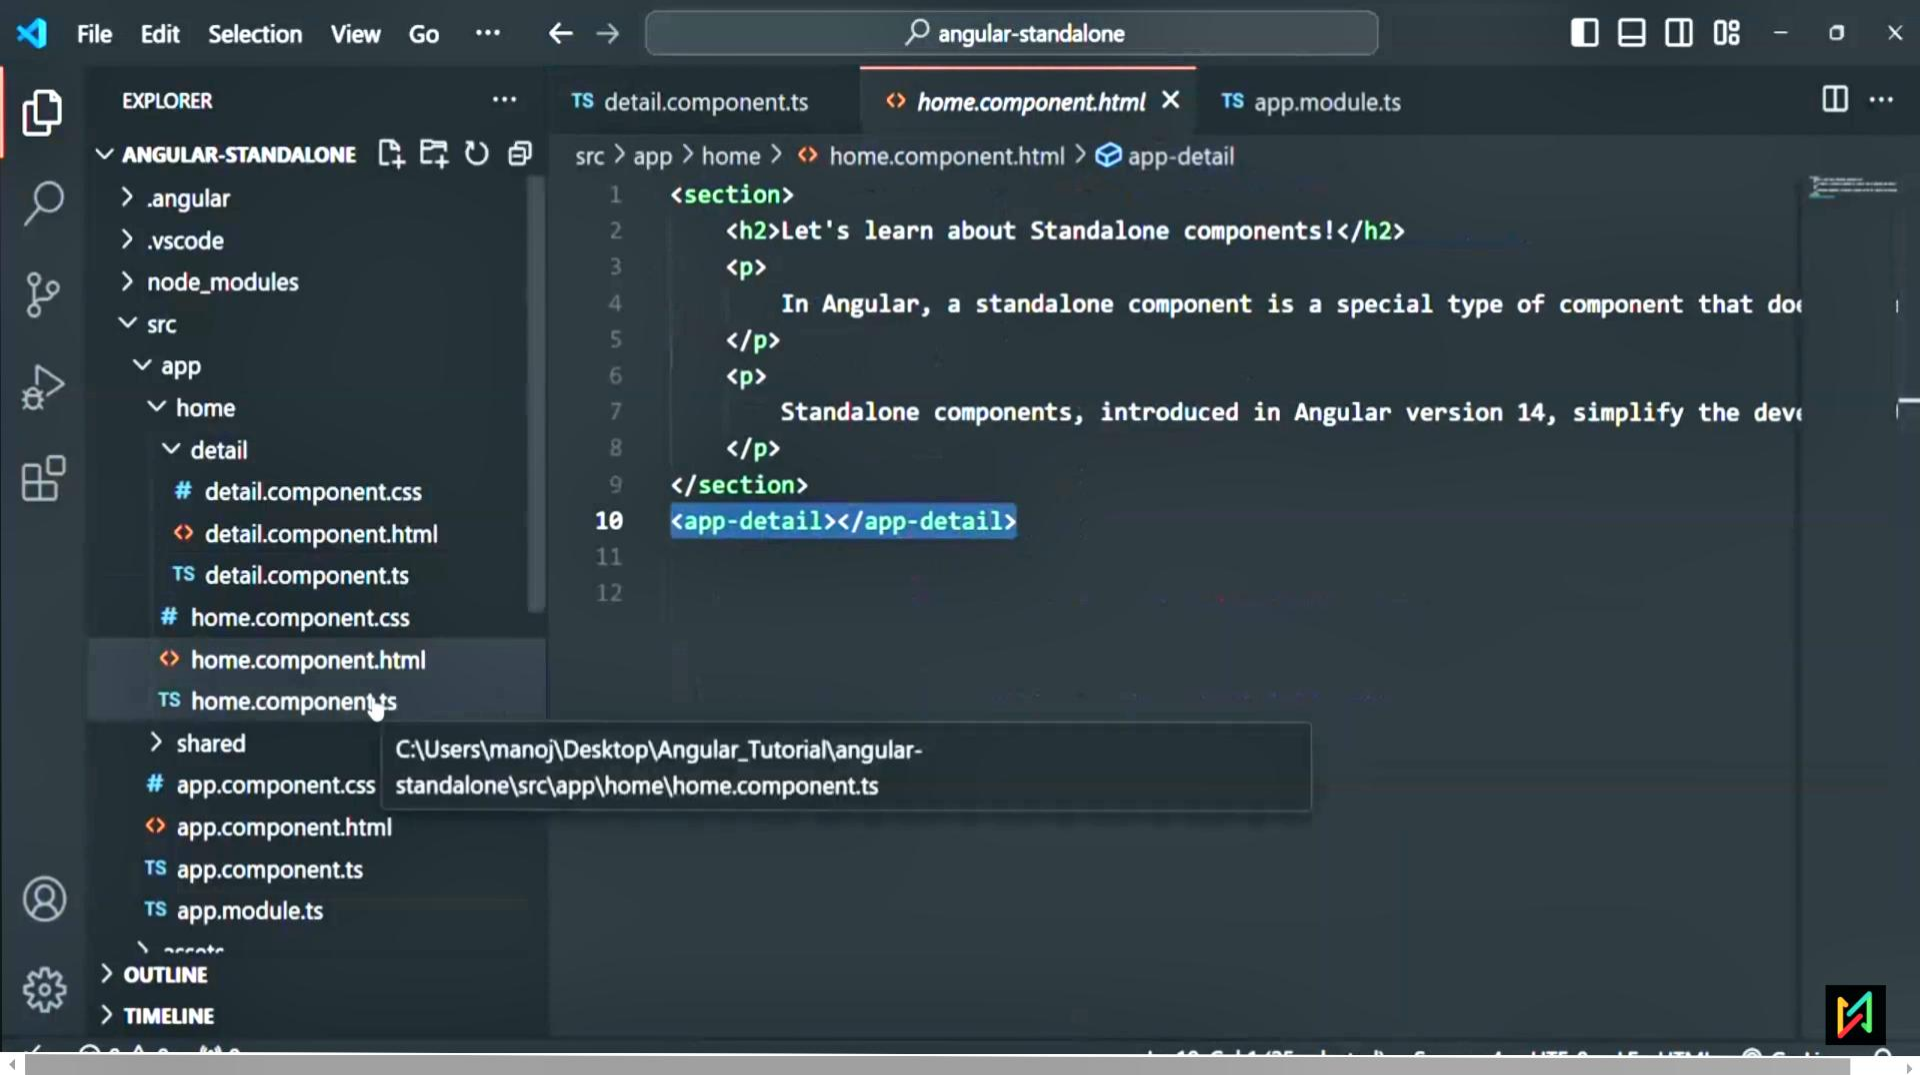

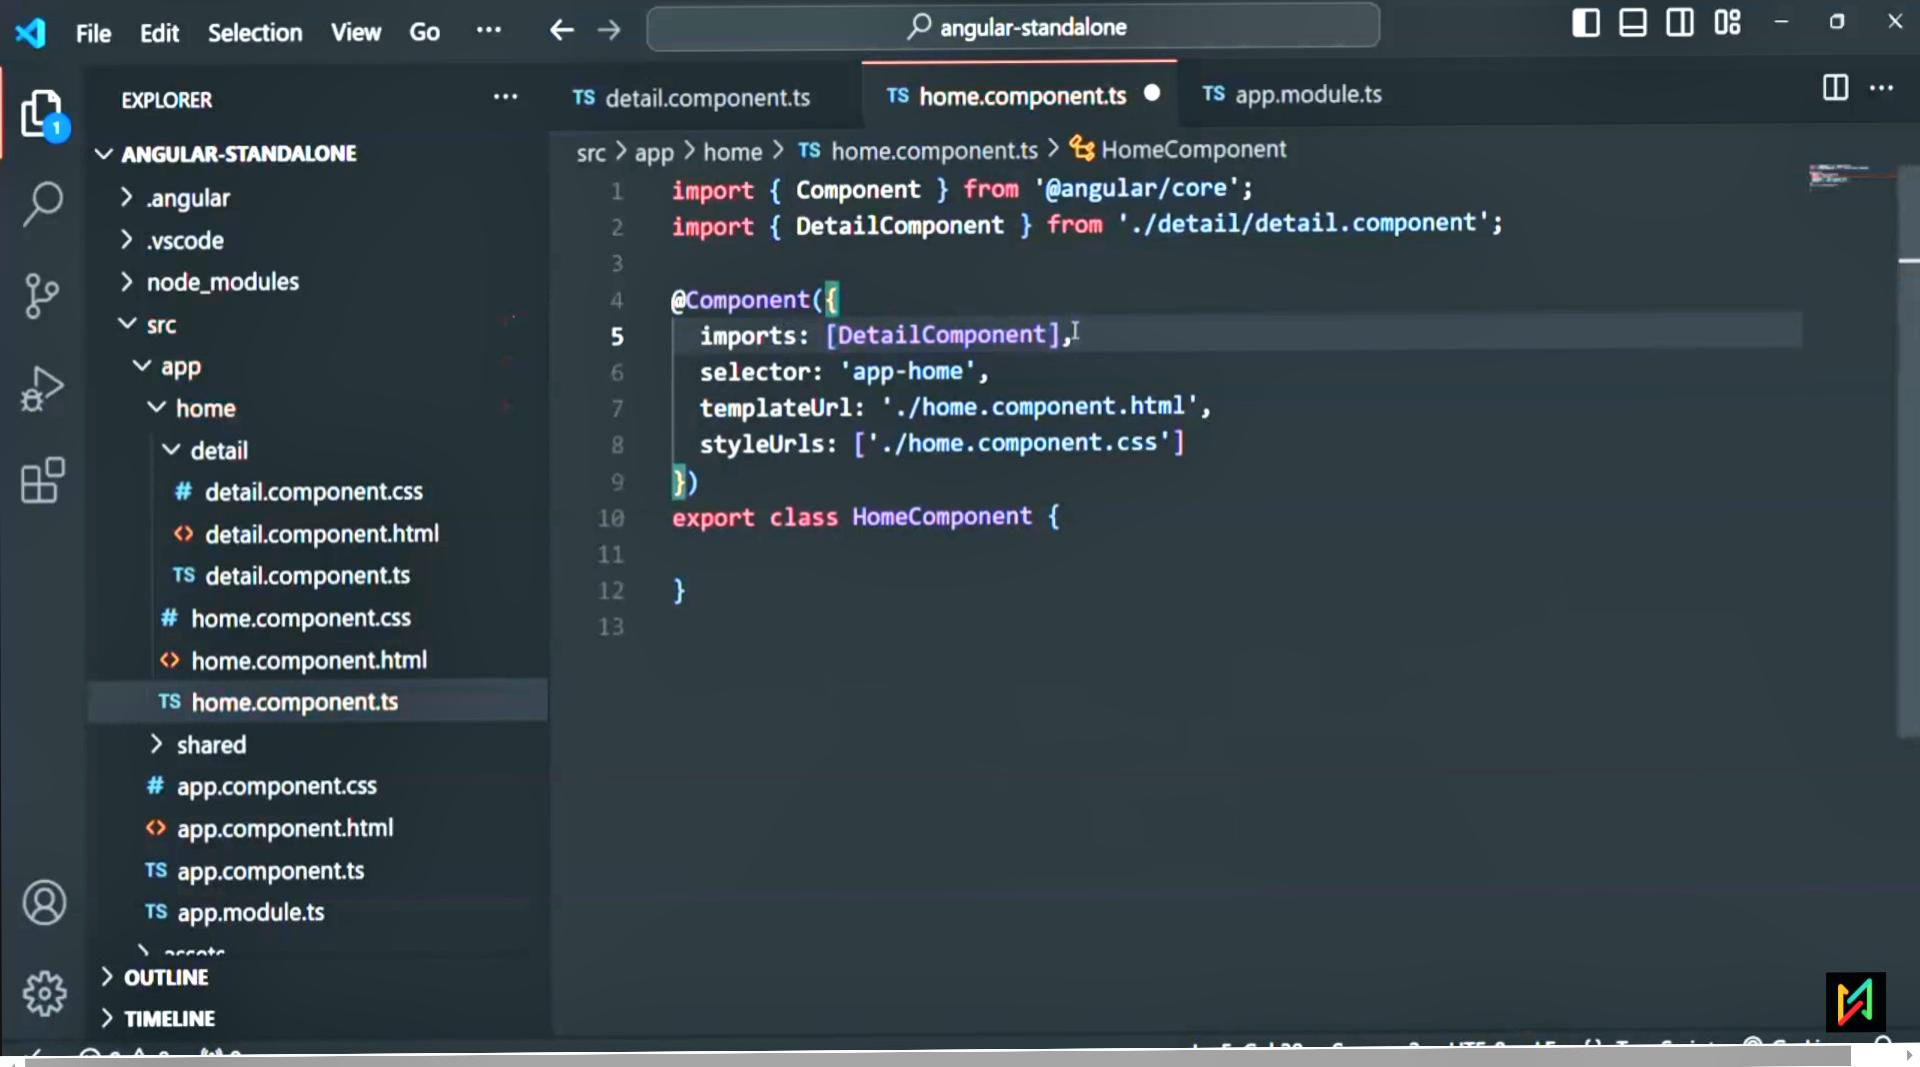

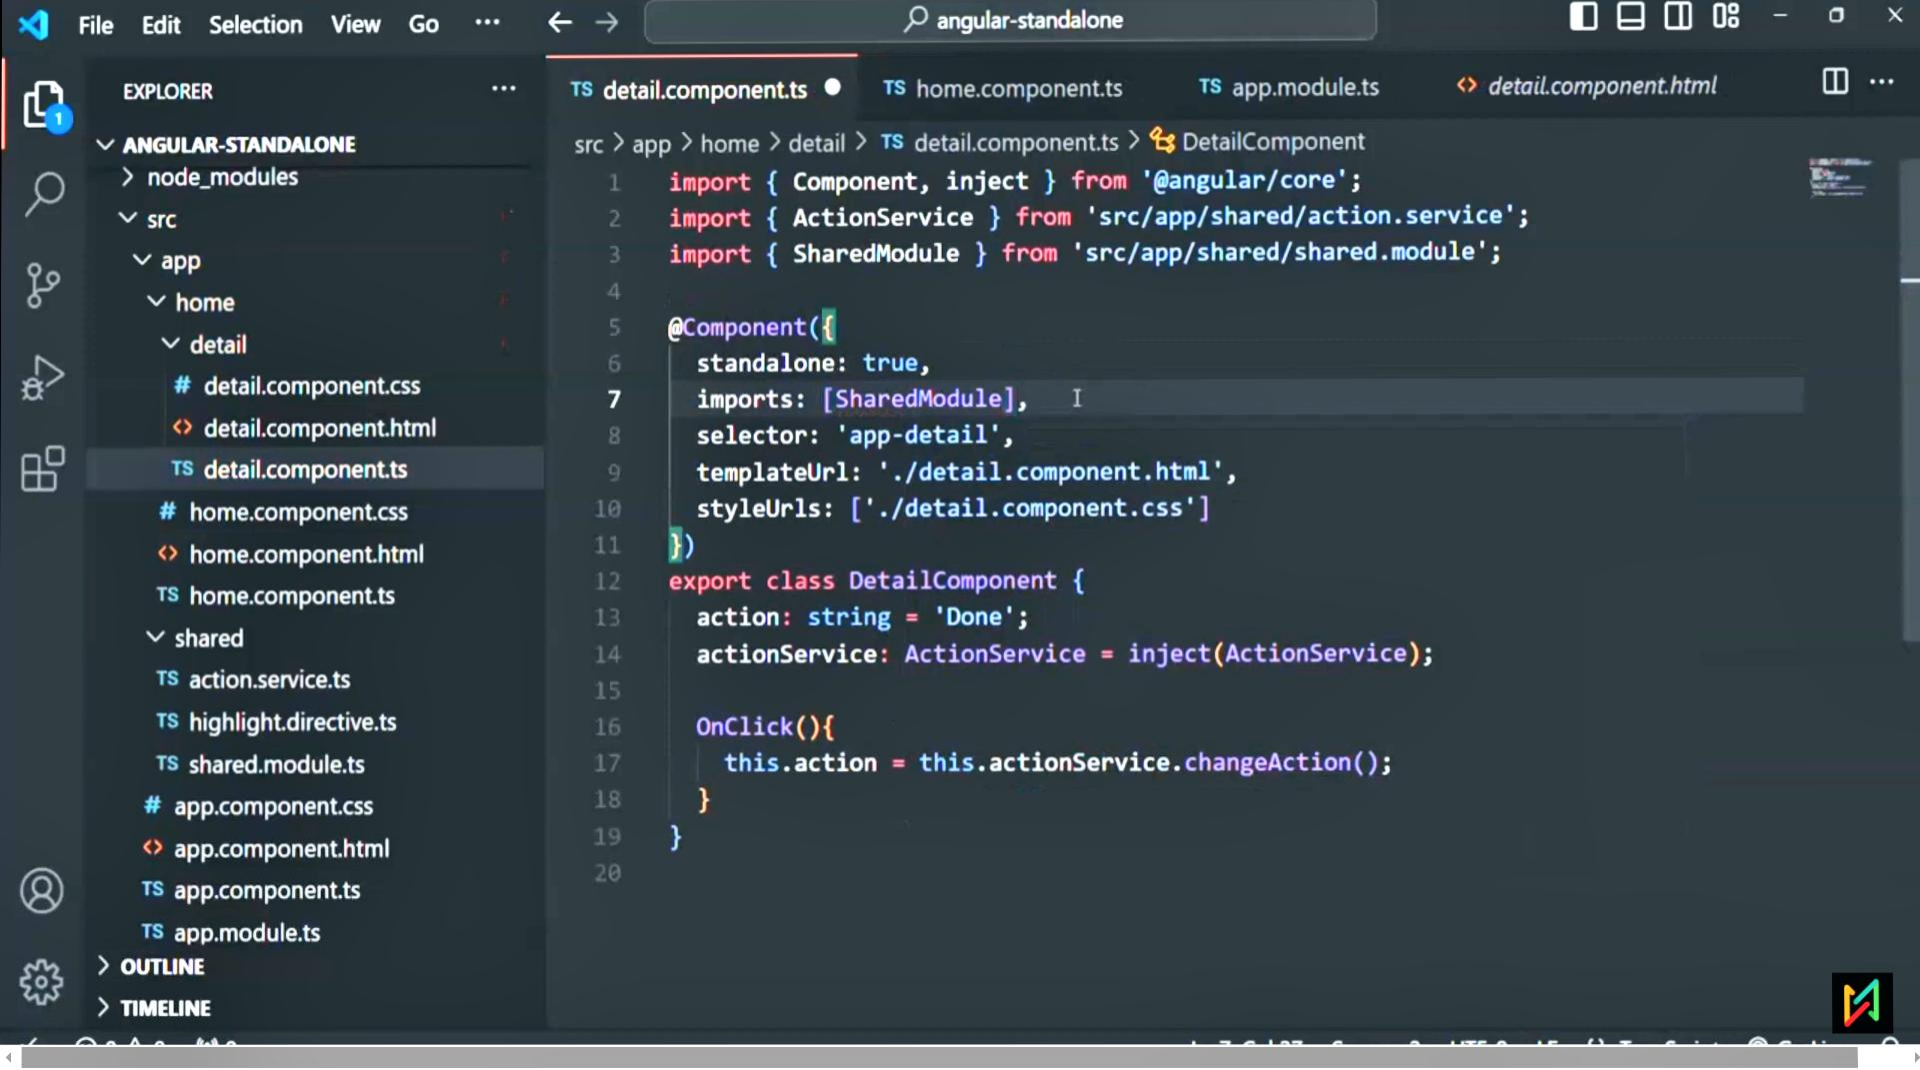

EXPLORER

ANGULAR-STANDALONE

> node_modules

src

app

home

detail

detail.component.css

<> detail.component.html

TS detail.component.ts

home.component.css

<> home.component.html

TS home.component.ts

shared

TS action.service.ts

TS highlight.directive.ts

TS shared.module.ts

app.component.css

<> app.component.html

TS app.component.ts

TS app.module.ts

> OUTLINE

> TIMELINE

TS detail.component.ts


TS home.component.ts


TS app.module.ts

<> detail.component.html

src > app > home > detail > TS detail.component.ts > DetailComponent

```
1  import { Component, inject } from '@angular/core';
2  import { ActionService } from 'src/app/shared/action.service';
3  import { SharedModule } from 'src/app/shared/shared.module';
4
5  @Component({
6    standalone: true,
7    imports: [SharedModule],
8    selector: 'app-detail',
9    templateUrl: './detail.component.html',
10    styleUrls: ['./detail.component.css']
11  })
12  export class DetailComponent {
13    action: string = 'Done';
14    actionService: ActionService = inject(ActionService);
15
16    onClick(){
17      this.action = this.actionService.changeAction();
18    }
19  }
20
```

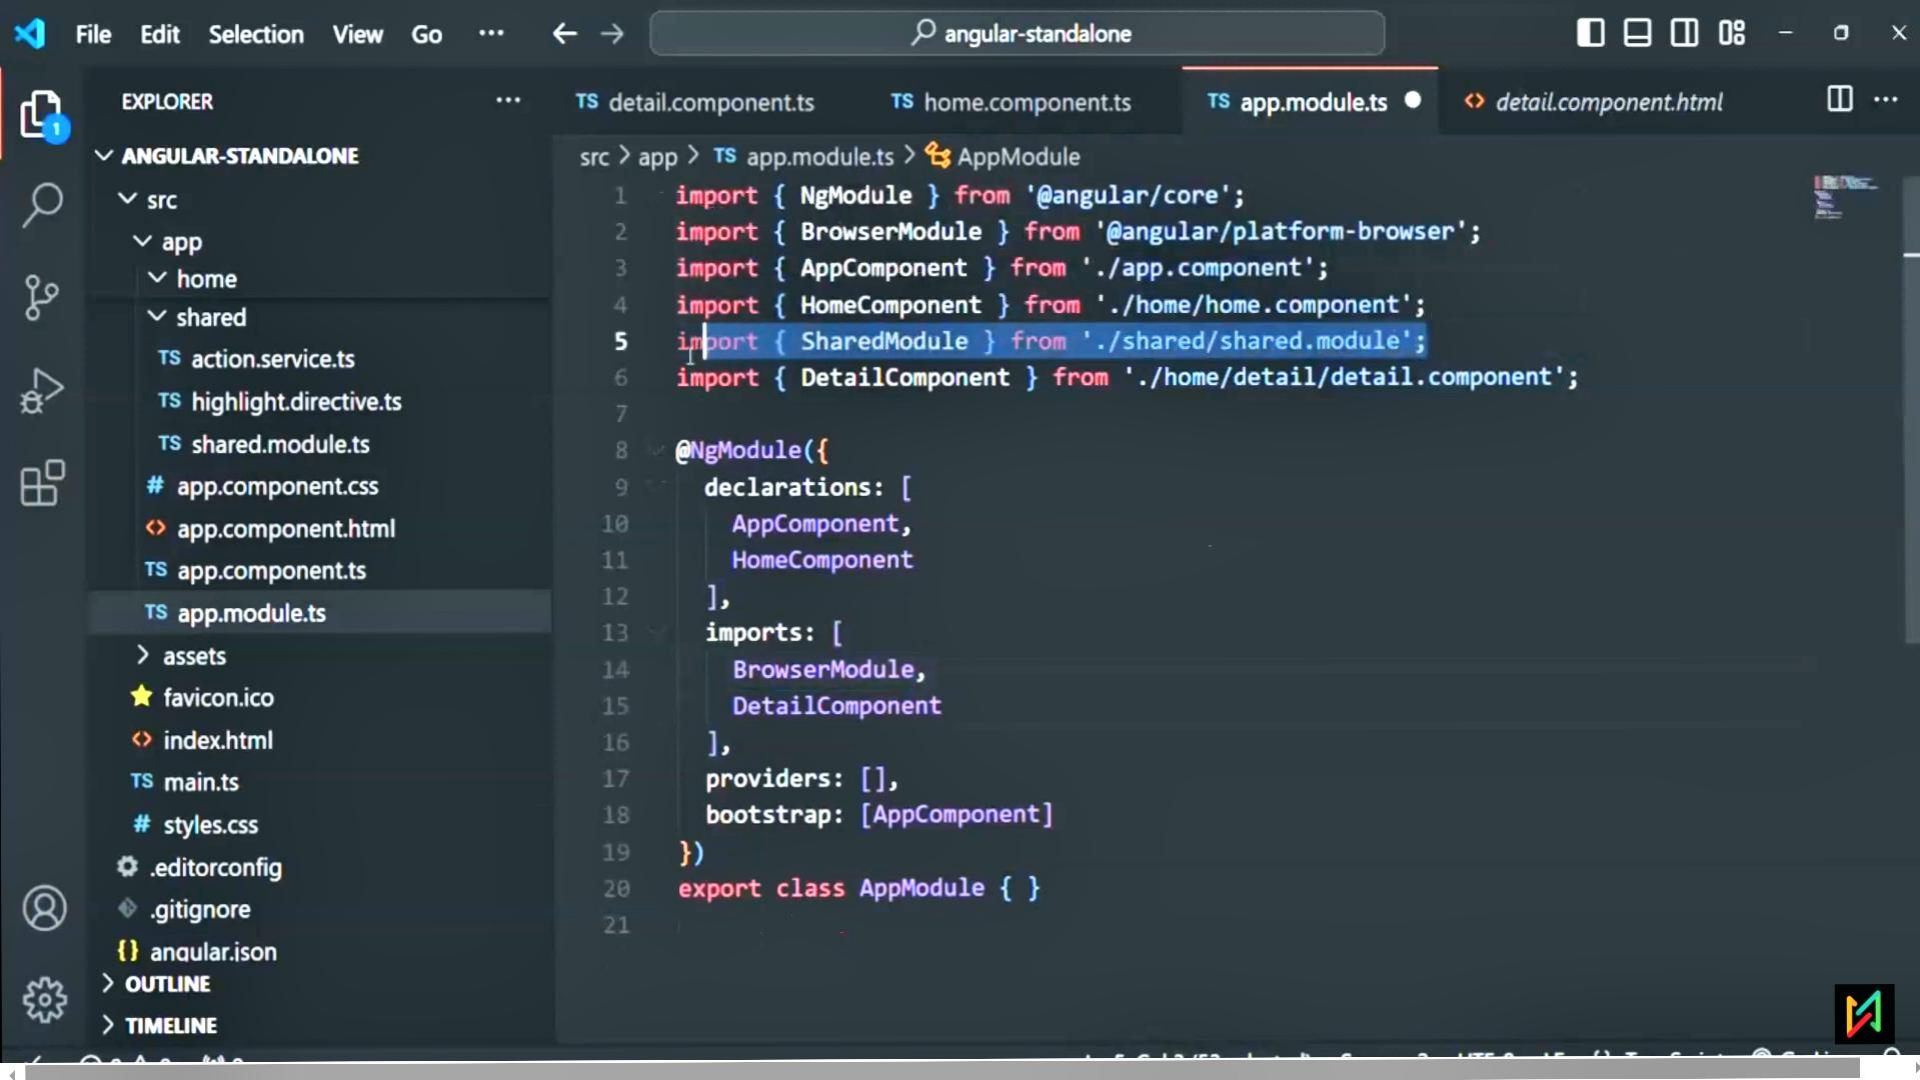

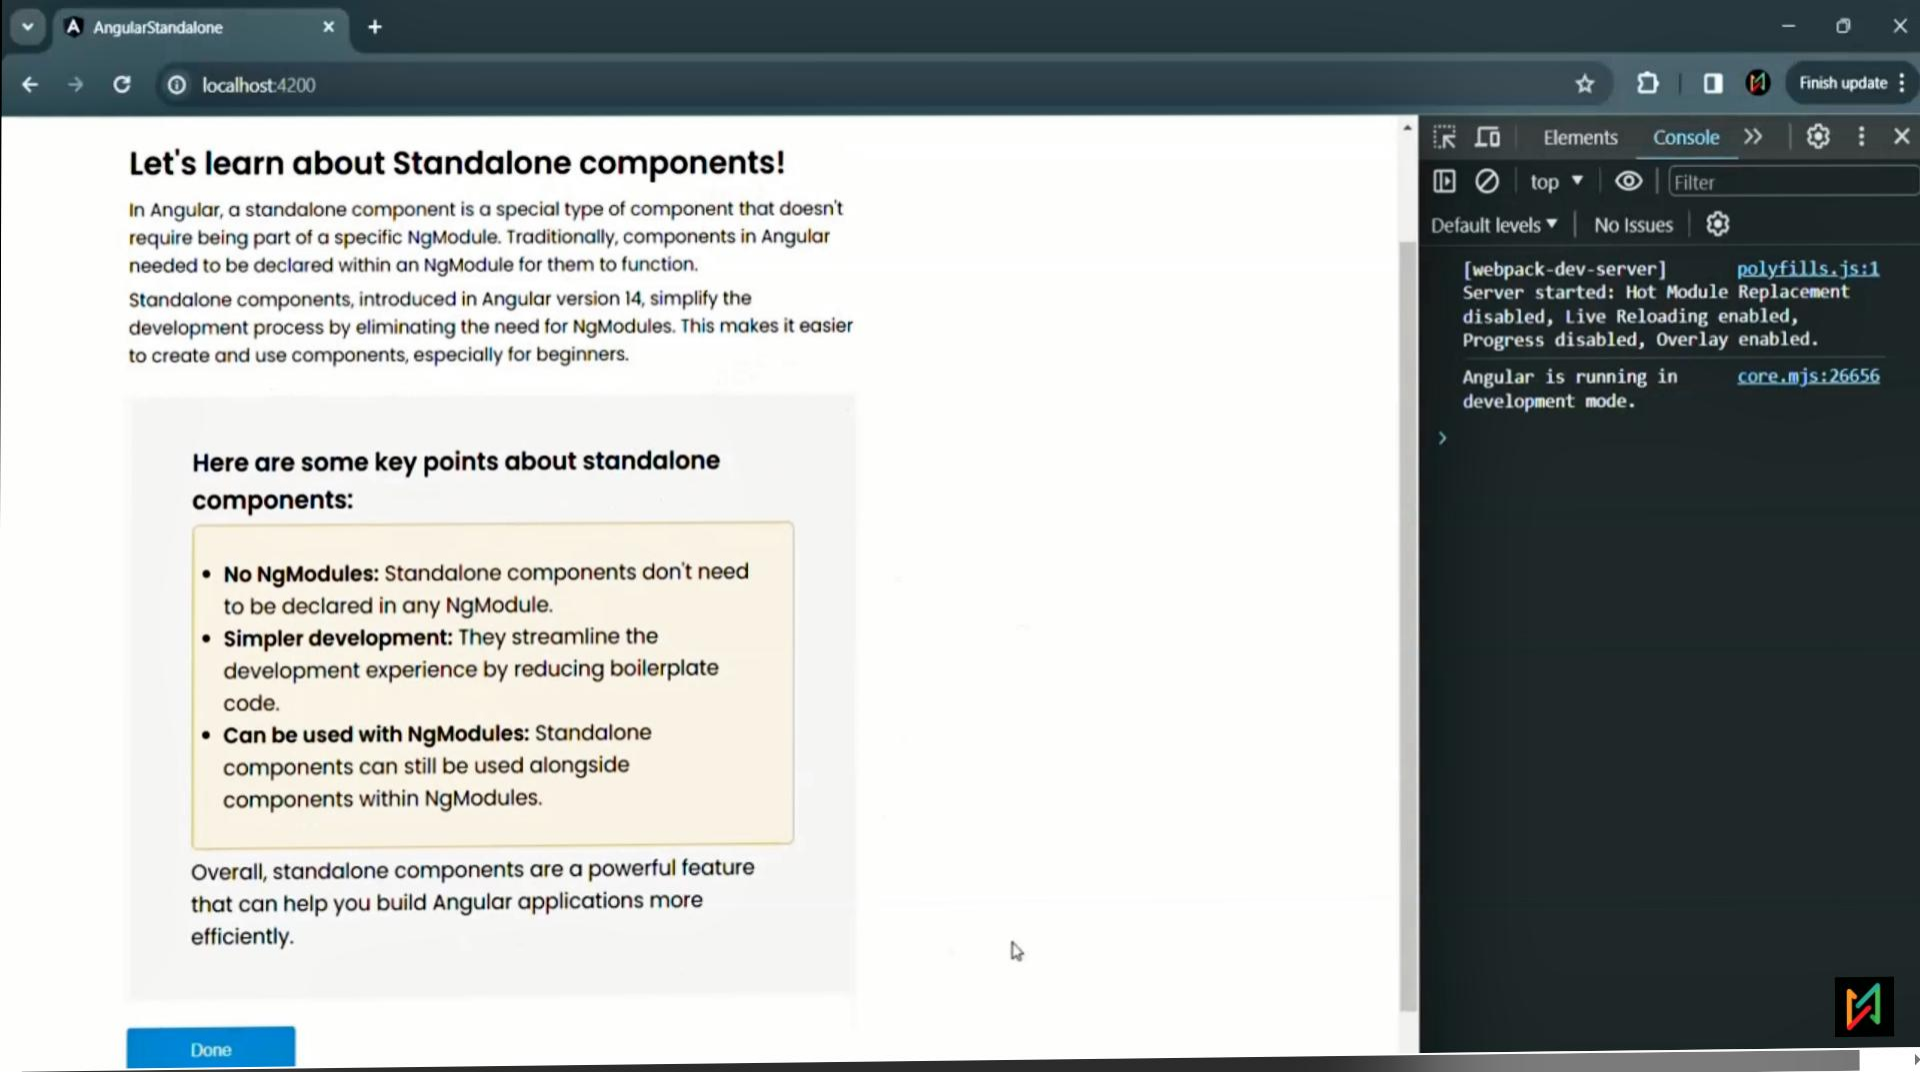Let's learn about Standalone components!

In Angular, a standalone component is a special type of component that doesn't require being part of a specific NgModule. Traditionally, components in Angular needed to be declared within an NgModule for them to function.

Standalone components, introduced in Angular version 14, simplify the development process by eliminating the need for NgModules. This makes it easier to create and use components, especially for beginners.

Here are some key points about standalone components:

- **No NgModules:** Standalone components don't need to be declared in any NgModule.
- **Simpler development:** They streamline the development experience by reducing boilerplate code.
- **Can be used with NgModules:** Standalone components can still be used alongside components within NgModules.

Overall, standalone components are a powerful feature that can help you build Angular applications more efficiently.

Done

Elements Console >> ⚙️ ⋮ ✕

🔍 top 🔍 Filter


Default levels ▾ | No Issues ⚙️

[webpack-dev-server] polyfills.js:1
Server started: Hot Module Replacement
disabled, Live Reloading enabled,
Progress disabled, Overlay enabled.

Angular is running in core.mjs:26656
development mode.

>



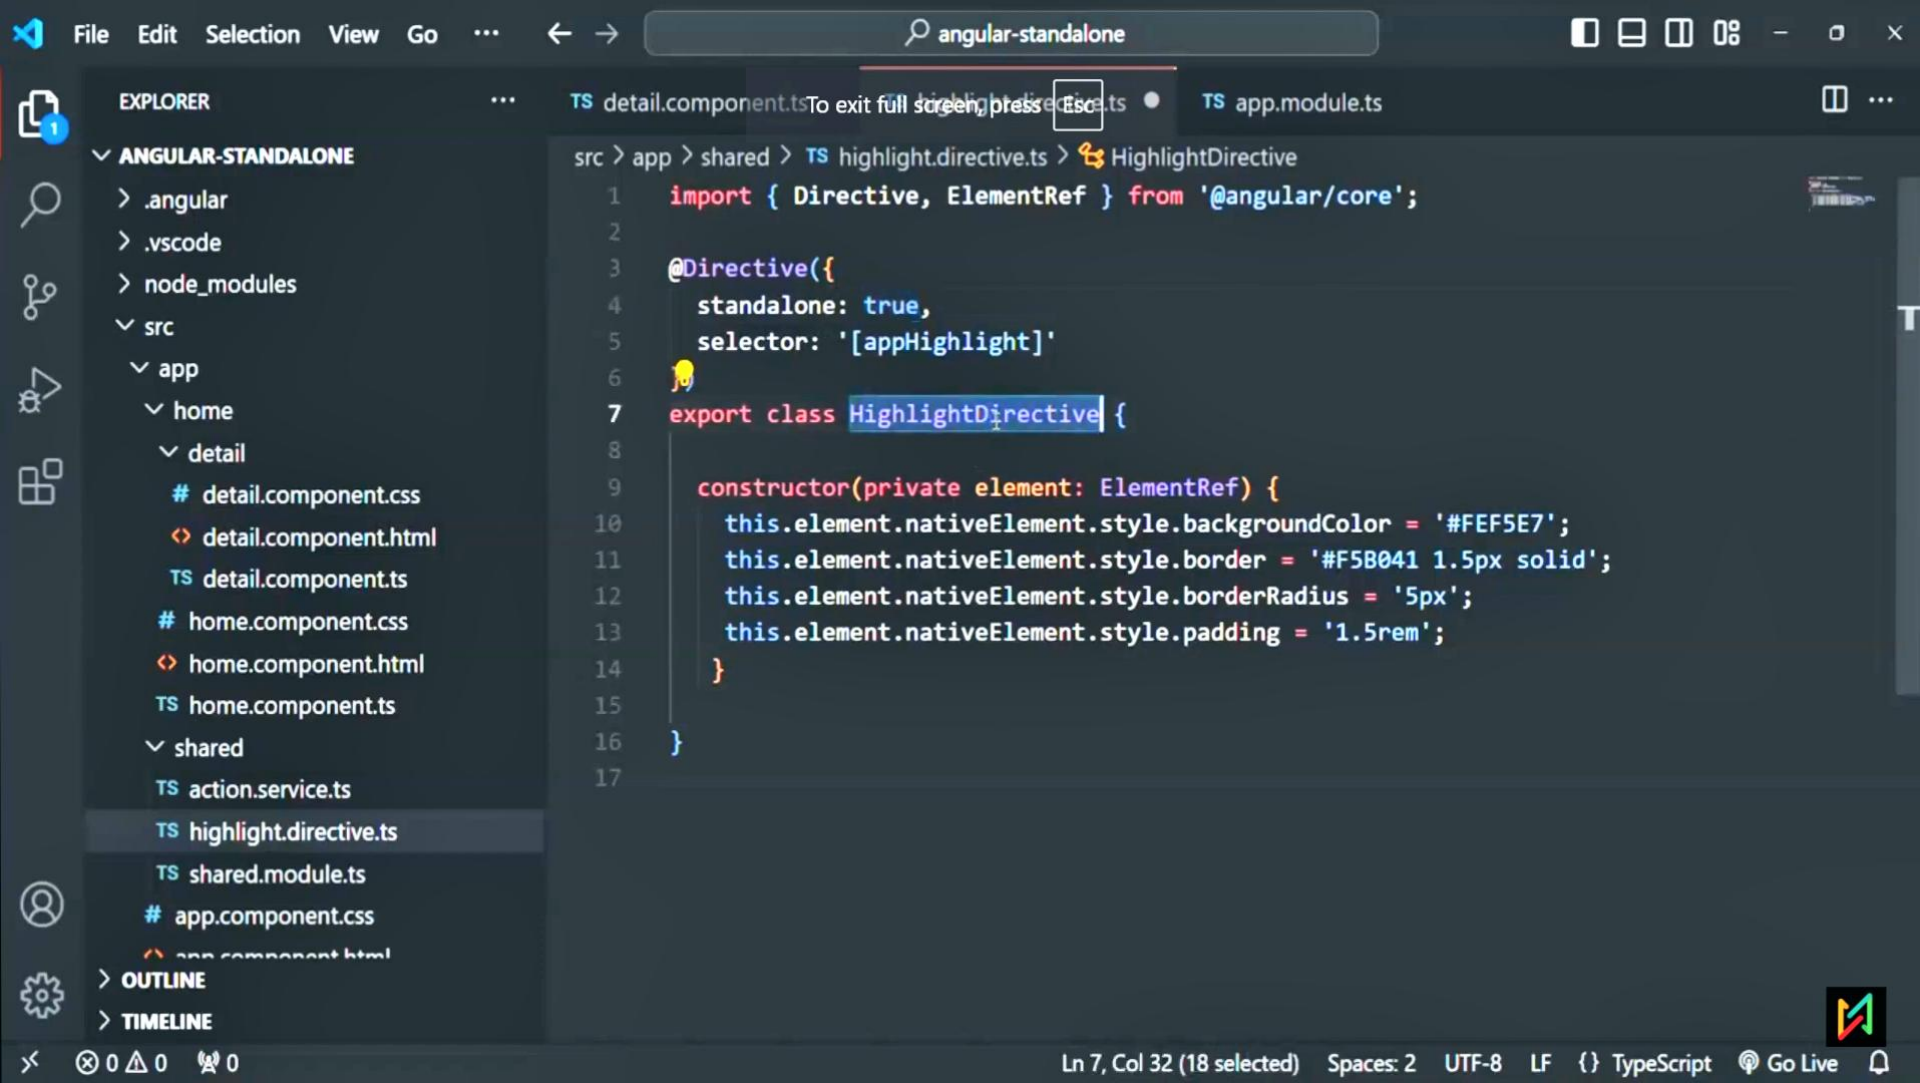

EXPLORER

ANGULAR-STANDALONE

- > .angular
- > .vscode
- > node_modules
- > src
 - > app
 - > home
 - > detail
 - # detail.component.css
 - <> detail.component.html
 - TS detail.component.ts
 - # home.component.css
 - <> home.component.html
 - TS home.component.ts
 - > shared
 - TS action.service.ts
 - TS highlight.directive.ts
 - TS shared.module.ts
 - # app.component.css
 - <> app.component.html


> OUTLINE


> TIMELINE


... TS detail.component.ts To exit full screen, press Esc TS app.module.ts


src > app > shared > TS highlight.directive.ts > HighlightDirective

```
1 import { Directive, ElementRef } from '@angular/core';
2
3 @Directive({
4   standalone: true,
5   selector: '[appHighlight]'
6 })
7 export class HighlightDirective {
8
9   constructor(private element: ElementRef) {
10     this.element.nativeElement.style.backgroundColor = '#FEF5E7';
11     this.element.nativeElement.style.border = '#F5B041 1.5px solid';
12     this.element.nativeElement.style.borderRadius = '5px';
13     this.element.nativeElement.style.padding = '1.5rem';
14   }
15
16 }
17
```

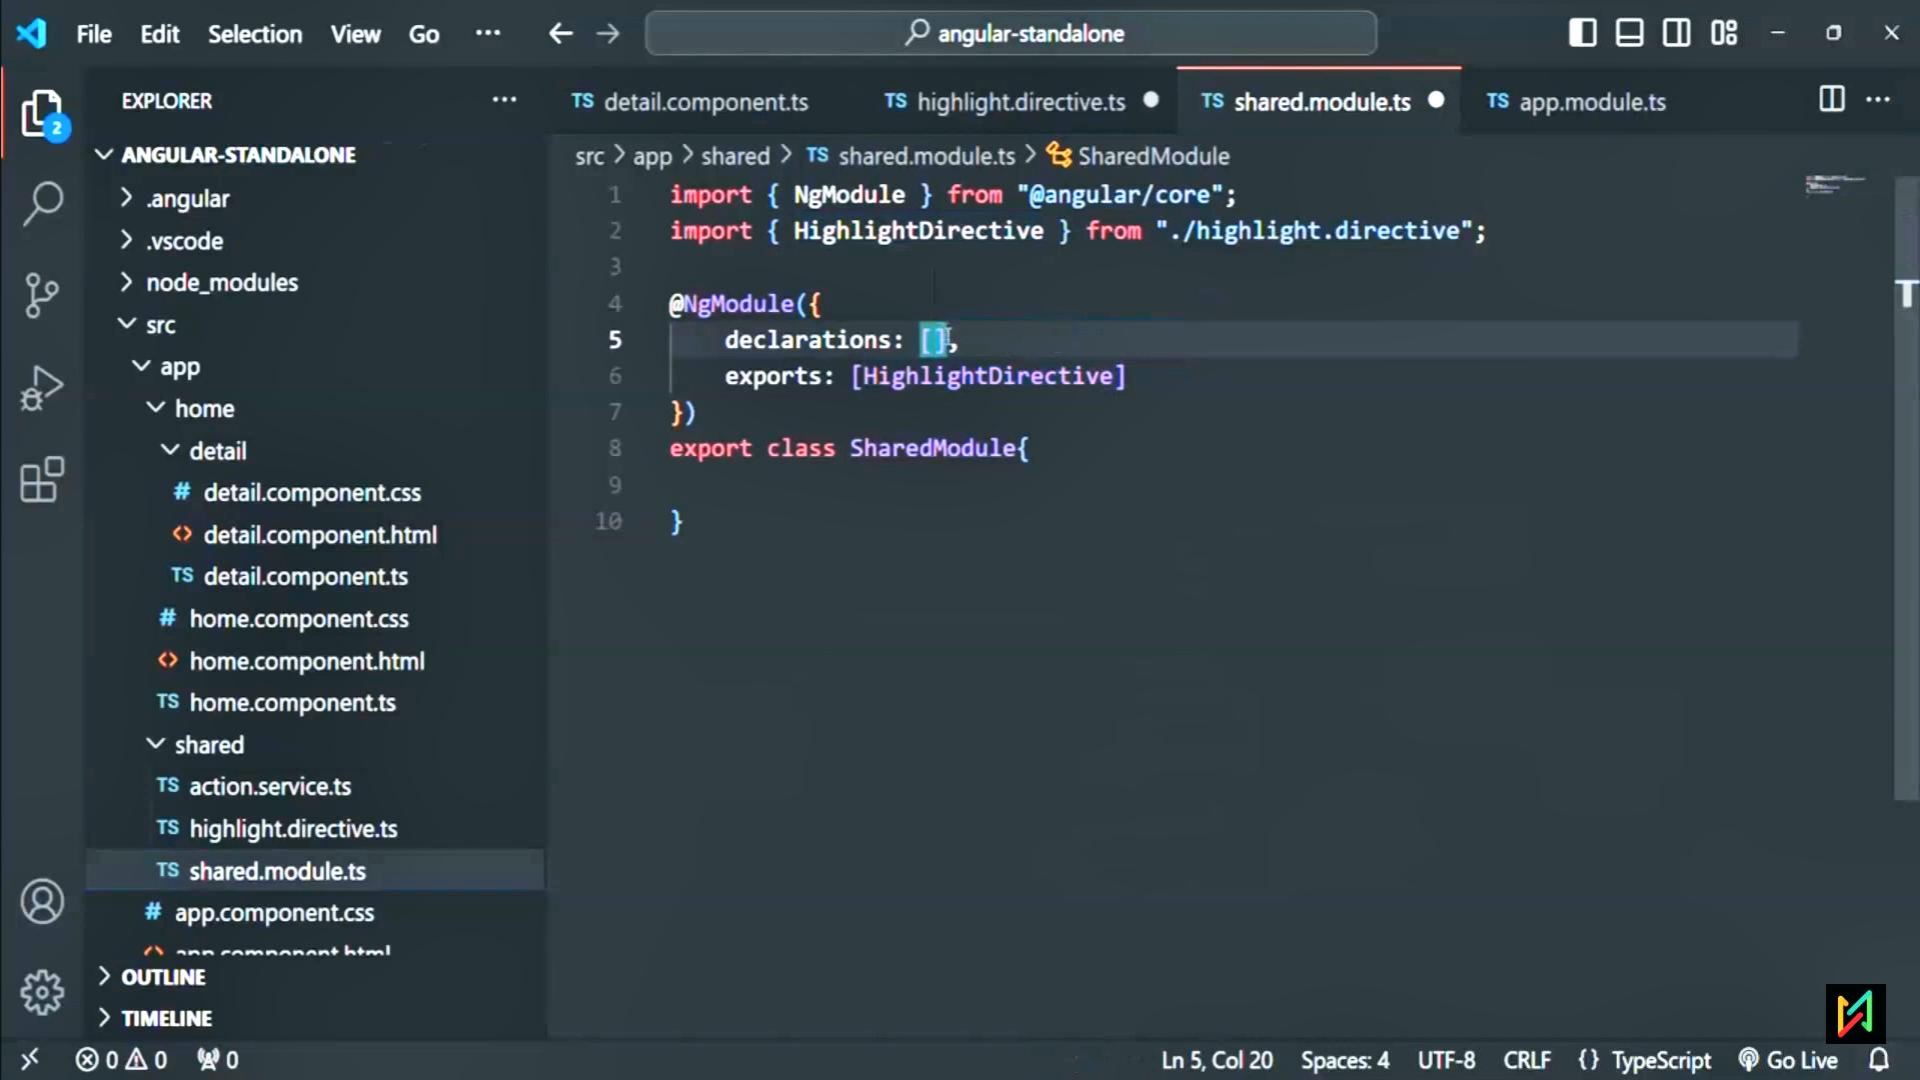

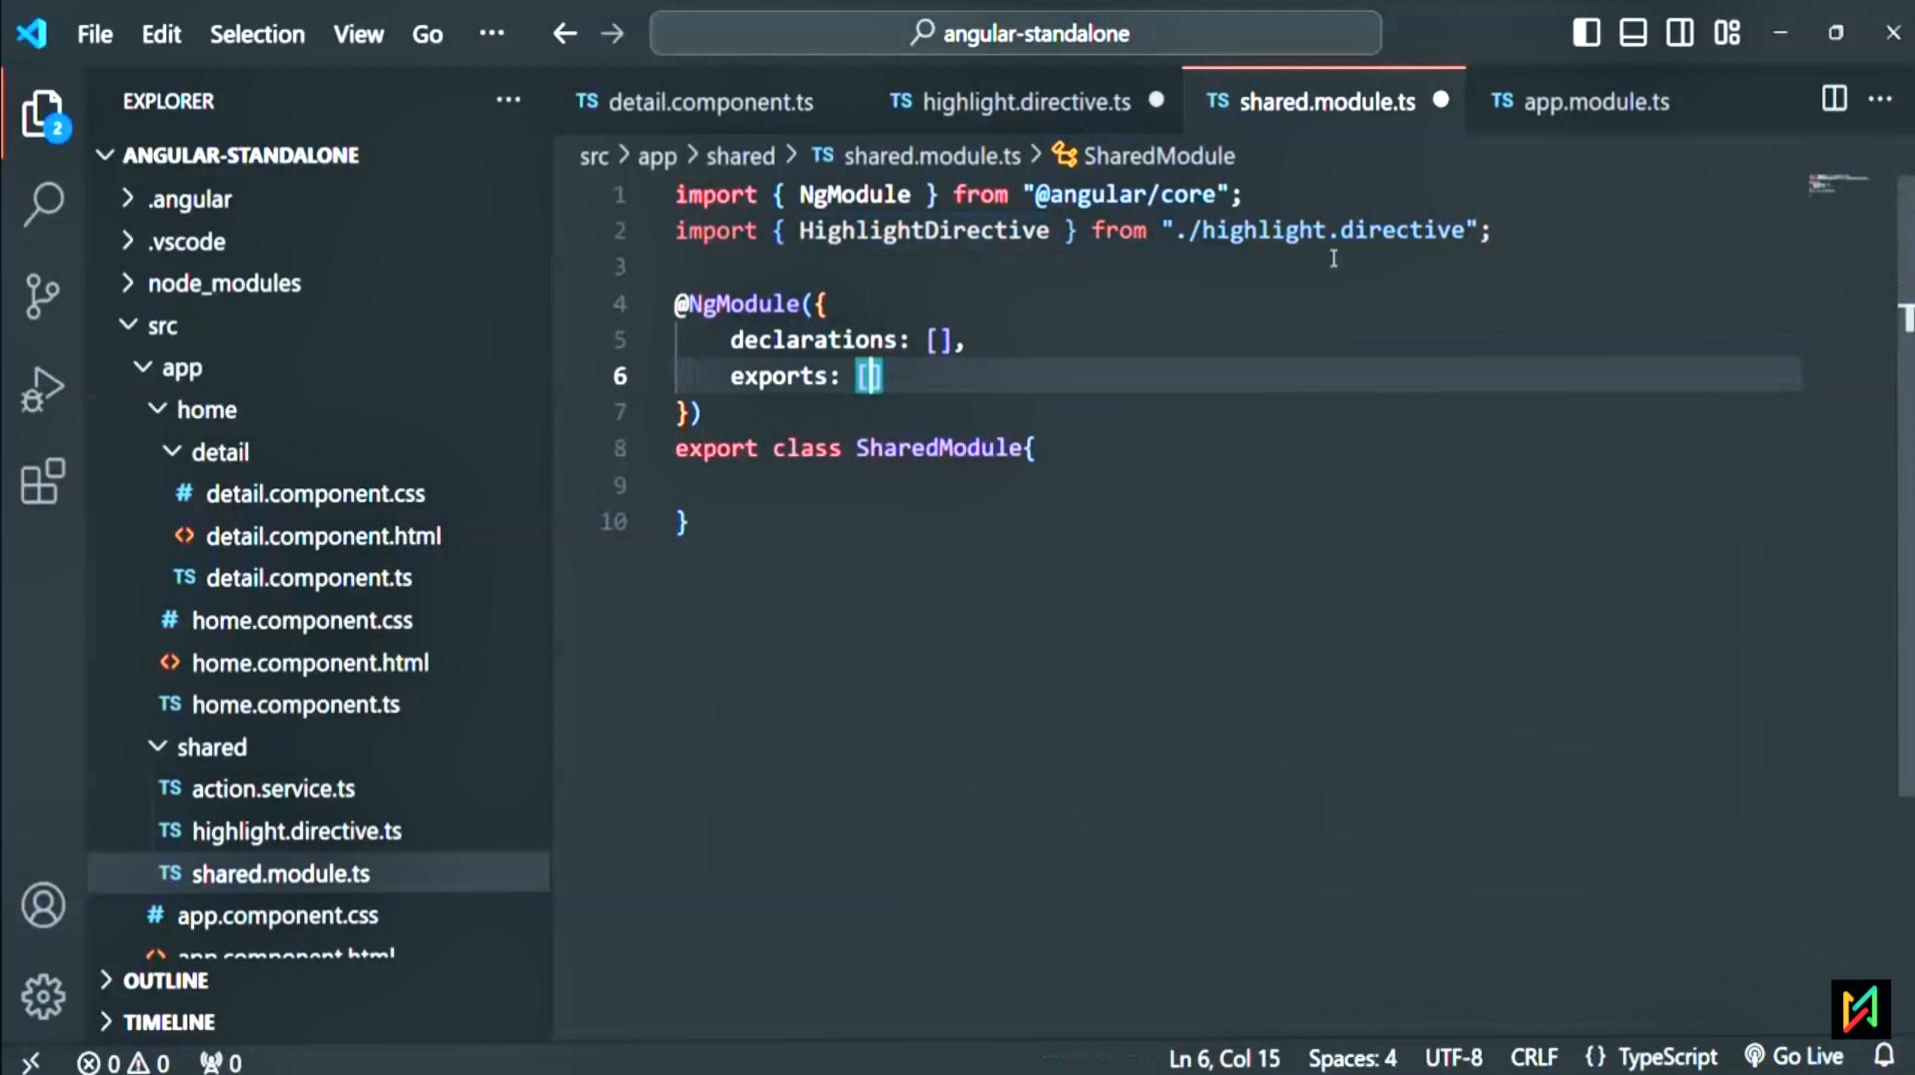

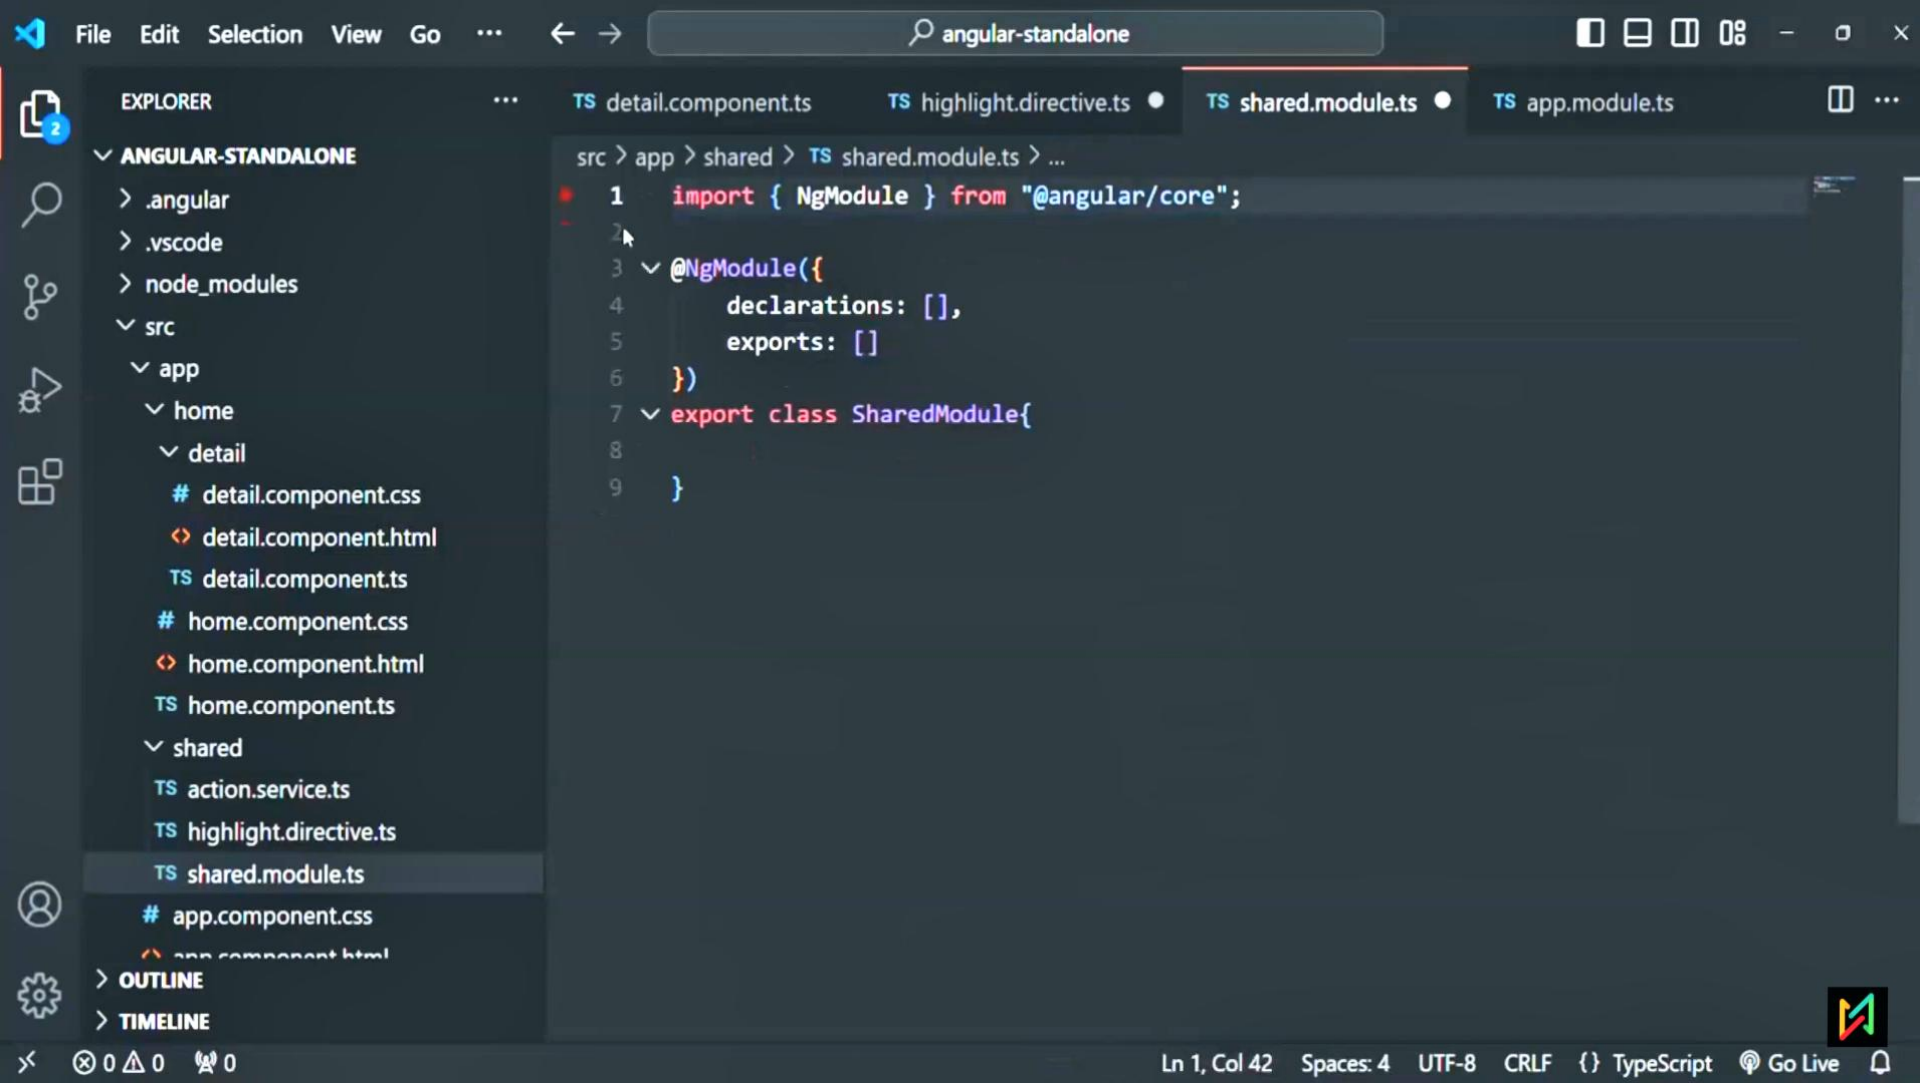

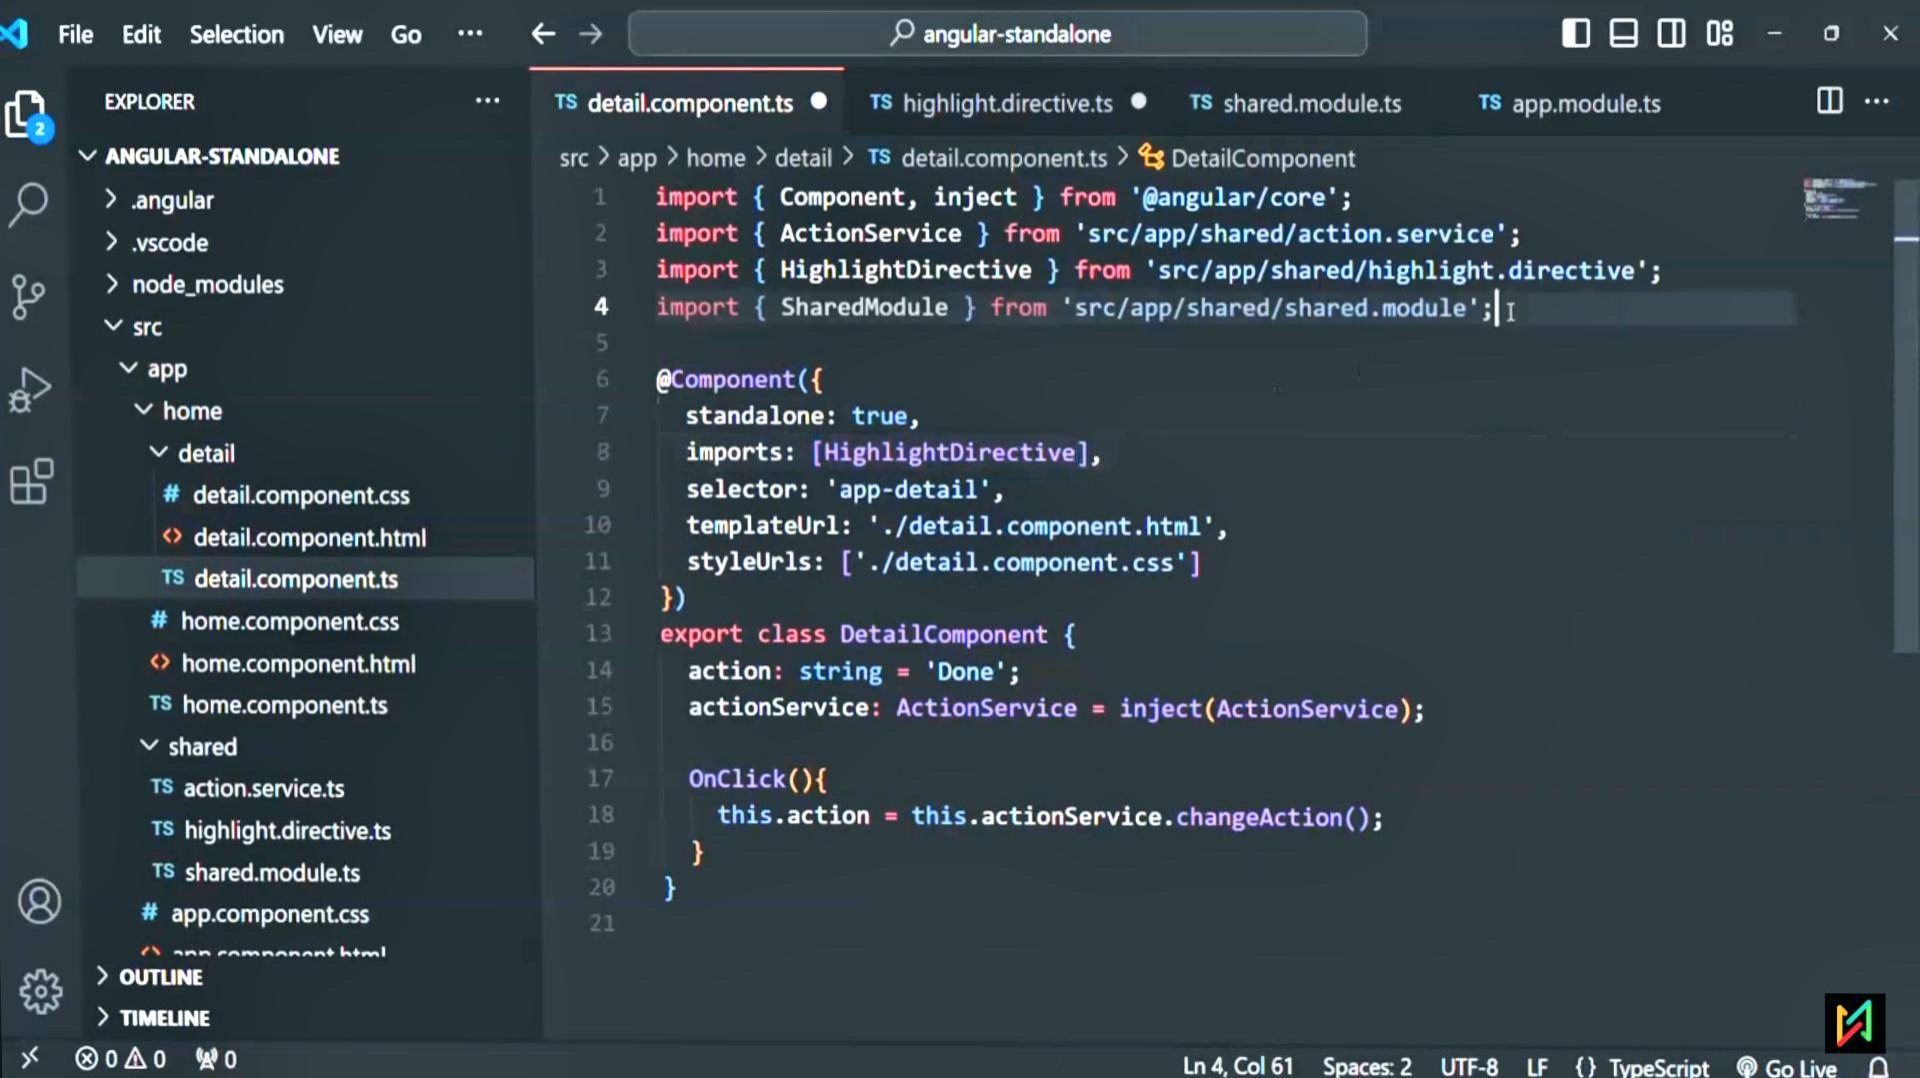

EXPLORER

ANGULAR-STANDALONE

- > .angular
- > .vscode
- > node_modules
- ▼ src
 - ▼ app
 - ▼ home
 - ▼ detail
 - # detail.component.css
 - <> detail.component.html
 - TS detail.component.ts
 - # home.component.css
 - <> home.component.html
 - TS home.component.ts
 - ▼ shared
 - TS action.service.ts
 - TS highlight.directive.ts
 - TS shared.module.ts
 - # app.component.css
 - <> app.component.html

TS detail.component.ts


TS highlight.directive.ts


TS shared.module.ts


TS app.module.ts

src > app > home > detail > TS detail.component.ts > DetailComponent

```
1 import { Component, inject } from '@angular/core';
2 import { ActionService } from 'src/app/shared/action.service';
3 import { HighlightDirective } from 'src/app/shared/highlight.directive';
4 import { SharedModule } from 'src/app/shared/shared.module';
5
6 @Component({
7   standalone: true,
8   imports: [HighlightDirective],
9   selector: 'app-detail',
10  templateUrl: './detail.component.html',
11  styleUrls: ['./detail.component.css']
12 })
13 export class DetailComponent {
14   action: string = 'Done';
15   actionService: ActionService = inject(ActionService);
16
17   onClick(){
18     this.action = this.actionService.changeAction();
19   }
20 }
21
```

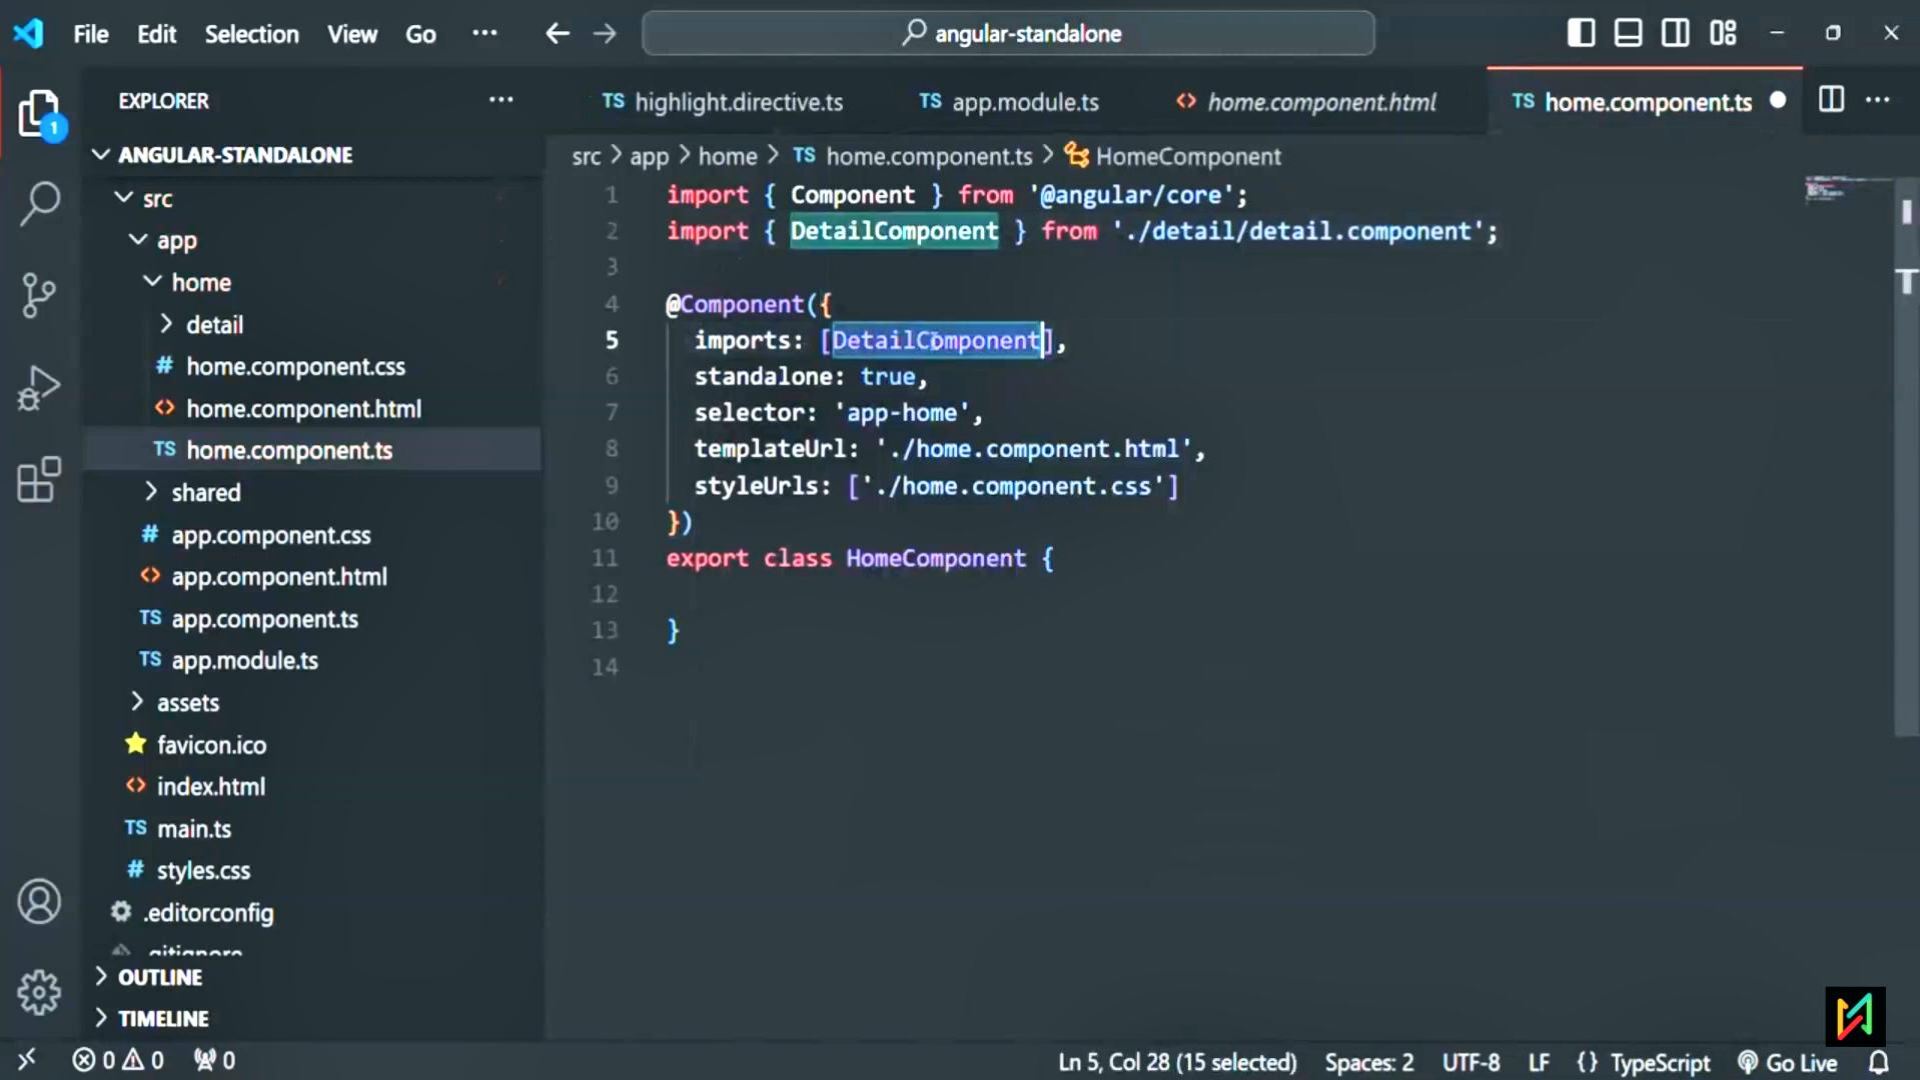

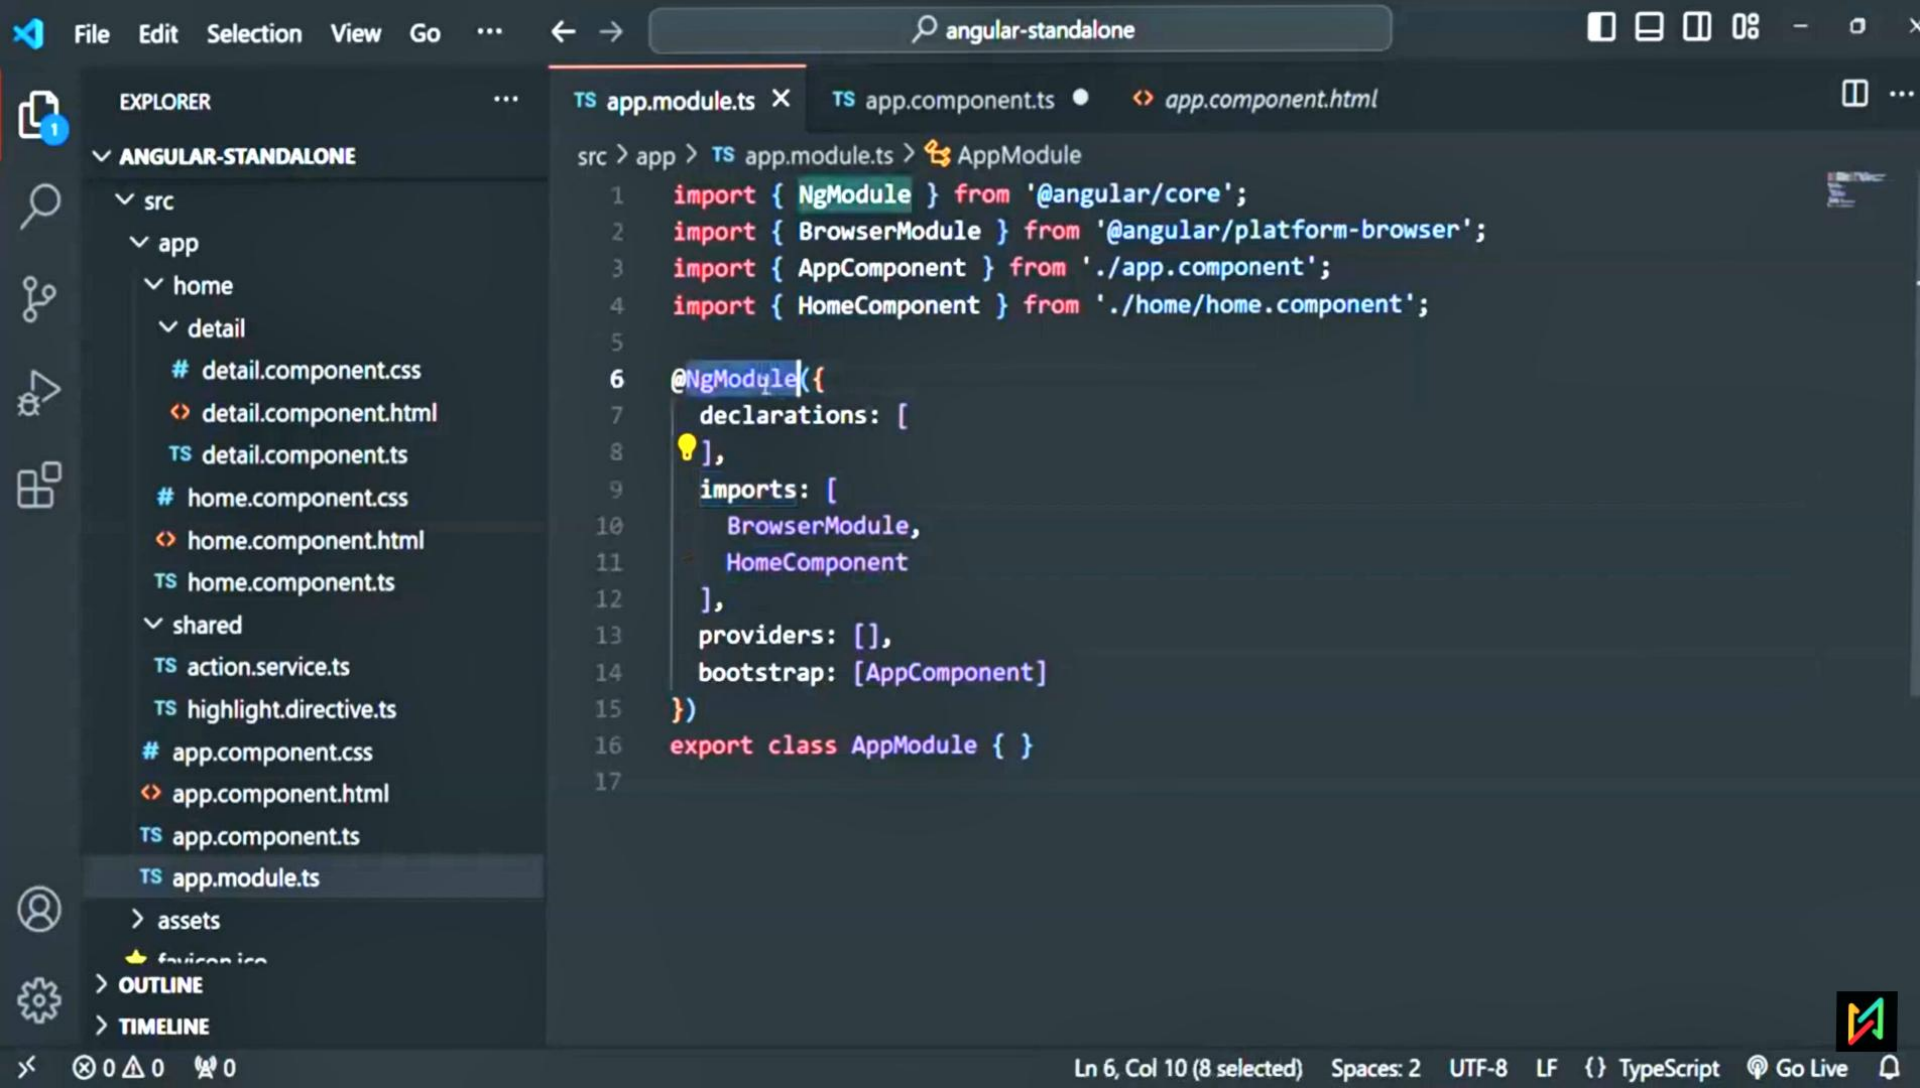

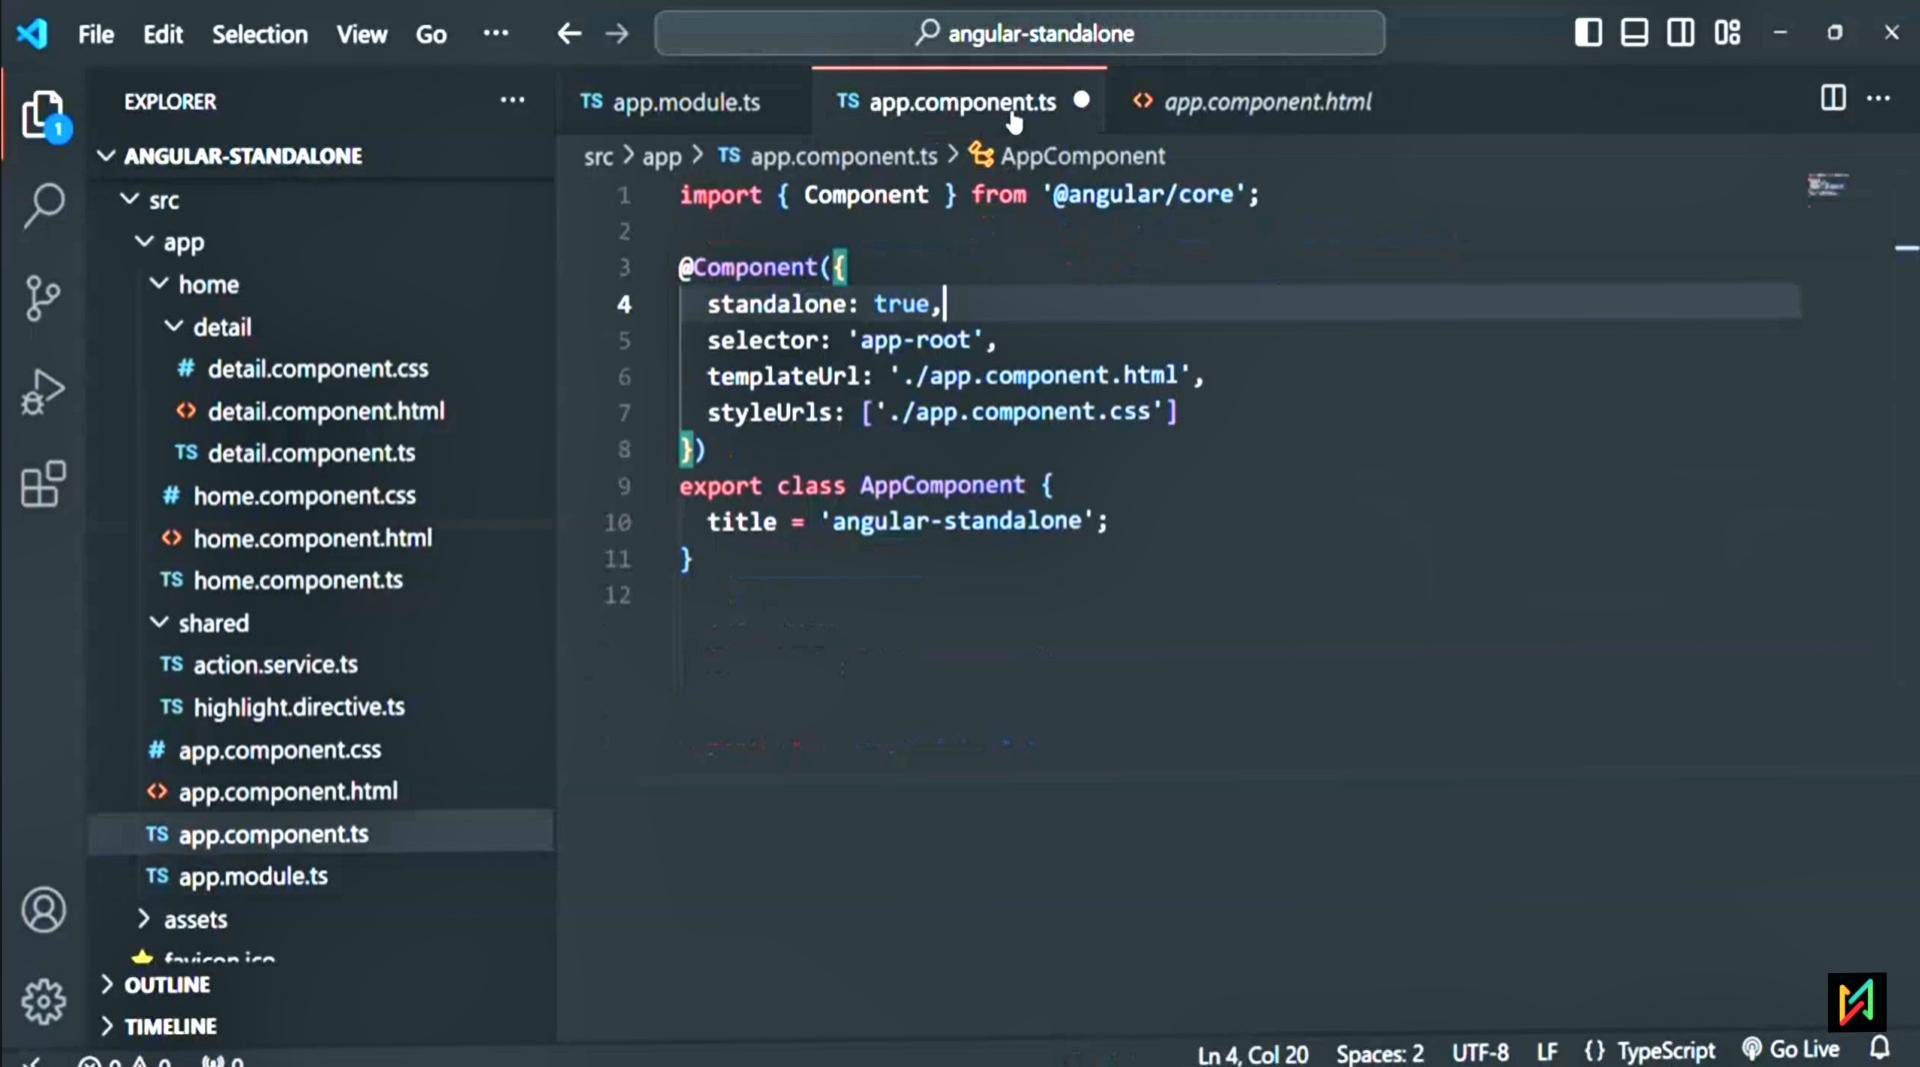

EXPLORER

ANGULAR-STANDALONE

src

app

home

detail

detail.component.css

<> detail.component.html

TS detail.component.ts

home.component.css

<> home.component.html

TS home.component.ts

shared

TS action.service.ts

TS highlight.directive.ts

app.component.css

<> app.component.html

TS app.component.ts

TS app.module.ts

> assets

📁 favicon.ico

> OUTLINE

> TIMELINE

TS app.module.ts

TS app.component.ts

<> app.component.html

src > app > TS app.component.ts > AppComponent

```
1 import { Component } from '@angular/core';
2
3 @Component({
4   standalone: true,
5   selector: 'app-root',
6   templateUrl: './app.component.html',
7   styleUrls: ['./app.component.css']
8 })
9 export class AppComponent {
10   title = 'angular-standalone';
11 }
12
```



EXPLORER

ANGULAR-STANDALONE

- src
 - app
 - home
 - detail
 - # detail.component.css
 - <> detail.component.html
 - TS detail.component.ts
 - # home.component.css
 - <> home.component.html
 - TS home.component.ts
 - shared
 - TS action.service.ts
 - TS highlight.directive.ts
 - # app.component.css
 - <> app.component.html
 - TS app.component.ts
 - TS app.module.ts
 - assets
 - favicon.ico
 - OUTLINE
 - TIMELINE

TS app.module.ts TS app.component.ts app.component.html

```
src > app > TS app.component.ts > AppComponent
1  import { Component } from '@angular/core';
2  import { HomeComponent } from './home/home.component';
3
4  @Component({
5    standalone: true,
6    imports: [HomeComponent],
7    selector: 'app-root',
8    templateUrl: './app.component.html',
9    styleUrls: ['./app.component.css']
10 })
11 export class AppComponent {
12   title = 'angular-standalone';
13 }
14
```

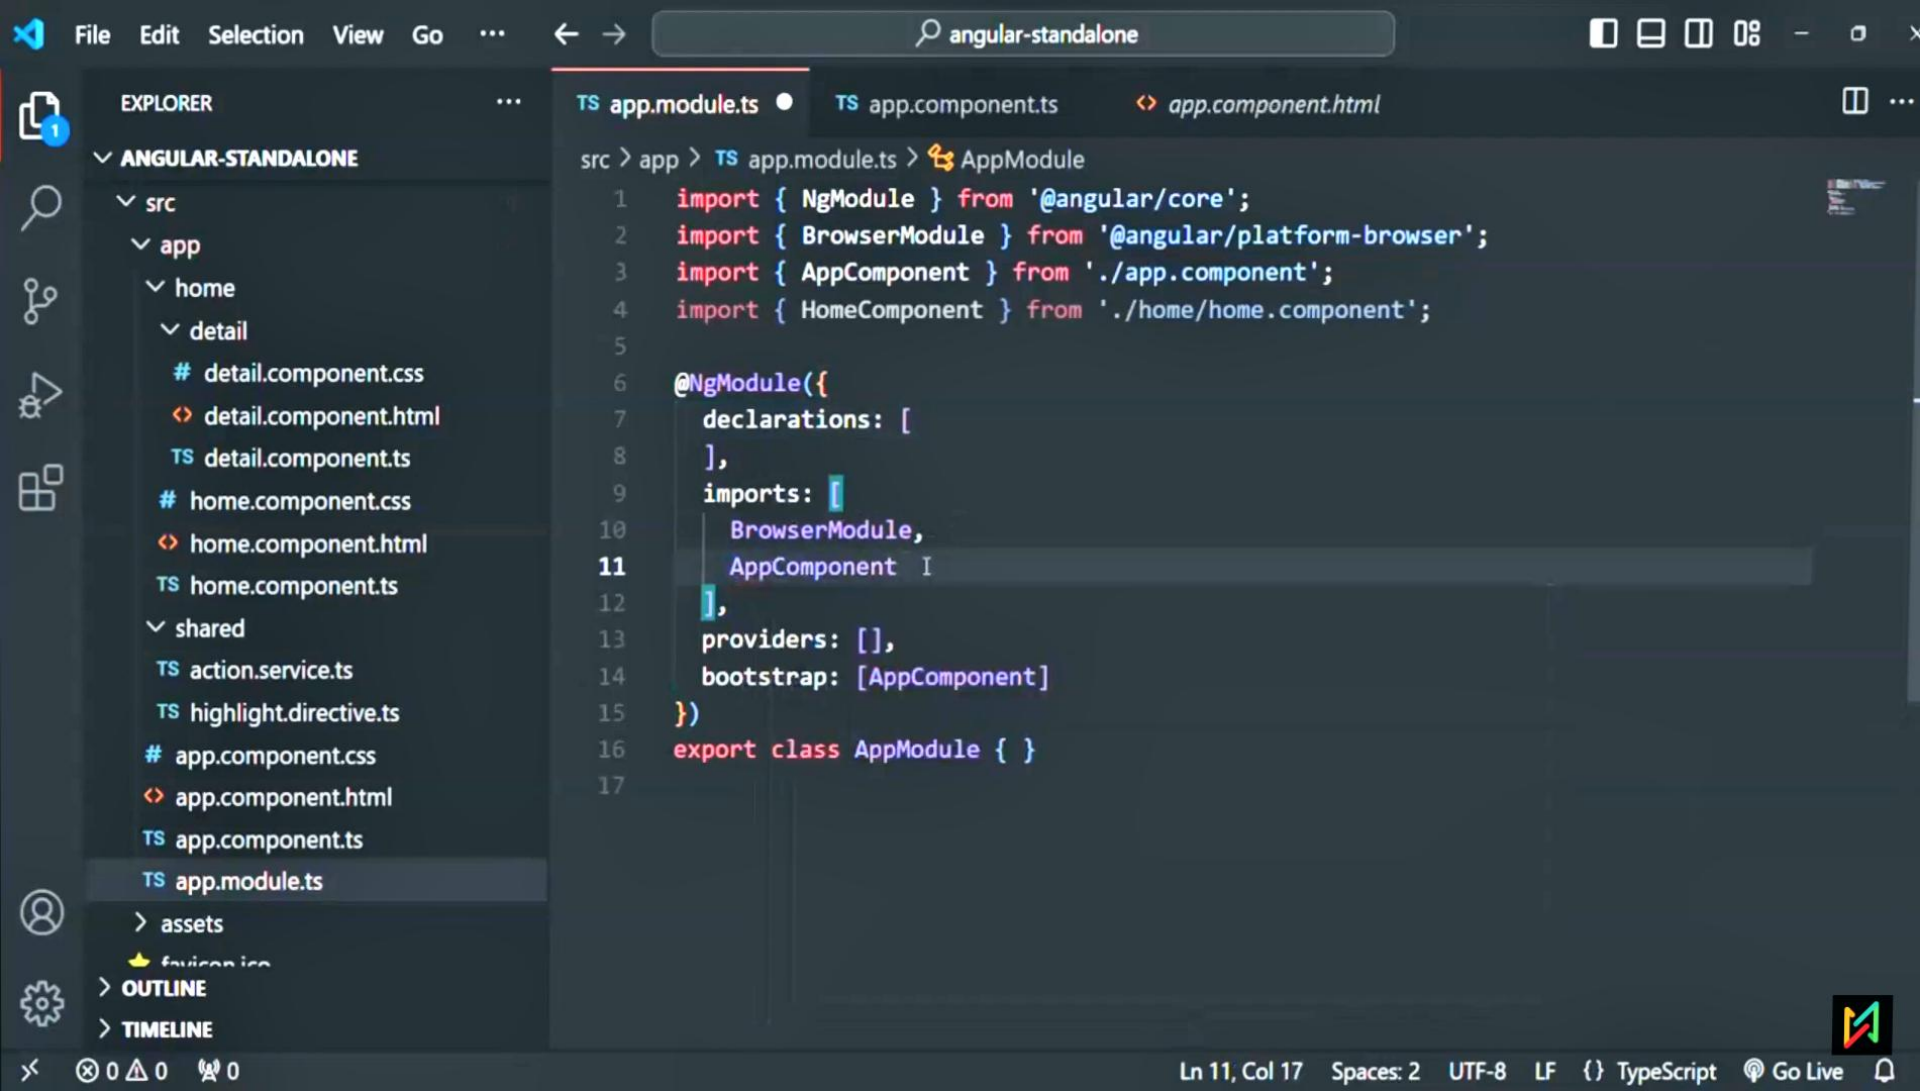

EXPLORER

ANGULAR-STANDALONE

src

app

home

detail

detail.component.css

< detail.component.html

TS detail.component.ts

home.component.css

< home.component.html

TS home.component.ts

shared

TS action.service.ts

TS highlight.directive.ts

app.component.css

< app.component.html

TS app.component.ts

TS app.module.ts

> assets

favicon.ico

> OUTLINE

> TIMELINE

TS app.module.ts

TS app.component.ts

< app.component.html

src > app > TS app.module.ts > AppModule

```
1 import { NgModule } from '@angular/core';
2 import { BrowserModule } from '@angular/platform-browser';
3 import { AppComponent } from './app.component';
4 import { HomeComponent } from './home/home.component';
5
6 @NgModule({
7   declarations: [
8   ],
9   imports: [
10     BrowserModule,
11     AppComponent
12   ],
13   providers: [],
14   bootstrap: [AppComponent]
15 })
16 export class AppModule { }
17
```

Compiled with problems:

ERROR

src/app/app.module.ts:14:15 - error NG6009: The 'AppComponent' class is a standalone component, which can not be used in the '@NgModule.bootstrap' array. Use the 'bootstrapApplication' function for bootstrap instead.

Here are some key points about standalone

14 bootstrap: [AppComponent]

~~~~~

- No NgModules: Standalone components don't need

src/app/app.module.ts:6:1 in any NgModule.

6 @NgModule({}) {  
~~~~~

~~~~~ component experience by reducing boilerplate

7 declarations: [  
~~~~~

~~~~~ with NgModules: Standalone

... components can still be used alongside

15 }) components within NgModules

~~~

16 export class AppModule { }

~~~~~ Over time, standalone components are a powerful feature

~~~~~ that can help you build Angular applications more

The 'bootstrap' array is present on this NgModule.

~~~~~

Angular 15 running in development mode.

[webpack-dev-server] App index.js:485 updated. Recompiling...

[webpack-dev-server] index.js:493 Errors while compiling. Reload prevented.

[webpack-dev-server] index.js:493 ERROR

src/app/app.module.ts:14:15 - error NG6009: The 'AppComponent' class is a standalone component, which can not be used in the '@NgModule.bootstrap' array. Use the 'bootstrapApplication' function for bootstrap instead.

14 bootstrap: [AppComponent]

~~~~~

src/app/app.module.ts:6:1

6 @NgModule({

~~~~~

7 declarations: [  
~~~~~


...
15 })

~~~~~

16 export class AppModule { }

~~~~~


The 'bootstrap' array is present on this NgModule.

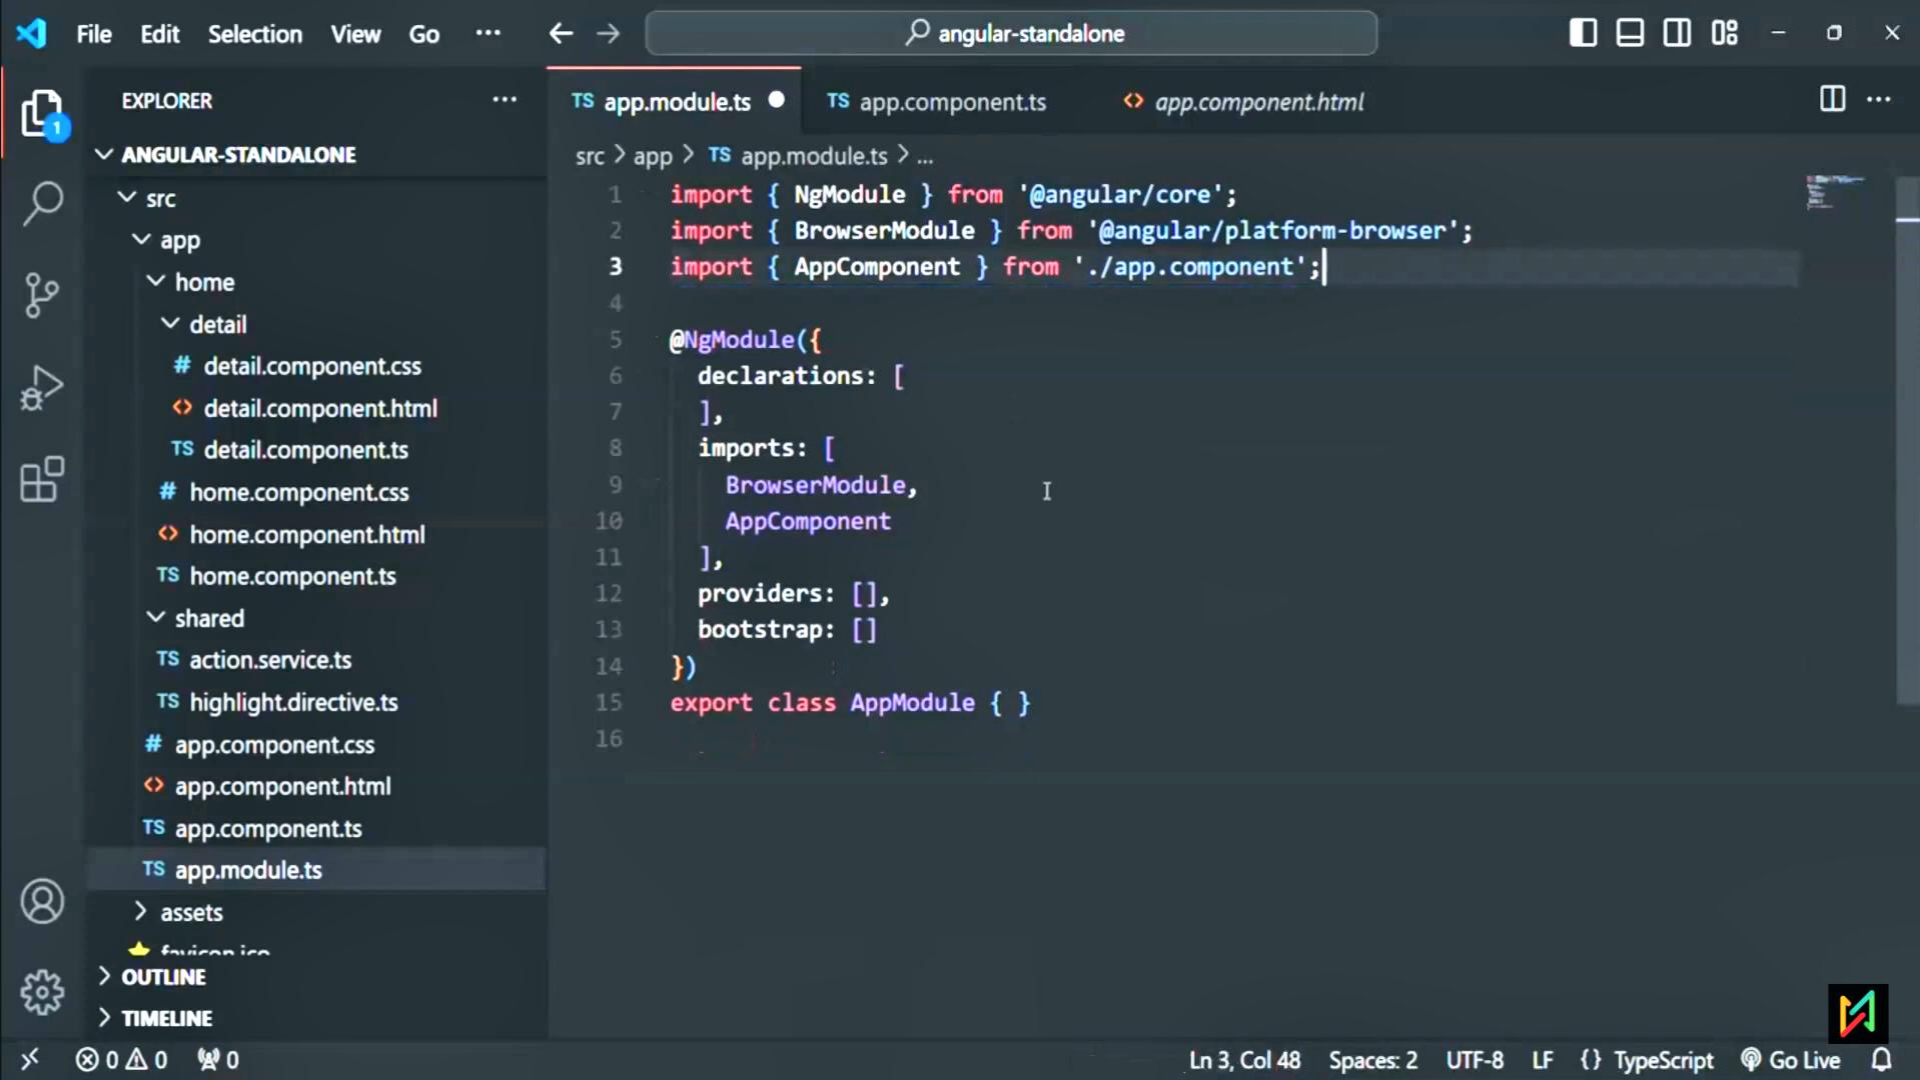

TS app.module.ts • TS app.component.ts <> app.component.html

src > app > TS app.module.ts > ...

```
1 import { NgModule } from '@angular/core';
2 import { BrowserModule } from '@angular/platform-browser';
3 import { AppComponent } from './app.component';
4
5 @NgModule({
6   declarations: [
7   ],
8   imports: [
9     BrowserModule,
10    AppComponent
11  ],
12  providers: [],
13  bootstrap: []
14 })
15 export class AppModule { }
16
```

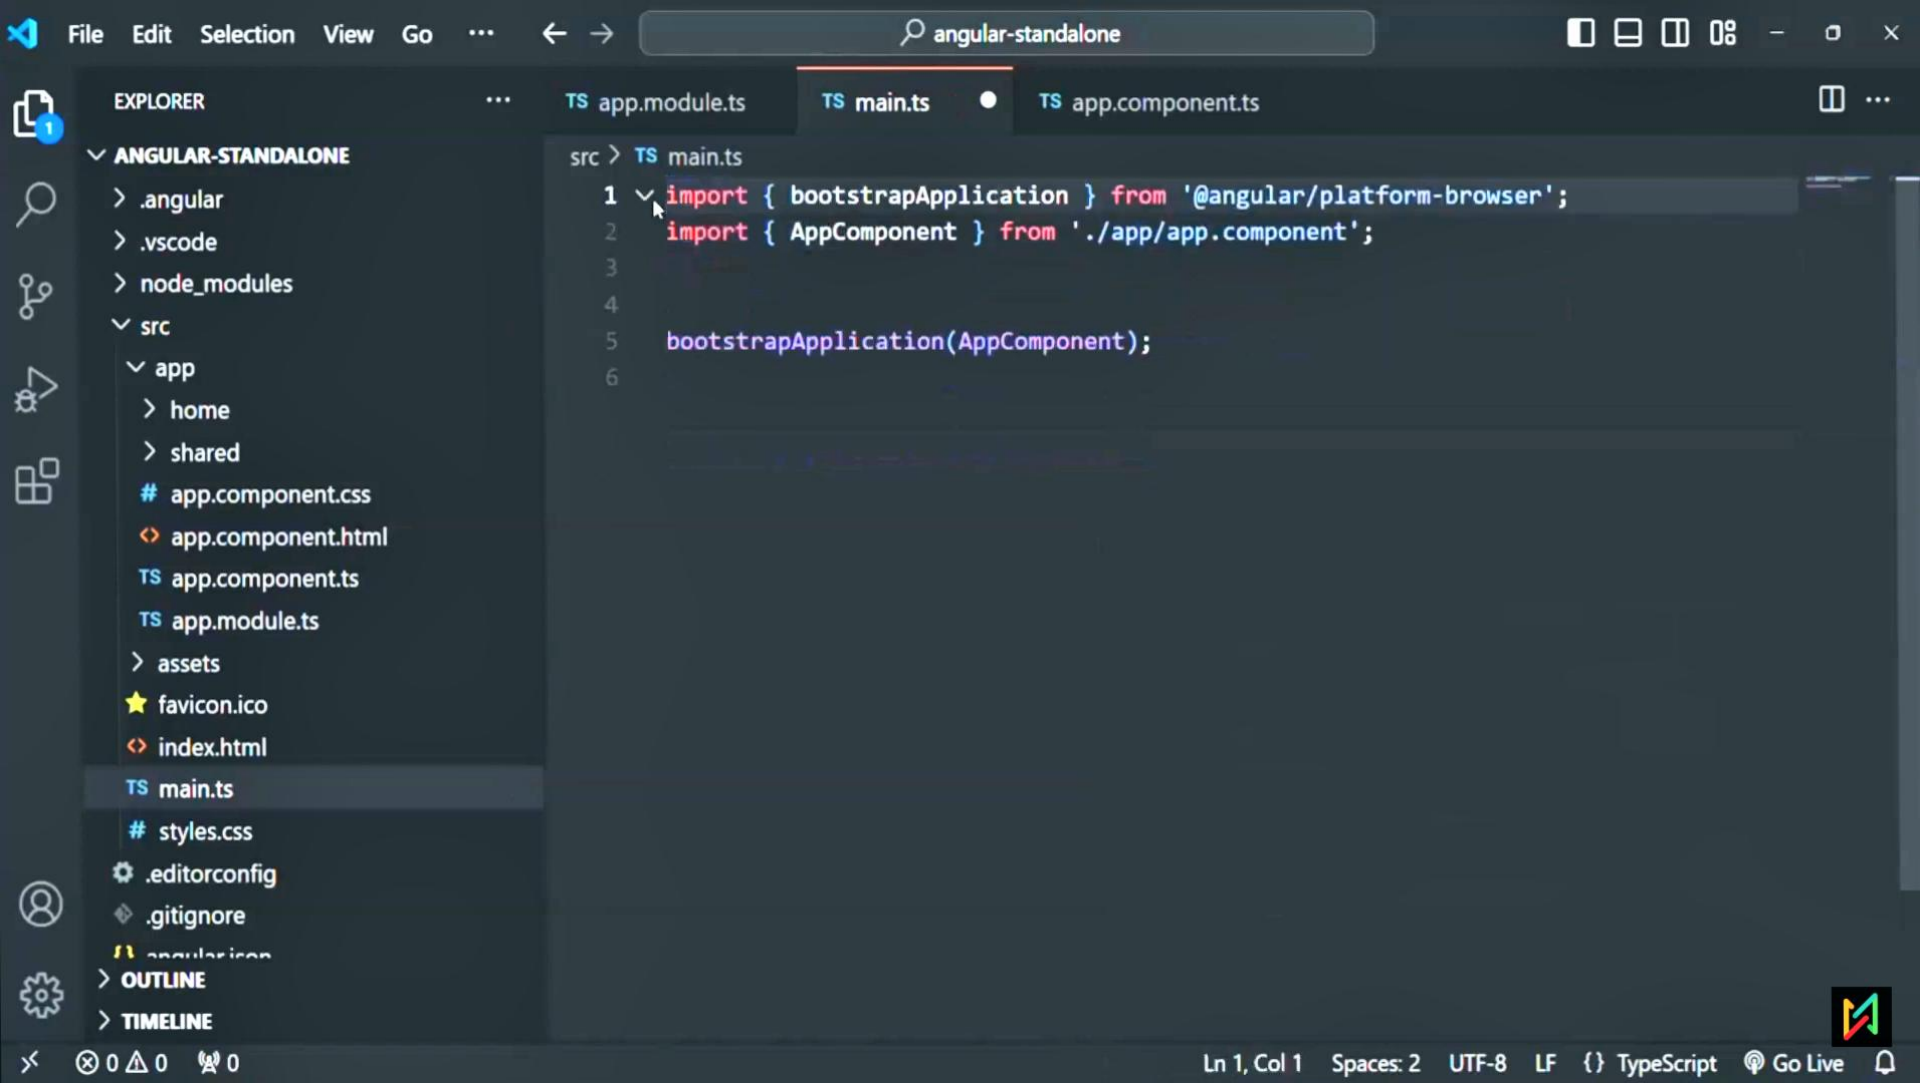EXPLORER

TS app.module.ts

TS main.ts

TS app.component.ts

ANGULAR-STANDALONE

> .angular

> .vscode

> node_modules

src

app

> home

> shared

app.component.css

<> app.component.html

TS app.component.ts

TS app.module.ts

> assets

★ favicon.ico

<> index.html

TS main.ts

styles.css

⚙ .editorconfig

💎 .gitignore

🔥 angular.json

> OUTLINE

> TIMELINE

src > TS main.ts

1 import { bootstrapApplication } from '@angular/platform-browser';


2 import { AppComponent } from './app/app.component';

3

4

5 bootstrapApplication(AppComponent);

6

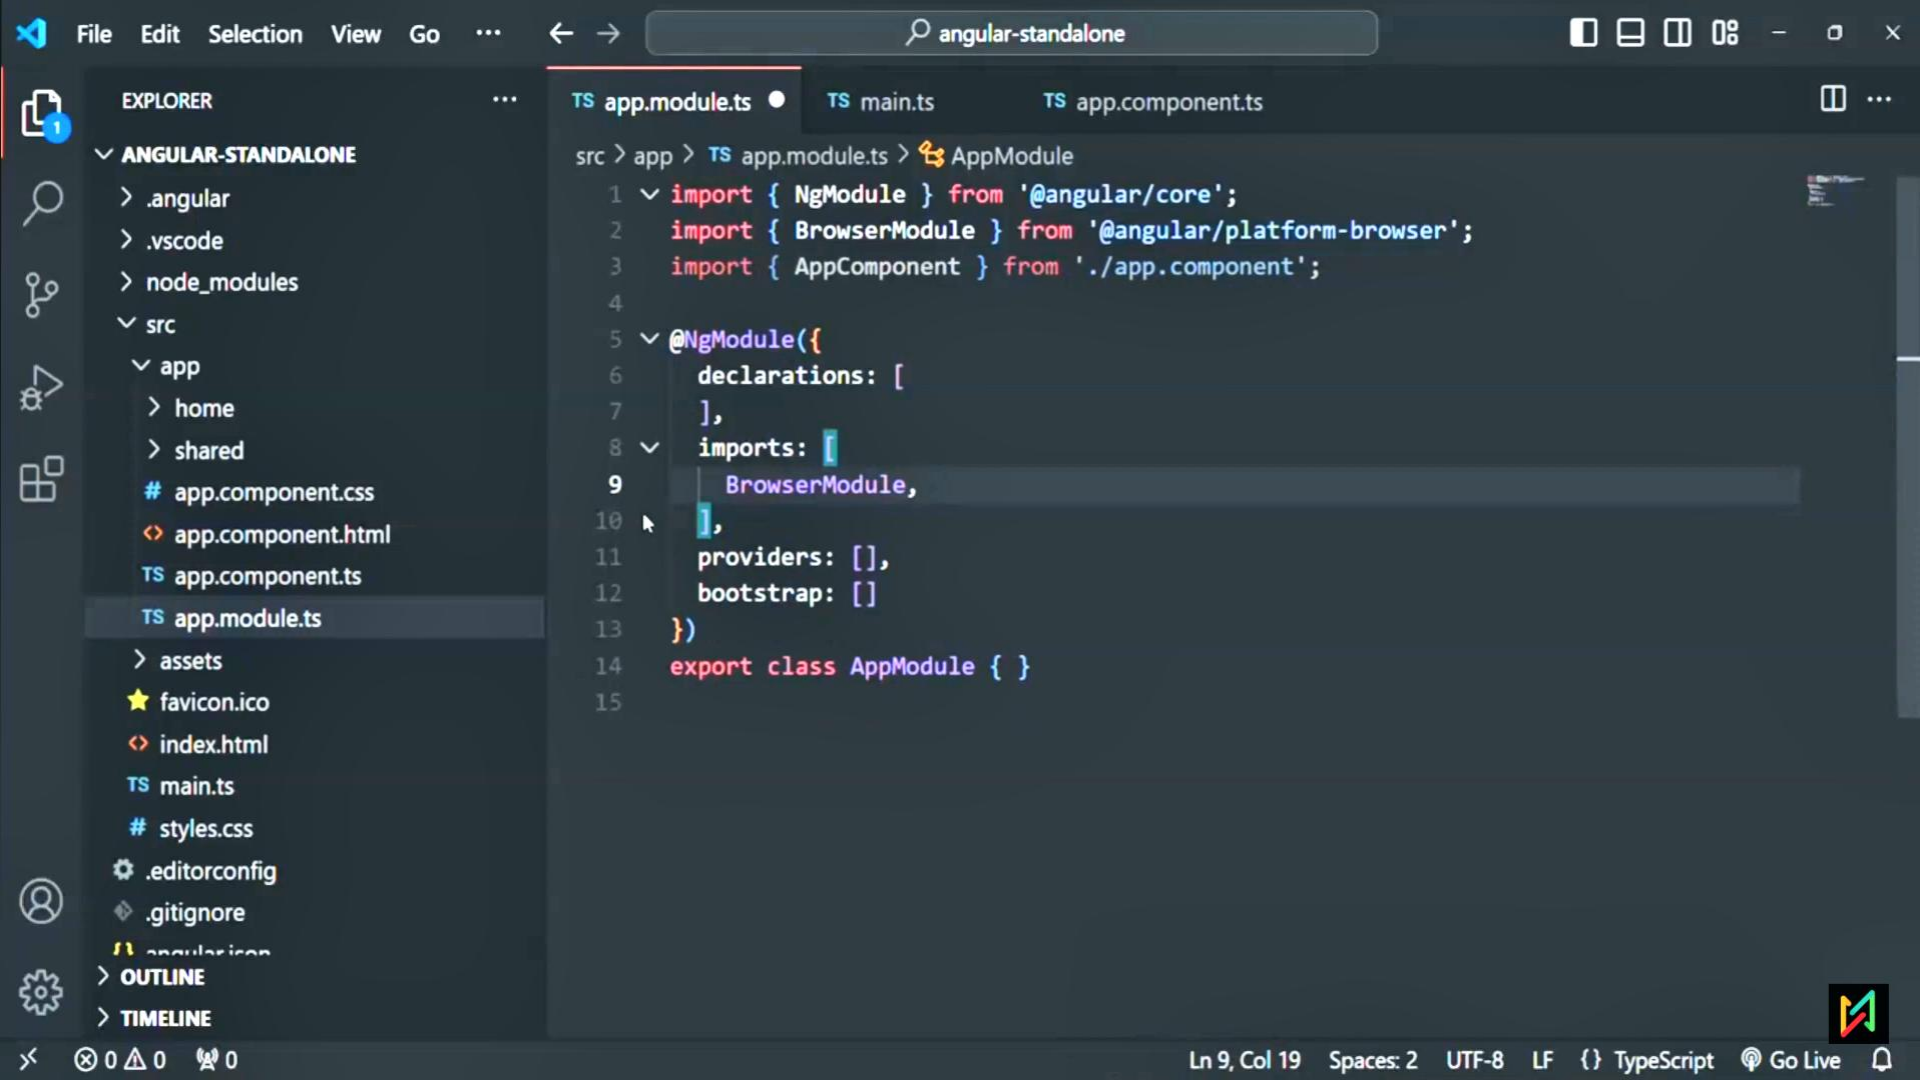

EXPLORER

ANGULAR-STANDALONE

- > .angular
- > .vscode
- > node_modules
- > src
 - > app
 - > home
 - > shared
 - # app.component.css
 - <> app.component.html
 - TS app.component.ts
 - TS app.module.ts
 - > assets
 - ★ favicon.ico
 - <> index.html
 - TS main.ts
 - # styles.css
 - ⚙ .editorconfig
 - 📄 .gitignore
 - 📄 angular.json
- > OUTLINE
- > TIMELINE


TS app.module.ts


TS main.ts

TS app.component.ts

src > app > TS app.module.ts > AppModule


```
1 import { NgModule } from '@angular/core';
2 import { BrowserModule } from '@angular/platform-browser';
3 import { AppComponent } from './app.component';
4
5 @NgModule({
6   declarations: [
7   ],
8   imports: [
9     BrowserModule,
10  ],
11   providers: [],
12   bootstrap: []
13 })
14 export class AppModule { }
15
```

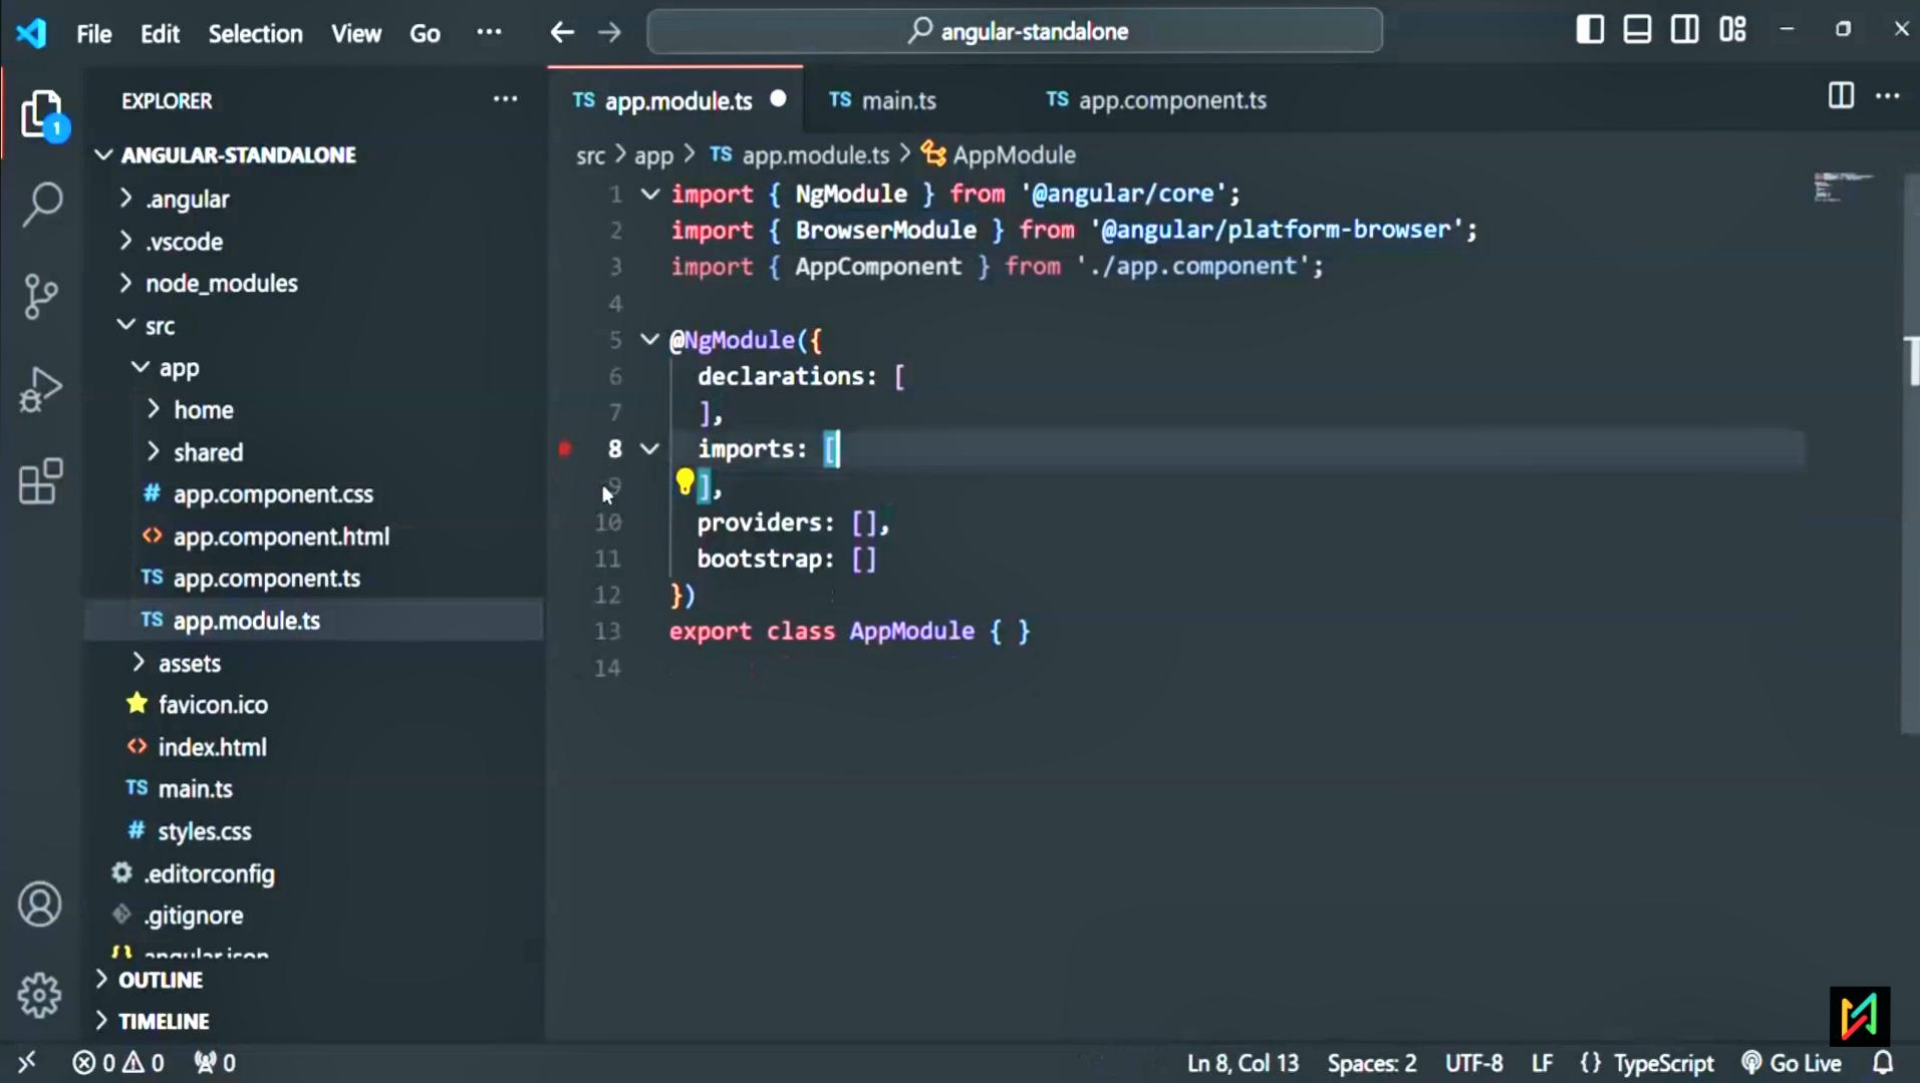


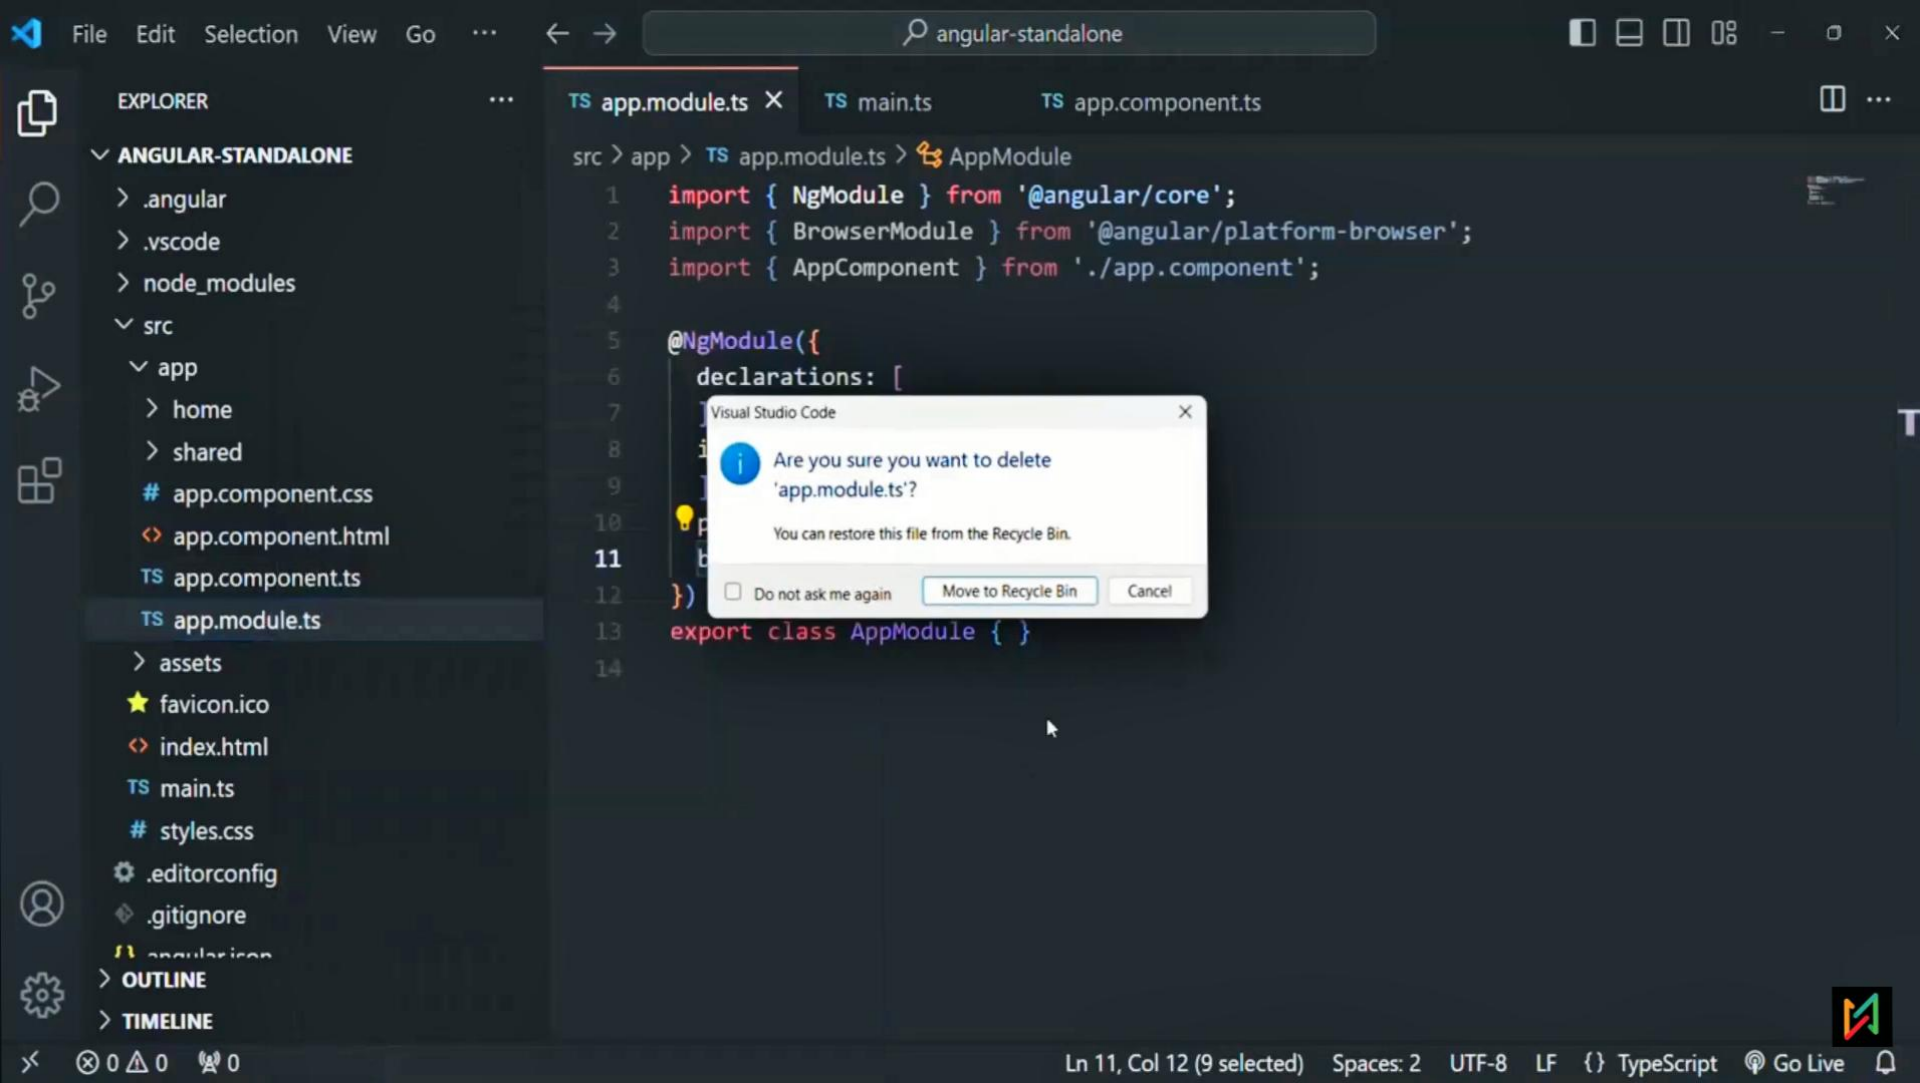


Providing Services in Standalone Component



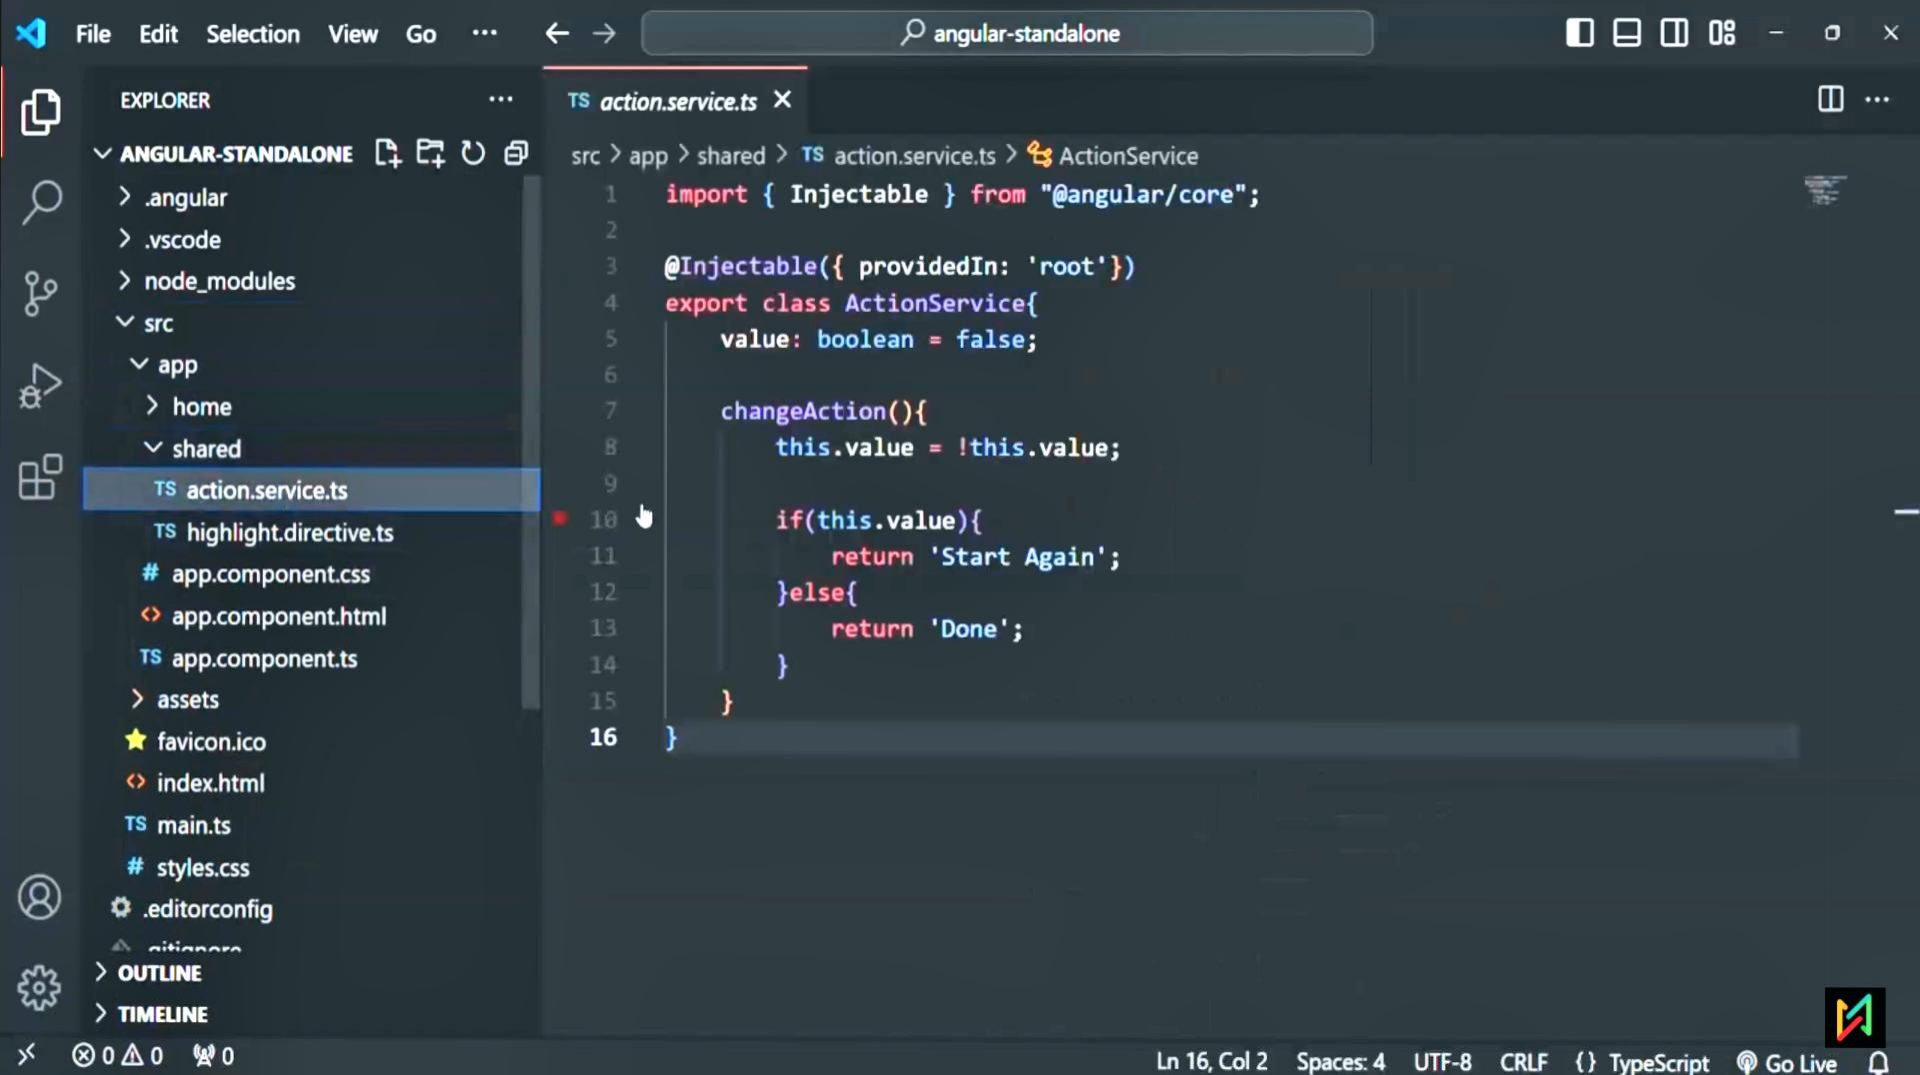

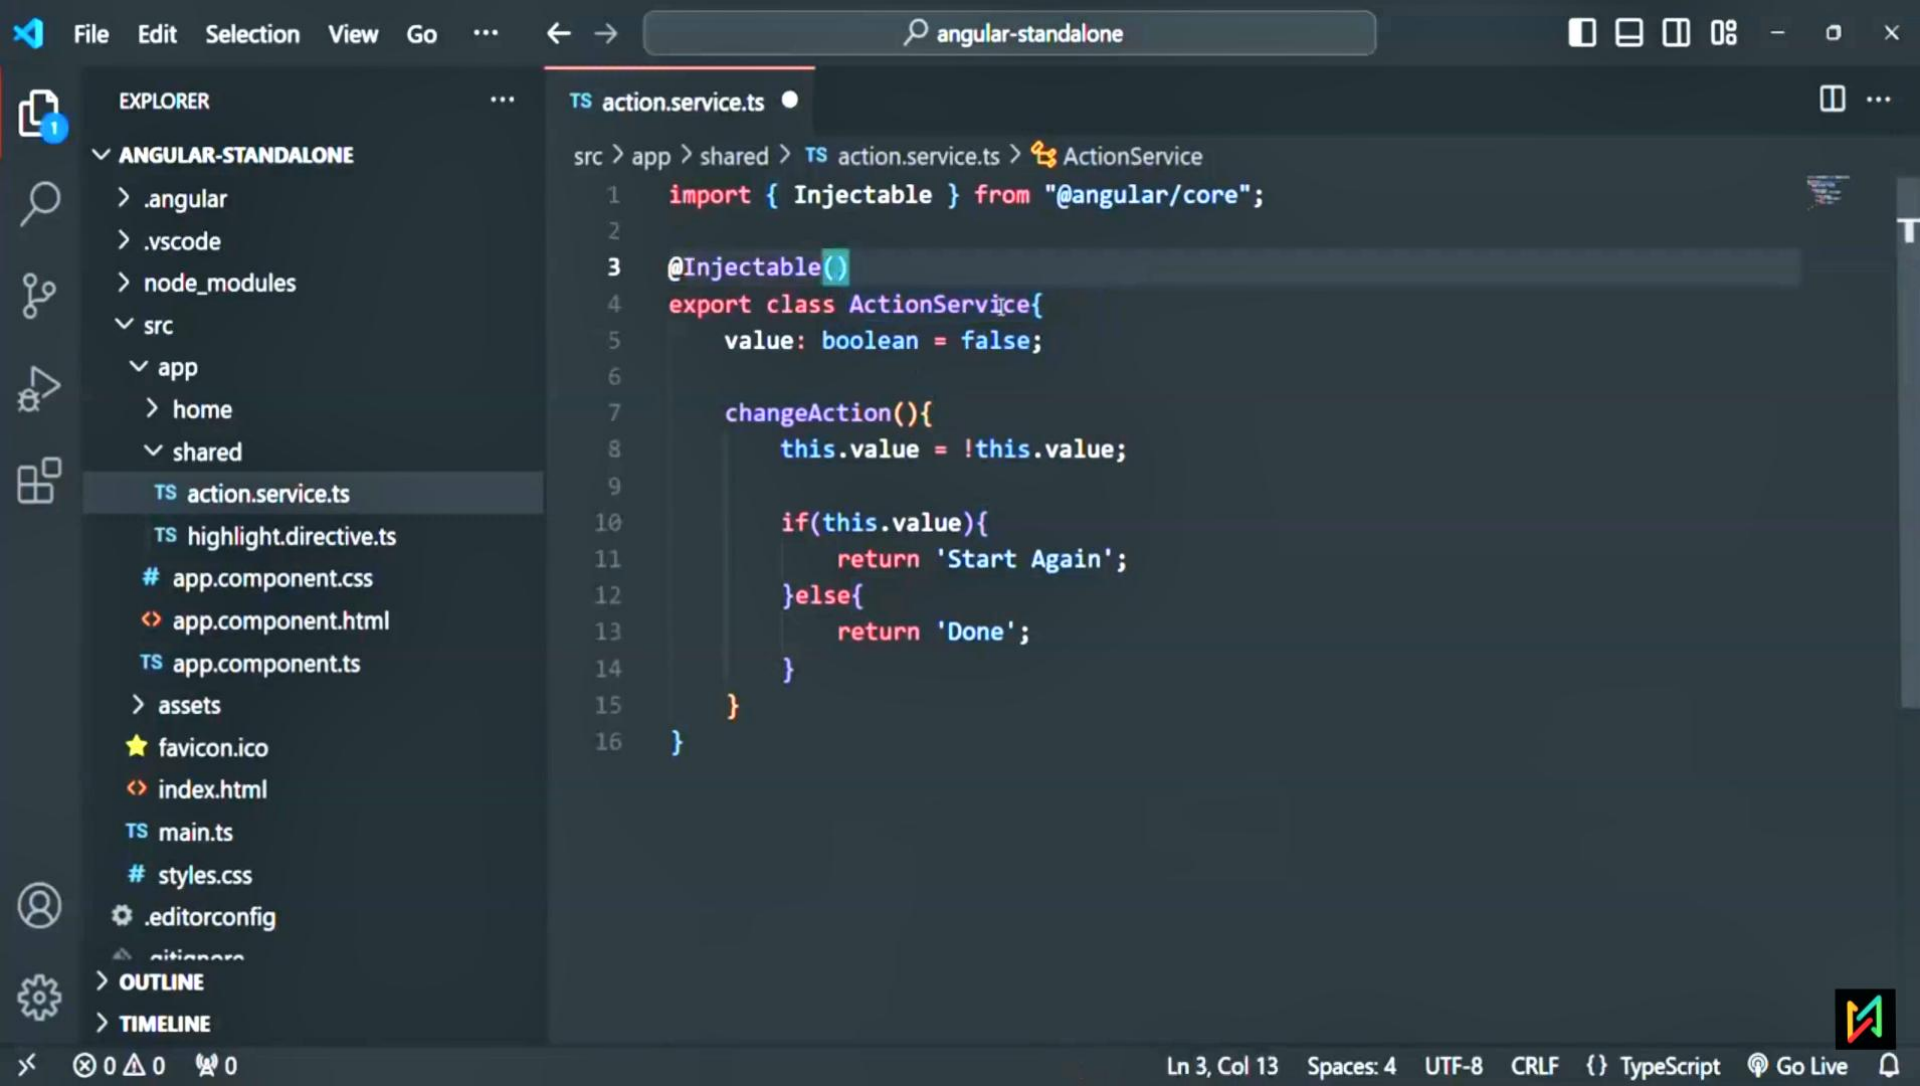

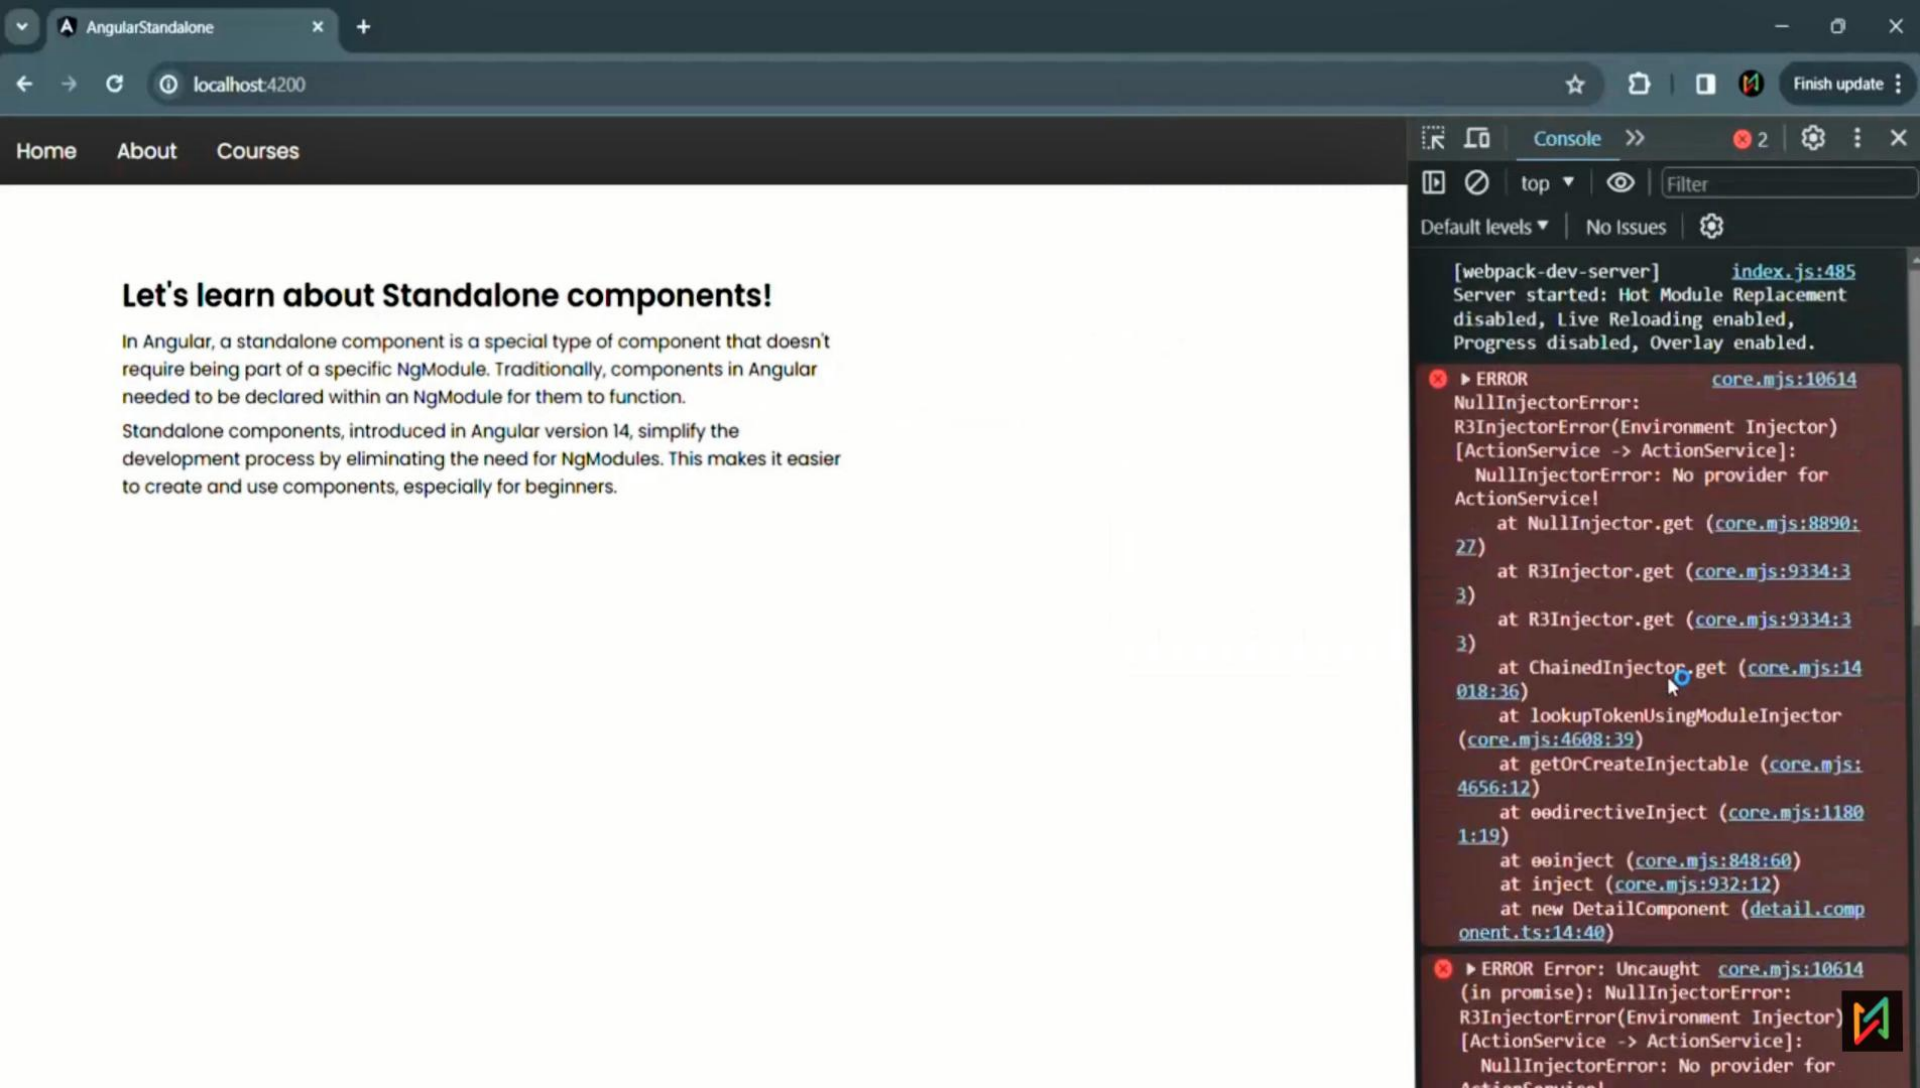

Let's learn about Standalone components!

In Angular, a standalone component is a special type of component that doesn't require being part of a specific `NgModule`. Traditionally, components in Angular needed to be declared within an `NgModule` for them to function.

Standalone components, introduced in Angular version 14, simplify the development process by eliminating the need for `NgModules`. This makes it easier to create and use components, especially for beginners.

Console >> 2


top Filter


Default levels No Issues


```
[webpack-dev-server] index.js:485
Server started: Hot Module Replacement
disabled, Live Reloading enabled,
Progress disabled, Overlay enabled.
```

```
ERROR core.mjs:10614
NullInjectorError:
R3InjectorError(Environment Injector)
[ActionService -> ActionService]:
  NullInjectorError: No provider for
  ActionService!
    at NullInjector.get (core.mjs:8890:
    27)
    at R3Injector.get (core.mjs:9334:3
    3)
    at R3Injector.get (core.mjs:9334:3
    3)
    at ChainedInjector.get (core.mjs:14
    018:36)
    at lookupTokenUsingModuleInjector
    (core.mjs:4608:39)
    at getOrCreateInjectable (core.mjs:
    4656:12)
    at ɵɵdirectiveInject (core.mjs:1180
    1:19)
    at ɵɵinject (core.mjs:848:60)
    at inject (core.mjs:932:12)
    at new DetailComponent (detail.comp
    onent.ts:14:40)
```

```
ERROR Error: Uncaught core.mjs:10614
(in promise): NullInjectorError:
R3InjectorError(Environment Injector)
[ActionService -> ActionService]:
  NullInjectorError: No provider for
  ActionService!
```

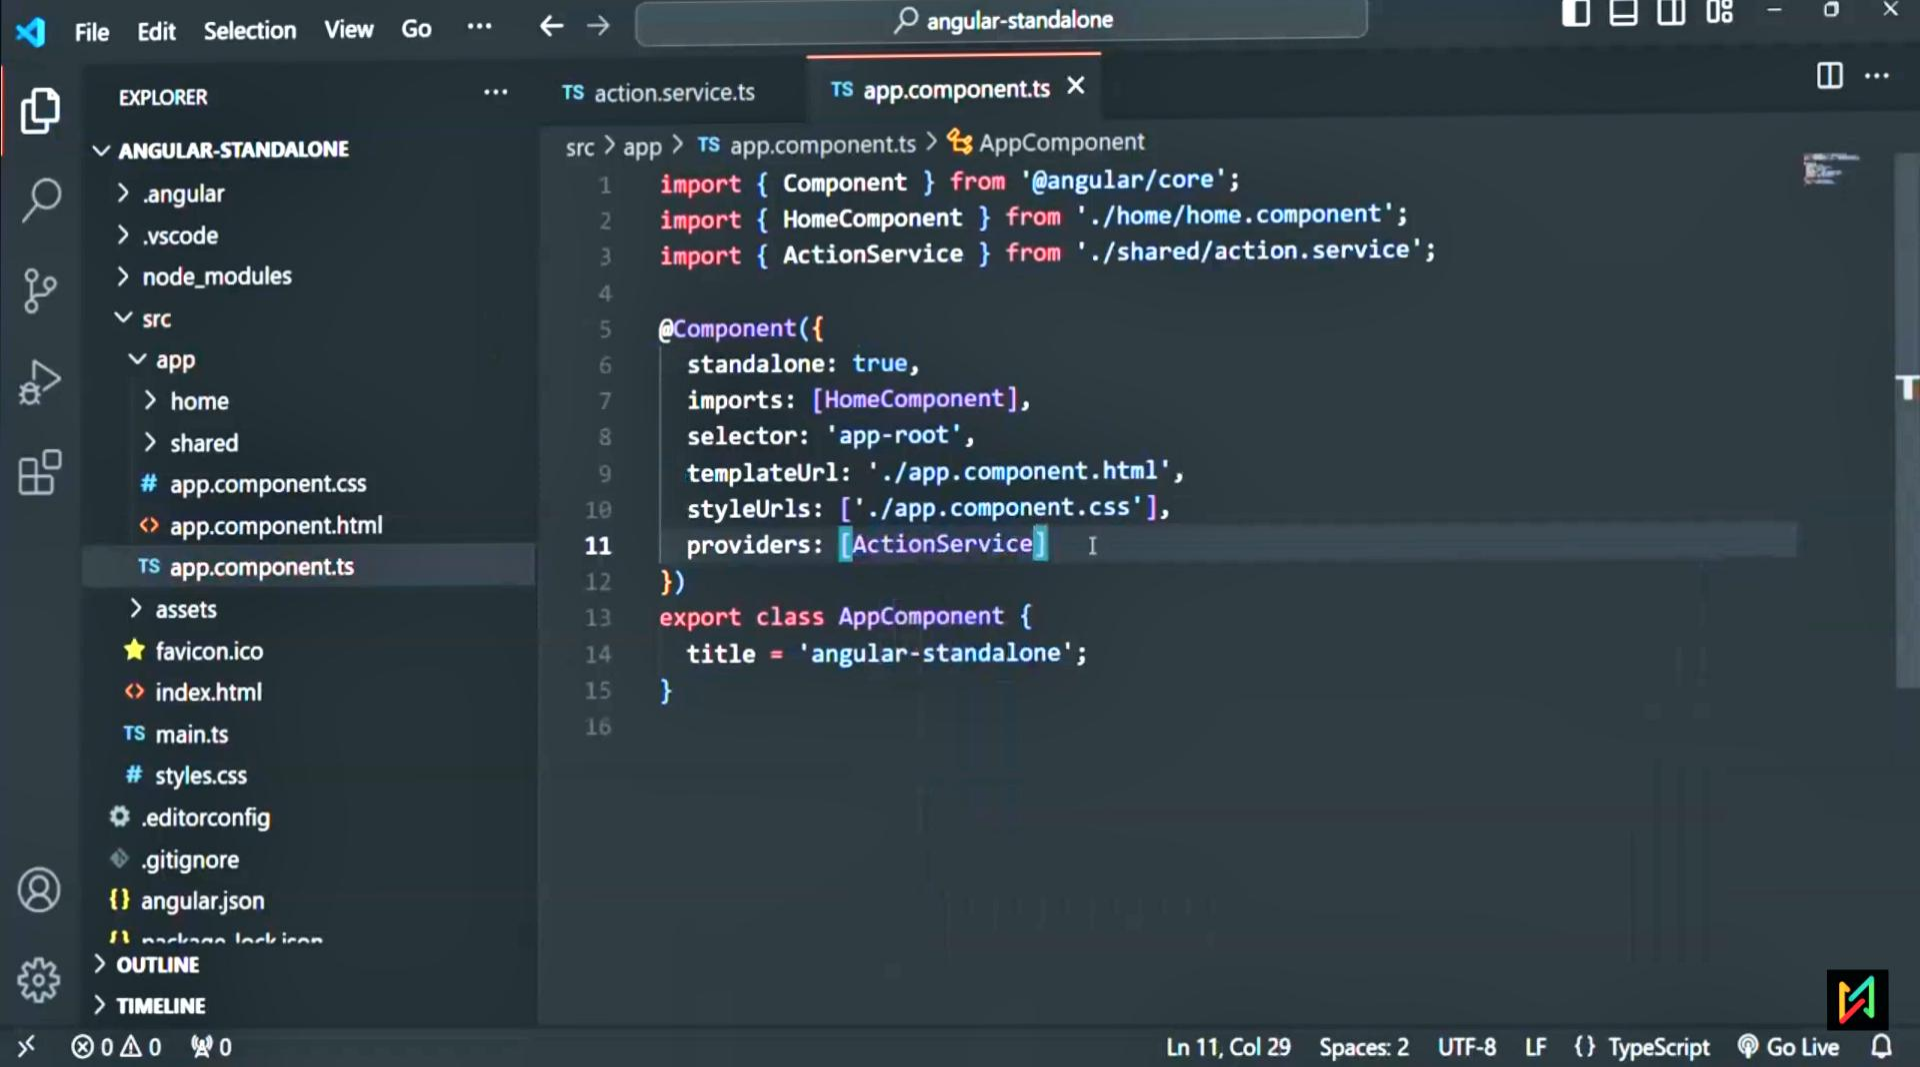

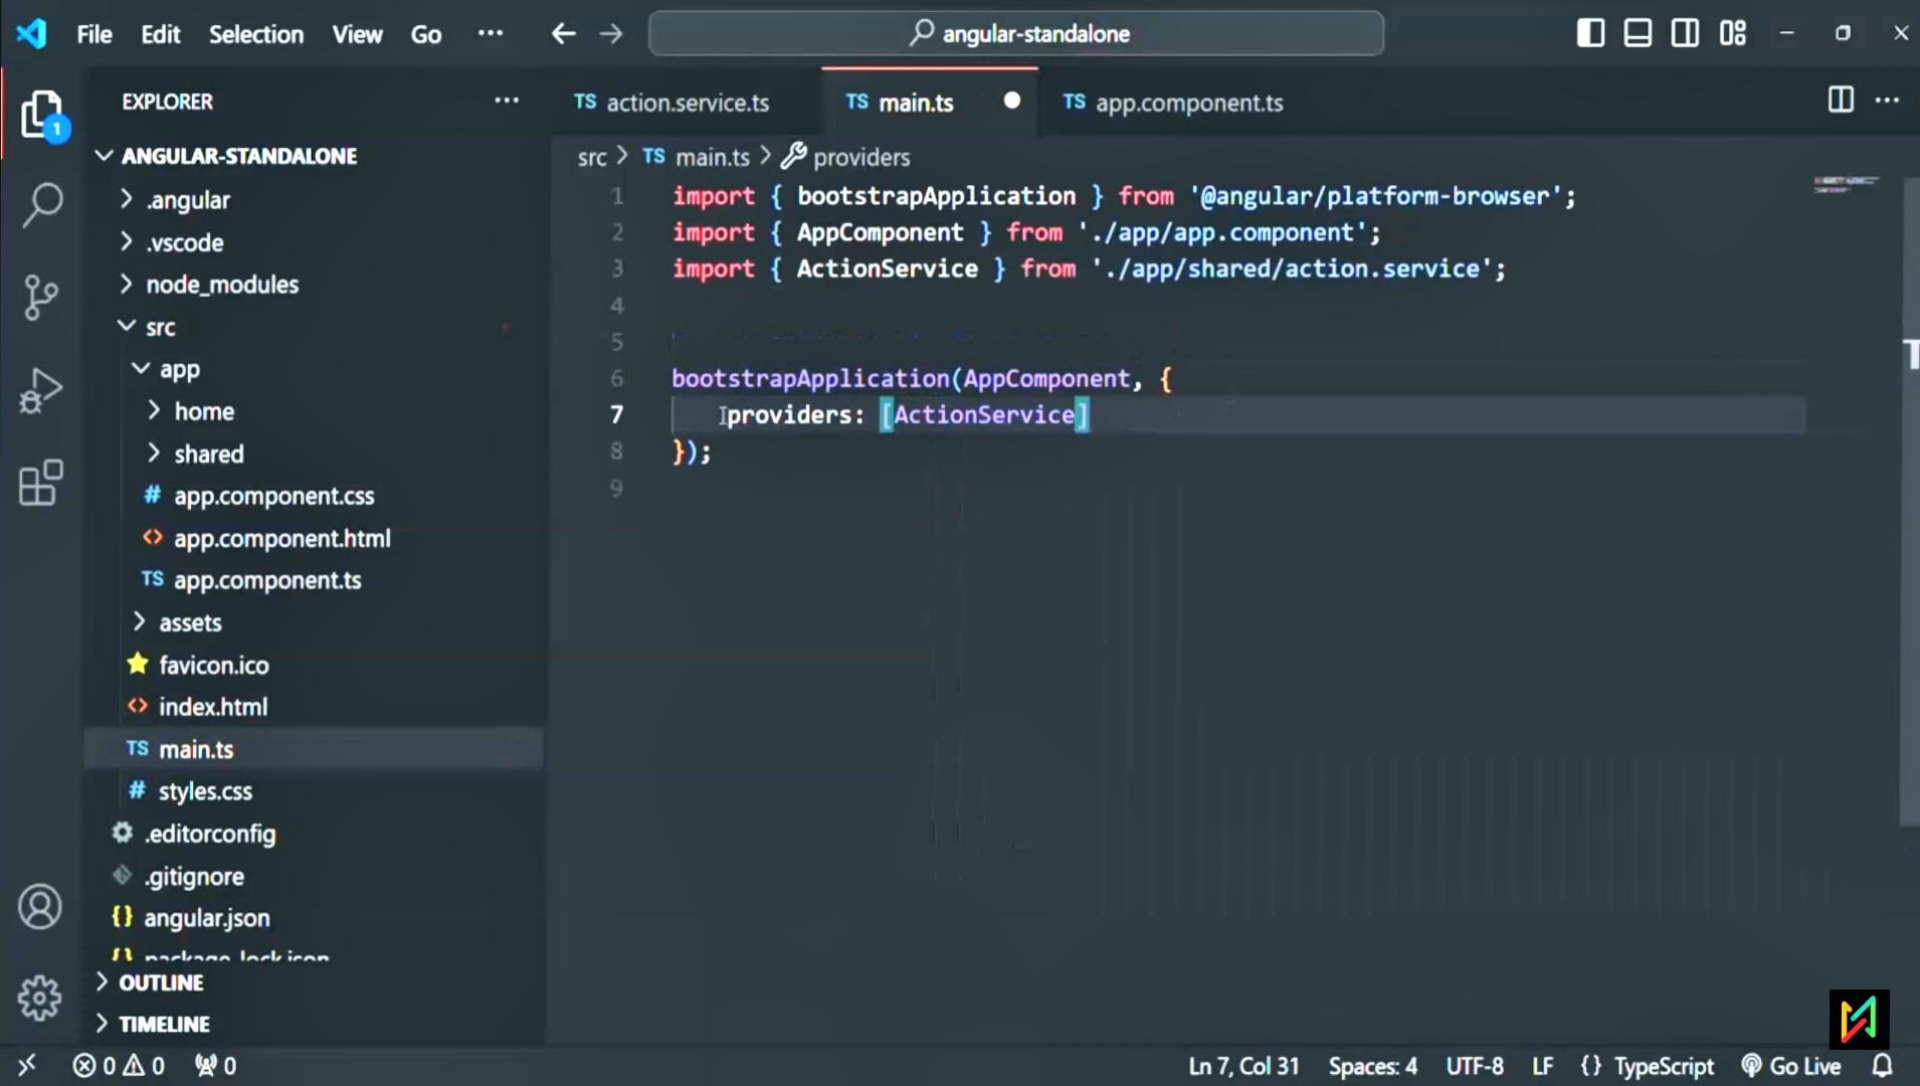

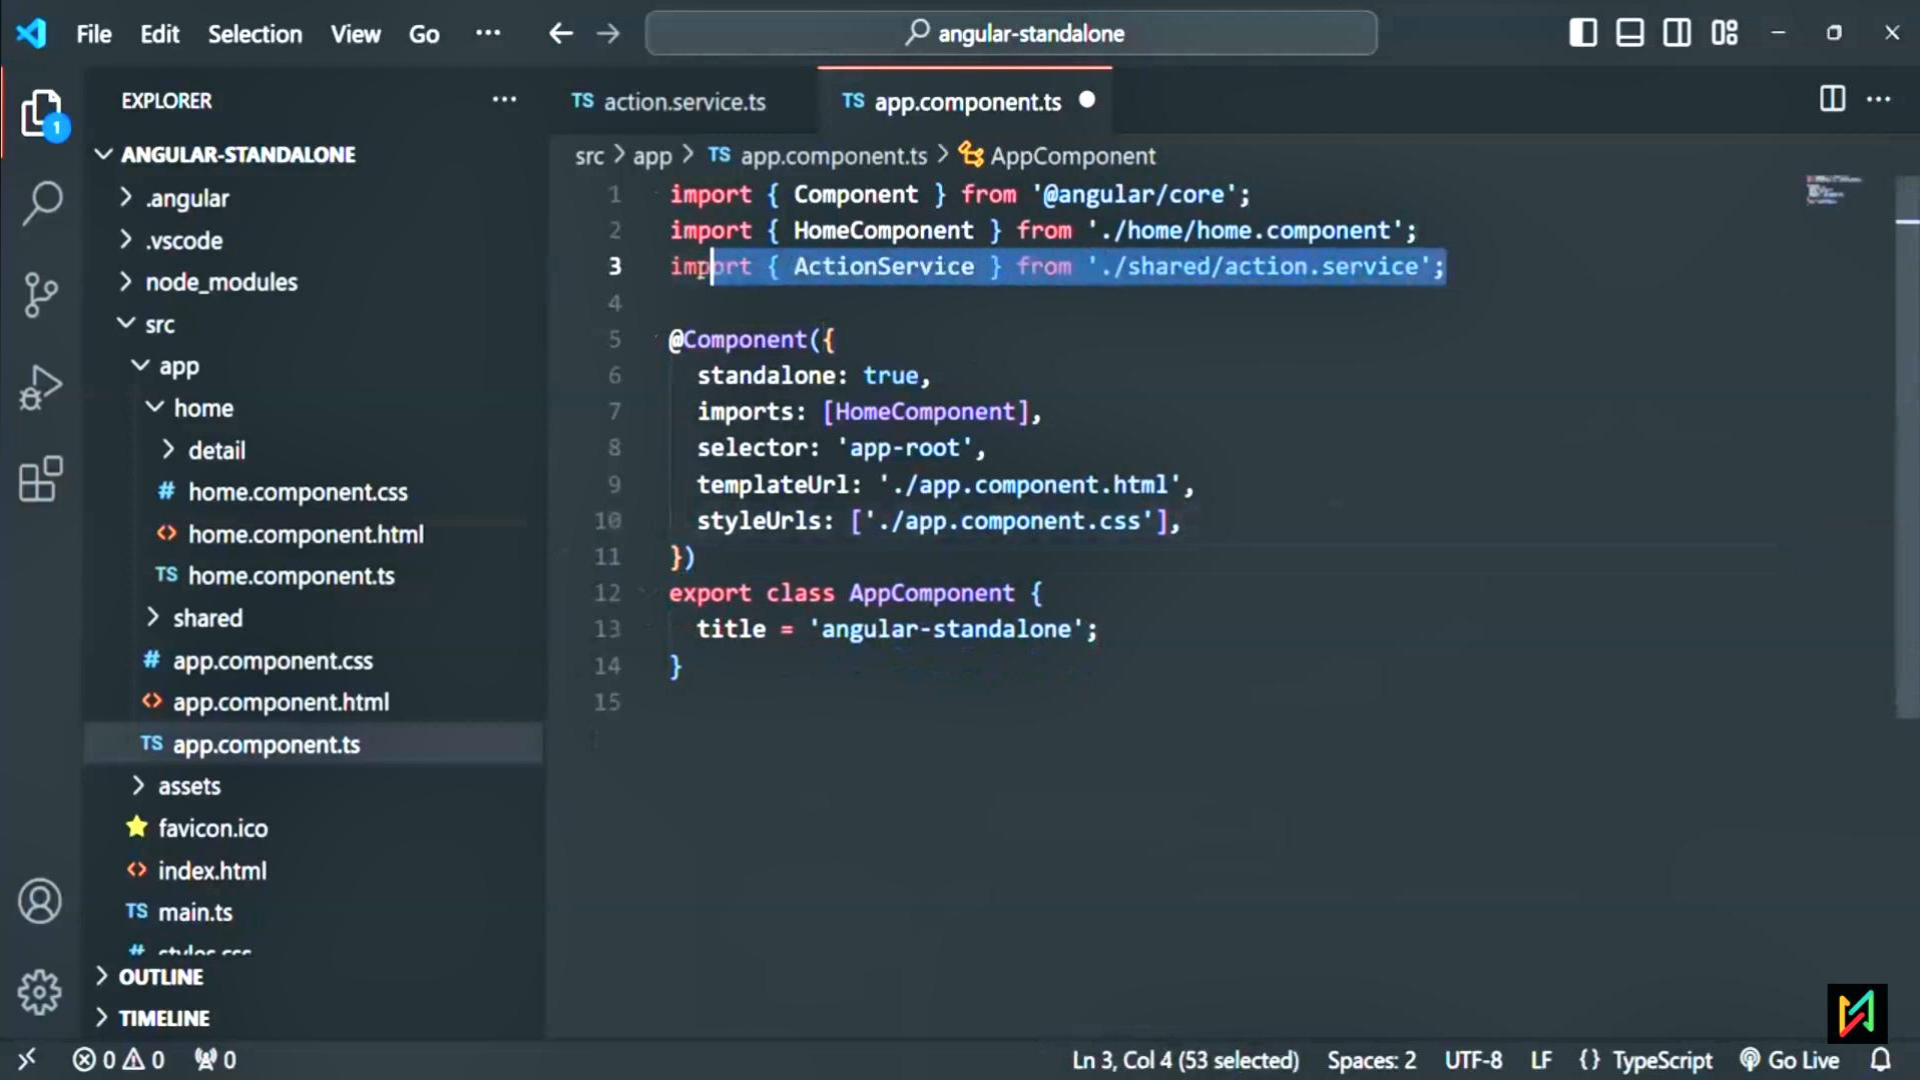

EXPLORER

TS action.service.ts


TS app.component.ts ●


▼ ANGULAR-STANDALONE

- > .angular
- > .vscode
- > node_modules
- ▼ src
 - ▼ app
 - ▼ home
 - > detail
 - # home.component.css
 - <> home.component.html
 - TS home.component.ts
 - > shared
 - # app.component.css
 - <> app.component.html
 - TS app.component.ts
 - > assets
 - ★ favicon.ico
 - <> index.html
 - TS main.ts
 - # styles.css
- > OUTLINE
- > TIMELINE

src > app > TS app.component.ts > AppComponent

```
1 import { Component } from '@angular/core';
2 import { HomeComponent } from './home/home.component';
3 import { ActionService } from './shared/action.service';
4
5 @Component({
6   standalone: true,
7   imports: [HomeComponent],
8   selector: 'app-root',
9   templateUrl: './app.component.html',
10  styleUrls: ['./app.component.css'],
11 })
12 export class AppComponent {
13   title = 'angular-standalone';
14 }
15
```

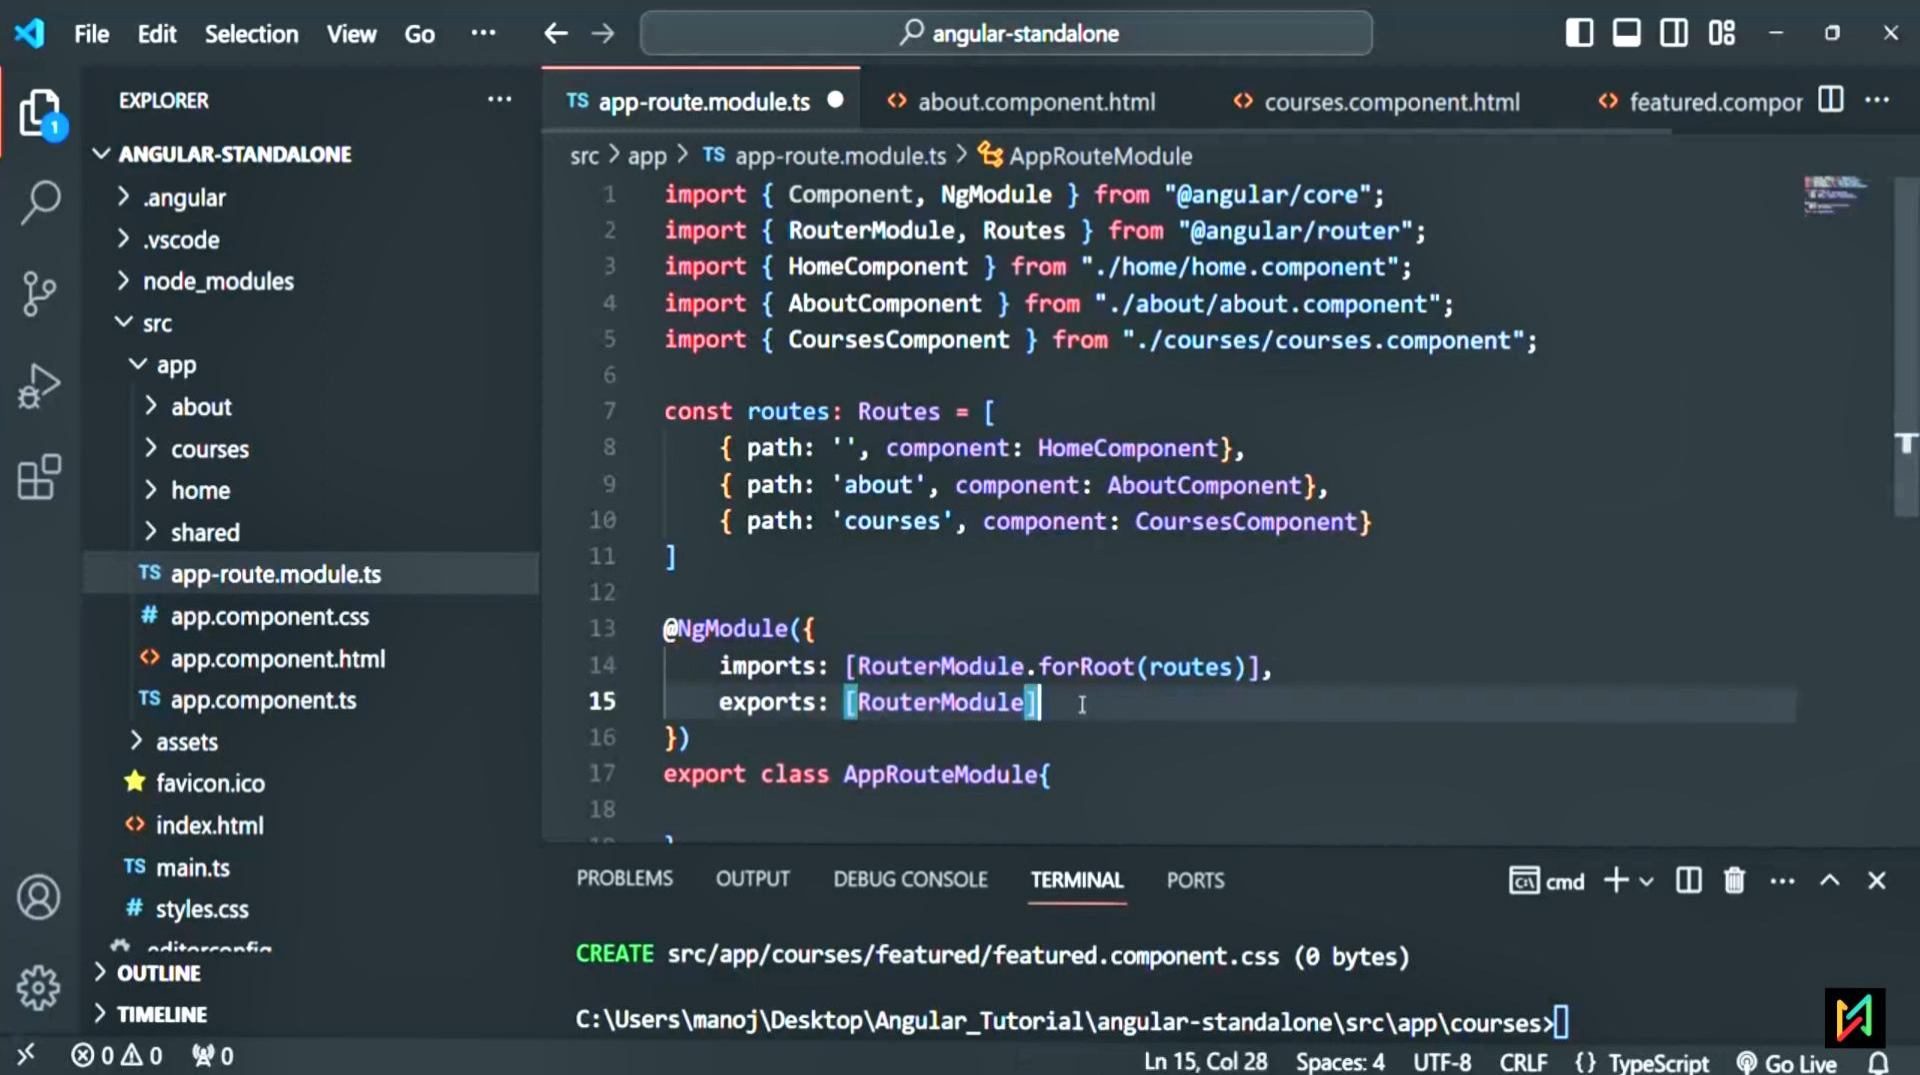

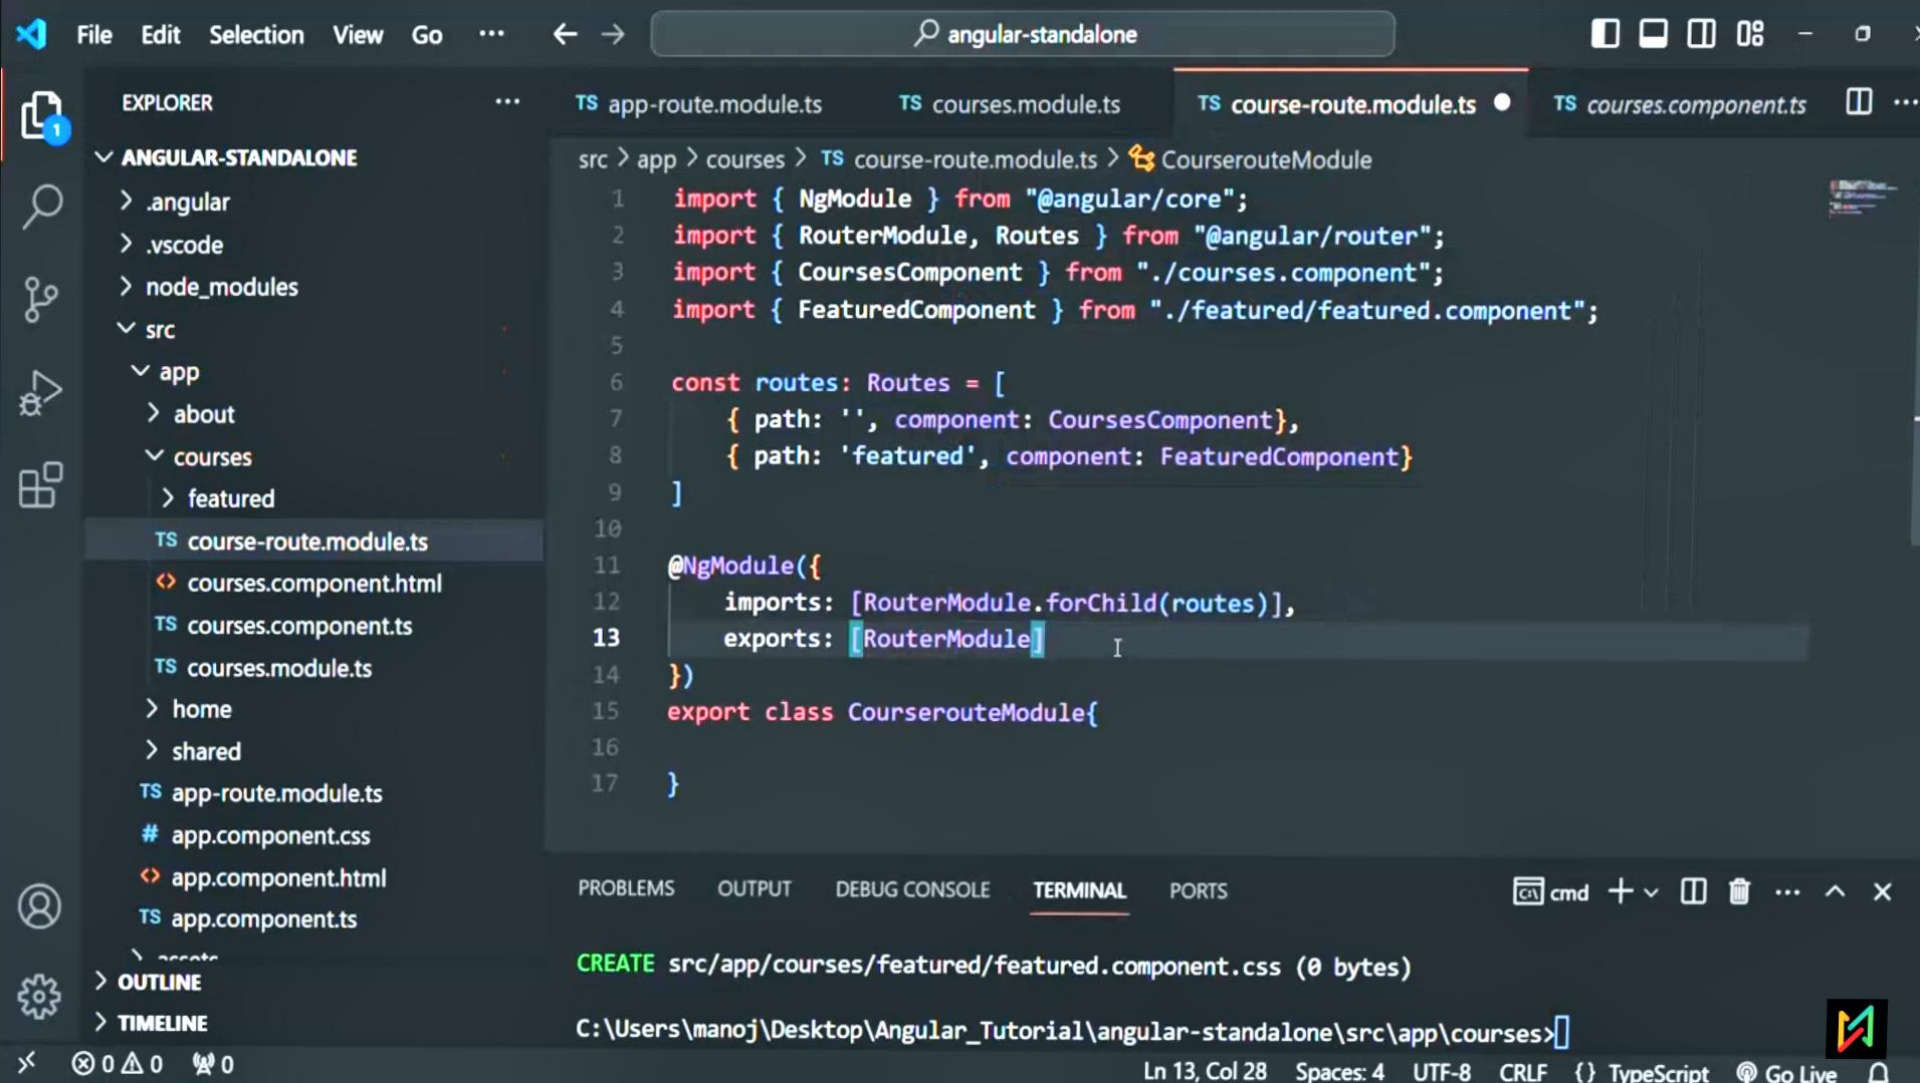FileEditSelectionViewGo...<=>angular-standalone

EXPLORER

ANGULAR-STANDALONE

> .angular

> .vscode

> node_modules

> src

> app

> about

> courses

> featured

TS course-route.module.ts

<> courses.component.html

TS courses.component.ts

TS courses.module.ts

> home

> shared

TS app-route.module.ts

app.component.css

<> app.component.html

TS app.component.ts

> OUTLINE

> TIMELINE

TS app-route.module.ts

TS courses.module.ts

TS course-route.module.ts

TS courses.component.ts

src > app > courses > TS courses.module.ts > CoursesModule

1 import { NgModule } from "@angular/core";

2 import { CoursesComponent } from "../courses.component";

3 import { CourseRouteModule } from "../course-route.module";

4

5 @NgModule({

6 declarations: [CoursesComponent],

7 imports: [CourseRouteModule]

8 })

9 export class CoursesModule{

10

11 }

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

cmd + v

+

-

...


^

x

CREATE src/app/courses/featured/featured.component.css (0 bytes)

C:\Users\manoj\Desktop\Angular_Tutorial\angular-standalone\src\app\courses>

Ln 9, Col 28 Spaces: 4 UTF-8 CRLF {} TypeScript Go Live

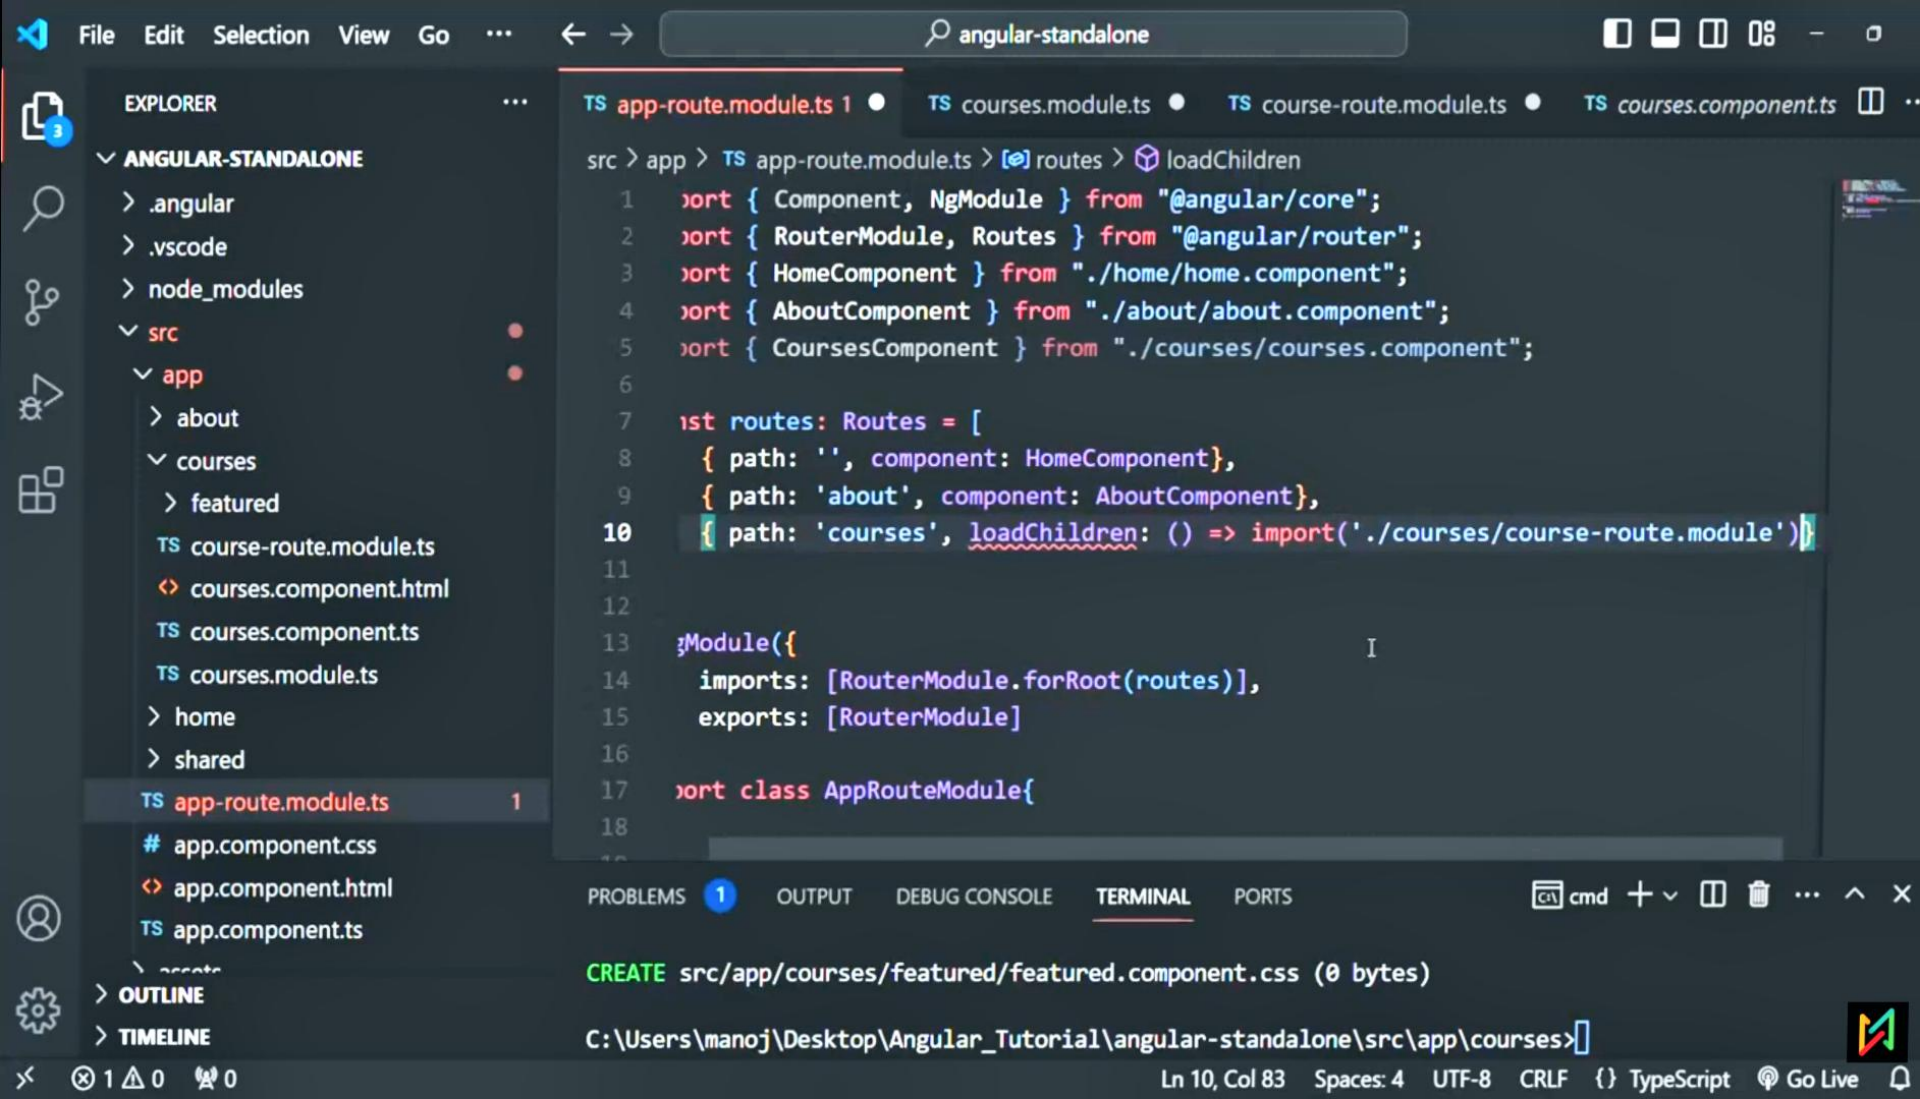

File

Edit

Selection

View

Go

...

←

→

angular-standalone

3

EXPLORER

...

ANGULAR-STANDALONE

> .angular

> .vscode

> node_modules

> src

> app

> about

> courses

> featured

TS course-route.module.ts

<> courses.component.html

TS courses.component.ts

TS courses.module.ts

> home

> shared

TS app-route.module.ts

app.component.css

<> app.component.html

TS app.component.ts

> app.component.ts

> OUTLINE

> TIMELINE

TS app-route.module.ts

TS courses.module.ts

TS course-route.module.ts

TS courses.component.ts

src > app > TS app-route.module.ts > routes > loadChildren > then() callback

1 '@angular/core';

2 '@angular/router';

3 './home.component';

4 './about.component';

5 './courses/courses.component';

6

7

8 component},

9 :Component},

10 () => import('./courses/course-route.module').then(mod => mod.CourseRouteModule)

11

12

13

14 routes]],

15

16

17

18

19

then(onfulfilled?: ((value: typeof

import("c:/Users/manoj/Desktop/Angular_Tutorial/angular-standalone/src/app/courses/course-route.module")) =>

typeof CourseRouteModule | PromiseLike<typeof

CourseRouteModule>) | null | undefined, onrejected?:

((reason: any) => Routes | Type<any> |

NgModuleFactory<any> | DefaultExport<Type<any>> |

DefaultExport<Routes> | PromiseLike<...>) | null |

undefined): Promise<Routes | Type<any> |

NgModuleFactory<any> | DefaultExport<Type<any>> |

DefaultExport<Routes> | typeof CourseRouteModule>

CREATE src/app/courses/featured/featured

C:\Users\manoj\Desktop\Angular_Tutorial\angular-standalone\src\app\courses>

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

Ln 10, Col 117

Spaces: 4


UTF-8

CRLF

{ }

TypeScript

Go Live

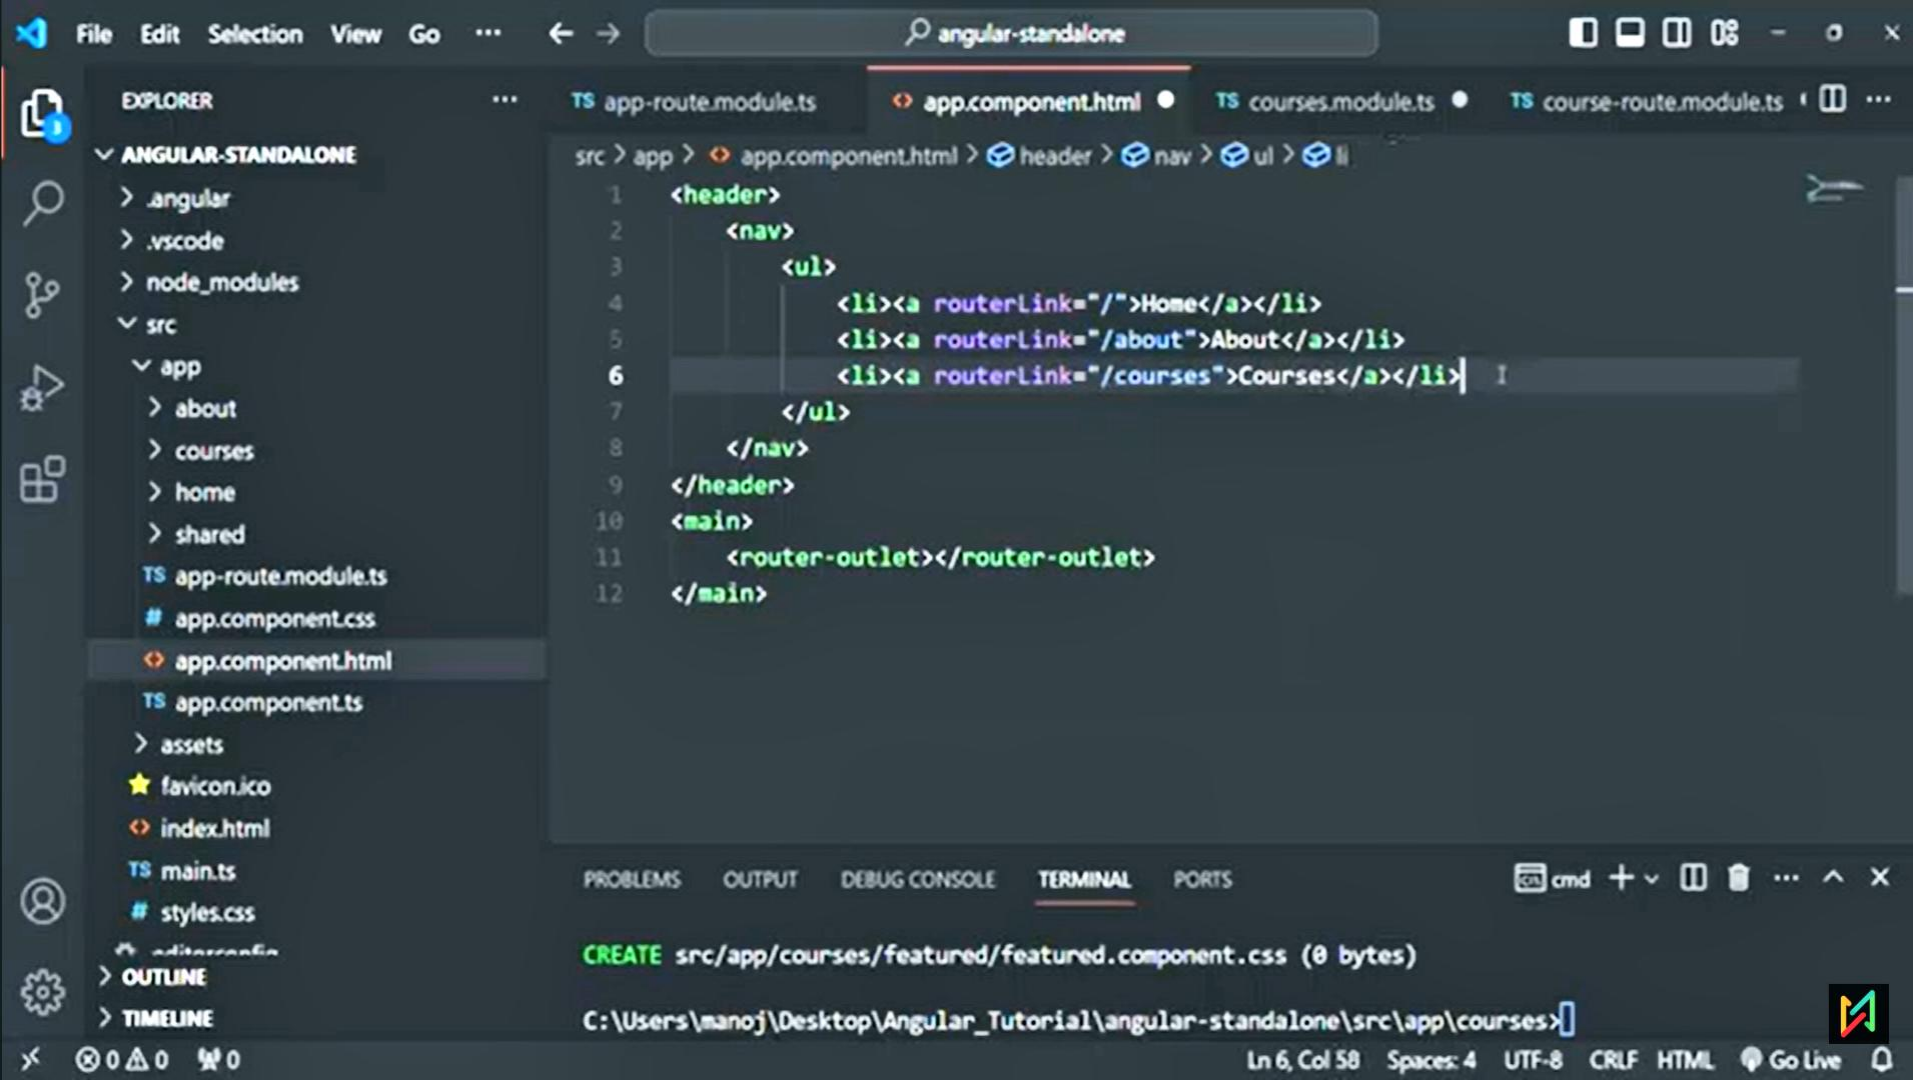

Compiled with problems:

ERROR! (Learn about Standalone components)

src/app/app.component.html:11:5 - error NG8001: 'router-outlet' is not a known element:

1. If 'router-outlet' is an Angular component, then verify that it is included in the '@Component.imports' of this component.
2. If 'router-outlet' is a Web Component then add 'CUSTOM_ELEMENTS_SCHEMA' to the '@Component.schemas' of this component to suppress this message.

```
11 <router-outlet></router-outlet>
```

~~~~~  
Note: Error occurs very probably due to standalone components.

src/app/app.component.ts:8:16

```
8 templateUrl: './app.component.html',
```

~~~~~  
Error occurs in the template of component AppComponent.



File

Edit

Selection

View

Go

...

←

→

angular-standalone

EXPLOLER

...

TS course-route.module.ts

TS app.component.ts

TS app-route.module.ts

ANGULAR-STANDALONE

> node_modules

> src

> app

> about

> courses

> home

> shared

TS app-route.module.ts

app.component.css

<> app.component.html

TS app.component.ts

> assets

★ favicon.ico

<> index.html

TS main.ts

styles.css

⚙️ .editorconfig

📄 .gitignore

...

> OUTLINE

> TIMELINE

src > app > TS app.component.ts > AppComponent

1

import { Component } from '@angular/core';

2

import { HomeComponent } from './home/home.component';

3

import { RouterModule } from '@angular/router';

4

5

@Component({

6

standalone: true,

7

imports: [HomeComponent, RouterModule],

8

selector: 'app-root',

9

templateUrl: './app.component.html',

10

styleUrls: ['./app.component.css'],

11

})

12

export class AppComponent {

13

title = 'angular-standalone';

14

}

15

Ln 7, Col 40


Spaces: 2


UTF-8


LF


{ } TypeScript


Go Live

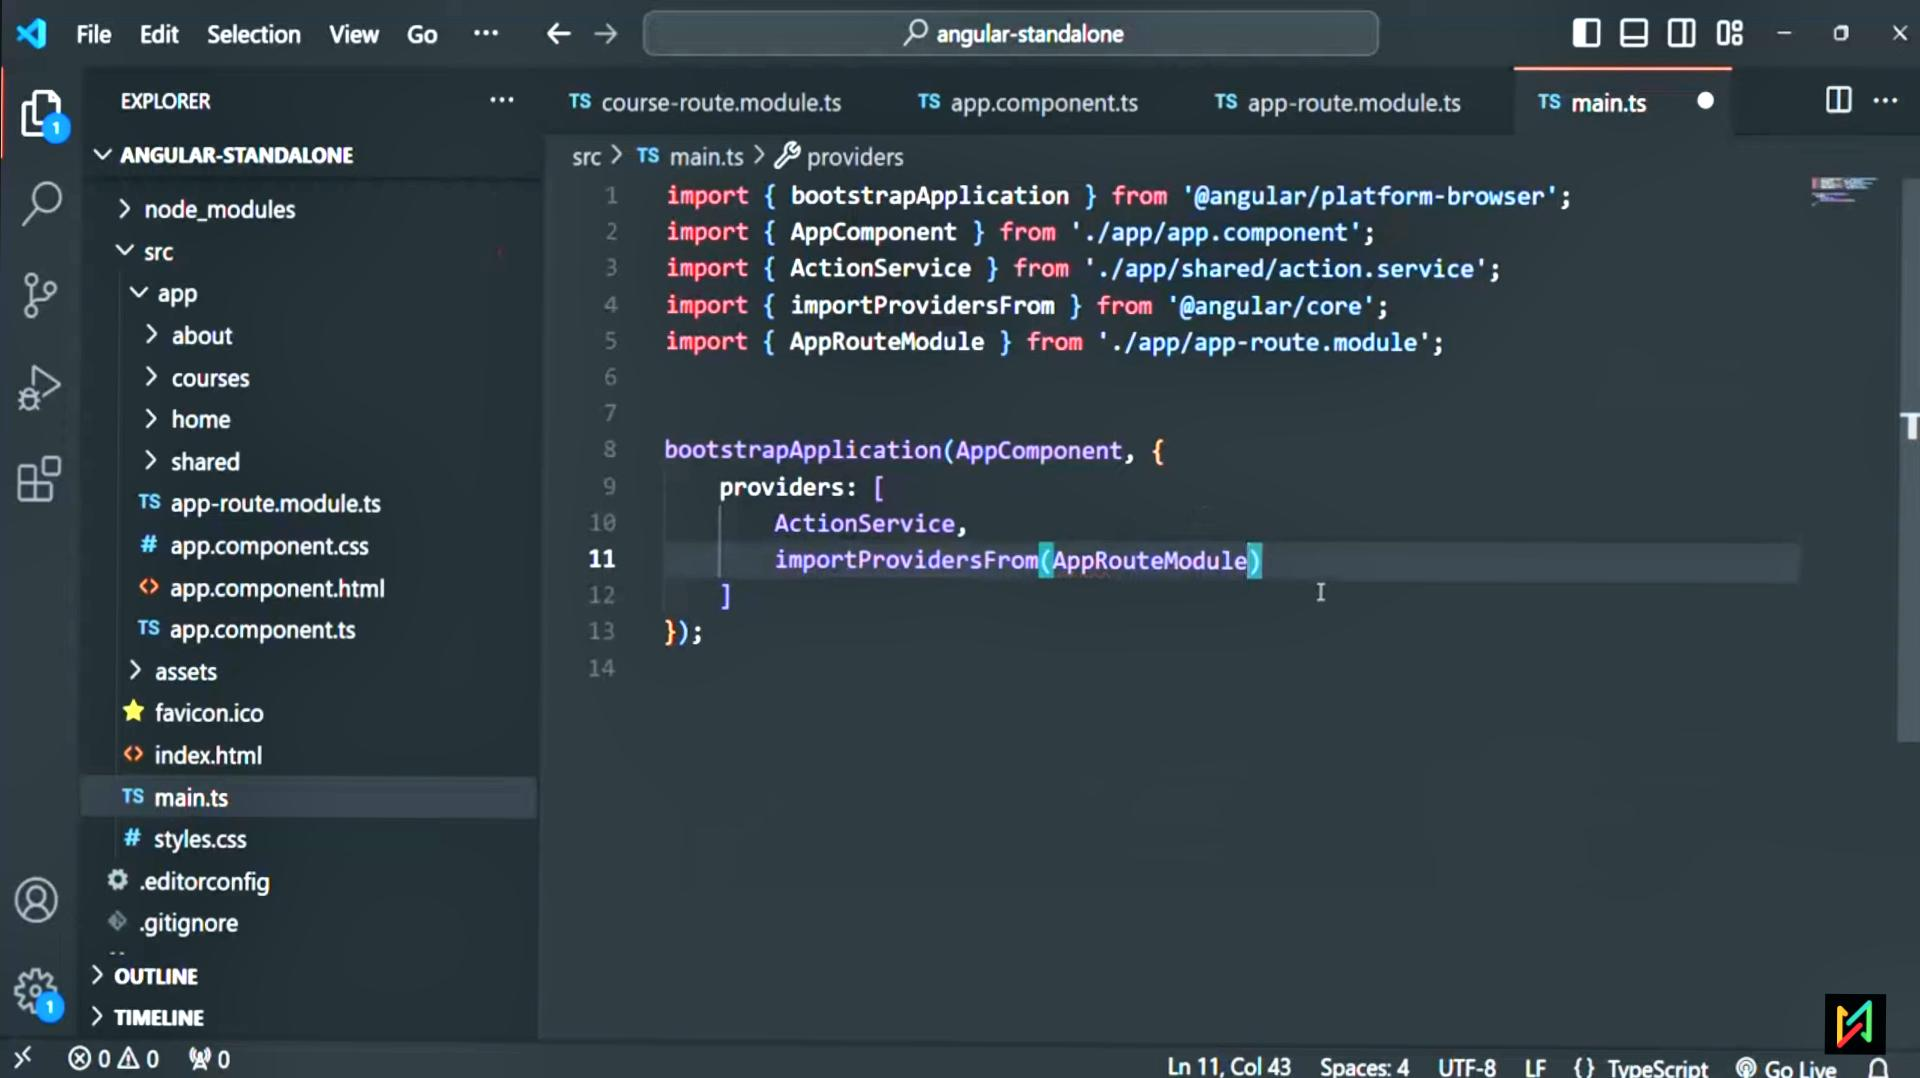


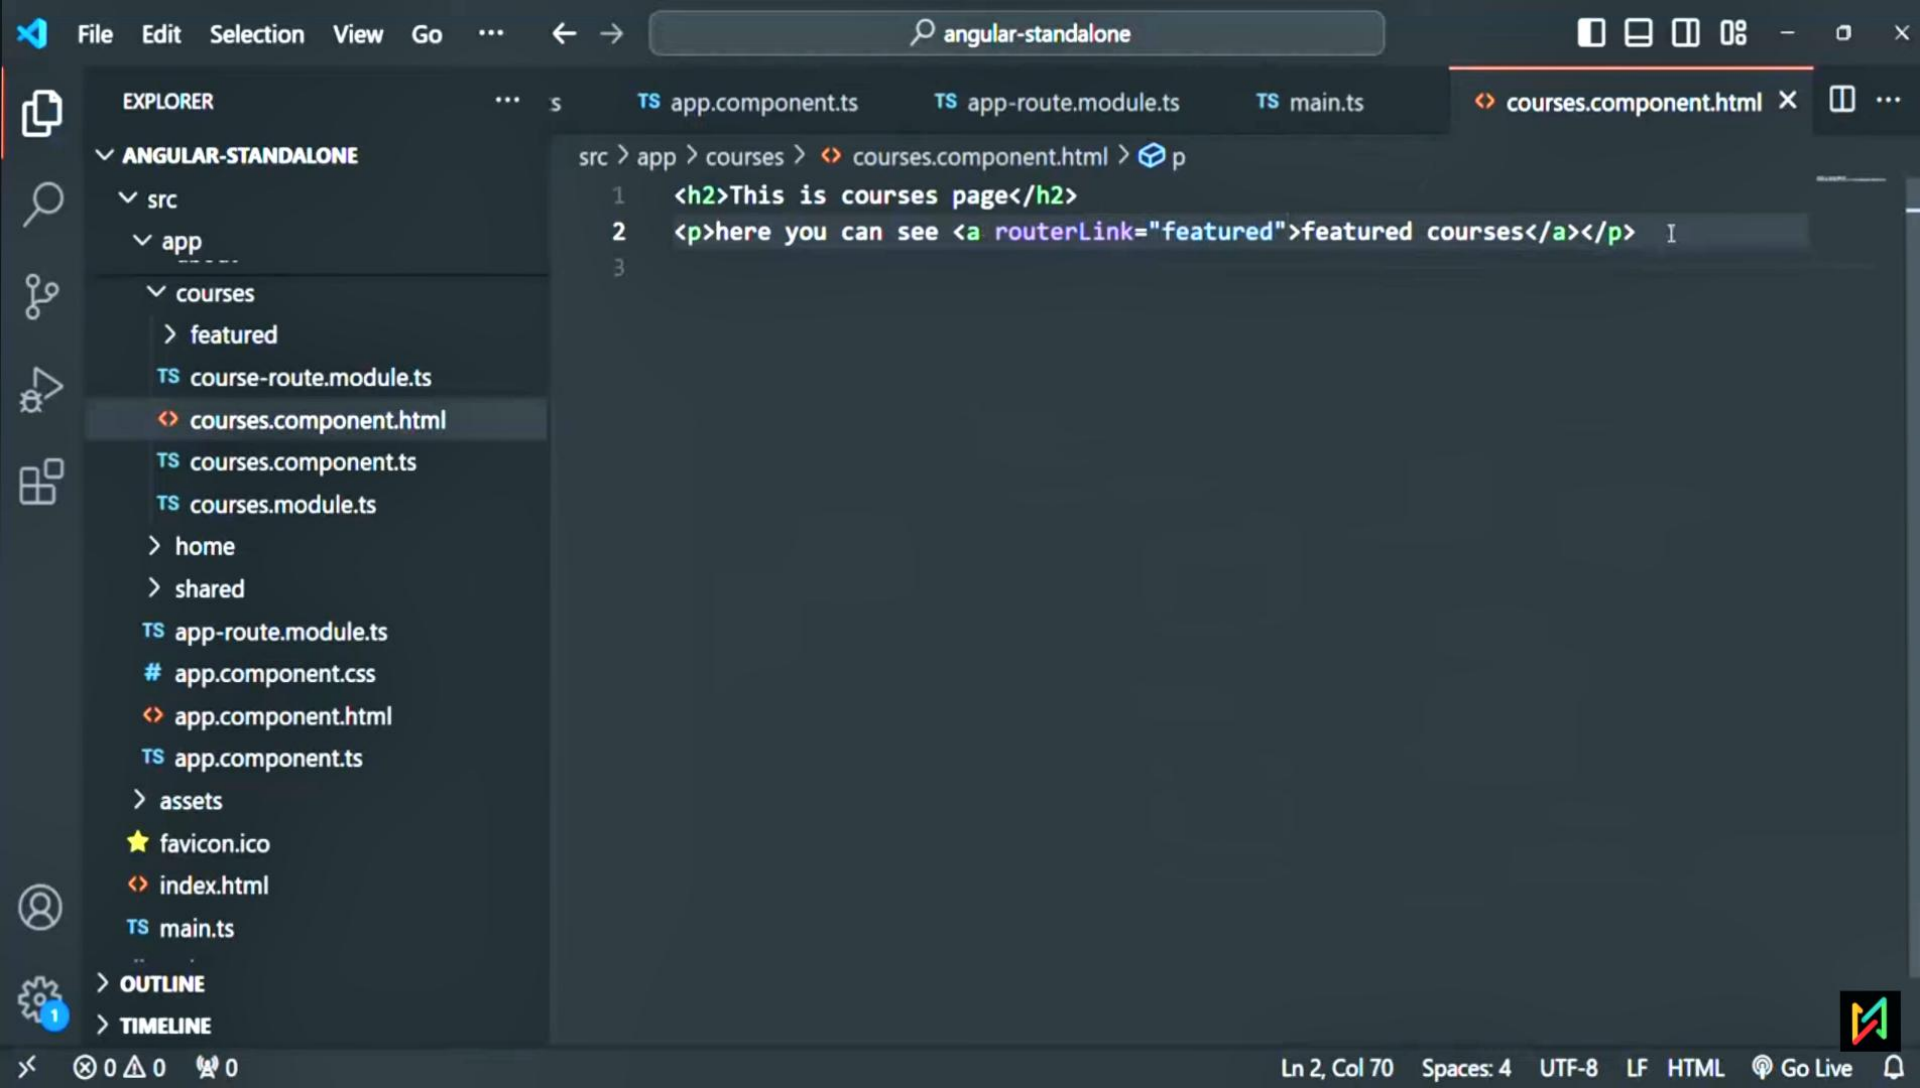


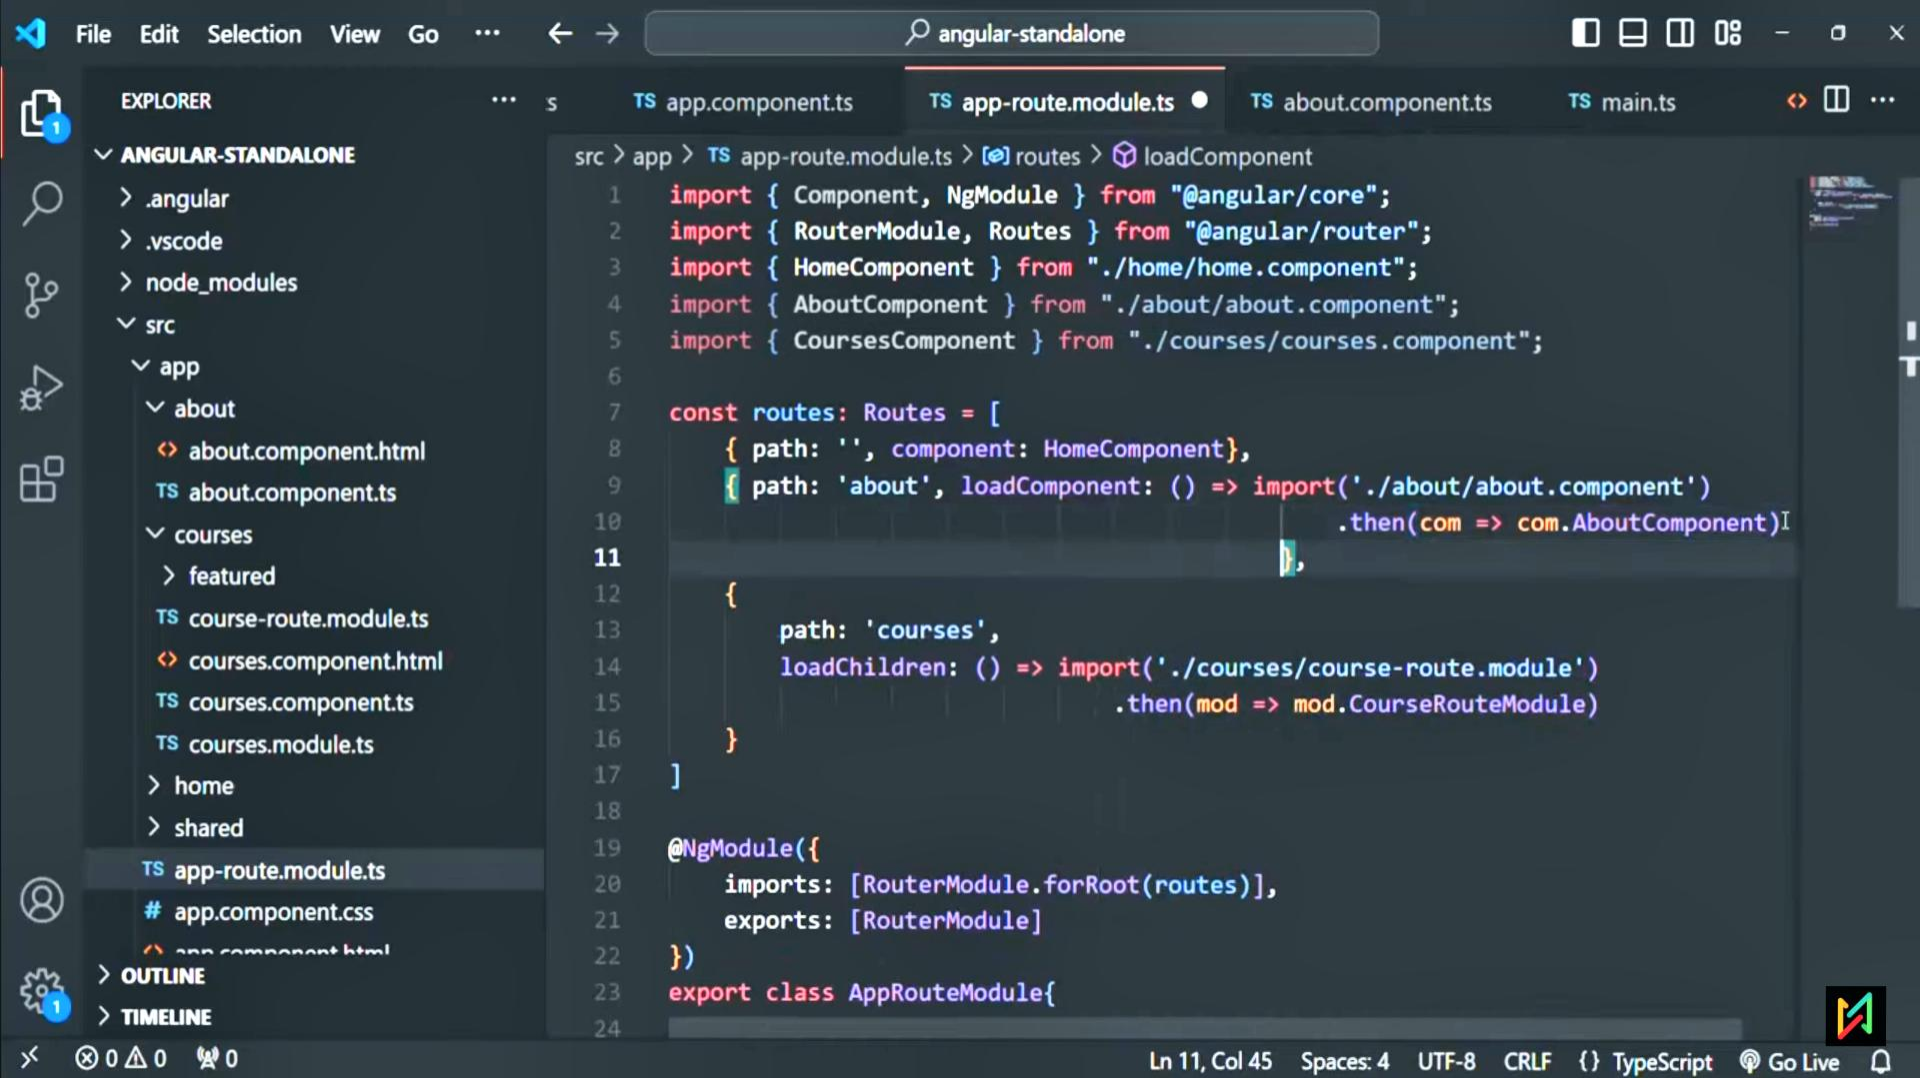

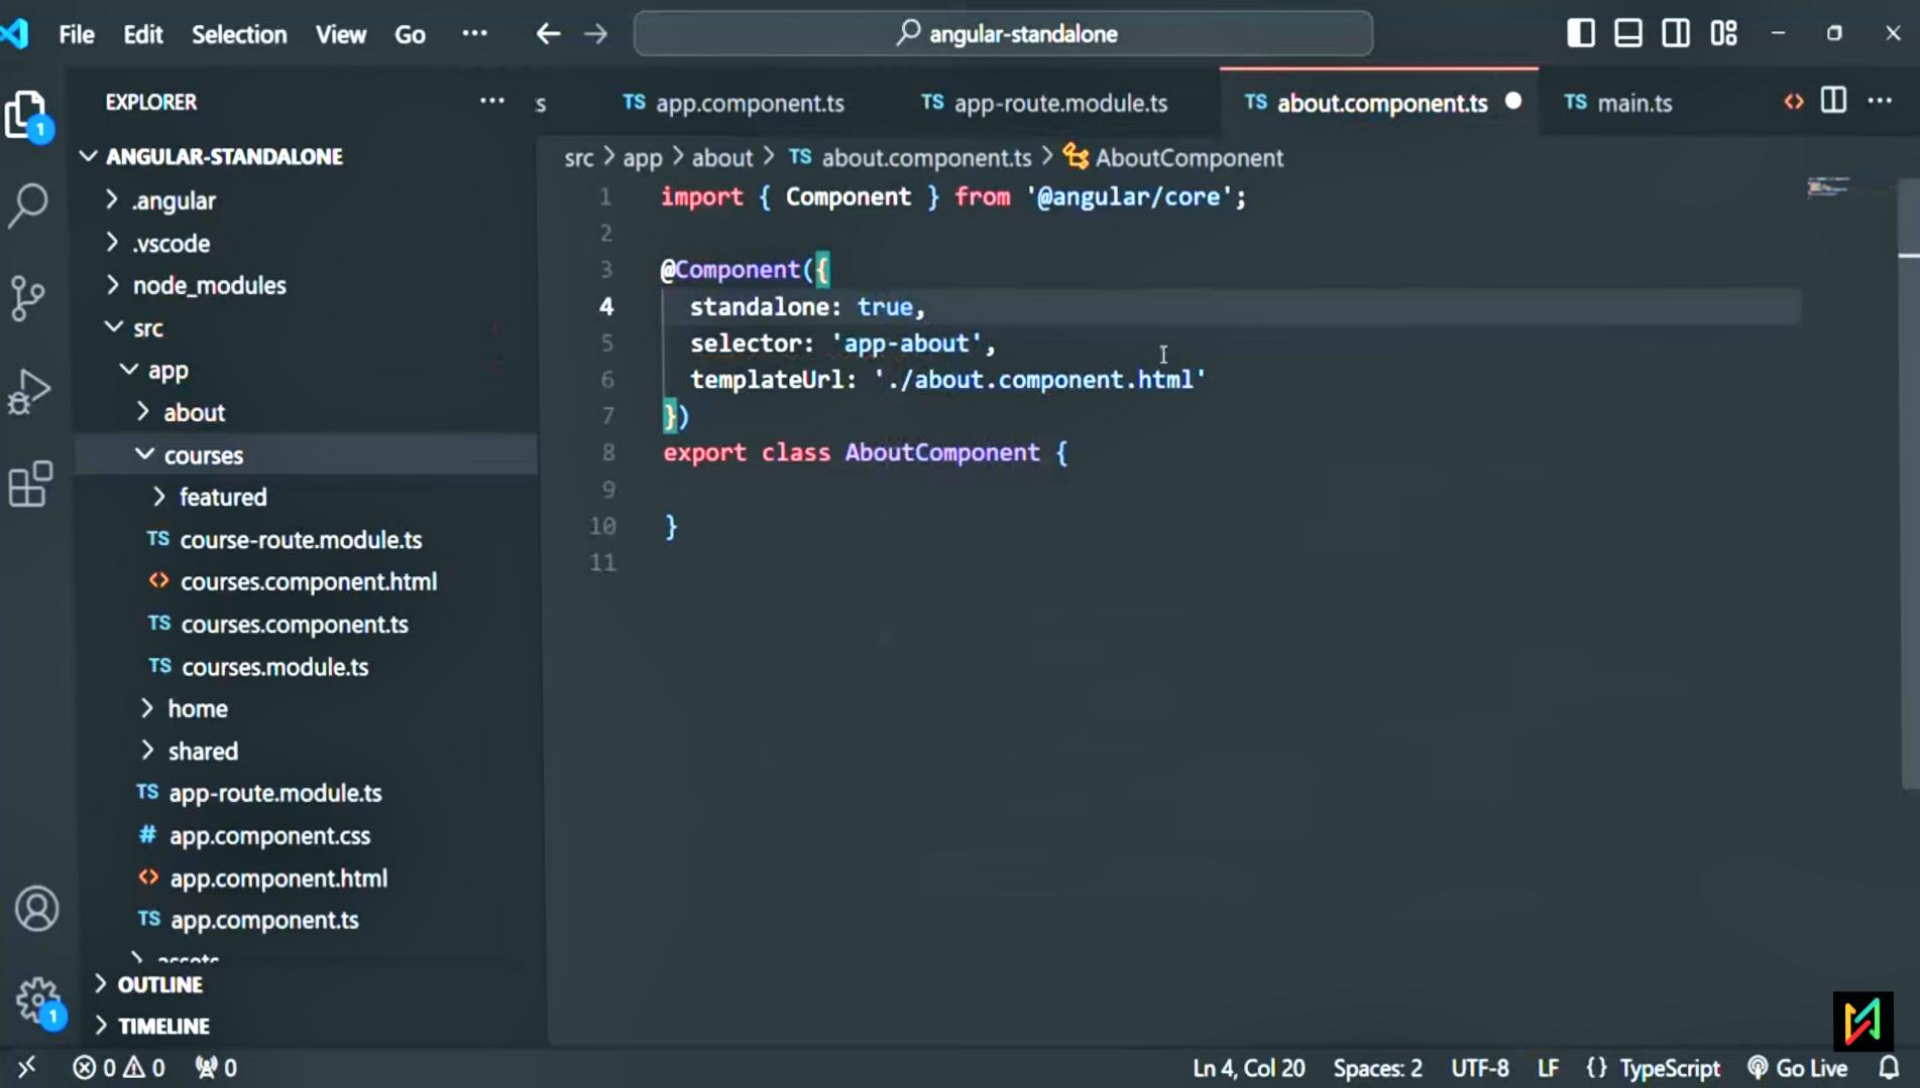

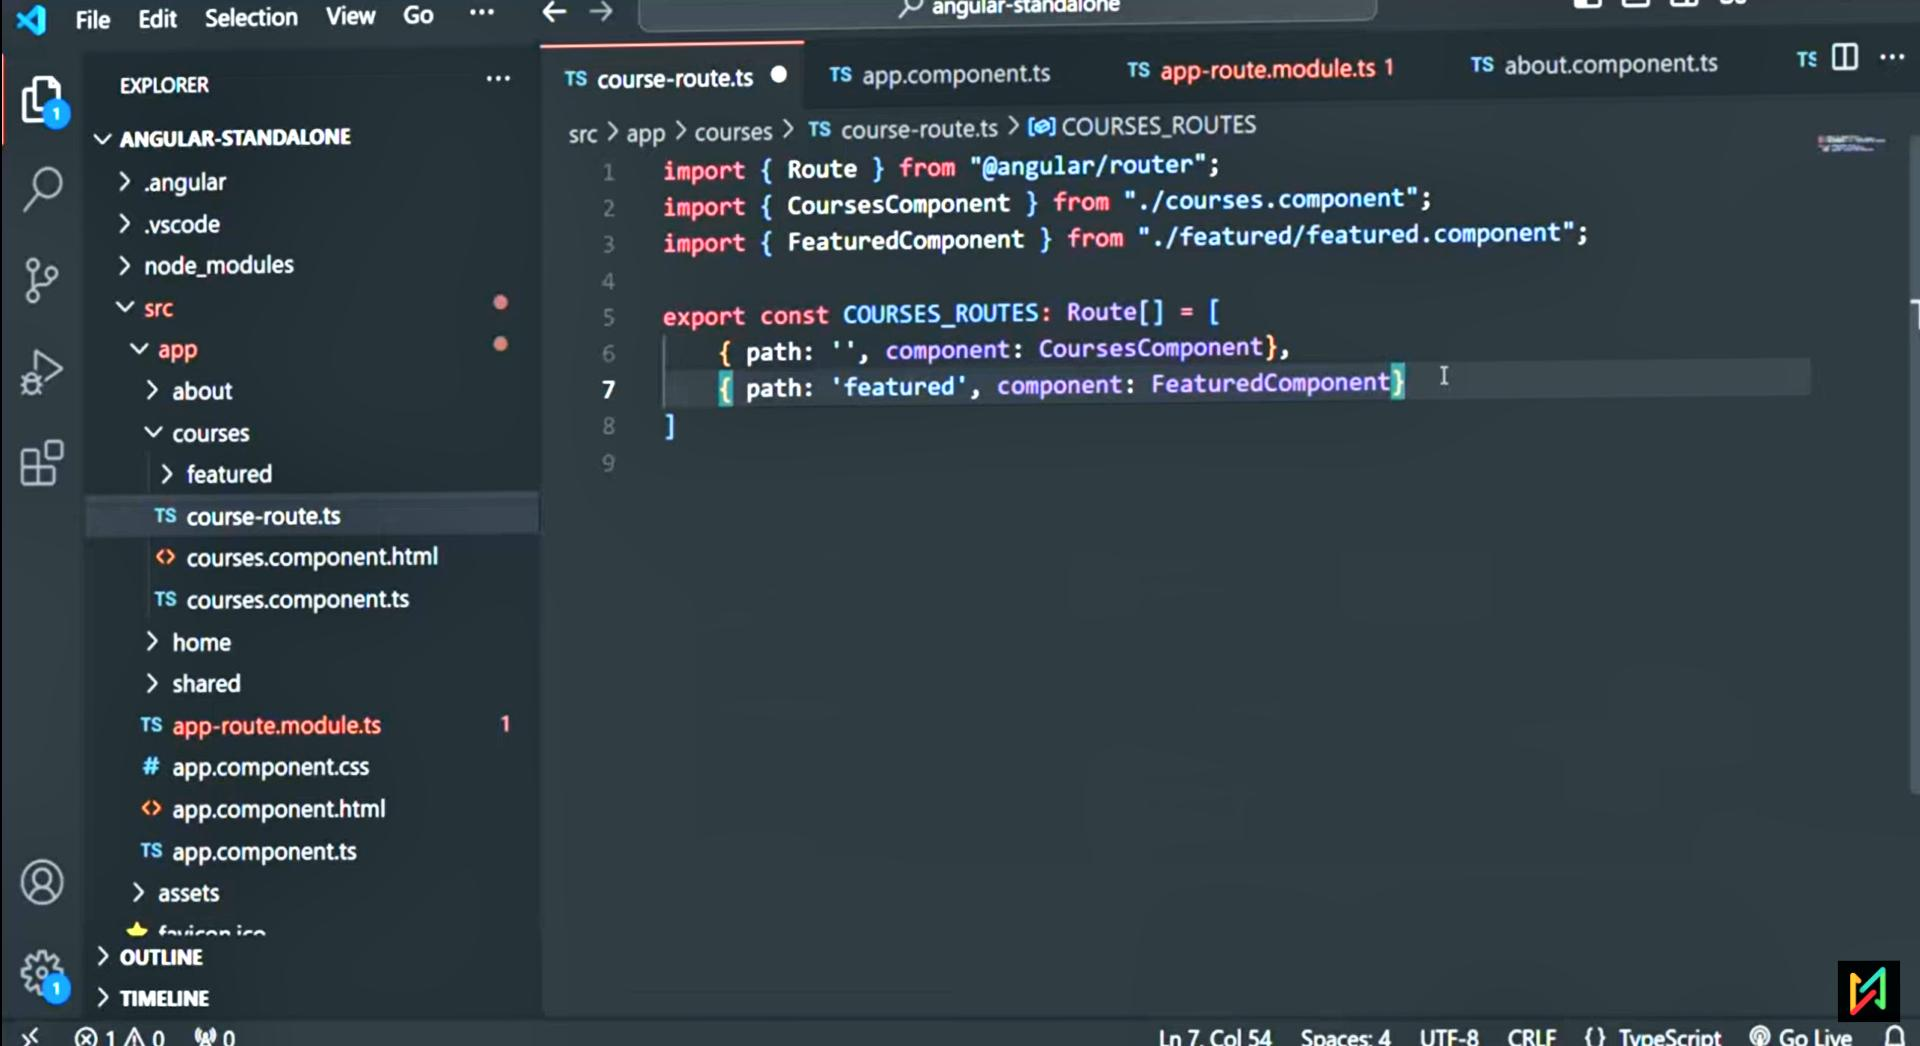

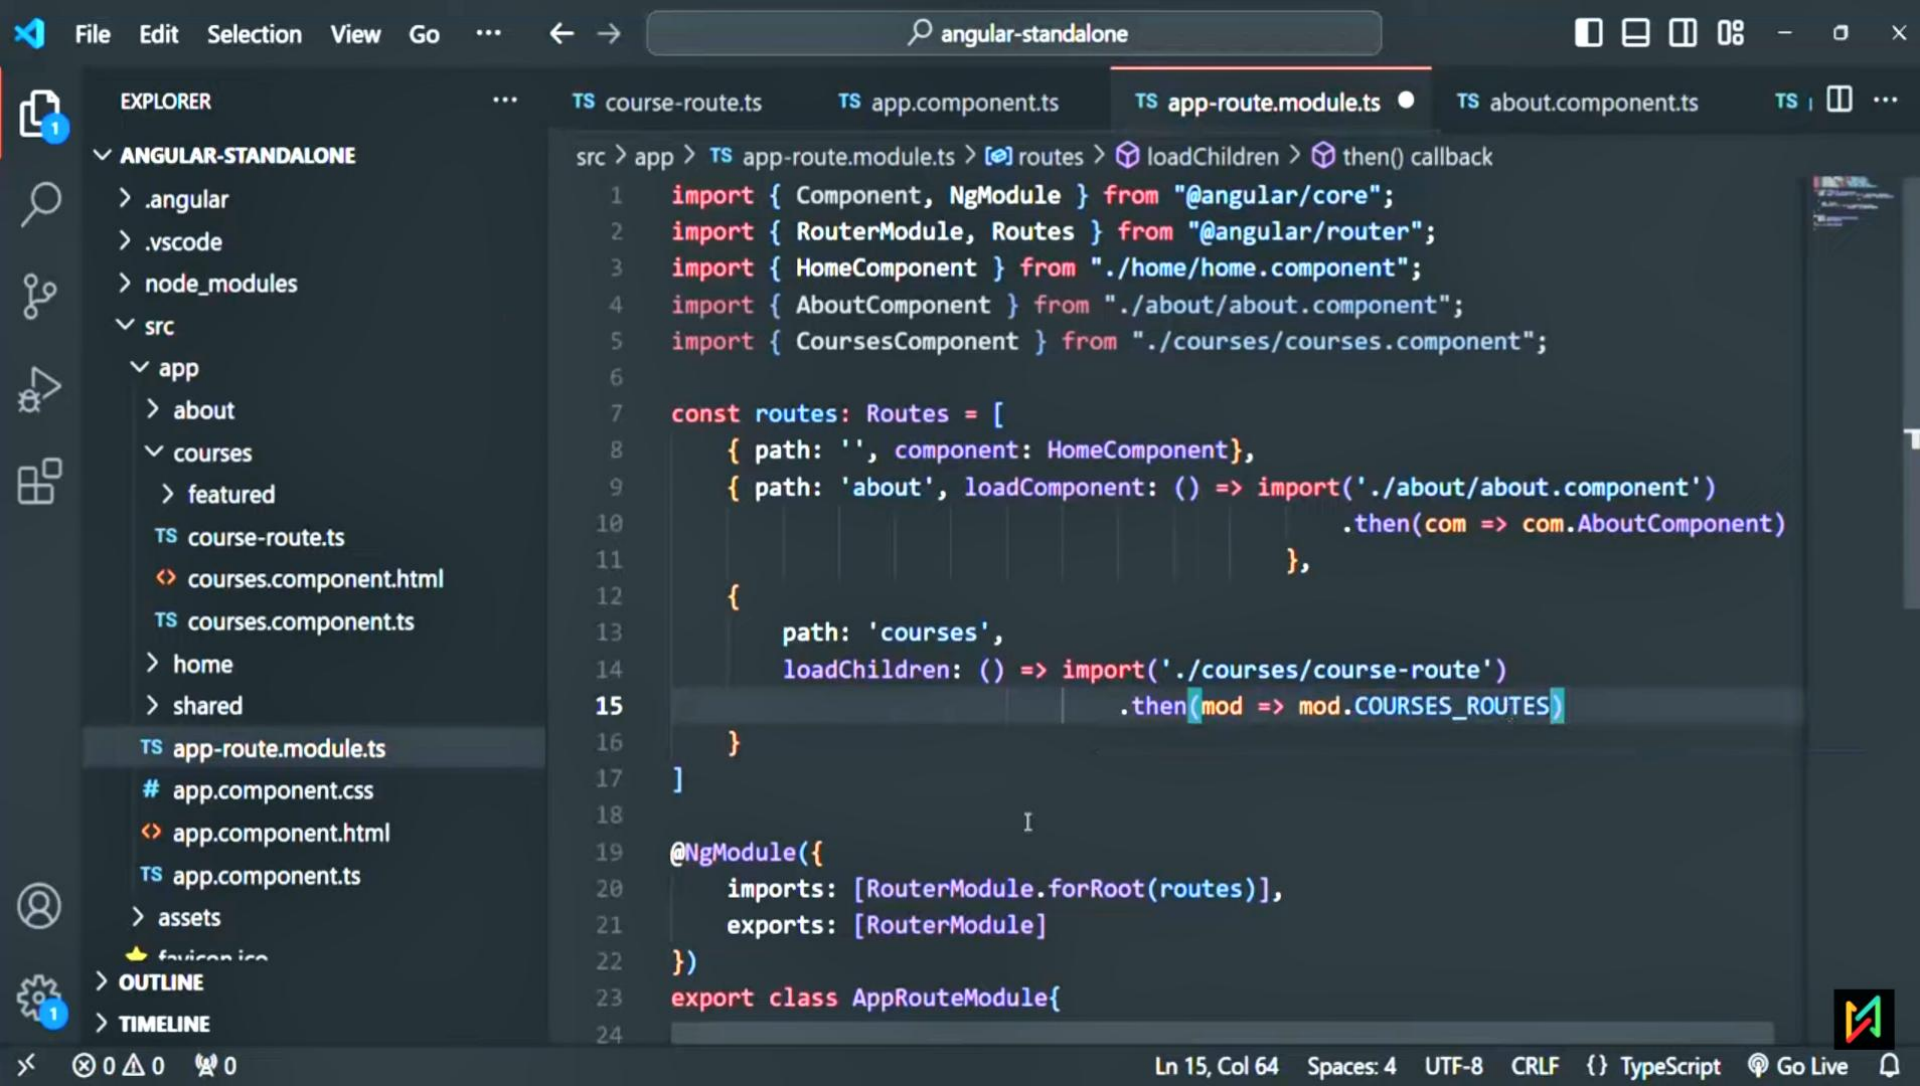

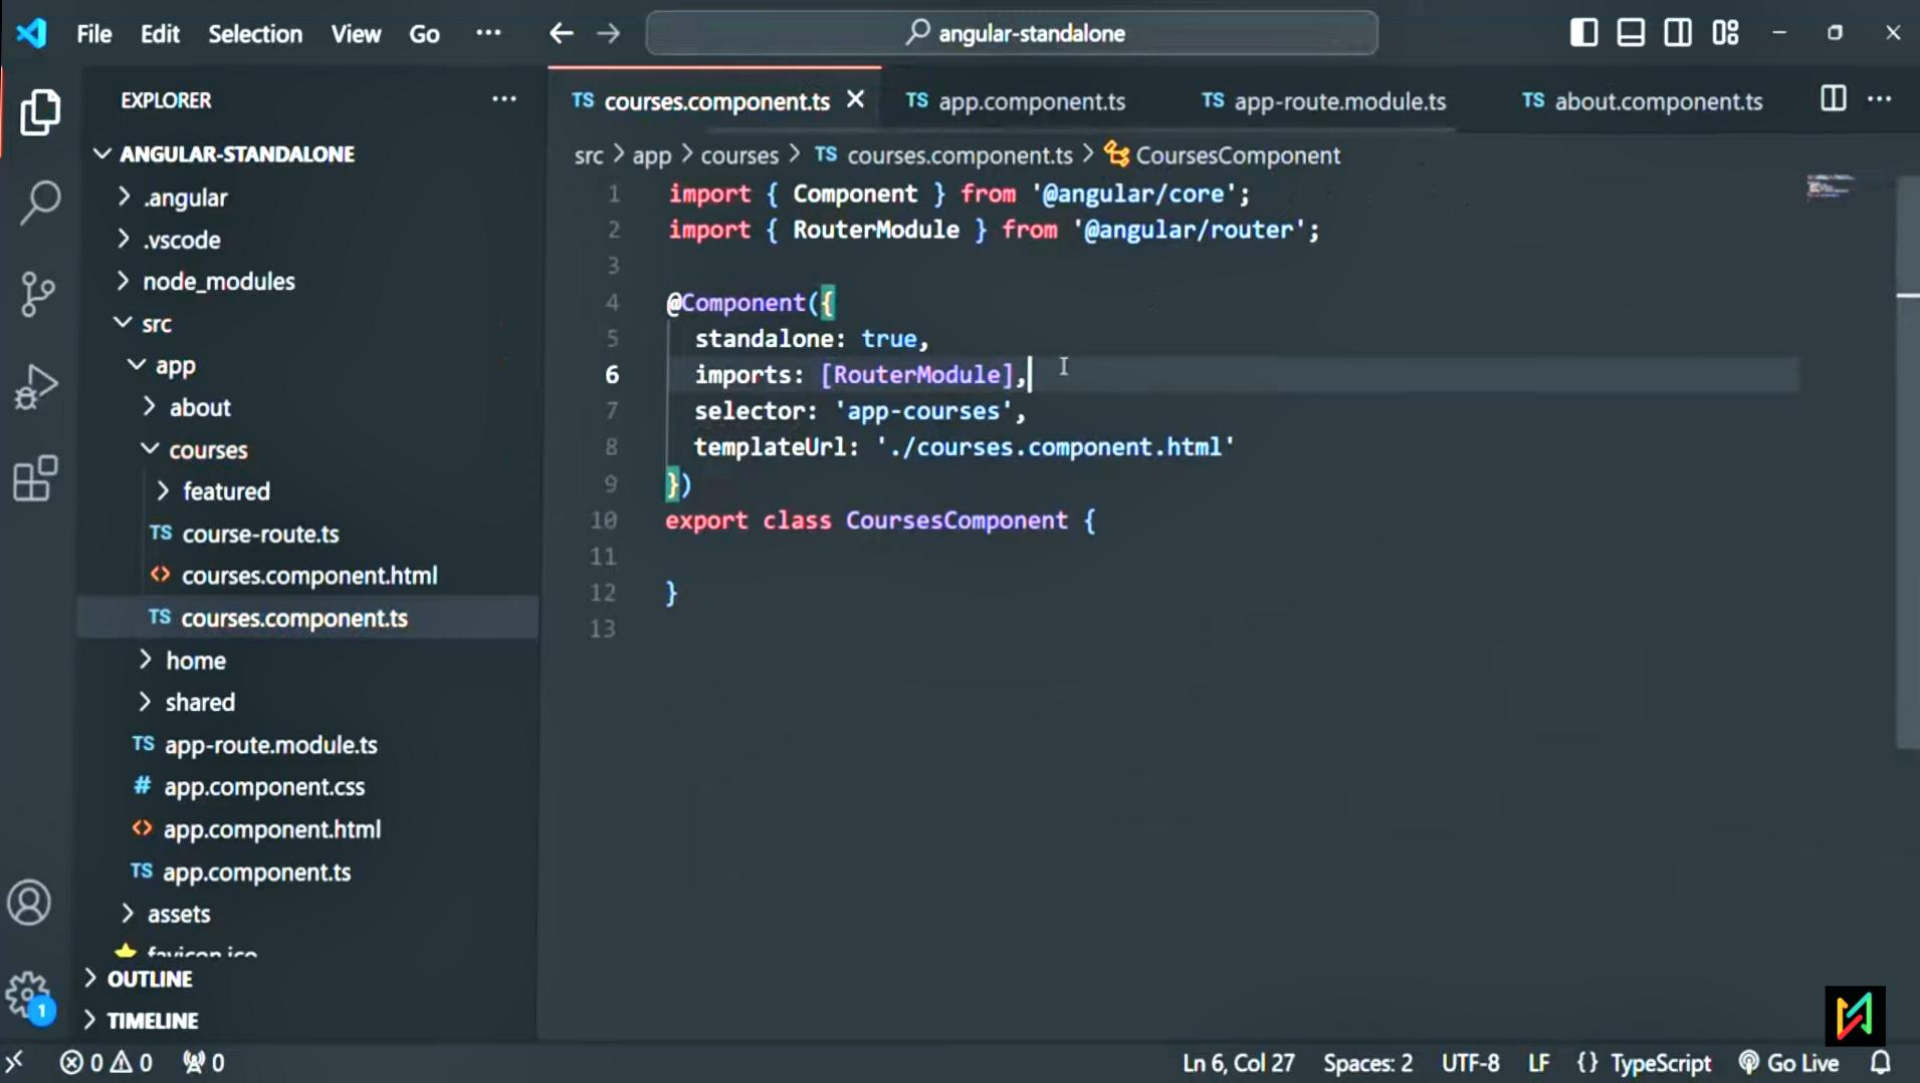

EXPLORER

ANGULAR-STANDALONE

- > .angular
- > .vscode
- > node_modules
- > src
 - > app
 - > about
 - > courses
 - TS course-route.ts
 - <> courses.component.html
 - TS courses.component.ts
 - > home
 - > shared
 - TS app-route.module.ts
 - # app.component.css
 - <> app.component.html
 - TS app.component.ts
 - > assets
 - favicon.ico
- > OUTLINE
- > TIMELINE

TS courses.component.ts X

TS app.component.ts

TS app-route.module.ts

TS about.component.ts

src > app > courses > TS courses.component.ts > CoursesComponent

```
1  import { Component } from '@angular/core';
2  import { RouterModule } from '@angular/router';
3
4  @Component({
5    standalone: true,
6    imports: [RouterModule],
7    selector: 'app-courses',
8    templateUrl: './courses.component.html'
9  })
10 export class CoursesComponent {
11
12 }
13
```

AngularStandalone

localhost:4200/courses

HomeAboutCourses

This is courses page

Here you can see [featured courses](#)

ElementsNetwork

Filter

Invert

Hide data URLs

Hide extension URLs

AllFetch/XHRDocCSSJSFontImgMedia

Blocked response cookies

Blocked requests

3rd-party requests

200 ms400 ms

| Name | St... | T... | Initi... | S... | T... | Waterfall |
|--------------|-------|------|----------|------|------|-----------|
| runtime.js | 200 | s... | cour... | 1... | 1... | |
| polyfills.js | 304 | s... | cour... | 2... | 1... | |
| vendor.js | 304 | s... | cour... | 2... | 1... | |
| font-awes... | 200 | s... | style... | (... | 1... | |
| main.js | 304 | s... | cour... | 2... | 7... | |
| styles.js | 304 | s... | cour... | 2... | 7... | |
| src_app_c... | 304 | s... | app... | 2... | 3... | |
| pxiEyp8kv... | 200 | f... | css2 | (... | 0... | |
| pxiByp8kv... | 200 | f... | css2 | (... | 0... | |
| ng-cli-ws | 101 | w... | poly... | 0 B | P... | |
| favicon.ico | 304 | v... | Other | 2... | 4... | |

13 requests | 15.1 kB transferred | 3.1 MB resources

Register Routes for Standalone Components



