

What is View Encapsulation?



Encapsulation means hiding data and behavior from outside world.



View Encapsulation

The **view encapsulation** is a concept or behavior in Angular, where component CSS styles are encapsulated into the components view and do not effect the rest of the application.



View Encapsulation Types

There are three types of View encapsulation in Angular

- `ViewEncapsulation.None`
- `ViewEncapsulation.Emulated`
- `ViewEncapsulation.ShadowDOM`



EXPLORER

OPEN EDITORS

- ✕ app.component.html src/app

VIEWENCAPSULATION


- > angular
- > .vscode
- > node_modules
- > src
 - > app
 - > comp1
 - > comp2
 - # app.component.css
 - app.component.html
 - TS app.component.spec.ts
 - TS app.component.ts
 - TS app.module.ts
 - > assets
 - > environments
 - ★ favicon.ico
 - index.html
 - TS main.ts
 - TS polyfills.ts
 - # styles.css
 - TS test.ts
 - 📄 .browserslistrc
 - 📄 .editorconfig
 - 📄 .gitignore
 - () angular.json
 - 📄 karma.conf.js

app.component.html X

src > app > app.component.html > div > div.component-container > app-comp2

```
1 <div style="margin: 20px auto; width: 780px;">
2   <div class="app-component">
3     <h2>App Component</h2>
4     <p>This is <b>app</b> component.</p>
5     <button>Button</button>
6   </div>
7
8   <div class="component-container">
9     <app-comp1></app-comp1>
10    <app-comp2></app-comp2>
11  </div>
12 </div>
13
14
```



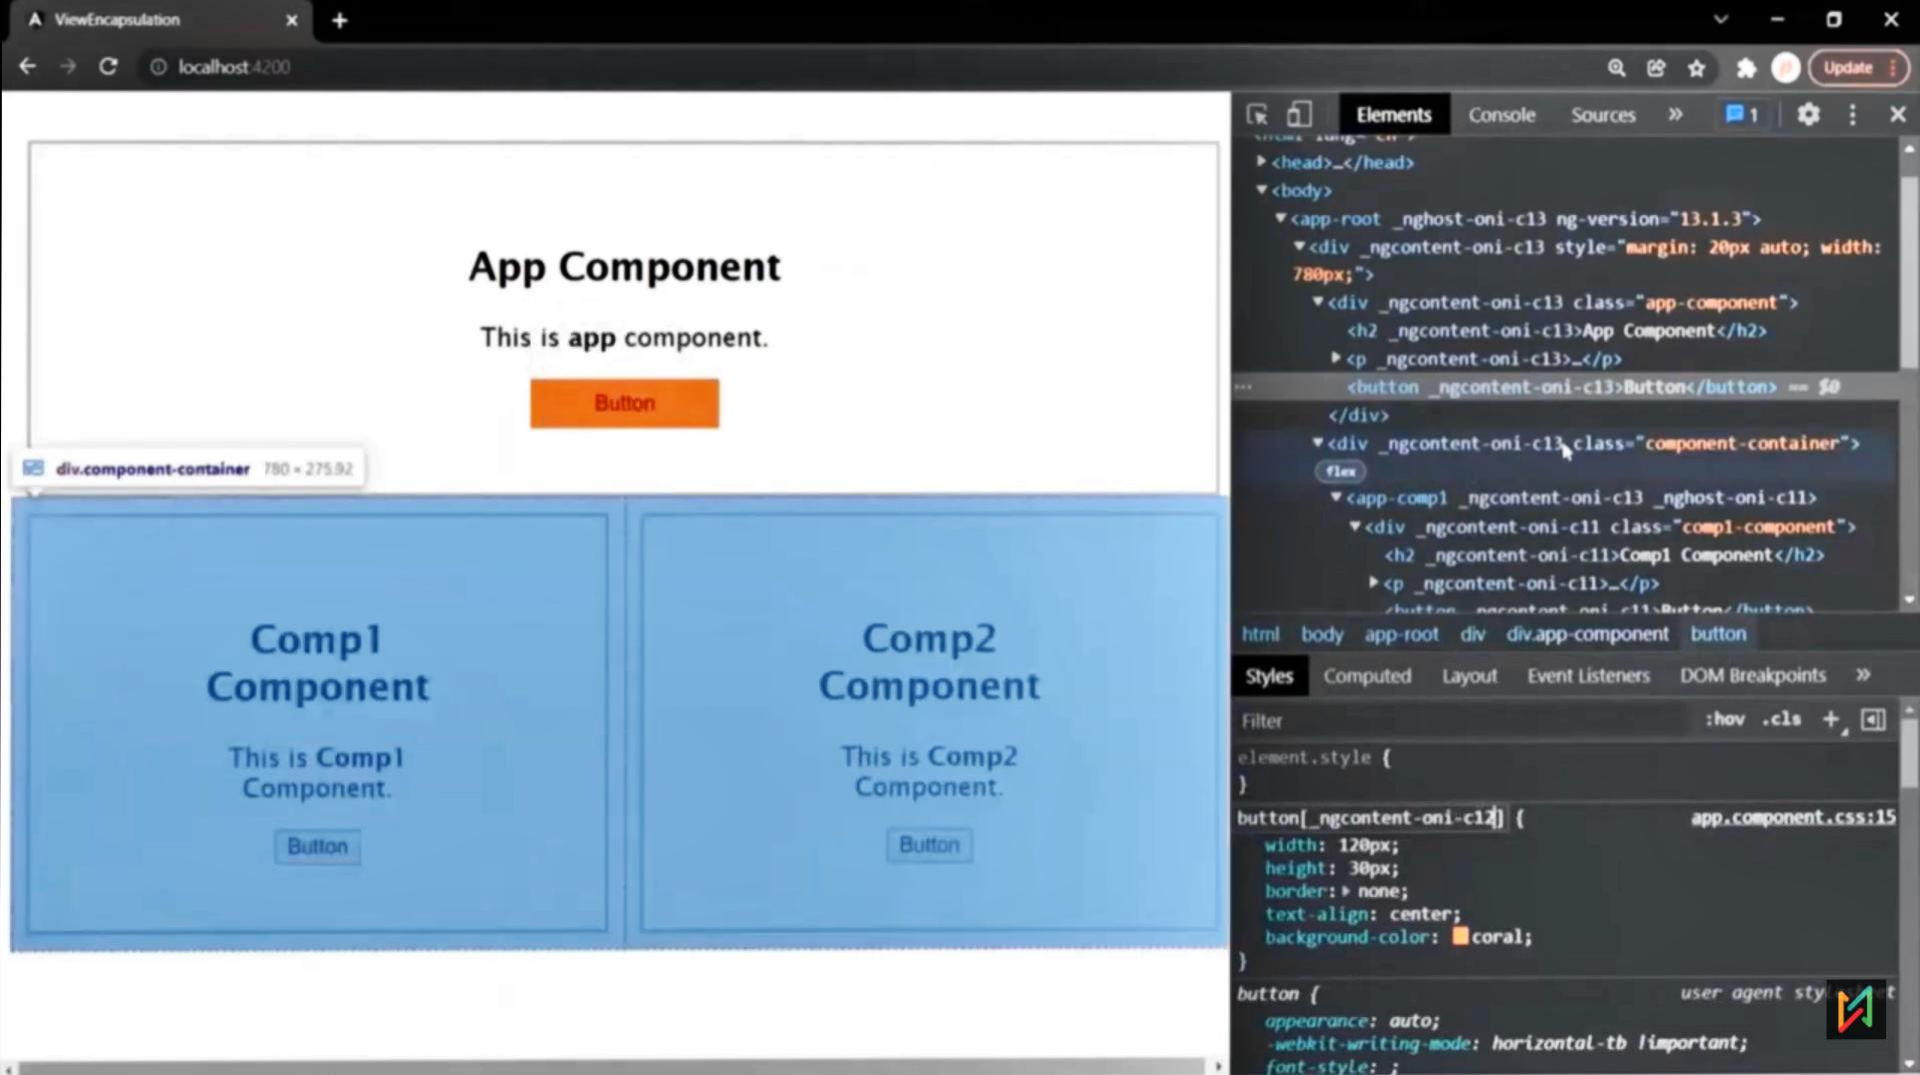

App Component

This is app component.

Button

Comp1 Component

This is Comp1 Component.

Button

Comp2 Component

This is Comp2 Component.

Button

Elements

```
<head>_</head>
<body>
  <app-root _ngghost-oni-c13 ng-version="13.1.3">
    <div _ngcontent-oni-c13 style="margin: 20px auto; width: 780px;">
      <div _ngcontent-oni-c13 class="app-component">
        <h2 _ngcontent-oni-c13>App Component</h2>
        <p _ngcontent-oni-c13></p>
        <button _ngcontent-oni-c13>Button</button>
      </div>
      <div _ngcontent-oni-c13 class="component-container">
        <flex>
          <app-comp1 _ngcontent-oni-c13 _ngghost-oni-c11>
            <div _ngcontent-oni-c11 class="comp1-component">
              <h2 _ngcontent-oni-c11>Comp1 Component</h2>
              <p _ngcontent-oni-c11></p>
              <button _ngcontent-oni-c11>Button</button>
            </div>
          <app-comp2 _ngcontent-oni-c13 _ngghost-oni-c11>
            <div _ngcontent-oni-c11 class="comp2-component">
              <h2 _ngcontent-oni-c11>Comp2 Component</h2>
              <p _ngcontent-oni-c11></p>
              <button _ngcontent-oni-c11>Button</button>
            </div>
          </app-comp2>
        </flex>
      </div>
    </div>
  </app-root>
</body>
```

html body app-root div div.app-component button

Styles

Computed

Layout

Event Listeners

DOM Breakpoints


Filter

:hov .cls + [4]

```
element.style {
}
```


```
button[_ngcontent-oni-c12] {
  width: 120px;
  height: 30px;
  border: none;
  text-align: center;
  background-color: coral;
}
```

```
button {
  appearance: auto;
  -webkit-writing-mode: horizontal-tb !important;
  font-style: ;
}
```

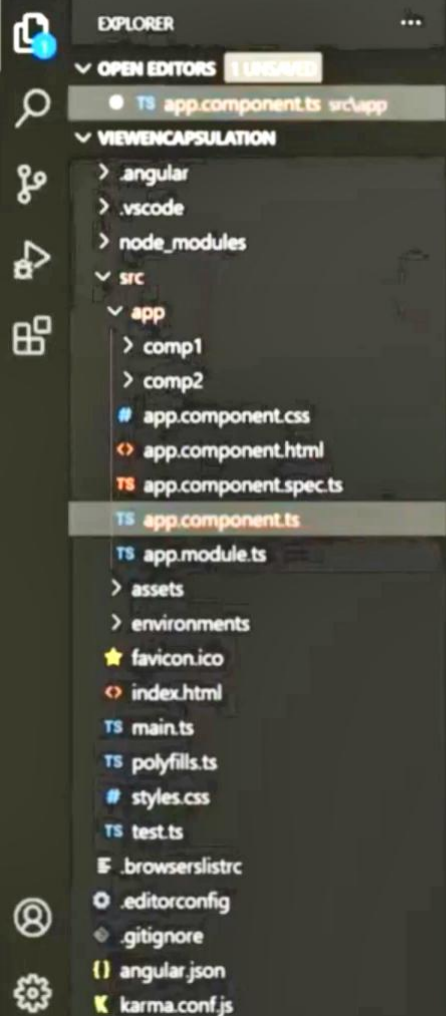

```
src > app > TS app.component.ts > AppComponent
1  import { Component, ViewEncapsulation } from '@angular/core';
2
3  @Component({
4    selector: 'app-root',
5    templateUrl: './app.component.html',
6    styleUrls: ['./app.component.css'],
7    encapsulation: ViewEncapsulation.None
8  })
9  export class AppComponent {
10    title = 'ViewEncapsulation';
11  }
12
```



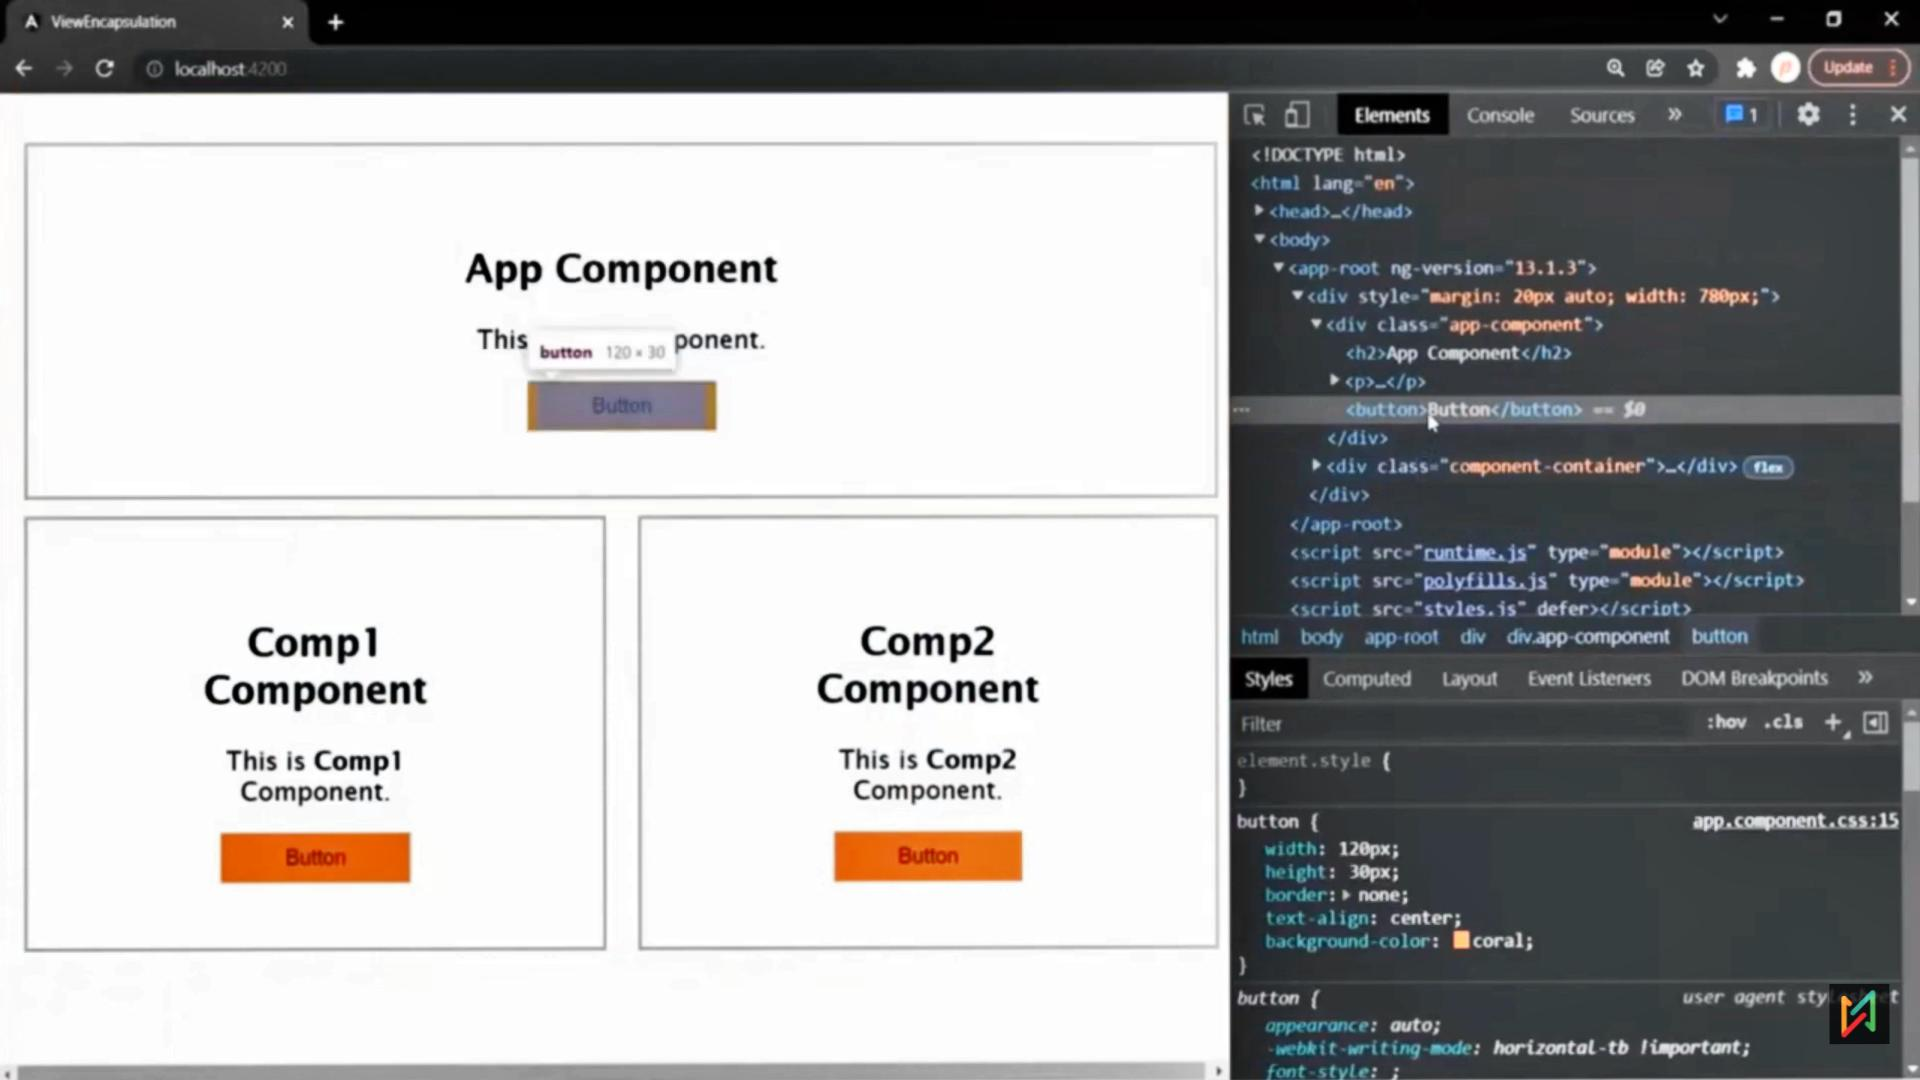

App Component

This button 120 x 30 component.

Button

Comp1 Component

This is Comp1 Component.

Button

Comp2 Component

This is Comp2 Component.

Button

Elements Console Sources

```
<!DOCTYPE html>
<html lang="en">
  <head>_</head>
  <body>
    <app-root ng-version="13.1.3">
      <div style="margin: 20px auto; width: 780px;">
        <div class="app-component">
          <h2>App Component</h2>
          <p>_</p>
          <button>Button</button> == $0
        </div>
        <div class="component-container">_</div> flex
      </div>
    </app-root>
    <script src="runtime.js" type="module"></script>
    <script src="polyfills.js" type="module"></script>
    <script src="styles.js" defer></script>
  </body>
</html>
```

html body app-root div div.app-component button

Styles Computed Layout Event Listeners DOM Breakpoints

Filter :hov .cls +

```
element.style {
}

button {
  width: 120px;
  height: 30px;
  border: none;
  text-align: center;
  background-color: coral;
}

button {
  appearance: auto;
  -webkit-writing-mode: horizontal-tb !important;
  font-style: ;
```


App Component

This is **app** component.

Button

**Comp1
Component**

**This is Comp1
Component.**

Button

**Comp2
Component**

This is **Comp2**
Component.

Button

▼ <div _ngcontent-oni-c13 class="component-container">

flex

```
▼ <app-comp1_ngcontent-oni-c13_nghost-oni-c11>
```

▼ <div ngcontent-oni-c11 class="comp1-component">

_ngcontent-oni-c11>Comp1 Component</h2>

► `<p _ngcontent-oni-c11>...</p>`

```
<button ngcontent-oni-c11>Button</button>
```

</app-comp1>

```
▼ <app-comp2_ngcontent-oni-c13_nghost-oni-c12>
```

▼<div _ngcontent-oni-c12 class="comp2-component">

_ngcontent-oni-c12>Comp2 Component</h2>

► `<p _ngcontent-oni-c12>_</p>`

```
<button _ngcontent-oni-c12>Button</button>
```

</app-comp2>

```
html body app-root div div.app-component button
```

Styles Computed Layout Event Listeners DOM Breakpoints »

Filter

```
:hov .cls +
```

```
element.style {
```

5

```
button[ngcontent-oni-c11]]{                                app.component.css:15
```

☒ width: 120px;

```
height: 30px;
```

border: none;

- ☒ `text-align: center;`

background-color: coral;

2

```
button { user agent style sheet
```

```
appearance: auto;
```

```
-webkit-writing-mode: horizontal-tb !important;
```

```
font-style: ;
```

The **@HostListener** decorator listens to a DOM event on the host element and it reacts to that event by executing an event handler method.



EXPLORER

> OPEN EDITORS

ANGULAR-EKART

- .angular
- .vscode
- dist
- node_modules
- src
 - app
 - container
 - CustomDirectives
 - highlight.directive.ts
 - SetBackground.directive.ts
 - header
 - Models
 - top-header
 - # app.component.css
 - app.component.html
 - app.component.spec.ts
 - app.component.ts
 - app.module.ts
 - assets
 - favicon.ico
 - index.html
 - main.ts
 - # styles.css
 - .editorconfig
 - .gitignore
- TIMELINE

TS highlight.directive.ts X

src > app > CustomDirectives > TS highlight.directive.ts > ...

```

1  import { Directive } from '@angular/core';
2
3  @Directive({
4    selector: '[appHighlight]'
5  })
6  export class HighlightDirective {
7
8    constructor() { }
9
10 }
11

```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

cmd + v

```

C:\Users\manoj\OneDrive\Documents\angular-complete-course\angular-ekart\src\app\CustomDirectives>ng g d highlight
CREATE src/app/CustomDirectives/highlight.directive.spec.ts (236 bytes)
CREATE src/app/CustomDirectives/highlight.directive.ts (147 bytes)
UPDATE src/app/app.module.ts (1707 bytes)

C:\Users\manoj\OneDrive\Documents\angular-complete-course\angular-ekart\src\app\CustomDirectives>

```



File

Edit

Selection

View

Go

Run

Terminal

Help

app.module.ts - angular-ekart - Visual Studio Code

EXPLORER

OPEN EDITORS

ANGULAR-EKART

.angular

.vscode

dist

node_modules

src

app

container

CustomDirectives

TS highlight.directive.ts

TS SetBackground.directive.ts

header

Models

top-header

app.component.css

<> app.component.html

TS app.component.spec.ts

TS app.components.ts

TS app.module.ts

assets

★ favicon.ico

<> index.html

TS main.ts

styles.css

⚙ .editorconfig

⚙ .gitignore

TIMELINE

TS app.module.ts

src > app > TS app.module.ts > AppModule

```
14 import { FilterComponent } from './container/product-list/filter/filter.component';
15 import { ProductDetailComponent } from './container/product-detail/product-detail.component';
16 import { FeaturedBrandsComponent } from './container/featured-brands/featured-brands.component';
17 import { SetBackground } from './CustomDirectives/SetBackground.directive';
18 import { HighlightDirective } from './CustomDirectives/highlight.directive';
19
20 @NgModule({
21   declarations: [
22     AppComponent,
23     HeaderComponent,
24     TopHeaderComponent,
25     TopMenuComponent,
26     MainMenuComponent,
27     ContainerComponent,
28     SearchComponent,
29     ProductListComponent,
30     ProductComponent,
31     FilterComponent,
32     ProductDetailComponent,
33     FeaturedBrandsComponent,
34     SetBackground,
35     HighlightDirective
36   ],
37 })
```

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

C:\Users\manoj\OneDrive\Documents\angular-complete-course\angular-ekart\src\app\CustomDirectives>ng g d highlight
CREATE src/app/CustomDirectives/highlight.directive.spec.ts (236 bytes)
CREATE src/app/CustomDirectives/highlight.directive.ts (147 bytes)
UPDATE src/app/app.module.ts (1707 bytes)

C:\Users\manoj\OneDrive\Documents\angular-complete-course\angular-ekart\src\app\CustomDirectives>



EXPLORER

> OPEN EDITORS

▼ ANGULAR-EKART

- > .angular
- > .vscode
- > dist
- > node_modules
- ▼ src
 - ▼ app
 - ▼ container
 - > featured-brands
 - > product-detail
 - ▼ product-list
 - > filter
 - ▼ product
 - # product.component.css
 - product.component.html
 - TS product.component.ts
 - # product-list.component...
 - product-list.component...
 - TS product-list.component.ts
 - > search
 - # container.component.css
 - container.component.html
 - TS container.component.ts
 - ▼ CustomDirectives
 - TS highlight.directive.ts
 - TS SetBackground.directive.ts

> TIMELINE


product.component.html

src > app > container > product-list > product > product.component.html > div.ekart--product--item

Go to component

```
1 <div class="ekart--product--item" appHighlight>
2   <div class="ekart-wishlist-sale-container">
3     <div class="ekart--add--to--wishlist">
4       <i class="fa fa-heart-o" aria-hidden="true"></i>
5     </div>
6     <div class="ekart-on-sale-tag" *ngIf="product.discountPrice">{{ (100 - (product.discountPrice / product.price * 100)) }}% OFF</div>
7   </div>
8   <div class="ekart--product--image">
9     <img [src]="product.imageUrl" class="ekart--product--image">
10   </div>
11   <div class="ekart--add--to--price">
12     ${{ product.price }}
13   </div>
14   <div class="ekart--product--name">{{ product.name }}</div>
15   <div class="ekart--product--category">{{ product.gender }} . {{ product.category }} . {{ product.brand }}</div>
16   <div class="ekart--product--available-colors">{{ product.color.length }} Colors . Best Seller</div>
17   <div class="ekart--product--in--stock" [ngStyle]="{fontWeight: 'bold', color: product.is_in_inventory ? 'Green' : 'Red'}">
18     {{ product.is_in_inventory ? 'Available in Stock' : 'Not available in stock' }}
19   </div>
20 </div>
21
```



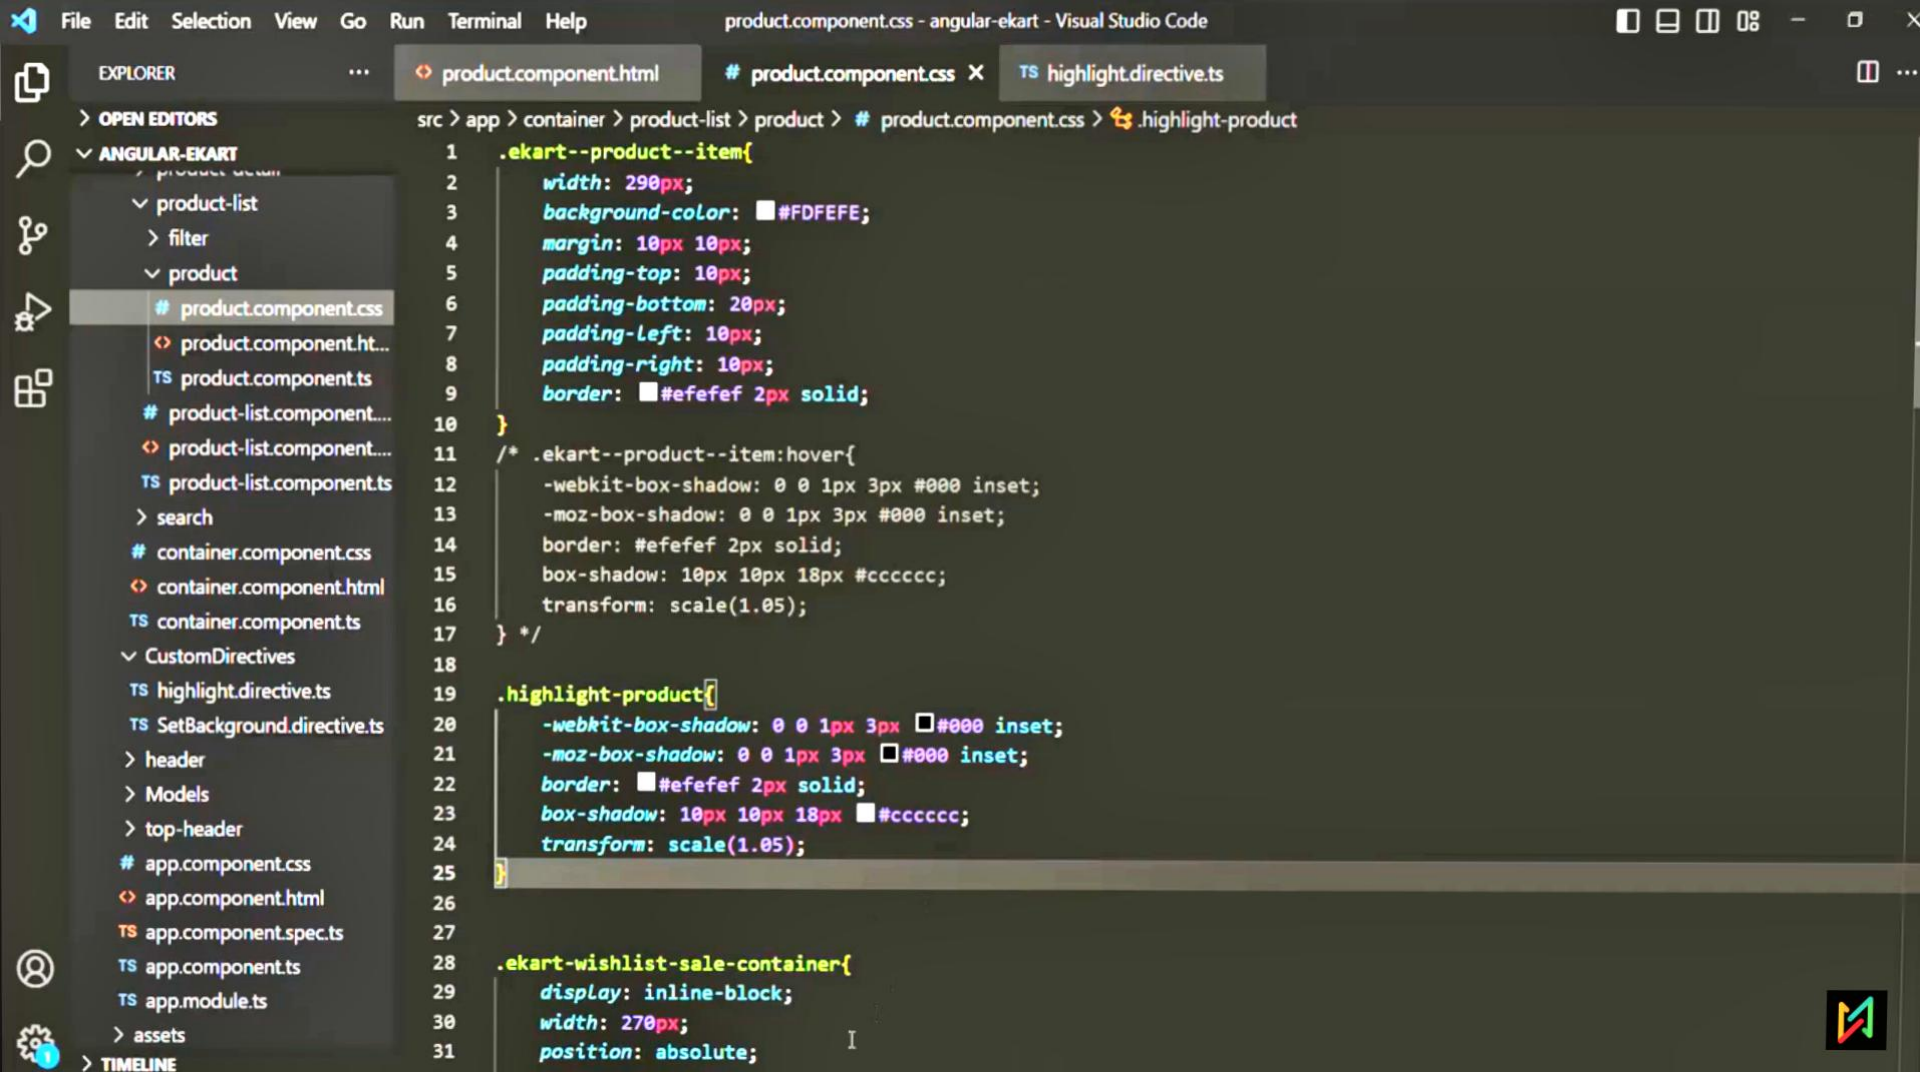

EXPLORER

> OPEN EDITORS

ANGULAR-EKART

- product-list
 - filter
 - product
 - product.component.css
 - product.component.html
 - product.component.ts
 - product-list.component.css
 - product-list.component.html
 - product-list.component.ts
- search
- container.component.css
- container.component.html
- container.component.ts
- CustomDirectives
 - highlight.directive.ts
 - SetBackground.directive.ts
- header
- Models
- top-header
- app.component.css
- app.component.html
- app.component.spec.ts
- app.component.ts
- app.module.ts
- assets

> TIMELINE

product.component.html # product.component.css TS highlight.directive.ts


src > app > CustomDirectives > TS highlight.directive.ts > HighlightDirective > OnMouseOut

```
1 import { Directive, ElementRef, HostListener, Renderer2 } from '@angular/core';
2
3 @Directive({
4   selector: '[appHighlight]'
5 })
6 export class HighlightDirective {
7
8   constructor(private element: ElementRef, private renderer: Renderer2) {
9
10  }
11
12   @HostListener('mouseenter') onMouseEnter(){
13     this.renderer.addClass(this.element.nativeElement, 'highlight-product');
14   }
15
16   @HostListener('mouseout') onMouseOut(){
17     this.renderer.removeClass(this.element.nativeElement, 'highlight-product');
18   }
19
20 }
21
```



The **@HostBinding** decorator binds a host elements property to a property of a directive or a component class.



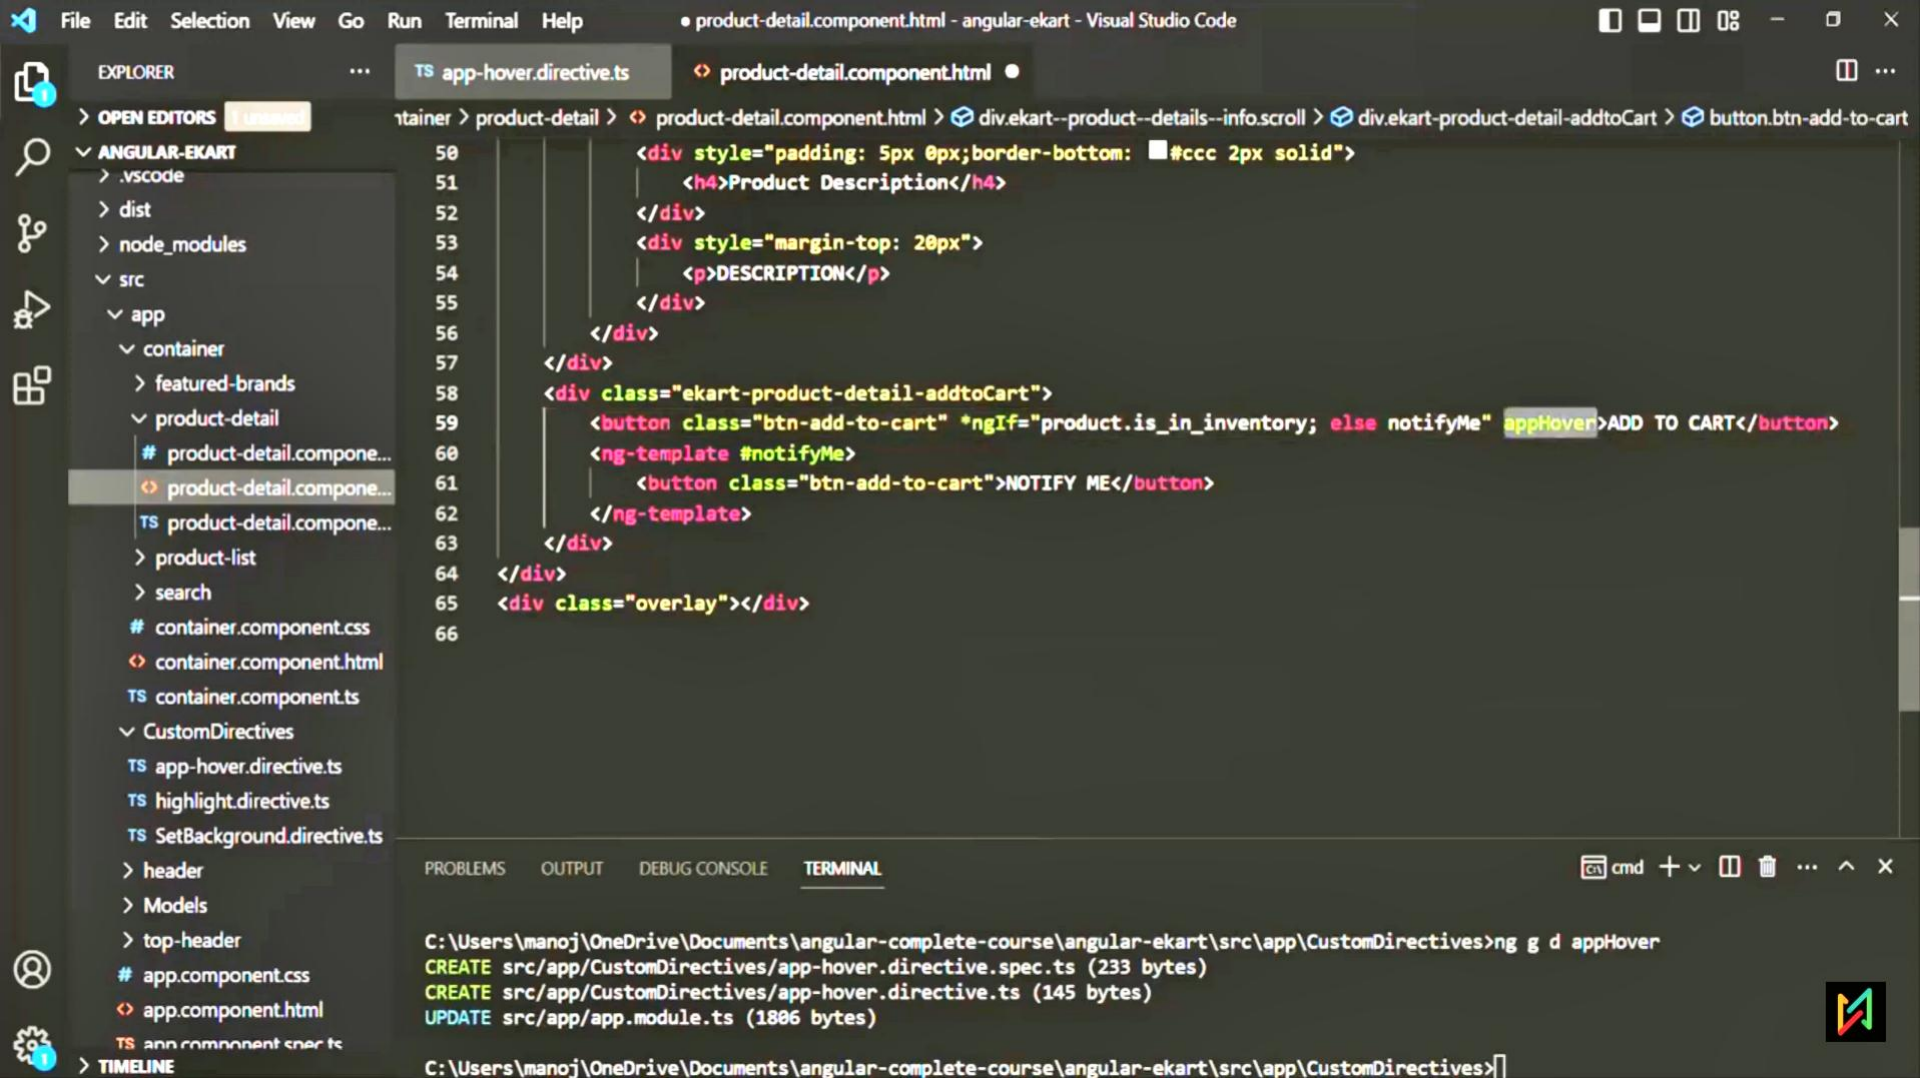


src > app > CustomDirectives > TS app-hover.directive.ts > AppHoverDirective > backgroundColor

```
1 import { Directive, ElementRef, Renderer2, HostBinding } from '@angular/core';
2
3 @Directive({
4   selector: '[appHover]'
5 })
6 export class AppHoverDirective {
7
8   constructor(private element: ElementRef, private renderer: Renderer2) {
9
10  }
11
12  @HostBinding('style.backgroundColor') backgroundColor: string = 'pink';
13
14 }
15
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

C:\Users\manoj\OneDrive\Documents\angular-complete-course\angular-ekart\src\app\CustomDirectives>ng g d appHover
CREATE src/app/CustomDirectives/app-hover.directive.spec.ts (233 bytes)
CREATE src/app/CustomDirectives/app-hover.directive.ts (145 bytes)
UPDATE src/app/app.module.ts (1806 bytes)

C:\Users\manoj\OneDrive\Documents\angular-complete-course\angular-ekart\src\app\CustomDirectives>

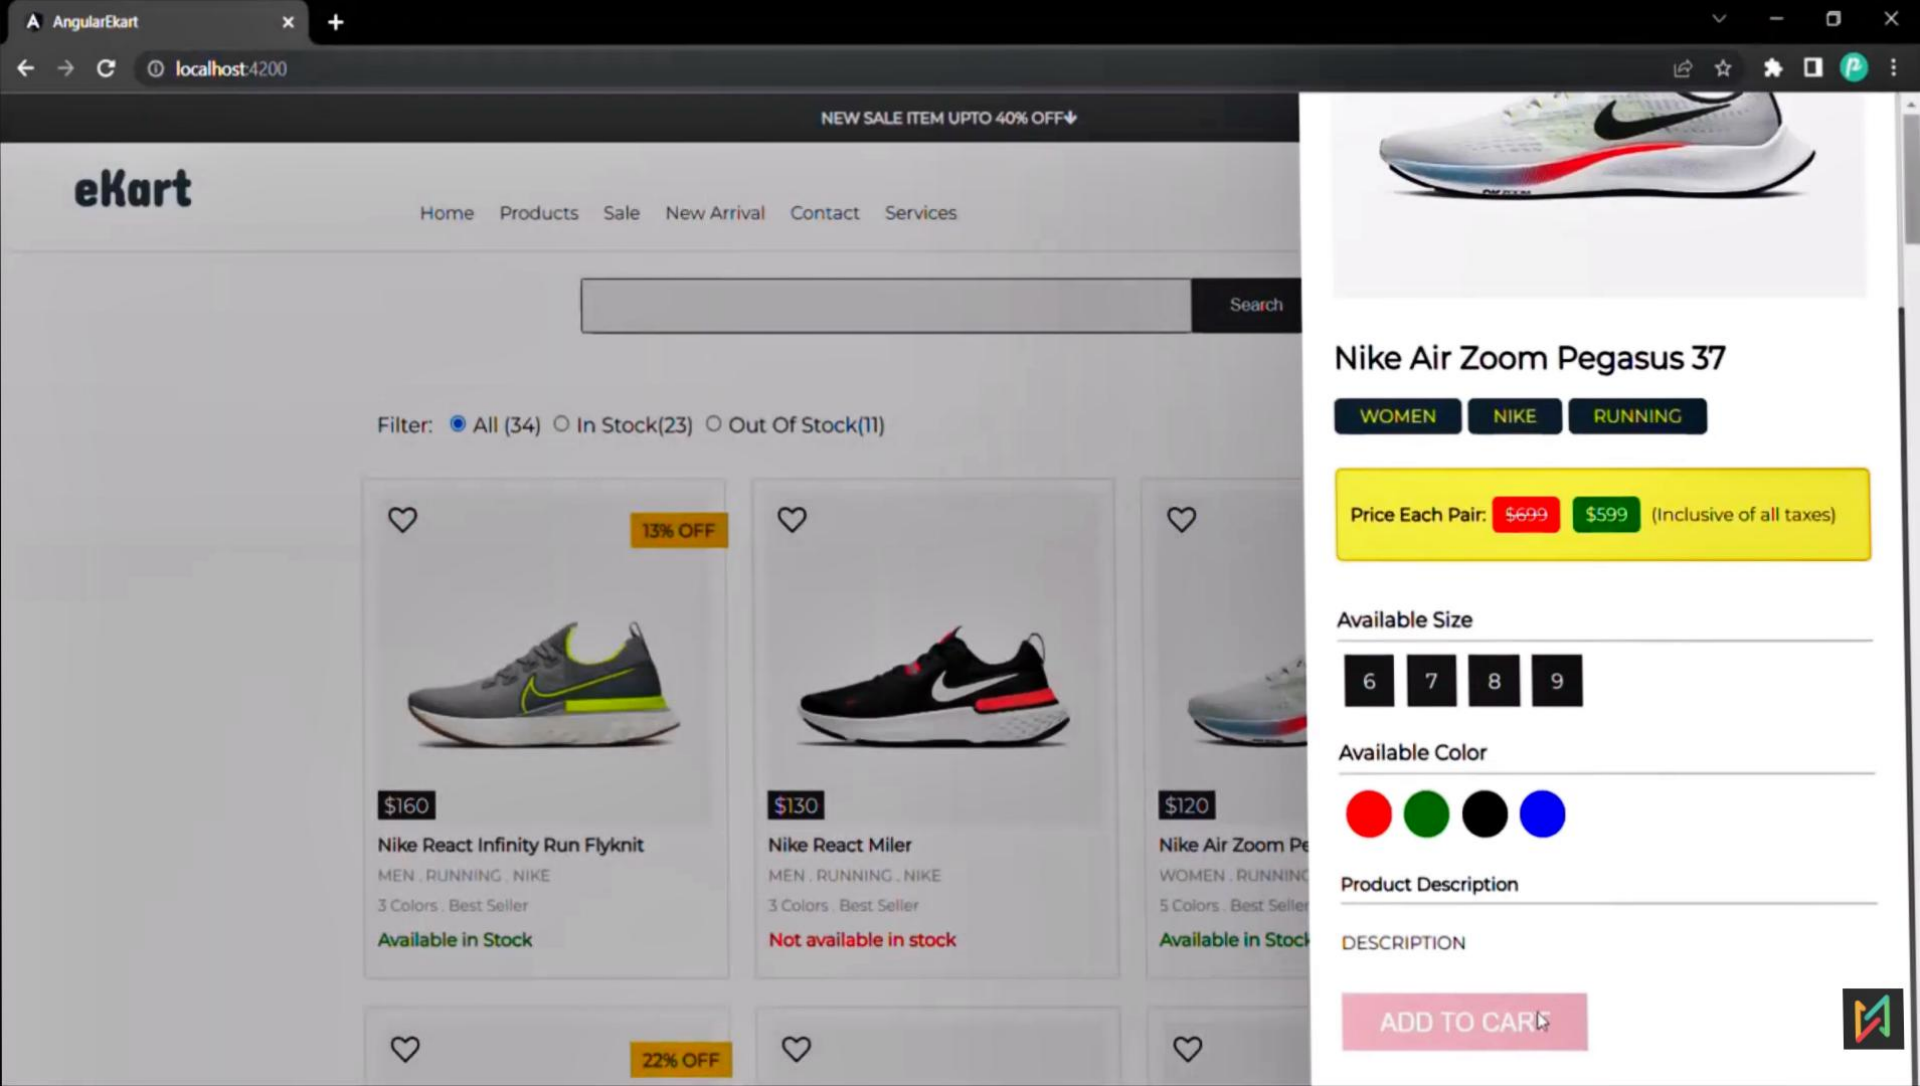

eKart

Home Products Sale New Arrival Contact Services

NEW SALE ITEM UPTO 40% OFF↓

Search

Filter: ☒ All (34) ☐ In Stock(23) ☐ Out Of Stock(11)



13% OFF



\$160

Nike React Infinity Run Flyknit

MEN . RUNNING . NIKE

3 Colors . Best Seller

Available in Stock



\$130

Nike React Miler

MEN . RUNNING . NIKE

3 Colors . Best Seller

Not available in stock



\$120

Nike Air Zoom Pegasus 37

WOMEN . RUNNING . NIKE

5 Colors . Best Seller

Available in Stock



Nike Air Zoom Pegasus 37

WOMEN

NIKE

RUNNING

Price Each Pair: ~~\$699~~ \$599 (Inclusive of all taxes)

Available Size

6

7

8

9

Available Color





Product Description

DESCRIPTION

ADD TO CARD



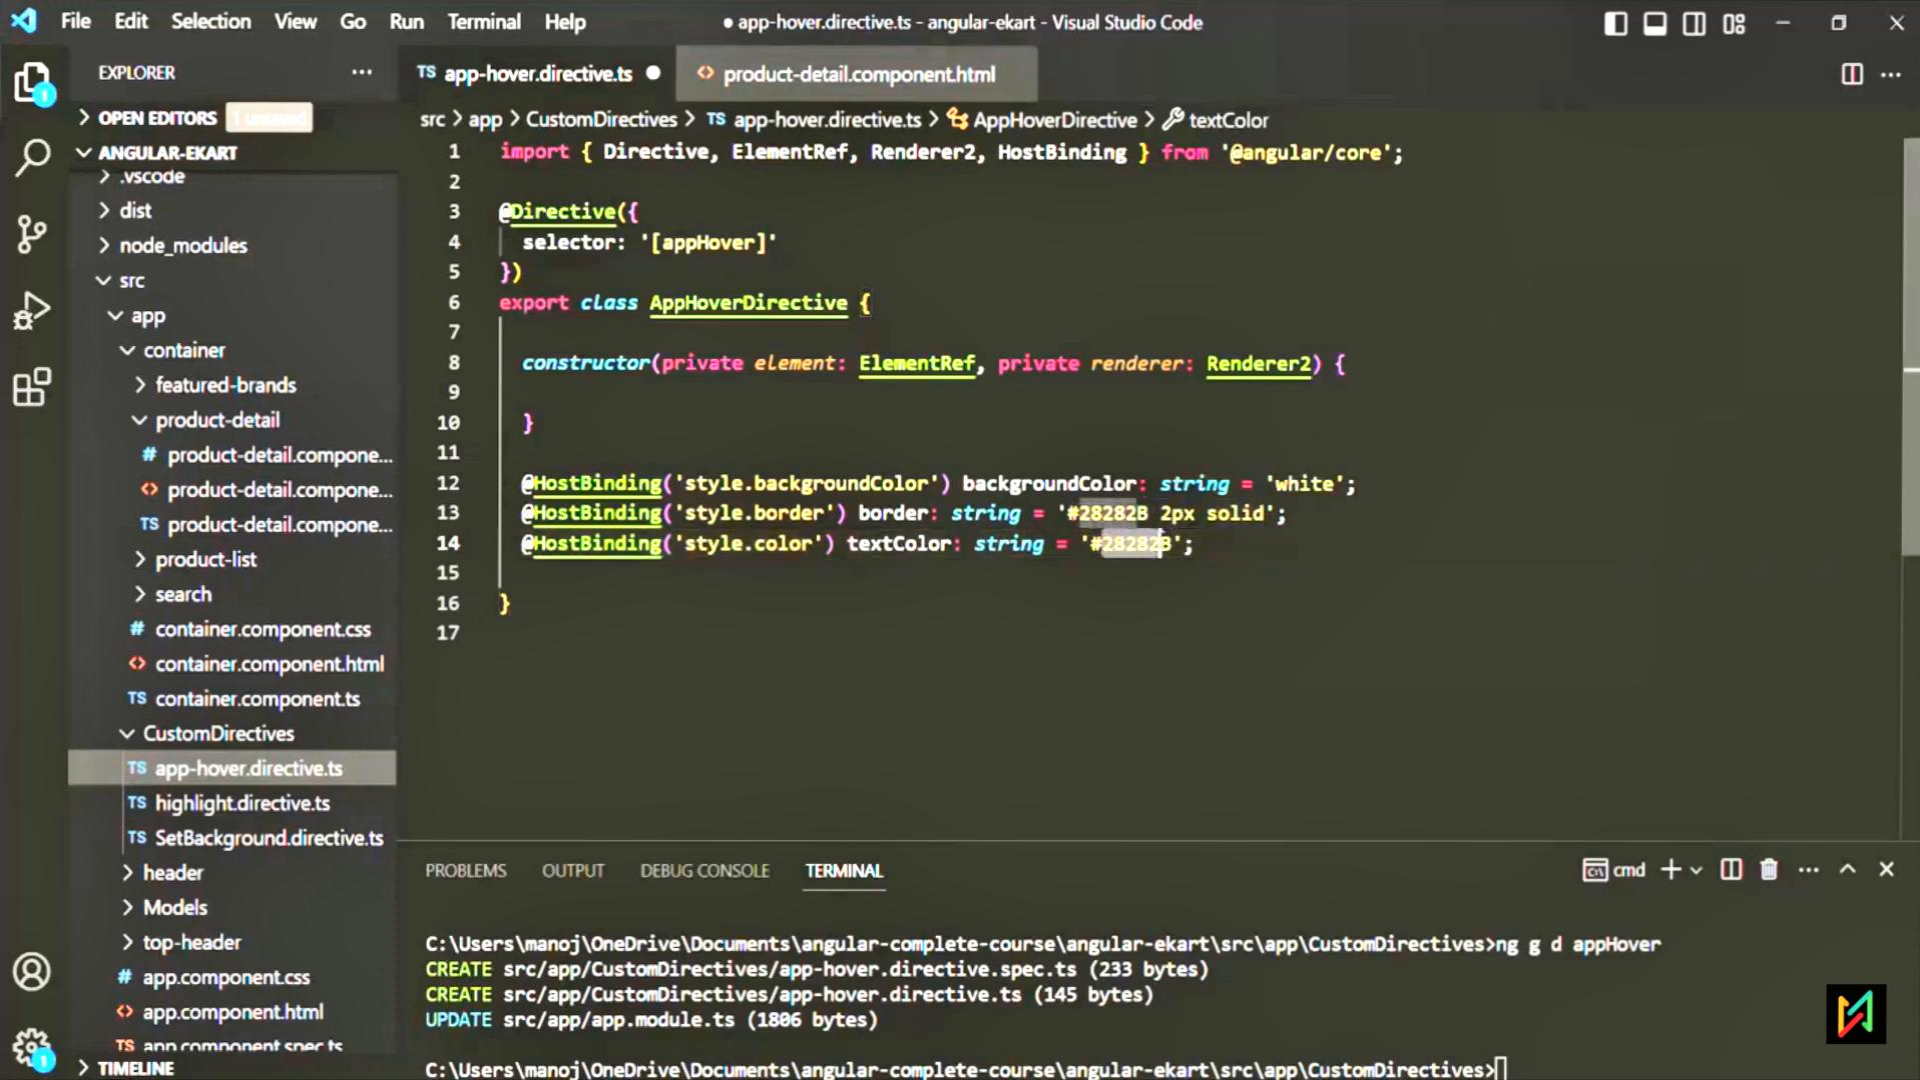

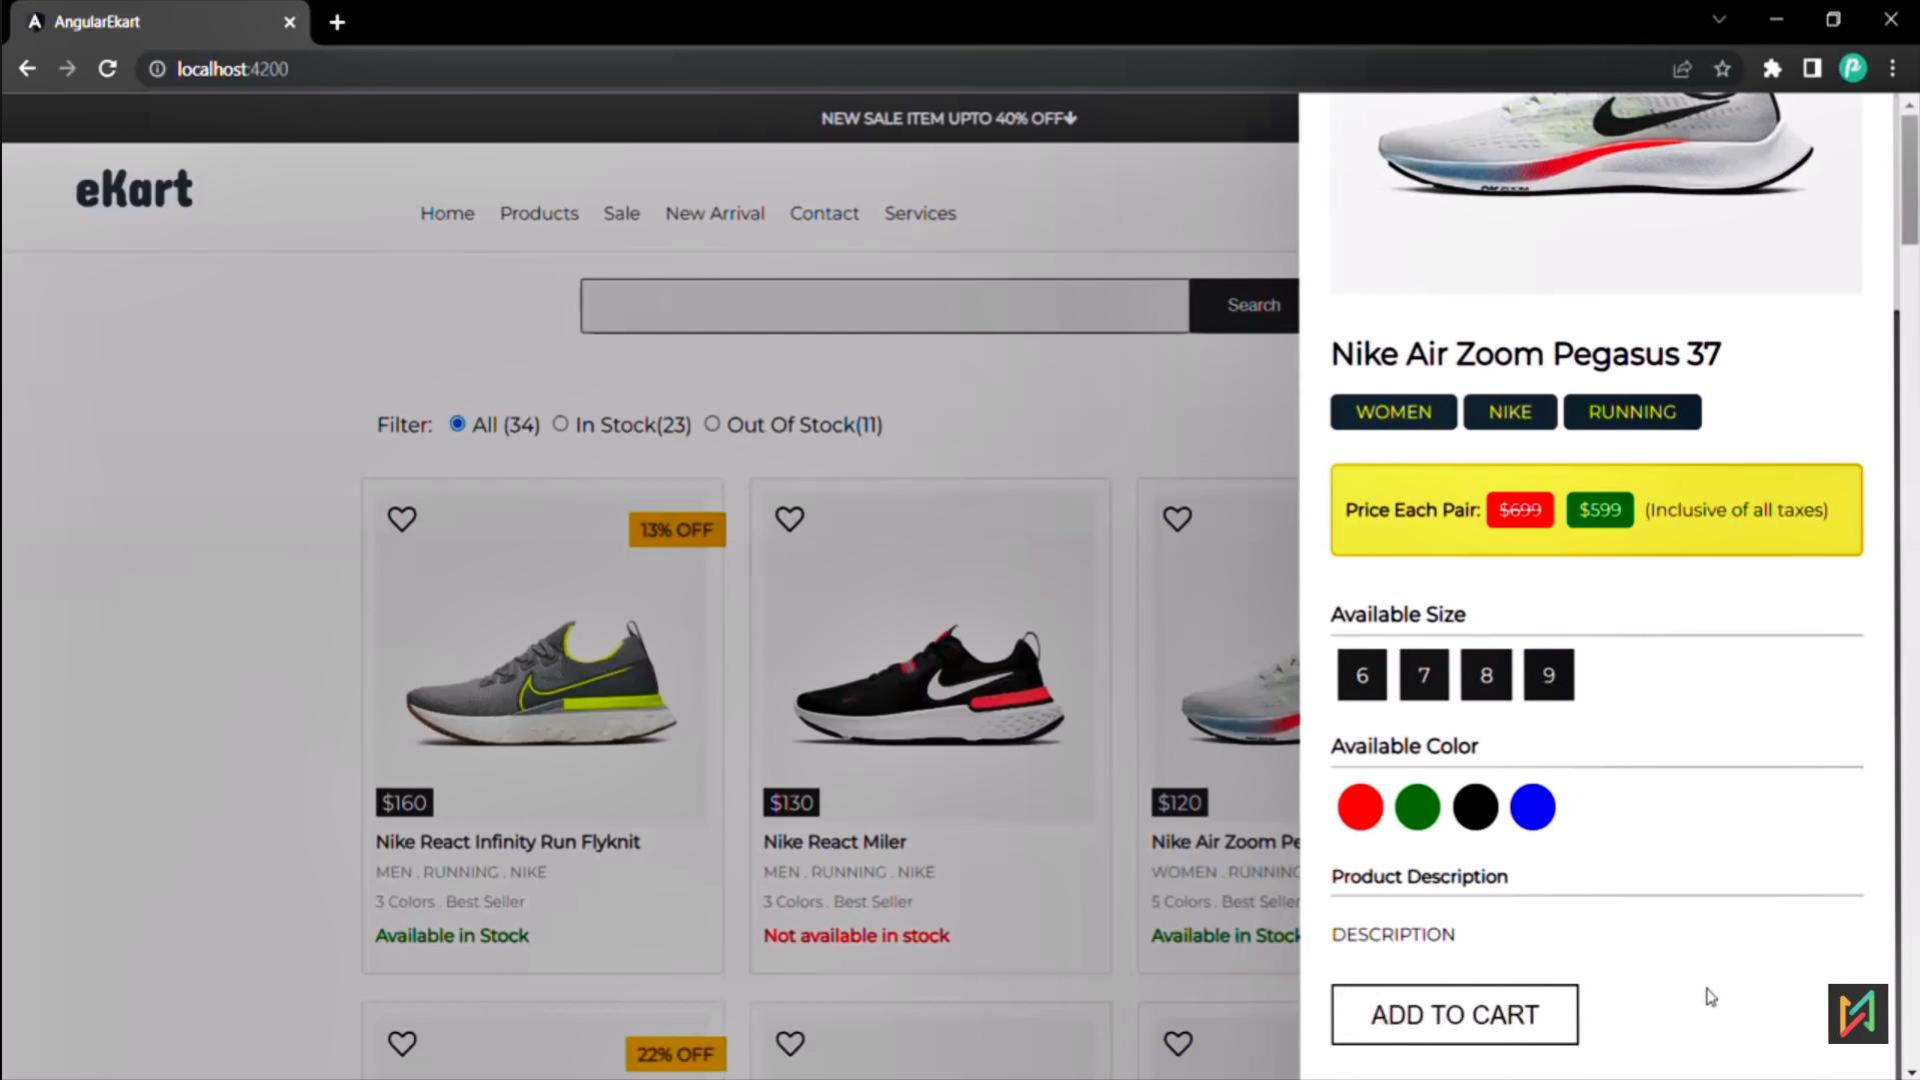

eKart

Home Products Sale New Arrival Contact Services

NEW SALE ITEM UPTO 40% OFF

Search

Filter: ☒ All (34) ☐ In Stock(23) ☐ Out Of Stock(11)



13% OFF



\$160

Nike React Infinity Run Flyknit

MEN . RUNNING . NIKE

3 Colors . Best Seller

Available in Stock



\$130

Nike React Miler

MEN . RUNNING . NIKE

3 Colors . Best Seller

Not available in stock



\$120

Nike Air Zoom Pegasus 37

WOMEN . RUNNING . NIKE

5 Colors . Best Seller

Available in Stock



Nike Air Zoom Pegasus 37

WOMEN

NIKE

RUNNING

Price Each Pair: ~~\$699~~ \$599 (Inclusive of all taxes)

Available Size

6

7

8

9

Available Color





Product Description

DESCRIPTION

ADD TO CART



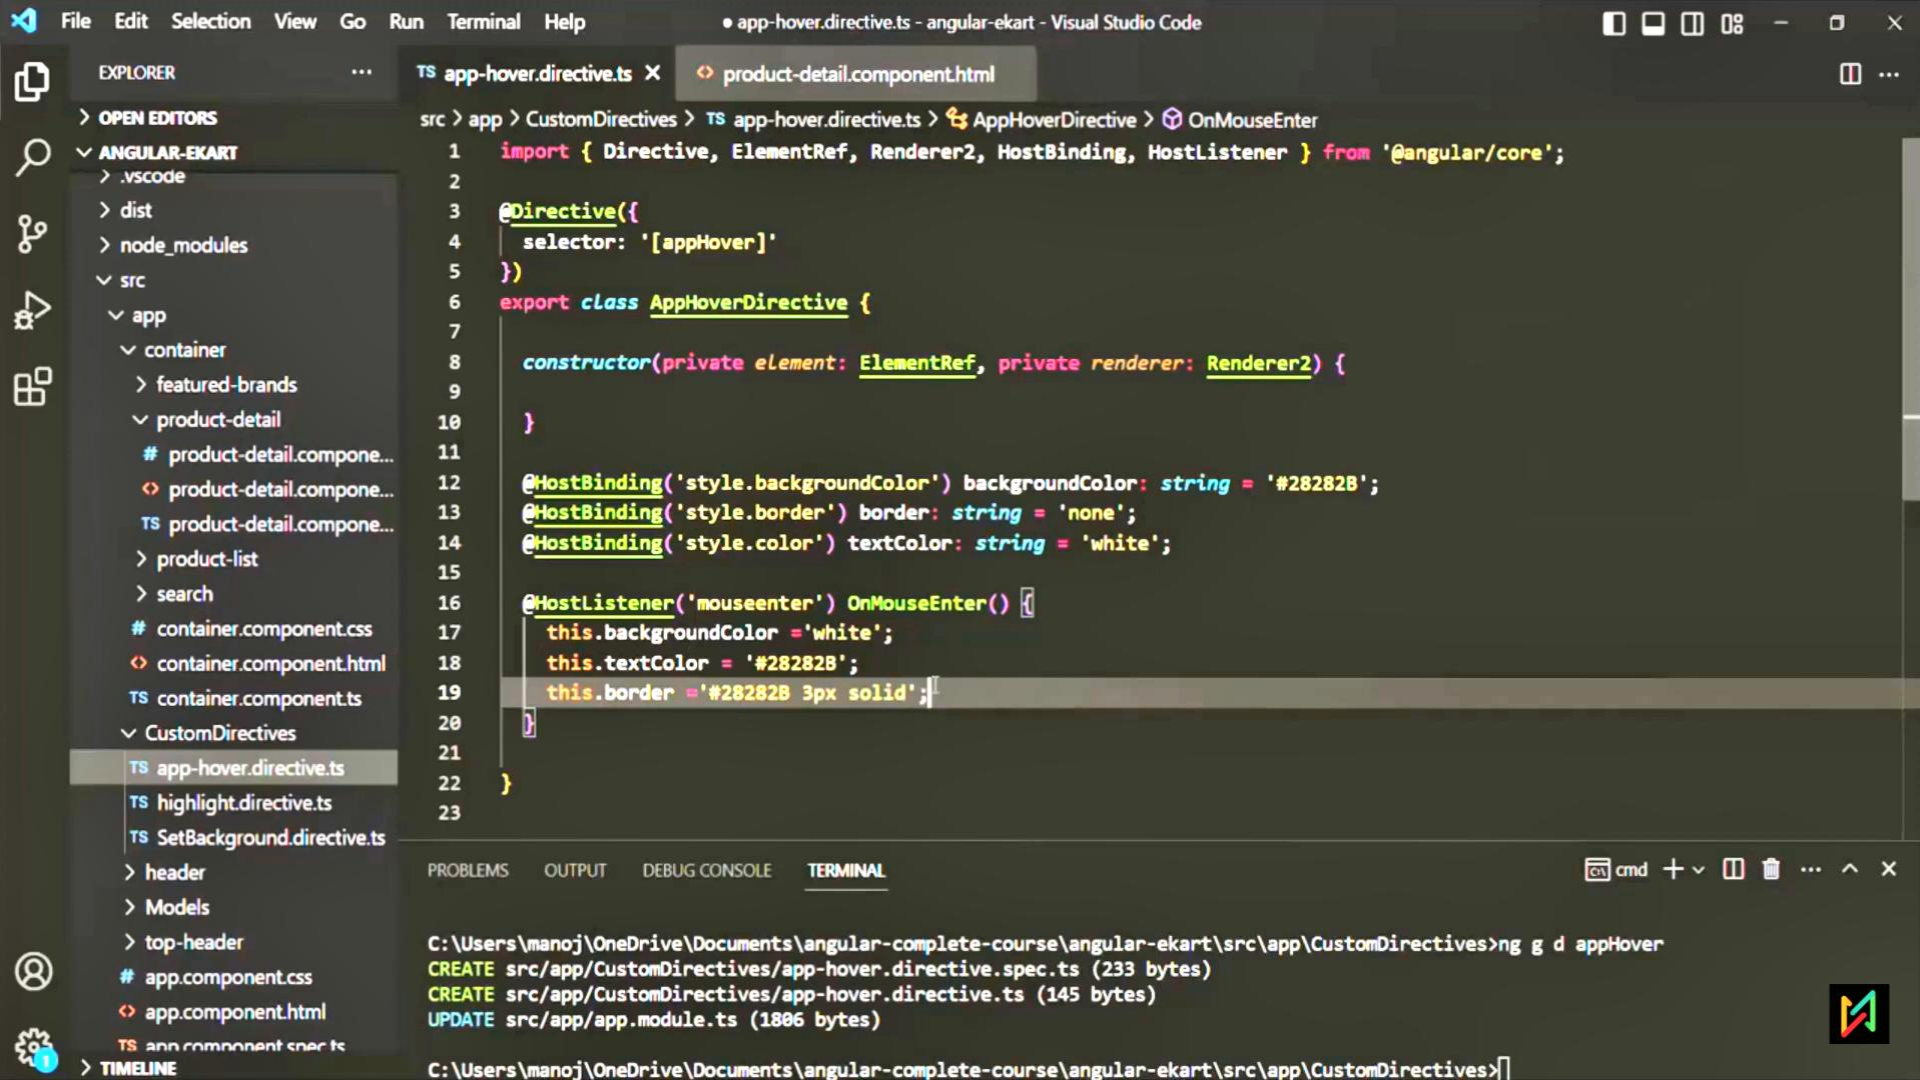

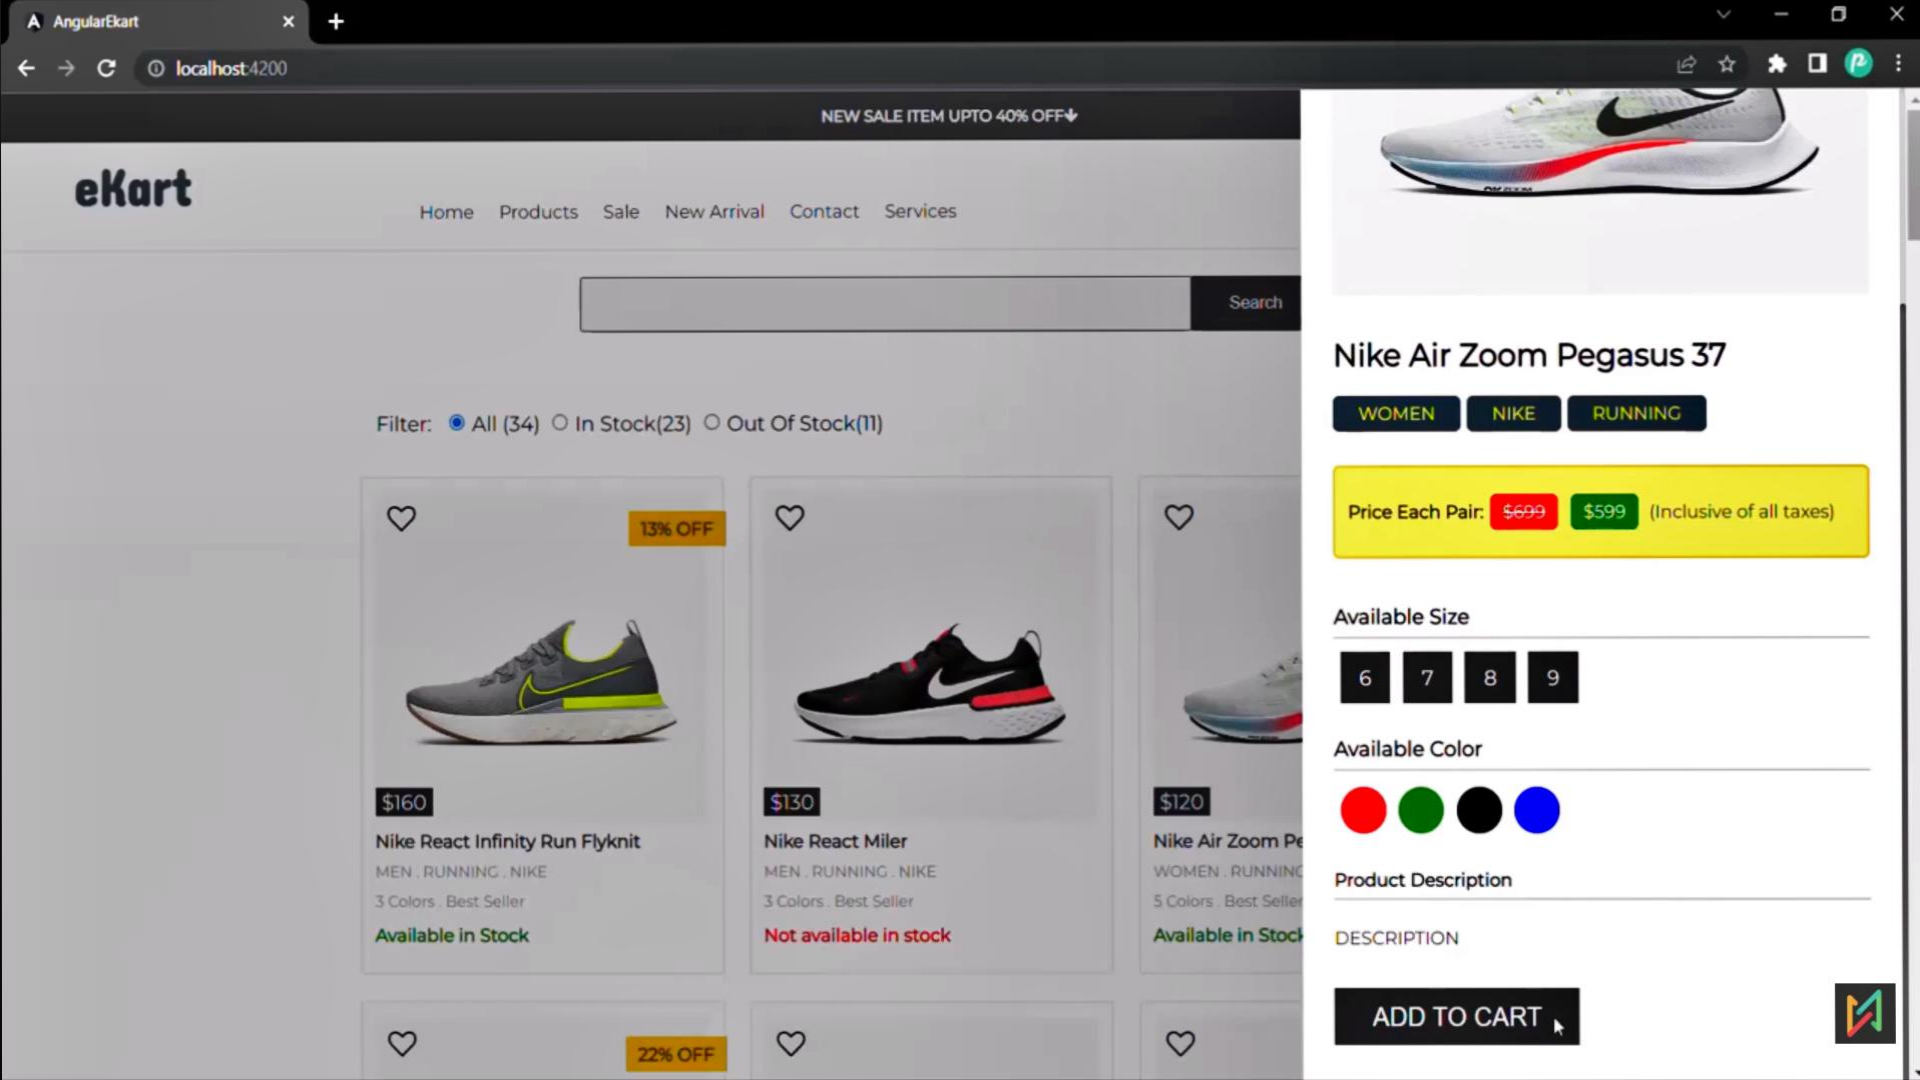

eKart

Home Products Sale New Arrival Contact Services

NEW SALE ITEM UPTO 40% OFF↓

Search

Filter: ☒ All (34) ☐ In Stock(23) ☐ Out Of Stock(11)



13% OFF



\$160

Nike React Infinity Run Flyknit

MEN . RUNNING . NIKE

3 Colors . Best Seller

Available in Stock



\$130

Nike React Miler

MEN . RUNNING . NIKE

3 Colors . Best Seller

Not available in stock




\$120

Nike Air Zoom Pegasus 37

WOMEN . RUNNING . NIKE

5 Colors . Best Seller

Available in Stock



Nike Air Zoom Pegasus 37

WOMEN

NIKE

RUNNING

Price Each Pair: ~~\$699~~ \$599 (Inclusive of all taxes)

Available Size

6

7

8

9

Available Color





Product Description

DESCRIPTION

ADD TO CART



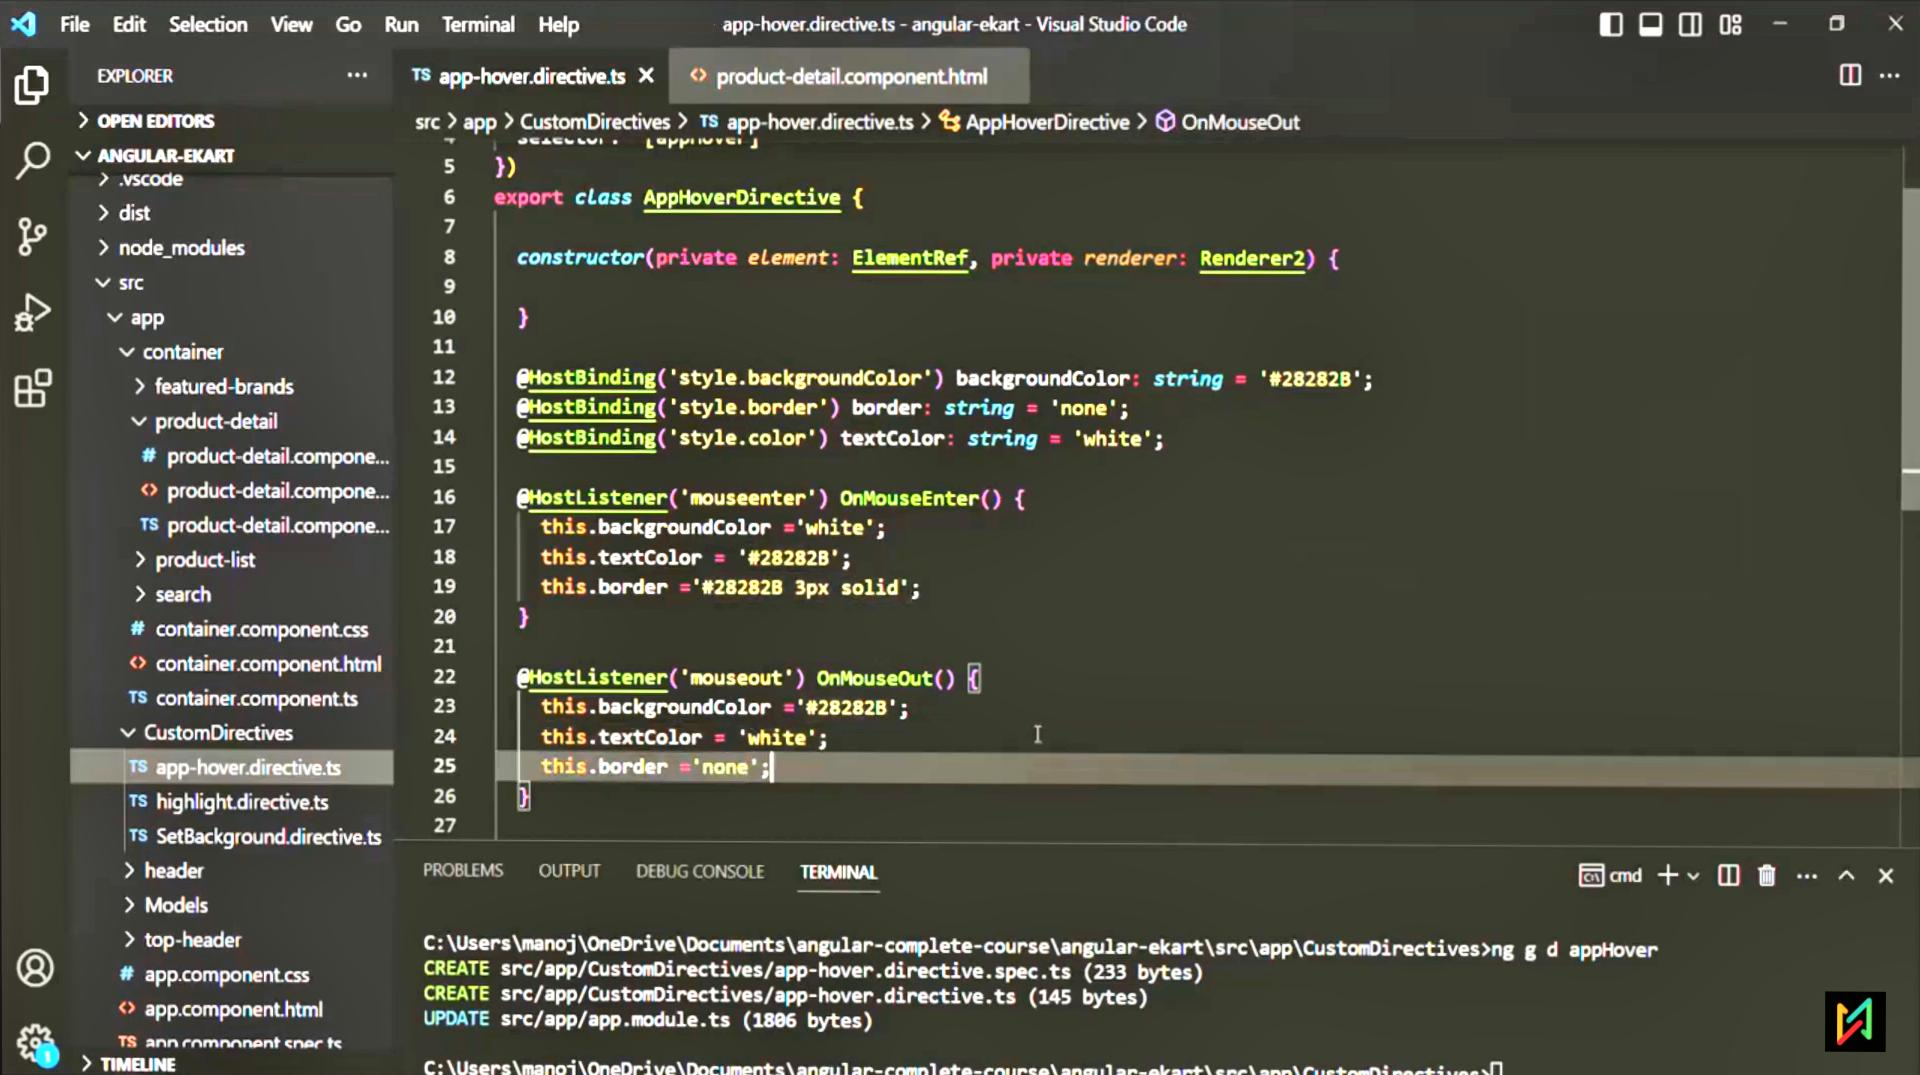

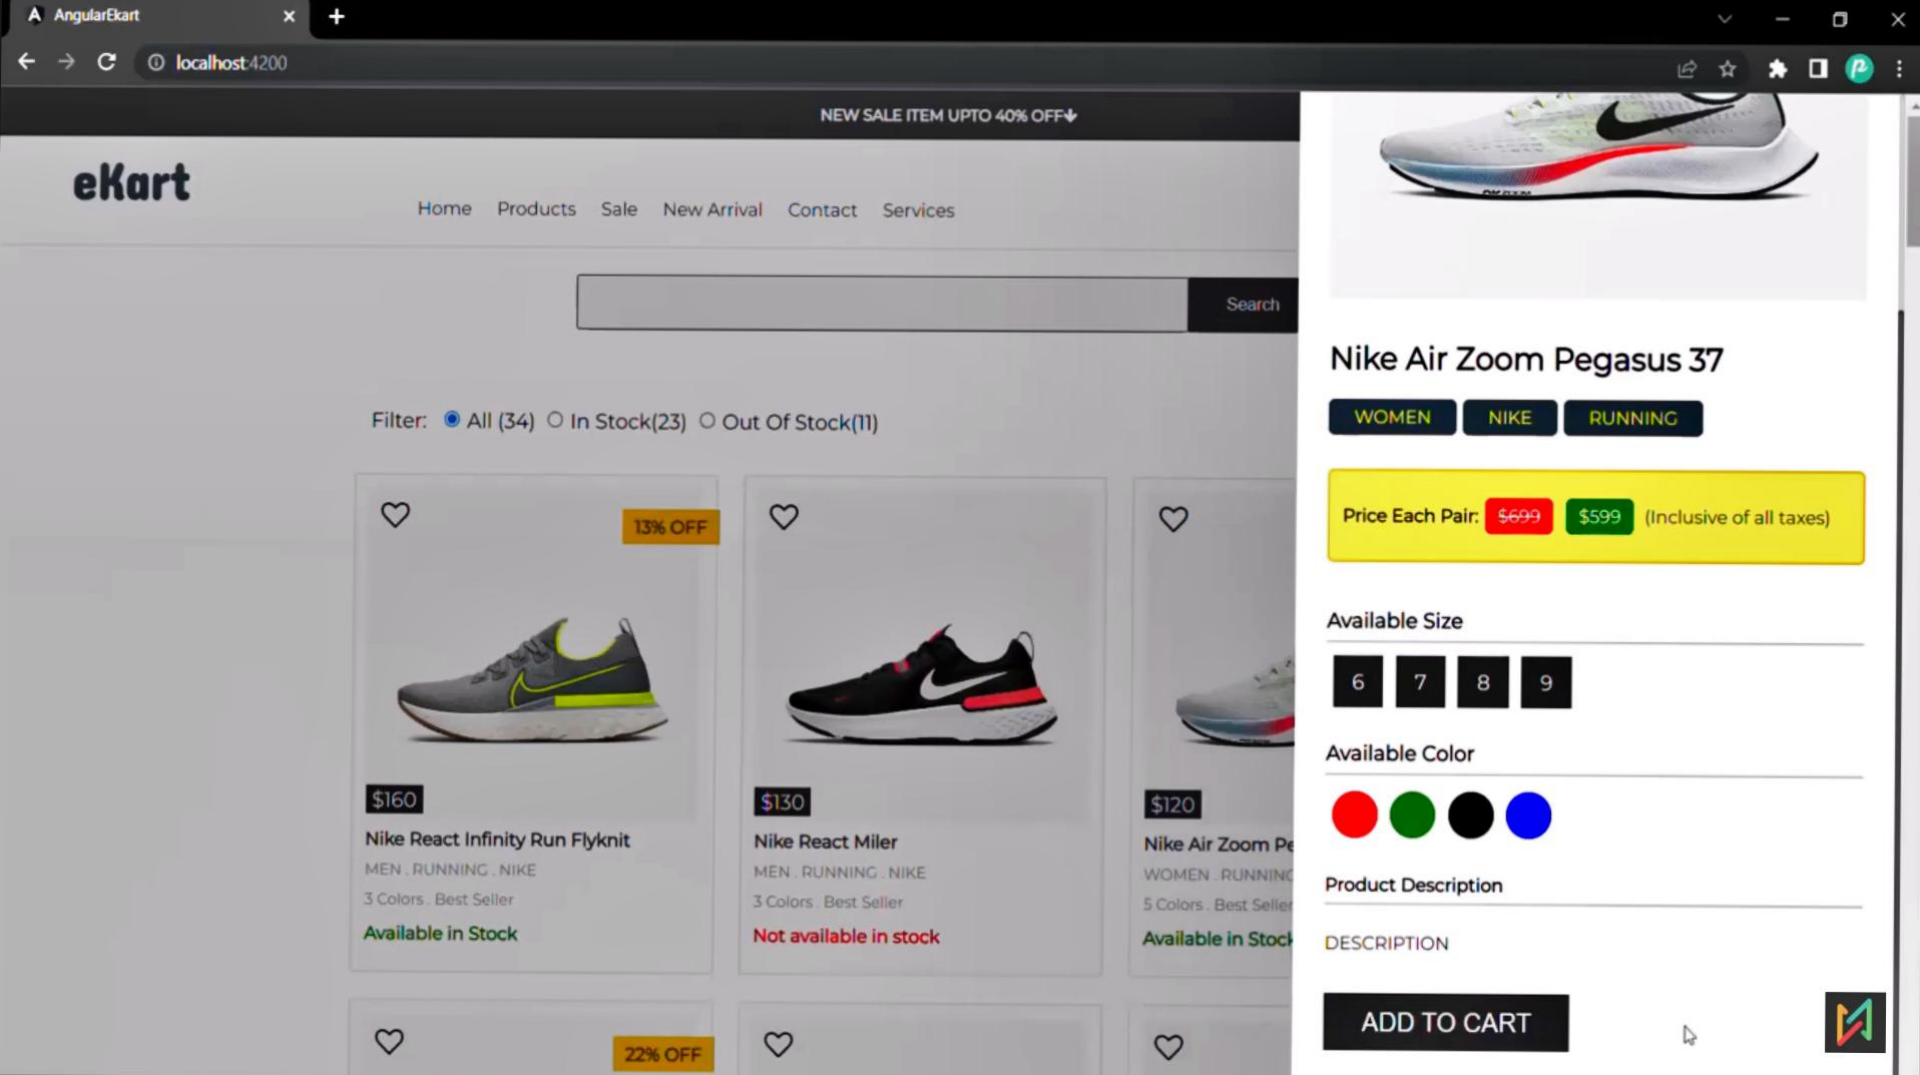

eKart

[Home](#) [Products](#) [Sale](#) [New Arrival](#) [Contact](#) [Services](#)

NEW SALE ITEM UPTO 40% OFF

Search

Filter: ☒ All (34) ☐ In Stock(23) ☐ Out Of Stock(11)



13% OFF



\$160

Nike React Infinity Run Flyknit

MEN . RUNNING . NIKE

3 Colors . Best Seller

Available in Stock



\$130

Nike React Miler

MEN . RUNNING . NIKE

3 Colors . Best Seller

Not available in stock



\$120

Nike Air Zoom Pegasus 37

WOMEN . RUNNING . NIKE

5 Colors . Best Seller

Available in Stock



Nike Air Zoom Pegasus 37

WOMEN

NIKE

RUNNING

Price Each Pair: ~~\$699~~ \$599 (Inclusive of all taxes)

Available Size

6

7

8

9

Available Color





Product Description

DESCRIPTION

ADD TO CART



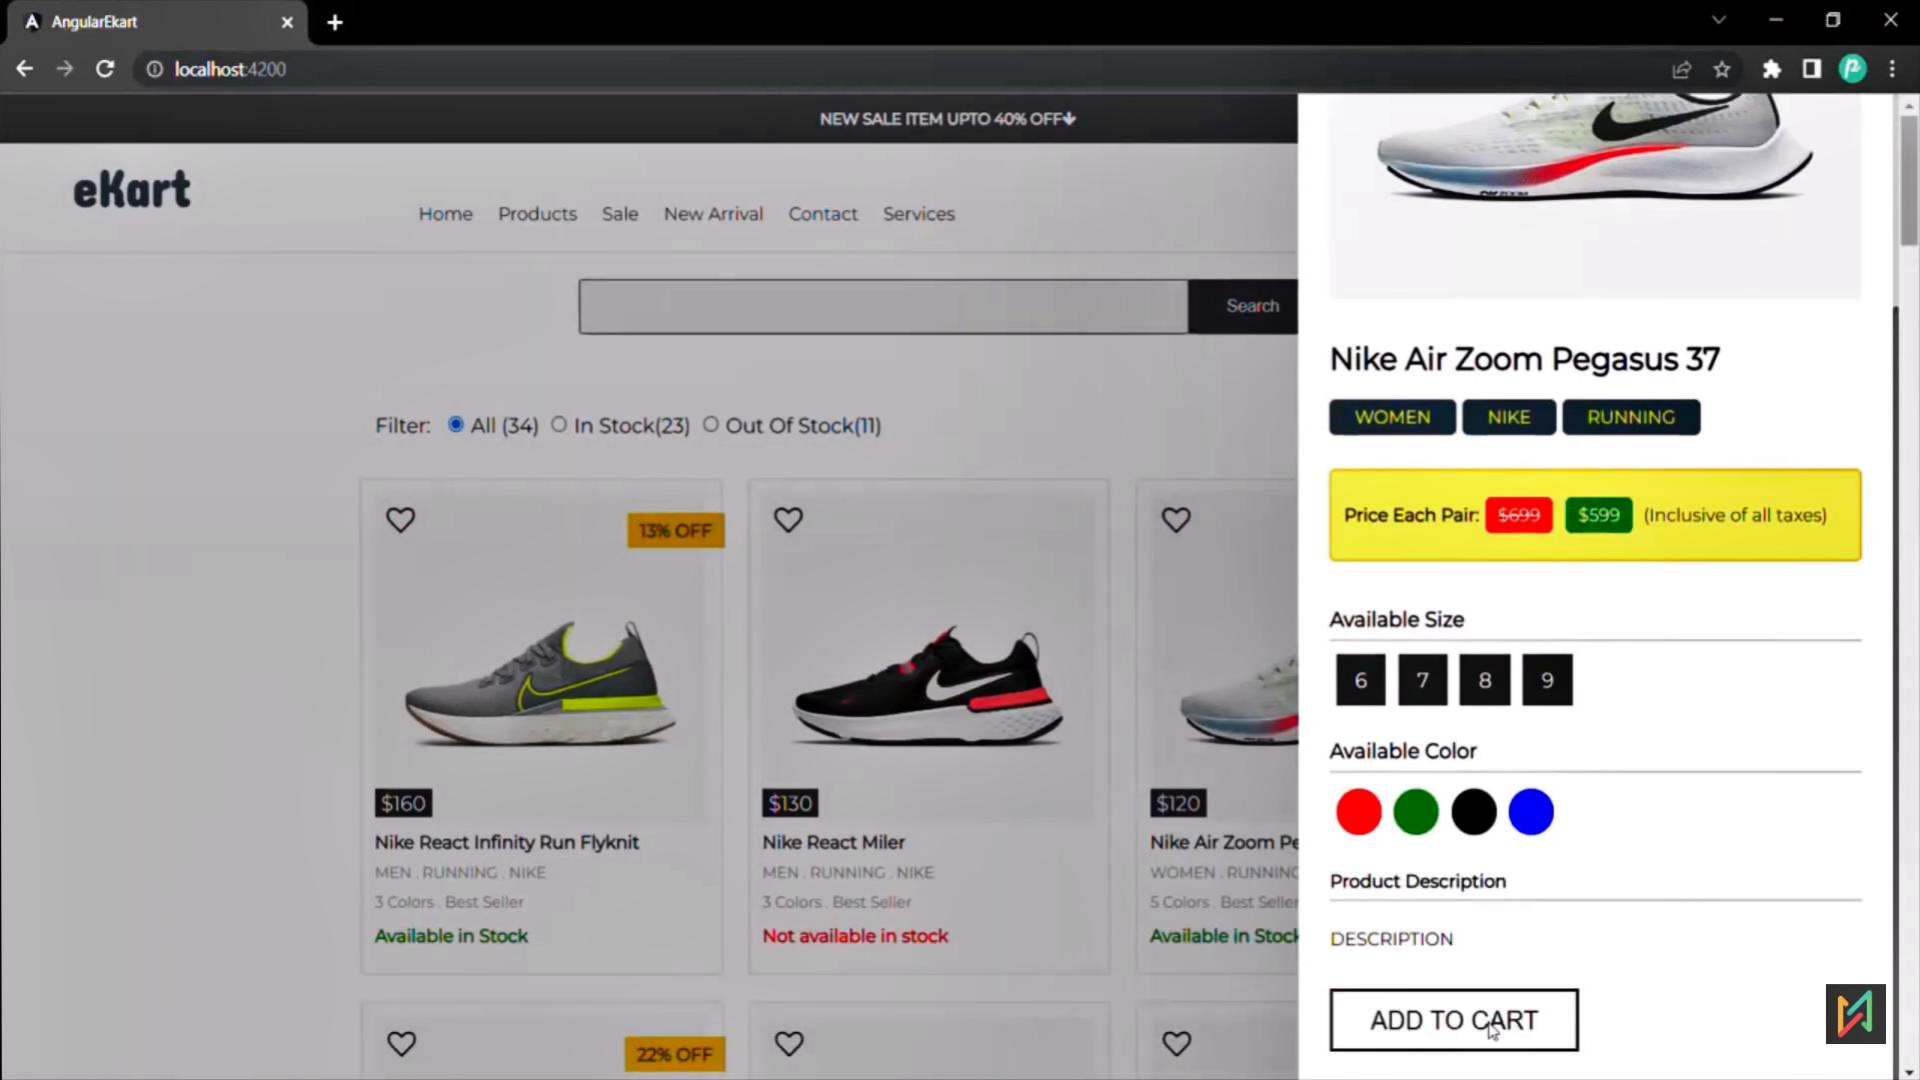

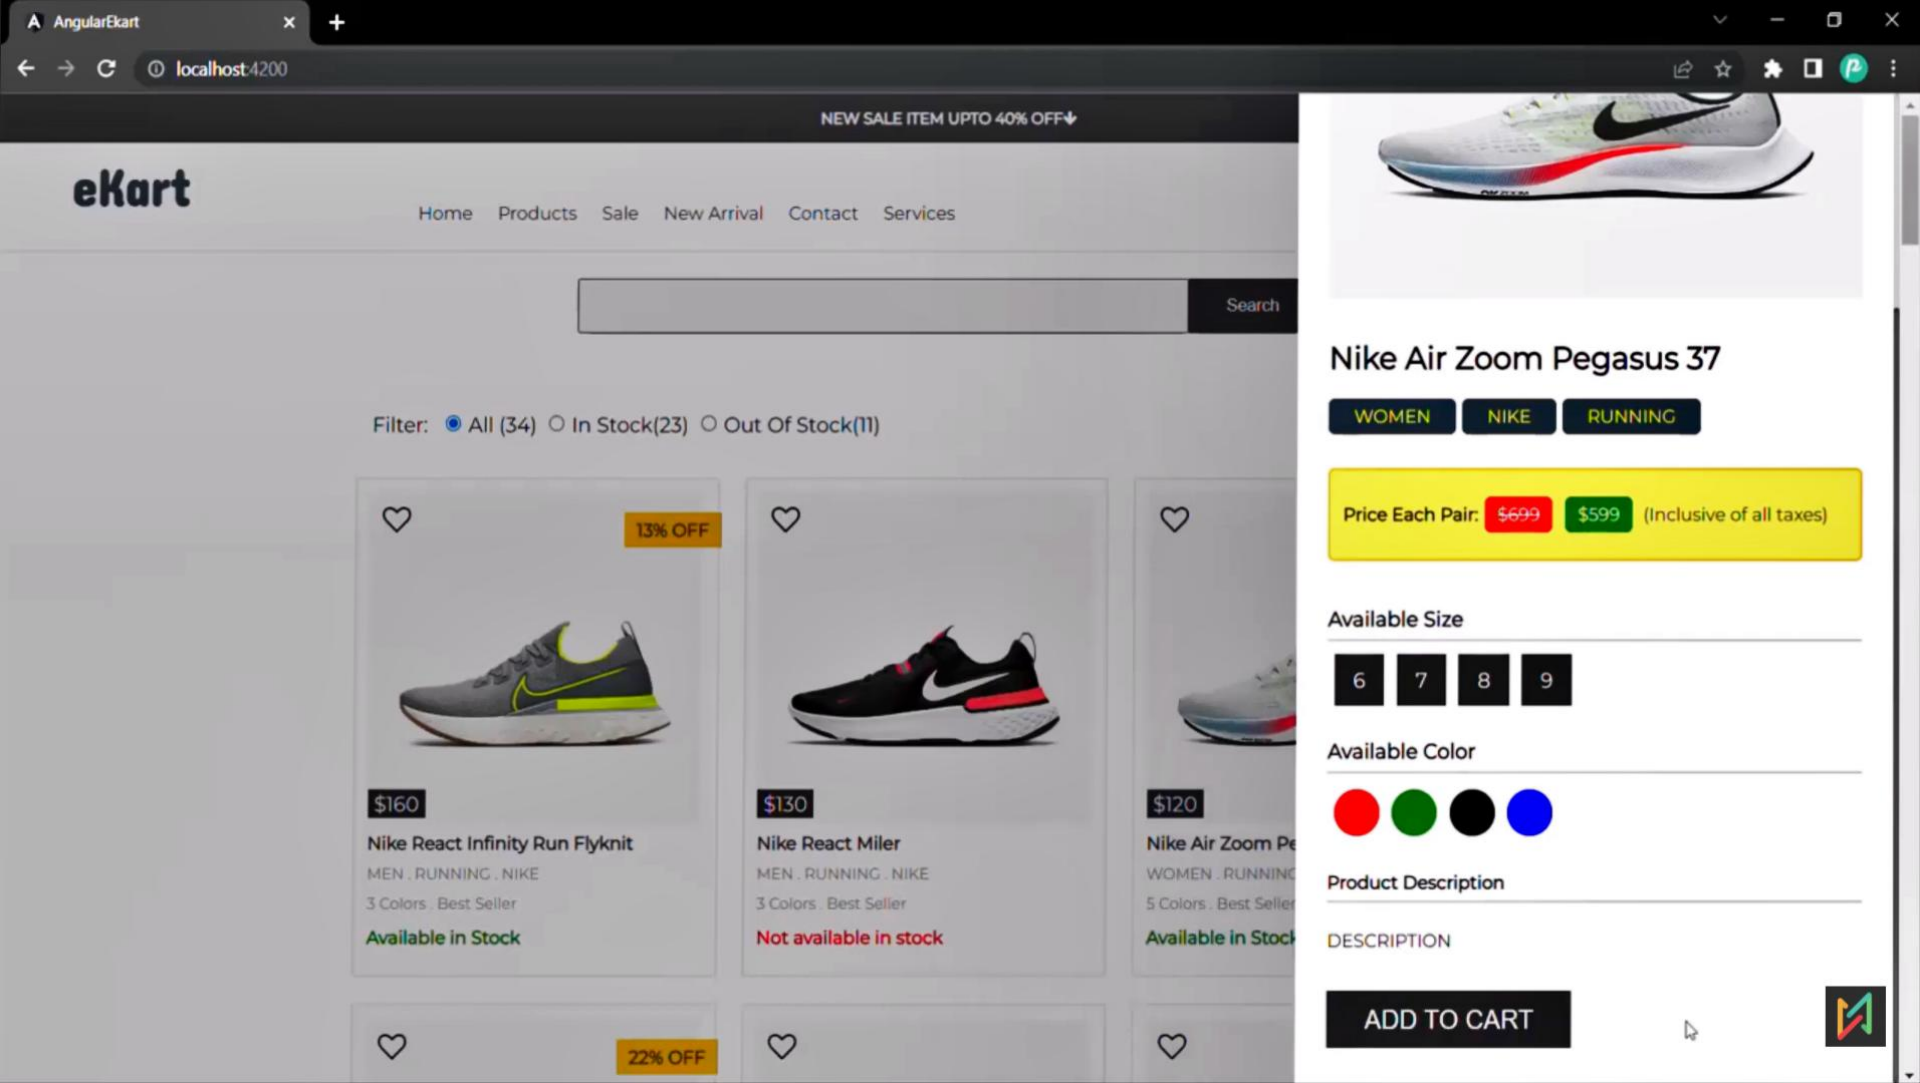

eKart

[Home](#) [Products](#) [Sale](#) [New Arrival](#) [Contact](#) [Services](#)

NEW SALE ITEM UPTO 40% OFF

Search

Filter: ☒ All (34) ☐ In Stock(23) ☐ Out Of Stock(11)



13% OFF



\$160

Nike React Infinity Run Flyknit

MEN . RUNNING . NIKE

3 Colors . Best Seller

Available in Stock



\$130

Nike React Miler

MEN . RUNNING . NIKE

3 Colors . Best Seller

Not available in stock



\$120

Nike Air Zoom Pegasus 37

WOMEN . RUNNING . NIKE

5 Colors . Best Seller

Available in Stock

Nike Air Zoom Pegasus 37

WOMEN

NIKE

RUNNING

Price Each Pair: ~~\$699~~ \$599 (Inclusive of all taxes)

Available Size

6

7

8

9

Available Color




Product Description

DESCRIPTION

ADD TO CART



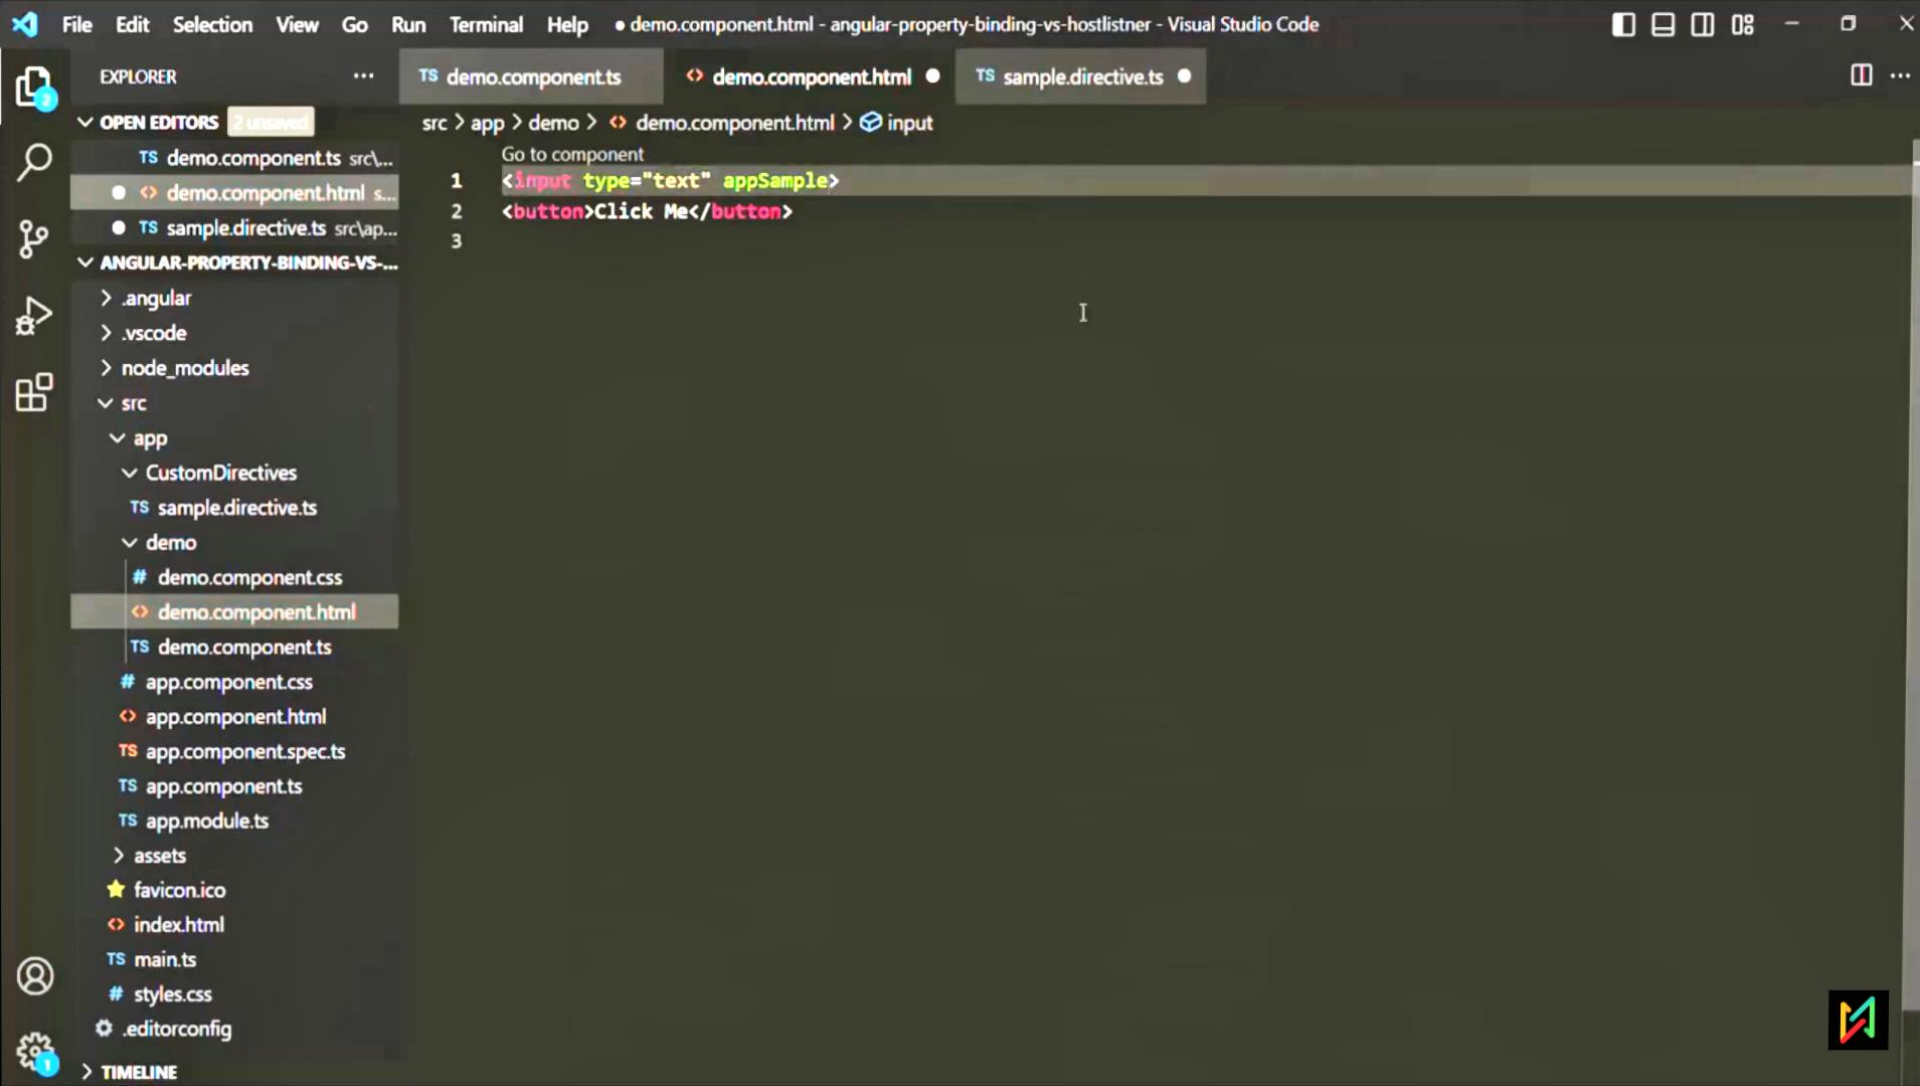



EXPLORER

OPEN EDITORS

TS demo.component.ts src\...

demo.component.html s...

TS sample.directive.ts src\ap...

ANGULAR-PROPERTY-BINDING-VS-...

> .angular

> .vscode

> node_modules

src

app

CustomDirectives

TS sample.directive.ts

demo

demo.component.css

demo.component.html

TS demo.component.ts

app.component.css

app.component.html

TS app.component.spec.ts

TS app.component.ts

TS app.module.ts

> assets

★ favicon.ico

index.html

TS main.ts

styles.css

.editorconfig

TIMELINE

src > app > CustomDirectives > TS sample.directive.ts > SampleDirective > inputValue

1 import { Directive, HostBinding } from '@angular/core';

2

3 @Directive({

4 selector: '[appSample]'

5 })

6 export class SampleDirective {

7

8 @HostBinding('value') inputValue: string = "Hi there!"

9

10 constructor() { }

11

12 }

13



Hi there!

Click Me





EXPLORER

OPEN EDITORS

- TS demo.component.ts src\...
- demo.component.html s...
- TS sample.directive.ts src\ap...

ANGULAR-PROPERTY-BINDING-VS...

- > .angular
- > .vscode
- > node_modules
- ▼ src
 - ▼ app
 - ▼ CustomDirectives
 - TS sample.directive.ts
 - ▼ demo
 - # demo.component.css
 - demo.component.html
 - TS demo.component.ts
 - # app.component.css
 - app.component.html
 - TS app.component.spec.ts
 - TS app.component.ts
 - TS app.module.ts
 - > assets
 - ★ favicon.ico
 - index.html
 - TS main.ts
 - # styles.css
 - editorconfig

TIMELINE

TS demo.component.ts

demo.component.html

TS sample.directive.ts

src > app > demo > TS demo.component.ts > DemoComponent > logValue

```
1  import { Component } from '@angular/core';
2
3  @Component({
4    selector: 'app-demo',
5    templateUrl: './demo.component.html',
6    styleUrls: ['./demo.component.css']
7  })
8  export class DemoComponent {
9    textValue: string = 'Hello, World!';
10
11    logValue() {
12      console.log('Input has been focused!');
13    }
14  }
15
```



EXPLORER

OPEN EDITORS

- TS demo.component.ts src\...
- X demo.component.html s...
- TS sample.directive.ts src\ap...

ANGULAR-PROPERTY-BINDING-VS-...

- > .angular
- > .vscode
- > node_modules
- ▼ src
 - ▼ app
 - ▼ CustomDirectives
 - TS sample.directive.ts
 - ▼ demo
 - # demo.component.css
 - demo.component.html
 - TS demo.component.ts
 - # app.component.css
 - demo.component.html
 - TS app.component.spec.ts
 - TS app.component.ts
 - TS app.module.ts
 - > assets
 - ★ favicon.ico
 - demo.html
 - TS main.ts
 - # styles.css
 - editorconfig
- > TIMELINE


demo.component.html X TS sample.directive.ts


src > app > demo > demo.component.html > input

Go to component

```
1 <input type="text" [value]="textValue" (focus)="logValue()">
2 <button>Click Me</button>
3
```




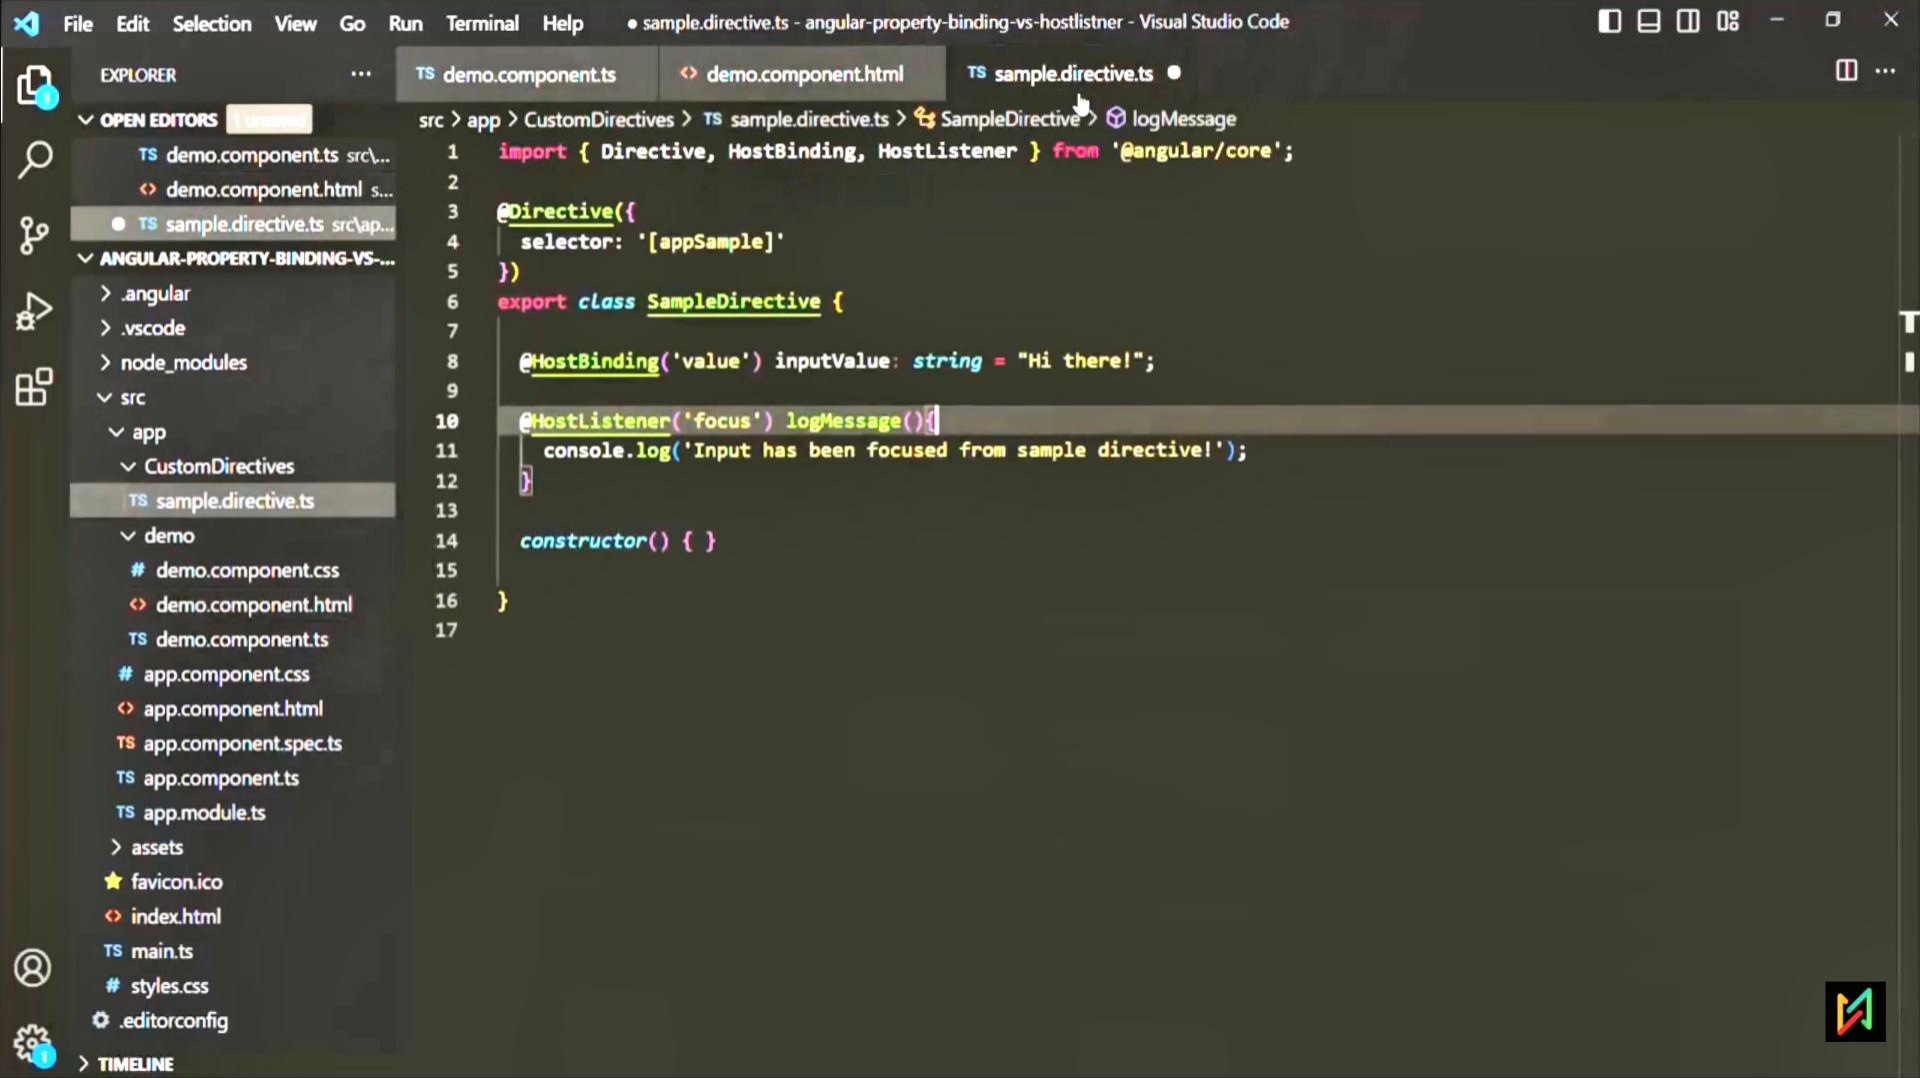

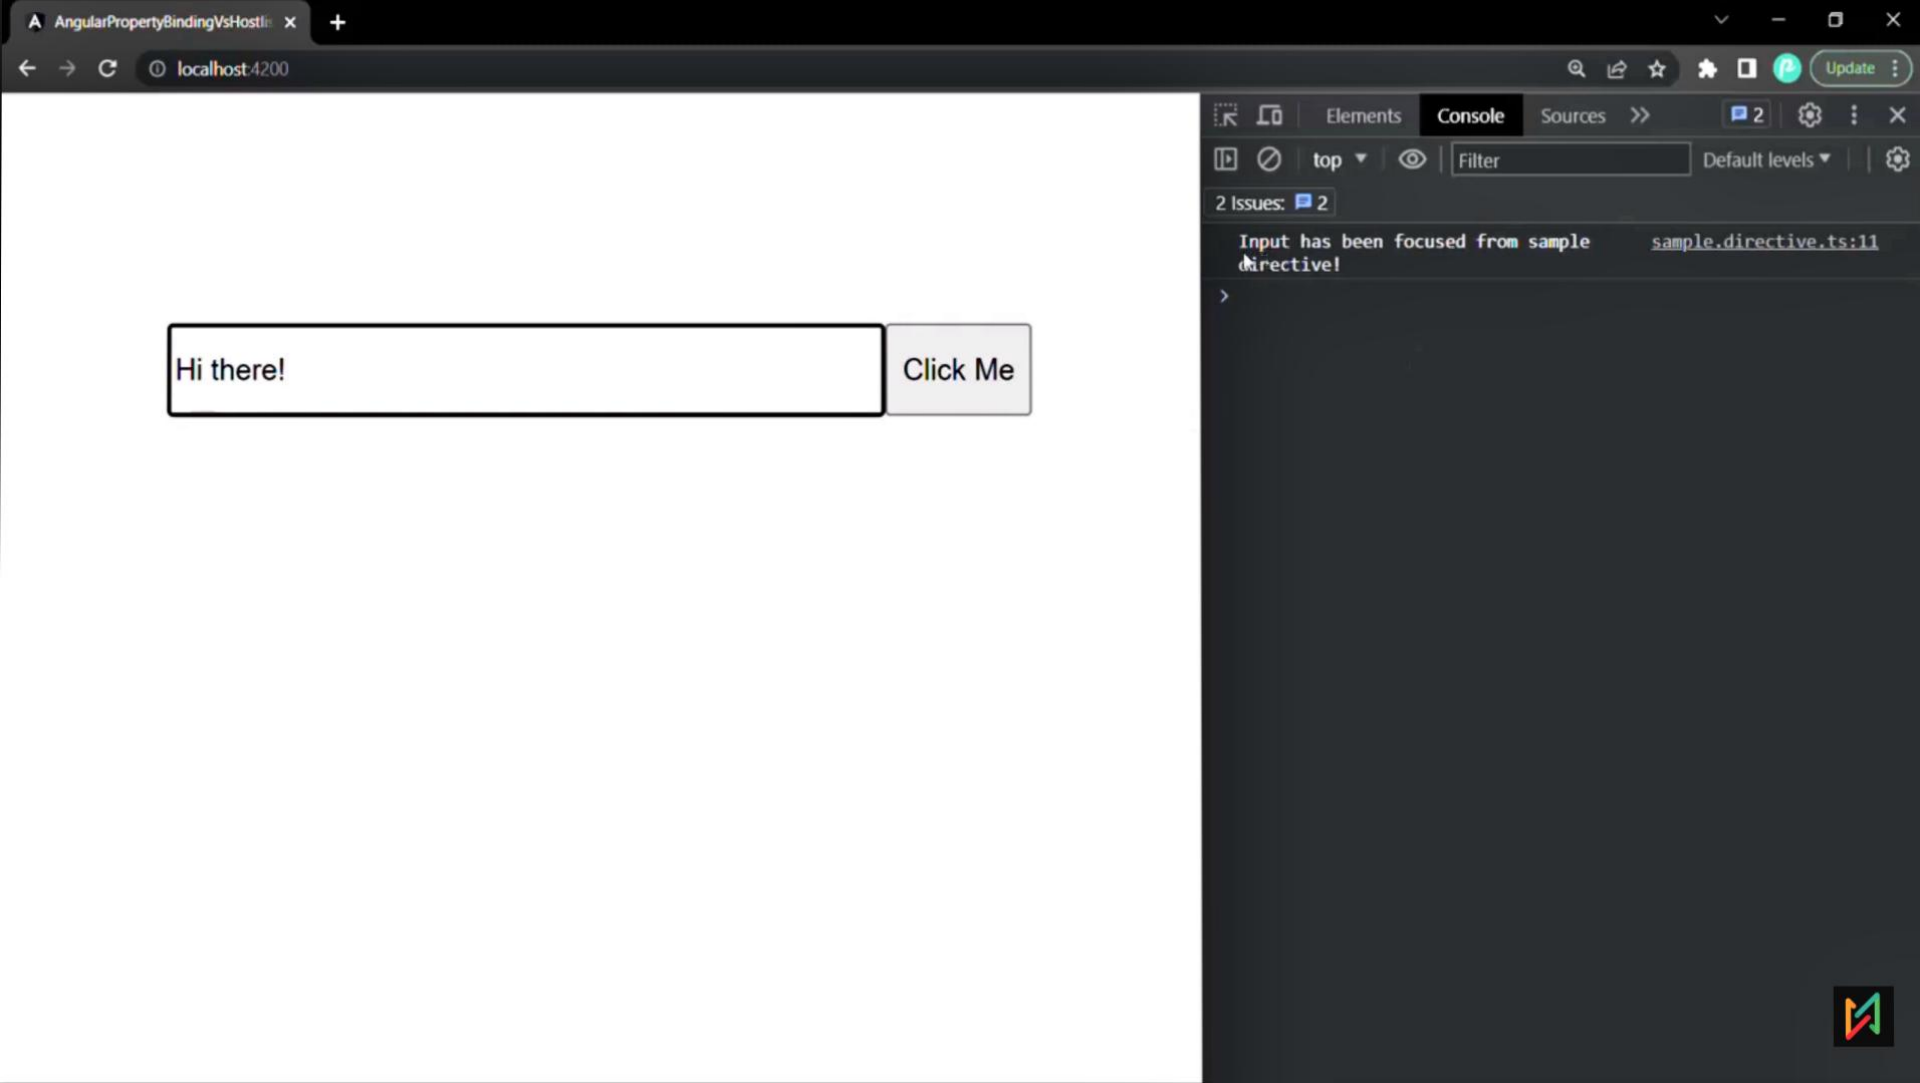

Property Binding in Directives



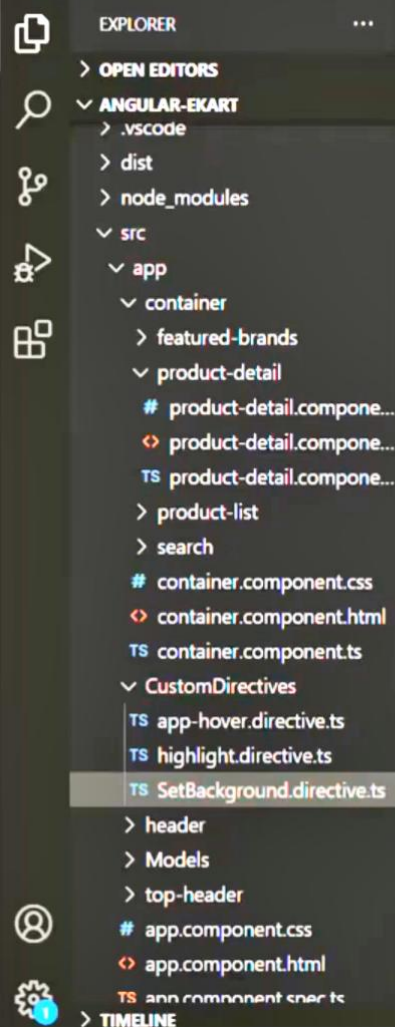

TS SetBackground.directive.ts X

src > app > CustomDirectives > TS SetBackground.directive.ts > SetBackground > ngOnInit

```
1  import { Directive, ElementRef, OnInit, Renderer2 } from "@angular/core";
2
3  @Directive({
4    selector: '[setBackground]'
5  })
6  export class SetBackground implements OnInit{
7    //private element: ElementRef;
8    //private renderer: Renderer2;
9    backColor: String = '#36454F';
10   textColor: string = 'White';
11
12   constructor(private element: ElementRef, private renderer: Renderer2){
13     //this.element = element;
14     //this.renderer = renderer;
15   }
16
17   ngOnInit(){
18     // this.element.nativeElement.style.backgroundColor = '#36454F';
19     // this.element.nativeElement.style.color = 'white';
20     this.renderer.setStyle(this.element.nativeElement, 'backgroundColor', this.backColor);
21     this.renderer.setStyle(this.element.nativeElement, 'color', this.textColor);
22     //this.renderer.setAttribute(this.element.nativeElement, 'title', 'This is example title');
23   }
24 }
```



eKart

[Home](#) [Products](#) [Sale](#) [New Arrival](#) [Contact](#) [Services](#)

Search

Filter: ☒ All (34) ☐ In Stock(23) ☐ Out Of Stock(11)



13% OFF



\$160

Nike React Infinity Run Flyknit

MEN RUNNING NIKE

3 Colors Best Seller

Available in Stock



\$130

Nike React Miler

MEN RUNNING NIKE

3 Colors, Best Seller

Not available in stock



\$120

Nike Air Zoom Pe

WOMEN RUNNING

5 Colors Best Seller

Available In Stock



22% OFF



Nike Air Zoom Pegasus 37

WOMEN

NIKE

RUNNING

Price Each Pair: **\$699** **\$599** (Inclusive of all taxes)

Available Size

6

7

8

9

Available Color



File

Edit

Selection

View

Go

Run

Terminal

Help

product-detail.component.html - angular-ekart - Visual Studio Code

TS SetBackground.directive.ts

product-detail.component.html

OPEN EDITORS

2 Selected

ANGULAR-EKART

.vscode

dist

node_modules

src

app

container

featured-brands

product-detail

product-detail.compone...

product-detail.compone...

TS product-detail.compone...

product-list

search

container.component.css

container.component.html

TS container.component.ts

CustomDirectives

TS app-hover.directive.ts

TS highlight.directive.ts

TS SetBackground.directive.ts

header

Models

top-header

app.component.css

app.component.html

TS app.component.ts

TIMELINE

product-detail > product-detail.component.html > div.ekart--product--details--info.scroll > div.ekart-product-detail > div.ekart-product-detail-gbc > span

10<div class="ekart-product-detail-name">

11<h2>{{ product.name }}</h2>

12</div>

13<div class="ekart-product-detail-gbc">

14{{ product.gender }}

15{{ product.brand }}

16{{ product.category }}

17</div>

18<div class="ekart-product-detail-price">

19<p>

20Price Each Pair:

21<s>\$699</s>

22\$599 (Inclusive of all taxes)

23</p>

24</div>

25<div class="ekart-product-detail-size">

26<div style="padding: 5px 0px;border-bottom: #ccc 2px solid">

27<h4>Available Size</h4>

28</div>

29<div style="margin-top: 20px">

306

317

328

339

34</div>

35</div>

36


37<div class="ekart-product-detail-color">

38<div style="padding: 5px 0px;border-bottom: #ccc 2px solid">

39<h4>Available Color</h4>

40</div>

41<div style="margin-top: 20px;">

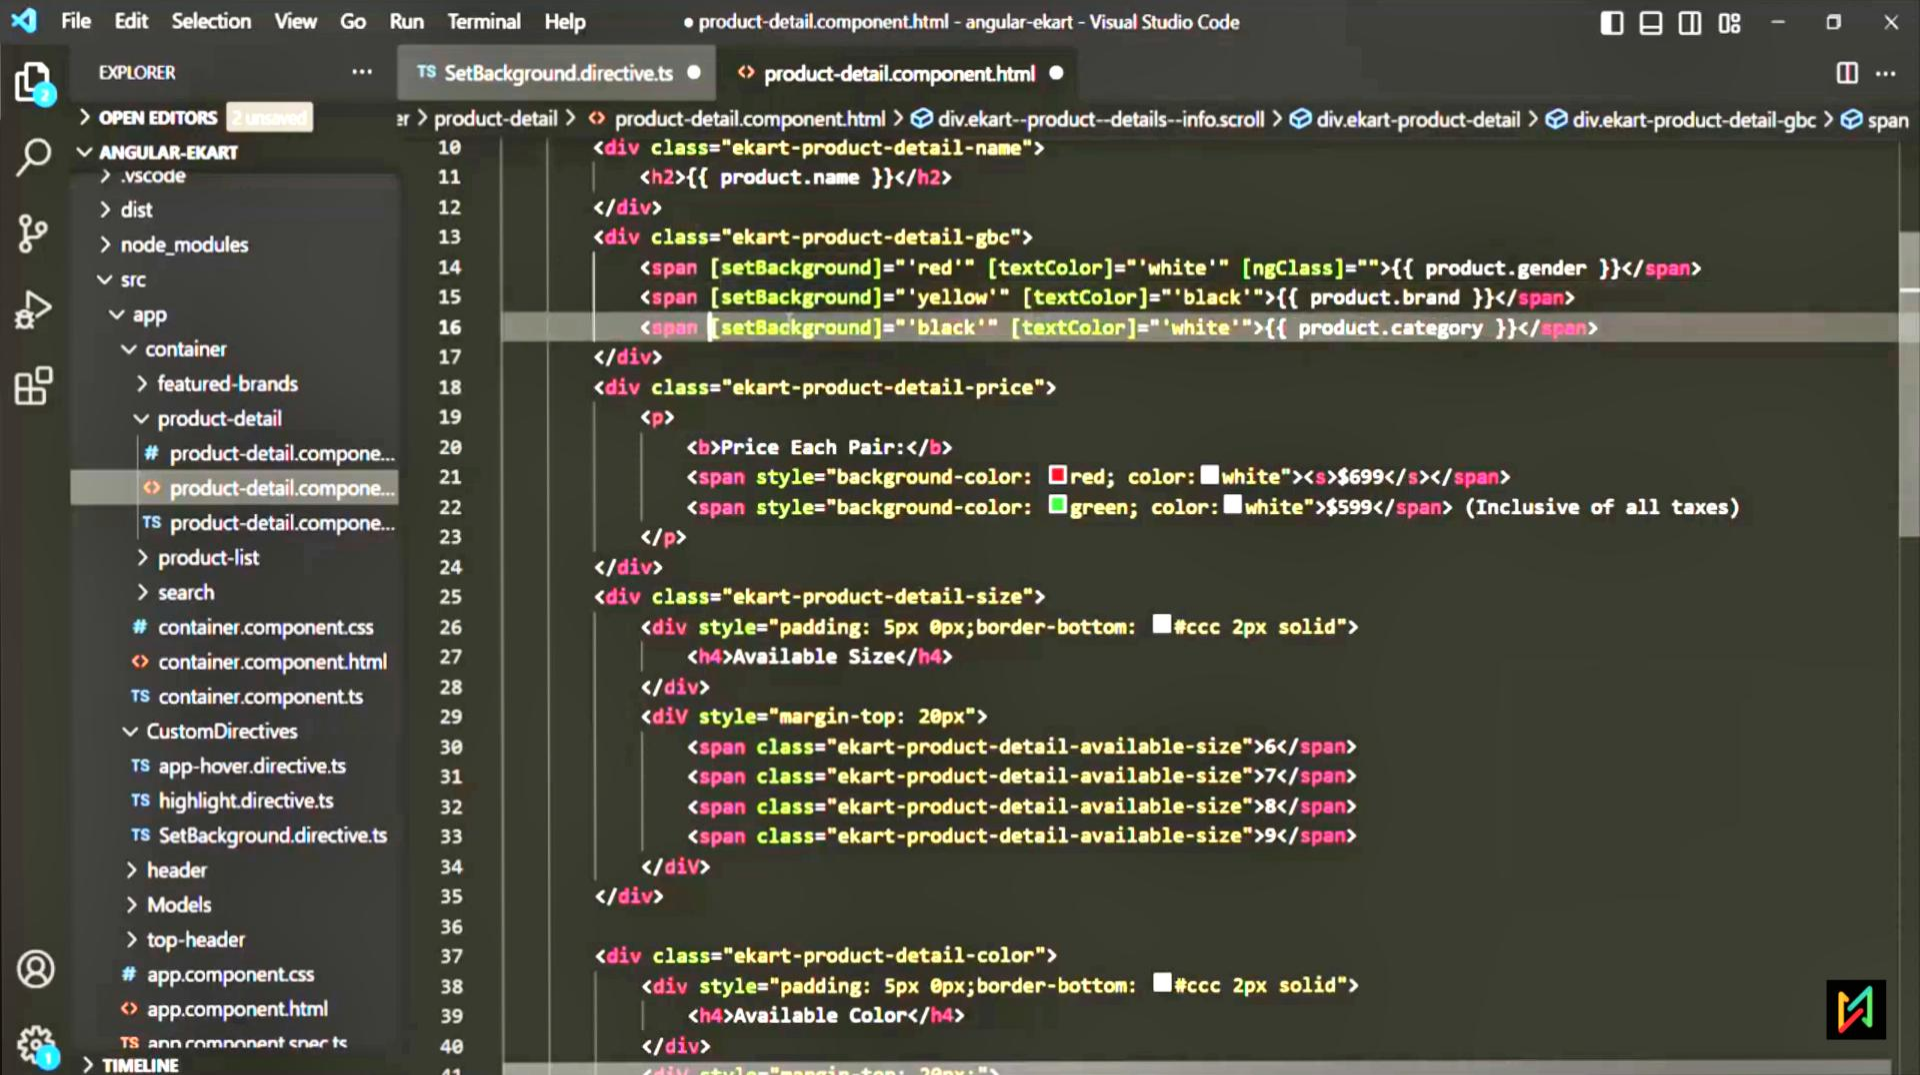



EXPLORER

> OPEN EDITORS

▼ ANGULAR-EKART

- > .vscode
- > dist
- > node_modules
- ▼ src
 - ▼ app
 - ▼ container
 - > featured-brands
 - ▼ product-detail
 - # product-detail.compone...
 - <> product-detail.compone...
 - TS product-detail.compone...
 - > product-list
 - > search
 - # container.component.css
 - <> container.component.html
 - TS container.component.ts
 - ▼ CustomDirectives
 - TS app-hover.directive.ts
 - TS highlight.directive.ts
 - TS SetBackground.directive.ts
 - > header
 - > Models
 - > top-header
 - # app.component.css
 - <> app.component.html
 - TS app.component.ts

> TIMELINE

TS SetBackground.directive.ts

<> product-detail.component.html

src > app > CustomDirectives > TS SetBackground.directive.ts > SetBackground > backColor

```
1  import { Directive, ElementRef, OnInit, Renderer2, Input } from "@angular/core";
2
3  @Directive({
4    selector: '[setBackground]'
5  })
6  export class SetBackground implements OnInit{
7    //private element: ElementRef;
8    //private renderer: Renderer2;
9    @Input('setBackground') backgroundColor: String = '#36454F';
10   @Input() textColor: string = 'White';
11
12   constructor(private element: ElementRef, private renderer: Renderer2){
13     //this.element = element;
14     //this.renderer = renderer;
15   }
16
17   ngOnInit(){
18     // this.element.nativeElement.style.backgroundColor = '#36454F';
19     // this.element.nativeElement.style.color = 'white';
20     this.renderer.setStyle(this.element.nativeElement, 'backgroundColor', this.backgroundColor);
21     this.renderer.setStyle(this.element.nativeElement, 'color', this.textColor);
22     //this.renderer.setAttribute(this.element.nativeElement, 'title', 'This is example title');
23   }
24 }
```





EXPLORER

> OPEN EDITORS

✓ ANGULAR-EKART

> .vscode

> dist

> node_modules

✓ src

✓ app

✓ container

> featured-brands

✓ product-detail

product-detail.compone...

< product-detail.compone...

TS product-detail.compone...

> product-list

> search

container.component.css

< container.component.html

TS container.component.ts

✓ CustomDirectives

TS app-hover.directive.ts

TS highlight.directive.ts

TS SetBackground.directive.ts

> header

> Models

> top-header

app.component.css

< app.component.html

TS app.component.ts

> TIMELINE

TS SetBackground.directive.ts

< product-detail.component.html

src > app > CustomDirectives > TS SetBackground.directive.ts > SetBackground > title

```
1  import { Directive, ElementRef, OnInit, Renderer2, Input } from "@angular/core";
2
3  @Directive({
4    selector: '[setBackground]'
5  })
6  export class SetBackground implements OnInit{
7    //private element: ElementRef;
8    //private renderer: Renderer2;
9    @Input('setBackground') backgroundColor: String = '#36454F';
10   @Input() textColor: string = 'White';
11   @Input() title: string = "My Title"
12
13   constructor(private element: ElementRef, private renderer: Renderer2){
14     //this.element = element;
15     //this.renderer = renderer;
16   }
17
18   ngOnInit(){
19     // this.element.nativeElement.style.backgroundColor = '#36454F';
20     // this.element.nativeElement.style.color = 'white';
21     this.renderer.setStyle(this.element.nativeElement, 'backgroundColor', this.backgroundColor);
22     this.renderer.setStyle(this.element.nativeElement, 'color', this.textColor);
23     //this.renderer.setAttribute(this.element.nativeElement, 'title', 'This is example title');
24   }
25 }
```



File

Edit

Selection

View

Go

Run

Terminal

Help

product-detail.component.html - angular-ekart - Visual Studio Code

EXPLORER

...

TS SetBackground.directive.ts

product-detail.component.html

OPEN EDITORS

angular-ekart

.vscode

dist

node_modules

src

app

container

featured-brands

product-detail

product-detail.compone...

product-detail.compone...

TS product-detail.compone...

product-list

search

container.component.css

container.component.html

TS container.component.ts

CustomDirectives

TS app-hover.directive.ts

TS highlight.directive.ts

TS SetBackground.directive.ts

header

Models

top-header

app.component.css

app.component.html

TS app.component.spec.ts

TIMELINE

src > app > container > product-detail > product-detail.component.html > div.ekart--product--details--info.scroll > div.ekart-product-detail > div.ekart-product

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

<div class="ekart-product-detail-name">

<h2>{{ product.name }}</h2>

</div>

<div class="ekart-product-detail-gbc">

{{ product.gender }}

{{ product.brand }}

{{ product.category }}

</div>

<div class="ekart-product-detail-price">

<p>

Price Each Pair:

<s>\$699</s>

\$599 (Inclusive of all taxes)

</p>

</div>

<div class="ekart-product-detail-size">

<div style="padding: 5px 0px;border-bottom: #ccc 2px solid">

<h4>Available Size</h4>

</div>

<div style="margin-top: 20px">

6

7

8

9

</div>

</div>

<div class="ekart-product-detail-color">

<div style="padding: 5px 0px;border-bottom: #ccc 2px solid">

<h4>Available Color</h4>

</div>

<div style="margin-top: 20px">



EXPLORER

> OPEN EDITORS

ANGULAR-EKART

> .vscode

> dist

> node_modules

src

app

container

> featured-brands

product-detail

product-detail.compone...

<> product-detail.com... 5

TS product-detail.compone...

> product-list

> search

container.component.css

<> container.component.html

TS container.component.ts

CustomDirectives

TS app-hover.directive.ts

TS highlight.directive.ts

TS SetBackground.directive.ts

> header

> Models

> top-header

app.component.css

<> app.component.html

TS app.component.ts

> TIMELINE

TS SetBackground.directive.ts

<> product-detail.component.html 5

src > app > CustomDirectives > TS SetBackground.directive.ts > SetBackground > ngOnInit

```
1  import { Directive, ElementRef, OnInit, Renderer2, Input } from "@angular/core";
2
3  @Directive({
4    selector: '[setBackground]'
5  })
6  export class SetBackground implements OnInit{
7    //private element: ElementRef;
8    //private renderer: Renderer2;
9    // @Input('setBackground') backColor: String = '#36454F';
10   // @Input() textColor: string = 'White';
11
12   @Input('setBackground') changeTextAndBackColor: {backColor: string, textColor: string};
13
14   constructor(private element: ElementRef, private renderer: Renderer2){
15     //this.element = element;
16     //this.renderer = renderer;
17   }
18
19   ngOnInit(){
20     // this.element.nativeElement.style.backgroundColor = '#36454F';
21     // this.element.nativeElement.style.color = 'white';
22     this.renderer.setStyle(this.element.nativeElement, 'backgroundColor', this.changeTextAndBackColor.backColor);
23     this.renderer.setStyle(this.element.nativeElement, 'color', this.changeTextAndBackColor.textColor);
24     //this.renderer.setAttribute(this.element.nativeElement, 'title', 'This is example title');
25   }
26 }
```



