

POLITECNICO
MILANO 1863

SCUOLA DI INGEGNERIA INDUSTRIALE
E DELL'INFORMAZIONE

Towards fast and side-channel resistant implementations of Hamming Quasi-Cyclic: a case study on ARM Cortex-M4 devices

Tesi di Laurea Magistrale in
Ingegneria Informatica
Computer Science and Engineering

Author: **Domenico Cacace**

Student ID: 977835
Advisor: Prof. Alessandro Barenghi
Co-advisor: Prof. Gerardo Pelosi
Academic Year: 2022-23

Abstract

Cryptography plays a fundamental role in the security of modern information systems, as it guarantees confidentiality, integrity and authenticity of data. Current cryptosystems can achieve these goals, but the advent of quantum computers undermines their security. To prepare for the *quantum apocalypse*, in 2016 the U.S. National Institute of Standards and Technologies started a competition to evaluate and standardize one or more post-quantum secure schemes; other than security strenght, candidates are also judged on their efficiency and security against side-channel attacks, which are especially relevant in the context of embedded devices.

In this thesis we present the first constant-time imlementation of HQC tailored for Cortex-M4, showing its efficiency and constant-time behavior; furthermore, we implement an efficient masking scheme that protects the public key encryption scheme against power side-channel attacks, showing its potential efficacy in practice. Finally, we compare the performance of our implementations with other standardization candidates, highlighting the efficiency and shortcomings of our approach.

Keywords: post-quantum cryptography, code-based cryptosystems, constant-time implementation, masking, HQC

Sommario

La crittografia gioca un ruolo fondamentale nella sicurezza dei moderni sistemi informativi, garantendo confidenzialità, integrità e autenticità dei dati. Le primitive crittografiche attuali possono garantire queste proprietà, ma l'avvento dei computer quantistici mina la loro sicurezza. In vista dell'*apocalisse quantistica*, nel 2016 l'istituto per la standardizzazione e la tecnologia degli Stati Uniti ha avviato una competizione per valutare e standardizzare una o più primitive crittografiche resistenti ai computer quantistici; oltre alla sicurezza formale, i candidati sono giudicati anche in base alla loro efficienza e alla loro resistenza agli attacchi di tipo side-channel, che sono particolarmente rilevanti nel caso di dispositivi embedded.
In questa tesi presentiamo la prima implementazione a tempo costante di HQC ottimizzata per processori Cortex-M4, mostrandone l'efficienza e l'esecuzione in tempo costante; inoltre, implementiamo uno schema di masking efficiente in grado di proteggere lo schema di crittografia a chiave pubblica contro attacchi side-channel basati sul consumo energetico, mostrandone empiricamente la potenziale efficacia. Infine, confrontiamo le prestazioni delle nostre implementazioni con altri candidati per la standardizzazione, evidenziandone l'efficienza e le limitazioni.

Parole chiave: crittografia post-quantistica, crittosistemi basati su codici, implementazioni a tempo costante, masking, HQC

Contents

Abstract **i**

Sommario **iii**

Contents **v**

1 Introduction **1**

2 Background **3**

2.1 Abstract Algebra . . . 3
2.1.1 Field theory . . . 3
2.1.2 Frobenius automorphism . . . 5
2.2 Polynomial multplication . . . 6
2.2.1 Karatsuba multiplication . . . 6
2.2.2 Fast Fourier Transform . . . 8
2.2.3 Additive FFT . . . 11
2.3 Coding Theory . . . 18
2.3.1 General definitions . . . 18
2.3.2 Code families . . . 20
2.3.3 Difficult problems for cryptography . . . 21
2.4 Side Channel Attacks . . . 22
2.4.1 Timing attacks . . . 22
2.4.2 Power attacks . . . 24
2.4.3 Countermeasures . . . 26
2.5 Hamming Quasi-Cyclic . . . 27
2.5.1 Encryption scheme . . . 27
2.5.2 Public Key Encryption . . . 27
2.5.3 Key Encapsulation Mechanism . . . 28
2.5.4 Parameters . . . 29

2.6 Related Work 30

3 Implementation **31**

3.1 Polynomial multiplication 31

3.1.1 Shift and Add 32

3.1.2 Constant-time shift and add 32

3.1.3 Frobenius Additive FFT 33

3.2 Masking 36

3.2.1 Keygen 38

3.2.2 Encrypt 38

3.2.3 Decrypt 39

4 Empirical Evaluations **41**

4.1 Execution time 42

4.2 Constant-time execution 44

4.3 Power measurements 45

4.4 Comparison with other schemes 46

5 Conclusions **49**

Bibliography **51**

A Execution times **59**

List of Figures **61**

List of Tables **63**

List of Algorithms **65**

Listings **67**

List of Symbols **69**

Ringraziamenti **71**

1 | Introduction

In recent years quantum computing has witnessed a rapid increase in popularity, due to new solutions that can solve some of the most challenging problems, not only in computer science but also in many other fields [BHH+21]. However, a quantum computer with a sufficient amount of qubits is a serious threat to most of the current cryptographic schemes, in particular asymmetric ones: quantum algoriths, such as Shor's [Sho94], can break the problems underlying most of the current public-key cryptosystems in polynomial time, instead of the exponential time required by classical computers.
Since 2017 many institutions have started promoting the analysis of quantum-secure cryptosystems, with the most prominent example being the Post-Quantum Cryptography (PQC) standardization contest organized by the U.S. National Institute of Standards and Technologies (NIST). The standardization process started in 2016 and saw 69 candidates from which, after three evaluation rounds, two standard candidates and four alternatives have emerged; the current standardization-elected candidate Key Encapsulation Mechanism (KEM) is Crystals-Kyber [BDK+17], a lattice-based cryptosystem. To obtain resilience in the event of a potentially disruptive attack on lattice-based cryptosystems, the NIST extended the competition with a fourth round, selecting four other candidates that rely on different computationally-hard problems; excluding SIKE, the remaining candidates, namely BIKE [ABB+22], Classic McEliece [BCC+22] and HQC [MAB+18], are all based on the hardness of the syndrome decoding problem.

Hamming Quasi-Cyclic (HQC) is a code-based IND-CCA2 secure KEM whose security relies on the syndrome decoding problem for quasi-cyclic codes. The scheme comprises both a Public Key Encryption scheme (PKE) and a Key Encapsulation Mechanism, obtained by applying the HHK Fujisaki-Okamoto transformation on the former. HQC uses a tensor code with a public generator matrix $\mathbf{G}$ and a random double-circulant code with a systematic parity-check matrix; it is worth noting that the code generated by $\mathbf{G}$ is used only for its error-correcting capability, hence it is public and plays no role in the security proofs.

Our Contribution

In this thesis we present the first fully constant-time software implementation of HQC, together with a comparative analysis constant-time binary polynomial multiplication techniques, tailored for Cortex-M4 microprocessors. We provide an experimental validation of the constant time properties via a battery of statistical t-tests, while varying the CPU frequency to highlight the stability of our solution across different memory access latencies. Our results show that the optimal choice for constant-time multiplications on the Cortex-M4 is a FFT-based approach, in contrast with classic divide-et-impera techniques (*i.e.* Karatsuba) which provide a better performance on x86 architectures.
Moreover, to counter the power attacks, we propose a masking scheme that can be applied to the entire cryptosystem, and present our findings on its potential efficacy; although our empirical results are inconclusive, they offer valuable insights into our testing methodologies and pave the way for future research on the topic.

Organization

The remaining of the thesis is organized as follows. In Chapter 2 we provide a brief introduction to the mathematical concepts required to understand the multiplication techniques, side-channel attacks and the inner workings of HQC. In Chapter 3 we describe our implementation of the multiplication algorithms and the masking scheme. In Chapter 4 we present the experimental results of our implementation, and in Chapter 5 we draw the conclusions of our work.

2 | Background

In this section we lay the theoretical foundations required to understand our work. We begin by recalling basic concepts of abstract algebra, used to describe the polynomial multiplication algorithms and the fundamentals of coding theory; we then explain what are side channels attacks, highlighting how they can be used to exfiltrate information and how to mitigate them. Finally we describe Hamming Quasi-Cyclic, our target cryptosystem.

2.1. Abstract Algebra

To avoid confusion, throughout this thesis we will use the following notation. Unless otherwise specified, capital bold letters denote generic sets ($\mathbf{A}, \mathbf{B}, \cdots$), while lowercase bold letters denote vectors; finite fields are denoted either by $GF(p^n)$ or $\mathbb{F}_{p^n}$. The vector space of dimension n over the binary Galois field $GF(2)$ is denoted by either $\mathbb{F}_2^n$ or $\mathcal{V}$ and has as canonical basis $\{1, \alpha, \cdots, \alpha^{n-1}\}$. The ring of binary polynomials of degree less than n is denoted either as $\mathbb{F}_2[x]/\langle x^n - 1\rangle$ or $\mathcal{R}$; the value of n is chosen in such a way that the algebra in the ring $\mathcal{R}$ is isomorphic to the algebra of $n \times n$ circulant matrices over $\mathbb{F}_2$.

2.1.1. Field theory

Definition 2.1.1 (Group)**.** Let $\mathbf{G}$ be a set. The structure $(\mathbf{G}, \cdot)$ is a *group* if it satisfies the following axioms:

- Closure: For all $a, b \in \mathbf{G}$, $a \cdot b \in \mathbf{G}$.
- Associativity: For all $a, b, c \in \mathbf{G}$, $(a \cdot b) \cdot c = a \cdot (b \cdot c)$.
- Identity: There exists an element $e \in \mathbf{G}$ such that for all $a \in \mathbf{G}$, $e \cdot a = a \cdot e = a$.
- Inverse: For all $a \in \mathbf{G}$, there exists an element $a^{-1} \in \mathbf{G}$ such that $a \cdot a^{-1} = a^{-1} \cdot a = e$.

If the group also satisfies the commutative property (i.e. $a \cdot b = b \cdot a$ for all $a, b \in \mathbf{G}$), then it is called an *abelian group*. We usually call $(\mathbf{G}, +)$ the *additive* group and $(\mathbf{G}, \cdot)$ the *multiplicative* group, with identity elements denoted by 0 and 1, respectively.

Definition 2.1.2 (Ring)**.** Let $\mathbf{R}$ be a set. The structure $(\mathbf{R}, +, \cdot)$ is a *ring* if it satisfies the following properties:

- Additive group: $(\mathbf{R}, +)$ is an abelian group.
- Associativity w.r.t. multiplication: For all $a, b, c \in \mathbf{R}$, $(a \cdot b) \cdot c = a \cdot (b \cdot c)$.
- Distributivity: For all $a, b, c \in \mathbf{R}$, $a \cdot (b + c) = a \cdot b + a \cdot c$ and $(a + b) \cdot c = a \cdot c + b \cdot c$.

Definition 2.1.3 (Field)**.** Let $\mathbf{K}$ be a set. The structure $(\mathbf{K}, +, \cdot)$ is a *field* if it satisfies the following properties:

- Additive group: $(\mathbf{K}, +)$ is an abelian group.
- Multiplicative group: $(\mathbf{K} \setminus \{0\}, \cdot)$ is an abelian group.
- Distributivity: For all $a, b, c \in \mathbf{K}$, $a \cdot (b + c) = a \cdot b + a \cdot c$ and $(a + b) \cdot c = a \cdot c + b \cdot c$.

Any field is also a ring, but the converse is not necessarily true.

Definition 2.1.4 (Characteristic)**.** Let $\mathbf{K}$ be a field. The *characteristic* of $\mathbf{K}$ is the smallest positive integer n such that

$$\underbrace{1 + \cdots + 1}_{n \text{ times}} = 0$$

Definition 2.1.5 (Order)**.** Let $\mathbf{K}$ be a field. The *order* of $\mathbf{K}$ is the amount of elements in $\mathbf{K}$; if the order of $\mathbf{K}$ is finite, it is also called a Galois field. A Galois field of order q, denoted as $\mathbb{F}_q$ or $GF(q)$, exists if and only if $q = p^n$ for some prime p and some $n \geqslant 1$. All Galois fields of the same order are the same object up to an isomorphism.

Galois fields can be constructed in two ways:

- Primitive fields: $GF(p) \cong \mathbb{Z}_p$, with p prime, is a field of order and characteristic p.
- $GF(p^n) = GF(p)[x]/P(x)$ with $P(x)$ irreducible polynomial in $GF(p)[x]$ of degree n, is a field of order p^n and characteristic p.

Definition 2.1.6 (Primitive element)**.** Let $GF(q)$ be a Galois field. An element $a \in GF(q)$ is a *primitive element* if every nonzero element of $GF(q)$ is a power of a; in other words, a is a generator of the multiplicative group of $GF(q)$. Since the multiplicative group of $GF(q)$ has order $q - 1$, primitive elements are also called $(q - 1)$-th roots of unity.

Definition 2.1.7 (Vector space)**.** Let $(\mathbf{K}, +, \cdot)$ be a field. A subset $\mathbf{F} \subseteq \mathbf{K}$ with two binary operations ($+$ and $\cdot$) is a vector space if the following hold:

- Vector addition: for all $\mathbf{v}, \mathbf{w} \in \mathbf{V}$, $\mathbf{v} + \mathbf{w} \in \mathbf{V}$.
- Scalar multiplication: for all a in $\mathbf{K}$ and all $\mathbf{v} \in \mathbf{V}$, $a\mathbf{v} \in \mathbf{V}$.

Definition 2.1.8 (Field extension)**.** Let $\mathbf{K}$ and $\mathbf{L}$ be fields. If $\mathbf{K} \subseteq \mathbf{L}$, then we say that $\mathbf{K}$ is a *subfield* of $\mathbf{L}$; conversely, we say that $\mathbf{L}$ is a *field extension* of $\mathbf{K}$. Given a field extension, denoted as $\mathbf{L}/\mathbf{K}$, the field $\mathbf{L}$ is a vector space over $\mathbf{K}$; the dimension of the vector space defines the *degree of the extension*, and is denoted by $[\mathbf{L} : \mathbf{K}]$. In the case of finite fields, $[GF(p^n) : GF(p)] = n$.

> **Example: Binary fields**
> The smallest Galois field is $GF(2)$, which is isomorphic to $\mathbb{Z}_2 = \{0, 1\}$. We can build $\mathbb{F}_8 = GF(2^3)$ as $GF(2)[x]/\langle X^3 + X + 1\rangle$. The elements of $\mathbb{F}_8$ are then the binary polynomials of degree strictly less than $n = 3$; to avoid confusion, the elements are written as polynomials in the variable α, where $P(\alpha) = 0$.
> We have that $\mathbb{F}_8 = \{0, 1, \alpha, 1 + \alpha, \alpha^2, 1 + \alpha^2, \alpha + \alpha^2, 1 + \alpha + \alpha^2\}$, so the order of the field is 8. Moreover, since $1 + 1 = 0$ in $GF(2)$, we have that $1 + 1 = 0$ in $\mathbb{F}_8$ as well, so the characteristic of $\mathbb{F}_8$ is 2.
> By construction, $\mathbb{F}_8$ is a field extension of $GF(2)$ of degree 3; the vector space $\mathbb{F}_8$ is thus a vector space over $GF(2)$ of dimension 3, having as basis the elements $\{1, \alpha, \alpha^2\}$.

2.1.2. Frobenius automorphism

Definition 2.1.9 (Frobenius map)**.** Let $\mathbb{F}_2$ be the binary field. The Frobenius map is the automorphism defined as:

$$\phi : \mathbb{F}_2 \to \mathbb{F}_2, \quad \phi(x) = x^2 \tag{2.1}$$

Let $\mathbf{S}$ be a set of field elements for some binary field $GF(2^n)$; with the notation $\phi(\mathbf{S})$ we denote the set built as $\{\phi(x) \mid x \in \mathbf{S}\}$; moreover, with the notation $\phi^{\circ j}$ we denote the function applying the Frobenius map j times.

Definition 2.1.10 (Order of ϕ)**.** Let $\mathbf{S}$ be a set. The order of ϕ on $\mathbf{S}$, denoted as $Ord_\phi(\mathbf{S})$ is the smallest positive integer j such that $\phi^{\circ j}(\mathbf{S}) = \mathbf{S}$.

Definition 2.1.11 (Frobenius partition)**.** Given the sets $\mathbf{S}, \mathbf{O}$ such that $Ord_\phi(\mathbf{S}) = j$, we say that $\mathbf{S}$ is a Frobenius partition of $\mathbf{O}$ if

$$\mathbf{O} = \mathbf{S} \cup \phi(\mathbf{S}) \cup \cdots \cup \phi^{\circ(j-1)}(\mathbf{S}) \tag{2.2}$$

and all the sets $\phi^{\circ i}(\mathbf{S})$ are pairwise disjoint.

In other words, the Frobenius partition $\mathbf{S}$ splits the set $\mathbf{O}$ into disjoint sets, where the equivalence relation is determined by the j-application of the Frobenius map ϕ^j.

2.2. Polynomial multplication

Let $a(x), b(x) \in \mathcal{R}$ be two polynomials. To calculate the product $c(x) = a(x) \cdot b(x)$ the most straightforward approach, also known as the *schoolbook* algorithm, consists in multiplying each monomial of the first with each monomial of the second, add together the results of the same degree and reduce the result modulo $x^n - 1$. With this method we can calculate the product of the polynomials with $\mathcal{O}(n^2)$ multiplications and $\mathcal{O}(n^2)$ additions, as the degree of the operands is at most $n - 1$. Even though this approach is simple to understand and implement, it does not scale well as the degree of the operands increases: for this reason, other multiplication algorithms have been proposed.

As shown by Bernstein in [Ber01], we can think of most of the polynomial multiplication algorithms in the literature as follows:

- **Lifting** the operands to different rings via a ring homomorphism f
- Multiplying the lifted polynomials in the ring
- **Mapping** the result back to the original ring via the inverse homomorphism f^{-1}

By carefully choosing the destination ring and the homomorphism, we can obtain algorithms with drastically better asymptotic complexity: in the remainder of this section we will discuss two of the most common algorithms, Karatsuba and the Fast Fourier Transform.

2.2.1. Karatsuba multiplication

The Karatsuba algorithm [KO62] is a divide and conquer algorithm that splits a n-degree polynomial into two $n/2$-degree polynomials and then calculates the product of the original polynomials in $\mathcal{O}(n^{\log_2 3})$ operations.

Starting from $a(x)$, $b(x)$ of degree n and an integer $m < n$, we can write

$$a(x) = a_0(x) + x^m \cdot a_1(x)$$
$$b(x) = b_0(x) + x^m \cdot b_1(x)$$

where $a_0(x)$ and $b_0(x)$ have degree less than m. This split is valid for any positive $m < n$, but in order to achieve the aforementioned complexity we split the inputs into equal parts.

At this point, we can calculate the product $c(x) = a(x) \cdot b(x)$ as

$$\begin{aligned} c(x) &= a(x) \cdot b(x) \\ &= (a_0(x) + x^m \cdot a_1(x)) \cdot (b_0(x) + x^m \cdot b_1(x)) \\ &= a_1(x) \cdot b_1(x) \cdot x^{2m} + (a_1(x) \cdot b_0(x) + a_0(x) \cdot b_1(x)) \cdot x^m + a_0(x) \cdot b_0(x) \\ &= z_2(x) \cdot x^{2m} + z_1(x) \cdot x^m + z_0(x) \end{aligned}$$

where

$$z_2(x) = a_1(x) \cdot b_1(x)$$
$$z_1(x) = a_1(x) \cdot b_0(x) + a_0(x) \cdot b_1(x)$$
$$z_0(x) = a_0(x) \cdot b_0(x)$$

Karatsuba observed that, at the cost of some few additions, we can calculate $a(x)b(x)$ with three multiplications by rewriting z_1 as

$$z_1(x) = (a_0(x) + a_1(x)) \cdot (b_0(x) + b_1(x)) - z_0(x) - z_2(x)$$

Example: Karatsuba multiplication

From the ring of binary polynomials $\mathcal{R}$ we take $a(x) = 1 + x + x^3$ and $b(x) = x + x^2$; by choosing $m = 2$, we rewrite the operands as

$$a(x) = (1 + x) + x^2 \cdot (x)$$
$$b(x) = (x) + x^2 \cdot (1)$$

and calculate the subproducts as

$$z_2(x) = (1 + x) \cdot (x) = x + x^2$$
$$z_0(x) = (x) \cdot (1) = x$$
$$z_1(x) = (1 + x + x) \cdot (x + 1) - (x) - (x + x^2) = 1 + x + x^2$$

From the above, we can calculate the full product as

$$\begin{aligned} c(x) &= (x) \cdot x^{2 \cdot 2} + (1 + x + x^2) \cdot x^2 + (x + x^2) \\ &= x^5 + x^4 + x^3 + x \end{aligned}$$

The input polynomials can be split into an arbitrary amount of parts, and the product calculated in a similar fashion: such a product is calculated by the Toom-Cook algorithm [CA69], which is a generalization of Karatsuba's algorithm.

2.2.2. Fast Fourier Transform

We can approach polynomial multiplication in a totally different way. Instead of multiplying the polynomial coefficients, we can evaluate the inputs at a set of points (*sampling*) and, for each pair of samples $a(i), b(i)$, calculate the pointwise product $c(i) = a(i) \cdot b(i)$. By performing this operation $2n + 1$ times, where n is the maximum degree of the input polynomials, the interpolation theorem guarantees that the (unique) polynomial that interpolates the samples $c(i)$ is the product of the original polynomials.

Example:
Let $a(x) = x^2 + 2x + 3$ and $b(x) = 4x + 5$ be polynomials with real coefficients of degree at most $n = 2$; since their product will have degree at most $2n = 4$ we evaluate the polynomials at $2n + 1$ points:

$$\begin{aligned} a(0) &= 1 \cdot 0^2 + 2 \cdot 0 + 3 = 3 & b(0) &= 0 \cdot 0^2 + 4 \cdot 0 + 5 = 5 \\ a(1) &= 1 \cdot 1^2 + 2 \cdot 1 + 3 = 6 & b(1) &= 0 \cdot 1^2 + 4 \cdot 1 + 5 = 9 \\ a(2) &= 1 \cdot 2^2 + 2 \cdot 2 + 3 = 11 & b(2) &= 0 \cdot 2^2 + 4 \cdot 2 + 5 = 13 \\ a(3) &= 1 \cdot 3^2 + 2 \cdot 3 + 3 = 18 & b(3) &= 0 \cdot 3^2 + 4 \cdot 3 + 5 = 17 \\ a(4) &= 1 \cdot 4^2 + 2 \cdot 4 + 3 = 27 & b(4) &= 0 \cdot 4^2 + 4 \cdot 4 + 5 = 21 \end{aligned}$$

We can then calulate the pointwise multiplication of the samples

$$\begin{aligned} c(0) =& a(0) \cdot b(0) = 3 \cdot 5 = 15 \\ c(1) =& a(1) \cdot b(1) = 6 \cdot 9 = 54 \\ c(2) =& a(2) \cdot b(2) = 11 \cdot 13 = 143 \\ c(3) =& a(3) \cdot b(3) = 18 \cdot 17 = 306 \\ c(4) =& a(4) \cdot b(4) = 27 \cdot 21 = 567 \end{aligned}$$

Finally, we can interpolate the result to obtain the coefficients of the product:

$$c(x) = 4x^3 + 13x^2 + 22x + 15$$

This approach might appear slower than the schoolbook method: the sampling requires $\mathcal{O}(n^2)$ operations, the pointwise product $\mathcal{O}(n)$ and the interpolation up to $\mathcal{O}(n^3)$ if we use a naive method such as Gaussian elimination; however, with the right choice of sampling points, we can drastically reduce the operations required in all three steps.

Instead of sampling at $N = 2n + 1$ random points, we can choose the points to be the N-th roots of unity, *i.e.* the points $\omega_k = e^{-\frac{2\pi ik}{N}}$ for $k = 0, \dots, N-1$. By writing the polynomial as a sum with coefficients x_i, the sampling at the N-th roots of unity can be written as

$$\mathcal{F}(\omega_k) = \sum_{n=0}^{N} x_n e^{-\frac{2\pi ik}{N} n} \tag{2.3}$$

which corresponds to the Discrete Fourier transform (DFT) of the polynomial.

At this point we can perform the pointwise product in the *transformed* domain. Once we get the samples X_k, we would have to interpolate them to get the coefficients of the product polynomial; however, Parseval's theorem ties the sequences of samples (x_n, y_n) and their DFTs (X_n, Y_n) as in the following equation:

$$\sum_{n=0}^{N} x_n \cdot y_n^* = \frac{1}{N} \sum_{k=0}^{N} X_k \cdot Y_k^* \tag{2.4}$$

Therefore, since the DFT is invertible, we can apply the inverse DFT to the samples X_k to get the coefficients of the product polynomial:

$$\mathcal{F}^{-1}(X_k) = \frac{1}{N}\sum_{n=0}^{N} X_n e^{\frac{2\pi i k}{N}n} \tag{2.5}$$

The algorithms that compute the Discrete Fourier Transform of a sequence (or its inverse) are called Fast Fourier transforms (FFTs), and have an asymptotic complexity of $\mathcal{O}(n \log n)$ for n a power of 2; in case this last condition is not met, the inputs are padded with zeros to the next power of 2 in order to achieve the same complexity.

Cooley-Tukey FFT

The Cooley-Tukey FFT [CT65] is the most common FFT algorithm. It is a *divide et impera* algorithm, which recursively expresses a DFT of size $N = N_1 N_2$ into N_1 smaller DFTs of size N_2 each. The simplest form of the Cooley-Tukey algorithm is the radix-2 decimation-in-time FFT, which splits a size-N DFT into two size-$N/2$ smaller DFTs, interleaving odd and even-indexed inputs. Assuming that N is a power of 2, we can rewrite the DFT as:

$$\begin{aligned}
X_k &= \sum_{n=0}^{N-1} x_n e^{-\frac{2\pi i}{N}nk} \\
&= \sum_{m=0}^{\frac{N}{2}-1} x_{2m} e^{-\frac{2\pi i}{N}(2m)k} + \sum_{m=0}^{\frac{N}{2}-1} x_{2m+1} e^{-\frac{2\pi i}{N}(2m+1)k} \\
&= \sum_{m=0}^{\frac{N}{2}-1} x_{2m} e^{-\frac{2\pi i}{\frac{N}{2}}mk} + e^{-\frac{2\pi i}{N}k} \sum_{m=0}^{\frac{N}{2}-1} x_{2m+1} e^{-\frac{2\pi i}{\frac{N}{2}}mk} \\
&= E_k + e^{-\frac{2\pi i}{N}k} O_k \qquad \text{for } k = 0, \cdots, \frac{N}{2} - 1
\end{aligned}$$

where E_k and O_k group the evaluations of the even and odd-indexed input coefficients, respectively.

Because of the periodicity of the complex exponential, we can also write:

$$\begin{aligned}
X_{k+\frac{N}{2}} &= \sum_{m=0}^{\frac{N}{2}-1} x_{2m} e^{-\frac{2\pi i}{\frac{N}{2}} m(k+\frac{N}{2})} + e^{-\frac{2\pi i}{N}(k+\frac{N}{2})} \sum_{m=0}^{\frac{N}{2}-1} x_{2m+1} e^{-\frac{2\pi i}{\frac{N}{2}} m(k+\frac{N}{2})} \\
&= \sum_{m=0}^{\frac{N}{2}-1} x_{2m} e^{-\frac{2\pi i}{\frac{N}{2}} mk} e^{-2\pi mi} + e^{-\frac{2\pi i}{N}k} e^{-\pi i} \sum_{m=0}^{\frac{N}{2}-1} x_{2m+1} e^{-\frac{2\pi i}{\frac{N}{2}} mk} e^{-2\pi mi} \\
&= \sum_{m=0}^{\frac{N}{2}-1} x_{2m} e^{-\frac{2\pi i}{\frac{N}{2}} mk} - e^{-\frac{2\pi i}{N}k} \sum_{m=0}^{\frac{N}{2}-1} x_{2m+1} e^{-\frac{2\pi i}{\frac{N}{2}} mk} \\
&= E_k - e^{-\frac{2\pi i}{N}k} O_k \qquad \text{for } k = 0, \cdots, \frac{N}{2} - 1
\end{aligned}$$

This means that we can express a DFT of size N as two DFTs of size $N/2$; moreover, we can re-use intermediate results to calculate multiple outputs, as the roots of unity are the same for both DFTs and the complex exponential is periodic ($-\omega^k = \omega^{k+\frac{N}{2}}$). Since the base case of the recursion has complexity $\mathcal{O}(n)$ we get the recurrence relation $T(n) = 2T(\frac{N}{2}) + \mathcal{O}(n)$; following the Master theorem [BHS80], the computational complexity of the Cooley-Tukey FFT is $\mathcal{O}(n \log n)$.

2.2.3. Additive FFT

The Cooley-Tukey FFT works when the n points to sample are n-th roots of unity, and hence form a cyclic multiplicative group; this and similar algorithms are also referred to as *multiplicative* FFTs, as they are based on the factorization of $x^n - 1$.
Unfortunately, multiplicative FFTs do not work when the underlying field does not admit non-trivial primitive roots of unity, as it happens for fields of characteristic two; for this reason, *additive* FFTs were invented [WZ88, Can89]. Instead of using the n-th roots of unity, additive FFTs evaluate the polynomials at the powers of a primitive element of the field, as well as the zero element. Some examples of such algorithms that work on binary fields are the Gao-Mateer FFT [GM10] and the Lin-Chung-Han FFT [LCH14], which perform similar procedures but require different representations for the polynomials.
We will now focus on the LCH FFT, as it will be the foundation for a faster approach based on the Frobenius map; for this reason, we will consider the case $n = 2^m$ where m is a power of 2.

Cantor basis

In [Can89] Cantor showed how to get a special basis for the vector space $\mathbb{F}_2^m$ in which it is possible to compute the FFT efficiently for any $m = p^n$, with p a prime number; later

in [GM10] Gao and Mateer used a simpler construction for the special case $p = 2$, where the Cantor basis $\mathbf{v} = (v_1, \cdots, v_m)$ of $\mathbb{F}_2^m$ follows the structure:

$$v_1 = 1, \quad v_i^2 + v_i = v_{i-1} \text{ for } i > 1 \tag{2.6}$$

With respect to the Cantor basis $\mathbf{v}$, we define its sequence of subspaces of $\mathbb{F}_2^m$ as:

$$\mathbf{W}_0 := \{0\}, \quad \mathbf{W}_i := span\{v_0, \cdots, v_{i-1}\} \text{ for } i \geqslant 1 \tag{2.7}$$

By construction, we have that $\mathbf{W}_0 \subset \mathbf{W}_1 \subset \cdots \subset \mathbf{W}_{m-1} = \mathbb{F}_{2^m}$ and the basis for a smaller space is contained into the basis of a larger space: this means that we can arbitrarily treat elements of smaller fields as elements in the larger fields by padding zeros to the extra dimensions.

With respect to each element of the basis v_i we can define its subspace polynomial $s_i(x)$, also called vanishing polynomial, as:

$$s_i(x) = \prod_{a \in \mathbf{W}_i} (x - a) \tag{2.8}$$

Since $\dim(\mathbf{W}_i) = i$ we have $\deg(s_i(x)) = |\mathbf{W}_i| = 2^i$. The vanishing polynomials, as shown in [Can89, GM10], satisfy the following useful properties:

- linearity: $s_i(x + y) = s_i(x) + s_i(y)$
- recursivity: $s_{i+j}(x) = s_i(s_j(x))$ or, equivalently, $s_{i+1}(x) = s_i(x)^2 + s_i(x)$
- $s_i(v_i) = 1$, for v_i in the Cantor basis (see [CCK+17], Appendix A for the proof)
- the roots of $s_i(x)$ are the elements of $\mathbf{W}_i$

Note that $\mathbf{W}_i$ is also a field whenever i is a power of two; in that case, the vanishing polynomial has the form $s_i(x) = x^{2^i} + x$.

Example: Cantor basis in $\mathbb{F}_{16}$

Recalling that $GF(16) = GF(2)[x]/\langle X^4 + X + 1\rangle$ and that $v_1 = 1$, we can compute $v_i = \beta(1) + \gamma(x) + \delta(x^2) + \epsilon(x^3)$, where the coefficients can be found by solving:

$$\beta(1 + 1^2) + \gamma(x + x^2) + \delta(x^2 + (x^2)^2) + \epsilon(x^3 + (x^3)^2) = v_{i-1}$$

The resulting Cantor basis is $\mathbf{v} = (1, \alpha + \alpha^2, \alpha, \alpha + \alpha^3)$, inducing the subspaces $\mathbf{W}_i$:

- $\mathbf{W}_0 = \{0\}$

- $\mathbf{W}_1 = \{0, 1\}$
- $\mathbf{W}_2 = \{0, 1, \alpha + \alpha^2, 1 + \alpha + \alpha^2\}$
- $\mathbf{W}_3 = \{0, 1, \alpha + \alpha^2, 1 + \alpha + \alpha^2, \alpha, 1 + \alpha, \alpha^2, 1 + \alpha^2\}$
- $\mathbf{W}_4 = \mathbb{F}_{16}$

Consequently, the vanishing polynomials are:

- $s_0(x) = x$
- $s_1(x) = x + x^2$
- $s_2(x) = x^4 + x$
- $s_3(x) = x^8 + x^4 + x^2 + x$
- $s_4(x) = x^{16} + x$

A *novel* polynomial basis In order to perform the LCH FFT, the input polynomial has to be represented in a different basis. Given the Cantor basis $\mathbf{v} = (v_1, \cdots, v_m)$, we define the *novelpoly* basis with respect to $\mathbf{v}$ as $(X_1, \cdots, X_{n-1})$, defined as follows:

$$X_k(x) = \prod (s_i(x))^{b_i} \qquad \text{where } k = \sum_{i=0}^{\log_2 n} b_i 2^i \tag{2.9}$$

Algorithm 1: Basis conversion from monomial to *novelpoly*

Input: $f(x) = f_0 + f_1 x + f_2 x^2 + \cdots + f_{n-1} x^{n-1}$, binary polynomial in canonical basis

Output: $g(X) = g_0 + g_1 X_1(x) + g_2 X_2(x) + \cdots + g_{n-1} X_{n-1}(x)$, the representation of $f(x)$ in *novelpoly* basis

Data: $y = x^{2^i} + x = s_i(x)$, the i-th vanishing polynomial

Function `BasisCvt`$(f(x))$
  if $\deg f(x) \leqslant 1$ **then**
    return $g(X) \leftarrow f_0 + f_1 X_1$;
  $i \leftarrow \max(2^k)$ s.t. $\deg(s_i(x)) \leqslant \deg(f(x))$;
  $\hat{h}(y) \leftarrow h_0(x) + h_1(x)y + \cdots + h_{m-1}(x)y^{m-1}$; // $h_i(x) \in \mathbb{F}_2[x]$
  $h'(Y) \leftarrow$ `BasisCvt`$(\hat{h}(y))$; // $q_0(x) + \cdots + q_{m-1} X_{(m-1)2^k}$
  for $j = 0$ *to* $m - 1$ **do**
    $g_j(X) \leftarrow$ `BasisCvt`$(q_j(x))$;
  return $g_0 + g_1(X)X_{2^k} + \cdots + g_{n-1}(X)X_{(m-1)2^k}$;

Divide et impera: the Butterflies

As with other FFT algorithms, in the LCH FFT we recursively split the input polynomial into two half sized polynomials. The set of evaluation points $\mathbf{W}_k$ is split as well into two disjoint sets, $\mathbf{W}_{k-1}$ and $\mathbf{W}_k \setminus \mathbf{W}_{k-1} = \{x + v_k | x \in \mathbf{W}_{k-1}\}$, where v_k is the k-th element of the Cantor basis. Because of the linearity of the vanishing polynomials $s_i(x)$, the evaluation of the input polynomials at $\mathbf{W}_k \setminus \mathbf{W}_{k-1}$ can be quickly computed from the evaluations at $\mathbf{W}_{k-1}$ and the so-called *butterfly* operation, shown in Figure 2.1.
The full algorithm is detailed in Algorithm 2.

Algorithm 2: Lin-Chung-Han FFT


Input: $f(x)$, binary polynomial of degree at most n in novelpoly basis
$(f(x) = g(X) = g_0 + g_1 X_1(x) + \cdots + g_{n-1} X_{n-1}(x))$,
$\alpha \in \mathbb{F}_{2^m}$, a generic field element

Output: $\{f(x) | x \in \mathbf{W}_m\}$, the evaluations of $f(x)$ at the points in $\mathbf{W}_m$

1 **Function** `FFT`$(f(x), \alpha)$
2 **if** $\deg(f(x))$ **then**
3 **return** $[g_0]$;
4 $k \leftarrow \max(i)$ s.t. $2^i \leqslant \deg(f(x))$;
5 $g(X) \leftarrow p_0(X) + X_{2^k} \cdot p_1(X)$;
6 $h_0(X) \leftarrow p_0(X) + s_k(\alpha) \cdot p_1(X)$;
7 $h_1(X) \leftarrow h_0(X) + s_k(v_k) \cdot p_1(X)$;
8 **return** `FFT`$(h_0(X), \alpha)$, `FFT`$(h_1(X), v_k + \alpha)$;

The butterfly operation is carried out at lines 6 and 7, and is schematized in Figure 2.1. Notice that the butterfly performs two field additions but only one field multiplication, since $s_k(v_k) = 1$ in Cantor basis.

Figure 2.1: Butterfly unit

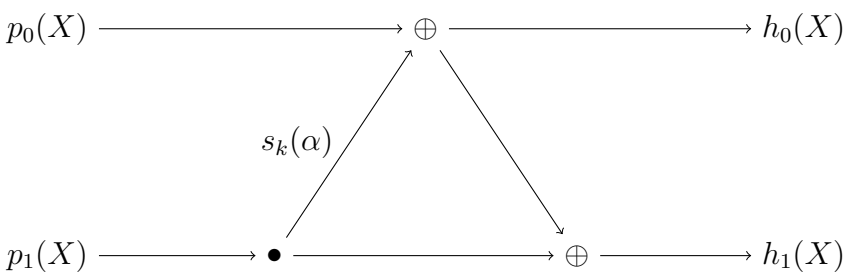

Frobenius Additive FFT

In [vdHL17] the authors showed that, by using the Frobenius map, it is possible to derive more values of polynomials from less evaluation points: given $f(x) \in \mathbb{F}_2[x]_{<n}$, it is possible to prove that

$$f(\phi(a)) = \phi(f(a)) \tag{2.10}$$

so that we can derive the value of f at $\phi(a)$ by applying the Frobenius map to $f(a)$.

Our goal now is, given a polynomial $f(x) \in \mathbb{F}_2[x]_{<n}$, to design a set $\mathbf{S} \subset \mathbb{F}_{2^m}$ for m a power of 2 such that we can derive n values of f from $\mathbf{S}$.

Frobenius partition Consider the Frobenius map in $\mathbb{F}_{2^m}$; with respect to the Cantor basis, it has been shown in [LCK+18] that the order of the Frobenius map is

$$Ord_\phi(v_i) = 2^{\lfloor \log_2 i \rfloor + 1} \tag{2.11}$$

meaning that the maximum order for $v_i \in \{v_{m/2}, \cdots, v_{m-1}\}$ is m. If we define $l_m = \log_2 m$, $l_n = \log_2 n$ and $l = l_n - l_m$, we can design a set with maximum order as:

$$\mathbf{S} := v_{l+m/2} + \mathbf{W}_l = \{v_{l+m/2} + x \mid x \in \mathbf{W}_l\} \tag{2.12}$$

with size $n' = |\mathbf{S}| = |\mathbf{W}_l| = 2^l = n/m$ and order m. By applying the Frobenius map to $\mathbf{S}$ repeatedly, it is possible to prove that

$$\mathbf{O} = \mathbf{S} \cup \phi(\mathbf{S}) \cup \cdots \cup \phi^{m-1}(\mathbf{S}) \tag{2.13}$$

with $|\mathbf{O}| = n$ and $\mathbf{S}$ is a Frobenius partition of $\mathbf{O}$ [LCK+18].

Polynomial evaluation Now that we built the Frobenius partition, we have to evaluate f on it: we define the linear map

$$E_\mathbf{S} : f(x) \mapsto \{f(v_{l+m/2} + w) \mid w \in \mathbf{W}_l\} \tag{2.14}$$

that evaluates $f(x)$ at $n' < n$ points; however, since the points are in $\mathbb{F}_{2^m}$, we get $n' \cdot m = n/m \cdot m = n$ values in $\mathbb{F}_2$.

To perform $E_\mathbf{S}$ we can use the same algorithm used for the LCH FFT, with some modifications: recalling that Algorithm 1 depends only on the polynomial and that Algorithm 2 performs the actual butterfly computations, we only have to adapt the latter to the new set of evaluation points. In particular, we pretend to evaluate f at $v_{l+m/2} + \mathbf{W}_l$, but


truncate the first l_m layers of the butterflies, as we do not need the whole evaluation.

Example: A truncated butterfly

Let's consider the calculation of the first value f_0 for $m = 4$ and a generic n. Starting from 4 points $(a_{0\cdot n'}, a_{1\cdot n'}, a_{2\cdot n'}, a_{3\cdot n'})$, each from $\mathbb{F}_2$, the first $l_m = 2$ layers of the butterfly stage are truncated as shown in Figure 2.2. The multiplications, denoted by $(\bullet)$, produce the output:

$$f_0 = a_{0\cdot n'} + s_{l+1}(v_{l+m/2}) \cdot a_{1\cdot n'} + s_{l+2}(v_{l+m/2}) \cdot a_{2\cdot n'} + s_{l+1}(v_{l+m/2}) \cdot s_{l+2}(v_{l+m/2}) \cdot a_{3\cdot n'}$$

Figure 2.2: A 2-layer Truncated FFT

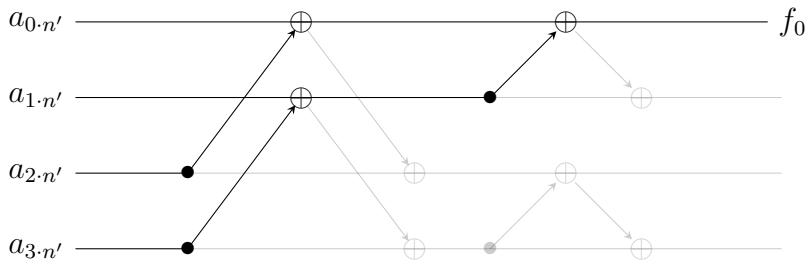


Because of the recursive nature of the vanishing polynomial, we can rewrite the result above as:

$$f_0 = a_{0\cdot n'} + v_{m/2-1} \cdot a_{1\cdot n'} + v_{m/2-2} \cdot a_{2\cdot n'} + v_{m/2-2} \cdot a_{3\cdot n'}$$

where the multipliers are independent of l for a fixed m. Since the multipliers are in $\mathbb{F}_{2^m}$ the output f_0 is in the same field, thus not requiring the computation of the remaining values.

After this step, we can finally carry out the remaining butterfly computations, evaluating the encoded polynomials at the points in $\mathbf{S}$.

Figure 2.3: A size-8 FFT

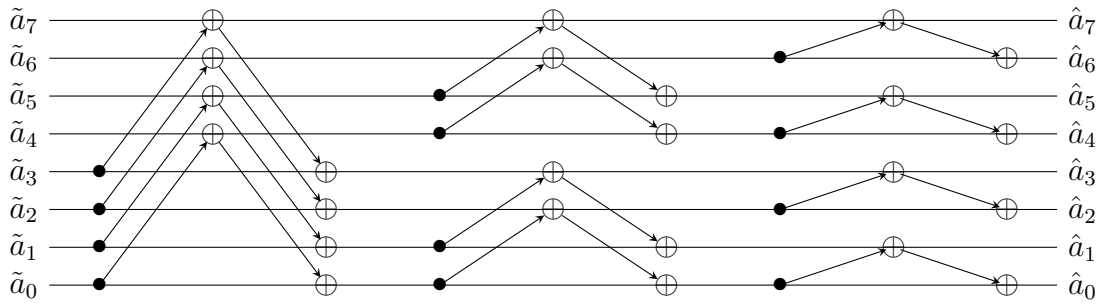

Similarly to other FFT-based approaches, in order to perform the multiplication of two polynomials we have to apply the FFT on the inputs, multiply the samples pointwise and then apply the inverse FFT; the summary of this procedure is shown in Algorithm 3.

Algorithm 3: Frobenius Additive FFT Multiplication

Input: $A(x) = a_0 + a_1 x + \cdots + a_{n-1}x^{n-1} \in \mathbb{F}_2[x]_{<n}$,
$B(x) = b_0 + b_1 x + \cdots + b_{n-1}x^{n-1} \in \mathbb{F}_2[x]_{<n}$

Output: $C(x) = c_0 + c_1 x + \cdots + c_{n-1}x^{n-1} = A(x) \cdot B(x) \mod (x^n + 1) \in \mathbb{F}_2[x]_{<n}$

Function MULTFAFFT($A(X), B(X)$)

- $\bar{A}(X) \leftarrow$ BASISCVT($A(x)$); // $\in \mathbb{F}_2[x]_{<n}$
- $\bar{B}(X) \leftarrow$ BASISCVT($B(x)$); // $\in \mathbb{F}_2[x]_{<n}$
- $\tilde{A}(X) \leftarrow$ ENCODE($\bar{A}(X)$); // $\in \mathbb{F}_{2^m}[x]_{<n'}$
- $\tilde{B}(X) \leftarrow$ ENCODE($\bar{B}(X)$); // $\in \mathbb{F}_{2^m}[x]_{<n'}$
- $[\hat{a}_1, \cdots, \hat{a}_{n'}] \leftarrow$ BUTTERFLIES($\tilde{A}(X), \mathbf{S}$); // $\in \mathbb{F}_{2^m}^{n'}$
- $[\hat{b}_1, \cdots, \hat{b}_{n'}] \leftarrow$ BUTTERFLIES($\tilde{B}(X), \mathbf{S}$); // $\in \mathbb{F}_{2^m}^{n'}$
- $\hat{C} = [\hat{c}_1, \cdots, \hat{c}_{n'}] \leftarrow [\hat{a}_1 \cdot \hat{b}_1, \cdots, \hat{a}_{n'} \cdot \hat{b}_{n'}]$;
- $\tilde{C}(X) \leftarrow$ BUTTERFLIES^{-1}($\hat{C}, \mathbf{S}$); // $\in \mathbb{F}_{2^m}[x]_{<n'}$
- $\bar{C}(X) \leftarrow$ DECODE($\tilde{C}(X)$); // $\in \mathbb{F}_2[x]_{<n}$
- $C(x) \leftarrow$ BASISCVT^{-1}($\bar{C}(X)$); // $\in \mathbb{F}_2[x]_{<n}$
- **return** $C(x) \mod (x^n + 1)$

2.3. Coding Theory

In this section we give the basic concepts and definitions of coding theory ([MS77]), required to formally define the problems on which HQC is based.

2.3.1. General definitions

Definition 2.3.1 (Circulant matrix)**.** Let $\mathbf{v} = (v_0, \cdots, v_{n-1}) \in \mathcal{V}$. The circulant matrix induced by $\mathbf{v}$ is defined as a matrix whose i-th row is the vector $\mathbf{v}$ shifted by i positions to the right:

$$\mathbf{circ}(\mathbf{v}) = \begin{pmatrix} v_0 & v_1 & \cdots & v_{n-1} \\ v_{n-1} & v_0 & \cdots & v_{n-2} \\ \vdots & \vdots & \ddots & \vdots \\ v_1 & v_2 & \cdots & v_0 \end{pmatrix} \in \mathbb{F}_2^{n \times n}$$

The algebra of $n \times n$ circulant matrices over $\mathbb{F}_2$ is isomorphic to the algebra of polynomials in the ring $\mathcal{R}$:

$$\mathbf{circ}(\mathbf{v}) \simeq v_0 + v_1 x + v_2 x^2 + \cdots + x_{n-1} x^{n-1}$$

Definition 2.3.2 (Linear q-ary Codes)**.** A Linear q-ary code $\mathcal{C}$ of lenght n and dimension k (denoted as $[n, k]$) is a subspace of $\mathbb{F}_q^n$.
Due to their vast use in cryptography, we will consider only binary codes ($q = 2$).

Definition 2.3.3 (Linear Codes)**.** A linear code $\mathcal{C}$ of lenght n and dimension k (denoted as $[n, k]$) is a subspace of $\mathcal{V}$ of dimension k; the elements of $\mathcal{C}$ are called *codewords*.
Due to the linearity of $\mathcal{V}$, any linear combination of two codewords is also a codeword.

Definition 2.3.4 (Generator Matrix)**.** Let $\mathcal{C} = [n, k]$ be a linear code. The matrix $\mathbf{G} \in \mathbb{F}_2^{k \times n}$ is called the generator matrix of $\mathcal{C}$ if

$$\mathcal{C} = \{\mathbf{mG}, \text{ for } \mathbf{m} \in \mathbb{F}_2^k\}$$

Definition 2.3.5 (Parity-Check Matrix)**.** Let $\mathcal{C} = [n, k]$ be a linear code. The matrix $\mathbf{H} \in \mathbb{F}_2^{(n-k) \times n}$ is called the parity-check matrix of $\mathcal{C}$ if

$$\mathcal{C} = \{\mathbf{v} \in \mathbb{F}_2^n \text{ such that } \mathbf{H}\mathbf{v}^\top = 0\}$$

In other words, $\mathbf{H}$ is the generator matrix of the dual code $\mathcal{C}^\perp$.

Definition 2.3.6 (Rank)**.** Let $\mathcal{C} = [n, k]$ be a linear code. The rank of $\mathcal{C}$ is defined as the dimension of the space spanned by its codewords or, in other words, the rank of its parity-check matrix.

$$r(\mathcal{C}) = r(\mathbf{H}) = n - k$$

A high rank code can correct more errors with fewer parity-check equations, but it usually is harder to construct and decode.

Definition 2.3.7 (Syndrome)**.** Let $\mathcal{C} = [n, k]$ be a code, $\mathbf{H}$ its parity matrix and $\mathbf{v} \in \mathbb{F}_2^n$ a word. The syndrome of $\mathbf{v}$ is defined as

$$\mathbf{S}(\mathbf{v}) = \mathbf{H}\mathbf{v}^\top$$

From this definition, a vector $\mathbf{v}$ is a codeword if and only if its syndrome is the zero vector.

Definition 2.3.8 (Rate)**.** Let $\mathcal{C} = [n, k]$ be a code. The rate of $\mathcal{C}$ is defined as $R = \frac{k}{n}$.

The rate of a code is a measure of its efficiency: with a higher rate we can transmit more information with the same amount of bits, at the cost of reduced redundancy (and thus reduced error correcting capability).

Definition 2.3.9 (Minimum distance)**.** Let $\mathcal{C} = [n, k]$ be a code and ω a norm on $\mathcal{V}$. The minimum distance of $\mathcal{C}$ is defined as

$$d = \min_{\mathbf{v},\mathbf{w}\in\mathcal{C},\mathbf{v}\neq\mathbf{w}} \omega(\mathbf{v} - \mathbf{w})$$

The length, dimension and minimum distance of a linear code $\mathcal{C} = [n, k, d]$ are tied by the Singleton bound [Sin64]:

$$d \leqslant n - k + 1$$

If the equality holds, $\mathcal{C}$ is called a maximum distance separable (MDS) code, and it has desirable properties in terms of error correction.

Definition 2.3.10 (Error Correction Capability)**.** A linear code $\mathcal{C} = [n, k, d]$ can decode arbitrary codewords with at most $\delta = \lfloor \frac{d-1}{2} \rfloor$ errors. If $\mathcal{C}$ is a MDS code, we can rewrite this as $\delta = \lfloor \frac{n-k}{2} \rfloor$.

Definition 2.3.11 (Gilbert-Varshamov bound)**.** Let $\mathcal{C} = [n, k]$ be a linear code. The Gilbert-Varshamov bound [Gil52, Var57] states that $\mathcal{C}$ can correct at least t errors if its size satisfies

$$2^k \geqslant \sum_{i=0}^{t} \binom{n}{i} \tag{2.15}$$

2.3.2. Code families

Informally, when we say that a code is *good*, we mean that it satisfies some properties, such as:

- High minimum distance: the higher the minimum distance, the more errors the code can correct.
- High rate: the higher the rate, the more information we can transmit with the same amount of bits.
- Efficiency: we want the encoder and decoder to be fast and simple to implement.

In this section we will describe some of the most common code families and the properties they satisfy.

Definition 2.3.12 (Cyclic Codes)**.** Let $\mathbf{c} = (c_0, \cdots, c_{n-1}) \in \mathcal{V}$ be a vector. A linear code $\mathcal{C} = [n, k]$ is Cyclic if, for any $\mathbf{v} \in \mathcal{C}$, the vector obtained by applying a circular shift to $\mathbf{v}$ is also a codeword. codeword. If we think of $\mathbf{v}$ as a polynomial in $\mathcal{R}$, we can say that $\mathcal{C}$ is cyclic if, for any $\mathbf{v} \in \mathcal{C}$, the polynomial $X \cdot \mathbf{v}$ is also a codeword.

Definition 2.3.13 (Quasi-Cyclic Codes)**.** Let $\mathbf{c} = (\mathbf{c}_0, \cdots, \mathbf{c}_{s-1}) \in \mathbb{F}_2^{sn}$ be a vector, where we consider each $\mathbf{c}_i$ as a vector in $\mathbb{F}_2^n$. A linear code $\mathcal{C} = [sn, k]$ is Quasi-Cyclic of index s if, for any $\mathbf{c} \in \mathcal{C}$, the vector obtained by applying a circular shift to every block $\mathbf{c}_i$ simultaneously is also a codeword. QC codes are a generalization of cyclic codes.

Definition 2.3.14 (Double Circulant Codes)**.** A code $\mathcal{C}$ is double circulant if it is Quasi-Cyclic of even length and index $s = 2$.

Random codes

In a linear random code the codewords are chosen at random; specifically, we can build the parity matrix $\mathbf{H}$ of the code by randomly sampling each entry from a Bernoulli distribution.
For sufficiently large n, random linear codes reach the Gilbert-Varshamov bound; moreover, the probability of decoding error decreases exponentially as the minimum distance increases. On the other hand, the computational complexity of a decoder for a random code grows exponentially with the length of the code.

Repetition codes

Repetition codes are among the simplest codes, as they are just a repetition of the same vector k times. Repetition codes can be easily decoded by majority voting, making the decoding process very fast. However, they have a very low rate and they are not efficient in terms of error correction capability.

Concatenated codes

Concatenated codes are built by combining an *inner* code $\mathcal{C}_{in} = [n_{in}, k_{in}]$ and an *outer* code $\mathcal{C}_{out} = [n_{out}, k_{out}]$: the idea is to split the input message

- Split the input message into chunks: $\mathbf{m} = (m_1, \cdots, m_{k_{out}})$
- Encode each chunk with the outer code: $\mathbf{c} = (\mathcal{C}_{out}(m_1), \cdots, \mathcal{C}_{out}(m_{k_{out}})) = (m'_1, \cdots, m'_{n_{out}})$
- Encode the resulting codeword with the inner code: $\mathcal{C}_{in}(\mathbf{c}) = (\mathcal{C}_{in}(m'_1), \cdots, \mathcal{C}_{in}(m'_{n_{out}}))$

The resulting code, denoted as $\mathcal{C}_{out} \circ \mathcal{C}_{in}$ thus has length $n_{out} \cdot n_{in}$ and dimension $k_{out} \cdot k_{in}$.

As shown by Forney in [For65], concatenated codes can be used to achieve both a polynomial-time decoder and exponentially decreasing error probability with increased block length.

Reed-Muller and Reed-Solomon codes

Reed-Muller codes [Ree54, Mul54] are a family of codes; by defining the message lenght as

$$k = \sum_{i=0}^{r} \binom{m}{i}$$

we denote them as $\mathsf{RM}(r, m)$, where $n = 2^m$ is the lenght of the code. Reed-Muller codes are locally testable and locally decodable, meaning that it is possible to detect and correct errors in a codeword by looking at a small subset of its coordinates.

Reed-Solomon codes [RS60] are a subclass of Reed-Muller codes and they are usually referred to as $\mathsf{RS}(n, k)$, where n and k are the lenght and dimension of the code respectively.

2.3.3. Difficult problems for cryptography

The problems we are interested in are all variants of the *decoding problem*, which requires to find the closest codeword to a given word with respect to a certain metric; in our case we consider as metric the Hamming weight, denoted as $\mathtt{wt}(\mathbf{v})$, which is the amount of

non-zero coordinates of the vector $\mathbf{v}$. In the case of linear codes we have shown that the decoding problem stays the same whether one is given the syndrome of the received vector or the vector itself; for this reason, we will only consider the *Syndrome Decoding* (SD) problem.

Definition 2.3.15 (SD Distribution)**.** Given $n, k, w \in \mathbb{N}$, the distribution $\mathsf{SD}(n, k, w)$ randomly samples a parity-check matrix $\mathbf{H} \xleftarrow{\$} \mathbb{F}_2^{(n-k)\times n}$, a vector $\mathbf{x} \xleftarrow{\$} \mathbb{F}_2^n$ such that $\mathtt{wt}(\mathbf{x}) = w$ and returns $(\mathbf{H}, \mathbf{S}(\mathbf{x}))$.

Definition 2.3.16 (SD Problem)**.** Given $(\mathbf{H}, \mathbf{y}^\top) \in \mathbb{F}_2^{(n-k)\times n} \times \mathbb{F}_2^{(n-k)}$ from the $\mathsf{SD}(n, k, w)$ distribution, the SD problem requires to find a vector $\mathbf{x} \in \mathbb{F}_2^n$ such that $\mathbf{S}(\mathbf{x}) = \mathbf{y}^\top$ and $\mathtt{wt}(\mathbf{x}) = w$.

This problem has been proven to be NP-complete in [BMvT78].

Definition 2.3.17 (Decisional SD Problem)**.** Given $(\mathbf{H}, \mathbf{y}^\top) \in \mathbb{F}_2^{(n-k)\times n} \times \mathbb{F}_2^{(n-k)}$, the DSD problem requires to determine whether $(\mathbf{H}, \mathbf{y}^\top)$ comes from the SD distribution or from the random distribution over $\mathbb{F}_2^{(n-k)\times n} \times \mathbb{F}_2^{(n-k)}$.

2.4. Side Channel Attacks

Many cryptographic algorithms are considered unbreakable, regardless of the amount of computing power available; the theoretical security of such algorithms however does not always translate to real-world secure implementations.
Regardless of the means of the implementation, the electronic devices that run these cryptosystems often *leak* information about the internal state of the device, potentially exposing secrets. But how does a device leak information?

A *side channel* is some observable aspect of a cryptosystem that reveals information held within that system [Koc96, Sta10]; example of side channels can be the execution time of an algorithm, the power consumption of a device or the electromagnetic radiation emitted while running some operations.
In this chapter we will describe the most common side channel attacks, how they can be used to retrieve secret information and how to mitigate them.

2.4.1. Timing attacks

In a timing attack, the attacker tries to infer information about a secret by measuring the time it takes to execute some operation: the idea behind this attack is that the time

it takes to execute an operation depends on the input of the operation, and thus by measuring the execution time of the operation we can infer information about the input.

Example: Unlock the vault

Let us consider a simple example: we have a vault with a combination lock, and we want to unlock it. The function that checks if the combination entered by the user is correct is shown in the following listing:

```
1   int check_pin(int *pin) {
2       int correct_pin[4] = {3, 1, 4, 2};
3
4       for (int i = 0; i < 4; i++) {
5           if (pin[i] != correct_pin[i]) {
6               return 0;
7           }
8       }
9       return 1;
10  }
11
```

Listing 2.1: A non constant-time password checker

The function simply checks if the PIN entered by the user is equal to the correct PIN, and returns 1 if it is correct and 0 otherwise. Being the PIN composed of decimal digits, the total amount of combinations is 10^4, so on average we would need 5000 guesses to find the correct PIN; however, we can reduce the number of guesses needed to find the correct PIN by using a timing attack.

We can observe that the function returns as soon as a digit of the PIN is incorrect: under the reasonable assumption that we can measure the execution time of the function, we can guess the correct PIN one digit at a time. Starting from 0000, we cycle through all the possibilities for the first digit $(0000, 1000, \cdots, 9000)$ and measure the execution time: out of the 10 measurements, the one with the highest execution time corresponds to the correct digit; we can then repeat the same process for the remaining digits, so that after at most 40 guesses we find the correct pin.

Even though this attack strategy may seem trivial and easy to mitigate, it can still wreck havoc: real-life examples of timing attacks include, for example, Spectre [KHF+20] and Meltdown [LSG+20], which affects almost all modern processors and allowed an attacker to read the memory of any process running on the same machine. Moreover, these attacks do not necessarily require the attacker to have physical access to the device as they can be performed remotely, as shown in [BB05, BT11].

2.4.2. Power attacks

In order to carry out operations, digital devices require to be powered: the power consumption of a device is usually not fixed, as it can fluctuate based on a variety of factors. The vast majority of digital devices employs transistors, which act as switches that can be turned on or off; the input to a transistor can be thought of as a small capacitor and, as such, follows its characteristic equation:

$$I = C \cdot \frac{dV}{dt}$$

where I is the current, C is the capacitance of the capacitor and V is the voltage across the capacitor. To turn on a transistor (*i.e.* to increase the voltage across the capacitor) we need to apply a *charge* to it: because of this behavior, if we have a changing voltage on the capacitor, for example when transitioning from 0 to 1, we can observe the flow of current through the capacitor.

All operations in a digital circuit are performed by switching millions of transistors on and off: this means that the power consumption of a digital device is affected by the operations it performs, and thus can be used to infer information about the internal state of the device.

Example: RSA Square and Multiply

The Rivest-Shamir-Adleman (RSA) cryptosystem is one of the most known public-key cryptosystem. In the encryption phase, RSA produces the ciphertext c by raising the plaintext m to the power of the private key e modulo n, as shown in the following listing:


```
int square_and_multiply(int ptx, int exponent, int modulus) {
    int result = 1;
    while (exponent > 0) {
        if (exponent % 2 == 1) {
            result = (result * ptx) % modulus;
        }
        exponent = exponent / 2;
        ptx = (ptx * ptx) % modulus;
    }
    return result;
}

```

Listing 2.2: RSA square and multiply

The if statement at line 4 determines the execution flow based on the bits of the secret exponent: if the current bit is 1 the result is multiplied by the plaintext (*multiply*), otherwise it is not, and we only *square* the plaintext.

Figure 2.4: Power consumption of the RSA Square and Multiply algorithm

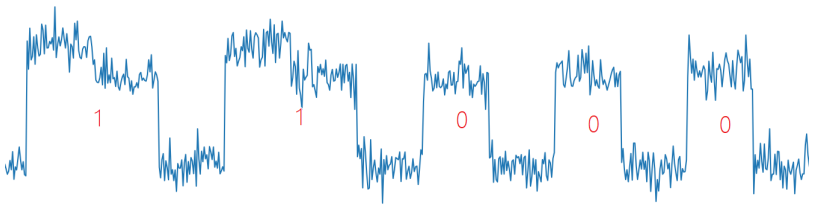

As shown in the figure above, by looking at the power consumption we can clearly distinguish whether the exponent bit is 1 or 0, and thus we can infer the value of the secret exponent.

Measurements and attacks

When it comes to actually measuring the power consumption of a device we have two main approaches:

- Measure the voltage across a *shunt resistor*: a resistor with a fixed value is placed between the power source and the device
- Measure the emitted electromagnetic radiation: the current flowing through the device induces magnetic field in the wires, that we can pick up with a near-field probe

Both methods have their pros and cons: the first one is more accurate, but requires to phisically install the shunt resistor on the device; the second one is non-intrusive, but the measurements are tipically noisy due to external interferences.

Regardless of the source of a power trace, there are several possibilities to carry out an attack [RD20], such as:

- Simple Power Analysis: observe the power consumption over a single trace
- Differential Power Analysis [KJJ99]: analyze multiple executions over the same algorithm with different inputs to detect small input-dependent differences

- Template attacks [CRR02]: collect a large number of traces and use them to build a *template* of the power consumption of the device to detect when the device is performing a specific operation

2.4.3. Countermeasures

The existence of a side-channel does not necessarily mean that an attack is possible: in fact, there are a number of countermeasures that can mitigate the risk of a successful attack.

Regarding timing attacks, the most common countermeasure is to use *constant-time* algorithms, that take the same amount of time to execute regardless of the input; this can be achieved, for example, by replacing branching statements that depend on the inputs. A very effective way to avoid leakage, especially with respect to power attacks, is to randomize the inputs of the algorithm without affecting the output.

To do so, we can *mask* the inputs: the basic principle of masking [PR13] is to split every sensitive value x into $d+1$ *shares*, in such a way that the following relation holds:

$$x = x_0 \odot x_1 \odot \cdots \odot x_d \tag{2.16}$$

The shares $x_1, \cdots, x_d$ are called *masks* and are randomly sampled, while the secret x_0 is processed in such a way that the relation above holds. The goal of masking is to make the sensitive value indistinguishable from a random value, so that the observation of a side channel does not reveal any sensitive information, but only random noise. There is no particular constraint on the choice of the operation $\odot$ as long as it preserves the relation above; in practice, the most common choice is to use the XOR operation, as it is very fast and easy to implement: such a masking scheme (e.g. [ISW03]) is often referred to as *boolean* masking. As proven in [CJRR99], a masking scheme with d shares is a sound counermeasure against a side-channel attack of d-th order, where an attacker can have up to d *probes* on the target system; this means that a $d+1$-th order attack could be possible, but such attacks become impractical as d increases.

2.5. Hamming Quasi-Cyclic

Hamming Quasi-Cyclic [MAB+18] is a fourth round candidate in the NIST Post-Quantum cryptography standardization process. HQC is a code-based cryptosystem, that includes both a public-key encryption (HQC.PKE) and a key encapsulation mechanism (HQC.KEM); in this section we will show the inner workings of both schemes.

2.5.1. Encryption scheme

We can think of a generic encryption scheme as a tuple of four polynomial time algorithms:

- Setup(1^λ): generates the parameters param based on the security parameter λ.
- Keygen(param): generates a public key pk and a secret key sk based on the global parameters param.
- Encrypt(pk, $\mathbf{m}$, θ): outputs the ciphertext $\mathbf{c}$ for the message $\mathbf{m}$ with the randomness θ under the public key pk.
- Decrypt(sk, $\mathbf{c}$): outputs the message $\mathbf{m}$ for the ciphertext $\mathbf{c}$ (or $\perp$ if the ciphertext is invalid).

2.5.2. Public Key Encryption

HQC uses two different codes:

- A publicly available decodable code $\mathcal{C} = [n, k]$ generated by $\mathbf{G} \in \mathbb{F}_2^{k \times n}$ with an efficient decoding algorithm $\mathcal{C}$.Decode() which can correct up to δ errors.
- A random double-circulant $[2n, n]$ code with parity-check matrix $\mathbf{H} = (\mathbf{I_n}, \mathbf{circ}(\mathbf{h}))$.

The HQC.PKE defines the four algorithms of an encryption scheme as follows:

- Setup(1^λ): generates the set of parameters param $= (n, k, \delta, \omega, \omega_r, \omega_e)$
- Keygen(param): samples $\mathbf{h} \xleftarrow{\$} \mathcal{R}$ and $(\mathbf{x}, \mathbf{y}) \xleftarrow{\$} \mathcal{R} \times \mathcal{R}$ such that $\mathtt{wt}(\mathbf{x}) = \mathtt{wt}(\mathbf{y}) = \omega$; the keypair is defined as sk $= (\mathbf{x}, \mathbf{y})$ and pk $= (\mathbf{h}, \mathbf{s} = \mathbf{x} + \mathbf{h} \cdot \mathbf{y})$.
- Encrypt(pk, $\mathbf{m}$, θ): samples $\mathbf{e} \xleftarrow{\$} \mathcal{R}$, $(\mathbf{r_1}, \mathbf{r_2}) \xleftarrow{\$} \mathcal{R} \times \mathcal{R}$ such that $\mathtt{wt}(\mathbf{e}) = \omega_e$ and $\mathtt{wt}(\mathbf{r_1}) = \mathtt{wt}(\mathbf{r_2}) = \omega_e$; the ciphertext is defined as the pair $(\mathbf{u}, \mathbf{v})$, where $\mathbf{u} = \mathbf{r_1} + \mathbf{h} \cdot \mathbf{r_2}$ and $\mathbf{v} = \mathbf{mG} + \mathbf{s} \cdot \mathbf{r_2} + \mathbf{e}$.
- Decrypt(sk, $\mathbf{c}$): outputs $\mathcal{C}$.Decode($\mathbf{v} - \mathbf{u} \cdot \mathbf{y}$).

The idea at the core of HQC.PKE is to encode the message ($\mathbf{mG}$) and then add random errors that can be removed only by knowing the secret key: the code $\mathcal{C}$ correctly decodes $\mathbf{v} - \mathbf{u} \cdot \mathbf{y}$ whenever

$$\begin{aligned} \mathtt{wt}(\mathbf{v} - \mathbf{u} \cdot \mathbf{y}) &= \mathtt{wt}(\mathbf{s} \cdot \mathbf{r_2} - \mathbf{u} \cdot \mathbf{y} + \mathbf{e}) \\ &= \mathtt{wt}((\mathbf{x} + \mathbf{h} \cdot \mathbf{y}) \cdot \mathbf{r_2} - (\mathbf{r_1} + \mathbf{h} \cdot \mathbf{r_2}) \cdot \mathbf{y} + \mathbf{e}) \\ &= \mathtt{wt}(\mathbf{x} \cdot \mathbf{r_2} - \mathbf{r_1} \cdot \mathbf{y} + \mathbf{e}) \leqslant \delta \end{aligned}$$

The authors in [MBD+18] show that breaking the public key encryption scheme from a theoretical point of view is equivalent to solving the Decisional SD problem for Quasi-Cyclic codes, thus proving that the PKE is IND-CPA secure.

2.5.3. Key Encapsulation Mechanism

In practice, public key encryption is not used to encrypt large amounts of data because of its high exectution time compared to symmetric encryption. For this reason, we use public key encryption to exchange a shared secret key, which is then used to encrypt the actual data: the practice of using a public key encryption scheme to exchange a shared secret key is referred to as key encapsulation mechanism (KEM).
The Fujisaki-Okamoto and HHK transformations [FO13, HHK17] are techniques that allows to transform a *weak* IND-CPA encryption scheme into a *stronger* IND-CCA2 key encapsulation mechanism.

Let $\mathcal{E}$ an instance of HQC.PKE and $\mathcal{G}, \mathcal{H}$ and $\mathcal{K}$ hash functions. The HQC.KEM scheme is defined as follows:

- $\mathsf{Setup}(1^\lambda)$: generates the set of parameters as in HQC.PKE.Setup, where k will be the key size.
- $\mathsf{Keygen}(\mathsf{param})$: generates a keypair as in HQC.PKE.Keygen.
- $\mathsf{Encapsulate}(\mathsf{pk})$: sample $\mathbf{m} \xleftarrow{\$} \mathbb{F}_2^k$ to derive the randomness $\theta = \mathcal{G}(\mathbf{m})$. Generate the ciphertext as $\mathbf{c} = (\mathbf{u}, \mathbf{v}) \leftarrow \mathcal{E}.\mathsf{Encrypt}(\mathsf{pk}, \mathbf{m}, \theta)$ and derive the symmetric key as $K \leftarrow \mathcal{K}(\mathbf{m}, \mathbf{c})$; send $(\mathbf{c}, \mathbf{d} = \mathcal{H}(\mathbf{m}))$.
- $\mathsf{Decapsulate}(\mathsf{sk},\ \mathbf{c}, \mathbf{d})$: decrypt the ciphertext as $\mathbf{m}' = \mathcal{E}.\mathsf{Decrypt}(\mathsf{sk}, \mathbf{c})$, compute $\theta' = \mathcal{G}(\mathbf{m}')$ and re-encrypt to get $\mathbf{c}' \leftarrow \mathcal{E}.\mathsf{Encrypt}(\mathsf{pk}, \mathbf{m}', \theta)$. If $\mathbf{c} \neq \mathbf{c}'$ or $\mathbf{d} \neq \mathcal{H}(\mathbf{m}')$ return $\perp$, otherwise derive the shared key $\mathcal{K}(\mathbf{m}', \mathbf{c}')$.

It is important in this setting to pick different hash functions for $\mathcal{H}$ and $\mathcal{G}$: if not, we would have that $\theta = \mathcal{G}(\mathbf{m}) = \mathcal{H}(\mathbf{m}) = \mathbf{d}$, thus publishing the randomness used to

generate $\mathbf{r}_1, \mathbf{r}_2$ and $\mathbf{e}$. In such a scenario, an eavesdropper could retrieve the message $\mathbf{m}$ from $\mathbf{mG} + \mathbf{sr_2} + \mathbf{e}$, which is the seed for the secret shared key.

2.5.4. Parameters

HQC has three different parameters sets, for category 1, 3 and 5 respectively. We will refer to the implementations of these sets as `hqc-128`, `hqc-192` and `hqc-256`.

Starting from Round 3, the public code with generator matrix $\mathbf{G}$ is instantiated with a concatenated code, using Reed-Solomon and Reed-Muller codes as outer and inner codes, with n_1 and n_2 lenght of the respective codes; the length of the message is n, which is the smallest prime greater than $n_1 n_2$ such that $ord_n(2) = n - 1$. The random code with parity-check matrix $\mathbf{H}$ is instantiated by randomly sampling the vector $\mathbf{h}$ from $\mathbb{F}_2^n$. The parameters for the three sets are chosen to bound the decryption failure rate (DFR), and are summarized in Table 2.1.

Table 2.1: Parameters of HQC

Instance	$\mathbf{n_1}$	$\mathbf{n_2}$	$\mathbf{n}$	ω	$\omega_\mathbf{r} = \omega_\mathbf{e}$	**DFR**
`hqc-128`	46	384	17669	66	75	$< 2^{-128}$
`hqc-192`	56	640	35851	100	114	$< 2^{-192}$
`hqc-256`	90	640	57637	131	149	$< 2^{-256}$

2.6. Related Work

Given the sound security record of HQC, much attention has been devoted to its side-channel resistance. Most of the independent analyses focus on extracting infromation from electromagnetic and power traces [SRSW20, SHR+22, GLG22], whilst at the end of Round 2 of the NIST contest the authors in [WBB+22] and [PT19] proposed a timing attack that takes advantage of the non constant-time implementation of the BCH decoder and the dependence between the decoding time and the amount of errors to correct; these attacks are no longer relevant starting from Round 3, as the authors of HQC swapped the BCH code with a Reed-Muller Reed-Solomon concatenated code, implementing a constant-time decoder. Nonetheless, in [GHJ+22], the authors propose a new timing attack based on a weakness in the *rejection sampling* procedure employed to generate random sparse polynomials in the keygen and encryption steps of the PKE scheme; as a countermeasure, a more careful implementation of the rejection sampling step has been proposed in the Round 4 submission, fixing the issue.
We also note that most of the literature on side-channel attacks on HQC aims at key retrieval, while it is also possible to carry out a message-recovery attack if the operations in the encryption algorithm, such as polynomial multiplication, are not constant-time; the requirement of a constant-time execution is further strenghtened by the fact that the encryption primitive is used as a subroutine in the KEM scheme.

To date, no dedicated constant-time implementation of HQC targeting embedded systems hass been proposed, despite the fact that timing attacks are easier to carry out on these platforms. The current state of software implementations of HQC tailored for the ARM Cortex-M4 microcontroller, chosen by the NIST as the reference platform for microcontroller benchmarks, includes only the one in PQM4 [KPR+], a third-party public software project that collects the implementations of the NIST Round 4 candidates tailored for Cortex M4. The latest version of HQC in PQM4 is directly derived from the Round 3 reference implementation, with no optimizations: as a consequence, the implementation is not constant-time and vulnerable to the timing side-channel attack presented in [GHJ+22].

3 | Implementation

At the time of writing there are no publicly available implementations of HQC specifically targeting microcontrollers. In this section we describe our implementation of HQC targeting ARM Cortex-M4 microcontrollers, showing the implementative details for various multiplication algorithms; moreover, we show the first fully masked implementation of HQC, as a countermeasure against power side-channel attacks.

3.1. Polynomial multiplication

From a computational standpoint, the most expensive operations in HQC are by far the polynomial multiplications: for this reason, in order to achieve good performance, it is crucial to pick the best multiplication algorithm for the target architecture.

The polynomials $v \in \mathcal{R}$ can be represented in two possible forms:

- sparse, as a vector of size ω coefficients, $\omega = \texttt{wt}(v)$, where each entry corresponds to the degree of a non-zero coefficient.
- dense, as a vector of size $\lceil \frac{n}{\texttt{ws}} \rceil$, where `ws` is the word size of the target architecture.

With the aforementioned parameters, the objects on which HQC operates require the amounts of memory summarized in Table 3.1.

Table 3.1: Memory consumption (in bytes)

Instance	Message	Secret Key	Public Key	Ciphertext	Dense Poly	Sparse Poly
`hqc-128`	16	2289	2249	4481	2209	300
`hqc-192`	24	4562	4522	9026	4482	456
`hqc-256`	32	7285	7245	14469	7205	596

Note that the secret key size refers to the memory required to store a *processable* version of if; the secret key can also be stored as a 40B seed, which is then used to generate the actual key material.

Due to its large memory footprint and the limited resources of the target platform, we will consider only the `hqc-128` instance.

3.1.1. Shift and Add

In the third round reference implementation of HQC, the polynomial multiplication is implemented using a variant of the schoolbook *shift and add* method, recalling that the multiplication in $\mathcal{R}$ of a polynomial by a monomial of degree i can be implemented as a circular shift to the left ($\lll_n$) of i positions. Given $a(x)$ in sparse form and $b(x)$ in dense form, the algorithms multiplies $b(x)$ by x^w, for all ws, where w is a non-zero coefficient of $a(x)$, and then adds the results together:

Algorithm 4: Sparse-dense polynomial muktiplication

Input: $a(x) \in \mathcal{R}_\omega$ in sparse form (as vector of non-null monomials),
$b(x) \in \mathcal{R}$ in dense form

Output: $c(x) = a(x) \cdot b(x) \in \mathcal{R}$ in dense form

1 **for** $i \leftarrow 0$ **to** ts **do**
2 $\quad$ $\texttt{table}[i] \leftarrow b(x) \lll_n i$;
3 **for** $i \leftarrow 0$ **to** $wt(a(x))$ **do**
4 $\quad$ $w \leftarrow a(x)[i]$;
5 $\quad$ $\texttt{dec} \leftarrow w \mod \texttt{ts}$;
6 $\quad$ $\texttt{s} \leftarrow \lfloor \frac{w}{\texttt{ts}} \rfloor$;
7 $\quad$ $\texttt{tmp} \leftarrow x^{\texttt{s}} \cdot x^{\texttt{ts}}$;
8 $\quad$ $c(x) \leftarrow c(x) + \texttt{table}[\texttt{dec}] \cdot \texttt{tmp}$;
9 **return** $c(x) \mod (x^n + 1)$;

The idea of this variant is to precompute the first `ts` shifts of $b(x)$ and store them in a table, where `ts` is set to 16; this allows to slightly improve the performance of the algorithm and to shuffle the memory accesses to `table`.
Since a is very sparse, this approach is extremely fast; however, the high speed achieved is counterbalanced by the non-constant time execution of the algorithm, which is a major drawback for the security of the implementation.

3.1.2. Constant-time shift and add

Due to the high sparsity of one of the operands, we would like to exploit the fact that the algorithm is very fast to implement a constant-time version of it; such an algorithm is implemented in LEDAcrypt [BBC+19] and is based on *shifts with conditional commitment*.

Algorithm 5: Constant-time monomial multiplication

Input: a exponent of a monomial $x^a \in \mathbb{Z}_2[x]$ with $0 \leqslant a < n$,
$b(x) \in \mathcal{R}$ polynomial in dense form

Output: $c(x) = x^a \cdot b(x) \in \mathcal{R}$ in dense form

Data: $m = \lceil \log_2(a) \rceil$ number of bits needed to encode a in binary,
i.e. $a = (\beta_{m-1}, \cdots, \beta_0)_{\texttt{bin}}$

1 $c(x) \leftarrow b(x) \lll_n (a \mod \texttt{ws})$;
2 **for** $i \leftarrow \log_2(ws)$ **to** $(m-1)$ **do**
3 $\quad \texttt{tmp} \leftarrow b(x) \lll_n i$;
4 $\quad c(x) \leftarrow c(x) + \texttt{tmp}$;
5 $\quad \texttt{cond} \leftarrow (\beta_i = 1)$;
6 $\quad \texttt{mask} \leftarrow 0 - (\texttt{WORD})(\texttt{cond})$;
7 $\quad c(x) \leftarrow c(x) + ((c(x) \wedge \texttt{mask}) \vee (\texttt{tmp}(x) \wedge \texttt{mask}))$;
8 **return** $c(x)$;

With this algorith we compute the i-th shift of $b(x)$ regardless of the value of β_i, but we sum it to the result only if $\beta_i = 1$ (the mask at line 6 contains either all zeros or all ones, '$\vee$' and '$\wedge$' correspond to the bitwise OR and AND respectively).

3.1.3. Frobenius Additive FFT

The implementation of the Frobenius Additive FFT is based on the work of Chen *et.al.* [CCK21]; for the sake of clarity, we highlight the core ideas of this implementation.

As shown in Algorithm 3, the FAFFT multiplication is composed of four components (with the relative inverses): basis conversion, encoding, butterflies and pointwise multiplication. Our implementation targets a 32-bit platform, hence we pick $m = 32$ for the ease of representation of the operands in memory; moreover, since the degree of the operands is at most 17669, we set n to the closest power of two greater than $2 \cdot 17669$, i.e. $n = 65536$. Recalling Equation 2.12, we get $l = \log_2 n - \log_2 m = 11$, hence the optimal Frobenius partition is

$$\mathbf{S} = v_{l+m/2} + \mathbf{W}_l = v_{27} + \mathbf{W}_{11}$$

Since the degree of the operands is fixed, it is possible to optimize these algorithms by unrolling the recursive calls and precomputing the necessary tables.

Pointwise multiplication

To carry out the $n/m = 2048$ pointwise multiplications in $\mathbb{F}_{2^{32}}$ the field elements are represented in a bitsliced format, where each element is stored in a memory word. Given a and b elements in $\mathbb{F}_{2^{32}}$, we can compute their product by splitting them as $a_0 + a_1 \cdot x^{16}$ and $b_0 + b_1 \cdot x^{16}$, and computing the product using the Karatsuba algorithm in $\mathbb{F}_{2^{16}}$. We do not further split the elements in $\mathbb{F}_{2^{16}}$, as the operands and results fit in the general purpose registers of the processor.

Basis conversion


In Algorithm 1, we show how to convert a polynomial from the canonical to the *novelpoly* basis by recursively dividing the input by the vanishing polynomials $s_i(x)$. Since the division by the vanishing polynomial (of largest degree possible) always produces only $h_0(x)$ and $h_1(x)$, we can unroll the recursive calls and transform the algorithm in a binary circuit with only `XOR` operations; moreover, we can remove all the operations on coefficients of the input polynomial that we know are zero.

Example: Monomial to novelpoly basis conversion

Each step splits the input into quotient and remainder, so we can represent the whole algorithm as a tree, where a node's left child is the remainder and the right child is the quotient: by doing so, at the last step of the recursion we can read the leaves, from left to right, as the coefficients $g_0, g_1, \cdots$ of the polynomial in the novelpoly basis.

Let us take $f(x) = x^6$ in monomial basis and apply the basis conversion algorithm to it. The greatest i such that $2^{2^i} \leqslant \deg(f(x))$ is $i = 2$, so at the various levels of the tree we will divide the inputs by $s_2(x) = x^4 + x$ and $s_1(x) = x^2 + x$:


Figure 3.1: Expansion of the basis conversion algorithm for $f(x) = x^6$

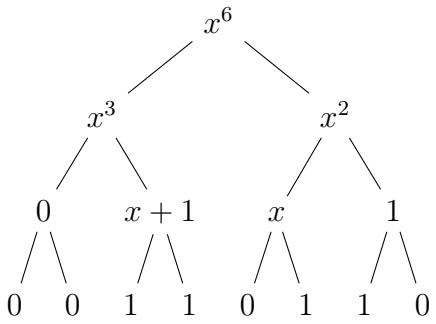

hence the representation of x^6 in novelpoly basis is $X_2(x) + X_3(x) + X_5(x) + X_6(x)$.

If we repeat the same procedure with all the required monomials (of degree less than 8 for this case) we can obtain the following circuit that maps coefficients of the canonical basis f_i to coefficients of the novelpoly basis g_i, where the dashed line marks the separation between the first two levels of the tree after the root:

Figure 3.2: Basis conversion, $n < 8$

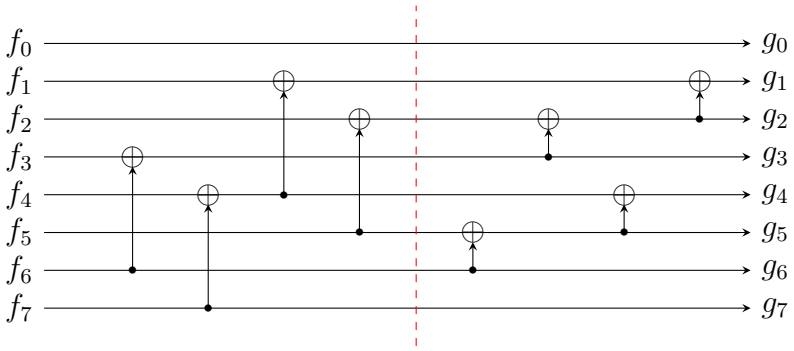

Encoding

As shown previously, in the encoding step the multiplication in the truncated butterflies have as one of the factors the basis vectors $(s_{l+1}(v_{l+m/2}), \cdots, s_{l+l_m}(v_{l+m/2}))$, which can be also written as $(v_{m/2-1}, \cdots, v_{m/2-l_m})$; for a fixed m these vectors are always the same, so we can rewrite this step as a vector-matrix product:

$$g_i = \sum_{j=0}^{m-1} f_{j \cdot n' + i} \cdot r_j = \begin{bmatrix} f_{0 \cdot n'} & f_{1 \cdot n'} & \cdots & f_{(m-1) \cdot n'} \end{bmatrix} \cdot \begin{bmatrix} r_0 \\ r_1 \\ \vdots \\ r_{m-1} \end{bmatrix}$$

Where each multiplier $r_j \in \mathbb{F}_2^m$ is computed as

$$r_j = \prod_{k=0}^{l_m - 1} (v_{m/2-k-1})^{j_k}, \qquad \text{for } j = j_0 + j_1 \cdot 2 + \cdots + j_{l_m - 1} \cdot 2^{l_m - 1}$$

These calculations are summarized in Algorithm 6.

Algorithm 6: Encoding, as a vector-matrix product

Input: $f(X) = f_0 + f_1X_1 + \cdots + f_{n-1}X_{n-1} \in \mathbb{F}_2[x]_{<n}$

Output: $g(X) = g_0 + g_1X_1 + \cdots + g_{n'-1}X_{n'-1} \in \mathbb{F}_{2^m}[x]_{<n'}$

for $i \leftarrow 0$ **to** $n' - 1$ **do**

  $r_i \leftarrow \prod_{j=0}^{l_m-1}(v_{m/2-j-1})^{j_i}$; // $j = j_0 + j_1 \cdot 2^1 + j_2 \cdot 2^2 + \cdots$

for $i \leftarrow 0$ **to** $n' - 1$ **do**

  $g_i \leftarrow \sum_{j=0}^{m-1} f_{j \cdot n' + i} \cdot r_i$

return $g_0 + g_1X_1 + \cdots + g_{n'-1}X_{n'-1}$

Since the matrix coefficient is fixed the encoding step is a linear map we can generate a binary circuit to carry out this step.

Butterflies

The multiplication step in the i-th layer of the butterflies is always of the form $\beta \cdot p_1(s_1(\beta))$, with $\beta \in v_{l+m/2-i} + \mathbf{W}_{l-i}$, so it is possible to precompute and store the values of β in a static table. Moreover, by noticing that $\beta = v + w$ with $w \in \mathbf{W}_{l-i}$, we can rewrite a generic multiplication $\beta \cdot \gamma$ as $\gamma \cdot v + \gamma \cdot w$: the multiplication by v is performed as a linear map in the same fashion as the encoding step, while the multiplication by w is performed by carrying out $32/2^{\lceil \log_2(l-i) \rceil}$ multiplications in the subfield of size $2^{2^{\lceil \log_2(l-i) \rceil}}$, as w is an element of such subfield. This approach, as shown empirically in [CCK21], takes the least amount of cycles among the possible approaches.

3.2. Masking

Unlike many other cryptosystems, if we consider the public and secret keys as constants, HQC is *linear* in all its operations, making its primitives to be easily masked entirely. In the next algorithms we will use the following notation and conventions:

- d: the amount of shares
- $[\![a]\!] = (a_0, \ldots, a_{d-1})$: additive share splitting of a in d shares over $\mathcal{R}$
- $\xleftarrow{\$}$: uniform sampling from the right hand side of the equation
- $(a + \sum_{i=0}^{d-2} \texttt{rnd}_i)$: masking of a with $d-1$ masks sampled from the same field of a
- Collapse(a, $[\![b]\!]$): sum all shares of b, in order, to a

To prove the soundness of our masking scheme we show how the share splitting of an input preserves the output with respect to the operations performed by the algorithm,

namely addition, multiplication and encoding/decoding. We will restrict our attention to the case of $d = 2$ shares ($[\![a]\!] = (a \oplus x, x)$ with x random mask) with boolean masks, as it is the one used in our implementation, but the same reasoning can be applied for an arbitrary number of shares.

Addition Let us consider $[\![a]\!] = (a \oplus x, x)$ and $[\![b]\!] = (b \oplus y, y)$; the addition of the two share-split numbers is performed by adding the shares of the same index, getting the result

$$[\![a \oplus b]\!] = (a \oplus x \oplus b \oplus y, x \oplus y) = (a \oplus b \oplus x \oplus y, x \oplus y)$$

which, once collapsed, gives the expected result $(a \oplus b \oplus x \oplus y) \oplus (x \oplus y) = a \oplus b$.
In the case of an addition between a share-split number and a constant, we can simply add the constant to the first share of the share-split number: in this way we are considering the constant as a share-split number with a zero mask, falling back to the previous case.

Multiplication Let us consider $[\![a]\!] = (a \oplus x, x)$ and b; in our setting, all the multiplications involve a constant and a share-split value. The multiplication between a constant and a share-split number $[\![a]\!] \cdot b$ is performed by multiplying every share of $[\![a]\!]$ by b, getting the result

$$[\![a]\!] \cdot b = ((a \oplus x) \cdot b, x \cdot b) = (a \cdot b \oplus x \cdot b, x \cdot b)$$

which, once collapsed, gives the result $(a \cdot b \oplus x \cdot b) \oplus (x \cdot b) = a \cdot b$.

Encoding/Decoding Let us consider $[\![a]\!] = (a \oplus x, x)$; the encoding and decoding of a share-split value are performed by simply encoding and decoding each share separately:

$$\textsc{Encode}([\![a]\!]) = (\textsc{Encode}(a \oplus x), \textsc{Encode}(x)) = [\![\textsc{Encode}(a)]\!] = [\![b]\!]$$
$$\textsc{Decode}([\![b]\!]) = (\textsc{Decode}(b \oplus x), \textsc{Decode}(x))$$

When we collapse the decoded shares, we get as a result $\textsc{Decode}(b \oplus x) \oplus \textsc{Decode}(x)$; if the code we are using is linear, we can further rewrite this result as

$$(\textsc{Decode}(b) \oplus \textsc{Decode}(x)) \oplus \textsc{Decode}(x) = \textsc{Decode}(b) = a$$

correctly decoding the masked value.

3.2.1. Keygen

The masking of the key generation algorithm is straightforward: after sampling the private key, we mask y and multiply by h to obtain the share-split version of s, which is then collapsed to obtain the public key.

Algorithm 7: Keygen, masked version

Input: none

Output: $\mathcal{K}_{pub} \in \mathcal{R} \times \mathcal{R}; \mathcal{K}_{pri} \in \mathcal{R} \times \mathcal{R}$

1 $h \xleftarrow{\$} \mathcal{R}$;
2 $(x, y) \xleftarrow{\$} \mathcal{R}_\omega \times \mathcal{R}_\omega$;
3 $[\![y]\!] \leftarrow (y + \sum_{i=0}^{d-2} \texttt{rnd}_i)$;
4 $[\![s]\!] \leftarrow h[\![y]\!]$;
5 $[\![s]\!] \leftarrow x + [\![s]\!]$; `// sum` x `only to the first share`
6 **return** $\mathcal{K}_{pri} = (x, y)$, $\mathcal{K}_{pub} = (h, \text{COLLAPSE}([\![s]\!]))$;

3.2.2. Encrypt

In the encryption it is important to protect, other than the message m and the public key s, also the random polynomials e, r_1 and r_2, as their leakage would allow an attacker to remove the *excess* errors and decode m from the ciphertext.

Algorithm 8: Encryption, masked version

Data: $\mathbf{G}$: a $\mathbb{F}_2^{k \times n}$ matrix generating an efficiently correctable code

Input: $\mathcal{K}_{pub}$, $m \in \{0,1\}^k$

Output: $c = (u, v) \in \mathcal{R} \times \mathcal{R}$

1 $e \xleftarrow{\$} \mathcal{R}_{\omega_e}$;
2 $(r_1, r_2) \xleftarrow{\$} \mathcal{R}_{\omega_r} \times \mathcal{R}_{\omega_r}$;
3 $[\![r_1]\!] \leftarrow (r_1 + \sum_{i=0}^{d-2} \texttt{rnd}_i)$;
4 $[\![r_2]\!] \leftarrow (r_2 + \sum_{i=0}^{d-2} \texttt{rnd}_i)$;
5 $[\![u]\!] \leftarrow [\![r_1]\!] + h[\![r_2]\!]$;
6 $[\![m]\!] \leftarrow (m + \sum_{i=0}^{d-2} \texttt{rnd}_i)$;
7 $[\![v]\!] \leftarrow [\![m]\!]\mathbf{G} + s[\![r_2]\!] + e$;
8 **return** $(\text{COLLAPSE}([\![u]\!]), \text{COLLAPSE}([\![v]\!]))$;

When calculating $[\![v]\!]$ it is important to perform the operations at line 7 from left to right, to avoid leaking information about e; in alternative, we can mask e and sum it to $[\![v]\!]$.

3.2.3. Decrypt

In the decryption we exploit the linearity of the correctable code: after masking y and multiplying by u, we generate a random codeword $[\![\bar{m}]\!]$ and encode it into $[\![\bar{c}]\!]$ to protect $v - uy$ during the decoding. After the decoding we can collapse $[\![\bar{m}]\!]$ and the decoded message: since the code is linear, the final result is the original message, as if we had performed the decoding on $v - uy$ directly.

Algorithm 9: Decryption, masked version

Data: $\mathbf{G}$: a $\mathbb{F}_2^{k \times n}$ matrix generating an efficiently correctable code
Input: $\mathcal{K}_{pri} = (x, y) \in \mathcal{R}_\omega \times \mathcal{R}_\omega$, $c = (u, v) \in \mathcal{R} \times \mathcal{R}$
Output: $m \in \{0,1\}^k$

1 $[\![y]\!] \leftarrow (y + \sum_{i=0}^{n-2} \texttt{rnd}_i)$;
2 $[\![uy]\!] \leftarrow u[\![y]\!]$;
3 $[\![\bar{m}]\!] \xleftarrow{\$} (\{0,1\}^k)^d$;
4 $[\![\bar{c}]\!] \leftarrow [\![\bar{m}]\!]\mathbf{G}$;
5 $a \leftarrow \textsc{Collapse}(v, [\![\bar{c}]\!])$;
6 $m \leftarrow \textsc{Decode}(\textsc{Collapse}(a, [\![uy]\!]))$;
7 **return** $\textsc{Collapse}(m, [\![\bar{m}]\!])$;

4 | Empirical Evaluations

We choose the STM32L476RG Nucleo board as our benchmarking platform, featuring 96KB of RAM, 1MB of Flash memory, a 32-bit ARM Cortex M4 which can be clocked up to 80MHz and a true random number generator. Due to its large memory footprint and the limited amount of memory available on our target platform, we take into consideration only the `hqc-128` instance. We use `libopencm3` 1.0.0 as firmware library and compile the project with `gcc-arm-none-eabi` 7.2.1 using the `-O3` optimization flag. The board is clocked at a range of frequencies between 16 and 80 MHz to evaluate the impact of the memory wait states, as shown in Table 4.1.

Table 4.1: Wait states and corresponding frequencies

Frequency (MHz)	16	32	48	64	80
Wait States	0	1	2	3	4

We run the same experiments on a x86 machine, equipped with an AMD Ryzen 25000U, 8GB of DDR4 DRAM and running ArchLinux 6.2; the executables are compiled with `gcc` 12.2.1 using the `-O3` optimization flag and, for AVX implementations (marked with a '†'), the `-march=native` flag.

Welch's t-test

To evaluate the existence of an eventual side-channel vulnerability we use the Test Vector Leakage Assessment (TVLA) [SM16], based on Welch's t-test. The aim of the test is to provide a quantitative measure of how much the means of two populations differ; the t-test statistic is computed as follows:

$$t = \frac{\mu_0 - \mu_1}{\sqrt{\frac{s_0^2}{n_0} + \frac{s_1^2}{n_1}}} \tag{4.1}$$

where μ, s^2 and n are the mean, variance and number of samples of the two populations, respectively. Small t values give evidence to accept the null hypothesis that the two populations have the same mean; usually, for the sake of simplicity, a threshold of $|t| > 4.5$ is defined to reject the null hypothesis with a confidence level of $99,999\%$.

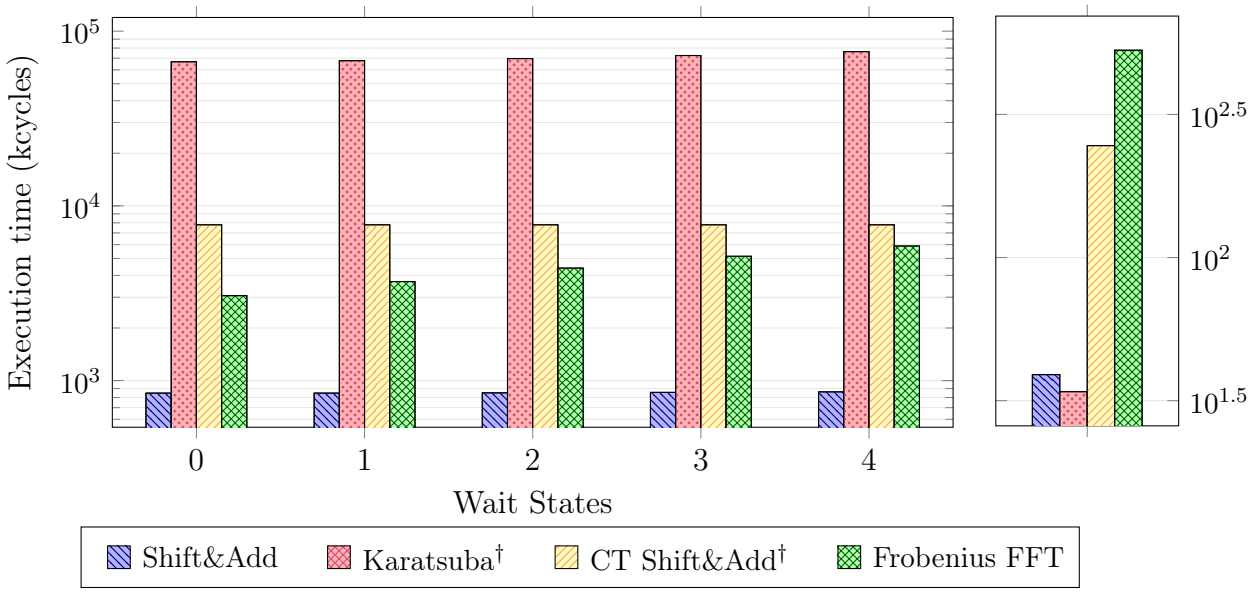


Figure 4.1: Multiplication execution times on ARM (left) and x86 (right) in kcycles

4.1. Execution time


To measure the execution times on ARM we use the Data Watchpoint and Trace Cycle Count Register (`DWT_CYCCNT`), a 32-bit register that counts the number of clock cycles elapsed since its last reset with a resolution of one clock cycle; to avoid overflows, we reset the register after all the measurements of a single round. As for the x86 machine, we use the `rdtsc` instruction, that returns the current value of the processor's time stamp counter; to get accurate measurements, we lock the frequency of all cores to 2.0GHz using `cpupower` and disable the Turbo Boost feature. In both cases, in order to reduce uncertainty, we run the experiments 1000 times and average the results.

As already mentioned, the multiplication operation is the most time-consuming operation for all primitives, hence the choice of the multiplication algorithm is crucial to achieve good performance. The execution times of the various multiplication algorithms are shown in Figure 4.1 and in Table A.1.

As expected, the fastest multiplication algorithm on ARM (after the Shift&Add) is the one using the Frobenius FFT, followed by the constant-time version of Shift&Add. In the graph we can also see how the execution time for the Frobenius FFT is the only one that is significantly impacted by the amount of memory wait states: as explained in Section 3.1.3 this algorithm heavily relies on precomputed tables, requiring a higher amount of memory accesses and thus up to 92% more clock cycles; finally, we can see that the Karatsuba algorithm takes the longest amount of time.


Things change dramatically on x86: on this architecture we can take advantage of AVX instructions, which allow us to carry out operations with 256-bit vectors in a single clock cycle: this benefits the Karatsuba algorithm, which is the fastest one by a large margin, while the Frobenius FFT becomes the slowest one.

These results are clearly reflected in the execution times of both the PKE and KEM schemes, as shown in Figures 4.2, 4.3. and in Tables A.2, A.3, A.4 and A.5.

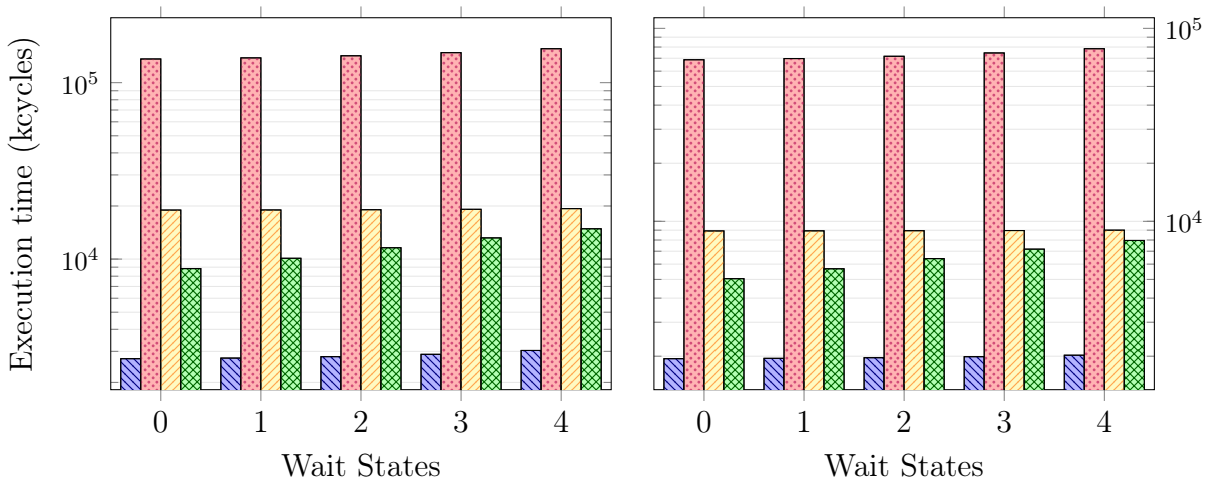

(a) Encryption (b) Decryption

Figure 4.2: Public Key Encryption execution times on ARM (kcycles)

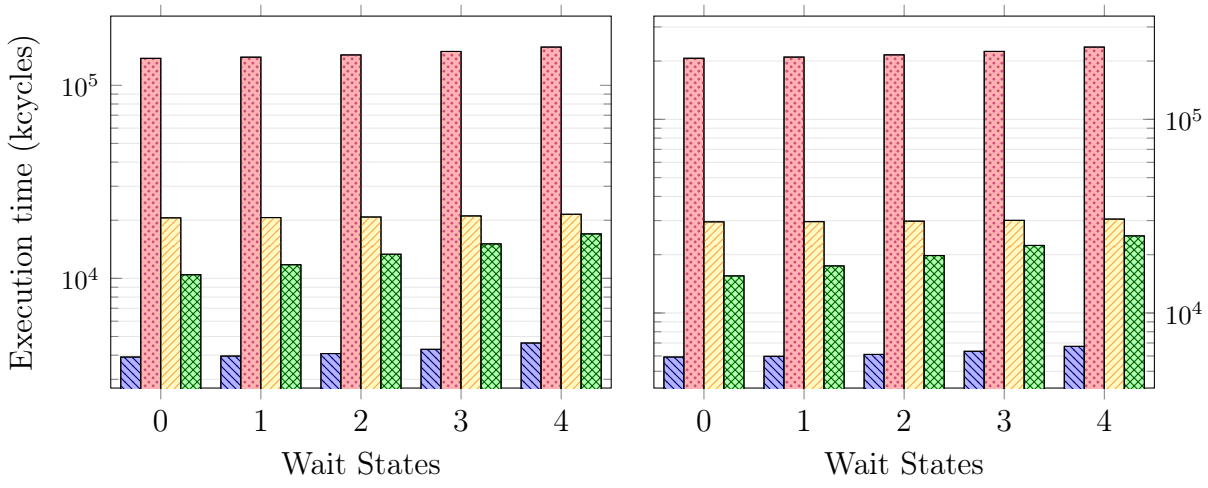

(a) Encapsulation (b) Decapsulation

Figure 4.3: Key Encapsulation Mechanism execution times on ARM (kcycles)

4.2. Constant-time execution

As stated by the NIST, the constant-time execution is an important property for a standardization candidate, as it increases its security against side-channel attacks: it is hence important to assess the presence of timing leaks in our multiplication implementations before using them in the PKE and KEM schemes. As already mentioned we employ the TVLA and take as populations the execution times of the algorithm under test, running it with variable and fixed inputs; both populations are sampled 1000 times and, for ARM, the frequency is set to 80MHz. The results of the tests are reported in Table 4.2.

Table 4.2: t-values for the multiplication algorithms

	Shift&Add	**Karatsuba**	**CT Shift&Add**	**Frobenius FFT**
`ARM`	55.748	0.000	0.000	0.000
`x86`	20.936	3.644	3.371	1.232

As expected, the schoolbook Shift&Add does not run in constant time while the other algorithms do, as they perform always the same operations regardless of the inputs; the constant-time behavior of a part of the system however does not guarantee that the whole system runs in constant time. In [GHJ+22], the authors show that the algorithm employed in HQC and BIKE to sample polynomials with a fixed Hamming weight is not constant-time and can be exploited to fully recover the secret key; this vulnerability was discovered on the Round 3 version, and it has been fixed in the subsequent round. We therefore run the TVLA on the PKE and KEM schemes with the same settings as before, and find the results reported in Table 4.3.

Table 4.3: t-values for the PKE and KEM algorithms

				Encrypt		**Decrypt**		**Encaps**		**Decaps**	
Round	**Version**	**Mul**	**CT?**	`x86`	`ARM`	`x86`	`ARM`	`x86`	`ARM`	`x86`	`ARM`
3	`reference`	Shift&Add	○	10.65	29.19	5.59	39.23	58.42	28.65	20.71	18.44
	`sparsemul`	CT Shift&Add†	•	9.38	23.12	7.59	49.56	6.75	14.29	5.81	23.70
4	`reference`	Karatsuba†	•	1.27	1.04	0.97	0.30	3.77	4.01	4.56	0.26
	`sparsemul`	CT Shift&Add†	•	0.29	0.07	1.51	1.64	1.58	2.17	1.04	0.22
	`fastmul`	Frobenius FFT	•	3.36	0.56	1.70	1.99	4.31	4.25	2.41	0.53

We can see that, even with a constant-time multiplication algorithm, the Round 3 version is not constant-time, while the Round 4 version runs in constant time with all the multiplication algorithms.


4.3. Power measurements

Our power measuring setup employs the PicoScope 5244D oscilloscope sampling at 500MS/s, two Agilent INA-10386 amplifiers in a cascade configuration achieving a 52dB gain and a H-probe, placed on top of the STM32L476RG package. The EM traces are recorded and analyzed on a computer equipped with an AMD A8-6600K CPU, 16GB of DDR3 DRAM running Debian 10. To ensure that the encryption/decryption process runs correctly, we generate the inputs on the same machine, send them to the target via the USART1 interface and compare the outputs with the expected ones; the executables to generate the inputs and verify the outputs are compiled with `gcc` (9.3.0) on the same machine, using the `-O3` optimization flag.


Due to the significant amount of time required to acquire the EM traces, the populations of our TVLA contain 1000 traces each. Our tests results show no significant leakage in neither the encryption nor the decryption algorithm, as shown in Figure 4.4.

Figure 4.4: t-value statistics on the electromagnetic traces

(a) Encryption

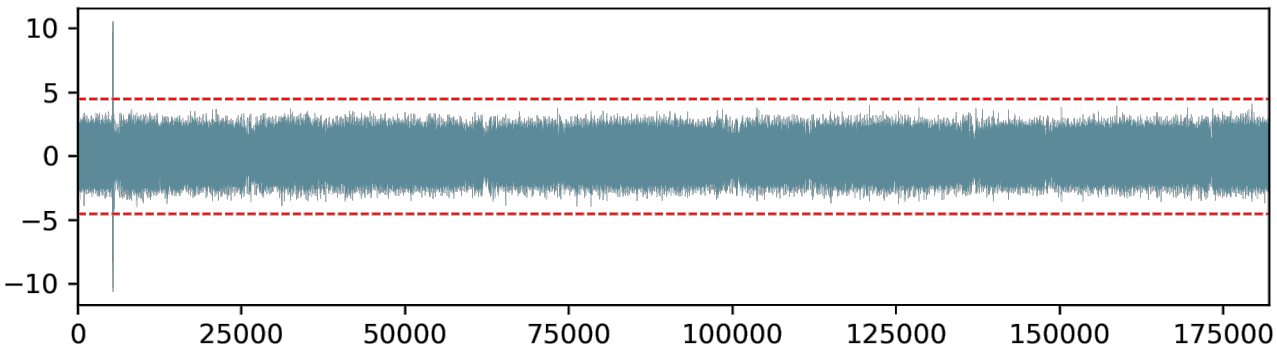

(b) Decryption

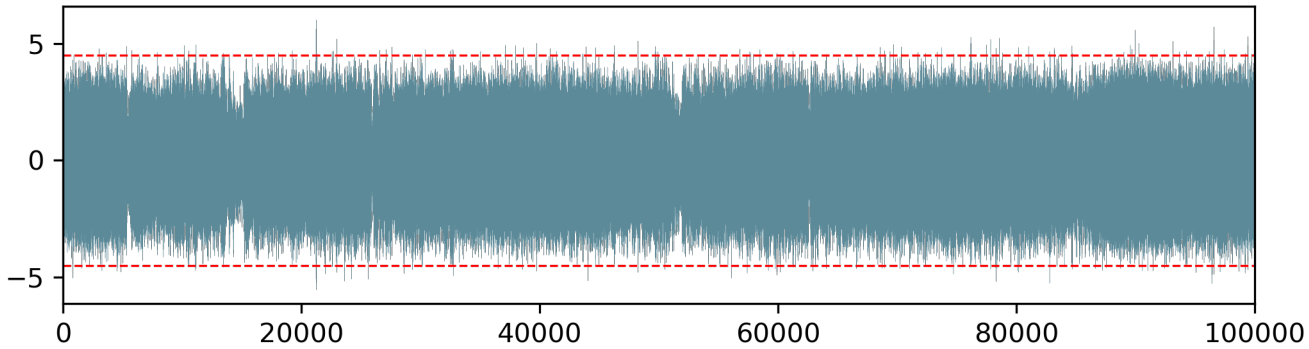

However, similar results are achieved as well on the non-masked version of the algorithms: since other works have proven the existence of a power side-channel attack on the RMRS decoder [SHR+22, GLG22], we conclude that further measurements are required to assess the security of the masking scheme.

4.4. Comparison with other schemes

Similarly to [ACD+22] we can compare the performance of our implementation with the other Round 4 candidates; it is interesting to note that all three candidates are code-based cryptosystems and that they all have a Cortex-M4 implementation. In the graphs below we can see the different amount of time required by our implementations, BIKE [CCK21] and McEliece [CC21] to perform the different operations; for consistency, we consider only the optimized implementations for Cortex M4 with level 1 parameters. For HQC, we consider the results obtained with zero memory wait states, as the authors of the other implementations did.

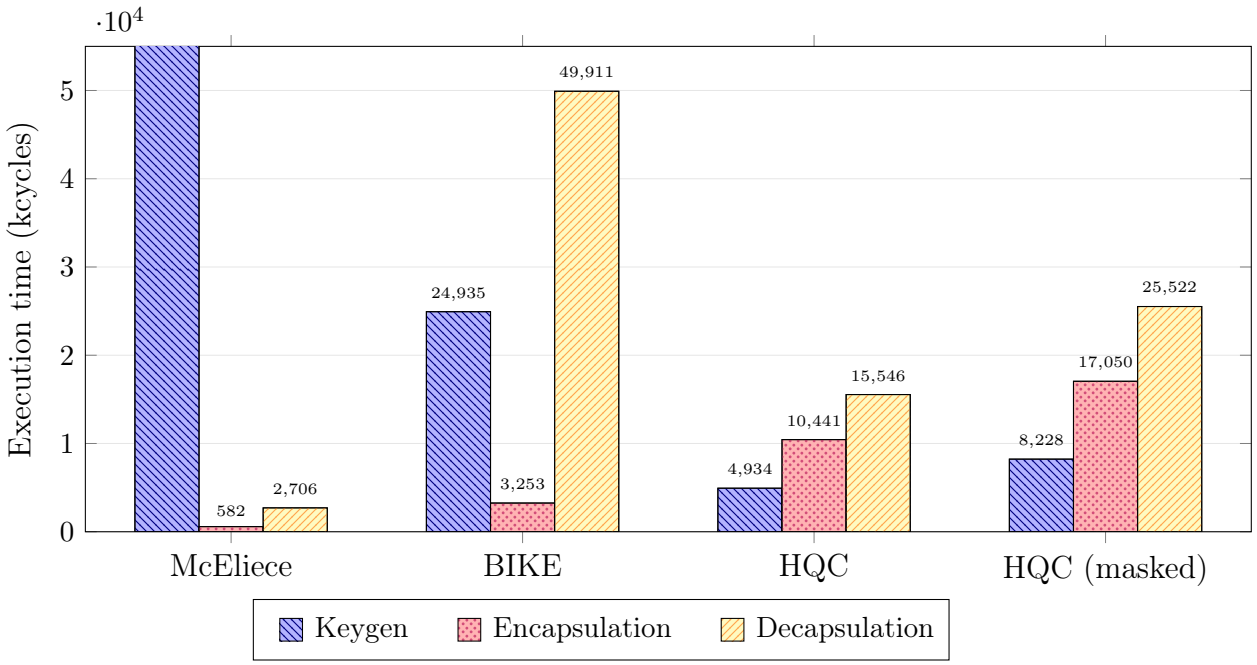


Figure 4.5: Comparison of execution time for the McEliece, BIKE, and HQC KEMs

We can see how the McEliece cryptosystem is the fastest one in terms of encapsulation and decapsulation, but requires $2 \cdot 10^{12}$ cycles to generate the keypair. With respect to BIKE, the most promising candidate in this round, we can see how HQC outperforms it in terms of key generation and decapsulation, not only in the fast implementation but also in the masked one.

In terms of size, we can see how McEliece is prohibitively large in terms of keysize (over 250KB for the public key only). With respect to BIKE, we can see that HQC ciphertext and public keys are larger by a factor of 2.9 and 1.5 respectively.

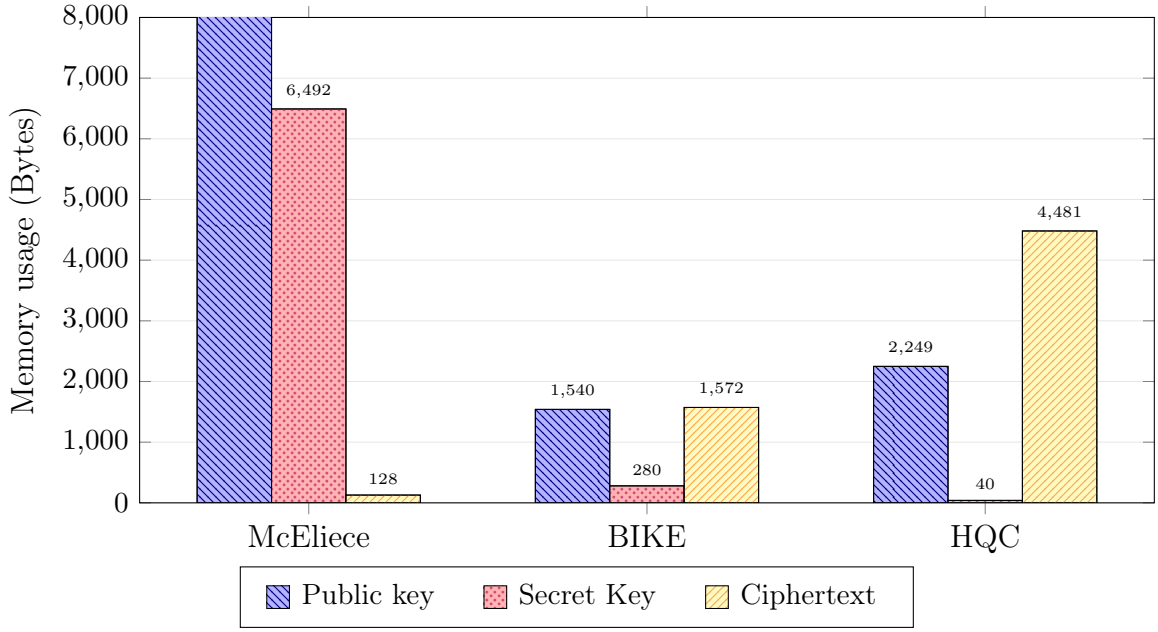


Figure 4.6: Memory usage comparison of McEliece, BIKE and HQC

5 | Conclusions

In this thesis we provided the first constant-time implementation of HQC and the first masked implementation of HQC's public key encryption scheme.

To do so, we evaluated different multiplication methods in terms of both performance and constant-time behavior, crowning the Frobenius Additive FFT as the best one on the ARM Cortex-M4 and the Karatsuba algorithm on x86 architectures; moreover, we implemented a masking scheme for the key generation, encryption and decryption primitives of HQC's public key encryption scheme.

We provided a comparative analysis of the Round 4 NIST PQC candidates, showing how both our constant-time and masked implementations of HQC offer a good trade-off in terms of memory consumption and execution time, being faster than the (unmasked) BIKE implementation and thus making them suitable for standardization.

As future work, it could be possible to run more accurate tests in order to evaluate the efficacy of our masking scheme against power attacks. Since our masking scheme targets the PKE only, it could also be possible to extend the masking scheme to the SHAKE functions and make the whole KEM secure against power attacks, such as the one proposed in [UXT+22].

Bibliography

[ABB+22] Nicolas Aragon, Paulo Barreto, Slim Bettaieb, Loic Bidoux, Olivier Blazy, Jean-Christophe Deneuville, Phillipe Gaborit, Shay Gueron, Tim Guneysu, Carlos Aguilar Melchor, Rafael Misoczki, Edoardo Persichetti, Nicolas Sendrier, Jean-Pierre Tillich, Gilles Zemor, Valentin Vasseur, Santosh Ghosh, and Jan Richter-Brokmann. BIKE Supporting Documentation. `https://bikesuite.org`, 2022.

[ACD+22] Gorjan Alagic, David Cooper, Quynh Dang, Thinh Dang, John M. Kelsey, Jacob Lichtinger, Yi-Kai Liu, Carl A. Miller, Dustin Moody, Rene Peralta, Ray Perlner, Angela Robinson, Daniel Smith-Tone, and Daniel Apon. Status report on the third round of the NIST Post-Quantum Cryptography standardization process, 2022-07-05 04:07:00 2022.

[BB05] David Brumley and Dan Boneh. Remote timing attacks are practical. *Comput. Networks*, 48(5):701–716, 2005.

[BBC+19] Marco Baldi, Alessandro Barenghi, Franco Chiaraluce, Gerardo Pelosi, and Paolo Santini. LEDAcrypt: QC-LDPC code-based cryptosystems with bounded decryption failure rate. In Marco Baldi, Edoardo Persichetti, and Paolo Santini, editors, *Code-Based Cryptography - 7th International Workshop, CBC 2019, Darmstadt, Germany, May 18-19, 2019, Revised Selected Papers*, volume 11666 of *Lecture Notes in Computer Science*, pages 11–43. Springer, 2019.

[BCC+22] Daniel J. Bernstein, Tung Chou, Carlos Cid, Jan Gilcher, Tanja Lange, Varun Maram, Ingo von Maurich, Rafael Misoczki, Ruben Niederhagen, Edoardo Persichetti, Christiane Peters, Nicolas Sendrier, Jakub Szefer, Cen Jung Tjhai, Martin Tomlinson, and Wen Wang. Classic McEliece Supporting Documentation. `https://classic.mceliece.org`, 2022.

[BDK+17] Joppe W. Bos, Léo Ducas, Eike Kiltz, Tancrède Lepoint, Vadim Lyubashevsky, John M. Schanck, Peter Schwabe, and Damien Stehlé. CRYSTALS-

Kyber: a CCA-secure module-lattice-based KEM. *IACR Cryptol. ePrint Arch.*, page 634, 2017.

[Ber01] Daniel J Bernstein. Multidigit multiplication for mathematicians. *Advances in Applied Mathematics*, pages 1–19, 2001.

[BHH+21] M Biondi, A Heid, N Henke, N Mohr, L Pautasso, I Ostojic, L Wester, and R Zemme. Quantum computing use cases are getting real–what you need to know. *McKinsey Insights*, 2021.

[BHS80] Jon Louis Bentley, Dorothea Haken, and James B Saxe. A general method for solving divide-and-conquer recurrences. *ACM SIGACT News*, 12(3):36–44, 1980.

[BMvT78] Elwyn R. Berlekamp, Robert J. McEliece, and Henk C. A. van Tilborg. On the inherent intractability of certain coding problems (corresp.). *IEEE Trans. Inf. Theory*, 24(3):384–386, 1978.

[BT11] Billy Bob Brumley and Nicola Tuveri. Remote timing attacks are still practical. In Vijay Atluri and Claudia Díaz, editors, *Computer Security - ESORICS 2011 - 16th European Symposium on Research in Computer Security, Leuven, Belgium, September 12-14, 2011. Proceedings*, volume 6879 of *Lecture Notes in Computer Science*, pages 355–371. Springer, 2011.

[CA69] Stephen A Cook and Stal O Aanderaa. On the minimum computation time of functions. *Transactions of the American Mathematical Society*, 142:291–314, 1969.

[Can89] David G. Cantor. On arithmetical algorithms over finite fields. *J. Comb. Theory, Ser. A*, 50(2):285–300, 1989.

[CC21] Ming-Shing Chen and Tung Chou. Classic mceliece on the ARM cortex-m4. *IACR Trans. Cryptogr. Hardw. Embed. Syst.*, 2021(3):125–148, 2021.

[CCK+17] Ming-Shing Chen, Chen-Mou Cheng, Po-Chun Kuo, Wen-Ding Li, and Bo-Yin Yang. Faster multiplication for long binary polynomials. *CoRR*, abs/1708.09746, 2017.

[CCK21] Ming-Shing Chen, Tung Chou, and Markus Krausz. Optimizing BIKE for the intel haswell and ARM cortex-m4. *IACR Trans. Cryptogr. Hardw. Embed. Syst.*, 2021(3):97–124, 2021.

[CJRR99] Suresh Chari, Charanjit S. Jutla, Josyula R. Rao, and Pankaj Rohatgi. To-

wards sound approaches to counteract power-analysis attacks. In Michael J. Wiener, editor, *Advances in Cryptology - CRYPTO '99, 19th Annual International Cryptology Conference, Santa Barbara, California, USA, August 15-19, 1999, Proceedings*, volume 1666 of *Lecture Notes in Computer Science*, pages 398–412. Springer, 1999.

[CRR02] Suresh Chari, Josyula R. Rao, and Pankaj Rohatgi. Template Attacks. In Burton S. Kaliski Jr., Çetin Kaya Koç, and Christof Paar, editors, *Cryptographic Hardware and Embedded Systems - CHES 2002, 4th International Workshop, Redwood Shores, CA, USA, August 13-15, 2002, Revised Papers*, volume 2523 of *LNCS*, pages 13–28. Springer, 2002.

[CT65] James W Cooley and John W Tukey. An algorithm for the machine calculation of complex Fourier series. *Mathematics of computation*, 19(90):297–301, 1965.

[FO13] Eiichiro Fujisaki and Tatsuaki Okamoto. Secure integration of asymmetric and symmetric encryption schemes. *J. Cryptol.*, 26(1):80–101, 2013.

[For65] G David Forney. Concatenated codes. 1965.

[GHJ+22] Qian Guo, Clemens Hlauschek, Thomas Johansson, Norman Lahr, Alexander Nilsson, and Robin Leander Schröder. Don't reject this: Key-recovery timing attacks due to rejection-sampling in HQC and BIKE. *IACR Trans. Cryptogr. Hardw. Embed. Syst.*, 2022(3):223–263, 2022.

[Gil52] Edgar N Gilbert. A comparison of signalling alphabets. *The Bell system technical journal*, 31(3):504–522, 1952.

[GLG22] Guillaume Goy, Antoine Loiseau, and Philippe Gaborit. A New Key Recovery Side-Channel Attack on HQC with Chosen Ciphertext. In Jung Hee Cheon and Thomas Johansson, editors, *Post-Quantum Cryptography - 13th International Workshop, PQCrypto 2022, Virtual Event, September 28-30, 2022, Proceedings*, volume 13512 of *Lecture Notes in Computer Science*, pages 353–371. Springer, 2022.

[GM10] Shuhong Gao and Todd D. Mateer. Additive fast Fourier transforms over finite fields. *IEEE Trans. Inf. Theory*, 56(12):6265–6272, 2010.

[HHK17] Dennis Hofheinz, Kathrin Hövelmanns, and Eike Kiltz. A modular analysis of the fujisaki-okamoto transformation. In Yael Kalai and Leonid Reyzin, editors, *Theory of Cryptography - 15th International Conference, TCC 2017,*

Baltimore, MD, USA, November 12-15, 2017, Proceedings, Part I, volume 10677 of *Lecture Notes in Computer Science*, pages 341–371. Springer, 2017.

[ISW03] Yuval Ishai, Amit Sahai, and David A. Wagner. Private circuits: Securing hardware against probing attacks. In Dan Boneh, editor, *Advances in Cryptology - CRYPTO 2003, 23rd Annual International Cryptology Conference, Santa Barbara, California, USA, August 17-21, 2003, Proceedings*, volume 2729 of *Lecture Notes in Computer Science*, pages 463–481. Springer, 2003.

[KHF+20] Paul Kocher, Jann Horn, Anders Fogh, Daniel Genkin, Daniel Gruss, Werner Haas, Mike Hamburg, Moritz Lipp, Stefan Mangard, Thomas Prescher, Michael Schwarz, and Yuval Yarom. Spectre attacks: exploiting speculative execution. *Commun. ACM*, 63(7):93–101, 2020.

[KJJ99] Paul C. Kocher, Joshua Jaffe, and Benjamin Jun. Differential power analysis. In Michael J. Wiener, editor, *Advances in Cryptology - CRYPTO '99, 19th Annual International Cryptology Conference, Santa Barbara, California, USA, August 15-19, 1999, Proceedings*, volume 1666 of *Lecture Notes in Computer Science*, pages 388–397. Springer, 1999.

[KO62] Anatolii Alekseevich Karatsuba and Yu P Ofman. Multiplication of many-digital numbers by automatic computers. In *Doklady Akademii Nauk*, volume 145, pages 293–294. Russian Academy of Sciences, 1962.

[Koc96] Paul C. Kocher. Timing attacks on implementations of diffie-hellman, rsa, dss, and other systems. In Neal Koblitz, editor, *Advances in Cryptology - CRYPTO '96, 16th Annual International Cryptology Conference, Santa Barbara, California, USA, August 18-22, 1996, Proceedings*, volume 1109 of *Lecture Notes in Computer Science*, pages 104–113. Springer, 1996.

[KPR+] Matthias J. Kannwischer, Richard Petri, Joost Rijneveld, Peter Schwabe, and Ko Stoffelen. PQM4: Post-quantum crypto library for the ARM Cortex-M4. `https://github.com/mupq/pqm4`.

[LCH14] Sian-Jheng Lin, Wei-Ho Chung, and Yunghsiang S. Han. Novel polynomial basis and its application to reed-solomon erasure codes. In *55th IEEE Annual Symposium on Foundations of Computer Science, FOCS 2014, Philadelphia, PA, USA, October 18-21, 2014*, pages 316–325. IEEE Computer Society, 2014.

[LCK+18] Wen-Ding Li, Ming-Shing Chen, Po-Chun Kuo, Chen-Mou Cheng, and Bo-Yin Yang. Frobenius additive fast fourier transform. In Manuel Kauers, Alexey Ovchinnikov, and Éric Schost, editors, *Proceedings of the 2018 ACM*

on International Symposium on Symbolic and Algebraic Computation, ISSAC 2018, New York, NY, USA, July 16-19, 2018, pages 263–270. ACM, 2018.

[LSG+20] Moritz Lipp, Michael Schwarz, Daniel Gruss, Thomas Prescher, Werner Haas, Jann Horn, Stefan Mangard, Paul Kocher, Daniel Genkin, Yuval Yarom, Mike Hamburg, and Raoul Strackx. Meltdown: reading kernel memory from user space. *Commun. ACM*, 63(6):46–56, 2020.

[MAB+18] Carlos Aguilar Melchor, Nicolas Aragon, Slim Bettaieb, Loıc Bidoux, Olivier Blazy, Jean-Christophe Deneuville, Philippe Gaborit, Edoardo Persichetti, Gilles Zémor, and IC Bourges. Hamming Quasi-Cyclic (HQC). `https://pqc-hqc.org/`, 2018.

[MBD+18] Carlos Aguilar Melchor, Olivier Blazy, Jean-Christophe Deneuville, Philippe Gaborit, and Gilles Zémor. Efficient encryption from random quasi-cyclic codes. *IEEE Trans. Inf. Theory*, 64(5):3927–3943, 2018.

[MS77] Florence Jessie MacWilliams and Neil James Alexander Sloane. *The theory of error correcting codes*, volume 16. Elsevier, 1977.

[Mul54] David E. Muller. Application of boolean algebra to switching circuit design and to error detection. *Trans. I R E Prof. Group Electron. Comput.*, 3(3):6–12, 1954.

[PR13] Emmanuel Prouff and Matthieu Rivain. Masking against side-channel attacks: A formal security proof. In Thomas Johansson and Phong Q. Nguyen, editors, *Advances in Cryptology - EUROCRYPT 2013, 32nd Annual International Conference on the Theory and Applications of Cryptographic Techniques, Athens, Greece, May 26-30, 2013. Proceedings*, volume 7881 of *Lecture Notes in Computer Science*, pages 142–159. Springer, 2013.

[PT19] Thales Bandiera Paiva and Routo Terada. A Timing Attack on the HQC Encryption Scheme. In Kenneth G. Paterson and Douglas Stebila, editors, *Selected Areas in Cryptography - SAC 2019 - 26th International Conference, Waterloo, ON, Canada, August 12-16, 2019, Revised Selected Papers*, volume 11959 of *Lecture Notes in Computer Science*, pages 551–573. Springer, 2019.

[RD20] Mark Randolph and William Diehl. Power side-channel attack analysis: A review of 20 years of study for the layman. *Cryptogr.*, 4(2):15, 2020.

[Ree54] Irving S. Reed. A class of multiple-error-correcting codes and the decoding scheme. *Trans. IRE Prof. Group Inf. Theory*, 4:38–49, 1954.

[RS60] Irving S Reed and Gustave Solomon. Polynomial codes over certain finite fields. *Journal of the society for industrial and applied mathematics*, 8(2):300–304, 1960.

[Sho94] Peter W. Shor. Algorithms for Quantum Computation: Discrete Logarithms and Factoring. In *35th Annual Symposium on Foundations of Computer Science, Santa Fe, New Mexico, USA, 20-22 November 1994*, pages 124–134. IEEE Computer Society, 1994.

[SHR+22] Thomas Schamberger, Lukas Holzbaur, Julian Renner, Antonia Wachter-Zeh, and Georg Sigl. A Power Side-Channel Attack on the Reed-Muller Reed-Solomon Version of the HQC Cryptosystem. In Jung Hee Cheon and Thomas Johansson, editors, *Post-Quantum Cryptography - 13th International Workshop, PQCrypto 2022, Virtual Event, September 28-30, 2022, Proceedings*, volume 13512 of *Lecture Notes in Computer Science*, pages 327–352. Springer, 2022.

[Sin64] Richard C. Singleton. Maximum distance q -nary codes. *IEEE Trans. Inf. Theory*, 10(2):116–118, 1964.

[SM16] Tobias Schneider and Amir Moradi. Leakage assessment methodology - extended version. *J. Cryptogr. Eng.*, 6(2):85–99, 2016.

[SRSW20] Thomas Schamberger, Julian Renner, Georg Sigl, and Antonia Wachter-Zeh. A Power Side-Channel Attack on the CCA2-Secure HQC KEM. In Pierre-Yvan Liardet and Nele Mentens, editors, *Smart Card Research and Advanced Applications - 19th International Conference, CARDIS 2020, Virtual Event, November 18-19, 2020, Revised Selected Papers*, volume 12609 of *Lecture Notes in Computer Science*, pages 119–134. Springer, 2020.

[Sta10] François-Xavier Standaert. Introduction to side-channel attacks. In Ingrid M. R. Verbauwhede, editor, *Secure Integrated Circuits and Systems*, Integrated Circuits and Systems, pages 27–42. Springer, 2010.

[UXT+22] Rei Ueno, Keita Xagawa, Yutaro Tanaka, Akira Ito, Junko Takahashi, and Naofumi Homma. Curse of re-encryption: A generic power/em analysis on post-quantum kems. *IACR Trans. Cryptogr. Hardw. Embed. Syst.*, 2022(1):296–322, 2022.

[Var57] Rom Rubenovich Varshamov. Estimate of the number of signals in error correcting codes. *Docklady Akad. Nauk, SSSR*, 117:739–741, 1957.

[vdHL17] Joris van der Hoeven and Robin Larrieu. The frobenius FFT. In Michael A. Burr, Chee K. Yap, and Mohab Safey El Din, editors, *Proceedings of the 2017 ACM on International Symposium on Symbolic and Algebraic Computation, ISSAC 2017, Kaiserslautern, Germany, July 25-28, 2017*, pages 437–444. ACM, 2017.

[WBB+22] Guillaume Wafo-Tapa, Slim Bettaieb, Loïc Bidoux, Philippe Gaborit, and Etienne Marcatel. A practicable timing attack against HQC and its countermeasure. *Adv. Math. Commun.*, 16(3):621–642, 2022.

[WZ88] Yao Wang and Xuelong Zhu. A fast algorithm for the fourier transform over finite fields and its VLSI implementation. *IEEE J. Sel. Areas Commun.*, 6(3):572–577, 1988.

A | Execution times

Table A.1: Execution times in kcycles for multiplication

WS	Shift&Add	Karatsuba	CT Shift&Add	FAFFT
0	848	66777	7791	3062
1	848	67747	7791	3688
2	851	69653	7791	4404
3	856	72537	7791	5146
4	862	76345	7791	5892
x86	39	34	246	530

Table A.2: Encryption execution times (kcycles)

	Round 3		Round 4		
WS	reference	sparsemul	reference	sparsemul	fastmul
0	2726	18920	136262	18965	8834
1	2748	18937	138227	18991	10107
2	2799	18986	142093	19049	11595
3	2886	19064	147971	19154	13189
4	3035	19196	155762	19324	14856
x86	148	604	157	667	1212

Table A.3: Decryption execution times (kcycles)

	Round 3		Round 4		
WS	`reference`	`sparsemul`	`reference`	`sparsemul`	`fastmul`
0	1942	9010	68750	8915	5043
1	1950	9018	69733	8926	5677
2	1965	9027	71657	8941	6409
3	1989	9045	74568	8958	7176
4	2024	9071	78415	8998	7958
`x86`	219	370	185	396	757

Table A.4: Encapsulation execution times (kcycles)

	Round 3		Round 4		
WS	`reference`	`sparsemul`	`reference`	`sparsemul`	`fastmul`
0	3913	20105	137873	20571	10441
1	3958	20148	139835	20643	11763
2	4079	20261	143631	20783	13333
3	4289	20461	149685	21051	15087
4	4626	20787	157722	21473	16994
`x86`	216	667	220	727	1278

Table A.5: Decapsulation execution times (kcycles)

	Round 3		Round 4		
WS	`reference`	`sparsemul`	`reference`	`sparsemul`	`fastmul`
0	5923	29182	206691	29557	15546
1	5974	29230	209618	29634	17504
2	6110	29361	215263	29795	19804
3	6341	29578	224238	30084	22326
4	6724	29926	236118	30540	25015
`x86`	440	1041	407	1145	2041

List of Figures

2.1 Butterfly unit 14
2.2 A 2-layer Truncated FFT 16
2.3 A size-8 FFT 16
2.4 Power consumption of the RSA Square and Multiply algorithm 25

3.1 Expansion of the basis conversion algorithm for $f(x) = x^6$ 34
3.2 Basis conversion, $n < 8$ 35

4.1 Multiplication execution times on ARM (left) and x86 (right) in kcycles . . 42
4.2 Public Key Encryption execution times on ARM (kcycles) 43
4.3 Key Encapsulation Mechanism execution times on ARM (kcycles) 43
4.4 t-value statistics on the electromagnetic traces 45
4.5 Comparison of execution time for the McEliece, BIKE, and HQC KEMs . . 46
4.6 Memory usage comparison of McEliece, BIKE and HQC 47

List of Tables

2.1 Parameters of HQC 29

3.1 Memory consumption (in bytes) 31

4.1 Wait states and corresponding frequencies 41
4.2 t-values for the multiplication algorithms 44
4.3 t-values for the PKE and KEM algorithms 44

A.1 Execution times in kcycles for multiplication 59
A.2 Encryption execution times (kcycles) 59
A.3 Decryption execution times (kcycles) 60
A.4 Encapsulation execution times (kcycles) 60
A.5 Decapsulation execution times (kcycles) 60

List of Algorithms

1 Basis conversion from monomial to *novelpoly* 13
2 Lin-Chung-Han FFT 14
3 Frobenius Additive FFT Multiplication 17

4 Sparse-dense polynomial muktiplication 32
5 Constant-time monomial multiplication 33
6 Encoding, as a vector-matrix product 36
7 Keygen, masked version 38
8 Encryption, masked version 38
9 Decryption, masked version 39

Listings

2.1 A non constant-time password checker 23
2.2 RSA square and multiply 24

List of Symbols

Symbol	Description
$\mathbb{Z}$	Ring of integer numbers
$\mathbb{F}_2$	Galois field of order 2, GF(2)
$\mathbb{F}_{2^n}$	Galois field of order 2^n, GF(2^n)
$\mathcal{V}$	Vector space of dimension n over GF(2)
$\mathcal{R}$	Ring of binary polynomials of degree less than n
$\mathcal{R}_{<n}$	Ring of binary polynomials of degree less than n
$\mathcal{R}_\omega$	Polynomials in $\mathcal{R}$ with exactly ω non-null coefficients
$\mathtt{wt}(\cdot)$	Hamming weight of a binary string
$\lll_n$	Circular shift to the left of n positions
$[\![a]\!] = (a_0, \ldots, a_{d-1})$	Additive share splitting of a in d shares over $\mathcal{R}$
$\xleftarrow{\$}$	Uniform sampling from the right hand side of the equation
$(a + \sum_{i=0}^{d-2} \mathtt{rnd}_i)$	Masking of a with $d-1$ masks sampled from the same field of a
$\textsc{Collapse}(a, [\![b]\!])$	Sum all shares of b, in order, to a

Ringraziamenti

Vorrei innanzitutto ringraziare il professor Barenghi ed il professor Pelosi per la pazienza, il supporto e la guida, che mi hanno permesso di sviluppare questo progetto ed apprendere tante cose interessanti.

Un ringraziamento più che dovuto va ai miei genitori e alla mia famiglia, che mi hanno sempre sostenuto e incoraggiato a seguire la mia passione, nonostante tutti i sacrifici. Un ringraziamento speciale va a Scibubi, che ha sempre la pazienza di supportarmi e ascoltarmi, anche quando parlo e (non) mi capisco da solo.

Desidero poi ringraziare i miei coinqilini sia passati che presenti: senza di loro questi cinque anni sarebbero stati meno caotici, ma senza ombra di dubbio non sarebbero stati così divertenti.

Infine, un ringraziamento va a tutti i miei amici e colleghi, che mi hanno accompagnato in questo viaggio e, tra alti e bassi, mi hanno sempre incoraggiato a continuare.