

ELEKTRON MESSAGE API 3.0.2

REUTERS DOMAIN MODELS (RDM) USAGE GUIDE

JAVA EDITION



© Thomson Reuters 2016. All Rights Reserved.

Thomson Reuters, by publishing this document, does not guarantee that any information contained herein is and will remain accurate or that use of the information will ensure correct and faultless operation of the relevant service or equipment. Thomson Reuters, its agents and employees, shall not be held liable to or through any user for any loss or damage whatsoever resulting from reliance on the information contained herein.

This document contains information proprietary to Thomson Reuters and may not be reproduced, disclosed, or used in whole or part without the express written permission of Thomson Reuters.

Any Software, including but not limited to, the code, screen, structure, sequence, and organization thereof, and Documentation are protected by national copyright laws and international treaty provisions. This manual is subject to U.S. and other national export regulations.

Nothing in this document is intended, nor does it, alter the legal obligations, responsibilities or relationship between yourself and Thomson Reuters as set out in the contract existing between us.

Contents

| | | |
|------------------|---|-----------|
| Chapter 1 | Introduction | 1 |
| 1.1 | About this Manual | 1 |
| 1.2 | Audience | 1 |
| 1.3 | Open Message Models (OMM) | 1 |
| 1.4 | Reuters Wire Format (RWF) | 1 |
| 1.5 | Acronyms and Abbreviations | 2 |
| 1.6 | References | 2 |
| 1.7 | Documentation Feedback | 2 |
| 1.8 | Conventions | 3 |
| 1.8.1 | Typographic and Syntax | 3 |
| 1.8.2 | Definitions | 3 |
| Chapter 2 | Domain Model Overview | 4 |
| 2.1 | Introduction | 4 |
| 2.2 | Reuters Domain Models VS User Defined Model | 4 |
| 2.2.1 | Reuters Domain Models (RDMs) | 4 |
| 2.2.2 | User-Defined Domain Model | 5 |
| 2.2.3 | Domain Message Model Creation | 5 |
| 2.3 | Message Concepts | 6 |
| 2.4 | OMM Consumer / OMM Interactive Provider Initial Interaction | 7 |
| 2.5 | Sending and Receiving Content | 9 |
| 2.6 | General EMA Concepts | 10 |
| 2.6.1 | Snapshot and Streaming Requests | 10 |
| 2.6.2 | Reissue Requests and Pause/Resume | 10 |
| 2.6.3 | Clearing the Cache on Refreshes | 11 |
| 2.6.4 | Dynamic View | 11 |
| 2.6.5 | Batch Request | 11 |
| 2.6.6 | Posting | 11 |
| Chapter 3 | Login Domain | 12 |
| 3.1 | Description | 12 |
| 3.2 | Usage | 12 |
| 3.2.1 | Login Request Message | 12 |
| 3.2.2 | Login Request Elements | 14 |
| 3.2.3 | Login Refresh Message | 17 |
| 3.2.4 | Login Refresh Elements | 18 |
| 3.2.5 | Login Status Message | 22 |
| 3.2.6 | Login Update Message | 23 |
| 3.2.7 | Login Close Message | 23 |
| 3.2.8 | Login Generic Message | 23 |
| 3.2.9 | Login Post Message | 24 |
| 3.2.10 | Login Ack Message | 24 |
| 3.3 | Data | 25 |
| 3.3.1 | Login Refresh Message Payload | 25 |

| | | |
|------------------|--|-----------|
| 3.3.2 | Login Generic Message Payload | 27 |
| 3.4 | Special Semantics | 28 |
| 3.4.1 | Login Direction | 28 |
| 3.4.2 | Initial Login | 28 |
| 3.4.3 | Authentication | 28 |
| 3.4.4 | Multiple Logins | 29 |
| 3.4.5 | Group and Service Status | 29 |
| 3.4.6 | Single Open and Allow Suspect Data | 30 |
| 3.5 | Specific Usage: RDF Direct Login | 32 |
| 3.6 | Specific Usage: Enterprise Platform | 32 |
| 3.7 | Specific Usage: Login Credentials Update Feature | 32 |
| Chapter 4 | Source Directory Domain | 33 |
| 4.1 | Description | 33 |
| 4.2 | Usage | 33 |
| 4.2.1 | Source Directory Request Message | 33 |
| 4.2.2 | Source Directory Refresh Message | 35 |
| 4.2.3 | Source Directory Update Message | 36 |
| 4.2.4 | Source Directory Status Message | 37 |
| 4.2.5 | Source Directory Generic Message | 37 |
| 4.3 | Data | 38 |
| 4.3.1 | Source Directory Refresh and Update Payload | 38 |
| 4.3.2 | Source Directory ConsumerStatus Generic Message Payload | 48 |
| 4.4 | Special Semantics | 50 |
| 4.4.1 | Multiple Streams | 50 |
| 4.4.2 | ServiceState and AcceptingRequests | 50 |
| 4.4.3 | Service and Group Status Values | 50 |
| 4.4.4 | Removing a Services | 51 |
| 4.4.5 | Service IDs | 51 |
| 4.4.6 | Automatic Request from EMA Consumer | 51 |
| 4.4.7 | Client Requests Non-Existing Service Directory | 51 |
| Chapter 5 | Dictionary Domain | 52 |
| 5.1 | Description | 52 |
| 5.2 | Decoding FieldList Contents with Field and Enumerated Types Dictionaries | 53 |
| 5.3 | Usage | 55 |
| 5.3.1 | Dictionary Request Message | 55 |
| 5.3.2 | Dictionary Refresh Message | 56 |
| 5.3.3 | Dictionary Status Message | 58 |
| 5.4 | Data | 59 |
| 5.4.1 | Filter | 59 |
| 5.4.2 | Refresh Message Summary Data | 60 |
| 5.4.3 | Response Message Payload | 61 |
| 5.4.4 | DictionaryId | 61 |
| 5.5 | Field Dictionary | 62 |
| 5.5.1 | Field Dictionary Payload | 62 |
| 5.5.2 | Field Dictionary File Format | 64 |
| 5.5.3 | Specific Usage: RDF Direct and FieldDefinition Dictionary | 68 |

| | | |
|------------------|---|-----------|
| 5.6 | Enumerated Types Dictionary | 69 |
| 5.6.1 | Enumerated Types Dictionary Payload | 69 |
| 5.6.2 | Enumerated Types Dictionary File Format | 71 |
| 5.6.3 | Specific Usage: RDF Direct and EnumTable Dictionary | 73 |
| 5.7 | Other Dictionary Types | 74 |
| 5.7.1 | DisplayTemplate DictionaryType | 74 |
| 5.7.2 | DataDefinition DictionaryType | 74 |
| 5.7.3 | StyleSheet DictionaryType | 74 |
| 5.7.4 | Reference Dictionary Type | 74 |
| 5.8 | Special Semantics | 75 |
| 5.8.1 | DictionariesProvided and DictionariesUsed | 75 |
| 5.8.2 | Version Check | 76 |
| 5.8.3 | Streaming Dictionary | 76 |
| 5.9 | Specific Usage: Enterprise Platform | 76 |
| Chapter 6 | MarketPrice Domain | 77 |
| 6.1 | Description | 77 |
| 6.2 | Usage | 77 |
| 6.2.1 | MarketPrice Request Message | 77 |
| 6.2.2 | MarketPrice Refresh Message | 79 |
| 6.2.3 | MarketPrice Update Message | 81 |
| 6.2.4 | MarketPrice Status Message | 83 |
| 6.2.5 | MarketPrice Post Message | 84 |
| 6.3 | Data: Response Message Payload | 85 |
| 6.4 | Special Semantics | 86 |
| 6.4.1 | Snapshots | 86 |
| 6.4.2 | Ripple Fields | 86 |
| 6.5 | Specific Usage: RDF Direct MarketPrice | 86 |
| 6.6 | Specific Usage: Legacy Records | 86 |
| Chapter 7 | MarketByOrder Domain | 87 |
| 7.1 | Description | 87 |
| 7.2 | Usage | 87 |
| 7.2.1 | MarketByOrder Request Message | 87 |
| 7.2.2 | MarketByOrder Refresh Message | 89 |
| 7.2.3 | MarketByOrder Update Message | 91 |
| 7.2.4 | MarketByOrder Status Message | 93 |
| 7.2.5 | MarketByOrder Post Message | 93 |
| 7.3 | Data: Response Message Payload | 94 |
| 7.4 | Special Semantics | 95 |
| 7.5 | Specific Usage: RDF Direct and Response Message Payload | 96 |
| 7.6 | Specific Usage: Enterprise Platform | 96 |
| Chapter 8 | MarketByPrice Domain | 97 |
| 8.1 | Description | 97 |
| 8.2 | Usage | 97 |
| 8.2.1 | MarketByPrice Request Message | 97 |

| | | |
|-------------------|---|------------|
| 8.2.2 | MarketByPrice Refresh Message | 99 |
| 8.2.3 | MarketByPrice Update Message | 101 |
| 8.2.4 | MarketByPrice Status Message | 103 |
| 8.2.5 | MarketByPrice Post Message | 103 |
| 8.3 | Data: Response Message Payload | 104 |
| 8.4 | Special Semantics | 105 |
| 8.5 | Specific Usage: RDF Direct and the Response Message Payload | 105 |
| 8.6 | Specific Usage: Enterprise Platform | 106 |
| Chapter 9 | MarketMaker Domain | 107 |
| 9.1 | Description | 107 |
| 9.2 | Usage | 107 |
| 9.2.1 | MarketMaker Request Message | 107 |
| 9.2.2 | MarketMaker Refresh Message | 109 |
| 9.2.3 | MarketMaker Update Message | 111 |
| 9.2.4 | MarketMaker Status Message | 113 |
| 9.2.5 | MarketMaker Post Message | 113 |
| 9.3 | Data: Response Message Payload | 114 |
| 9.4 | Special Semantics | 115 |
| 9.5 | Specific Usage: RDF Direct and the Response Message Payload | 116 |
| 9.6 | Specific Usage: Enterprise Platform | 117 |
| Chapter 10 | YieldCurve Domain | 118 |
| 10.1 | Description | 118 |
| 10.2 | Usage | 118 |
| 10.2.1 | YieldCurve Request Message | 118 |
| 10.2.2 | YieldCurve Refresh Message | 120 |
| 10.2.3 | YieldCurve Update Message | 122 |
| 10.2.4 | YieldCurve Status Message | 124 |
| 10.2.5 | YieldCurve Domain Post Message | 124 |
| 10.3 | Data: The Response Message Payload | 125 |
| 10.4 | Special Semantics | 128 |
| 10.5 | Specific Usage: ATS | 128 |
| Chapter 11 | SymbolList Domain | 129 |
| 11.1 | Description | 129 |
| 11.2 | Usage | 129 |
| 11.2.1 | SymbolList Request Message | 129 |
| 11.2.2 | SymbolList Refresh Message | 131 |
| 11.2.3 | SymbolList Update Message | 133 |
| 11.2.4 | SymbolList Status Message | 135 |
| 11.3 | Data: Response Message Payload | 136 |
| 11.4 | Special Semantics | 136 |
| 11.5 | Specific Usage: RDF Direct | 137 |
| Chapter 12 | Payload in ReqMsg | 138 |

| | | |
|------|-----------------------|-----|
| 12.1 | View Definition | 138 |
| 12.2 | ItemList | 139 |
| 12.3 | Symbol List Behaviors | 140 |

Figures

| | |
|--|-----|
| FIGURE 1: OMM CONSUMER AND PROVIDER APPLICATION INITIAL INTERACTIONS | 7 |
| FIGURE 2: OMM NON-INTERACTIVE PROVIDER AND ADH INITIAL INTERACTIONS | 8 |
| FIGURE 2: OMM CONSUMER AND INTERACTIVE PROVIDER GENERAL DOMAIN USE | 9 |
| FIGURE 3: LOGIN REFRESH MESSAGE PAYLOAD | 25 |
| FIGURE 4: LOGIN GENERIC MESSAGE PAYLOAD | 27 |
| FIGURE 5: SOURCE DIRECTORY REFRESH/UPDATE MESSAGE PAYLOAD | 38 |
| FIGURE 6: SOURCE DIRECTORY GENERIC MESSAGE PAYLOAD | 48 |
| FIGURE 7: FIELDLIST REFERENCING FIELD DICTIONARY | 53 |
| FIGURE 8: FIELDENTRY REFERENCING ENUMERATED TYPES TABLE | 54 |
| FIGURE 9: FIELD DICTIONARY PAYLOAD | 62 |
| FIGURE 10: FIELD DICTIONARY FILE FORMAT SAMPLE | 64 |
| FIGURE 11: FIELD DICTIONARY TAGGED ATTRIBUTES SAMPLE | 64 |
| FIGURE 12: ENUMERATED TYPES DICTIONARY REFRESH MESSAGE PAYLOAD | 69 |
| FIGURE 13: ENUMERATED TYPES DICTIONARY FILE FORMAT SAMPLE | 71 |
| FIGURE 14: ENUMERATED TYPES DICTIONARY TAGGED ATTRIBUTE SAMPLE | 72 |
| FIGURE 15: MARKETPRICE RESPONSE MESSAGE PAYLOAD | 85 |
| FIGURE 16: MARKETBYORDER RESPONSE MESSAGE PAYLOAD | 94 |
| FIGURE 17: MARKETBYPRICE RESPONSE MESSAGE PAYLOAD | 104 |
| FIGURE 18: MARKETMAKER RESPONSE MESSAGE PAYLOAD | 114 |
| FIGURE 19: YIELD CURVE PAYLOAD EXAMPLE | 127 |
| FIGURE 20: SYMBOLLIST RESPONSE MESSAGE PAYLOAD | 136 |

Tables

| | |
|---|----|
| TABLE 1: ACRONYMS AND ABBREVIATIONS | 2 |
| TABLE 2: REUTERS DOMAIN MODEL OVERVIEW | 5 |
| TABLE 3: MESSAGE CONCEPTS | 6 |
| TABLE 4: CONFIGURE LOGIN REQUEST MESSAGE | 12 |
| TABLE 5: LOGIN REQUEST MESSAGE | 13 |
| TABLE 6: LOGIN REQUEST ATTRIBUTE ELEMENTS | 16 |
| TABLE 7: LOGIN REFRESH MESSAGE | 17 |
| TABLE 8: LOGIN REFRESH ATTRIBUTE ELEMENTS | 21 |
| TABLE 9: LOGIN STATUS MESSAGE | 22 |
| TABLE 10: LOGIN GENERIC MESSAGE | 23 |
| TABLE 11: VECTOR SUMMARYDATA ELEMENTLIST CONTENTS | 26 |
| TABLE 12: ELEMENTLIST CONTENTS | 26 |
| TABLE 13: MAPENTRY'S ELEMENTS | 27 |
| TABLE 14: SINGLEOPEN AND ALLOWSUSPECTDATA HANDLING | 31 |
| TABLE 15: SOURCE DIRECTORY REQUEST MESSAGE | 34 |
| TABLE 16: SOURCE DIRECTORY REFRESH MESSAGE | 35 |
| TABLE 17: SOURCE DIRECTORY UPDATE MESSAGE | 36 |
| TABLE 18: SOURCE DIRECTORY STATUS MESSAGE | 37 |
| TABLE 19: SOURCE DIRECTORY GENERIC MESSAGE | 37 |
| TABLE 20: SOURCE DIRECTORY MAP | 38 |
| TABLE 21: SOURCE DIRECTORY MAPENTRY'S FILTERENTRIES | 40 |
| TABLE 22: SOURCE DIRECTORY INFO FILTERENTRY'S ELEMENTS | 42 |
| TABLE 23: SOURCE DIRECTORY STATE FILTERENTRY'S ELEMENTS | 43 |
| TABLE 24: SOURCE DIRECTORY GROUP FILTERENTRY'S ELEMENTS | 44 |
| TABLE 25: SOURCE DIRECTORY LOAD FILTERENTRY'S ELEMENTS | 45 |
| TABLE 26: SOURCE DIRECTORY DATA FILTERENTRY'S ELEMENTS | 46 |
| TABLE 27: SOURCE DIRECTORY LINK FILTERENTRY MAP'S ENTRIES | 47 |
| TABLE 28: SOURCE DIRECTORY GENERIC MESSAGE MAPENTRY'S ELEMENTS | 49 |
| TABLE 29: SERVICESTATE AND ACCEPTINGREQUESTS | 50 |
| TABLE 30: DICTIONARY REQUEST MESSAGE | 56 |
| TABLE 31: DICTIONARY REFRESH MESSAGE | 57 |
| TABLE 32: DICTIONARY STATUS MESSAGE | 58 |
| TABLE 33: DICTIONARY'S FILTER | 59 |
| TABLE 34: DICTIONARY SUMMARYDATA | 60 |
| TABLE 35: FIELD DICTIONARY ELEMENTENTRY | 63 |
| TABLE 36: FIELD DICTIONARY FILE TAG INFORMATION | 65 |
| TABLE 37: FIELD DICTIONARY FILE COLUMN NAMES AND ELEMENTENTRY NAMES | 65 |
| TABLE 38: FIELD DICTIONARY TYPE KEYWORDS | 66 |
| TABLE 39: MARKETFEED TO RWF MAPPINGS IN RDMFIELDDICTIONARY | 67 |
| TABLE 40: RECOMMENDED MARKETFEED/RWF FIELD MAPPINGS | 68 |
| TABLE 41: ELEMENTENTRIES DESCRIBING EACH ENUMERATED TYPE TABLE | 70 |
| TABLE 42: ENUMERATED TYPE DICTIONARY FILE TAG INFORMATION | 72 |
| TABLE 43: RWF ENUMTYPE DICTIONARY FILE FORMAT REFERENCE FIELDS | 73 |
| TABLE 44: RWF ENUMTYPE DICTIONARY FILE VALUES | 73 |

| | |
|---|-----|
| TABLE 45: MARKETPRICE REQUEST MESSAGE | 78 |
| TABLE 46: MARKETPRICE REFRESH MESSAGE | 80 |
| TABLE 47: MARKETPRICE UPDATE MESSAGE | 82 |
| TABLE 48: MARKETPRICE STATUS MESSAGE | 83 |
| TABLE 49: MARKETBYORDER REQUEST MESSAGE | 88 |
| TABLE 50: MARKETBYORDER REFRESH MESSAGE | 90 |
| TABLE 51: MARKETBYORDER UPDATE MESSAGE | 92 |
| TABLE 52: MARKETBYORDER STATUS MESSAGE | 93 |
| TABLE 53: MARKETBYPRICE REQUEST MESSAGE | 98 |
| TABLE 54: MARKETBYPRICE REFRESH MESSAGE | 100 |
| TABLE 55: MARKETBYPRICE UPDATE MESSAGE | 102 |
| TABLE 56: MARKETBYPRICE STATUS MESSAGE | 103 |
| TABLE 57: MARKETMAKER REQUEST MESSAGE | 108 |
| TABLE 58: MARKETMAKER REFRESH MESSAGE | 110 |
| TABLE 59: MARKETMAKER UPDATE MESSAGE | 112 |
| TABLE 60: MARKETMAKER STATUS MESSAGE | 113 |
| TABLE 61: YIELDCURVE REQUEST MESSAGE | 119 |
| TABLE 62: YIELDCURVE REFRESH MESSAGE | 121 |
| TABLE 63: YIELDCURVE UPDATE MESSAGE | 123 |
| TABLE 64: YIELDCURVE STATUS MESSAGE | 124 |
| TABLE 65: YIELD CURVE INPUTS AND OUTPUTS | 126 |
| TABLE 66: SYMBOLLIST REQUEST MESSAGE | 130 |
| TABLE 67: SYMBOLLIST REFRESH MESSAGE | 132 |
| TABLE 68: SYMBOLLIST UPDATE MESSAGE | 134 |
| TABLE 69: SYMBOLLIST STATUS MESSAGE | 135 |
| TABLE 70: VIEW DEFINITION IN PAYLOAD | 138 |
| TABLE 71: ITEM LIST IN PAYLOAD | 139 |
| TABLE 72: REQUEST MESSAGE PAYLOAD FOR SYMBOL LIST DOMAIN SPECIFYING SYMBOL LIST BEHAVIORS | 140 |

Chapter 1 Introduction

1.1 About this Manual

The *RDM Usage Guide* describes how the Reuters Domain Models (RDM) are defined in terms of the Open Message Model (OMM). RDM data is available from Reuters Data Feed Direct and an Advanced Distribution Server (ADS, an Enterprise Platform component) using the Elektron Messaging API (EMA).

1.2 Audience

This guide targets software programmers who are familiar with the EMA message model and wish to develop EMA-based applications to access RDM data. It is helpful, but not required, to have an understanding of OMM concepts before using this document.

1.3 Open Message Models (OMM)

The **OMM** is a collection of message header and data constructs. Some OMM message header constructs, such as the Update message, have implicit market logic associated with them while others, such as the Generic message, allow for free-flowing bi-directional messaging. OMM data constructs can be combined in various ways to model data that ranges from simple (or flat) primitive types to complex multiple level hierarchal data.

The layout and interpretation of any specific OMM model, also referred to as a domain model, is described within that model's definition and is not coupled with the API. The OMM is the flexible tool that simply provides the building blocks to design and produce domain models to meet the needs of the system and its users. EMA provides structural representations of the OMM constructs and manages the RWF binary encoded representation of the OMM. EMA users can leverage the provided OMM constructs to consume or provide OMM data throughout the Enterprise Platform.

1.4 Reuters Wire Format (RWF)

Reuters Wire Format (RWF) is the encoded representation of OMM. RWF is a highly-optimized, binary format designed to reduce the cost of data distribution as compared to previous wire formats. Binary encoding represents data in the machine's native manner, enabling further use in calculations or data manipulations. RWF allows for serializing OMM message and data constructs in an efficient manner while still allowing rich content types. RWF can distribute field identifier-value pair data, self-describing data, as well as more complex, nested hierarchal content.

1.5 Acronyms and Abbreviations

| ACRONYM | DEFINITION |
|------------|--|
| ADH | Advanced Data Hub |
| ADS | Advanced Distribution Server |
| API | Application Programming Interface |
| ATS | Advanced Transformation System |
| DACS | Data Access Control System |
| DMM | Domain Message Model |
| IDN | Integrated Data Network |
| OMM | Open Message Model |
| QoS | Quality of Service |
| RDM | Reuters Domain Model |
| RDF Direct | Reuters Data Feed Direct |
| RMTES | Reuters Multi-Lingual Text Encoding Standard |
| RSSL | Reuters Source Sink Library |
| RWF | Reuters Wire Format |
| TS1 | Time Series One |

Table 1: Acronyms and Abbreviations

1.6 References

For additional EMA documentation, refer to *EMA 3.0.2 Java Edition Developers Guide*.

1.7 Documentation Feedback

While we make every effort to ensure the documentation is accurate and up-to-date, if you notice any errors, or would like to see more details on a particular topic, you have the following options:

- Send us your comments via email at apidocumentation@thomsonreuters.com.
- Mark up the PDF using the Comment feature in Adobe Reader. After adding your comments, you can submit the entire PDF to Thomson Reuters by clicking **Send File** in the **File** menu. Use the apidocumentation@thomsonreuters.com address.

1.8 Conventions

1.8.1 Typographic and Syntax

- The Reuters Domain Models (RDMs) are described in terms of OMM concepts.
- Class, methods, and types are shown in **orange, Lucida Console** text
- The names of the data members correspond to the method names for both get/set from the EMA interface, with the get prefixes removed and the first character always upper case.
- Parameters, filenames, and directories are shown in **Bold** font.
- When included in the bodytext, new concepts are called out in ***Bold, italics*** the first time they are mentioned.
- Document titles are formatted in *italics*.
- Integer constants are defined in all capital letters with underscores (e.g. **MMT_LOGIN = 1**, **SERVICE_INFO_FILTER**). In EMA Java, they can be found in the **thomsonreuters.ema.rdm** namespace and in the **ema/rdm/EmaRdm.java** file.
- ***Payload*** generally refers to message payload.
- The names of **filterId** values (e.g. **SERVICE_INFO_ID**) correspond to the flag value enumeration defined for use with message key's **filter** (**SERVICE_INFO_FILTER**). Names maybe shortened for clarity (e.g. **DirectoryInfo**).
- Dot-separated notation indicates data available within a hierarchy. Each period can indicate a class a data member, an entry or an element name.

1.8.2 Definitions

- ***Required*** means the data must be provided or set.
- ***Recommended*** means the data is not strictly required, but should be provided or set by all applications.
- ***Optional*** means the data may be provided or set, but is not required. The data will be passed through the network.
- ***Extensible*** means the numeric ranges may have more values defined in the future. It means additional Elements can be added to Element Lists.

Chapter 2 Domain Model Overview

2.1 Introduction

A **Domain Message Model (DMM)** describes a specific arrangement of OMM message and data constructs. A domain message model will define any specialized behaviors associated with the domain or any specific meaning or semantics associated with data contained in the message. Unless a domain model specifies otherwise, any implicit market logic associated with a message still applies (e.g. an Update message indicates that any previously received data also contained in the Update message is being modified).

2.2 Reuters Domain Models VS User Defined Model

2.2.1 Reuters Domain Models (RDMs)

An **RDM** is a domain message model typically provided or consumed by a Thomson Reuters product, such as the Enterprise Platform Real-Time, Data Feed Direct, or Elektron. Some currently defined RDMs allow for authenticating to a provider (e.g. Login), exchanging field or enumeration dictionaries (e.g. Dictionary), and providing or consuming various types of market data (e.g. MarketPrice, MarketByOrder, MarketByPrice). Thomson Reuters's defined models have a domain value of less than 128.

The following table provides a high-level overview of the currently available RDMs. The following chapters provide more detailed descriptions for each of these.

| DOMAIN | PURPOSE |
|------------------|---|
| Login | Used to authenticate users and advertise/request features that are not specific to a particular domain. Use and support of this domain is required for all OMM applications. This is considered an administrative domain. Content is required and expected by many Thomson Reuters components, and following the domain model definition is expected. See Chapter 3 for detailed information. |
| Source Directory | Used to advertise information about available services and their state, quality of service (QOS), and capabilities. This domain is also used to convey any group status and group merge information. Interactive and Non-Interactive OMM Provider applications require support for this domain. Thomson Reuters strongly recommends that OMM Consumers request this domain. This is considered an administrative domain. Content is required and expected by many Thomson Reuters components, and following the domain model definition is expected. See Chapter 4 for detailed information. |
| Dictionary | Used to provide dictionaries that may be necessary to decode data. Dictionary domain use is optional. It is recommended for Provider applications to support this. This is considered an administrative domain. Content is required and expected by many Thomson Reuters components, and following the domain model definition is expected. See Chapter 5 for detailed information. |
| MarketPrice | Provides access to Level I market information such as trades, indicative quotes, and top of book quotes. Content includes information such as volume, bid, ask, net change, last price, high, and low. See Chapter 6 for detailed information. |

| DOMAIN | PURPOSE |
|---------------|---|
| MarketByOrder | Provides access to Level II full order books. Contains a list of orders, keyed by the order Ids along with the information related to that order, such as price, whether it is a bid/ask order, size, quote time, or market maker identifier. See Chapter 7 for detailed information. |
| MarketByPrice | Provides access to Level II market depth information. Contains a list of price points (using that price and bid/ask side as its key) along with the information related to that price point. See Chapter 8 for detailed information. |
| MarketMaker | Provides access to market maker quotes and trade information. Contains a list of market makers (using that market maker's Id as its key) along with the information such as that market maker's bid and asking prices, quote time, and market source. See Chapter 9 for detailed information. |
| YieldCurve | This section defines a yield curve model as is currently supported by the ATS. The YieldCurve domain shows the relation between the interest rate and the term, or time to maturity, associated with the debt of a borrower. See Chapter 10 for detailed information. |
| SymbolList | Provides access to a set of symbol names, typically from an index, service, or cache. Minimally contains symbol names and can optionally contain additional cross-reference information such as permission information, name type, or other venue specific content. See Chapter 11 for detailed information. |

Table 2: Reuters Domain Model Overview

2.2.2 User-Defined Domain Model

A **User-Defined Domain Model** is a domain message model defined by a party other than Thomson Reuters. These may be defined to solve a specific user or system need in a particular deployment which is not resolvable through the use of an RDM. Any user defined model must use a domain value between 128 and 255. If needed, domain model designers can work with Thomson Reuters to define their models as standard RDMs. This allows for the most seamless interoperability with future RDM definitions and with other Thomson Reuters products.

2.2.3 Domain Message Model Creation

The focus of this document is to discuss defined RDMs that are capable of flowing through EMA. OMM allows users of EMA to create their own Domain Message Models (DMMs) in addition to those described in this document. When defining a DMM, several things should be considered:

- Is a new DMM really needed, or can you express the data in terms of an existing RDM?
- The DMM should be well-defined. Following the design templates used in this document may be a good idea. The structure, properties, use cases, and limitations of the DMM should be specified.
- While OMM provides building blocks that can structure the data in many ways, the semantics of the data must abide by the rules of OMM. For example, custom DMMs should follow the request, refresh, status, and update semantics implicitly defined by those messages. More flexible messaging can be accomplished through the use of a generic message, which allows for more free-form bidirectional messaging after a stream is established.
- DomainType values less than 128 are reserved for RDMs. The domainType of a custom DMM must be between 128 and 255 (including 128 and 255).
- You might want to work with Thomson Reuters to define a published RDM, rather than using a custom DMM. This ensures the most seamless interoperability with future RDMs and other Thomson Reuters products.

2.3 Message Concepts

The following table describes the mapping of OMM concepts with actual interfaces. For clarity and consistency, the Message concept will be referenced throughout the rest of the *RDM Usage Guide*.

| MESSAGE CONCEPT | DESCRIPTION/VALUE |
|-------------------------------|---|
| Request Message | <code>ReqMsg</code> whose data type is <code>DataTypes.REQ_MSG</code> |
| Close Message (Request) | <code>OmmConsumer.unregister()</code> |
| Refresh Message (Response) | <code>RefreshMsg</code> whose data type is <code>DataTypes.REFRESH_MSG</code> |
| Update Message (Response) | <code>UpdateMsg</code> whose data type is <code>DataTypes.UPDATE_MSG</code> |
| Status message (Response) | <code>StatusMsg</code> whose data type is <code>DataTypes.STATUS_MSG</code> |
| Post Message | <code>PostMsg</code> whose data type is <code>DataTypes.POST_MSG</code> |
| Generic Message | <code>GenericMsg</code> whose data type is <code>DataTypes.GENERIC_MSG</code> |
| Ack Message | <code>AckMsg</code> whose data type is <code>DataTypes.ACK_MSG</code> |

Table 3: Message Concepts

2.4 OMM Consumer / OMM Interactive Provider Initial Interaction

An OMM consumer application can establish connections to other OMM interactive provider applications, including the Thomson Reuters Enterprise Platform, Data Feed Direct, and Elektron. This interaction first requires an exchange of login messages between the consumer and provider, where the provider can either accept or reject the consumer. If the consumer is allowed to log in, it may then request the list of services available from the provider. Optionally¹, the consumer can request any dictionaries it needs to decode data from the provider. After this process successfully completes, the consumer application can begin requesting from non-administrative domains, which provide other content (e.g. MarketPrice, MarketByOrder).

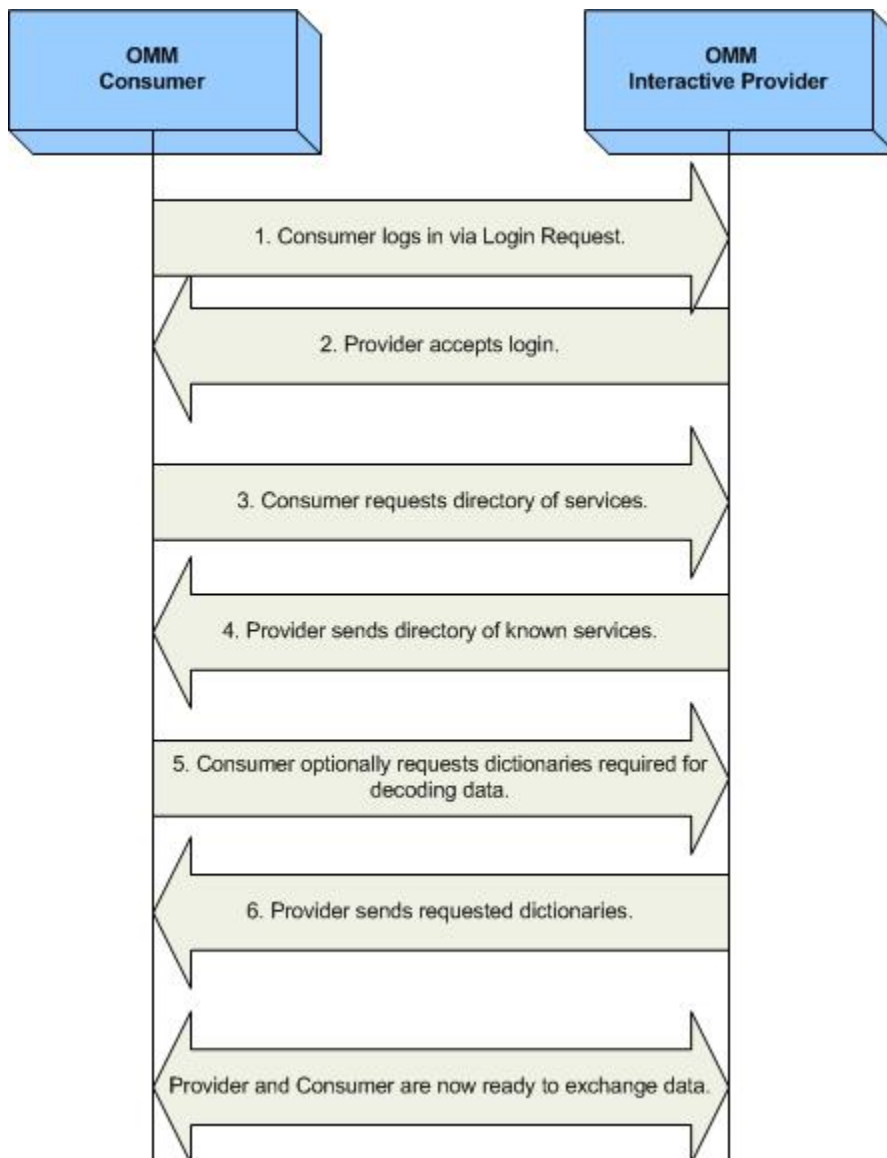


Figure 1: OMM Consumer and Provider Application Initial Interactions

¹ Instead of downloading any needed dictionaries, the application can load them from a local file.

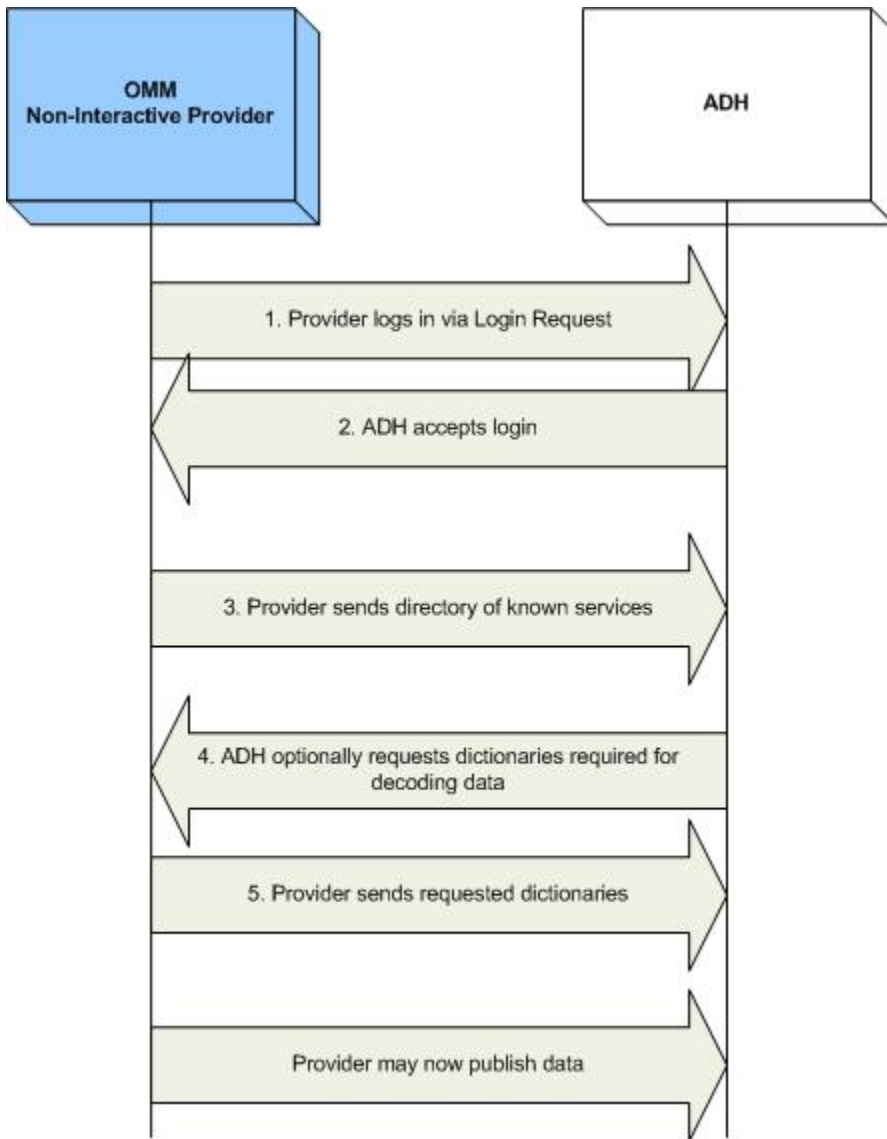


Figure 2: OMM Non-Interactive Provider and ADH Initial Interactions

2.5 Sending and Receiving Content

Use of non-administrative domains generally follows a specific sequence:

- The consumer sends a request (refer to Section 2.3) message containing the name of an item it is interested in.
- The provider first responds with a refresh (refer to Section 2.3) message to bring the consumer up-to-date with all currently available information.
- As data changes, the provider sends update (refer to Section 2.3) messages (if the consumer requested streaming information).
- When the consumer is no longer interested, it sends a close message to close the stream (or, if the provider needs to close the stream, it uses a status (refer to Section 2.3) message).

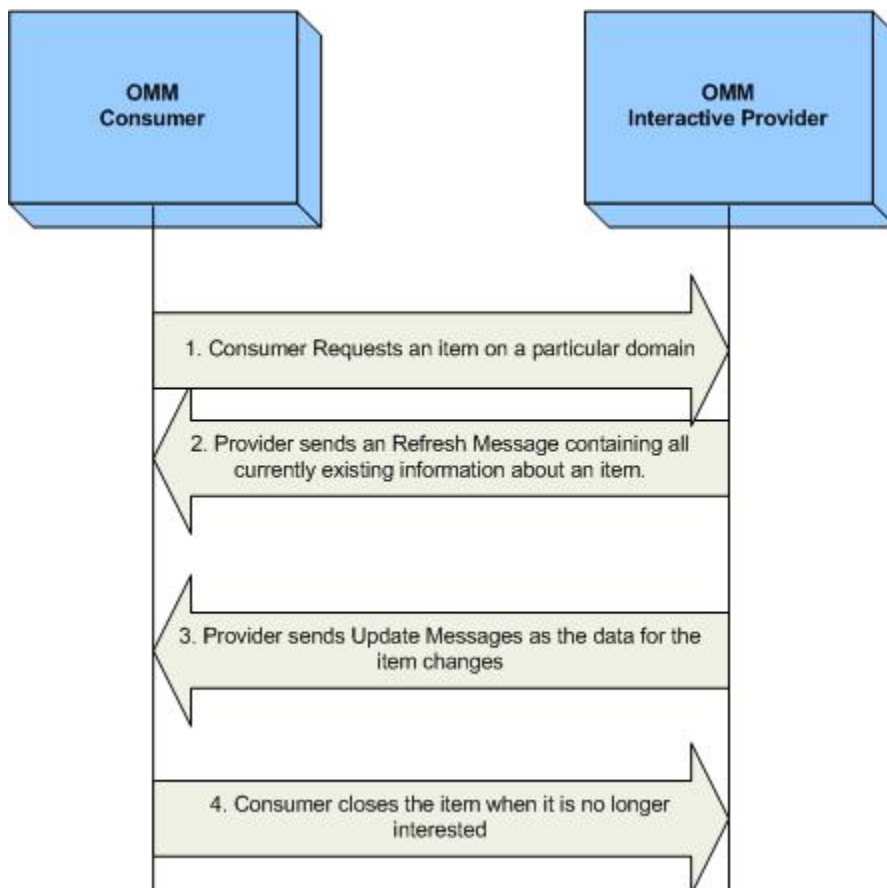


Figure 3: OMM Consumer and Interactive Provider general Domain Use

2.6 General EMA Concepts

Many domains share a set of common behaviors for handling data. If a specific behavior is not supported on a domain, this should be specified in that domain's detailed description. This section briefly defines these concepts. Refer to the *EMA 3.0.2 Java Edition Developers Guide* for further details.

2.6.1 Snapshot and Streaming Requests

Many domains generally support issuing a request (see Section 2.3) message with or without setting **ReqMsg. InterestAfterRefresh**. When the method is passed as **true** value, the request is known as a “streaming” request, meaning that final refresh will be followed by updates.

When a snapshot (non-streaming) request is made, the stream will be closed after the final part of the refresh is received. The final refresh is indicated by setting **RefreshMsg. Complete** with **true** value on the refresh (see Section 2.3) message. The consumer should be prepared to receive status or update messages (see Section 2.3) between the first and final parts of the response refresh (if the domain supplies only a single part of the response refresh messages, like Market Price, no updates would be delivered on the stream).

2.6.2 Reissue Requests and Pause/Resume

A consumer application can request a new refresh and change certain parameters on an already requested stream. To do so, the application sends subsequent request message (Section 2.2) on the same stream. This is known as a **reissue**.

A reissue changes the priority of a stream and pauses or resumes data flow.

- To pause streaming data, the application can send a reissue by setting **ReqMsg. Pause** with **true** value. Issuing a pause on the Login stream is interpreted as a Pause All request, resulting in all streams being paused.
- To resume data flow on the stream, the application can send a subsequent reissue by calling **ReqMsg. InterestAfterRefresh** with **true** value. Issuing a resume on the Login stream is interpreted as a Resume All.

Pause and Resume is provided as a best effort, and data may continue streaming even after a pause has been issued.

For further details on reissue requests, changeable parameters, and Pause and Resume functionality, refer to the *EMA 3.0.2 Java Edition Developers Guide*.

2.6.3 Clearing the Cache on Refreshes

If you perform a refresh, you might need to clear the cache. To clear the cache, you must call **RefreshMsg.ClearCache** with a value of **true**. For further details on using the clear cache flag, refer to the *EMA C++ Reference Manual*.

```
RefreshMsg().clearCache(true);
```

When clearing a cache, you must observe the following conditions:

- Pass **true** value on all solicited level 1 data refreshes.
- Pass **true** value only in the first part of solicited level 2 data refreshes.
- Calling this function on unsolicited refreshes depends on the application and its intent:
 - If pass **true** value on an unsolicited refresh, the cache is cleared and populated with new data.
 - If this method is not set to **true** value on the unsolicited refresh, new data is overlaid onto the existing data. In this case, the resulting image / refresh will be a superset of the fields currently contained in the cache combined with the set brought by the current refresh.

2.6.4 Dynamic View

A **dynamic view** allows a consumer application to specify a subset of data content in which it is interested. A providing application can choose to supply only this requested subset of content across all response messages. This filtering results in reduced data flowing across the connection. View use can be leveraged across all non-administrative domain model types, where specific usage and support should be indicated in the model definition. The provider indicates its support for view requesting via the **SupportViewRequests** Login attribute, as described in Section 3.2.4. For more information on views, refer to the *EMA 3.0.2 Java Edition Developers Guide*.

However it should be noted that, currently, ADS supports view only on Market Price Level 1 data. As a result, this causes EMA API to provide view on Market Price Level 1.

2.6.5 Batch Request

A **batch request** allows a consumer application to indicate interest in multiple like-item streams with a single request (refer to Section 2.3) message. A providing application should respond by providing a status on the batch request stream itself and with new individual item streams for each item requested in the batch. Batch requesting can be leveraged across all non-administrative domain model types. The provider indicates its support for batch via the **SupportBatchRequests** Login attribute, as described in Section 3.2.4. For more information on batch, refer to the *EMA 3.0.2 Java Edition Developers Guide*.

2.6.6 Posting

Posting offers an easy way for an OMM consumer application to publish content to upstream components which can then provide the information. This can be done off-stream using the Login domain or on-stream using any other non-administrative domain. Use post (see Section 2.2) message to post content to the system. This message can contain any OMM container type as its payload, but this often is an **Msg**. A provider indicates support for posting via the **SupportOMMPost** Login attribute, as described in Section 3.2.4. For more information on posting, refer to *EMA 3.0.2 Java Edition Developers Guide*.

Chapter 3 Login Domain

3.1 Description

The **Login** domain registers a user with the system, after which the user can request², or post³ RDM content. A **Login** request may also be used to authenticate a user with the system. A consumer application must log in before it can request or post content.

The following sections detail the use of each message within the Login domain, while a brief summary of Login Authentication is included in Section 3.4.

3.2 Usage

3.2.1 Login Request Message

A Login request message is encoded using **ReqMsg** with default or users configured values and sent by **OmmConsumer** internally in the constructor of this class. This message registers a user with the system. After receiving a successful login response, applications can then begin consuming or providing additional content. An OMM Interactive Provider can use the Login request information to authenticate users with DACS.

Users may configure login request message using the following methods.

| METHOD NAME | DESCRIPTION |
|-----------------------------------|--|
| OmmConsumerConfig.username() | Required. Specifies the user name for login request message |
| OmmConsumerConfig.password() | Optional Specifies the password for login request message |
| OmmConsumerConfig.position() | Optional Specifies the position for login request message |
| OmmConsumerConfig.applicationId() | Optional Specifies the authorization application identifier for login request message |
| OmmConsumerConfig.addAdminMsg() | Optional Specifies a login request message to override the default login request. |

Table 4: Configure Login Request Message

² Consumer applications can request content after logging into the system.

³ Consumer applications can post content after logging into the system.

The Login request must be streaming (i.e., setting **ReqMsg. InterestAfterRefresh** to **true** is required). After the initial Login stream is established, subsequent Login requests using the same login handle can be sent to obtain additional refresh messages, pause the stream, or resume the stream. If a login stream is paused, this is interpreted as a Pause All request which indicates that all item streams associated with the user should be paused. A login stream is paused by setting **ReqMsg. Pause** to **true**. To resume data flow on all item streams (also known as a Resume All), users need to call **ReqMsg. InterestAfterRefresh** with **true** value. See the *EMA 3.0.2 Java Edition Developers Guide* for more information.

| COMPONENT | DESCRIPTION / VALUE |
|---------------------|--|
| DomainType | Required. MMT_LOGIN = 1 |
| Interactions | Required. <ul style="list-style-type: none"> InitialImage true : indicates initial image is required InterestAfterRefresh true : indicates streaming request is required Optional. <ul style="list-style-type: none"> Pause true : indicates pause is required Streaming request is required before any other requests. A Pause request is a request to pause all item streams associated with the login. Streaming request after a Pause request will resume all item streams associated with the login. Non-streaming request is not supported. |
| NameType | Optional. Possible values: <ul style="list-style-type: none"> USER_NAME USER_EMAIL_ADDRESS USER_TOKEN If NameType is not set, it is assumed to be USER_NAME A type of typically corresponds to DACS user name. This can be used to authenticate and permission a user. |
| Name | Required. This should be populated with appropriate content corresponding to the NameType specification. |
| Attrib | Optional. Typically an ElementList. See Section 3.2.2 for the contents of the ElementList. |

Table 5: Login Request Message

3.2.2 Login Request Elements

You can use Login attribute elements to send additional authentication information and user preferences between the components. The passed in data type of **ReqMsg. Attribute** is the **ElementList**. The predefined elements available on a Login Request are shown in the table below.

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE/EXAMPLE | DESCRIPTION |
|--------------------------------|-------|----------|---------|---|---|
| AllowSuspectData | UINT | No | 1 | 0, 1 | <ul style="list-style-type: none"> 1: Indicates that the consumer application allows OmniState.Suspect state. 0: Indicates that the consumer application prefers any suspect data result in the stream being closed with OmniState.ClosedRecover state. <p>For more information, refer to Section 3.4.6.</p> |
| ApplicationAuthenticationToken | ASCII | No | None | Sequence of single byte characters from the base36 character set ([0-9][A-Z]) | The application authentication token indicates that application behavior was inspected and approved by Thomson Reuters. For more information on obtaining an application authentication token, contact your Thomson Reuters representative. |
| ApplicationId | ASCII | No | None | 1-65535 e.g. "256" | DACS application ID. If the server authenticates with DACS, the consumer application may be required to pass in a valid ApplicationId . This must be unique for each application. IDs from 1 to 256 are reserved for permanent market data applications. These are assigned by Reuters and will be uniform across all client systems. IDs from 257 to 65535 are available for site-specific use. |
| ApplicationName | ASCII | No | None | Name of application e.g. "Consumer" | Identifies the application sending the Login request or response message. When present, the application name in the Login request identifies the OMM Consumer, and the application name in the Login response identifies the OMM Provider. |
| DownloadConnectionConfig | UINT | No | 0 | 0, 1 | <p>Request for downloading the configuration.</p> <ul style="list-style-type: none"> 1: Indicates the user wants to download connection configuration information. 0 (or if absent): Indicates that no connection configuration information is desired. |
| InstanceId | ASCII | No | None | Any ASCII String, e.g. "Instance1" | InstanceId is used to differentiate applications running on the same client host. Because it is set by the client, it does not guarantee uniqueness across different applications on the same client host. |

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE/EXAMPLE | DESCRIPTION |
|-----------------------------------|-------|----------|---------|---|--|
| Password | ASCII | No | None | "my1pword" | Sets the password for logging into the system. This information may be required and encrypted in the future. |
| Position | ASCII | No | None | ip addr/hostname ip addr/net e.g. "192.168.1.1/net" | DACS position. If the server is authenticating with DACS, the consumer application might be required to pass in a valid position. |
| ProvidePermissionExpressions | UINT | No | 1 | 0, 1 | If specified on the Login Request, this indicates a consumer wants permission expression information to be sent with responses. Permission expressions allow for items to be proxy permissioned by a consumer via content-based entitlements. |
| ProvidePermissionProfile | UINT | No | 1 | 0, 1 | When specified on a Login Request, indicates that a consumer desires the permission profile. The permission profile can be used by an application to perform proxy permissioning. |
| SupportProviderDictionaryDownload | UINT | No | 0 | 0, 1 | Indicates whether the server supports the Provider Dictionary Download: <ul style="list-style-type: none"> 1: The server supports the Provider Dictionary Download. 0: The server does not support the Provider Dictionary Download feature. If this element is not present, the server does not support the Provider Dictionary Download feature. For more information on Provider Dictionary Download, refer to the <i>EMA 3.0.2 Java Edition Developers Guide</i> . |
| Role | UINT | No | 0 | LOGIN_ROLE_CONS = 0, LOGIN_ROLE_PROV = 1 | Indicates the role of the application logging onto the system. <ul style="list-style-type: none"> An OMM consumer application should specify its role as LOGIN_ROLE_CONS. EMA will default role element with value of 1. OMM consumer applications typically connect to a different port number than non-interactive provider applications. Role information allows the Enterprise Platform to detect and inform users of incorrect port use. |

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE/EXAMPLE | DESCRIPTION |
|-----------------------|------|----------|---------|---------------|---|
| SingleOpen | UINT | No | 1 | 0, 1 | <ul style="list-style-type: none">• 1: indicates the consumer application wants the provider to drive stream recovery.• 0: Indicates that the consumer application will drive stream recovery. For more information, refer to Section 3.4.6. |
| DisableDataConversion | N/A | N/A | N/A | N/A | Reserved by TR. |

Table 6: Login Request Attribute Elements

3.2.3 Login Refresh Message

A Login refresh message is encoded using **RefreshMsg** and sent by OMM interactive provider applications. This message is used to respond to a Login Request message after the user's Login is accepted. An OMM Provider can use the Login request information to authenticate users with DACS. After authentication, a refresh message is sent to convey that the login was accepted. If the login is rejected, a Login status message should be sent.

The content of a Login Refresh message is expected to be atomic and contained in a single part, therefore **RefreshMsg.Complete** with **true** value should be set. If the login refresh is sent in response to a request, the **RefreshMsg.Solicited** with **true** value should be set to indicate that this is a solicited response.

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|--|
| DomainType | Required. MMT_LOGIN = 1 |
| State | Optional. For Refresh, when accepting Login: <ul style="list-style-type: none"> StreamState == 0mmState.Open DataState == 0mmState.Ok StatusCode == 0mmState.None |
| Solicited | Required. <ul style="list-style-type: none"> true: indicates refresh solicited false: indicates refresh unsolicited |
| Indications | Required. <ul style="list-style-type: none"> Complete true: indicates refresh complete Optional. <ul style="list-style-type: none"> ClearCache true: indicates clear cache |
| NameType | Optional. Possible values: <ul style="list-style-type: none"> USER_NAME USER_EMAIL_ADDRESS USER_TOKEN If NameType is not set, it is assumed to be NameType of USER_NAME . If present, the value should match the type specified in the Login request. |
| Name | Optional. If Name is set, it should match the Name specified in the Login request and contain appropriate content corresponding to the NameType specification. |
| Attrib | Optional. Typically an ElementList . For the contents of the ElementList , refer to Section 3.2.4. |
| Payload | Optional. Typically present when login requests connection configuration or permission profile information. This is sent as an ElementList . For payload details, refer to Section 3.3.1. |

Table 7: Login Refresh Message

3.2.4 Login Refresh Elements

The Login attribute elements can be used to send additional authentication information and user preferences between components. The Data is the ElementList. The following table includes predefined elements available on a Login Refresh.

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE/EXAMPLE | DESCRIPTION |
|------------------|-------|----------|---------|---|---|
| AllowSuspectData | UINT | No | 1 | 0, 1 | <ul style="list-style-type: none"> 1: The provider application passes along OmniState.Suspect state. 0: The provider application does not pass along OmniState.Suspect state. <p>Any suspect stream will be closed with a OmniState.ClosedRecover state.</p> <p>For more information, refer to Section 3.4.6.</p> |
| ApplicationId | ASCII | No | None | 1-65535 e.g. "256" | DACS application ID. If the server is authenticating with DACS, the consumer application may be required to pass in a valid ApplicationId . This should match what was sent in the request. This must be unique for each application. IDs from 1 to 256 are reserved for permanent market data applications. These are assigned by Reuters and will be uniform across all client systems. IDs from 257 to 65535 are available for site-specific use. |
| ApplicationName | ASCII | No | None | name of application e.g. "EMA" | Identifies the application sending the Login request or response message. When present, the application name in the Login request identifies the OMM Consumer and the application name in the Login response identifies the OMM Provider. |
| Position | ASCII | No | None | ip addr/hostname ip addr/net e.g. "192.168.1.1/net" | DACS position. If the server authenticates with DACS, the consumer application might be required to pass in a valid position. If present, this should match whatever was sent in the request or be set to the IP address of the connected client. |

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE/EXAMPLE | DESCRIPTION |
|------------------------------|------|----------|---------|---------------|---|
| ProvidePermissionExpressions | UINT | No | 1 | 0, 1 | If specified on a Login Refresh, indicates that a provider will send permission expression information with its responses. ProvidePermissionExpressions is typically present because the login request message requested this information. Permission expressions allow for items to be proxy permissioned by a consumer via content-based entitlements. |
| ProvidePermissionProfile | UINT | No | 1 | 0, 1 | If specified on the Login Refresh, indicates that the permission profile is provided. This is typically present because the login request message requested this information. An application can use the permission profile to perform proxy permissioning. |
| SingleOpen | UINT | No | 1 | 0, 1 | <ul style="list-style-type: none"> 1: The provider drives stream recovery. 0: The provider does not drive stream recovery; it is the responsibility of the downstream application. For more information, refer to Section 3.4.6. |
| SupportBatchRequests | UINT | No | 0 | 0-7 | <p>Indicates whether the provider supports a batch request. Batch requesting allows a consumer to specify multiple items, all with matching attributes, in the same request message. For more information on batch requesting, refer to the <i>EMA 3.0.2 Java Edition Developers Guide</i>. These are bit-masks:</p> <ul style="list-style-type: none"> 0x0(or if absent): The provider does not support batch requesting. 0x1: The provider supports batch requesting. 0x2: The provider supports batch reissue. 0x4: The provider supports batch close. <p>For instance, if value is set to 7, then based on combination of bits set (0x1 + 0x2 + 0x4), provider supports batch request, reissue and close.</p> |

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE/EXAMPLE | DESCRIPTION |
|-----------------------------------|------|----------|---------|---|--|
| SupportOMMPost | UINT | No | 0 | 0, 1 | <p>Indicates whether the provider supports OMM Posting:</p> <ul style="list-style-type: none"> • 1: The provider supports OMM Posting and the user is permissioned. • 0: The provider supports the OMM Post feature, but the user is not permissioned. • If this element is not present, then the server does not support the OMM Post feature. <p>For more information on posting, refer to the <i>EMA 3.0.2 Java Edition Developers Guide</i>.</p> |
| SupportPauseResume | UINT | No | 0 | 0, 1 | <p>Indicates whether the server supports pause and resume.</p> <ul style="list-style-type: none"> • 1: The server supports pause and resume. • 0: (or if absent): The server does not support pause and resume. |
| SupportProviderDictionaryDownload | UINT | No | 0 | 0, 1 | <p>Indicates whether the server supports the Provider Dictionary Download:</p> <ul style="list-style-type: none"> • 1: The server supports the Provider Dictionary Download. • 0: The server does not support the Provider Dictionary Download feature. <p>If this element is not present, the server does not support the Provider Dictionary Download feature.</p> <p>For more information on Provider Dictionary Download, refer to the <i>EMA 3.0.2 Java Edition Developers Guide</i>.</p> |
| SupportOptimizedPauseResume | UINT | No | 0 | 0, 1, or other positive integers greater than 0 | <p>Indicates whether the provider supports Optimized Pause and Resume. Optimized Pause and Resume allows for pausing/resuming of individual item streams or pausing all item streams via a pause of the Login stream. For more information on Pause and Resume, refer to the <i>EMA 3.0.2 Java Edition Developers Guide</i>.</p> <ul style="list-style-type: none"> • 1 (or other positive integers greater than 0): The server supports optimized pause and resume. • 0 (or if absent): The server does not support optimized pause and resume. |

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE/EXAMPLE | DESCRIPTION |
|---------------------------|------|----------|---------|---------------|---|
| SupportViewRequests | UINT | No | 0 | 0, 1 | <p>Indicates whether the provider supports requesting with Dynamic View information. A Dynamic View allows a user to request only the specific contents of the response information in which they are interested. For more information on Dynamic View use, refer to the <i>EMA 3.0.2 Java Edition Developers Guide</i>.</p> <ul style="list-style-type: none"> • 1: The provider supports Dynamic Views specified on request messages. • 0 (or if absent): The provider does not support Dynamic Views specified on request messages. |
| SupportStandby | UINT | No | 0 | 0, 1 | <p>Indicates whether the provider supports Warm Standby functionality. If supported, a provider to run as either an Active or a Standby server, where the Active will behave as usual. The Standby will respond to item requests only with the message header and will forward any state changing information. When informed of an Active's failure, the Standby begins sending responses and assumes Active functionality.</p> <ul style="list-style-type: none"> • 1: The provider can support a role of Active or Standby in a Warm Standby group. • 0 (or if absent): The provider does not support warm standby functionality. |
| SupportEnhancedSymbolList | UINT | No | 0 | 0, 1 | <p>Indicates whether the provider supports the enhanced symbol list functionality.</p> <ul style="list-style-type: none"> • 1: The provider supports data streams along with names. • 0 (or if absent): The provider does not support enhanced symbol list functionality. The provider sends only names and will not send data. |

Table 8: Login Refresh Attribute Elements

3.2.5 Login Status Message

OMM Provider and OMM non-interactive provider applications use the Login status message to convey state information associated with a stream. Such state information can indicate that a stream cannot be established or inform a consumer of a state change associated with an open stream.

The Login status message can also be used to reject a login request or close an existing login stream. When a login stream is closed via a status, any other open streams associated with the user are also closed as a result.

| COMPONENT | DESCRIPTION / VALUE |
|-------------------|---|
| DomainType | Required. MMT_LOGIN = 1 |
| State | Optional. For Status, when rejecting Login: <ul style="list-style-type: none"> StreamState == OmmState.Closed DataState == OmmState.Ok StatusCode == OmmState.NotAuthorized For Status, when user needs to retry login, for example when DACS is not yet connected to ADS: <ul style="list-style-type: none"> StreamState == OmmState.ClosedRecover DataState == OmmState.Suspect StatusCode == OmmState.NotAuthorized |
| SeqNum | Optional. |
| NameType | Optional. Possible values: <ul style="list-style-type: none"> USER_NAME USER_EMAIL_ADDRESS USER_TOKEN If NameType is not set, it is assumed to be NameType of USER_NAME If present, the value should match the type specified in the Login request. |
| Name | Optional. If present, it should match the Name specified in the Login request and should contain appropriate content corresponding to the NameType specification. |
| Attrib | Optional. Typically an ElementList. See Section 3.2.4 for the contents of the ElementList. |

Table 9: Login Status Message

3.2.6 Login Update Message

Update messages are currently not used or supported on a Login stream.

3.2.7 Login Close Message

A consumer can close the login stream by calling an **OmmConsumer** destructor. Closing a login stream is equivalent to a “Close All” type of message, where all open streams are closed (thus all the streams associated with the user are closed). A provider can log off a user and close all the user’s streams via a **Login Status** message see Section 3.2.5.

3.2.8 Login Generic Message

Note: Generic Message(s) (refer to Section 2.3) are currently supported for LOGIN Reuters Domain Model only for the sending and receiving of information related to “ConsumerConnectionStatus” Warm Standby Mode.

A **Login** generic message is encoded and sent by OMM consumer applications. This message informs an interactive provider of its role in a Warm Standby group (either as an Active or a Standby provider). When Active, a provider behaves normally. However, if a provider is a Standby, it responds to requests only with a message header (intended to allow a consumer to confirm data availability), and forwards any state-related messages (i.e., unsolicited refresh messages, status messages). While in Standby mode, a provider should aggregate changes to item streams whenever possible. If the provider is changed from Standby to Active via this message, all aggregated update messages are passed along. When aggregation is not possible, a full, unsolicited refresh message is passed along.

The consumer application is responsible for ensuring that items are available and equivalent across all providers in a warm standby group. This includes managing state and availability differences as well as item group differences.

Content for a Login Generic message is expected to be atomic and contained in a single part, therefore **GenericMsg.Complete** should be set to **true**.

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|--|
| DomainType | Required. MMT_LOGIN = 1 |
| Indications | Required. <ul style="list-style-type: none"> Complete true: indicates refresh complete |
| Name | Required. Name must be set to “ConsumerConnectionStatus.” |
| Payload | Required. Indicates whether a provider acts as an Active or a Standby server. This is sent as a Map type. For further details, refer to Section 3.3.2. |

Table 10: Login Generic Message

3.2.9 Login Post Message

OMM consumer applications can encode and send Post messages on their Login stream. Any item can be posted to via the login stream. This is known as **off-stream posting** because items are being posted without using that item's dedicated stream. Posting on an item's own, dedicated stream is referred to as **on-stream posting**.

When an application is posting off-stream (i.e., on the Login stream), the **PostMsg** requires both **Name** and **ServiceId** information. For more details on posting, see the *EMA 3.0.2 Java Edition Developers Guide*.

3.2.10 Login Ack Message

OMM Provider applications encode and send Ack messages to acknowledge receipt of Post messages. This message is used when a consumer is posting off-stream and requests an acknowledgment. The acknowledgement contains a positive (ACK) or negative (NACK) code. For more details on posting, see the *EMA 3.0.2 Java Edition Developers Guide*.

3.3 Data

3.3.1 Login Refresh Message Payload

When a Login request message asks for connection configuration information (i.e., **DownloadConnectionConfig = 1**), a provider capable of supplying these details should respond with extended connection information as the payload of refresh (see Section 2.3) message. This information can be useful for load balancing connections across multiple providers or ADS components.

Extended connection information contains a list of other providers, along with connection and load related information, and is formatted as a sorted **Vector** type, where each **VectorEntry** contains an **ElementList**. Each vector entry contains data specific to one provider. The summary data (an **ElementList**) contains information about the number of Standby providers to which the consumer should connect. If this value is non-zero, the consumer is expected to support Warm Standby functionality and connect to multiple providers.

The list should be sorted in order of best to worst choice.

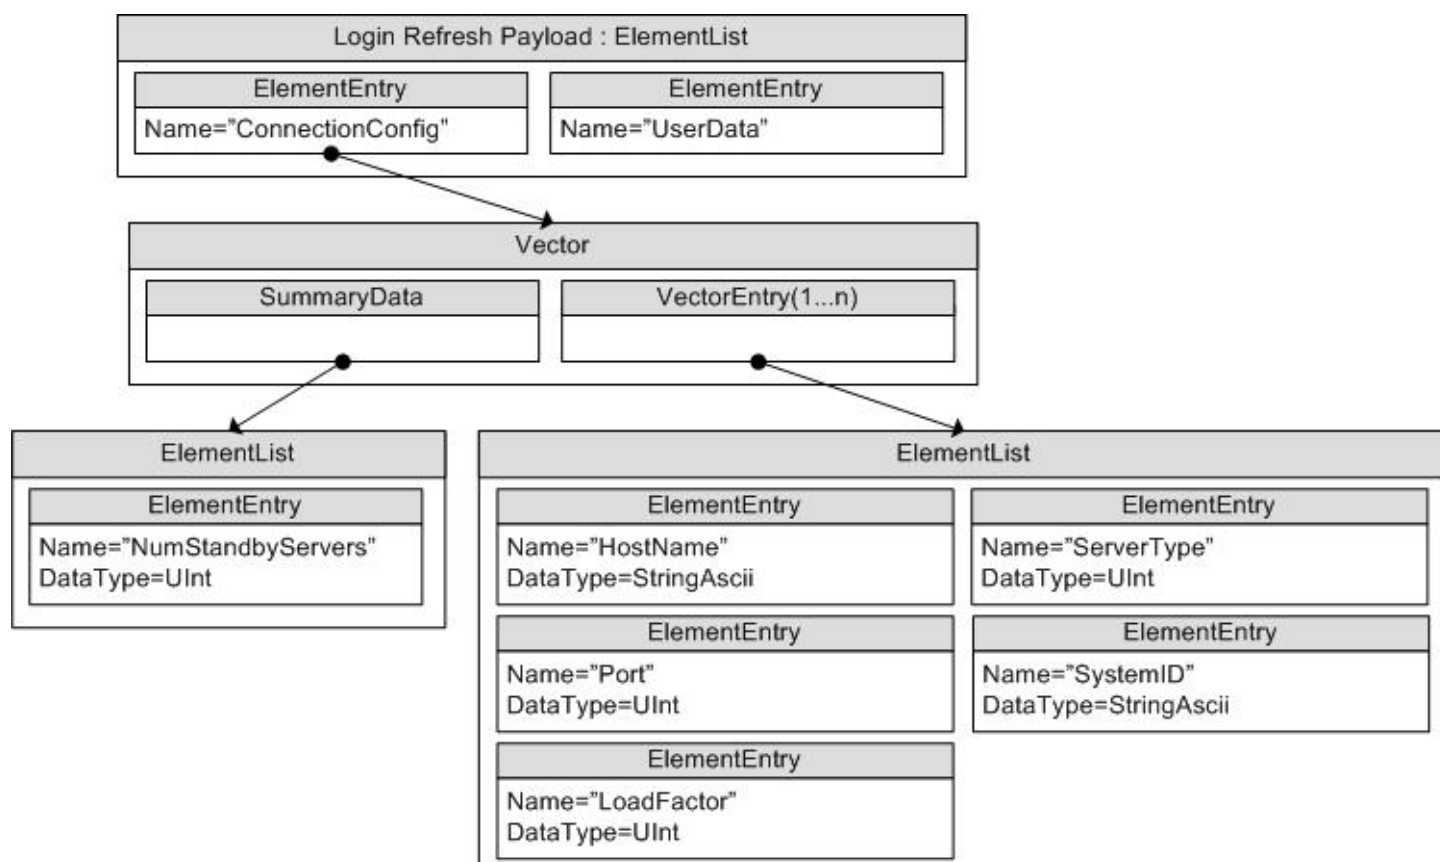


Figure 4: Login Refresh Message Payload

When present, the summary data **ElementList** contains the following element:

| NAME | TYPE | DEFAULT | REQUIRED | RANGE / EXAMPLE | DESCRIPTION |
|-------------------|------|---------|----------|------------------|---|
| NumStandbyServers | UINT | None | Yes | 0 - MAXINT value | The number of standby servers to which the client can connect. If set to 0 , only one provider is connected, which serves as the primary connection (i.e., warm standby should not be attempted). |

Table 11: Vector SummaryData ElementList Contents

Each **VectorEntry** contains an **ElementList**, each list describing a single provider. Possible elements in this list are as follows:

| NAME | TYPE | DEFAULT | REQUIRED | RANGE / EXAMPLE | DESCRIPTION |
|------------|-------|-------------|-------------------------------|---------------------------------|--|
| Hostname | ASCII | None | Yes, when payload is present. | "myHostName" "192.168.1.100" | The potential provider's IP address or hostname. |
| Port | UINT | None | Yes, when payload is present. | 14002 | The potential provider's port number. |
| LoadFactor | UINT | 65535 | No | 0-65535 | Describes the load of the provider, where 0 is the least loaded and 65535 is the most loaded. The Vector is expected to be sorted, so a consumer need not traverse the list to find the least loaded; the first VectorEntry should contain an ElementList describing the least-loaded provider. |
| ServerType | UINT | 1 (Standby) | No | 0 (Active), 1 (Standby) | The providers expected behavior, when warm standby is employed: <ul style="list-style-type: none"> 0: This provider is expected to be used as an Active server. 1: This provider is expected to be used as a Standby server. All other values are reserved for future use. |
| SystemID | ASCII | None | No | | For future use. |

Table 12: ElementList Contents

3.3.2 Login Generic Message Payload

The Login Generic (Section 2.3) Message **Payload** is formatted as a **Map** type, with a **KeyDataType** of **ASCII** and a **DataType** of **ElementList**. Each keyData is a **ServiceName**. Each **ElementList** contains one **ElementEntry**. There is no summary data and typically only one map entry that inform the provider of its warm standby role. Specific information is contained in Figure 5 and Table 13.

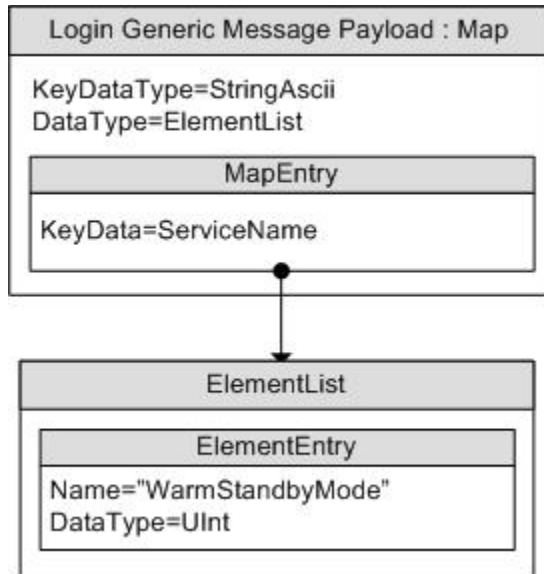


Figure 5: Login Generic Message Payload

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE / EXAMPLE | DESCRIPTION |
|-----------------|------|----------|---------|--------------------------|---|
| WarmStandbyMode | UINT | Yes | None | 0: Active; 1: Standby | Informs an interactive provider of its role in a Warm Standby group. <ul style="list-style-type: none"> • 0: Informs the provider to be an Active server. • 1: Informs the provider to be a Standby server. |

Table 13: **MapEntry**'s Elements

3.4 Special Semantics

3.4.1 Login Direction

Login Request Messages are always sent from client to server, regardless of which is the provider and which is the consumer. Consumers send a Login Request Message to the providers they connect to, while non interactive provider send a Login Request Message to the consumer server.

3.4.2 Initial Login

An EMA Consumer sends a login request to an OMM Provider application on behalf of users who are using login attributes specified in `OmmConsumerConfig`. Users can register to get a login handle to receive a login status or use the login handle to reissue and post messages on a login stream.

3.4.3 Authentication

Whether or not user is authenticated depends on how the provider is implemented. However, providers are required to respond to Login Request Message in the following manner:

- If the Login is accepted, the provider should send a Refresh message with `StreamState = OmmState.Open`, `DataState = OmmState.Ok`, and `StatusCode = OmmState.None`.
- A login can be rejected or closed after it was originally accepted by sending a Status message with `StreamState = OmmState.Closed` (or `OmmState.ClosedRecover` if the user is allowed to attempt another login), and `DataState = OmmState.Suspect`.
- If provider closes the login stream, all other streams related to that login are implicitly closed without sending a any item Status messages to the consumer.
- If the consumer application calls the `OmmConsumer` destructor, all streams related to that login of `OmmConsumer` are automatically closed without sending any item Close messages to the provider or a Status messages back to the consumer.
- If login stream is not open by EMA or it was closed by either the consumer or the provider, the consumer must create a new `OmmConsumer` before sending other Request messages.

3.4.4 Multiple Logins

EMA does not support multiple logins per `OmmConsumer` as login stream is opened internally by EMA. If multiple logins are needed in the applications, users need to create additional `OmmConsumer` instances, one per login.

3.4.5 Group and Service Status

Group and service status messages do not apply to the Login domain.

3.4.6 Single Open and Allow Suspect Data

The **SingleOpen** and **AllowSuspectData** Elements that are passed via the **Attrib** can effect how state information is processed. When the provider indicates support for SingleOpen behavior, the provider should drive the recovery of item streams. If no provider support is indicated, the consumer should drive any recovery. The following table shows how a provider can convert messages to honor the consumer's **SingleOpen** and **AllowSuspectData** settings. The first column in the table shows the provider's actual **StreamState** and **DataState**. Each subsequent column shows how this state information can be modified to follow that column specific **SingleOpen** and **AllowSuspectData** settings. If any **SingleOpen** and **AllowSuspectData** configuration causes a behavior contradiction (e.g., **SingleOpen** indicates the provider should handle recovery, but **AllowSuspectData** indicates that the consumer does not want to receive suspect status), **SingleOpen** behavior takes precedence.

The status in the table could be from a Directory STATE filter entry, from a Directory GROUP filter entry, or from an item Status Message. For more information on Status, see the *EMA 3.0.2 Java Edition Developers Guide*.

Note: If **AcceptingRequests** is **FALSE**, new requests should not be made to a provider application, regardless of **ServiceState**. However, even if **AcceptingRequests** is **FALSE**, reissue requests can still be made for any item streams that are currently open to the provider.

| ACTUAL STATE INFORMATION | MESSAGE SENT WHEN: SINGLEOPEN = 1 ALLOWSUSPECTDATA = 1 | MESSAGE SENT WHEN: SINGLEOPEN = 1 ALLOWSUSPECTDATA = 0 | MESSAGE SENT WHEN: SINGLEOPEN = 0 ALLOWSUSPECTDATA = 1 | MESSAGE SENT WHEN: SINGLEOPEN = 0 ALLOWSUSPECTDATA = 0 |
|---|---|---|---|---|
| StreamState = OPEN DataState = SUSPECT | StreamState = OPEN DataState = SUSPECT | StreamState = OPEN DataState = SUSPECT | StreamState = OPEN DataState = SUSPECT | StreamState = CLOSED_RECOVER DataState = SUSPECT |
| StreamState = CLOSED_RECOVER DataState = SUSPECT | StreamState = OPEN DataState = SUSPECT | StreamState = OPEN DataState = SUSPECT | StreamState = CLOSED_RECOVER DataState = SUSPECT | StreamState = CLOSED_RECOVER DataState = SUSPECT |
| New item request when: AcceptingRequests = TRUE ServiceState = DOWN | StreamState = OPEN DataState = SUSPECT | StreamState = OPEN DataState = SUSPECT | StreamState = CLOSED_RECOVER DataState = SUSPECT | StreamState = CLOSED_RECOVER DataState = SUSPECT |

| ACTUAL STATE INFORMATION | MESSAGE SENT WHEN: SINGLEOPEN = 1 ALLOWSUSPECTDATA = 1 | MESSAGE SENT WHEN: SINGLEOPEN = 1 ALLOWSUSPECTDATA = 0 | MESSAGE SENT WHEN: SINGLEOPEN = 0 ALLOWSUSPECTDATA = 1 | MESSAGE SENT WHEN: SINGLEOPEN = 0 ALLOWSUSPECTDATA = 0 |
|--|---|---|---|--|
| New item request when: AcceptingRequests = TRUE ServiceState = UP | StreamState = OPEN DataState = OK or SUSPECT based on individual item's state | StreamState = OPEN DataState = OK or SUSPECT based on individual item's state | StreamState = OPEN DataState = OK or SUSPECT based on individual item's state | If DataState == OK: StreamState = OPEN If DataState == SUSPECT: StreamState = CLOSED_RECOVER |
| New item request when: AcceptingRequests = FALSE ServiceState = UP or DOWN | StreamState = OPEN DataState = SUSPECT based on individual item's state | StreamState = OPEN DataState = SUSPECT based on individual item's state | StreamState = CLOSED_RECOVER DataState = SUSPECT based on individual item's state | StreamState = CLOSED_RECOVER DataState = SUSPECT |
| Connection goes down | StreamState = OPEN DataState = SUSPECT based on individual item's state | StreamState = OPEN DataState = SUSPECT based on individual item's state | StreamState = CLOSED_RECOVER DataState = SUSPECT based on individual item's state | StreamState = CLOSED_RECOVER DataState = SUSPECT |

Table 14: SingleOpen and AllowSuspectData Handling

3.5 Specific Usage: RDF Direct Login

When sending a Login Request message to an RDF Direct, the **Name** can be an ASCII string composed of printable characters. The Name is used for scoping some RDF Direct's configuration. The **NameType** must be **USER_NAME** (1).

In the **Attrib ElementList**, **SingleOpen**, **AllowSuspectData**, and **ProvidePermissionExpressions** are supported. **ApplicationId**, **Position**, **Password**, and **ProvidePermissionProfile** are ignored.

The request and response message **Payload** have no data.

RDF Direct only supports one Login per connection.

3.6 Specific Usage: Enterprise Platform

When sending a Login to a DACS enabled Enterprise Platform, the **Name** should be a valid username in DACS. The **Attrib** containing **ApplicationId** and **Position** will also be used for DACS authorization. The Name is used for scoping some Enterprise Platform configuration. The **NameType** must be **USER_NAME** (1).

In the **Attrib's ElementList**, **ApplicationId**, **Position**, **SingleOpen**, **AllowSuspectData**, and **ProvidePermissionExpressions** are supported. **Password** and **ProvidePermissionProfile** are ignored. They may be echoed to the consumer, but the values are not necessarily correct.

The request and response message **Payload** have no data.

The Enterprise Platform only supports one Login per connection.

3.7 Specific Usage: Login Credentials Update Feature

Internally EMA stores all login credentials (e.g., user name, name type, login attributes), so it can use them later during connection recovery phase. These credentials can be changed by the application at any point in time after a connection and login is established. To change login credentials, an application needs to reissue a login request message with the new credentials. This new request message must meet the following criteria:

- A new user name parameter, different from the one specified on a prior request or reissue, must be specified.
- The **NameType** parameter must be specified as **USER_TOKEN** on all, the initial request and all subsequent reissues.
- The Interactions set in the reissue must match the original InteractionType.

If all of the above conditions/criteria are met, EMA will send the reissue with the new login credentials to the server and will internally store the new/updated login credentials to be used later during connection recovery. If all of the above conditions/criteria are not met, EMA will apply the standard login reissue processing. If no new/updated login credentials are specified by application, during the connection recovery phase EMA will use the previously used ones.

Chapter 4 Source Directory Domain

4.1 Description

The Source Directory domain model conveys:

- Information about all available services and their capabilities. This includes information about domain types supported within a service, the service's state, the QOS, and any item group information associated with the service. Each service is associated with a particular **ServiceName** or **ServiceId**.
- Status information associated with item groups. This allows a single message to change the state of all associated items, avoiding the need to send a status message for each individual item. The consumer is responsible for applying any changes to its open items. For details, refer to Sections 4.3.1.2 and 4.3.1.3.
- Source Mirroring information between an ADH and OMM interactive provider applications. EMA conveys this information via a specifically formatted generic message as described in Section 4.2.5.

4.2 Usage

4.2.1 Source Directory Request Message

A Directory request message is encoded using **ReqMsg** with default or user-configured values and sent internally by **OmmConsumer** in the constructor of this class. A consumer can request information about all services by omitting **ServiceName** or **ServiceId** information, or specify a **ServiceName** or **ServiceId** to request information about only that service. Because the Source Directory domain uses a **FilterList**, a consumer can use a filter to indicate the specific source-related information in which it is interested. Each bit value represented in the filter corresponds to an information set that can be provided in response messages. A consumer can change the requested filter via a reissue. For more details about the **FilterList** type, refer to *EMA 3.0.2 Java Edition Developers Guide*.

Users can configure a directory request message using the **OmmConsumerConfig.addAdminMsg()** to override the default directory request.

Thomson Reuters recommends that a consumer application minimally request SERVICE_INFO_FILTER and SERVICE_STATE_FILTER for the Source Directory:

- The Info filter contains the **ServiceName** and **ServiceId** information for all available services. When an appropriate service is discovered by the OMM Consumer, the **ServiceName** or **ServiceId** associated with the service is used on subsequent requests to that service.
- The State filter contains status data for the service. Such data informs the Consumer whether the service is up (and available) or down (and unavailable).

| COMPONENT | DESCRIPTION / VALUE |
|---------------------|---|
| DomainType | <p>Required.</p> <p>MMT_DIRECTORY = 4</p> |
| Interactions | <p>Required.</p> <ul style="list-style-type: none"> InitialImage true: indicates initial image is required InterestAfterRefresh true: indicates streaming request is required <p>Only Streaming and NonStreaming request are supported. If you need the ConsumerStatus generic messages to be sent over the Directory stream, you must specify the interaction as "Streaming" in the request.</p> |
| Filter | <p>Required.</p> <p>A filter indicates the specific information in which a consumer is interested. Available categories include:</p> <ul style="list-style-type: none"> SERVICE_INFO_FILTER SERVICE_STATE_FILTER SERVICE_GROUP_FILTER SERVICE_LOAD_FILTER SERVICE_DATA_FILTER SERVICE_LINK_FILTER <p>For details on the contents of each filter entry, refer to section 4.3.1.1.</p> |
| ServiceName | <p>Optional.</p> <ul style="list-style-type: none"> If present, the directory request is for this specified service. If neither the ServiceId nor the ServiceName is specified, then the request is for the entire directory. If the application intends to request a specific service, then it should set either the ServiceId or ServiceName of the service, but not both. |
| ServiceId | <p>Optional.</p> <ul style="list-style-type: none"> If present, the directory request is for this specified service. If neither the ServiceId nor the ServiceName is specified, then the request is for the entire directory. If the application intends to request a specific service, then it should set either the ServiceId or ServiceName of the service, but not both. |

Table 15: Source Directory Request Message

4.2.2 Source Directory Refresh Message

A Directory Refresh Message is encoded using a **RefreshMsg** and sent by OMM Provider and OMM non-interactive provider applications. This message provides information about currently known services, as well as additional details ranging from state information to provided domain types.

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|--|
| DomainType | Required. MMT_DIRECTORY = 4 |
| State | Required. |
| Solicited | Required. <ul style="list-style-type: none"> true: Indicates refresh solicited false: Indicates refresh unsolicited |
| Indications | Optional: <ul style="list-style-type: none"> Complete true: indicates refresh complete ClearCache true: indicates clear cache DoNotCache true: indicates this refresh message must not be cached. For more details, refer to FilterEntries in Table 21. |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream. |
| Filter | Required. The Filter represents the filter entries being provided in this response. When possible, this should match the Filter as set in the consumer's request. For additional details, refer to the Filter member in Section 4.2.1. |
| Payload | Required. The payload contains information about available services in the form of a Map where each MapEntry . Key is one ServiceName . For additional details, refer to Section 4.3.2. |

Table 16: Source Directory Refresh Message

4.2.3 Source Directory Update Message

A Source Directory Update Message is encoded using an **UpdateMsg** and sent by OMM Provider and OMM Non-Interactive Provider applications. The Update message can:

- Indicate the addition or removal of services from the system or changes to existing services.
- Convey item group status information via the State and Group filter entries. For more information about item group use, refer to the *EMA 3.0.2 Java Edition Developers Guide*.

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|--|
| DomainType | Required. MMT_DIRECTORY = 4 |
| Indications | Optional: <ul style="list-style-type: none"> • Complete true: Indicates refresh complete • ClearCache true: Indicates a clear cache • DoNotCache true: Indicates this refresh message must not be cached. • DoNotConflate true: Indicates this update must not be conflated. For more details, refer to FilterEntries (Table 21). |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream. |
| Filter | Optional. The Filter represents the filter entries being provided in this response. For an update, this conveys only the ID values associated with filter entries present in the update payload. For additional details, refer to the Filter member in Section 4.2.1. |
| Payload | Required. The payload is Map contains only the changed information associated with the provided services. For additional details, refer to Section 4.3.1. |

Table 17: Source Directory Update Message

4.2.4 Source Directory Status Message

A Source Directory Status message is encoded using a **StatusMsg** and sent by OMM provider and OMM non-interactive provider to convey state information associated with the directory stream. Such state information can indicate that a directory stream cannot be established or to inform a consumer of a state change associated with an open directory stream. The Directory Status message can also be used to close an existing directory stream.

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|---|
| DomainType | Required. MMT_DIRECTORY = 4 |
| State | Optional. Contains stream and data state information for directory stream. <ul style="list-style-type: none"> StreamState DataState StatusCode |
| Indications | Optional: <ul style="list-style-type: none"> ClearCache true: Indicates the application should clear its cache For more details, refer to FilterEntries (Table 21). |

Table 18: Source Directory Status Message

4.2.5 Source Directory Generic Message

A Source Directory Generic message is encoded and sent by an ADH when using a 'hot standby' configuration. When running in hot standby mode, the ADH can leverage source mirroring and use a generic message to convey usage information to upstream providers. A generic message can inform providers whether the ADH is an active server without a standby (**ActiveNoStandby**), an active server with a standby (**ActiveWithStandby**) or a standby provider (**Standby**). This message is mainly for informational purposes, and allows a provider to better understand their role in a hot standby environment. (The provider does not require a return action or acknowledgment.)

A provider indicates each service's ability to process this message via the **AcceptingConsumerStatus** element in its Source Directory responses (see Section 4.3.1.1).

| COMPONENT | DESCRIPTION / VALUE |
|-------------------|--|
| DomainType | Required. MMT_DIRECTORY = 4 |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages within this stream. |
| Name | Required. As "ConsumerStatus" |
| Payload | Required. The payload is Map whose entries contain the SourceMirroring status for each service. For additional details, refer to section 4.3.1. |

Table 19: Source Directory Generic Message

4.3 Data

4.3.1 Source Directory Refresh and Update Payload

A list of services is represented by a **Map**. Each **MapEntry** represents a known service and is uniquely identified by its **ServiceId** (i.e., its key).

The information about each service is represented as a **FilterList**. Each **FilterEntry** contains one of six different categories of information. These categories should correspond to the **Filter** member of the refresh or update. These categories are described in Table 21.

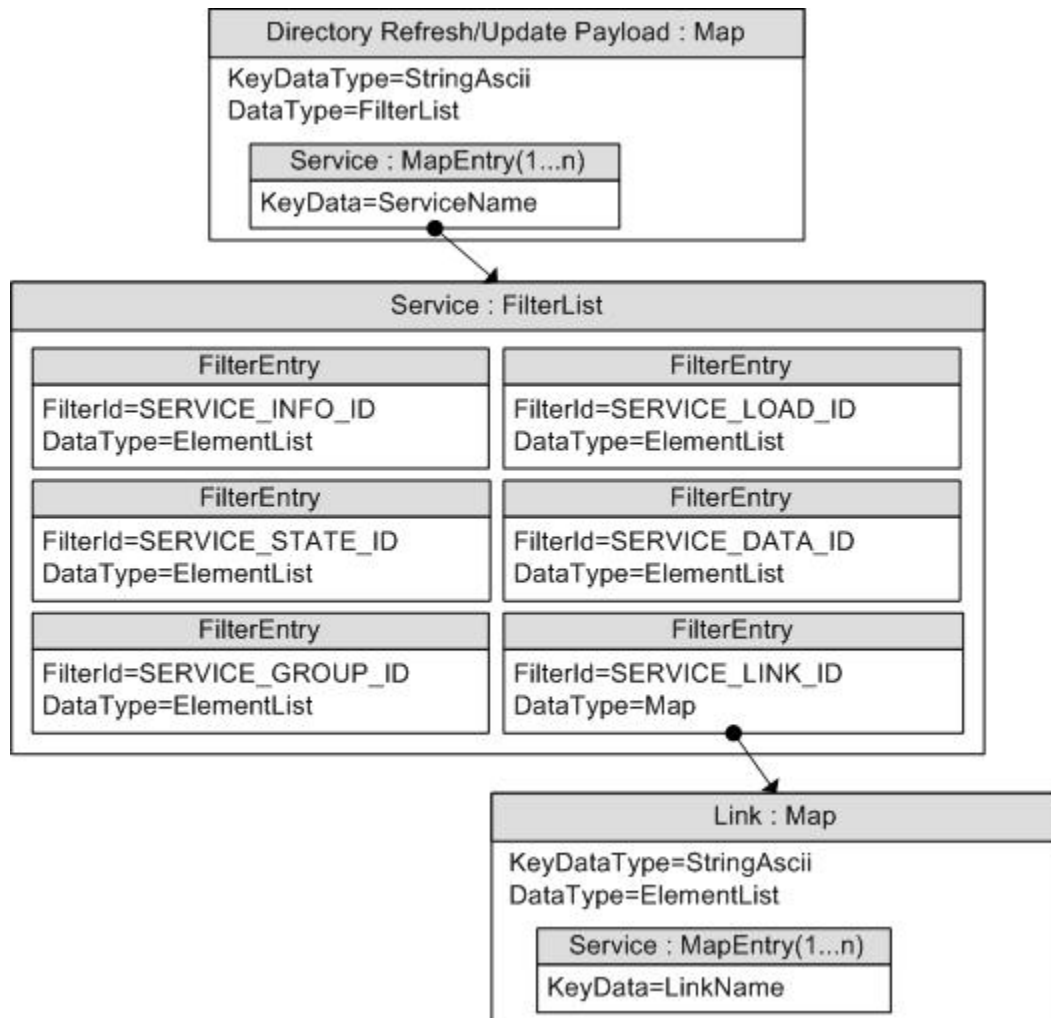


Figure 6: Source Directory Refresh/Update Message Payload

| KEY TYPE | CONTAINER TYPE | PERMISSION DATA | DESCRIPTION |
|-----------------------|----------------|-----------------|--|
| UINT for a service ID | FilterList | Not used | Contains information for each known service. The key is the service's ServiceId . |

Table 20: Source Directory **Map**

There are six categories about a service, each represented by one **FilterEntry**. Categories can be added or updated in update messages (note that clear action **FilterEntry.Clear** is not used, and that the Info category should not change) for Directory and Dictionary domain message models as part of a reissue.

| FILTERENTRY ID (CORRESPONDING FILTER BIT-VALUE) | TYPE | PERMISSION DATA | PROVIDER SUPPORT REQUIRED | EXTENSIBLE CONTENTS | DESCRIPTION |
|--|-------------|--------------------|---------------------------------|------------------------|---|
| SERVICE_INFO_ID (SERVICE_INFO_FILTER) | ElementList | Not used | Yes | Yes | Identifies a service and its available data. For details, refer to Section 4.3.1.1. |
| SERVICE_STATE_ID (SERVICE_STATE_FILTER) | ElementList | Not used | Yes | No | Describe current state of a service (i.e., the service's current ability to provide data). May also be used to change the status of all items associated with this service. In updated response message, the DoNotConflate should be set to true . For details, refer to Table 23. |
| SERVICE_GROUP_ID (SERVICE_GROUP_FILTER) | ElementList | Not used | No | No | Manages group information. May be used to change the status of a group of items or merge items from one group to another. Group FilterEntry are only sent in updated response message with DoNotCacheFlag and DoNotConflate should be set to true . For details, refer to Table 24. |
| SERVICE_LOAD_ID (SERVICE_LOAD_FILTER) | ElementList | Not used | No | Yes | Statistics about how many concurrent streaming requests the service can support and how many it is currently servicing. In the updated response message, the DoNotConflate can optionally be set to true . For details, refer to Table 25. |
| SERVICE_DATA_ID (SERVICE_DATA_FILTER) | ElementList | Not used | No | Yes | Includes broadcast data that applies to all items requested from that service. This information is typically provided in a dedicated update response message and sent independently of other filter entries. The data filter is commonly used with ANSI Page-based data. DoNotCache and DoNotConflate can optionally be set to true to prevent conflation and caching of this content. For details, refer to Table 26. |

| FILTERENTRY ID (CORRESPONDING FILTER BIT-VALUE) | TYPE | PERMISSION DATA | PROVIDER SUPPORT REQUIRED | EXTENSIBLE CONTENTS | DESCRIPTION |
|--|------|--------------------|---------------------------------|------------------------|---|
| SERVICE_LINK_ID (SERVICE_LINK_FILTER) | Map | Not used | No | No | Provides information about individual upstream sources that provide data for this service. This is primarily used by systems that aggregate sources (such as the AUH) for identification and load balancing, and is not required to be processed by a consumer application. For details, refer to Table 27. |

Table 21: Source Directory MapEntry's FilterEntries

4.3.1.1 Source Directory Info Filter Entry

The Info filter entry (**SERVICE_INFO_FILTER**, **SERVICE_INFO_ID**) conveys information that identifies a service and the content it can provide. This includes information about provided domain types (e.g. MarketPrice, MarketByOrder), available QOS, and the names of any dictionaries needed to parse the published content.

The Info **FilterEntry** should be present when a service is first added, and should not be changed as long as the service remains in the list.

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE / EXAMPLE | DESCRIPTION |
|----------------------|----------------|---------------------------|---------|----------------------|--|
| Name | ASCII | Yes | n/a | e.g. IDN_RDF | Service name. This will match the concrete service name or the service group name that is in the Map. Key . |
| Vendor | StringASCII | No | None | e.g. Thomson Reuters | Name of the vendor that provides the data for this service |
| IsSource | UINT | No | 0 | 0, 1 | <ul style="list-style-type: none"> 1: Service is provided directly by original publisher 0: Service is a consolidation of multiple sources into a single service. |
| Capabilities | Array of UINT | Yes | None | e.g. [5, 6] | List of MessageModelTypes which this service can provide. The UInt MessageModelType is extensible, using values defined in the RDM Usage Guide (1-255). For example, a list containing MMT_DICTIONARY(5) and MMT_MARKET_PRICE(6) indicates consumer can request dictionaries and market price data from this service. |
| DictionariesProvided | Array of Ascii | No | None | e.g. RWFFId | List of Dictionary names which this service can provide. A consumer may obtain these dictionaries by requesting them by name on the MMT_DICTIONARY MessageModelTypes. For details, refer to Chapter 5. |
| DictionariesUsed | Array of ASCII | No (Yes if any are used.) | None | e.g. RWFFId, RWFEnum | List of Dictionary names that may be required to process all of the data from this service. Whether or not the dictionary is required depends on the needs of the consumer. For example, if the consumer application is not a display application, it might not need an Enumerated Types Dictionary. For details, refer to Chapter 5. |

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE / EXAMPLE | DESCRIPTION |
|----------------------------|--------------|----------|-----------------------|--------------------------------|--|
| QOS | Array of QOS | No | Real-time, TickByTick | e.g . Real-time, TickByTick | <p>The available Qualities of Service.</p> <ul style="list-style-type: none"> • If the data comes from one source, there will usually be only one Qos. • If there are multiple sources, more than one Qos may be available. • Note the default. • If Qos is not provided, EMA assumes the service provides Realtime, Tick-By-Tick data. <p>See the <i>EMA 3.0.2 Java Edition Developers Guide</i> for more information about Qos use and handling.</p> |
| SupportsQoSRange | UINT | No | 0 | 0, 1 | <p>Indicates whether the provider support QoS range when requesting an item. If supported, a consumer may indicate an acceptable range via ReqMsg.Qos</p> <ul style="list-style-type: none"> • 0: Not supported • 1: Supported |
| ItemList | ASCII | No | None | | <p>Name of SymbolList that includes all the items that publisher currently provides. If it is not present, this feature is not supported. The consumer requests this item via MMT_SYMBOL_LIST MessageModelTypes (See Chapter 11).</p> |
| SupportsOutOfBandSnapshots | UINT | No | 1 | 0, 1 | <ul style="list-style-type: none"> • 1: Yes • 0: No <p>Indicates whether Snapshot requests can be made when the OpenLimit has been reached (refer to Section 4.3.1.4).</p> |
| AcceptingConsumerStatus | UINT | No | 1 | 0, 1 | <ul style="list-style-type: none"> • 1: Yes • 0: No <p>Indicates whether a service can accept and process messages related to Source Mirroring (refer to Section 4.2.5).</p> |

Table 22: Source Directory Info **FilterEntry**'s Elements

4.3.1.2 Source Directory State Filter Entry

The State filter entry (**SERVICE_STATE_FILTER**, **SERVICE_STATE_ID**) conveys information about the current state of a service. This information usually has some bearing on the availability of data from a service. If a service becomes temporarily unavailable or becomes available again, consumers are informed via updates to this category.

This category should be present in the initial refresh and updated as needed.

The Status element can change the state of items provided by this service. Prior to changing a service status, Thomson Reuters recommends that you issue item or group status messages to update item states.

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE/EXAMPLE | DESCRIPTION |
|-------------------|-------|----------|--------------------------------|---|---|
| ServiceState | UINT | Yes | n/a | 0, 1 | <ul style="list-style-type: none"> • 1: Service is Up • 0: Service is Down <p>Indicates whether the original provider of the data is available to respond to new requests. Changes to ServiceState do not affect streams that are already open. Refer to Section 4.4.2.</p> |
| AcceptingRequests | UINT | No | 1 | 0, 1 | <ul style="list-style-type: none"> • 1: Yes • 0: No <p>Indicates whether the immediate provider can accept new requests and/or handle reissue requests on already open streams. Existing streams remain unaffected, however new request will be rejected. Refer to Section 4.4.2.</p> |
| Status | State | No | Open (1), Ok (1), None (0), "" | e.g., OmmState.Open OmmState.Ok, OmmState.None , "OK" | <p>Specifies a status change to apply to all items provided by this service. This status only applies to item streams that have received a refresh or status of OPEN/OK. Refer to Section 4.4.3.1 for more details.</p> |

Table 23: Source Directory State FilterEntry's Elements

4.3.1.3 Source Directory Group Filter Entry

The Group filter entry (**SERVICE_GROUP_FILTER**, **SERVICE_GROUP_ID**) conveys item group status and item group merge information. Every item stream is associated with an item group as defined by the **ItemGroup** provided with the item's refresh message or status message. If some kind of change impacts all items within the same group, only a single group status message need be provided. For more information on item group use and handling, see the *EMA 3.0.2 Java Edition Developers Guide*.

If multiple Group **FilterEntry** are received in a single **FilterList**, then they should be applied in the order in which they were received.

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE / EXAMPLE | DESCRIPTION |
|---------------|--------|----------|---------|---|--|
| Group | BUFFER | Yes | n/a | e.g., 1.26.102 | The ItemGroup with which this information is associated. This is typically represented as a series of 2-byte unsigned integers (i.e. two byte unsigned integers written directly next to each next to each other). The example provided in Range/Example column of this table shows such a series, with inserted to help indicate two-byte value. |
| MergedToGroup | BUFFER | No | n/a | e.g., 1.26.110 | Used to merge all of the items from one group into another group. |
| Status | State | No | n/a | e.g.: OmmState.Open OmmState.Ok, OmmState.None , "OK" | <p>A status change to apply to all items whose ItemGroup matches the Group element.</p> <ul style="list-style-type: none"> • If you need to convey group status text or code information without changing data status, use the value • If present in the same message as a MergedToGroup element, this change should be applied before merge. <p>This change only applies to item streams that have received a refresh or status with a state of OPEN/OK.</p> <p>See section 4.4.3.2 for more details.</p> |

Table 24: Source Directory Group FilterEntry's Elements

4.3.1.4 Source Directory Load Filter Entry

The Load filter entry (**SERVICE_LOAD_FILTER**, **SERVICE_LOAD_ID**) conveys information about the service's workload. If multiple services can provide the desired data, the consumer may use this information to help decide which to use.

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE/EXAMPLE | DESCRIPTION |
|--------------|------|----------|---------|---------------|---|
| OpenLimit | UINT | No | none | 0-MAXUINT | Maximum number of streaming items that the client is allowed to open to this service. |
| OpenWindow | UINT | No | none | 0-MAXUINT | Maximum number of outstanding new refresh requests (i.e. requests for items which are not already open) service can receive at any given time. If OpenWindow is 0 , the behavior is the same as setting AcceptingRequests to 0 and no open item request will be accepted. The provider should not assume that the OpenWindow becomes effective immediately. |
| LoadFactor | UINT | No | none | 0-65535 | A number indicating the current workload on the source providing the data. This number and the means of its calculation vary based on the system (i.e., bandwidth usage, CPU usage, number of clients, or something else). The only requirements are that: <ul style="list-style-type: none"> The LoadFactor should be calculated the same way for all services in a system. A more heavily-loaded service should have higher LoadFactor than one that is less loaded. |

Table 25: Source Directory Load FilterEntry's Elements

4.3.1.5 Source Directory Data Filter Entry

The Data filter entry (**SERVICE_DATA_FILTER**, **SERVICE_DATA_ID**) conveys information that should be applied to all items associated with the service. This is commonly used for services that provide ANSI Page-based data.

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE/EXAMPLE | DESCRIPTION |
|--------------|---------------|---------------------------------|---------|---|---|
| Type | UINT | No (Yes if Data is present.) | none | <ul style="list-style-type: none"> • Time(1) • Alert(2) • Headline(3) • Status(4) • Reserved values : 0 – 1023 | Explains the content of the Data. |
| Data | Any Data Type | No | none | | Data that should be applied to all items from the service; commonly used for services providing ANSI Page-based data. The contents of this element should be applied as an update to every item open for this stream. After the data fans out, it does not need to be cached as part of the source directory. |

Table 26: Source Directory Data FilterEntry's Elements

4.3.1.6 Source Directory Link Filter Entry

The Link filter entry (**SERVICE_LINK_FILTER**, **SERVICE_LINK_ID**) conveys information about the upstream sources that provide data to a service.

This information is represented as a **Map**, where each **MapEntry** represents one upstream source. The map entry key is the name associated with the communication link, and is of type **ASCII**. This name is scoped globally, and if multiple sources have the same name, they are assumed to be identical and the aggregating system will balance requests among them.

A typical consumer application can treat this entry as mainly informational. The consumer should use the **State** category to make programmatic decisions about service availability and status.

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE / EXAMPLE | DESCRIPTION |
|--------------|-------|----------|-----------------|-----------------|--|
| Type | UINT | No | 1 (Interactive) | 1-2 | Indicates whether the upstream source is interactive or broadcast. This does not Describe whether the service itself is interactive or broadcast. <ul style="list-style-type: none"> 1: Interactive 2: Broadcast |
| LinkState | UINT | Yes | n/a | 0, 1 | Indicates whether the upstream source is up or down. <ul style="list-style-type: none"> 0: Link is Down 1: Link is Up |
| LinkCode | UINT | No | 0 (None) | 0-3 | Provides additional information about upstream source. <ul style="list-style-type: none"> 0: None 1: Ok 2: RecoveryStarted 3: RecoveryCompleted |
| Text | ASCII | No | | n/a | Explains the LinkState and LinkCode . |

Table 27: Source Directory Link FilterEntry Map's Entries

4.3.2 Source Directory ConsumerStatus Generic Message Payload

Note: **Generic Message(s)** are supported for the **DIRECTORY** RDM only for sending / receiving information related to ConsumerStatus/Source Mirroring Mode.

The directory data structure for Generic message payload is **Map**. Each MapEntry sends status to one service and is uniquely identified by **serviceName** (key Data). Each entry contains an **ElementList** with one **ElementEntry** indicating how the provider is used.

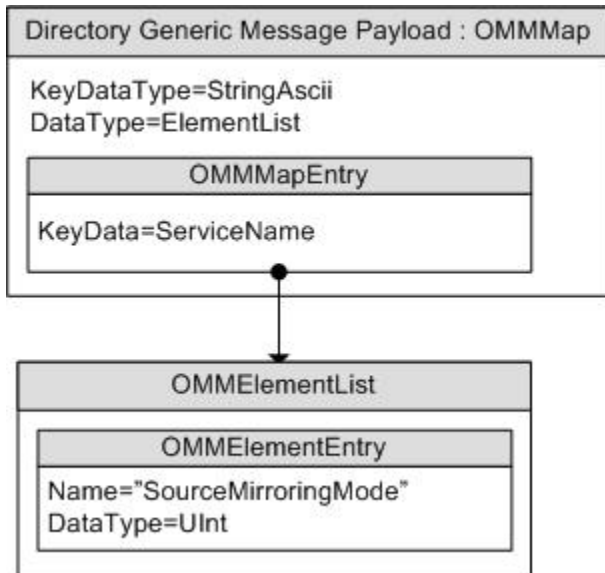


Figure 7: Source Directory Generic Message Payload

| ELEMENT NAME | TYPE | REQUIRED | DEFAULT | RANGE/EXAMPLE | DESCRIPTION |
|---------------------|------|----------|---------|---------------|--|
| SourceMirroringMode | UINT | Yes | none | 0 - 2 | <p>Indicates how the downstream component is using the service:</p> <ul style="list-style-type: none"> • 0: ActiveNoStandby. The downstream device is using the data from this service, and is not receiving it from any other service. • 1: ActiveWithStandby. The downstream device is using the data from this service, but is also getting it from another service. • 2: Standby. The downstream device is getting data from this service, but is actually using data from another service. <p>(No reply from the provider application is needed as this is informational only.)</p> |

Table 28: Source Directory Generic Message *MapEntry*'s Elements

4.4 Special Semantics

4.4.1 Multiple Streams

Unlike other `MessageModelTypes`, it is permitted to open two Directory streams with identical message key information. It is also permissible to change the Filter of an open stream.

4.4.2 ServiceState and AcceptingRequests

The **ServiceState** and **AcceptingRequests** elements in the State filter entry work together to indicate the ability of a particular service to provide data:

- **ServiceState** indicates whether the source of the data is accepting requests
- **AcceptingRequests** indicates whether the immediate upstream provider (the provider to which the consumer is directly connected) can accept new requests and/or process reissue requests on already open streams.

The values of **ServiceState** and **AcceptingRequests** do not affect existing streams and do not imply anything about the data quality of existing streams.

| SERVICESTATE | ACCEPTING REQUESTS | MEANING |
|--------------|--------------------|---|
| Up(1) | Yes (1) | New requests and reissue can be successfully processed. |
| Up (1) | No (0) | Although the source data is available, the immediate provider is not accepting new requests. However reissue requests on already open streams can be processed. |
| Down (0) | Yes (1) | The source of data is not available. The immediate provider, however, can accept the request and forward it when the source becomes available. |
| Down (0) | No (0) | Neither the source nor the immediate provider is accepting new requests. |

Table 29: ServiceState and AcceptingRequests

4.4.3 Service and Group Status Values

The **Status** elements in the State and Group FilterEntries are transient. Their values should be applied to all existing streams. The values should not be cached and should not affect any new requests.

4.4.3.1 Service Status

The Directory's **ServiceState.Status** Element can be used by providers to efficiently change the state of all of a service's existing streams with a single message. The **ServiceState.Status** does not apply to requests that are currently pending a first refresh or status response (Section 2.3) message. EMA consumer implementation normally fans out state from the Status Element to all items associated with the service. When EMA does this, it will not forward this Element to the application. Instead, the application receives a **StatusMsg** for each item from the service. The other elements from the ServiceState FilterEntry will still be sent to the application.

4.4.3.2 Group Status

The Group FilterEntry can be used to efficiently change the state of a large number of items with a single message. The **Group.Status** does not apply to requests that are currently pending a first refresh or status response message. EMA consumer implementation normally fans out group messages to all items associated with the group. When EMA does this, it will not forward this FilterEntry to the application. Instead, the application will receive a **StatusMsg** for each item in the group.

4.4.4 Removing a Services

Provider is able to remove service from a Directory by sending the **MapEntry.Delete** Action for the MapEntry of the service. A consumer should place all open items associated with this service in the **0mmState.ClosedRecover** state. All services associated with a Source Directory stream are removed if:

- The provider sends a message with setting **ClearCache** to **true** on response message for the Directory stream.
- The provider sends a state of **0mmState.Closed** or **0mmState.ClosedRecover** on Source Directory stream.
- The connection between provider and consumer is closed or lost.

If any of these events occurs, all of the items for the service(s) are automatically cleaned up and considered ClosedRecover status.

4.4.5 Service IDs

Most RDM messages can be associated with a service (although Login and Directory typically are not). For better bandwidth utilization, the RSSL transport optimizes the service name into a two byte service ID. The **ServiceId** is only unique within a single channel.

4.4.6 Automatic Request from EMA Consumer

EMA internal consumer implementation will always automatically request a Directory with the **Filter** set to **SERVICE_INFO_FILTER | SERVICE_STATE_FILTER | SERVICE_GROUP_FILTER**. This ensures that EMA can:

- Map service IDs to names
- Fanout **SERVICE_STATE_ID.Status** and **SERVICE_GROUP_ID.Status**
- Apply **SERVICE_GROUP_ID.MergedToGroup**

The Directory request is sent after the Login is successful. Response message for this directory request are not forwarded to the consumer application. If the consumer wants source directory information, it is required to make its own request for the Directory.

4.4.7 Client Requests Non-Existing Service Directory

If the client sends a directory request without specifying service name or service ID, the directory response includes all available services. If the client specifies a service name or service ID in a directory request, it receives the directory response for just the requested service. If the requested service name or service ID is not available, EMA should send a service directory containing an empty map entry in the payload. If the service becomes available later, the client receives an update message which contains the required service information.

Chapter 5 Dictionary Domain

5.1 Description

You can leverage many features within OMM to optimize bandwidth use such as reducing or removing the need to constantly communicate well known information (e.g., names and data types associated with information in a **FieldList**). Using these techniques, information is instead contained in a field dictionary, where the field list contains only **FieldId** references to information in the dictionary.

A provider application can indicate any dictionaries needed to parse published content. To reconstruct omitted information, consumer applications reference required dictionaries when decoding. Dictionaries may be available locally in a file, or available for request over the network from an upstream provider.

There are currently two types of dictionaries with defined domain models for network requests:

- **Field Dictionary:** Stores data referenced by the **FieldList**. Each **FieldId** in a **FieldEntry** corresponds to an entry in the Field Dictionary, which provides information such as the field's name (e.g. **BID**) and data type (e.g. **INT**). Additional information (such as rippling fields and expected cache sizing requirements) are also present.
- **Enumerated Types Dictionary:** Contains tables defining values for enumerated values of type **Enum**. Each table indicates the **FieldId** values of all fields that use the data in the table, as well as the possible enumerated values. For example, a field indicating the currency of an item will use a table listing enumerations of various currencies. If a consumer then decodes the value of that field (e.g. **840**), it can cross reference that value with its copy of the table. The entry the consumer finds will contain a string that the consumer can print (e.g. **USD**), and possibly a more meaningful description as well.

5.2 Decoding FieldList Contents with Field and Enumerated Types Dictionaries

By itself, a **FieldEntry** contains only the **FieldId** and associated encoded value in **Data**. Because EMA internally stores pre-decoded data, an application can easily decode a FieldEntry (without crossreferencing the **FieldId** to the correct Field Dictionary to determine its type).

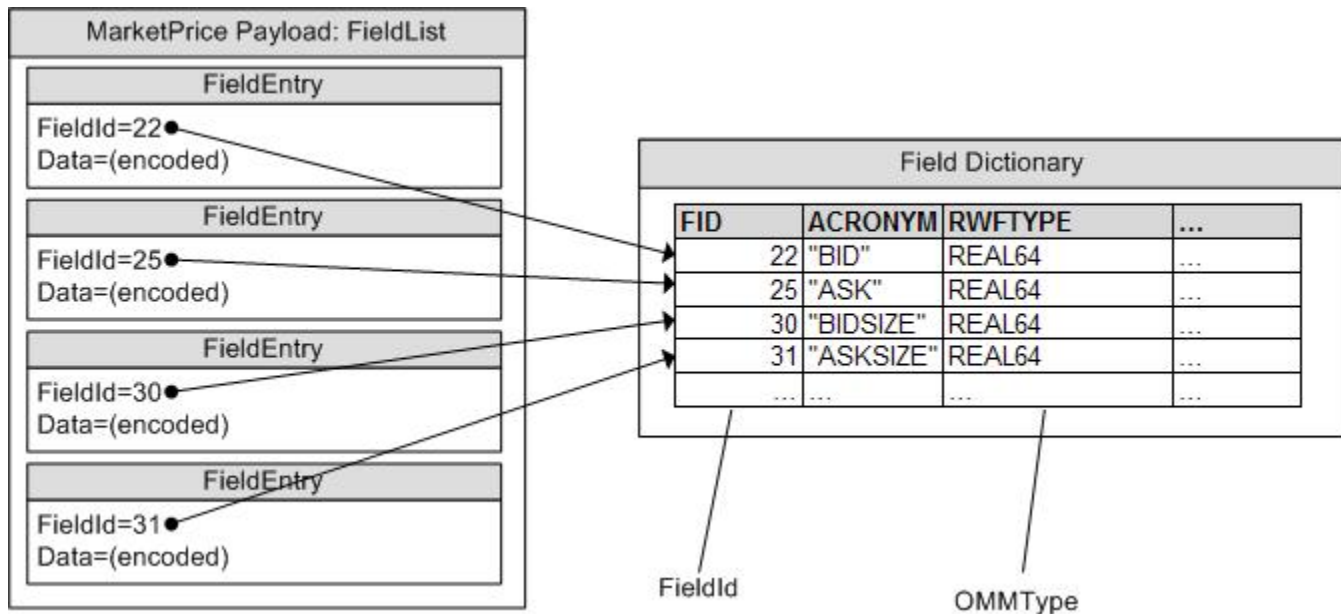


Figure 8: **FieldList** Referencing Field Dictionary

If the field's type is **DICTIONARY_ENUM_TABLES**, there may be a table of values in the corresponding Enumerated Types Dictionary. The consumer can then reference that information.

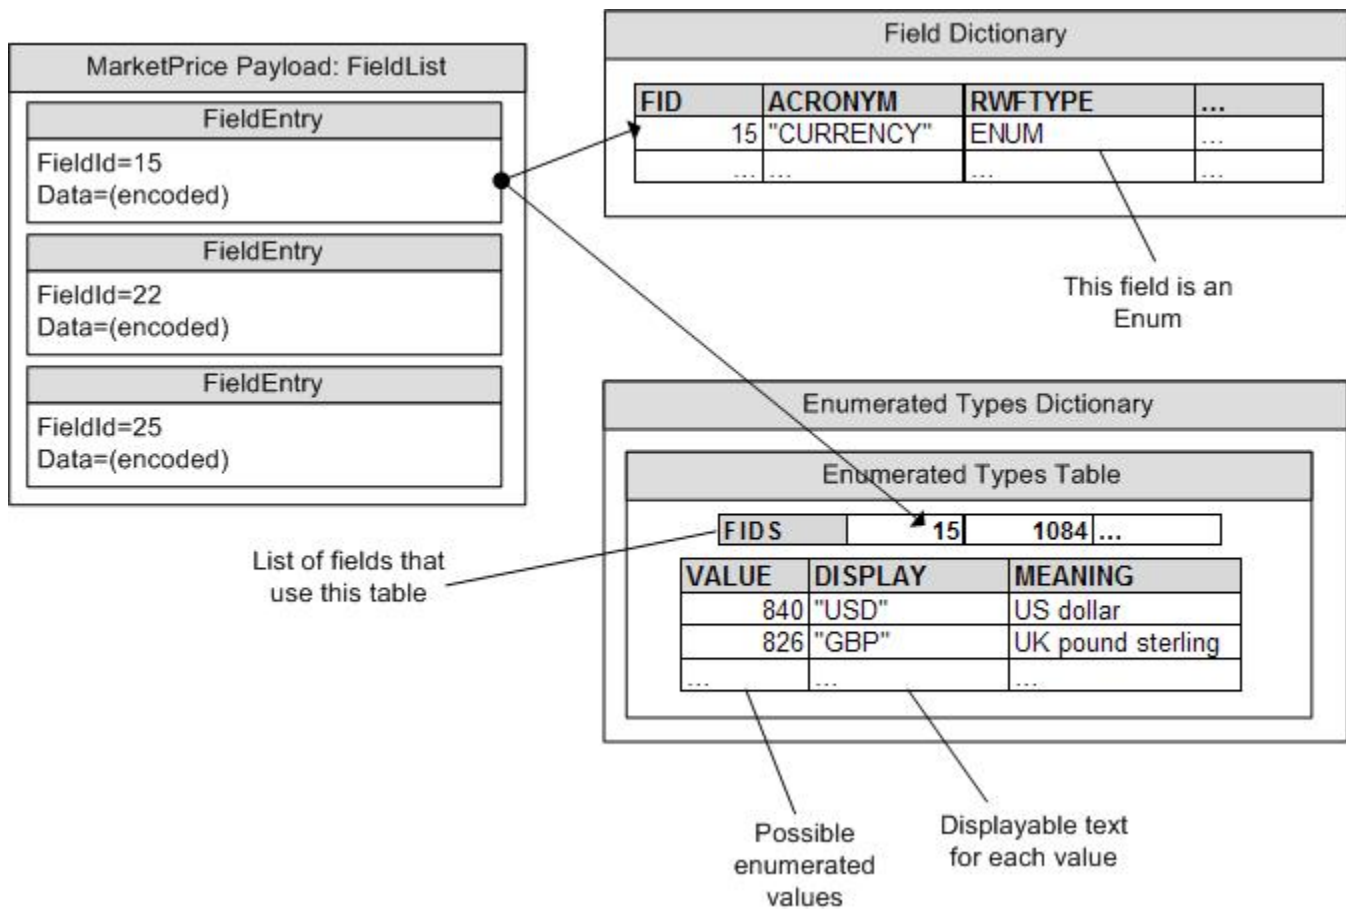


Figure 9: FieldEntry Referencing Enumerated Types Table

The consumer, having decoded the enumerated value (e.g. **840**), finds the correct table that defines the field and looks up the enumerated value in that table. The value will have a displayable string associated with it (e.g. **USD**).

5.3 Usage

Note: Generic message(s) are not supported for the **DICTIONARY** Reuters Domain Model.

5.3.1 Dictionary Request Message

A dictionary request message is encoded using **ReqMsg** and sent internally by the **OmmConsumer** in the constructor of this class. The request indicates the name of the desired dictionary and how much information from that dictionary is needed.

Users can configure dictionary request messages using **OmmConsumerConfig.addAdminMsg()** to override the default dictionary request.

Though updates are not sent on dictionary streams, Thomson Reuters recommends that the consumer make a “streaming request” (setting **InterestAfterRefresh** to **true**) so that it is notified whenever the dictionary version changes.

| COMPONENT | DESCRIPTION / VALUE |
|---------------------|--|
| DomainType | Required. MMT_DICTIONARY = 5 |
| Interactions | Required. <ul style="list-style-type: none"> InitialImage true : Indicates an initial image is required InterestAfterRefresh true : Indicates a streaming request is required <p>After receiving RefreshComplete, the consumer can only receive a Status response message. An update response message will never be received. Pause request is not supported.</p> |
| Priority | Optional. |
| Filter | Required. Represents the desired verbosity of the dictionary. The consumer should set the Filter according to how much information is needed. <ul style="list-style-type: none"> DICTIONARY_INFO=0x0: Version information only DICTIONARY_NORMAL=0x7: Provides all information needed for decoding Optional: <ul style="list-style-type: none"> DICTIONARY_MINIMAL=0x3: Provides information needed for caching DICTIONARY_VERBOSE=0xF: Provides all information(including comments) For details, refer to Section 5.4.1. |
| Name | Required. Populate Name with the name of the desired dictionary as seen in the Source Directory response (refer to Section 4.3.1.1). |
| ServiceName | Required. This will be the service name of a service which listed the Dictionary's Name in the “DictionariesProvided” element of its ServiceInfo FilterEntry . <p>Note: The application should set either the ServiceName or ServiceId of the service, but not both.</p> |

| COMPONENT | DESCRIPTION / VALUE |
|------------------|---|
| ServiceId | Required. This will be the serviceID of a service which listed the Dictionary's Name in the "DictionariesProvided" element of its ServiceInfo FilterEntry . |
| | Note: The application should set either the ServiceName or ServiceId of the service, but not both. |

Table 30: Dictionary Request Message

5.3.2 Dictionary Refresh Message

A Dictionary refresh message is encoded using **RefreshMsg** and sent by OMM Interactive and non-interactive provider applications and provides the consumer with the content of the requested dictionary.

Since the Refresh messages for Dictionary data might be in multiple Response messages, the provider should only send **Name** and **ServiceName** in the first Refresh message. If **MsgKeyInUpdates** is set to **true**, **Name** and **ServiceName** must be provided for all Refresh and Status messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|---|
| DomainType | Required. MMT_DICTIONARY = 5 |
| State | Required. Contains stream and data state information for the dictionary stream. |
| Indications | Optional: <ul style="list-style-type: none"> DoNotCache true: Indicates the application should not cache ClearCache true: Indicates the application should clear the cache Complete true: Indicates a refresh complete |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages with this stream. |
| PermissionData | Optional. Used if provided dictionary requires permissioning. |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|---|
| Filter | <p>Required. Represents the desired verbosity of the dictionary.</p> <ul style="list-style-type: none"> • DICTIONARY_INFO=0x0: Version information only • DICTIONARY_NORMAL=0x7: Provides all information needed for decoding <p>Optional:</p> <ul style="list-style-type: none"> • DICTIONARY_MINIMAL=0x3: Provides information needed for caching • DICTIONARY_VERBOSE=0xF: Provides all information(including comments) <p>For details, refer to Section 5.4.1.</p> |
| Name | <p>Required. Populate Name with the name of the desired dictionary as seen in the Source Directory response (refer to Section 4.3.1).</p> |
| ServiceName | <p>Required. This will be the service name of a service which listed the Dictionary's Name in the "DictionariesProvided" element of its ServiceInfo FilterEntry.</p> <hr/> <p>Note: The application should set either the ServiceName or ServiceId of the service, but not both.</p> |
| ServiceId | <p>Required. This will be the serviceID of a service which listed the Dictionary's Name in the "DictionariesProvided" element of its ServiceInfo FilterEntry.</p> <hr/> <p>Note: The application should set either the ServiceName or ServiceId of the service, but not both.</p> |
| Payload | <p>Required. The payload structure varies depending on the dictionary's type. However, payload is typically a Series containing an ElementList, while the series summaryData indicates the specific dictionary type and version. The payload could also be XML.</p> |

Table 31: Dictionary Refresh Message

5.3.3 Dictionary Status Message

A Dictionary status message is encoded using **StatusMsg** and sent by OMM Interactive and non-interactive provider applications. This message can indicate changes to a dictionary's version.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|---|
| DomainType | Required. MMT_DICTIONARY = 5 |
| State | Optional. Contains stream and data state information for the dictionary stream. |
| Indications | Optional: <ul style="list-style-type: none"> • DoNotCache true: indicates do not cache • ClearCache true: indicates clear cache • Complete true: indicate refresh complete |
| PermissionData | Optional. Used if provided dictionary requires permissioning. |

Table 32: Dictionary Status Message

5.4 Data

5.4.1 Filter

While Dictionary's Filters values correlate to a bitmap, only the combinations in Table 33 are supported. For example a Dictionary's **Filter** cannot be **0x2** or **0x6**.

Dictionary providers are required to support `DICTIONARY_INFO` and `DICTIONARY_NORMAL` filters. **Filter** can be changed for Directory and Dictionary domain message models as part of a reissue. It cannot be changed in other domain message models. If an unsupported Filter is requested, the provider may do either of the following:

- Change the Filter in response message to a supported one.
- Send a Closed State in the response message.

| MASK | PROVIDER MUST SUPPORT IN RESPONSE MESSAGE | DESCRIPTION |
|-------------------------------------|---|--|
| <code>DICTIONARY_INFO=0x0</code> | Yes | Dictionary summary information, such as DictionaryType and version. The response Payload. SummaryData will contain data but the response payload will contain no entries. |
| <code>DICTIONARY_MINIMAL=0x3</code> | No | <code>DICTIONARY_INFO</code> plus the minimum data needed to cache or convert data |
| <code>DICTIONARY_NORMAL=0x7</code> | Yes | <code>DICTIONARY_MINIMAL</code> plus all other data, except descriptions and comments |
| <code>DICTIONARY_VERBOSE=0xF</code> | No | All available data |

Table 33: Dictionary's Filter

5.4.2 Refresh Message Summary Data

Dictionary's SummaryData is an ElementList that can be used by a consumer to find out if it needs an updated dictionary or if it needs the dictionary at all. The SummaryData is extensible and can include other elements.

| NAME | TYPE | REQUIRED | DEFAULT | RANGE / EXAMPLE | DESCRIPTION |
|--------------|-------|----------|---------|---|---|
| Version | ASCII | Yes | n/a | e.g. "1.0.1" | Version of the dictionary. Refer to Section 5.8.2. Note: The Enumerated Types dictionaries populate the Version element using information present in the DT_Version tag. |
| Type | UINT | Yes | n/a | DICTIONARY_FIELD_DEFINITIONS=1 DICTIONARY_ENUM_TABLES=2 DICTIONARY_RECORD_TEMPLATES=3 DICTIONARY_DISPLAY_TEMPLATES=4 DICTIONARY_DATA_DEFINITIONS=5 DICTIONARY_STYLE_SHEET=6 DICTIONARY_REFERENCE=7 Reserved: 0-127 Extensible: 128-255 | This can be used to determine what a dictionary is used for and if the dictionary is needed. For example display applications may need style sheets, display templates, and enumeration tables, but caching applications only need field definitions. |
| DictionaryId | INT | No | 0 | Unspecified = 0 Reserved: 0 to 16383 Extensible: -1 to -16383 (A DictionaryId of 1 corresponds to the RDMFieldDictionary.) | EMA can use DictionaryId in field lists and series to associate fields with field definitions or enumerations. Refer to Section 5.4.4. |
| RT_Version | ASCII | None | No | e.g. "1.0.1" | Optional; sent only with the enumerated type dictionary. This holds information about which field dictionary should be used with this enumerated type dictionary. |
| DT_Version | ASCII | None | No | e.g. "1.0.1" | Optional; sent only with the enumerated type dictionary. This holds information about the display template's version. |

Table 34: Dictionary SummaryData

5.4.3 Response Message Payload

Response (Section 2.3) message Payload can widely vary based on the DictionaryType. The Payload is typically a Series of ElementLists. It can also be XML or Opaque data. For response message payload, refer to sections 5.5.1 and 5.6.1.

Some DictionaryTypes also have external file representations of their data. See sections 5.5.2 and 5.6.2 for details about the data of each DictionaryType.

5.4.4 DictionaryId

The first **FieldList** provided for an item always has a **DictionaryId**. While a **FieldList** can be parsed without a Dictionary, to interpret the data, the **FieldList**'s DictionaryId must be associated with a Dictionary. The **DictionaryId** provided in response **Payload.SummaryData** is used to associate a FieldList's **DictionaryId** to a "family" of Dictionaries.

A Dictionary family includes a single FieldDefinition Dictionary. Enumeration tables for a single FieldDefinition Dictionary must be consolidated into a single EnumTable Dictionary that has the same DictionaryId as the FieldDefinition Dictionary. The Dictionary family may also include a single RecordTemplate Dictionary and a single DisplayTemplate Dictionary.

The **DictionaryId** is **0** for StyleSheet and Reference. **DictionaryId** of **0** means the **DictionaryId** is unspecified, so the Dictionary is not used for parsing or interpreting or displaying any FieldLists. For example, a "TimeZone" Reference Dictionary may include table information about every world time zone. Since this information is not needed to parse FieldLists, there is no reason to assign a DictionaryId to the "TimeZone" Dictionary. So the value of its **DictionaryId** is **0** (i.e. unspecified).

DictionaryIds are globally scoped can have the range of -16383 to 16383. **DictionaryIds** 0 through 16383 are reserved for Reuters use. Applications can provide their own dictionaries by selecting a **DictionaryId** between -1 and -16383. If a single FieldList needs to use Fields defined in two dictionaries, then it can specify a dictionary switch using 0 for the Field ID. See the *EMA 3.0.2 Java Edition Developers Guide* for details.

5.5 Field Dictionary

5.5.1 Field Dictionary Payload

The payload of a Field Dictionary Refresh Message consists of a **Series** where each series entries contain an **ElementList**. Each **SeriesEntry** represents a row of information in the dictionary. The **ElementList** contained in each series entry provides information about an element of the row.

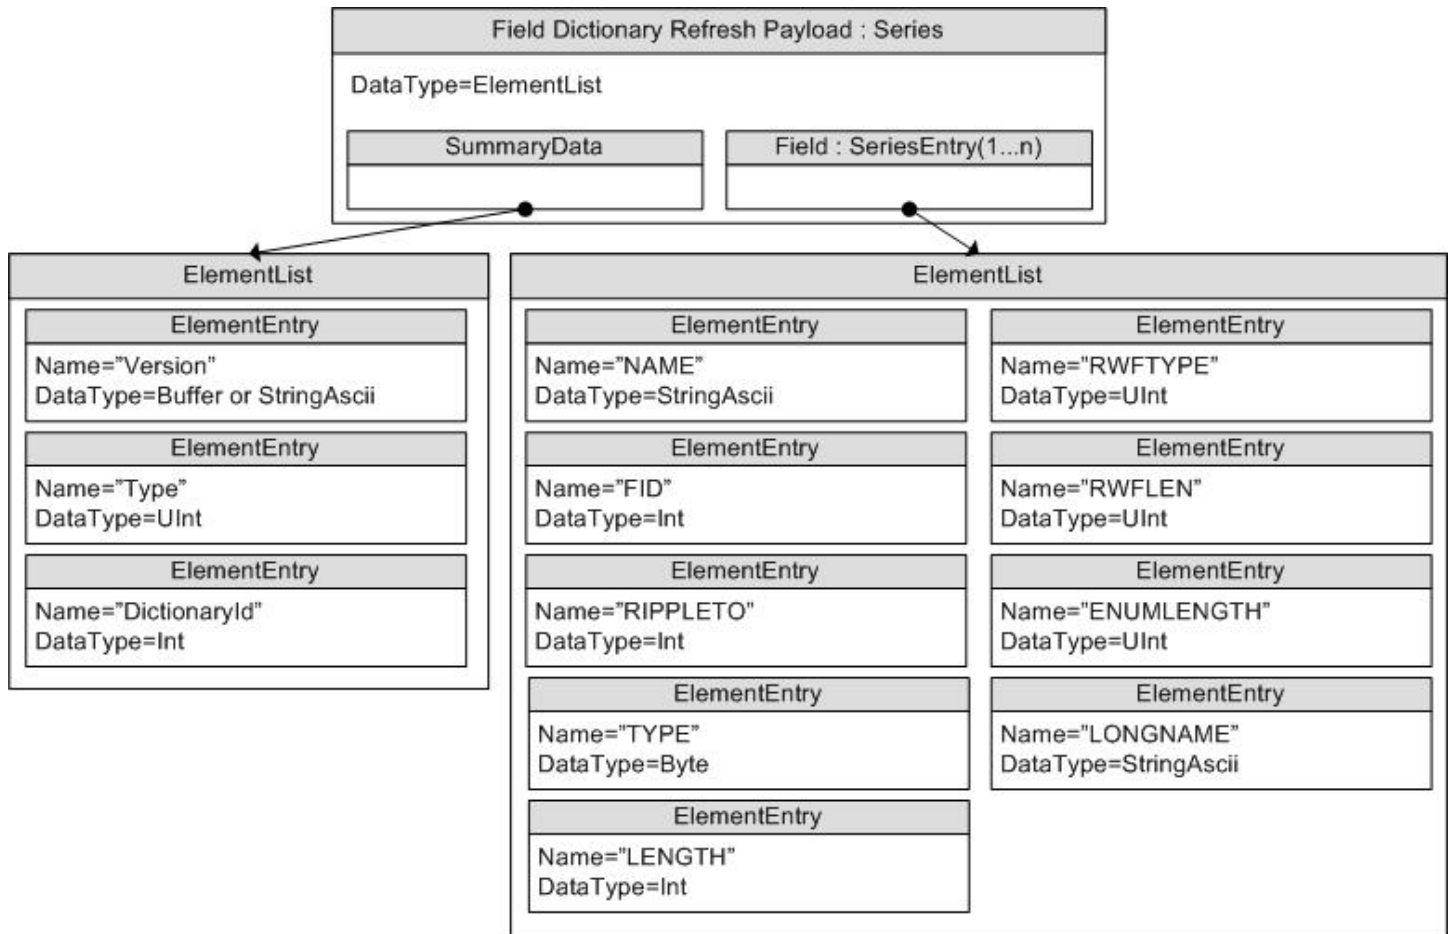


Figure 10: Field Dictionary Payload

| NAME | TYPE | DEFAULT | LEAST VERBOSITY | RANGE / EXAMPLE | DESCRIPTION |
|------------|-------------|---------|-----------------|-------------------|---|
| NAME | StringASCII | None | MINIMAL | e.g. "PROD_PERM" | The field's short name or acronym. |
| FID | INT | None | MINIMAL | -32768 to 32767 | The field's FieldId . |
| RIPPLETO | INT | None | MINIMAL | -32768 to 32767. | If the field ripples, this is the FieldId of the field it ripples to. A value of 0 sets the field to not ripple. For a description of rippling, refer to the <i>EMA 3.0.2 Java Edition Developers Guide</i> . |
| TYPE | INT | None | MINIMAL | e.g. INTEGER | The data type of the field for the Marketfeed format. |
| LENGTH | UINT | None | MINIMAL | 0-65535 | The maximum string length of the field for the Marketfeed format. |
| RWFTYPE | UINT | None | MINIMAL | e.g. INT | The DataType of the field. |
| RWFLEN | UINT | None | MINIMAL | 0-65535 | The maximum length needed to cache the encoded value. This is only a suggestion and is not enforced. A length of 0 implies that it is the maximum possible size for that type. |
| ENUMLENGTH | UINT | None | NORMAL | 0-65535 | Used for fields of type Enumeration . This is the length of the DISPLAY element in its Enumerated Types table (see section 5.6.1). |
| LONGNAME | ASCII | None | NORMAL | e.g. "PERMISSION" | The "Long Name" or "DDE Acronym" of the field. |

Table 35: Field Dictionary **ElementEntry**

5.5.2 Field Dictionary File Format

The **RDMFieldDictionary** file format is a plain text table. Rows are separated by lines and columns are separated by whitespace (excepting quoted strings as shown above). Lines beginning with an exclamation point (!) are comments and are ignored.

Each row represents one field, and each column a datum about that field.

| ! ACRONYM | DDE ACRONYM | FID | RIPPLES TO | FIELD TYPE | LENGTH | RWF TYPE | RWF LEN |
|--------------|-------------------|-----|------------|--------------|---------|--------------|---------|
| ! ----- | ----- | --- | ----- | ----- | ----- | ----- | ----- |
| PROD_PERM | "PERMISSION" | 1 | NULL | INTEGER | 5 | UINT64 | 2 |
| RNDI_DISPLAY | "DISPLAYTEMPLATE" | 2 | NULL | INTEGER | 3 | UINT32 | 1 |
| DSPLY_NAME | "DISPLAY NAME" | 3 | NULL | ALPHANUMERIC | 16 | RMTES_STRING | 16 |
| RDN_EXCHID | "IDN EXCHANGE ID" | 4 | NULL | ENUMERATED | 3 (3) | ENUM | 1 |
| TI_MACT | "TIME OF UPDATE" | 5 | NULL | TIME | 5 | TIME | 5 |
| TRDPRC_1 | "LAST" | 6 | TRDPRC_2 | PRICE | 17 | REAL64 | 7 |
| TRDPRC_2 | "LAST 1" | 7 | TRDPRC_3 | PRICE | 17 | REAL64 | 7 |
| TRDPRC_3 | "LAST 2" | 8 | TRDPRC_4 | PRICE | 17 | REAL64 | 7 |
| TRDPRC_4 | "LAST 3" | 9 | TRDPRC_5 | PRICE | 17 | REAL64 | 7 |
| TRDPRC_5 | "LAST 4" | 10 | NULL | PRICE | 17 | REAL64 | 7 |

Figure 11: Field Dictionary File Format Sample

Several tagged attributes are available at the beginning of the file. These attributes provide versioning information about the dictionary in the file and are processed when loading from a file-based dictionary. Some of this information is conveyed along with the domain model representation of the dictionary. Tags may be added as future dictionary versions become available.

For the **RDMFieldDictionary**, an example of these tags are shown below.

```
!tag Filename      RWF.DAT
!tag Desc          RDFD RWF field set
!tag Type          1
!tag Version       4.00.14
!tag Build         002
!tag Date          18-Nov-2010
```

Figure 12: Field Dictionary Tagged Attributes Sample

The following table describes the tag attributes and indicates which are used while encoding the domain representation of the file.

| TAG ATTRIBUTE | DESCRIPTION |
|---------------|--|
| Filename | The original name of the file as created by Thomson Reuters. This typically will not match the current name of the file, RDMFieldDictionary . Filename is not used when encoding the domain representation of the field dictionary. |
| Desc | Describes the dictionary. Desc is not used when encoding the domain representation of the field dictionary. |
| Type | Stores the dictionary type associated with this dictionary. For a field dictionary, this should be DICTIONARY_FIELD_DEFINITIONS=1 . Other types are defined Table 34: Dictionary SummaryData. Type is used when encoding the domain representation of the field dictionary. |
| Version | Stores version information associated with this dictionary. Version is used when encoding the domain representation of the field dictionary. |
| Build | Stores internal build information. Build is not used when encoding the domain representation of the field dictionary. |
| Date | Stores dictionary release date information. Date is not used when encoding the domain representation of the field dictionary. |

Table 36: Field Dictionary File Tag Information

The columns in the field dictionary correspond to the **ElementEntry** names used while encoding and decoding the Field Dictionary:

| COLUMN NAME IN FILE | RWF ELEMENT NAME | NOTES |
|---------------------|---------------------|---|
| ACRONYM | NAME | The abbreviated name corresponding to the field. |
| DDE ACRONYM | LONGNAME | A longer version of the name represented by the Acronym. |
| FID | FID | The Field Identifier value. |
| RIPPLES TO | RIPPLETO | The file format uses the Acronym of the target field, rather than the rows FieldId . If the field does not ripple, this should be NULL . |
| FIELD TYPE | TYPE | The Marketfeed type associated with this field |
| LENGTH | LENGTH (ENUMLENGTH) | The Marketfeed length associated with the field |
| RWF TYPE | RWFTYPE | The RWF type associated with the field (and corresponding to DataTypes values). |
| RWF LEN | RWFLEN | A caching length hint associated with this field. |

Table 37: Field Dictionary File Column Names and ElementEntry Names

5.5.2.1 RWF TYPE Keywords

The following keywords are supported for the RWF TYPE:

| KEYWORD | DATA TYPE |
|-------------------------|-------------|
| INT, INT32, INT64 | INT |
| UINT, UINT32, UINT64 | UINT |
| REAL, REAL32, REAL64 | REAL |
| DATE | DATE |
| TIME | TIME |
| ENUM | ENUM |
| BUFFER | BUFFER |
| ASCII_STRING | ASCII |
| RMTES_STRING | RMTES |
| UTF8_STRING | UTF8 |
| DOUBLE | DOUBLE |
| OPAQUE | OPAQUE |
| FLOAT | FLOAT |
| DATETIME | DATETIME |
| STATUS | Stream |
| QOS | QOS |
| ARRAY | Array |
| VECTOR | Vector |
| FIELD_LIST | FieldList |
| ELEMENT_LIST, ELEM_LIST | ElementList |
| FILTER_LIST | FilterList |
| MAP | Map |
| SERIES | Series |
| XML | XML |
| ANSI_PAGE | ANSI_PAGE |

Table 38: Field Dictionary Type Keywords

5.5.2.2 FIELD TYPE Keywords

The RDMFieldDictionary's RWFTYPE and RWFLEN are derived from the field dictionaries used in Marketfeed. Valid keywords for the Marketfeed Field Type are **INTEGER**, **ALPHANUMERIC**, **ENUMERATED**, **TIME**, **TIME_SECONDS**, **DATE**, or **PRICE**.

The table below lists the mappings from **FIELD TYPE** to the **RWF TYPE** keyword. All are used in **RDMFieldDictionary** and are safe.

| FIELD TYPE | LENGTH | RWF TYPE | RWF LEN | NOTES |
|--------------|-----------|--------------|---------|---|
| ALPHANUMERIC | 14 | ASCII_STRING | 14 | RIC/SYMBOL |
| ALPHANUMERIC | 21 | ASCII_STRING | 21 | RIC/SYMBOL |
| ALPHANUMERIC | 28 | ASCII_STRING | 28 | RIC/SYMBOL |
| ALPHANUMERIC | 1-255 | RMTES_STRING | 1-255 | length <= 3 is technically ASCII |
| ENUMERATED | 2-3 (1-8) | ENUM | 1 | Enum values 0-255 |
| ENUMERATED | 5 (3-8) | ENUM | 2 | Enum values 0-65535 |
| BINARY | 3 | UINT32 | 2 | Base64 encoded 2 byte unsigned int |
| BINARY | 4 | UINT32 | 3 | Base64 encoded 3 byte unsigned int |
| BINARY | 43 | BUFFER | 32 | Base64 encoded buffer |
| BINARY | 171 | BUFFER | 128 | Base64 encoded buffer |
| DATE | 11 | DATE | 4 | Day, month, year |
| TIME_SECONDS | 8 | TIME | 5 | Time in Hour, minute, second, millisecond |
| TIME | 5 | TIME | 5 | Time in Hour, minute, and second |
| PRICE | 17 | REAL | 9 | REAL can represent values with fractional denominators, trailing zeros, or up to 14 decimal positions. |
| INTEGER | 15 | REAL | 7 | Signed integer value, where trailing zero values can be optimized off of the wire. |
| INTEGER | 3 | UINT | 1 | unsigned int 0-255 |
| INTEGER | 5 | UINT | 2 | unsigned int 0-65535 |
| INTEGER | 10 | UINT | 5 | unsigned int 0-2 ⁴⁰ -1 |
| INTEGER | 15 | UINT | 8 | unsigned int 0-2 ⁶⁴ -1 |
| INTEGER | 15 | UINT | 4 | unsigned int 0-2 ³² -1 |

Table 39: Marketfeed to RWF Mappings in RDMFieldDictionary

There are a couple of recommendations for custom FIDs:

| FIELD TYPE | LENGTH | RWF TYPE | RWF LEN | NOTES |
|------------|--------|----------|---------|---|
| PRICE | 17 | REAL | 9 | REAL can represent values with fractional denominators, trailing zeros, or up to 14 decimal positions. |
| INTEGER | 15 | INT | 8 | Signed Integer value that has one sign bit and 63 value bits. |

Table 40: Recommended Marketfeed/RWF Field Mappings

These RWF types and values help ensure that data is not truncated when converted from Marketfeed to RWF. If converting RWF to Marketfeed, the OMM Provider application should ensure that the RWF data does not overflow the Marketfeed length.

For **ALPHANUMERIC** types, if the data does not require RMTES, then the **ASCII_STRING** type should be used instead of the **RMTES_STRING** type.

Fields that cannot be converted to Marketfeed should have the Marketfeed type **NONE** and length **0**.

5.5.3 Specific Usage: RDF Direct and FieldDefinition Dictionary

The FieldDefinition Dictionary provided by RDF Direct is named "RWFFId". It has a **DictionaryId** of **1**.

All DataMasks are supported. DictionaryVerbose will return the same data as DictionaryNormal.

The response **Payload.SummaryData** includes Version, Type, and DictionaryId.

The RWFFId dictionary only uses the following types: INT32, INT64, INT, UINT32, UINT64, UINT, REAL32, REAL64, REAL, DATE, TIME, ENUM, BUFFER, ASCII_STRING, RMTES_STRING.

5.6 Enumerated Types Dictionary

5.6.1 Enumerated Types Dictionary Payload

The payload of an Enumerated Types Dictionary Refresh Message consists of a **Series** with each series entry (**SeriesEntry**) containing an **ElementList** and representing a table in the dictionary. The **ElementList** in each entry contains information about each Enumerated Type in the table.

Each of the **ElementEntry** has a type of **Array**, where there is one element for each column in the file: **VALUE**, **DISPLAY**, and **MEANING**. The content of each **Array** corresponds to one Enumerated Type, so each array should contain the same number of entries.

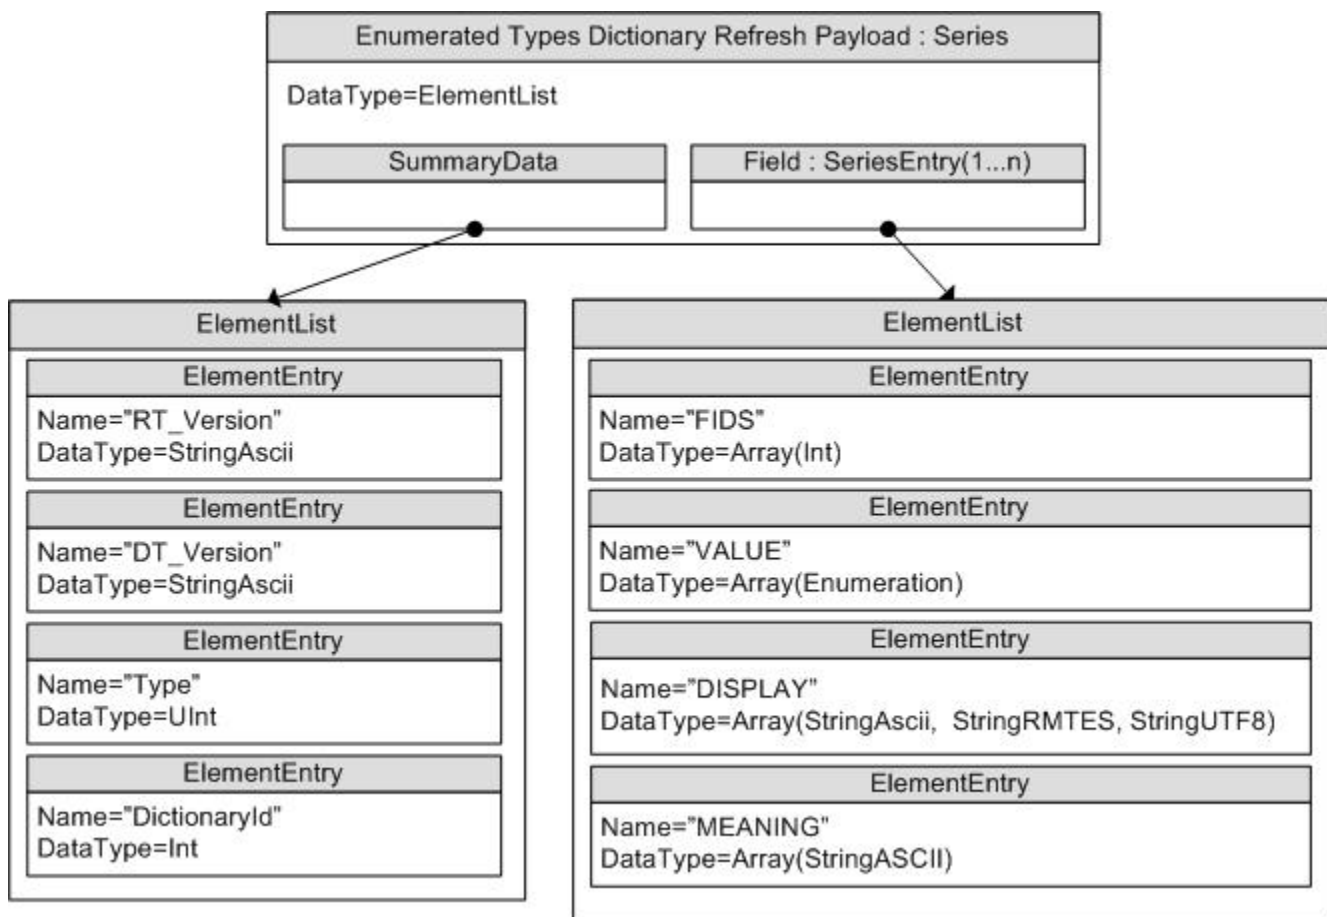


Figure 13: Enumerated Types Dictionary Refresh Message Payload

| NAME | TYPE | LEAST VERBOSITY | EXAMPLE LIST | DESCRIPTION |
|---------|--|--------------------|--|--|
| FIDS | Array of INT | NORMAL | 15, 1084, 1085 | The FieldId 's of all fields that reference this table. These fields should have type Enumeration in the Field Dictionary and use the values given in the VALUE list. The OneToMany.FixedWidth should be 2 because each FieldId is a two byte signed integer value. |
| VALUE | Array of ENUM | NORMAL | 826, 840, ... | Includes values that correspond to each Enumerated Type. FilterEntry that use the table contain these values. The OneToMany.FixedWidth should be 2 since each enum is a two byte unsigned integer value. |
| DISPLAY | Array of StringASCII, StringRMTEs, or StringUTF8 | NORMAL | "GBP", "USD", ... | Brief, displayable names for each Enumerated Type. When special characters are needed, the DISPLAY column uses a hexadecimal value identified by using hash marks instead of quotation marks (e.g., #42FE#). |
| MEANING | Array of StringASCII | VERBOSE | "UK pound sterling", "US Dollar", ... | A longer description of each Enumerated Type. Note: Providers do not need to provide this array (even when verbosity is VERBOSE). |

Table 41: ElementEntries describing each Enumerated Type table

5.6.2 Enumerated Types Dictionary File Format

The **enumtype.def** file format is a plain text set of tables. Rows are separated by lines and columns are separated by whitespace (excepting quoted strings as shown above). Lines beginning with an exclamation point (!) are comments and are ignored.

The file contains a set of tables, each with two sections:

1. The list of **FieldId** values corresponding to all fields that use the table
2. The table of enumerated values and their respective display data.

```
! ACRONYM      FID
! -----
BIG_FIGURE 6207
PIPS_POS 6208
! VALUE      DISPLAY      MEANING
! -----
      0      "INT"      whole number
      1      "1DP"      1 decimal place
      2      "2DP"      2 decimal places
      3      "3DP"      3 decimal places
      4      "4DP"      4 decimal places
      5      "5DP"      5 decimal places
      6      "6DP"      6 decimal places
      7      "7DP"      7 decimal places
!
! ACRONYM      FID
! -----
MATUR_UNIT 2378
!
! VALUE      DISPLAY      MEANING
! -----
      0      "  "      Undefined
      1      "Yr "      Years
      2      "Mth"      Months
      3      "Wk "      Weeks
      4      "Day"      Days
```

Figure 14: Enumerated Types Dictionary File Format Sample

Several tagged attributes are available at the beginning of the file. These attributes provide versioning information about the dictionary contained in the file and are processed while loading from a file-based dictionary. Some of this information is conveyed along with the domain model representation of the dictionary. Tags may be added as future dictionary versions become available.

For the **enumtype.def**, an example of these tags are shown below.

```
!tag Filename      ENUMTYPE.001
!tag Desc          IDN Marketstream enumerated tables
!tag Type          2
!tag RT_Version    4.20.17
!tag DT_Version    15.41
!tag Date          5-May-2015
```

Figure 15: Enumerated Types Dictionary Tagged Attribute Sample

The following table describes the tag attributes and indicates which are used when encoding the domain representation of the file.

| TAG ATTRIBUTE | DESCRIPTION |
|---------------|--|
| Filename | The original name of the file as created by Thomson Reuters. This typically does not match the current name of the file, enumtype.def . Filename not used when encoding the domain representation of the field dictionary. |
| Desc | A Description of the dictionary. Desc is not used when encoding the domain representation of the field dictionary. |
| Type | The dictionary type associated with this dictionary. For a field dictionary, this should be DICTIONARY_ENUM_TABLES=2 . Other types are defined in Table 34: Dictionary SummaryData. Type is used when encoding the domain representation of the field dictionary. |
| RT_Version | The version of the field dictionary associated with this enumerated type dictionary. RT_Version is used when encoding the domain representation of the field dictionary. |
| DT_Version | The version of the display template version. DT_Version is used when encoding the domain representation of the field dictionary. For device compatability purposes, this value is sent as both Version and DT_Version . |
| Date | Includes information regarding the dictionary release date. Date is not used when encoding the domain representation of the field dictionary. |

Table 42: Enumerated Type Dictionary File Tag Information

5.6.2.1 Reference Fields Section

The first section lists all the fields that use the table. These fields should have the type **Enumeration** in their corresponding Field Dictionary and have matching names.

| NAME | RWF ELEMENT NAME |
|---------|--|
| ACRONYM | n/a (The name of the field is not sent with the dictionary payload). |
| FID | FIDS |

Table 43: RWF EnumType Dictionary File Format Reference Fields

5.6.2.2 Values Table Section

The second section lists the value of each enumerated type and its corresponding display data.

| NAME | RWF ELEMENT NAME | NOTES |
|---------|------------------|---|
| VALUE | VALUE | The unsigned integer value corresponding to the enumerated value. |
| DISPLAY | DISPLAY | Quoted alphanumeric for the expanded string value. In cases where special characters are needed, the DISPLAY column uses a hexadecimal value, which is identified by using hash marks instead of quotation marks, e.g. #42FE# . |
| MEANING | MEANING | The meaning column is not required over the network and typically not provided. |

Table 44: RWF EnumType Dictionary File Values

5.6.3 Specific Usage: RDF Direct and EnumTable Dictionary

The RDF Direct EnumTable Dictionary uses the name “RWFFEnum”. It has a **DictionaryId** of **1** to match the RWFFId Dictionary.

RDF Direct uses the standard file representation described in section 5.5.2. The file does not include a **DictionaryId** or a Version number, so most existing enumtype.def parsers can parse the RWF FieldDictionary file without changes.

5.7 Other Dictionary Types

The Dictionary message model type is intended to be used for other versionable data that updates very rarely. This section briefly describes other reserved dictionary types.

None of these dictionary types is currently used.

5.7.1 DisplayTemplate DictionaryType

A DisplayTemplate Dictionary contains specifications that describe how and where to display Fields on a screen.

5.7.2 DataDefinition DictionaryType

A DataDefinition Dictionary contains specifications for ElementListDefs and FieldListDefs that can be used for decoding FieldLists and ElementLists that have been optimized with SetDefinitions.

5.7.3 StyleSheet DictionaryType

A StyleSheet Dictionary contains an XSLT or CSS style sheet.

5.7.4 Reference Dictionary Type

A table of reference information provided as a Series. This information is not used for parsing, interpreting, caching, or displaying data.

5.8 Special Semantics

5.8.1 DictionariesProvided and DictionariesUsed

The Directory's DirectoryInfo FilterEntry (Table 22) includes two Elements that are related to Dictionaries: "DictionariesProvided" and "DictionariesUsed". Both elements contain an **OmniArray** of Ascii dictionary names. These names can be used in **Name** to request the dictionaries.

► **To dynamically discover dictionaries while minimizing the amount of data downloaded:**

1. Parse the "DictionariesUsed" from each desired service in the Directory.
3. Parse the "DictionariesProvided" from every service in the Directory.
4. Make a streaming request for each Dictionary Name listed in "DictionariesUsed" from the service that lists the DictionaryName in "DictionariesProvided". The DataMask of each request (Section 2.3) message should be set to **DICTIONARY_INFO**. By only requesting the **DICTIONARY_INFO**, the application does not incur the extra bandwidth overhead of dictionaries which it does not need.
5. Parse the **Payload. SummaryData** for each Dictionary response message received.
6. If the response **Payload. DataType** is **Series** (of **ElementList**) and DictionaryType **Element** in the **Payload. SummaryData** is not one that the application needs, then unregister the request.
7. If the DictionaryType is needed, then the application should reissue the request with a different DataMask that includes the data (e.g. **DICTIONARY_NORMAL**).
8. If the application previously downloaded and saved the Dictionary, the Version Element can be used to see if the application has the latest version.
 - If the application does not have the latest version, the application should reissue the request for the Dictionary with a different DataMask.
 - If the application has the latest version, it can leave the first request open so it can monitor when the dictionary is changed.

5.8.2 Version Check

Dictionary version checking can be performed by the client after a refresh (Section 2.3) response message of a Dictionary is received. The version information is available in the **SummaryData** of the payload. An application that has a previously cached dictionary can request only the **DICTIONARY_INFO**. That way, the application does not incur the extra bandwidth overhead from downloading a dictionary which it already has.

Version will be an ASCII or Buffer. It is a major number, minor number, separated by a period (e.g. "1.2"). A third, micro number is optional (e.g. "1.2.1"). The major number changes when an incompatible change is made, such as changing a field's type or length. The minor number changes when a compatible change occurs, such as adding a field, changing a field's name, or removing a field (but ensuring it is not reused). The micro number would change for comment changes.

If two services provide the same Dictionary with different minor versions, the latest version should be used.

5.8.3 Streaming Dictionary

Dictionary request can be streaming. Dictionary providers are not allowed to send refresh and update data to consumers. Instead the provider can advertise a minor Dictionary change by sending a status (Section 2.3) response message with a **DataState** of **Suspect**. It is the consumer's responsibility to reissue the dictionary request.

If the consumer does not reissue the request for the new dictionary it will still be able to process other data streams. However, the application will still be responsible for realizing when unknown fields are encountered. The application must skip those fields.

If the dictionary has a major version change, the provider must either disconnect its clients' network connections or it must send an **OmniState.ClosedRecover** status message for each item or group that uses the data.

5.9 Specific Usage: Enterprise Platform

The Enterprise Platform currently only supports a single DictionaryId's family. If the provider doesn't specify it then it is interpreted to be 1.

Chapter 6 MarketPrice Domain

6.1 Description

The MarketPrice domain provides access to Level I market information such as trades, indicative quotes, and top-of-book quotes. All information is sent as a **FieldList**. Field-value pairs contained in the field list include the information related to that item (i.e., net change, bid, ask, volume, high, low, or last price).

6.2 Usage

Note: Generic Message(s) are not supported in the **MMT_MARKET_PRICE** Reuters Domain Model.

6.2.1 MarketPrice Request Message

A MarketPrice request message is encoded using **ReqMsg** and sent by OMM consumer applications. The request specifies the name and attributes of an item in which the consumer is interested.

If a consumer wishes to receive updates, it can make a “streaming” request by setting **ReqMsg. InterestAfterRefresh** to **true**. If the method is not set, the consumer is requesting a “snapshot” and the refresh should end the request (updates may be received in either case if the refresh has multiple parts).

A consumer can pause an item to stop updates (if the provider supports such functionality). For more information, refer to the *EMA 3.0.2 Java Edition Developers Guide*.

| COMPONENT | DESCRIPTION / VALUE |
|---------------------|---|
| DomainType | Required. MMT_MARKET_PRICE = 6 |
| Interactions | Required. <ul style="list-style-type: none"> InitialImage true: indicates initial image is required InterestAfterRefresh true: indicates streaming request is required Pause true: indicates pause is required |
| Indications | Optional. <ul style="list-style-type: none"> ConflatedInUpdates true : indicates conflated updates is required Batch and View request are specified in the Payload |
| QOS | Optional. Indicates the quality of service at which the consumer want the stream serviced. |
| Priority | Optional. Indicates class and count associated with stream priority. |
| NameType | Optional. When consuming from Thomson Reuters sources, typically set to INSTRUMENT_NAME_RIC = 1 (the “Reuters Instrument Code”). If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |

| COMPONENT | DESCRIPTION / VALUE |
|-------------|---|
| Name | <p>Required. The name of requested item.</p> <hr/> <p>Note: Not used for Batch Item request.</p> <hr/> |
| ServiceName | <p>Required. This should be the Name associated with the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The consumer application should set either the ServiceName or ServiceId of the service, but not both.</p> <hr/> |
| ServiceId | <p>Required. This should be the ID associated with the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The consumer application should set either the ServiceId or ServiceName of the service, but not both.</p> <hr/> |
| Payload | <p>Optional. When features such as View or Batch are leveraged, the payload can contain information relevant to that feature. See Chapter 12 for more detailed information about View.</p> |

Table 45: MarketPrice Request Message

6.2.2 MarketPrice Refresh Message

A MarketPrice Refresh Message is encoded using **RefreshMsg** and sent by OMM Provider and OMM non-interactive provider applications. This message sends all currently available information about the item to the consumer.

FieldList in the payload should include all the fields that may be present in subsequent updates, even if those fields are currently blank. When responding to a View request, this refresh should contain all the fields that were requested by the specified view. If for any reason the provider wishes to send new fields, it must first send an unsolicited refresh with both the new and currently present fields.

Note: All solicited or unsolicited refresh messages in the MarketPrice domain must be atomic. The MarketPrice domain does not allow for multi-part refresh use. The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for **every** Refresh response messages.

| COMPONENT | DESCRIPTION / VALUE |
|--------------------------------|--|
| MessageModel Type | Required. MMT_MARKET_PRICE = 6 |
| State | Required. Includes the state of the stream and data. |
| Sol i c i t e d | Required. <ul style="list-style-type: none"> true: indicate refresh solicited false: indicate refresh unsolicited |
| Indi c a t i o n s | Required. <ul style="list-style-type: none"> Compl e t e true: indicate refresh complete Optional: <ul style="list-style-type: none"> DoNot Cache true: indicate do not cache this refresh message Cl e a r C a c h e true: indicate clear cache |
| QOS | Optional. If sent, specifies the quality of service which the stream is provided. |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages with this stream. |
| ItemGroup | Optional. Associate the item with an Item Group (refer to Section 4.3.1.3). |
| Permi s s i o n D a t a | Optional. Specifies the permission information associated with content of this stream. |
| NameType | Optional. This should match name type specified in the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Required. This should match the requested name. |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|---|
| ServiceName | <p>Required. Specifies the name of the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The provider application should set either the ServiceName or ServiceId of the service, but not both.</p> <hr/> |
| ServiceId | <p>Required. Specifies the ID of the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The provider application should set either the ServiceId or ServiceName of the service, but not both.</p> <hr/> |
| Payload | <p>Required. This should consist of a FieldList containing all fields associated with the item.</p> |

Table 46: MarketPrice Refresh Message

6.2.3 MarketPrice Update Message

A MarketPrice Update Message is encoded using **UpdateMsg** and sent by OMM Provider and OMM non-interactive provider applications. It conveys any changes to an item's data.

Note: The provider should only send the **Name** and **NameType** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **NameType** must be provided for **every** Update response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|---|
| DomainType | Required. MMT_MARKET_PRICE = 6 |
| UpdateTypeNum | Required. Indicates the general content of the update: <ul style="list-style-type: none"> • INSTRUMENT_UPDATE_UNSPECIFIED=0 • INSTRUMENT_UPDATE_QUOTE=1 • INSTRUMENT_UPDATE_TRADE=2 • INSTRUMENT_UPDATE_NEWS_ALERT=3 • INSTRUMENT_UPDATE_VOLUME_ALERT=4 • INSTRUMENT_UPDATE_ORDER_INDICATION=5 • INSTRUMENT_UPDATE_CLOSING_RUN=6 • INSTRUMENT_UPDATE_CORRECTION=7 • INSTRUMENT_UPDATE_MARKET_DIGEST=8 • INSTRUMENT_UPDATE_QUOTES_TRADE=9 • INSTRUMENT_UPDATE_MULTIPLE=10 • INSTRUMENT_UPDATE_VERIFY=11 |
| Indications | Required. DoNotRipple is set to true . If UpdateTypeNum is set to be INSTRUMENT_UPDATE_CORRECTION=7 or INSTRUMENT_UPDATE_VERIFY=11 Optional: <ul style="list-style-type: none"> • DoNotCache true: Indicates the application should not cache this update message. • ClearCache true: Indicates the application should clear the cache. • DoNotConflate true: Indicates the application should not conflate updates. |
| QOS | Optional. |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages with this stream. |
| ConflatedCount | Optional. If a provider is sending a conflated update, this informs the consumer of how many updates are in the conflation. The consumer indicates interest in this information by setting the ReqMsg. ConflatedInUpdates to true in the request. |

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|---|
| ConflatedTime | Optional. If a provider is sending a conflated update, this notifies the consumer of the times interval(in milliseconds) over which data is conflated. The consumer indicates interest in this information by setting ReqMsg. ConflatedInUpdates to true in the request. |
| ItemGroup | Optional |
| PermissionData | Optional. Permissioning information associated with only the contents of this update. |
| NameType | Optional (Required if MsgKeyInUpdates is set to true). This should match the name type specified on the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Optional (Required if MsgKeyInUpdates is set to true). This should match the name of the item being provided. |
| ServiceName | Optional (Required if MsgKeyInUpdates is set to true). This should be the name of the service that provides the data. Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |
| ServiceId | Optional (Required if MsgKeyInUpdates is set to true). This should be the ID of the service that provides the data. Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |
| Payload | Required. This should consist of a FieldList with any changed data. |

Table 47: MarketPrice Update Message

6.2.4 MarketPrice Status Message

A MarketPrice status message is encoded using **StatusMsg** and sent by OMM interactive provider and non-interactive provider applications. This message conveys state change information associated with an item stream.

Note: The provider should only send the **Name**, **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then **Name** and **ServiceName** must be provided for **every** Status response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|--|
| DomainType | Required. MMT_MARKET_PRICE = 6 |
| State | Optional. Current state information associated with the data and stream. |
| Indications | Optional: <ul style="list-style-type: none"> ClearCache true: indicates clear cache |
| QOS | Optional. |
| SeqNum | Optional. |
| ConflatedCount | Optional. |
| ConflatedTime | Optional. |
| ItemGroup | Optional. The provider can use this component to change the item's ItemGroup |
| PermissionData | Optional. If present, this is the new permission information associated with all the contents on the stream. |
| NameType | Optional (Required if MsgKeyInUpdates is set to true). This should match the name type specified on the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Optional (Required if MsgKeyInUpdates is set to true). Specifies the name of the item being provided. |
| ServiceName | Optional (Required if MsgKeyInUpdates is set to true). Specifies the name of the service providing the data. <hr/> Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |
| ServiceId | Optional (Required if MsgKeyInUpdates is set to true). Specifies the ID of the service providing the data. <hr/> Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |

Table 48: MarketPrice Status Message

6.2.5 MarketPrice Post Message

If support is specified by the provider, consumer applications can post the MarketPrice data. For more details on posting, see the *EMA 3.0.2 Java Edition Developers Guide*.

6.3 Data: Response Message Payload

Market Price data is conveyed as a **FieldList**, where each **FieldEntry** corresponds to a piece of information and its current value. The field list should be decoded by checking **FieldEntry.LoadType** and retrieving a specific type. For more information, refer to *EMA 3.0.2 Java Edition Developers Guide*.

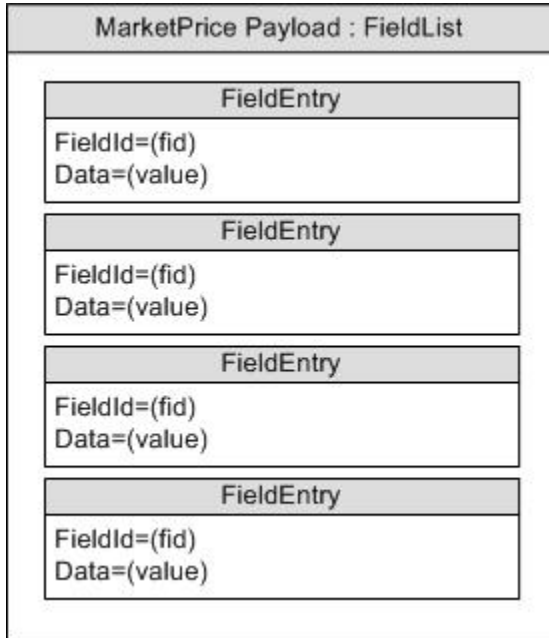


Figure 16: MarketPrice Response Message Payload

6.4 Special Semantics

6.4.1 Snapshots

MarketPrice is one of a few message model types that support a true snapshot. If a nonstreaming request is made, then the **UpdateMsg** will not be sent. Status messages could be received before the single Refresh response (Section 2.3) message is received. For streaming and snapshot streams, the Refresh response message will always be a single message and it will have **RefreshMsg.Complete** is set to **true**.

6.4.2 Ripple Fields

Some Fields in the FieldList are defined as ripple Field. When the value of a ripple Field changes, the former value automatically becomes the new value of another field. The change to the second Field may, in turn, cause another Field to be changed to reflect the second Field's former value. Whether or not fields are rippled is determined by the value of **DoNotRipple**.

When a refresh message is received, all of the ripple fields delivered by the Venue/Exchange are present in the refresh message. However, the consuming application must set ripple behavior for fields not in the refresh message. In some cases, the values delivered for the “ripple-to” Fields in the refresh may be empty, but they must be present.

It is a responsibility of the Consumer application to ripple the Fields. The EMA does NOT ripple fields on behalf of the Consumer application. The OMM **FieldList** concept supports rippling. However, the **FieldList** class does not cache, so it cannot ripple fields.

6.5 Specific Usage: RDF Direct MarketPrice

RDF Direct uses MarketPrice for SIAC Level 1, NASDAQ Level 1, and OPRA Level 1 data. The Refresh is provided in a single message. It contains all of the fields, even if they are blank.

6.6 Specific Usage: Legacy Records

MarketPrice can also be used for data that is structured like IDN records. This includes:

- Page Records for reference page records and TS1 historical data
- Chains for indices and ranked lists
- Segment Chains for time & sales and news stories.

Chapter 7 MarketByOrder Domain

7.1 Description

The MarketByOrder domain provides access to Level II full order books. The list of orders is sent in the form of a **Map**. Each **MapEntry** represents one order (using the order's Id as its key) and contains a **FieldList** describing information related to that order (such as price, whether it is a bid/ask order, size, quote time, and market maker identifier).

7.2 Usage

Note: Generic Message(s) are not supported for **MMT_MARKET_BY_ORDER** Reuters Domain Model.

7.2.1 MarketByOrder Request Message

A MarketByOrder request message is encoded using **ReqMsg** and sent by OMM consumer applications. The request specifies the name of the item in which a consumer is interested.

If a consumer wishes to receive updates, it may make a “streaming” request by setting the **InterestAfterRefresh** to **true**. If the method is not set, the consumer is requesting a “snapshot” and the refresh should end the request (updates may be received in either case if the refresh has multiple parts).

A consumer can send pause an item to stop updates (if the provider supports such functionality). For more information, refer to the *EMA 3.0.2 Java Edition Developers Guide*.

| COMPONENT | DESCRIPTION / VALUE |
|---------------------|--|
| DomainType | Required. MMT_MARKET_BY_ORDER = 7 |
| Interactions | Required. <ul style="list-style-type: none"> InitialImage true: indicates initial image is required. InterestAfterRefresh true: indicates streaming request is required. Pause true: indicates pause is required. |
| Indications | Optional. <ul style="list-style-type: none"> ConflatedInUpdates true : indicates conflated in updates |
| QOS | Optional. Indicates the quality of service at which the consumer want the stream serviced at. |
| Priority | Optional. Indicates class and count associated with stream priority |
| NameType | Optional. When consuming from Thomson Reuters sources, typically set to INSTRUMENT_NAME_RIC = 1 (the “Reuters Instrument Code”). If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|--|
| Name | <p>Required. The name of requested item.</p> <hr/> <p>Note: Not used for Batch Item request.</p> <hr/> |
| ServiceName | <p>Required.</p> <hr/> <p>Note: The consumer application should set either the ServiceName or ServiceId of the service, but not both.</p> <hr/> |
| ServiceId | <p>Required.</p> <hr/> <p>Note: The consumer application should set either the ServiceId or ServiceName of the service, but not both.</p> <hr/> |
| Payload | <p>Optional. When features such as View or Batch are leveraged, the payload can contain information relevant to that feature. See Chapter 12 for more detailed information about View.</p> |

Table 49: MarketByOrder Request Message

7.2.2 MarketByOrder Refresh Message

A MarketByOrder refresh message is encoded using **RefreshMsg** and sent by OMM interactive provider and OMM non-interactive provider applications. A MarketByOrder refresh may be sent in multiple parts. It is possible for update and status messages to be delivered between parts of a refresh message, regardless of whether the request is streaming or non-streaming.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for **every** Refresh response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|--|
| DomainType | Required. MMT_MARKET_BY_ORDER = 7 |
| State | Required. Includes the state of the stream and data. |
| Solicited | Required. <ul style="list-style-type: none"> true: indicates refresh solicited false: indicates refresh unsolicited |
| Indications | Optional: <ul style="list-style-type: none"> DoNotCache true: indicate do not cache this refresh message ClearCache true: indicate clear cache Complete true: indicate refresh complete |
| QOS | Optional. If sent, specifies the quality of service which the stream is provided. |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages with this stream. |
| PartNum | Optional. A user-specified, item-level number that indicates the part number of a multi-part refresh. |
| ItemGroup | Optional. Associate the item with an Item Group (refer to Section 4.3.1.3). |
| PermissionData | Optional. Specifies the permission information associated with content of this stream. |
| NameType | Optional. This should match name type specified in the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Required. This should match the requested name. |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|---|
| ServiceName | <p>Required. Specifies the name of the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The provider application should set either the ServiceName or ServiceId of the service, but not both.</p> <hr/> |
| ServiceId | <p>Required. Specifies the ID of the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The provider application should set either the ServiceId or ServiceName of the service, but not both.</p> <hr/> |
| Payload | <p>Required. An orderbook is represented by a Map, where each entry (MapEntry) contains information (FieldList) that corresponds to an order.</p> |

Table 50: MarketByOrder Refresh Message

7.2.3 MarketByOrder Update Message

A MarketByOrder update message is encoded using **UpdateMsg** and sent by OMM interactive provider and OMM non-interactive provider applications. The provider can send an update message to add, update, or remove order information. Updates may be received between the first Refresh and the RefreshComplete. It is the consuming application's responsibility to determine if the update is applicable to the data that has previously been sent in a refresh.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for **every** Update response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|--|
| DomainType | Required. MMT_MARKET_BY_ORDER = 7 |
| UpdateTypeNum | Required. Indicates the general content of the updates. Typically sent as one of the following: <ul style="list-style-type: none"> INSTRUMENT_UPDATE_UNSPECIFIED=0 INSTRUMENT_UPDATE_QUOTE=1 |
| Indications | Optional: <ul style="list-style-type: none"> DoNotCache true: Indicates the application should not cache this update message. ClearCache true: Indicates the application should clear its cache. DoNotConflate true: Indicates the application should not conflate this update message. |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages with this stream. |
| ConflatedCount | Optional. If a provider is sending a conflated update, this informs the consumer of how many updates are in the conflation. The consumer indicates interest in this information by setting the ReqMsg. ConflatedInUpdates to true in the request. |
| ConflatedTime | Optional. If a provider is sending a conflated update, this notifies the consumer of the times interval (in milliseconds) over which data is conflated. The consumer indicates interest in this information by setting the ReqMsg. ConflatedInUpdates to true in the request. |
| PermissionData | Optional. Permissioning information associated with only the contents of this update. |
| NameType | Optional (Required if MsgKeyInUpdates is set to true). This should match the name type specified on the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Optional (Required if MsgKeyInUpdates is set to true). This should match the name of the item being provided. |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|--|
| ServiceName | <p>Optional (Required if MsgKeyInUpdates is set to true). This should be the name of the service that provides the data.</p> <hr/> <p>Note: The application should set either the ServiceName or ServiceId of the service, but not both.</p> |
| ServiceId | <p>Optional (Required if MsgKeyInUpdates is set to true). This should be the ID of the service that provides the data.</p> <hr/> <p>Note: The application should set either the ServiceName or ServiceId of the service, but not both.</p> |
| Payload | <p>Required.</p> <p>An orderbook is represented by a Map, where each entry (MapEntry) contains information (FieldList) that corresponds to an order.</p> |

Table 51: MarketByOrder Update Message

7.2.4 MarketByOrder Status Message

A **MarketByOrder status** message is encoded using **StatusMsg** and sent by OMM interactive provider and non-interactive provider applications. This message conveys state change information associated with an item stream.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for **every** Status response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|--|
| DomainType | Required. MMT_MARKET_BY_ORDER = 7 |
| State | Optional. Current state information associated with the data and stream. |
| Indications | Optional: <ul style="list-style-type: none"> ClearCache true: indicate clear cache |
| SeqNum | Optional. |
| ItemGroup | Optional. The provider can use this component to change the item's Group (See Section 4.3.1.3). |
| PermissionData | Optional. If present, this is the new permission information associated with all the contents on the stream. |
| NameType | Optional (Required if MsgKeyInUpdates is set to true). This should match the name type specified on the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Optional (Required if MsgKeyInUpdates is set to true). Specifies the name of the item being provided. |
| ServiceName | Optional (Required if MsgKeyInUpdates is set to true). Specifies the name of the service providing data. Note: The application should set either the ServiceName or ServiceId of the service, but not both. |
| ServiceId | Optional (Required if MsgKeyInUpdates is set to true). Specifies the ID of the service providing data. Note: The application should set either the ServiceName or ServiceId of the service, but not both. |

Table 52: MarketByOrder Status Message

7.2.5 MarketByOrder Post Message

If support is specified by the provider, consumer applications can post MarketByOrder data. For more details on posting, see the *EMA 3.0.2 Java Edition Developers Guide*.

7.3 Data: Response Message Payload

The payload is a **Map**. Refreshes for this **Map** may be in multiple response messages. The bandwidth of the refresh messages can be optimized by putting multiple **MapEntry** in each response messages. For optimal performance the packed map entries in each response message should use less than 6000 bytes. If the data is split into multiple response messages, then a **Map. Total CountHint** should be provided to optimize downstream caching. Since the fields in each **MapEntry** are the same, bandwidth can be further optimized by DataDefinitions.

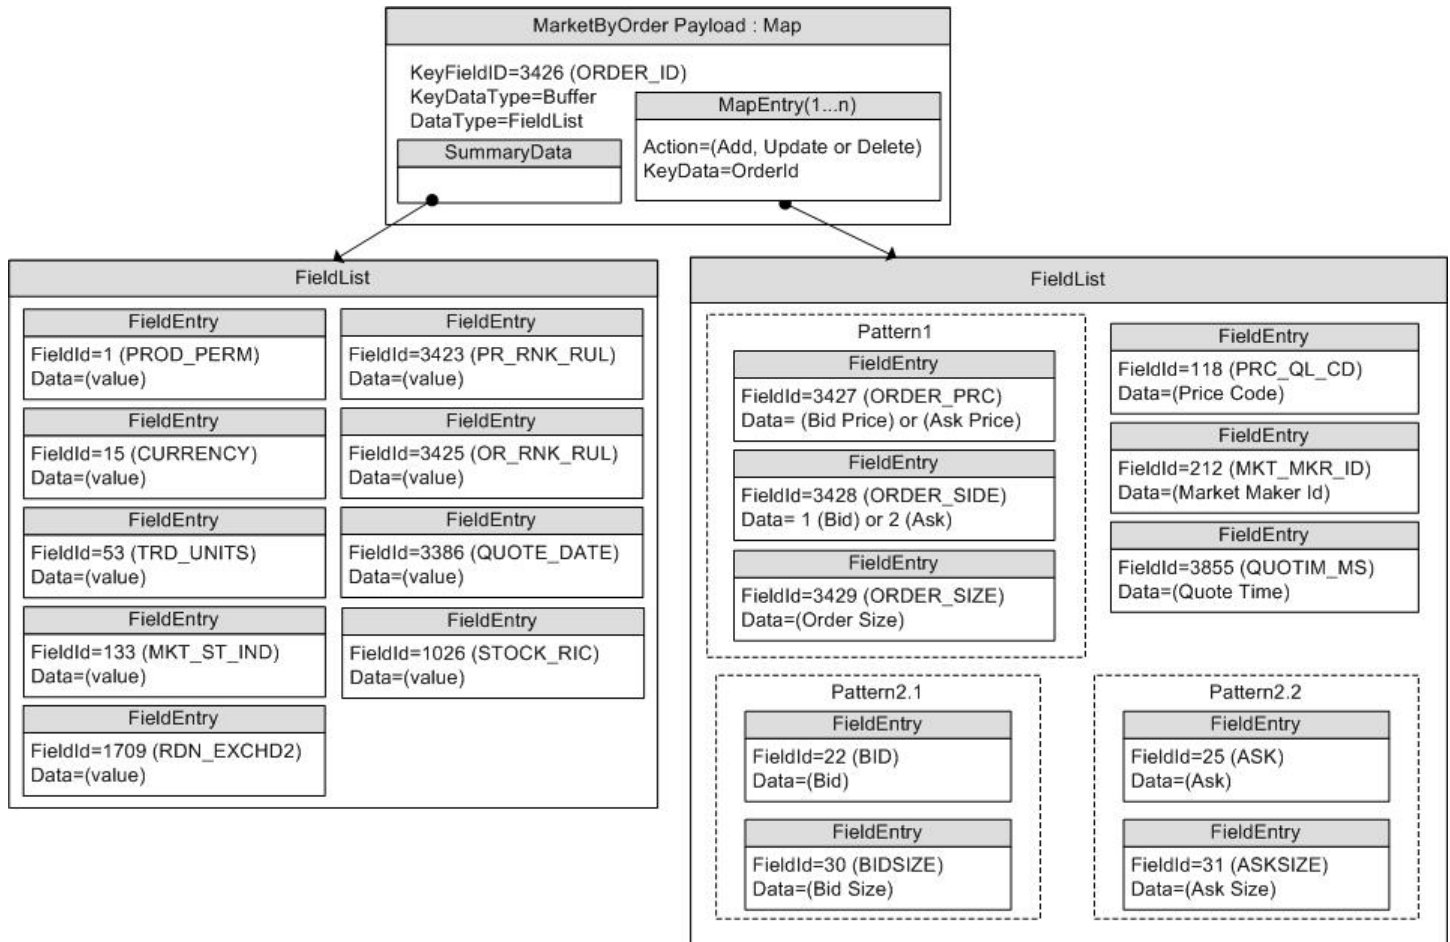


Figure 17: MarketByOrder Response Message Payload

Note:

There are two possible usage scenarios:

- **Pattern 1:** ORDER_PRC, ORDER_SIDE and ORDER_SIZE.
- **Pattern 2.1:** BID and BIDSIZE, or Pattern 2.2: ASK and ASKSIZ.

The **Map.SummaryData** only needs to be in the first refresh msg which typically includes:

- Permission information (PROD_PERM)
- Currency of the orders (CURRENCY)
- Trade Units for the precision for which order prices are set (TRD_UNITS)
- Market State (MKT_ST_IND)
- Exchange Identifier on which the orders were placed (RDN_EXCHD2)
- Price Ranking Rules (PR_RNK_RUL)
- Order Ranking Rules (OR_RNK_RUL)
- Quote Date (QUOTE_DATE)
- RIC of the underlying equity (STOCK_RIC)

The **MapEntry.Key** is a Buffer, Ascii, or Rmtes that contains the Order ID. The **MapEntry.KeyFieldId** may be set to ORDER_ID, so the information does not have to be repeated in the **MapEntry.Value**.

The **MapEntry.Value** is a FieldList that typically contains the following information about the order:

- Order Price & Side (BID, ASK, or ORDER_PRC & ORDER_SIDE)
- Order Size (BIDSIZE, ASKSIZE, or ORDER_SIZE)
- Price Qualifiers (PRC_QL_CD, PRC_QL2)
- Market Maker Identifier (MKT_MKR_ID or MMID)
- Quote Time (QUOTIM_MS)

7.4 Special Semantics

None

7.5 Specific Usage: RDF Direct and Response Message Payload

RDF Direct uses MarketByOrder for several markets, including NASDAQ TotalView, Archipelago ECN order book, and Instinet ECN order book.

The payload is a **Map**. Each Refresh for this **Map** includes **SummaryData** and a single **MapEntry**. Updates are not sent for any map entry until after the message is sent with **RefreshMsg. Complete** set to **true**. Since each response message includes only one map entry, **DataDefinitions** are not used to reduce bandwidth. The **Map. TotalCountHint** is not provided.

The **Map. SummaryData** is sent in every Refresh, even if it does not change. The fields used are from the **RWFFld** Field Dictionary:

- **PROD_PERM** (1): Integer for permission information
- **CURRENCY** (15): Enumeration of currency for the orders
- **TRD_UNITS** (53): Enumeration of trade Units for the precision for which order prices are set
- **MKT_ST_IND** (133): Enumeration of market state
- **RDN_EXCHD2** (1709): Enumeration of exchange on which the orders were placed
- **PR_RNK_RUL** (3423): Enumeration of price ranking rules
- **OR_RNK_RUL** (3425): Enumeration of order ranking rules
- **STOCK_RIC** (1026): RIC of the underlying equity

The **MapEntry. Key** is a Buffer that contains the Order ID. The **Map. KeyFieldId** is not set, but this may be changed in the future.

The **MapEntry. Data** is a field list that contains some or all of the following information about the order:

- **ORDER_PRC** (3427) & **ORDER_SIDE** (3428): Real and Enumeration for the order price & side (buy or sell/bid or ask)
- **ORDER_SIZE** (3429): Real for the order size
- **ORDER_ID** (3426): Same value as the **MapEntry.KeyData**. This may be removed in the future by setting the **Map. KeyFieldId** to **ORDER_ID** (3426).
- **QUOTIM_MS** (3855): Quote Time in millisecond since GMT of the current day in the GMT time zone

The **FieldList.DictId** is **0**, so it should be ignored.

7.6 Specific Usage: Enterprise Platform

For the most part, MarketByOrder data from the Enterprise Platform is the same as it is from the original source of the data (e.g. RDF Direct). However, if caching is enabled in an Enterprise Platform component, there are two differences.

- The number of messages packed into each Refresh response message may be different.
- An updated response message might be delivered between Refresh response messages and before the message with **RefreshMsg. Complete** set **true**. It is the consumer applications responsibility to apply the indicated changes.

Chapter 8 MarketByPrice Domain

8.1 Description

MarketByPrice provides access to Level II market depth information. The list of price points is sent in a **MapEntry**. Each entry represents one price point (using that price and bid/ask side as its key) and contains a **FieldList** that describes the information related to that price point.

8.2 Usage

Note: Generic Message(s) are not supported for the **MMT_MARKET_BY_PRICE** Reuters Domain Model.

8.2.1 MarketByPrice Request Message

A MarketByPrice request message is encoded using **ReqMsg** and sent by OMM consumer applications. The request specifies the name of an item in which the consumer is interested.

If a consumer wishes to receive updates, it can make a “streaming” request by setting **ReqMsg. InterestAfterRefresh** to **true**. If the flag is not set, the consumer requests a “snapshot” and the refresh should end the request (updates may be received in either case if the refresh has multiple parts).

A consumer can send pause an item to stop updates (if the provider supports such functionality). For more information, refer to the *EMA 3.0.2 Java Edition Developers Guide*.

| COMPONENT | DESCRIPTION / VALUE |
|---------------------|---|
| DomainType | Required. MMT_MARKET_BY_PRICE = 8 |
| Interactions | Required. <ul style="list-style-type: none"> InitialImage true: indicates initial image is required InterestAfterRefresh true: indicates streaming request is required Pause true: indicates pause is required |
| Indications | Optional. <ul style="list-style-type: none"> ConflatedInUpdates true: indicates conflated updates is required Batch and View request are specified in the Payload |
| QOS | Optional. Indicates the quality of service at which the consumer want the stream serviced. |
| Priority | Optional. Indicates class and count associated with stream priority. |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|---|
| NameType | Optional. When consuming from Thomson Reuters sources, typically set to INSTRUMENT_NAME_RIC = 1 (the “Reuters Instrument Code”). If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Required. The name of requested item. Note: Not used for Batch Item request. |
| ServiceName | Required. Note: The application should set either the ServiceName or ServiceId of the service, but not both. |
| ServiceId | Required. Note: The application should set either the ServiceId or ServiceName of the service, but not both. |
| Payload | Optional. When features such as View or Batch are leveraged, the payload can contain information relevant to that feature. See Chapter 12 for more detailed information about View. |

Table 53: MarketByPrice Request Message

8.2.2 MarketByPrice Refresh Message

A MarketByPrice refresh message is encoded using **RefreshMsg** and sent by OMM interactive provider and OMM non-interactive provider applications.

A MarketByPrice refresh may be sent in multiple parts. It is possible for update and status messages to be delivered between parts of a refresh message, regardless of streaming or non-streaming request.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if EMA is configured **MsgKeyInUpdates** with **true** value, then the **Name** and **ServiceName** must be provided for **every** Refresh response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|---|
| DomainType | Required. MMT_MARKET_BY_PRICE = 8 |
| State | Required. Includes the state of the stream and data. |
| Solicited | Required. <ul style="list-style-type: none"> true: Indicates the refresh message is solicited. false: Indicates the refresh message is unsolicited. |
| Indications | Optional: <ul style="list-style-type: none"> DoNotCache true: Indicates the application should not cache this refresh message. ClearCache true: Indicates the application should clear its cache. Complete true: Indicates this is the last message in the refresh complete. |
| QoS | Optional. If sent, specifies the quality of service which the stream is provided. |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages with this stream. |
| PartNum | Optional. A user-specified, item-level number that indicates the part number in a multi-part refresh. |
| ItemGroup | Optional. Associate the item with an Item Group (refer to Section 4.3.1.3). |
| PermissionData | Optional. Specifies the permission information associated with content of this stream. |
| NameType | Optional. This should match name type specified in the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Required. This should match the requested name. |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|---|
| ServiceName | <p>Required. This should be the Name associated with the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The consumer application should set either the ServiceName or ServiceId of the service, but not both.</p> <hr/> |
| ServiceId | <p>Required. This should be the ID associated with the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The consumer application should set either the ServiceId or ServiceName of the service, but not both.</p> <hr/> |
| Payload | <p>Required. An orderbook is represented by a Map, where each entry (MapEntry) contains FieldList which has information about a price point.</p> |

Table 54: MarketByPrice Refresh Message

8.2.3 MarketByPrice Update Message

A MarketByPrice update message is encoded using **UpdateMsg** and sent by OMM interactive provider and OMM non-interactive provider applications. The provider can send an update message to add, update, or remove price point information. Updates will not be received before images. True snapshots are supported.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for every Update response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|--|
| DomainType | Required. MMT_MARKET_BY_PRICE = 8 |
| UpdateTypeNum | Required. Indicates the general content of the updates. Typically sent as one of the following: <ul style="list-style-type: none"> INSTRUMENT_UPDATE_UNSPECIFIED=0 INSTRUMENT_UPDATE_QUOTE=1 |
| Indications | Optional: <ul style="list-style-type: none"> DoNotCache true: indicates do not cache this update message DoNotConflate true: indicates do not conflate this update message |
| QOS | Optional. |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages with this stream. |
| ConflatedCount | Optional. If a provider is sending a conflated update, this informs the consumer of how many updates are in the conflation. The consumer indicates interest in this information by setting the ReqMsg. ConflatedInUpdates to true in the request. |
| ConflatedTime | Optional. If a provider is sending a conflated update, this notifies the consumer of the times interval (in milliseconds) over which data is conflated. The consumer indicates interest in this information by setting the ReqMsg. ConflatedInUpdates to true in the request. |
| PermissionData | Optional. Permissioning information associated with only the contents of this update. |
| NameType | Optional (Required if MsgKeyInUpdates is set to true). This should match the name type specified on the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Optional (Required if MsgKeyInUpdates is set to true). This should match the name of the item being provided. |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|--|
| ServiceName | Optional (Required if MsgKeyInUpdates is set to true). This should be the name of the service that provides the data. Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |
| ServiceId | Optional (Required if MsgKeyInUpdates is set to true). This should be the ID of the service that provides the data. Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |
| Payload | Required. MarketByPrice is represented by a Map , where each entry (MapEntry) contains FieldList which has information about a price point. |

Table 55: MarketByPrice Update Message

8.2.4 MarketByPrice Status Message

A MarketByPrice status message is encoded using **StatusMsg** and sent by OMM interactive provider and non-interactive provider applications. This message conveys state change information associated with an item stream.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if EMA is configured with **MsgKeyInUpdates** set to **true**, then the **Name** and **ServiceName** must be provided for **every** Status response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|--|
| DomainType | Required. MMT_MARKET_BY_PRICE = 8 |
| State | Optional. Current state information associated with the data and stream. |
| Indications | Optional: <ul style="list-style-type: none"> ClearCache true: indicates clear cache |
| QOS | Optional. |
| ItemGroup | Optional. The provider can use this component to change the item's ItemGroup |
| PermissionData | Optional. If present, this is the new permission information associated with all the contents on the stream. |
| NameType | Optional (Required if MsgKeyInUpdates is set to true). This should match the name type specified on the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Optional (Required if MsgKeyInUpdates is set to true). This should match the name of the item being provided. |
| ServiceName | Optional (Required if MsgKeyInUpdates is set to true). This should be the name of the service that provides the data. Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |
| ServiceId | Optional (Required if MsgKeyInUpdates is set to true). This should be the ID of the service that provides the data. Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |

Table 56: MarketByPrice Status Message

8.2.5 MarketByPrice Post Message

If support is specified by the provider, consumer applications can post MarketByPrice data. For more details on posting, see the *EMA 3.0.2 Java Edition Developers Guide*.

8.3 Data: Response Message Payload

The payload is a **Map**. Refreshes for this **Map** may be in multiple Response messages. The bandwidth of the refresh messages can be optimized by putting multiple **MapEntry** in each response message. For optimal performance the packed map entries in each response message should use less than 6000 bytes. If the data is split into multiple messages, then a **Map. Total CountHint** should be provided to optimize downstream caching. Since the fields in each map entry are the same, bandwidth can be further optimized by DataDefinitions.

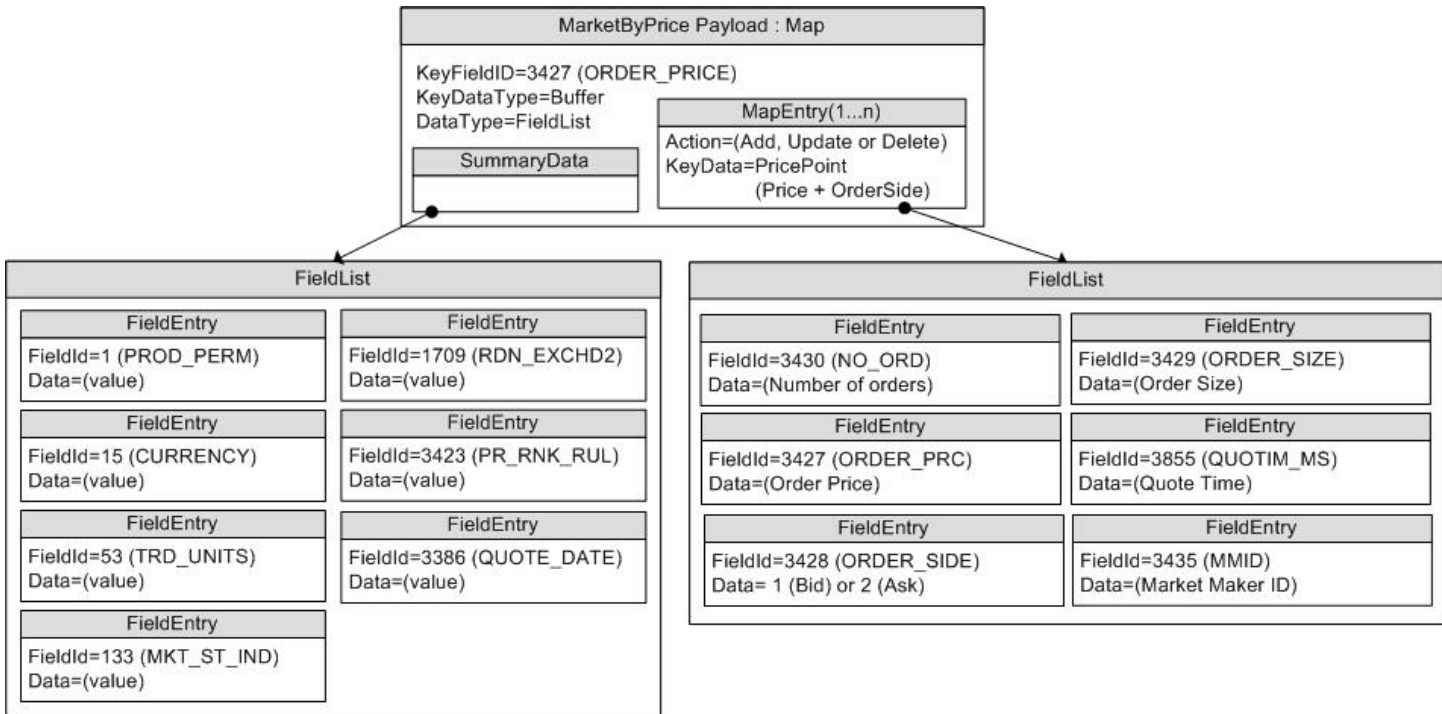


Figure 18: MarketByPrice Response Message Payload

The **Map.SummaryData** only needs to be in the first refresh msg which typically includes:

- Permission information (PROD_PERM)
- Currency of the orders (CURRENCY)
- Trade Units for the precision for which order prices are set (TRD_UNITS)
- Market State (MKT_ST_IND)
- Exchange Identifier on which the orders were placed (RDN_EXCHD2)
- Price Ranking Rules (PR_RNK_RUL)
- Quote Date (QUOTE_DATE)

The **MapEntry.Key**'s data is a Buffer that contains the combination of the price and the order side, so each key is unique within its Map. The **MapEntry.Key**'s data should be treated as a single entity and is not meant to be parsed.

The **MapEntry.Data** is a **FieldList** that contains some or all of the following information about the price point:

- Number of aggregated orders (NO_ORD)
- Order Price & Side (BID, ASK, or ORDER_PRC & ORDER_SIDE)
- Order Size (BIDSIZE, ASKSIZE, or ORDER_SIZE)
- Quote Time (QUOTIM_MS)
- Map containing the Market Makers (MMID) and optionally a field list with the positions of each market maker at the Order Price point.

8.4 Special Semantics

None

8.5 Specific Usage: RDF Direct and the Response Message Payload

RDF Direct uses MARKET_BY_PRICE for several markets, including NYSE OpenBook, Archipelago ECN market depth, and Instinet ECN market depth.

The payload is a **Map**. Each refresh message for this **Map** includes SummaryData and up to 50 map entries. Updates are not sent for any map entry until after the **RefreshMsg. Complete** is set to **true**. DataDefinitions are not used to reduce bandwidth. **Map. Total CountHint** is not provided.

Map. SummaryData is sent in every refresh message, even if it does not change. The fields used are from the RWFFld Field Dictionary:

- PROD_PERM (1): Integer for permission information
- CURRENCY (15): Enumeration of currency for the orders
- TRD_UNITS (53): Enumeration of trade Units for the precision for which order prices are set
- MKT_ST_IND (133): Enumeration of market state
- RDN_EXCHD2 (1709): Enumeration of exchange on which the orders were placed

The **MapEntry.Key**'s data is a Buffer that contains the combination of price and order side (**B** for buy or **S** for Sell), so each key is unique within its Map. The **MapEntry.Key**'s data should be treated as a single entity and is not meant to be parsed.

The **MapEntry.Value** is a **FieldList** that contains the following information about the price point:

- NO_ORD (3430): Integer for the Number of Orders aggregated into this MapEntry
- ORDER_PRC (3427) & ORDER_SIDE (3428): Real and Enumeration for the order price & side (buy or sell/bid or ask)
- ORDER_SIZE (3429): Real for the aggregated size of the order at this price
- QUOTIM_MS (3855): Quote Time in millisecond since GMT of the current day in the GMT time zone
- Some venues may provide an extra field that contains a map. The MapEntry.KeyData will have a KeyFieldId which is MMID (3435). If the positions of each market maker are available, then the MapEntry.Value will contain a FieldList. The field list will contain a single field with the position of that market maker. If positions for each market maker are not available, MapEntry.Value's data type will be NoData.

The **FieldList.DictId** is **0**, so it should be ignored.

8.6 Specific Usage: Enterprise Platform

For the most part, MarketByPrice data from the Enterprise Platform is the same as it is from the original source of the data (e.g. RDF Direct). However, if caching is enabled in an Enterprise Platform component, there are two differences.

- The number of messages packed into each Refresh response message may be different.
- Updated response messages may be delivered between Refresh response messages, before the **RespMsg. Complete** is set to **true**. It is the consumer applications responsibility to apply the indicated changes.

Chapter 9 MarketMaker Domain

9.1 Description

The **MarketMaker** domain provides access to market maker quotes and trade information. The list of market makers is sent in the form of a **Map**. Each **MapEntry** represents one market maker (using that market maker's Id as its key) and contains **FieldList** describing information such as that market maker's bid and ask prices, quote time, and market source.

9.2 Usage

Note: Generic Message(s) are not supported for the **MMT_MARKET_MAKER** Reuters Domain Model.

9.2.1 MarketMaker Request Message

A MarketMaker request message is encoded using **ReqMsg** and sent by OMM consumer applications. The request specifies the name of an item in which the consumer is interested.

If a consumer wishes to receive updates, it may make a “streaming” request by setting the **ReqMsg. InterestAfterRefresh** is set to **true**. If the flag is not set, the consumer is requesting a “snapshot” and the refresh should end the request (updates may be received in either case if the refresh has multiple parts).

A consumer can send pause an item to stop updates (if the provider supports such functionality). For more information, refer to the *EMA 3.0.2 Java Edition Developers Guide*.

| COMPONENT | DESCRIPTION / VALUE |
|---------------------|---|
| DomainType | Required. MMT_MARKET_MAKER = 9 |
| Interactions | Required. <ul style="list-style-type: none"> InitialImage true: indicates initial image is required InterestAfterRefresh true: indicates streaming request is required Pause true: indicates pause is required |
| Indications | Optional. <ul style="list-style-type: none"> ConflatedInUpdates true: indicates conflated updates is required. Batch and View request are specified in the Payload . |
| QOS | Optional. Indicates the quality of service at which the consumer want the stream serviced. |
| Priority | Optional. Indicates class and count associated with stream priority. |

| COMPONENT | DESCRIPTION / VALUE |
|-------------|--|
| NameType | Optional. When consuming from Thomson Reuters sources, typically set to INSTRUMENT_NAME_RIC = 1 (the “Reuters Instrument Code”). If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Required. The name of requested item. <hr/> Note: Not used for Batch Item request. <hr/> |
| ServiceName | Required. This should be the Name associated with the service from which the consumer wishes to request the item. <hr/> Note: The consumer application should set either the ServiceName or ServiceId of the service, but not both. <hr/> |
| ServiceId | Required. This should be the ID associated with the service from which the consumer wishes to request the item. <hr/> Note: The consumer application should set either the ServiceId or ServiceName of the service, but not both. <hr/> |
| Payload | Optional. When features such as View or Batch are leveraged, the payload can contain information relevant to that feature. For more detailed information about View see Chapter 12. |

Table 57: MarketMaker Request Message

9.2.2 MarketMaker Refresh Message

A MarketMaker refresh message is encoded using **RefreshMsg** and sent by OMM interactive provider and OMM non-interactive provider applications.

The MarketMaker refresh can be sent in multiple parts. It is possible for update and status messages to be delivered between parts of a refresh message, regardless of streaming or non-streaming request.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for **every** Refresh response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|---|
| DomainType | Required. MMT_MARKET_MAKER = 9 |
| State | Required. Includes the state of the stream and data. |
| Solicited | Required. <ul style="list-style-type: none"> true: Indicates the message was solicited false: Indicates the message is unsolicited |
| Indications | Optional: <ul style="list-style-type: none"> DoNotCache true: Requests the application to not cache ClearCache true: Requests that the application clear the cache Complete true: Indicates the message is the final one in the refresh. |
| QoS | Optional. If sent, specifies the quality of service which the stream is provided. |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages with this stream. |
| PartNum | Optional. A user-specified, item-level number that indicates the part number in a multi-part refresh. |
| ItemGroup | Optional. Associate the item with an Item Group (refer to Section 4.3.1.3). |
| PermissionData | Optional. Specifies the permission information associated with content of this stream. |
| NameType | Optional. This should match name type specified in the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Required. Symbol for MarketMaker Item. |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|---|
| ServiceName | <p>Required. This should be the Name associated with the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The provider application should set either the ServiceName or ServiceId of the service, but not both.</p> <hr/> |
| ServiceId | <p>Required. This should be the ID associated with the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The provider application should set either the ServiceId or ServiceName of the service, but not both.</p> <hr/> |
| Payload | <p>Required. A MarketMaker is represented by a Map, where each entry (MapEntry) contains FieldList which has information about a market maker.</p> |

Table 58: MarketMaker Refresh Message

9.2.3 MarketMaker Update Message

A MarketMaker update message is encoded using **UpdateMsg** and sent by OMM interactive provider and OMM non-interactive provider applications. Updates will not be received before images, and a true snapshot is supported.

The provider can send an update message to add, update, or remove market maker information.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if EMA is configured **MsgKeyInUpdates** with **true** value, then the **Name** and **ServiceName** must be provided for **every** Update response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|--|
| DomainType | Required. MMT_MARKET_MAKER = 9 |
| UpdateTypeNum | Required. Indicates the general content of the updates. Typically sent as one of the following: <ul style="list-style-type: none"> INSTRUMENT_UPDATE_UNSPECIFIED=0 INSTRUMENT_UPDATE_QUOTE=1 |
| Indications | Optional: <ul style="list-style-type: none"> DoNotCache true: indicates do not cache this update message ClearCache true: indicates clear cache DoNotConflate true: indicates do not conflate this update message |
| QOS | Optional. |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages with this stream. |
| PartNum | Not used. |
| ConflatedCount | Optional. If a provider is sending a conflated update, this informs the consumer of how many updates are in the conflation. The consumer indicates interest in this information by setting the ReqMsg. ConflatedInUpdates is set to true in the request. |
| ConflatedTime | Optional. If a provider is sending a conflated update, this notifies the consumer of the times interval (in milliseconds) over which data is conflated. The consumer indicates interest in this information by setting the ReqMsg. ConflatedInUpdates is set to true in the request. |
| PermissionData | Optional. Permissioning information associated with only the contents of this update. |
| NameType | Optional (Required if MsgKeyInUpdates is set to true). This should match the name type specified on the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |

| COMPONENT | DESCRIPTION / VALUE |
|-------------|--|
| Name | Optional (Required if MsgKeyInUpdates is set to true). This should match the name of the item being provided. |
| ServiceName | Optional (Required if MsgKeyInUpdates is set to true). This should be the ID of the service that provides the data. Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |
| ServiceId | Optional (Required if MsgKeyInUpdates is set to true). This should be the ID of the service that provides the data. Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |
| Payload | Required. A MarketMaker is represented by a Map , where each entry (MapEntry) contains FieldList which has information about a market maker. |

Table 59: MarketMaker Update Message

9.2.4 MarketMaker Status Message

A MarketMaker status message is encoded and sent by OMM interactive provider and non-interactive provider applications. This message conveys state change information associated with an item stream.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if EMA is configured **MsgKeyInUpdates** with **true** value, then the **Name** and **ServiceName** must be provided for **every** Status response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|--|
| DomainType | Required. MMT_MARKET_MAKER = 9 |
| State | Optional. Current state information associated with the data and stream. |
| Indications | Optional: <ul style="list-style-type: none"> ClearCache true : indicates clear cache |
| QOS | Optional. |
| ItemGroup | Optional. The provider can use this component to change the item's ItemGroup . |
| PermissionData | Optional. If present, this is the new permission information associated with all the contents on the stream. |
| NameType | Optional (Required if EMA is configured MsgKeyInUpdates with true value). This should match the name type specified on the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Optional (Required if EMA is configured MsgKeyInUpdates with true value). This should match the name of the item being provided. |
| ServiceName | Optional (Required if EMA is configured MsgKeyInUpdates with true value). This should be the name of the service that provides the data. Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |
| ServiceId | Optional (Required if MsgKeyInUpdates is set to true). This should be the ID of the service that provides the data. Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |

Table 60: MarketMaker Status Message

9.2.5 MarketMaker Post Message

If support is specified by the provider, consumer applications can post MarketMaker data. For more details on posting, see the *EMA 3.0.2 Java Edition Developers Guide*.

9.3 Data: Response Message Payload

The payload is a **Map**. Refreshes for this **Map** may be in multiple response messages. The bandwidth of the Refresh response messages can be optimized by putting multiple **MapEntry** in each Response message. For optimal performance the packed map entries in each response message should use less than 6000 bytes. If the data is split into multiple messages, then a **Map.TotalCountHint** should be provided to optimize downstream caching. Since the fields in each map entry are the same, bandwidth can be further optimized by DataDefinitions.

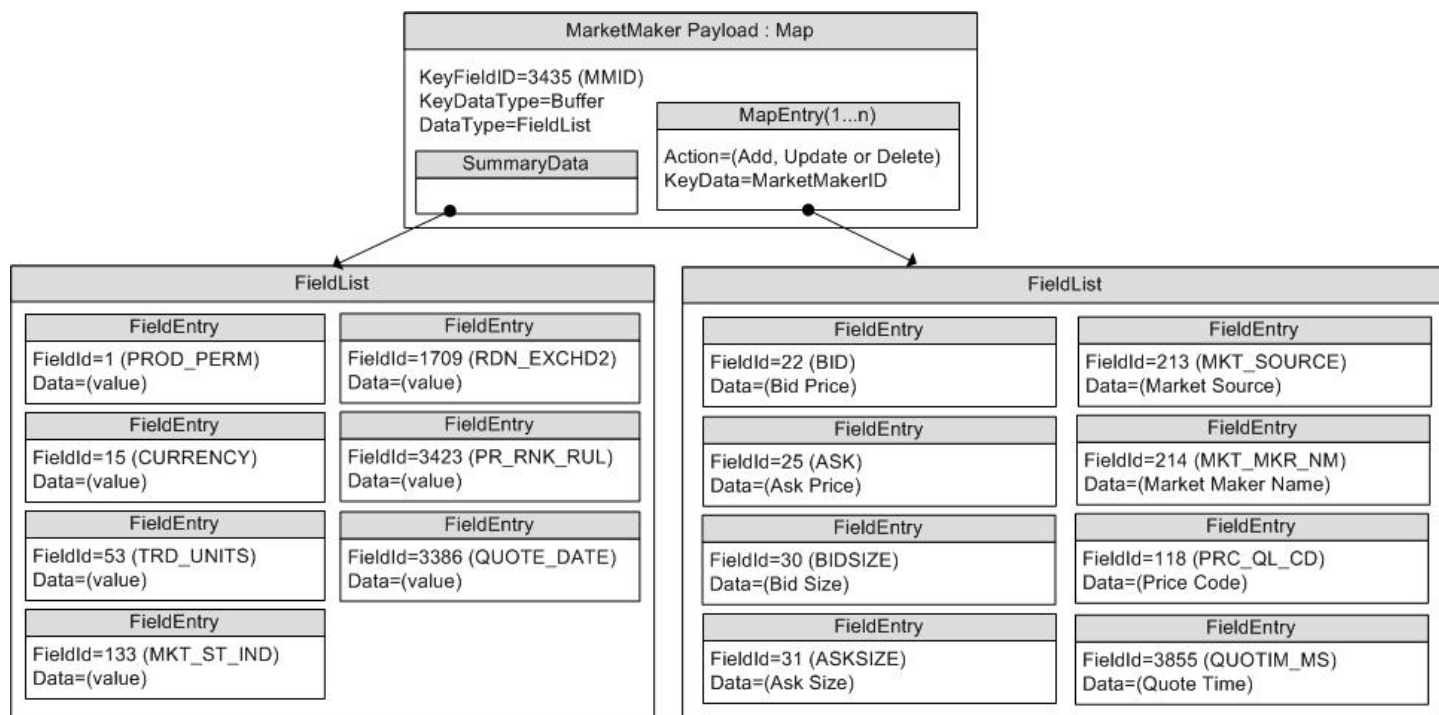


Figure 19: MarketMaker Response Message Payload

The **Map.SummaryData** only needs to be in the first refresh msg which typically includes:

- Permission information (PROD_PERM)
- Currency of the orders (CURRENCY)
- Trade Units for the precision for which order prices are set (TRD_UNITS)
- Market State indicating if state of the market (MKT_ST_IND)
- Exchange Identifier on which the orders were placed (RDN_EXCHD2)
- Price ranking rules (PR_RNK_RUL)
- Quote Date (QUOTE_DATE)

The **MapEntry.Key**'s data is a Buffer, AsciiString or RmtesString containing a unique market maker ID. The **Map.KeyFieldId** may be set to MMID or MKT_MKR_ID, so the information does not have to be repeated in the **MapEntry.Data**.

The **MapEntry.Data** is a **FieldList** that contains the following information about the top bid and ask order for a market maker:

- Bid (BID)
- Ask (ASK)
- Bid Size (BIDSIZE)
- Ask Size (ASKSIZE)
- Market Source (MKT_SOURCE)
- Market Maker Name (MKT_MKR_NM)
- Price Qualifiers (PRC_QL_CD & PRC_QL2)
- Quote Time (QUOTIM_MS)

9.4 Special Semantics

None

9.5 Specific Usage: RDF Direct and the Response Message Payload

RDF Direct uses MARKET_MAKER for NASDAQ Market Makers.

The payload is a **Map**. Each Refresh message for this **Map** includes SummaryData and up to 50 **MapEntry**s. Updates are not sent for any map entry until after the **RefreshMsg. Complete** is sent with **true** value. DataDefinitions are not used to reduce bandwidth. The **Map. Total CountHint** is not provided.

Map. SummaryData is sent in every refresh, even if it does not change. The fields used are from the RWFFld Field Dictionary:

- PROD_PERM (1): Integer for permission information
- CURRENCY (15): Enumeration of currency for the orders
- TRD_UNITS (53): Enumeration of trade Units for the precision for which order prices are set
- MKT_ST_IND (133): Enumeration of market state
- RDN_EXCHD2 (1709): Enumeration of exchange on which the orders were placed
- PR_RNK_RUL (3423): Enumeration of price ranking rules

The **MapEntry.Key**'s Data is a Buffer containing a unique market maker ID. The **MapEntry.KeyFieldId** is not set, but this may be changed in the future.

The **MapEntry. Data** is a FieldList that contains some or all of the following information about the order:

- BID (22): Real with the best bid price from this market maker
- ASK (25): Real with the best ask price from this market maker
- BIDSIZE (30): Real with the size of the best bid
- ASKSIZE (31): Real with the size of the best ask
- MKT_MKR_ID (212): RmtesString with the Market Maker ID. This may be removed in the future by setting the **Map. KeyFieldId** to MKT_MKR_ID (212) or MMID (3435).
- MKT_SOURCE (213): Enumeration with the Exchange or City of the quote
- MKT_MKR_NM (214): RmtesString with the Market Maker Name
- PRC_QL_CD (118): Enumeration for first price qualifier
- PRC_QL2 (131): Enumeration for second price qualifier
- QUOTIM_MS (3855): Quote Time in millisecond since GMT of the current day in the GMT time zone

The **FieldList. DictId** is 0, so it should be ignored.

9.6 Specific Usage: Enterprise Platform

For the most part, MarketMaker data from the Enterprise Platform is the same as it is from the original source of the data (e.g. RDF Direct). However, if caching is enabled in an Enterprise Platform component, there will be two differences.

The number of messages packed into each Refresh response message may be different.

ANnupdates response message may be delivered between Refresh response messages, before the **RefreshMsg. Complete** is sent with a **true** value. It is the consumer applications responsibility to apply the indicated changes.

Chapter 10 YieldCurve Domain

10.1 Description

This section defines a yield curve model as is currently supported by the ATS. The **YieldCurve** domain shows the relation between the interest rate and the term, or time to maturity, associated with the debt of a borrower. The shape of the yield curve can help to give an idea of future economic activity and interest rates. Information is sent as an **FieldList**, where some **FieldEntry**'s may contain more complex types such as **Vector**, **Array**, or **FieldList**.

10.2 Usage

Note: **GenericMsg(s)** are not supported in the **MMT_YIELD_CURVE** Reuters Domain Model.

10.2.1 YieldCurve Request Message

A YieldCurve request message is encoded using **ReqMsg** and sent by OMM consumer applications. The request specifies the name and attributes of the curve in which the consumer is interested.

If a consumer wishes to receive updates, it may make a “streaming” request by setting the **ReqMsg. InterestAfterRefresh** to **true**. If the flag is not set, the consumer is requesting a “snapshot” and the refresh should end the request (updates may be received in either case if the refresh has multiple parts).

A consumer can send pause an item to stop updates (if the provider supports such functionality). For more information, refer to the *EMA 3.0.2 Java Edition Developers Guide*.

| COMPONENT | DESCRIPTION / VALUE |
|---------------------|--|
| DomainType | Required. MMT_YIELD_CURVE = 22 |
| Interactions | Required. <ul style="list-style-type: none"> InitialImage true: Requests an initial image. InterestAfterRefresh true: Requests streaming updates. Pause true: Requests that the application pause the item. |
| Indications | Optional. <ul style="list-style-type: none"> ConflatedInUpdates true: Requests that the application send conflated updates. Batch and View request are specified in the Payload . |
| QOS | Optional. Indicates the quality of service at which the consumer want the stream serviced. |
| Priority | Optional. Indicates class and count associated with stream priority. |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|--|
| NameType | Optional. When consuming from Thomson Reuters sources, typically set to INSTRUMENT_NAME_RIC = 1 (the “Reuters Instrument Code”). If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Required. The name of requested item. Note: Not used for Batch Item request. |
| ServiceName | Required. This should be the Name associated with the service from which the consumer wishes to request the item. Note: The application should set either the ServiceName or ServiceId of the service, but not both. |
| ServiceId | Required. This should be the ID associated with the service from which the consumer wishes to request the item. Note: The application should set either the service's ServiceId or ServiceName , but not both. |
| Payload | Optional. When features such as View or Batch are leveraged, the payload can contain information relevant to that feature. See Chapter 12 for more detailed information about View. |

Table 61: YieldCurve Request Message

10.2.2 YieldCurve Refresh Message

A YieldCurve Refresh Message is encoded using **RefreshMsg** and sent by OMM Provider and OMM non-interactive provider applications. This message sends all currently available information about the item to the consumer.

FieldList in the payload should include all the fields that may be present in subsequent updates, even if those fields are currently blank. When responding to a View request, this refresh should contain all the fields that were requested by the specified view. If for any reason the provider wishes to send new fields, it must first send an unsolicited refresh with both the new and currently present fields.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for Refresh response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|---|
| DomainType | Required. MMT_YIELD_CURVE = 22 |
| State | Required. Includes the state of the stream and data. |
| Solicited | Required. <ul style="list-style-type: none"> true: Indicates a refresh solicited false: Indicates a refresh unsolicited |
| Indications | Optional: <ul style="list-style-type: none"> DoNotCache true: Indicates do not cache for this refresh message ClearCache true: Requests the application to clear the cache. Complete true: Indicates that the message completes the refresh. |
| QOS | Optional. If sent, specifies the quality of service which the stream is provided. |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages with this stream. |
| PartNum | Optional. A user-specified, item-level number that indicates the part number in a multi-part refresh. |
| ItemGroup | Optional. Associate the item with an Item Group (refer to Section 4.3.1.3). |
| PermissionData | Optional. Specifies the permission information associated with content of this stream. |
| NameType | Optional. This should match nameType specified in the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Required. This should match the requested name. |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|---|
| ServiceName | <p>Required. This should be the Name associated with the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The application should set either the service's ServiceName or ServiceId but not both.</p> <hr/> |
| ServiceId | <p>Required. This should be the ID associated with the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The application should set either the service's ServiceId or ServiceName but not both.</p> <hr/> |
| Payload | <p>Required. This should consist of a FieldList containing all fields associated with the item. Some FieldEntries are sent as more complex types such as Vector and Array. Encoding and decoding applications should be aware of this and ensure proper handling of these types.</p> |

Table 62: YieldCurve Refresh Message

10.2.3 YieldCurve Update Message

A YieldCurve Update Message is encoded using **UpdateMsg** by OMM provider and OMM non-interactive provider applications. It conveys any changes to an item's data. Updates may be received between the first Refresh and the RefreshComplete. It is the consuming application's responsibility to determine if the update is applicable to the data that has previously been sent in a refresh.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for Update response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|--|
| DomainType | Required. MMT_YIELD_CURVE = 22 |
| UpdateTypeNum | Required. Indicates the general content of the updates. Typically sent as one of the following: <ul style="list-style-type: none"> INSTRUMENT_UPDATE_UNSPECIFIED=0 INSTRUMENT_UPDATE_QUOTE=1 |
| Indications | Optional: <ul style="list-style-type: none"> DoNotCache true: Requests the application to not cache this update message. ClearCache true: Requests that the application clear the cache. DoNotConflate true: Requests the application to not conflate the update message. |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages with this stream. |
| PartNum | Not used. |
| ConflatedCount | Optional. If a provider is sending a conflated update, this informs the consumer of how many updates are in the conflation. The consumer indicates interest in this information by setting the ReqMsg. ConflatedInUpdates is set to true in the request. |
| ConflatedTime | Optional. If a provider is sending a conflated update, this notifies the consumer of the times interval (in milliseconds) over which data is conflated. The consumer indicates interest in this information by setting ReqMsg. ConflatedInUpdates to true in the request. |
| PermissionData | Optional. Permissioning information associated with only the contents of this update. |
| NameType | Optional (Required if MsgKeyInUpdates is set to true). This should match the name type specified on the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Optional (Required if MsgKeyInUpdates is set to true). This should match the name of the item being provided. |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|--|
| ServiceName | Optional (Required if MsgKeyInUpdates is set to true). This should be the name of the service that provides the data. Note: The application should set either the service's ServiceName or ServiceId but not both. |
| ServiceId | Optional (Required if MsgKeyInUpdates is set to true). This should be the ID of the service that provides the data. Note: The application should set either the service's ServiceName or ServiceId but not both. |
| Payload | Required. This should consist of a FieldList containing all fields associated with the item. Some FieldEntry s are sent as more complex types such as Vector and Array . Encoding and decoding applications should be aware of this and ensure proper handling of these types. |

Table 63: YieldCurve Update Message

10.2.4 YieldCurve Status Message

A **YieldCurve status** message is encoded using **StatusMsg** and sent by OMM interactive provider and non-interactive provider applications. This message conveys state change information associated with an item stream.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for Status response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|---|
| DomainType | Required. MMT_YIELD_CURVE = 22 |
| State | Optional. Current state information associated with the data and stream. |
| Indications | Optional: <ul style="list-style-type: none"> ClearCache true : indicates clear cache |
| QOS | Optional. |
| ItemGroup | Optional. The provider can use this component to change the item's ItemGroup . |
| PermissionData | Optional. If present, this is the new permission information associated with all the contents on the stream. |
| NameType | Optional (Required if MsgKeyInUpdates is set to true). This should match the name type specified on the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Optional (Required if MsgKeyInUpdates is set to true). This should match the name of the item being provided. |
| ServiceName | Optional (Required if MsgKeyInUpdates is set to true). This should be the name of the service that provides the data. Note: The application should set either the service's ServiceName or ServiceId but not both. |
| ServiceId | Optional (Required if MsgKeyInUpdates is set to true). This should be the ID of the service that provides the data. Note: The application should set either the service's ServiceName or ServiceId but not both. |

Table 64: YieldCurve Status Message

10.2.5 YieldCurve Domain Post Message

If the provider claims to support this type of posting, consumer applications can post Yield Curve data. For more information on posting, refer to the *EMA 3.0.2 Java Edition Developers Guide*.

10.3 Data: The Response Message Payload

The payload of a Yield Curve Refresh or Update is an **FieldList**. Some **FieldEntry** contents contain primitive type information to help describe the curve. Some examples of this are the Curve Type (**CRV_TYPE**), the Algorithm (**CRV_ALGTHM**) used to calculate the curve, and the Interpolation (**INTER_MTHD**) and Extrapolation (**EXTRP_MTHD**) methods. Since the fields in each **Vector** are the same, bandwidth can be further optimized by DataDefinitions.

Other **FieldEntry** contents contain more complex information. The more complex entries are broken down into:

- Input Entries which define the different input information used to calculate the yield curve. Inputs are represented using non-sorted **Vector** types. Examples of curve inputs would be cash rates (**CASH_RATES**), future prices (**FUTR_PRCs**), and swap rates (**SWAP_RATES**).
- Output Entries which define the output of the yield curve calculation. Outputs are represented using non-sorted **Vector** types. An example of curve outputs would be the Yield Curve (**YLD_CURVE**) itself.
- Extra Meta Information (**EX_MET_DAT**) which provides general information about the yield curve. This is represented using an **ElementList** type. The extra meta information allows users to provide additional curve description without requiring new fields to be defined. Some examples of this meta information would be the curve creation time or curve's owner.

For **Vector** types, **summaryData** can be included to provide information specific to the **Vector**'s contents. Any **summaryData** needs to be present only for the first refresh part that contains the **Vector**. Typical **summaryData** fields include:

- Tenors (**TENORS**)

Each **VectorEntry** houses an **FieldList** that contains specific information about the respective input or output. The field list should be decoded by checking the **FieldEntry** data type.

- For more information on dictionary use, refer to Section 5.2, **Decoding FieldList Contents with Field and Enumerated Types Dictionaries**.
- For more information about use of the **Vector** and **FieldList** container types See the *EMA 3.0.2 Java Edition Developers Guide*.

The following table contains additional information on input and output entries.

| NAME FIELD NAME TYPE | CONTAINER TYPE | CONTAINER ENTRY TYPE | REQUIRED | DESCRIPTION |
|--|----------------|-------------------------|----------|---|
| Cash Rates CASH_RATES <i>Input</i> | Vector | FieldList | No | Contains cash rate data used to calculate the yield curve output. This typically includes information like settlement date (CASH_SDATE), maturity date (CASH_MDATE), and basis (CASH_BASIS). |
| Future Prices FUTR_PRCS <i>Input</i> | Vector | FieldList | No | Contains future pricing data used to calculate the yield curve output. This typically includes information like settlement date (FUTR_SDATE), maturity date (FUTR_MDATE), and basis (FUTR_BASIS). |
| Swap Rates SWAP_RATES <i>Input</i> | Vector | FieldList | No | Contains swap rate data used to calculate the yield curve output. This typically includes information like settlement date (SWAP_SDATE), maturity date (SWAP_MDATE), swap rate value (SWAP_RATE_VAL), and roll date (SWAP_RDATE). |
| Spread Rates SPRD_RATES <i>Input</i> | Vector | FieldList | No | Contains spread rate data used to calculate the yield curve output. This typically includes information like spread frequency (SPRD_FREQ), maturity date (SPRD_MDATE), spread rate (SPRD_RATE), and roll date (SPRD_RDATE). |
| Yield Curve YLD_CURVE <i>Output</i> | Vector | FieldList | No | Contains calculated Yield Curve data. This typically includes information like zero rate (YCT_ZRATE), forward rate (YCT_FWRATE), and discount factor (YCT_DISFAC). |

Table 65: Yield Curve Inputs and Outputs

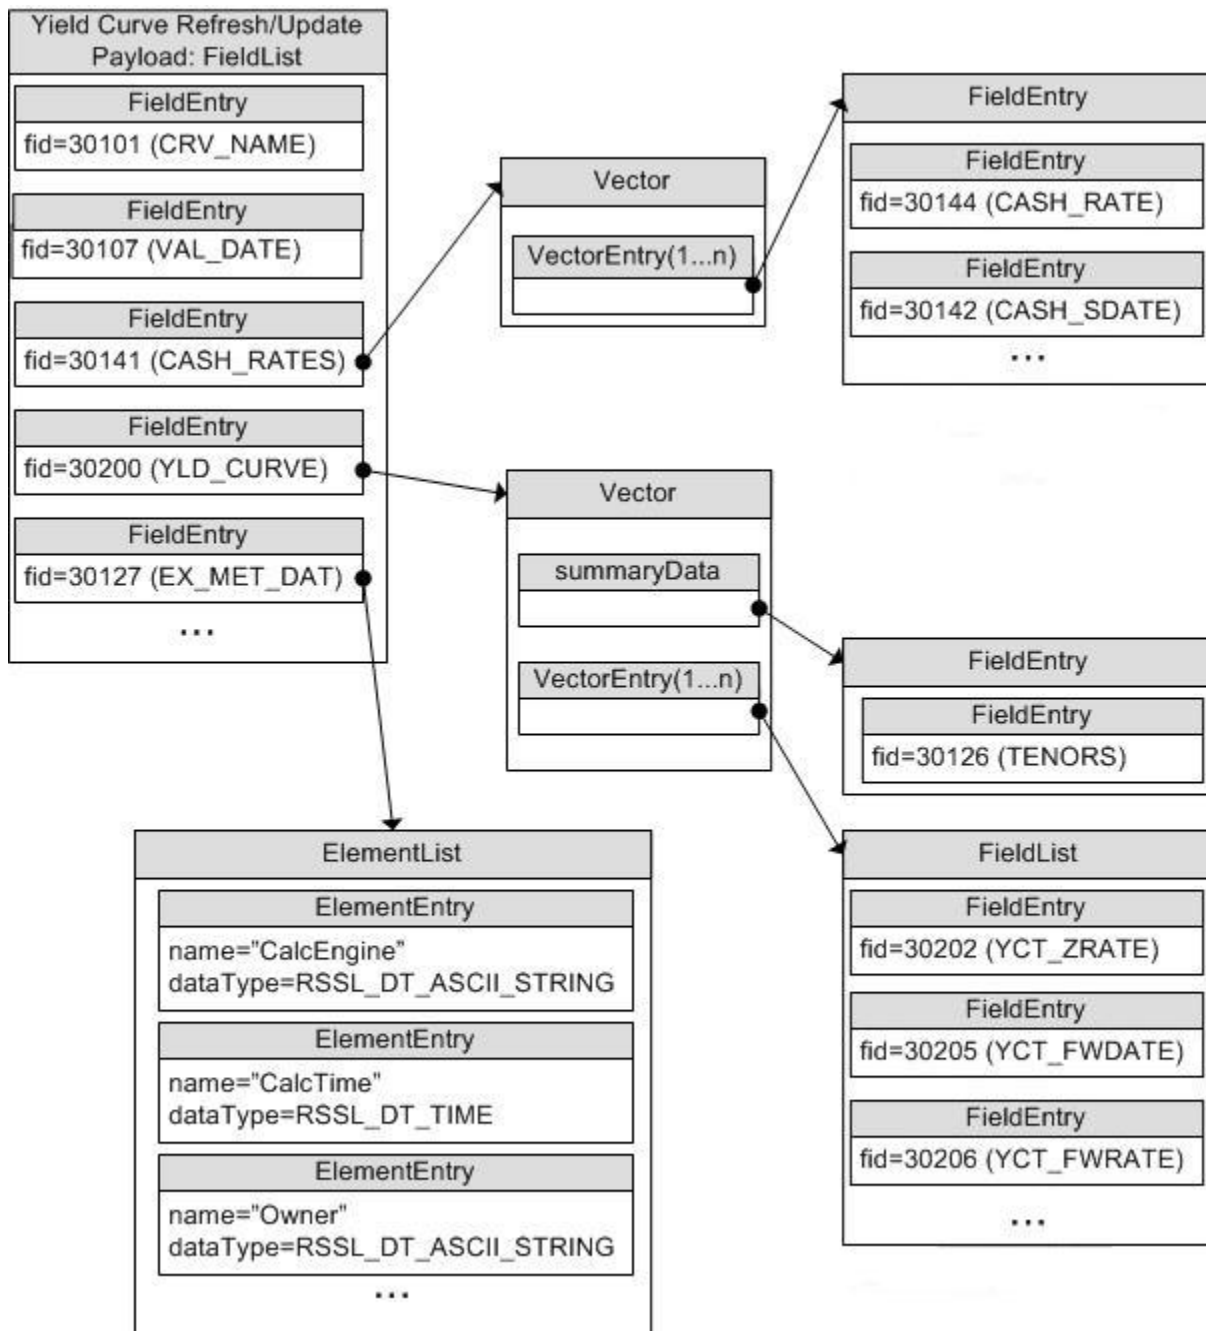


Figure 20: Yield Curve Payload Example

10.4 Special Semantics

None

10.5 Specific Usage: ATS

Please refer to the ATS documentation as there are required FIDs that will need to be in the dictionary used by the application consuming Yield Curve data.

Chapter 11 SymbolList Domain

11.1 Description

The **SymbolList** domain provides access to a set of symbol names, typically from an index, service, or cache. Content is encoded as a **Map**, with each symbol represented by a map entry and where the symbol name is the entry key. An entry's payload is optional, but when present the payload is a **FieldList** which contains additional cross-reference information such as permission information, name type, or other venue-specific contents.

11.2 Usage

Note: Generic Message(s) are not supported for the **MMT_SYMBOL_LIST** Reuters Domain Model.

11.2.1 SymbolList Request Message

A **SymbolList** request message is encoded and sent by OMM consumer applications.

The consumer can make a “streaming” request (set **ReqMsg. InterestAfterRefresh** with **true** value) to receive updates, typically associated with item additions or removals from the list.

| COMPONENT | DESCRIPTION / VALUE |
|---------------------|---|
| DomainType | Required. MMT_SYMBOL_LIST = 10 |
| Interactions | Required. <ul style="list-style-type: none"> InitialImage true: indicates initial image is required InterestAfterRefresh true: indicates streaming request is required Pause true: indicates pause is required |
| Indications | Optional. <ul style="list-style-type: none"> ConflateInUpdates true: indicates conflated updates is required Batch and View request are specified in the Payload . |
| Priority | Optional. Indicates class and count associated with stream priority. |
| NameType | Optional. When consuming from Thomson Reuters sources, typically set to INSTRUMENT_NAME_RIC = 1 (the “Reuters Instrument Code”). If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Required. The name of requested item. |
| | Note: Not used for Batch Item request. |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|--|
| ServiceName | <p>Required.</p> <hr/> <p>Note: The consumer application should set either the service's ServiceName or ServiceId but not both.</p> <hr/> |
| ServiceId | <p>Required.</p> <hr/> <p>Note: The consumer application should set either the service's ServiceId or ServiceName but not both.</p> <hr/> |
| Payload | <p>Optional.</p> <p>When features such as View or Batch or symbol list enhancements are leveraged, the payload can contain information relevant to that feature.</p> <p>For more detailed information about View or Symbol List Enhancements see Chapter 12.</p> |

Table 66: SymbolList Request Message

11.2.2 SymbolList Refresh Message

A **SymbolList** refresh Message is encoded using **RefreshMsg** and sent by OMM Provider and OMM non-interactive provider applications. This message sends a list of item names to the consumer.

A SymbolList refresh can be sent in multiple parts. Update and status messages can be delivered between parts of a refresh message, regardless of streaming or non-streaming request.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for **every** Refresh response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|---|
| DomainType | Required. MMT_SYMBOL_LIST = 10 |
| State | Required. Includes the state of the stream and data. |
| Solicited | Required. true: Indicates the message is a solicited refresh. false: Indicate the message is an unsolicited refresh. |
| Indications | Optional: <ul style="list-style-type: none"> • DoNotCache true: Requests that the application not cache this refresh message. • ClearCache true: Requests that the application clear the cache. • Complete true: Indicates that this message completes the refresh. |
| QoS | Optional. If sent, specifies the quality of service which the stream is provided. |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages with this stream. |
| PartNum | Optional. A user-specified, item-level number that indicates the part number in a multi-part refresh. |
| ItemGroup | Optional. Associate the item with an Item Group (refer to Section 4.3.1.3). |
| PermissionData | Optional. Specifies the permission information associated with content of this stream. |
| NameType | Optional. This should match name type specified in the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Required. This should match the requested name. |

| COMPONENT | DESCRIPTION / VALUE |
|--------------------|---|
| ServiceName | <p>Required. This should be the Name associated with the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The provider application should set either the ServiceName or ServiceId of the service, but not both.</p> <hr/> |
| ServiceId | <p>Required. This should be the ID associated with the service from which the consumer wishes to request the item.</p> <hr/> <p>Note: The provider application should set either the ServiceId or ServiceName of the service, but not both.</p> <hr/> |
| Payload | <p>Required. The payload contains a Map, where entry represents an item in the list. Each map entry contains a FieldList with additional information about that item.</p> |

Table 67: SymbolList Refresh Message

11.2.3 SymbolList Update Message

A **SymbolList** update Message is encoded using **UpdateMsg** and sent by OMM Provider and OMM non-interactive provider applications. It adds or removes items from the list. Updates will not be received before images, and a true snapshot is supported.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for **every** Update response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|--|
| DomainType | Required. MMT_SYMBOL_LIST = 10 |
| Indications | Optional. <ul style="list-style-type: none"> DoNotCache true: Indicates do not cache this update message ClearCache true: indicates clear cache DoNotConflate true: indicates do not conflate this update message |
| QOS | Optional. |
| SeqNum | Optional. A user-specified, item-level sequence number which can be used by the application for sequencing messages with this stream. |
| ConflatedCount | Optional. If a provider is sending a conflated update, this informs the consumer of how many updates are in the conflation. The consumer indicates interest in this information by setting the ReqMsg. ConflatedInUpdates is set to true in the request. |
| ConflatedTime | Optional. If a provider is sending a conflated update, this notifies the consumer of the times interval(in milliseconds) over which data is conflated. The consumer indicates interest in this information by setting the ReqMsg. ConflatedInUpdates is set to true in the request. |
| PermissionData | Optional. Permissioning information associated with only the contents of this update. |
| NameType | Optional (Required if MsgKeyInUpdates is set to true). This should match the name type specified on the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Optional (Required if MsgKeyInUpdates is set to true). This should match the name of the item being provided. |
| ServiceName | Optional (Required if MsgKeyInUpdates is set to true). This should be the name of the service that provides the data. Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |

| COMPONENT | DESCRIPTION / VALUE |
|------------------|---|
| ServiceId | <p>Optional (Required if MsgKeyInUpdates is set to true). This should be the ID of the service that provides the data.</p> <hr/> <p>Note: The provider application should set either the ServiceName or ServiceId of the service, but not both.</p> <hr/> |
| Payload | <p>Required.</p> <p>The payload contains a Map, where entry represents an item in the list. Each map entry contains a FieldList with additional information about that item.</p> |

Table 68: SymbolList Update Message

11.2.4 SymbolList Status Message

A **SymbolList** status message is encoded using **StatusMsg** and sent by OMM interactive provider and non-interactive provider applications. This message conveys state change information associated with an item stream.

Note: The provider should only send the **Name** and **ServiceName** in the first Refresh response message. However if **MsgKeyInUpdates** is set to **true**, then the **Name** and **ServiceName** must be provided for **every** Status response messages.

| COMPONENT | DESCRIPTION / VALUE |
|-----------------------|--|
| DomainType | Required. MMT_SYMBOL_LIST = 10 |
| State | Optional. Current state information associated with the data and stream. |
| Indications | Optional: <ul style="list-style-type: none"> ClearCache true: Requests the application to clear the cache. |
| QOS | Optional. |
| ItemGroup | Optional. The provider can use this component to change the item's ItemGroup |
| PermissionData | Optional. If present, this is the new permission information associated with all the contents on the stream. |
| NameType | Optional (Required if MsgKeyInUpdates is set to true). This should match the name type specified on the request. If it is not specified, NameType defaults to INSTRUMENT_NAME_RIC = 1 . |
| Name | Optional (Required if MsgKeyInUpdates is set to true). This should match the name of the item being provided. |
| ServiceName | Optional (Required if MsgKeyInUpdates is set to true). This should be the name of the service that provides the data. Note: The provider application should set either the service's ServiceName or ServiceId but not both. |
| ServiceId | Optional (Required if MsgKeyInUpdates is set to true). This should be the ID of the service that provides the data. Note: The provider application should set either the ServiceName or ServiceId of the service, but not both. |

Table 69: SymbolList Status Message

11.3 Data: Response Message Payload

The payload is a **Map**. Each **MapEntry** key is an AsciiString symbol. The **MapEntry** value can be empty. It also may be a **FieldList** that includes permission data and cross-reference information. This information should not update frequently.

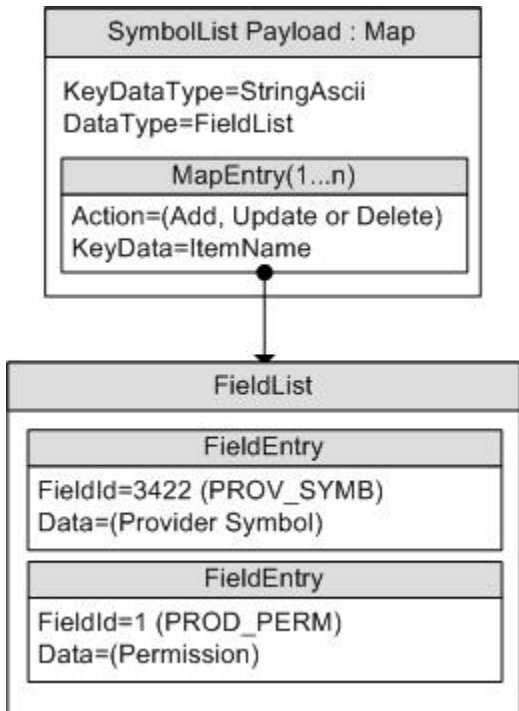


Figure 21: SymbolList Response Message Payload

Fields typically included in a **FieldList** are:

- **PROV_SYMB (3422):** Contains the original symbol as provided by the exchange
- **PROD_PERM (1):** Stores permission information

11.4 Special Semantics

None

11.5 Specific Usage: RDF Direct

The payload is a **Map**. No SummaryData is provided. Each Refresh message includes up to 150 **MapEntry**s. DataDefinitions are not used to reduce bandwidth. The **Map. Total CountHint** is not provided. The **Map. KeyFieldId** is currently not set.

Each **MapEntry**'s key is a Buffer that can be used as a request's **Name** to make a request for an instrument. Each **MapEntry**'s value is a **FieldList** that contains the following information:

- PROV_SYMB (3422): Original symbol provided by the exchange
- PROD_PERM (1): Permission information

The OPRA Venue's SymbolList, 0#OPRA is a hierarchical SymbolList of SymbolLists. Nested SymbolLists start with **Z#**. See the *RDF Direct OPRA Venue Guide* for details.

Chapter 12 Payload in ReqMsg

12.1 View Definition

The client application can specify interest in a specific subset of fields or elements (known as a 'View'). This is done by encoding an array of the desired fields or elements in the request message payload. The response Message will contain a list of the requested fields or elements and possibly some others depending on factors such as aggregation and the ability of the provider to supply the requested view. Unless otherwise specified, this is supported on any non-administrative RDM and any user defined DMM. For more information, refer to the *EMA 3.0.2 Java Edition Developers Guide*. When requesting a new view or changing a view, at a minimum, the request message payload contains an element list with the following entries:

| ELEMENTNAME | TYPE | REQUIRED | DEFAULT | RANGE/EXAMPLES | DESCRIPTION |
|-------------|-----------------------------------|-------------------------------|------------------|--|---|
| :ViewType | UINT | Conditional (see Description) | VT_FIELD_ID_LIST | 1 = VT_FIELD_ID_LIST 2 = VT_ELEMENT_NAME_LIST | Specifies the content type of the ViewData array. Required when specifying a view or when reissuing while wanting to keep the same view. Not required when re-issuing to remove a view. In this case, do not send a payload or View . |
| :ViewData | Array of INT or Array of ASCII | Yes | No | Array of desired entries. Content matches the type as specified by ViewType e.g., a ViewType of VT_FIELD_ID_LIST uses an array of field IDs | Field Ids will be encoded as an array of 2 byte fixed length field identifiers. Element names will be variable length Ascii string fields. |

Table 70: View Definition in Payload

12.2 ItemList

The client application can specify interest in multiple items by using a single batch request message. To do this, encode a list of item names in the request message payload. This is supported on any non-administrative RDM and any user defined DMM. For further details, refer to *EMA 3.0.2 Java Edition Developers Guide*.

For batch request messages, the payload contains at a minimum an element list which includes the following element entry:

| ElementName | TYPe | Required | Default | Range / Examples | Description |
|-------------|----------------|----------|---------|-------------------|--|
| :ItemList | Array of ASCII | Yes | No | 1 to Array max | A list of item names in which the client registers interest. |

Table 71: ItemList in Payload

12.3 Symbol List Behaviors

The client application can specify interest in getting data along with names belonging to the symbol list while requesting a symbol list. By specifying interest in data along with names the client application need not open individual items belonging to symbol list and the items will be opened and data will be provided. To do this, encode request message payload with an element list having an element entry specifying the symbol list behaviour. For further details, refer to *EMA 3.0.2 Java Edition Developers Guide*.

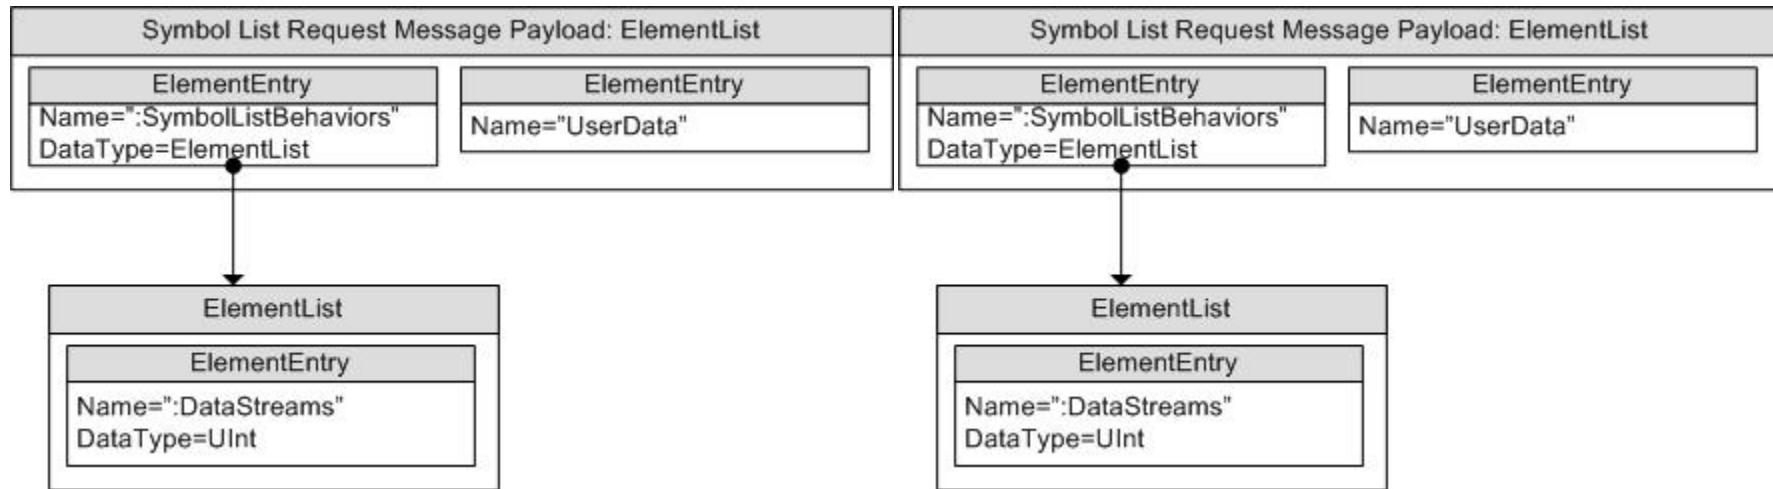


Figure 22: SymbolList Request Message Payload Specifying Symbol List Behavior

For Symbol List request messages specifying interest in data, the payload contains at a minimum an element list which includes the following element entry:

| ElementName | Type | Required | Default | Extensible Contents | Description |
|----------------------|-------------|----------|---|---------------------|--|
| :SymbolListBehaviors | ElementList | No | ElementList containing ElementEntry of DataStreams set to 0. | Yes | Indication of the expected data behavior of the individual items that will be opened from the symbol list. If this element is not present, individual streams will not be open. |

Table 72: Request Message Payload for Symbol List Domain Specifying Symbol List Behaviors

The following is the contents of the “:SymbolListBehaviors” element entry.

| ELEMENTNAME | TYPE | REQUIRED | DEFAULT | RANGE/EXAMPLES | DESCRIPTION |
|--------------|------|----------|---------|----------------|--|
| :DataStreams | UINT | No | 0 | 0 - 2 | <p>Indicates whether the consumer wants the individual items of the symbol list to be opened as streaming or non-streaming or not opened at all. For more information refer to the <i>EMA 3.0.2 Java Edition Developers Guide</i>. These are bit-masks:</p> <ul style="list-style-type: none"> • 0x0 (or if absent): The consumer is interested only in getting the names and no data on the individual items of the symbol list. • 0x1: The consumer is interested in getting the individual items of the symbol list opened as streaming. • 0x2: The consumer is interested in getting the individual items of the symbol list opened as snap-shots. |

Table 72: “:SymbolListBehaviors” ElementEntry Contents

© 2016 Thomson Reuters. All rights reserved. Republication or redistribution of Thomson Reuters content, including by framing or similar means, is prohibited without the prior written consent of Thomson Reuters. 'Thomson Reuters' and the Thomson Reuters logo are registered trademarks and trademarks of Thomson Reuters and its affiliated companies.

Document ID: EMAC302UMRDM.160
Date of issue: 22 July 2016



THOMSON REUTERS