

# Changing Properties

---



## Attributes

```

```

## Styles

```
<p style="color:red" />
```


**API** | *selection.attr*

Syntax:

*selection*  
    .attr(*attribute*, *value*)

## Example

selection

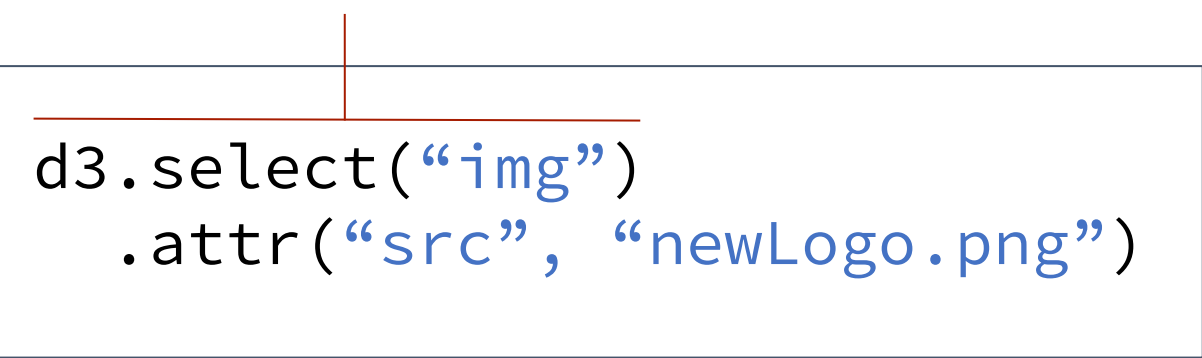

```
d3.select("img")  
  .attr("src", "newLogo.png")
```

The diagram illustrates a D3.js selection object. A label 'selection' is positioned above a light gray rectangular box. A vertical red line descends from the label, and a horizontal red line extends from the box to the left, meeting at a point that indicates the selection object's location relative to the code within the box.

## **API** | *selection.style*

Syntax:

```
selection  
  .style(property, value)
```

## Example

```
d3.select("p")  
  .style("color", "red")
```

# Changing Selected Nodes

*selection.attr*

*selection.style*