

Name: Nikhil Singh Subject: Scripting languages Class 5011 No .: 8 University 8011 No.: 2101131 End Texm Examination Practical.

```
Lhtm97
    Lhead?
    Ltitle > display data in table format Lititle>
  4/head7
  L60dy 7
  L? Php
         $con=mysql_connect("localhost", ("soot", "");
  if ( !B con)
    ¿ die ("not connected". mysql_exxxx());
 echock connection open >3. " L68/7";
$ Sidb=mysql_Select_d6(coust, & con);
 iF (1.$5186)
    die ( "not Faind", mysql-08808());
 echo " Database selected"." (68/7";
& query= "Select * From customer";
$ sql = mysel - quesy ($quesy);
  ocho" L table 608208 = (1) 7
    Ltho C-NOL/tho
    Lth7 C-Name L/th7
    1 th 7 item Purchased LIthis
```


```
Lth7 Mob-no L/th7
      4/t87
while ($ sow = mysql - Fetch - assay ($592))
 echo " Ltx7";
CCho "Ltd 7" B 80W [ C C _ no"]. "L/td7";
echo "Ltd7". $ 800 [ (C-namo)]. "L/td7".;
echo 11 (td7". Brow [ "item-purchason"]." [/td7";
Cho"Ltd7". $8000 ['mob_no']."4/627";
 echo UL/t87";
   echo "L/table7";
 4/60dy 7
 1/html7
```

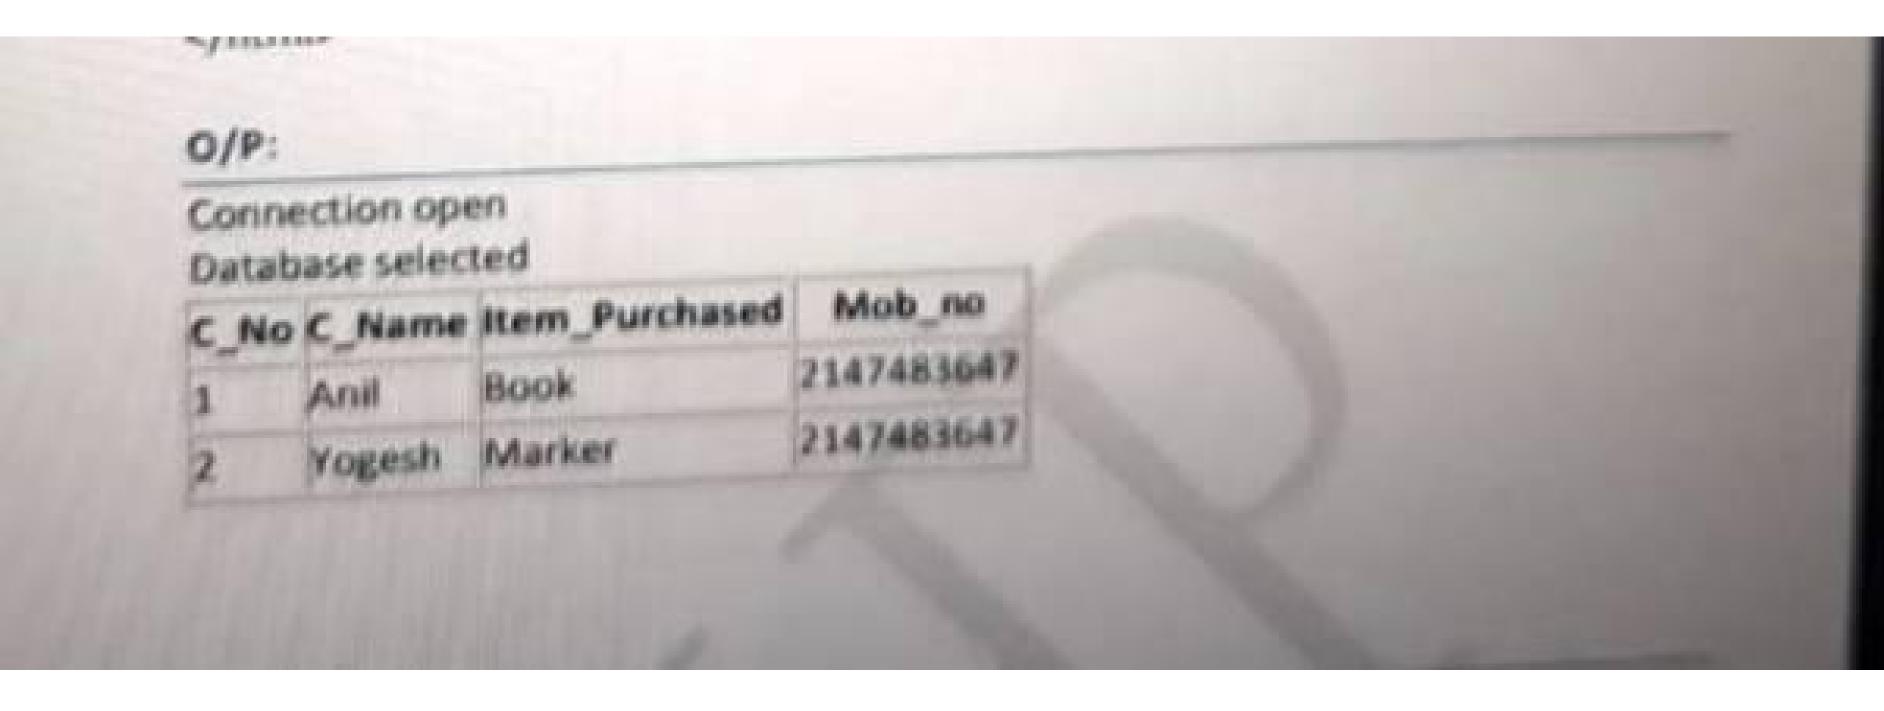

```
1 html>
    Lhead?
    LSCript SXC="https://aiux.googleapis.com/ajax/165/
                  jquesy/3.4.0/jquesy.min.js">
    L/SCRIPt7
 LSCript >
 $ (document). ready (function () {
 B ("#hide"). Click (Function () {
 B("P"). hide();
 3);
# C"#Show"). Click C Function () {
B ("P"). Show();
 5);
 3);
L/SCriptz
L/head 7
 Lbody7
Lh27 jquesy Show and hide example LIh2>
LP7 This is Nikhil Singh iquesy LIP7
Loutton id = a hide" > hide 4/button>
Lbutton id= ('Show) > Show L/button >
LIhtml7
```

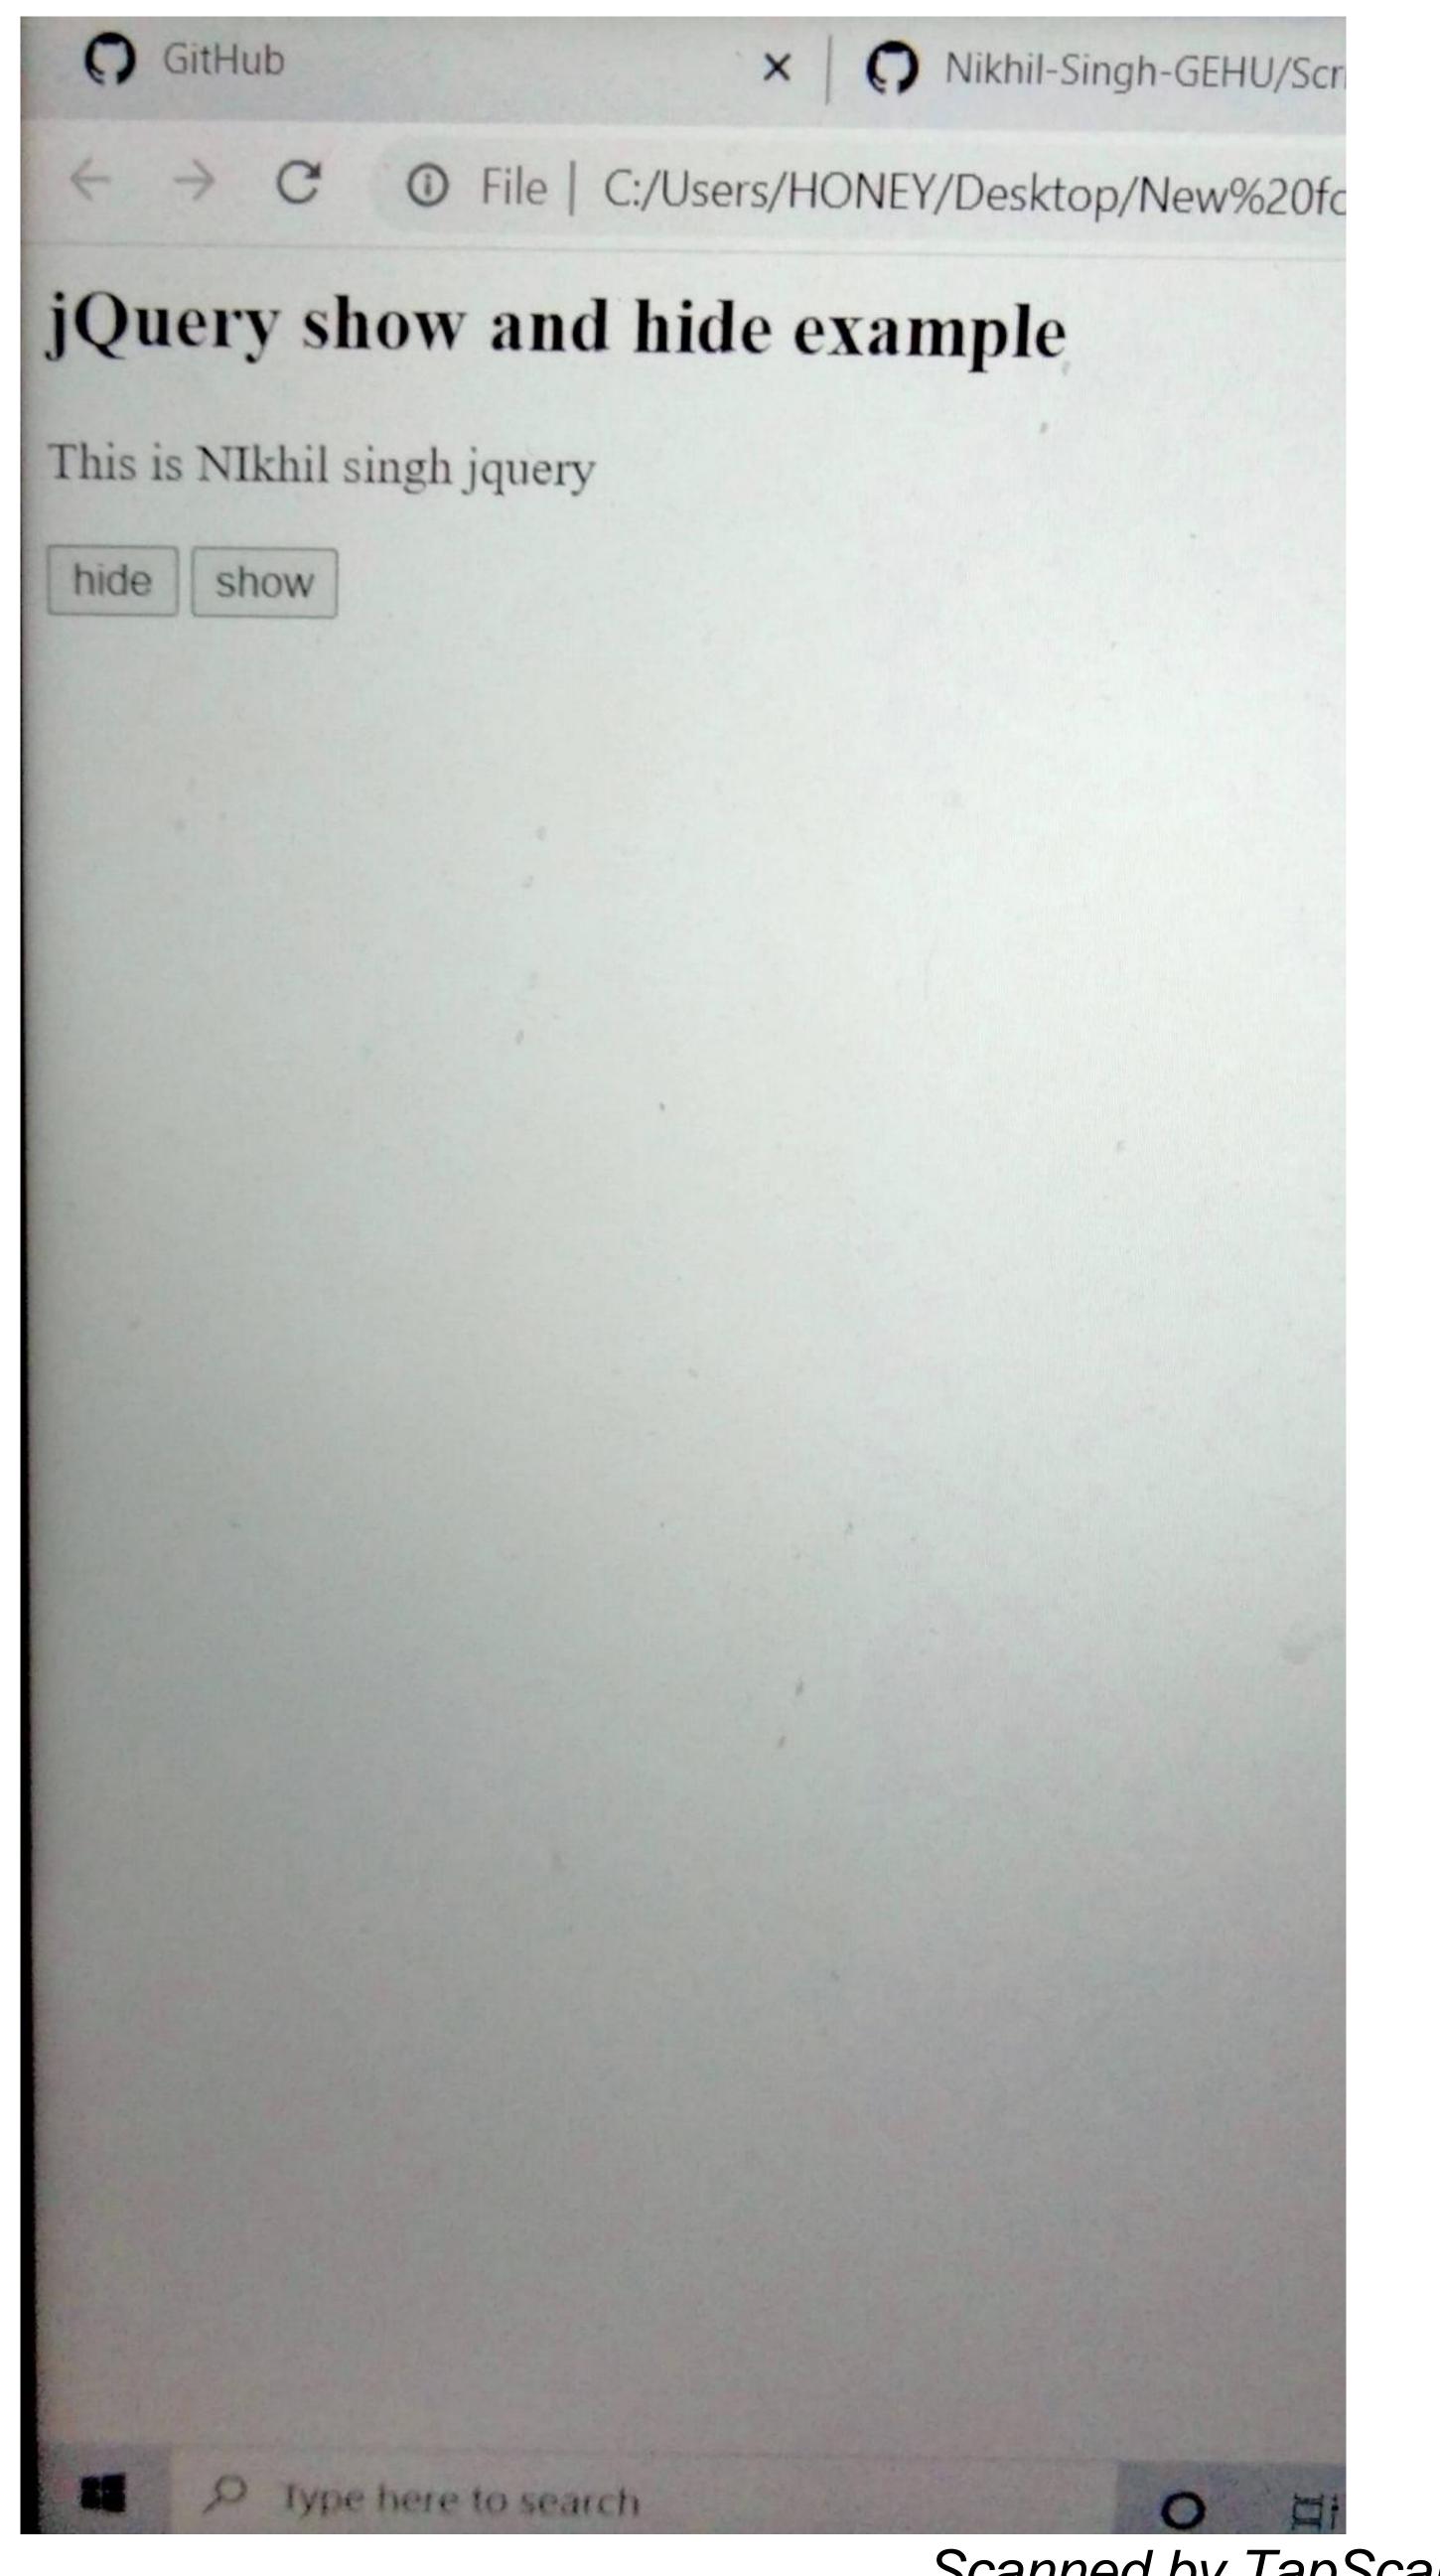

Scanned by TapScanner

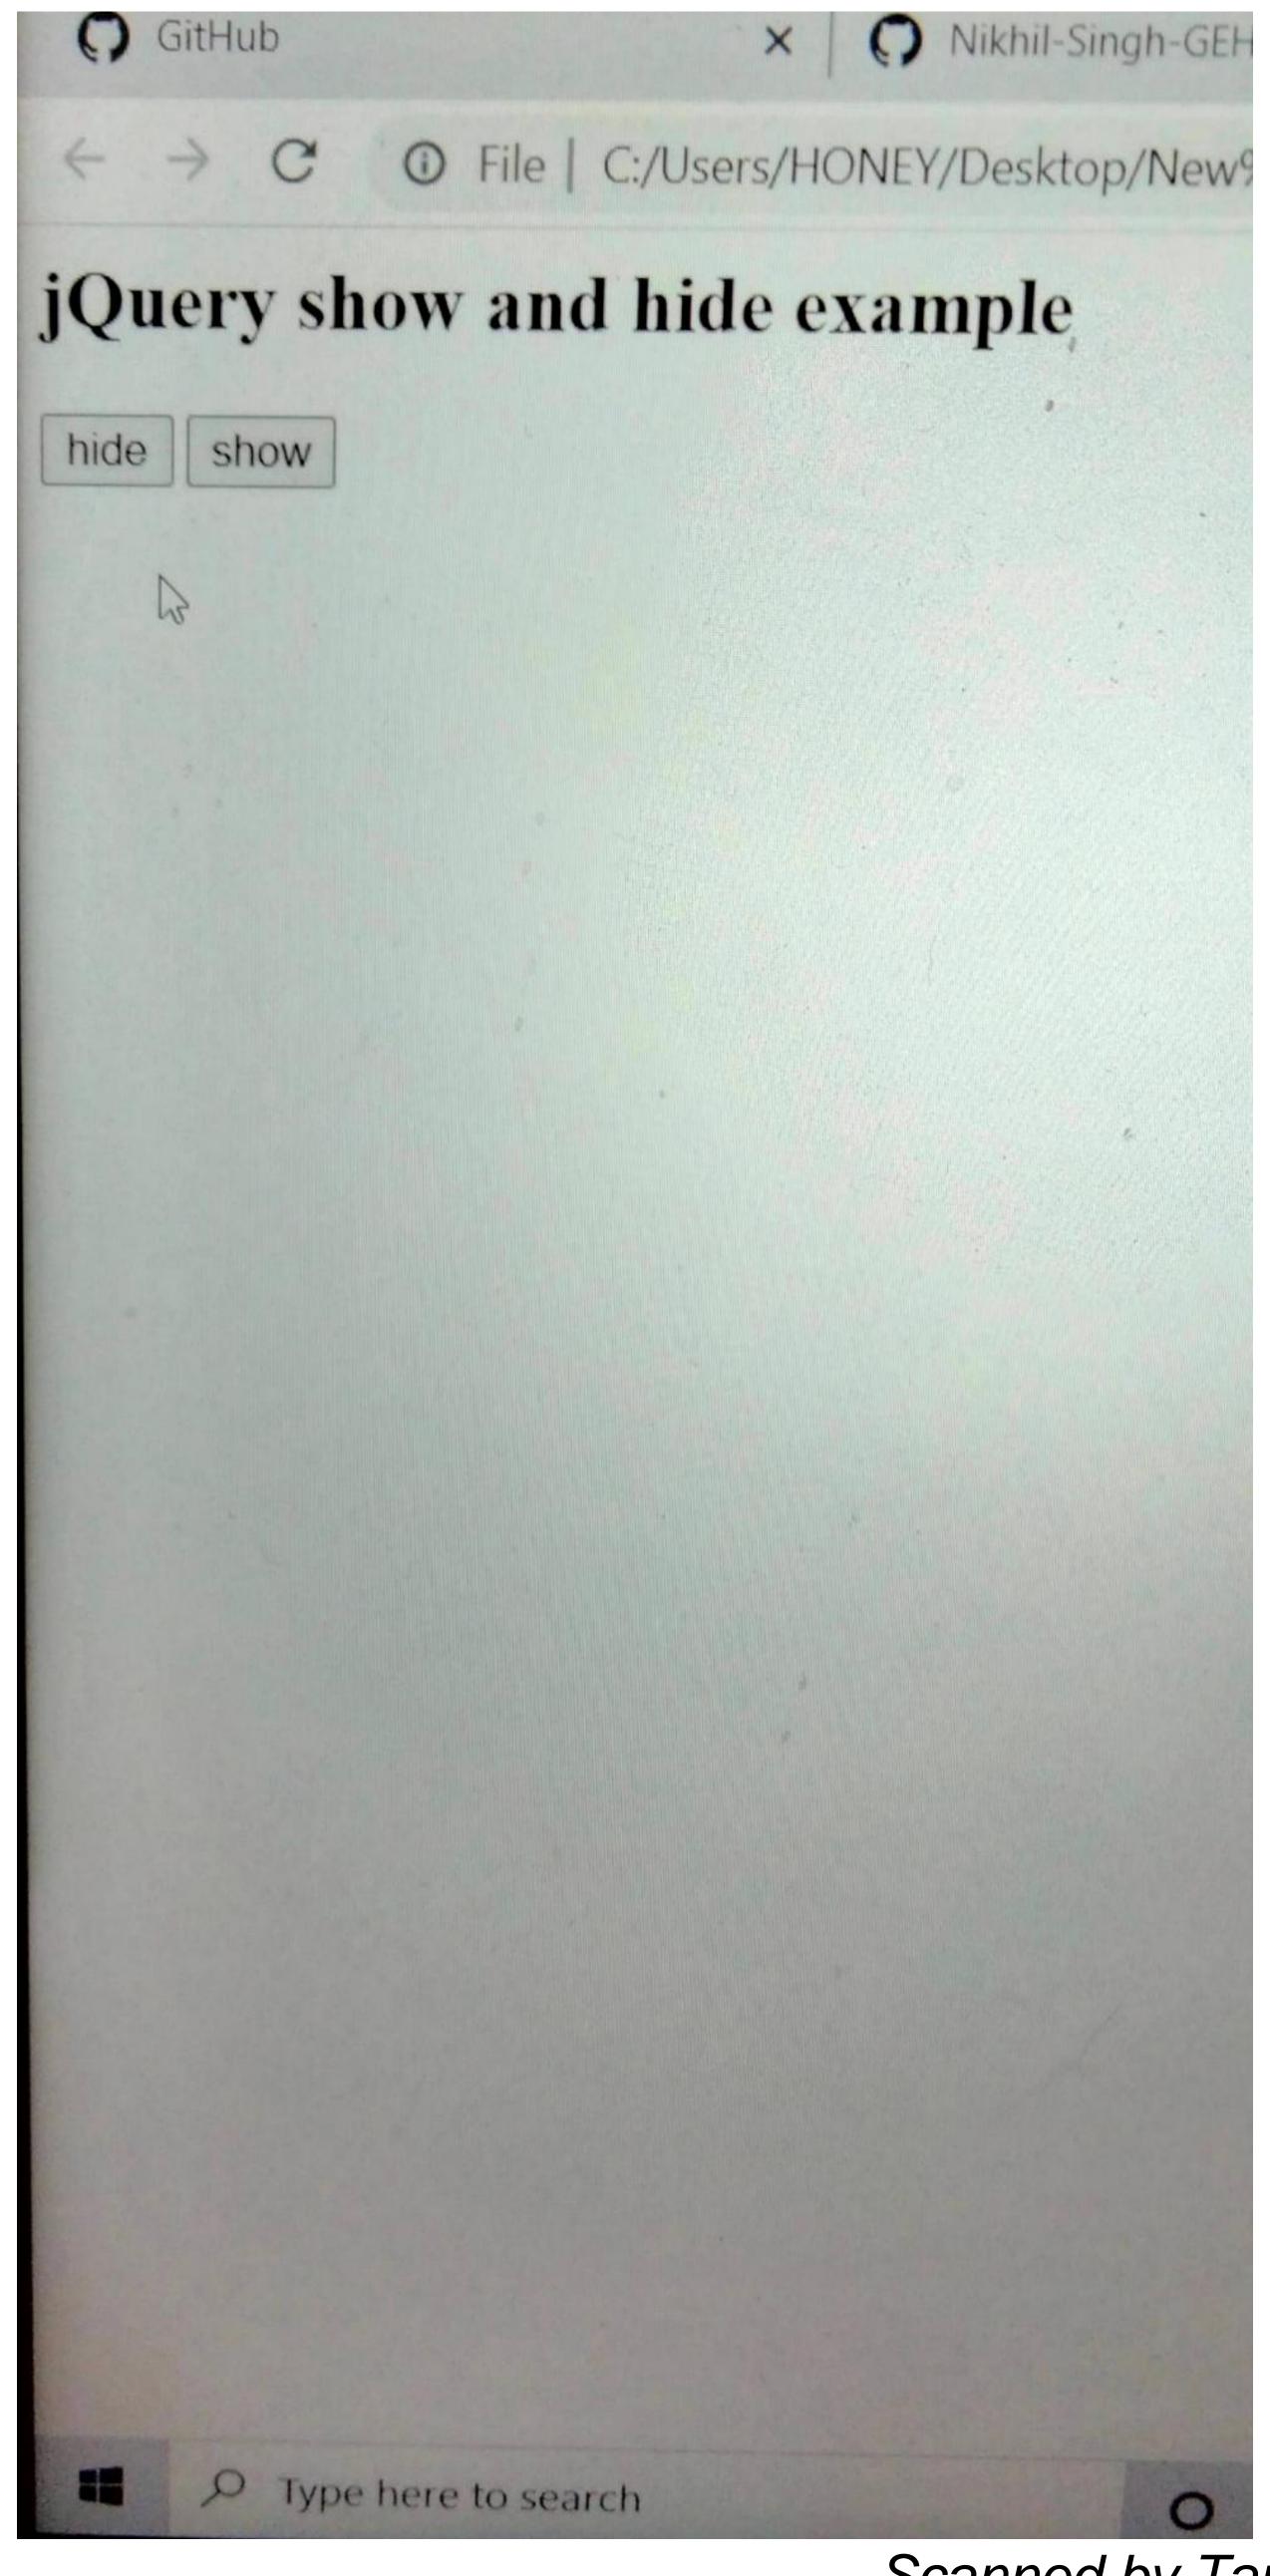

Scanned by TapScanner