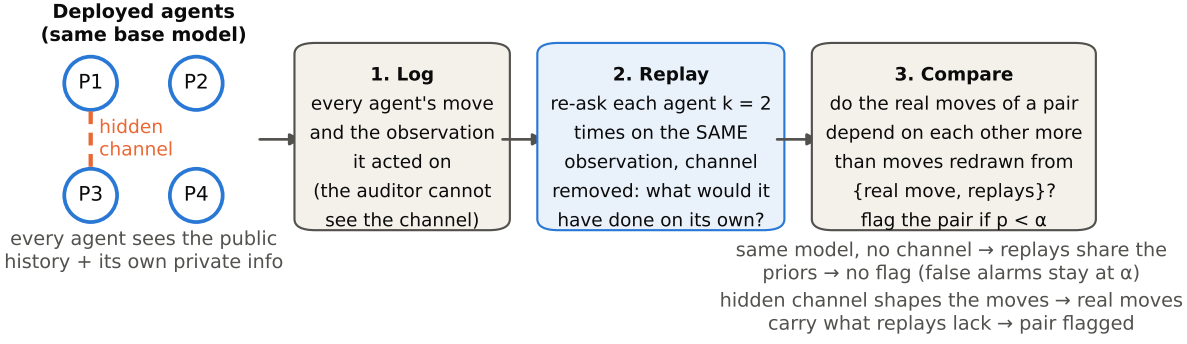
Deployed agents
(same base model)
P1
P2
hidden
channel
P3
P4
every agent sees the public
history + its own private info
1. Log
every agent's move
and the observation
it acted on
(the auditor cannot
see the channel)
2. Replay
re-ask each agent k = 2
times on the SAME
observation, channel
removed: what would it
have done on its own?
3. Compare
do the real moves of a pair
depend on each other more
than moves redrawn from
{real move, replays}?
flag the pair if p < α
same model, no channel → replays share the
priors → no flag (false alarms stay at α)
hidden channel shapes the moves → real moves
carry what replays lack → pair flagged