

BOOTCAMP: TRANSFORMACIÓN DIGITAL PARA LA DOCENCIA TÉCNICA

Nombre del participante:

Dina Erika Rosa de Jiménez

Institución:

Instituto Nacional de Osicala.

Tema: Primer API REST con Express.js


Link del Entregable:

<https://github.com/12deabrillindodia/APY>


Mates 23 de junio de 20026

1. Probar que el servidor este corriendo.....	3
2. GET - Todos los estudiantes	3
GET - Estudiante por ID.....	4
4. GET - Error 404.....	4
5. POST - Crear estudiante.....	5
6. POST - Error 400 (validación).....	5
7. PUT - Actualizar estudiante	6
8. PUT - Error 404	6
9. DELETE - Eliminar estudiante.....	7
10. DELETE - Error 404	7


1. Probar que el servidor este corriendo.

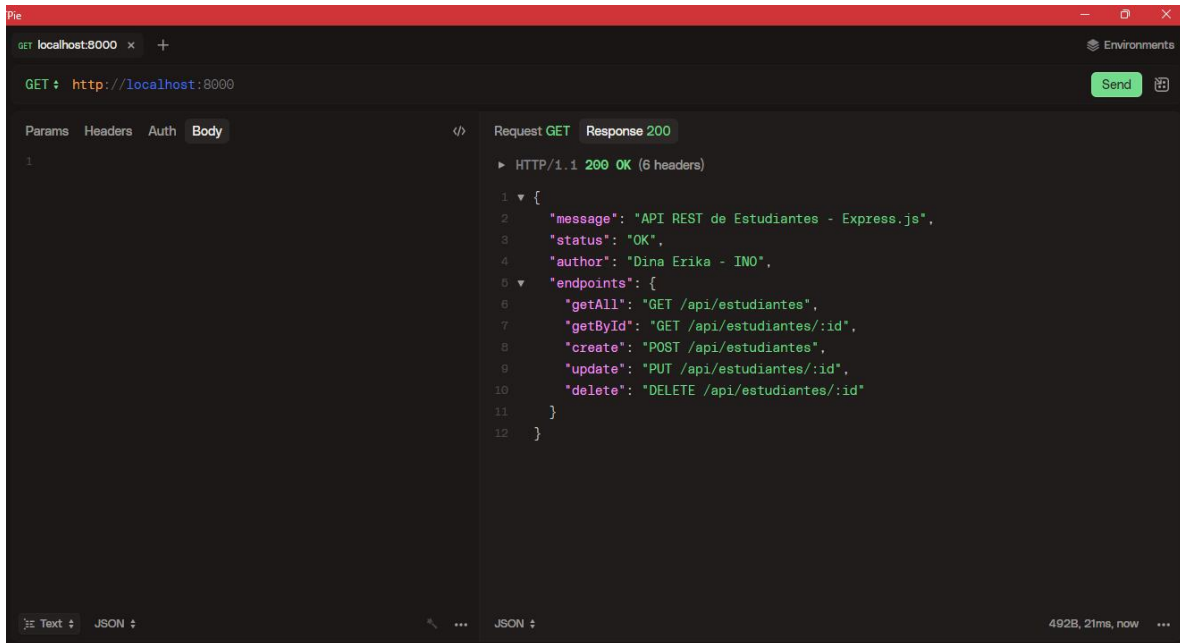

2. GET - Todos los estudiantes

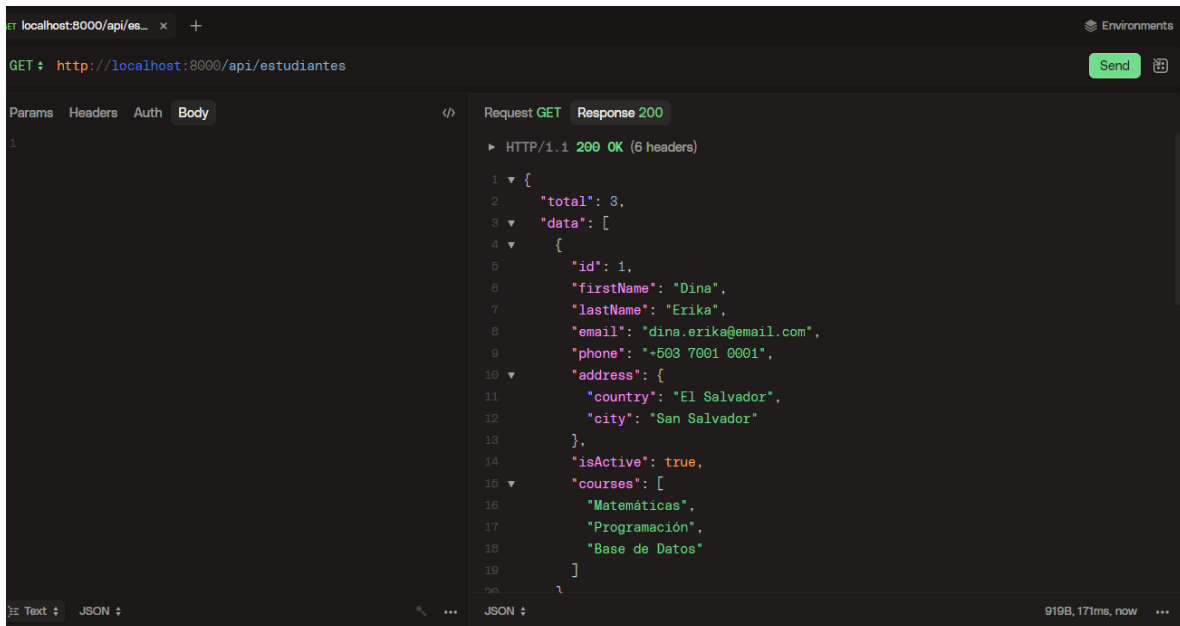

GET - Estudiante por ID

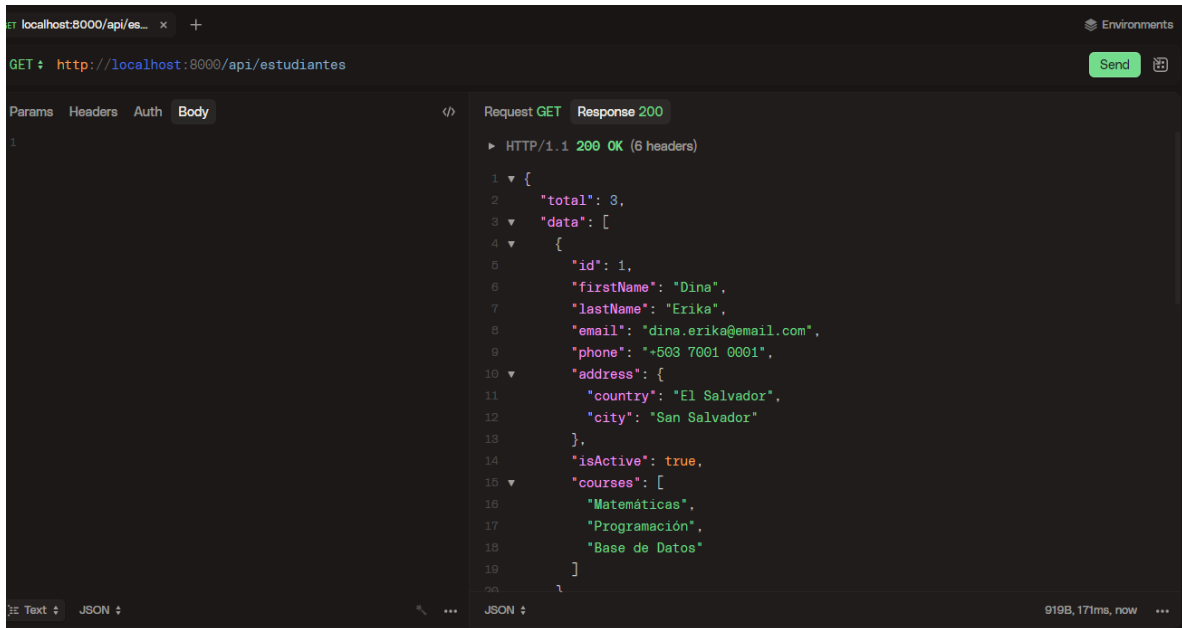

GET localhost:8000/api/es... x + Environments

GET: http://localhost:8000/api/estudiantes Send

Params Headers Auth Body


Request GET Response 200

HTTP/1.1 200 OK (6 headers)

```
1 {
2   "total": 3,
3   "data": [
4     {
5       "id": 1,
6       "firstName": "Dina",
7       "lastName": "Erika",
8       "email": "dina.erika@email.com",
9       "phone": "+503 7001 0001",
10      "address": {
11        "country": "El Salvador",
12        "city": "San Salvador"
13      },
14      "isActive": true,
15      "courses": [
16        "Matemáticas",
17        "Programación",
18        "Base de Datos"
19      ]
20    }
21  ]
22 }
```

Text JSON 919B, 171ms, now

4. GET - Error 404

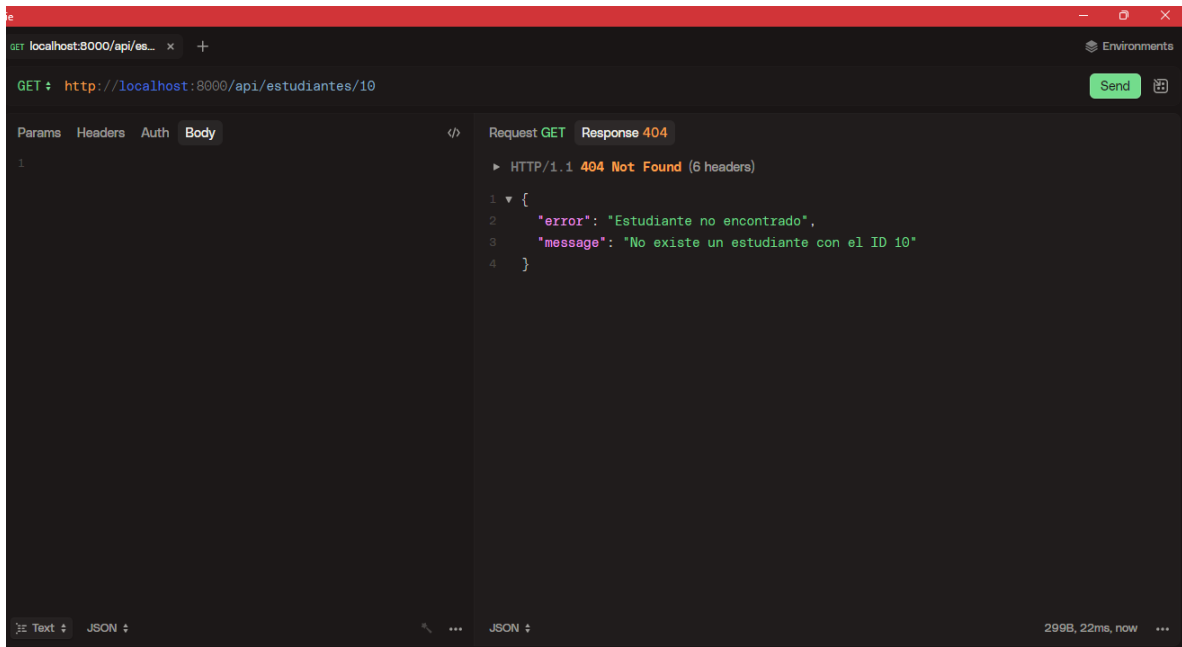

GET localhost:8000/api/es... x + Environments

GET: http://localhost:8000/api/estudiantes/10 Send

Params Headers Auth Body

Request GET Response 404

HTTP/1.1 404 Not Found (6 headers)

```
1 {
2   "error": "Estudiante no encontrado",
3   "message": "No existe un estudiante con el ID 10"
4 }
```

Text JSON 299B, 22ms, now

5. POST - Crear estudiante

The screenshot shows the HTTPie application with a POST request to `http://localhost:3000/api/estudiantes`. The request body is a JSON object representing a student. The response is a 201 status code, indicating successful creation.

```
POST http://localhost:3000/api/estudiantes
```

```
1 {
2   "firstName": "Carlos",
3   "lastName": "Ramirez",
4   "email": "carlos.ramirez@email.com",
5   "phone": "+503 7555 5555",
6   "address": {
7     "country": "El Salvador",
8     "city": "San Miguel"
9   },
10  "isActive": true,
11  "courses": ["Matemáticas", "Redes"]
12 }
```

```
1 HTTP/1.1 201 Created (6 headers)
2 {
3   "message": "Estudiante creado exitosamente",
4   "data": {
5     "id": 4,
6     "firstName": "Carlos",
7     "lastName": "Ramirez",
8     "email": "carlos.ramirez@email.com",
9     "phone": "+503 7555 5555",
10    "address": {
11      "country": "El Salvador",
12      "city": "San Miguel"
13    },
14    "isActive": true,
15    "courses": [
16      "Matemáticas",
17      "Redes"
18    ]
19  }
20 }
```

6. POST - Error 400 (validación)

The screenshot shows the HTTPie application with a POST request to `http://localhost:3000/api/estudiantes`. The request body is a JSON object with only the `firstName` field. The response is a 400 status code, indicating a bad request due to validation errors.

```
POST http://localhost:3000/api/estudiantes
```

```
1 {
2   "firstName": "Sofia"
3 }
```

```
1 HTTP/1.1 400 Bad Request (6 headers)
2 {
3   "error": "Datos incompletos",
4   "message": "Los campos firstName, lastName y email son obligatorios"
5 }
```

7. PUT - Actualizar estudiante

The screenshot shows a REST client interface with a PUT request to `http://localhost:3000/api/estudiantes/1`. The request body is a JSON object with `firstName: "Sofia"`. The response is a 200 OK status with a JSON body containing a success message and the updated student data.

```
PUT http://localhost:3000/api/estudiantes/1
```

```
{
  "firstName": "Sofia"
}
```

```
{
  "message": "Estudiante actualizado exitosamente",
  "data": {
    "id": 1,
    "firstName": "Sofia",
    "lastName": "de Jesús",
    "email": "natividad.jesus@email.com",
    "phone": "+503 7002 0002",
    "address": {
      "country": "El Salvador",
      "city": "San Salvador"
    },
    "isActive": true,
    "courses": [
      "Matemáticas",
      "Programación",
      "Base de Datos"
    ]
  }
}
```

8. PUT - Error 404


The screenshot shows a REST client interface with a PUT request to `http://localhost:3000/api/estudiantes/10`. The request body is a JSON object with `firstName: "Sofia"`. The response is a 404 Not Found status with a JSON body containing an error message.

```
PUT http://localhost:3000/api/estudiantes/10
```

```
{
  "firstName": "Sofia"
}
```

```
{
  "error": "Estudiante no encontrado",
  "message": "No existe un estudiante con el ID 10"
}
```

9. DELETE - Eliminar estudiante

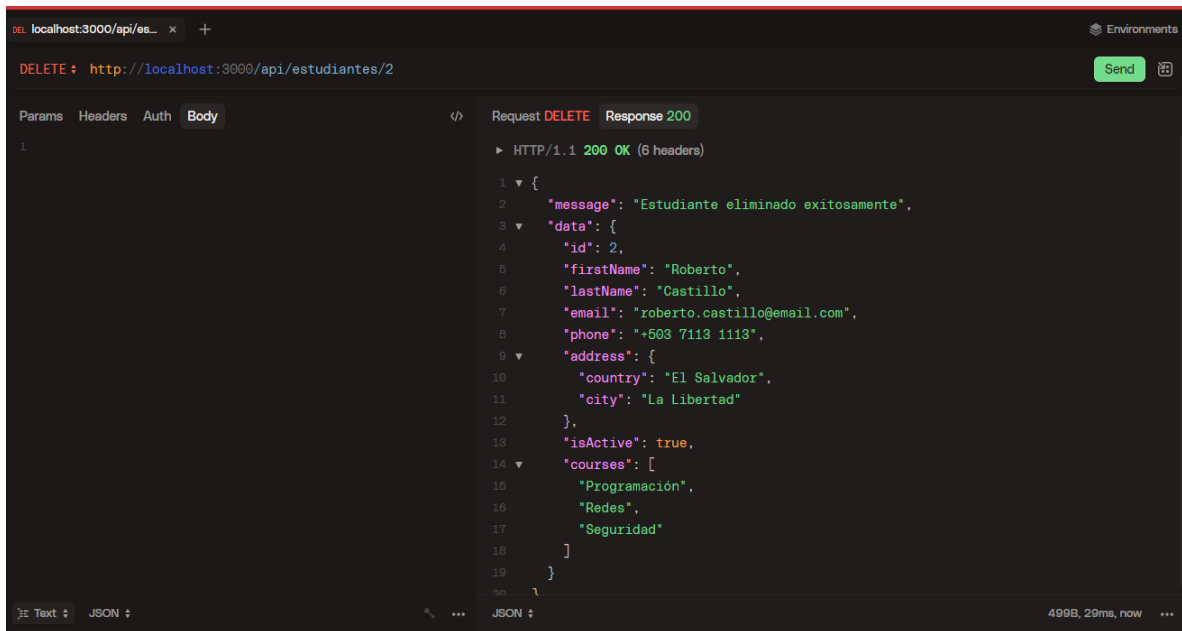

DELETE `http://localhost:3000/api/estudiantes/2` Send

Params Headers Auth **Body**

1


Request **DELETE** Response **200**

▶ HTTP/1.1 200 OK (6 headers)

```
1 {
2   "message": "Estudiante eliminado exitosamente",
3   "data": {
4     "id": 2,
5     "firstName": "Roberto",
6     "lastName": "Castillo",
7     "email": "roberto.castillo@email.com",
8     "phone": "+503 7113 1113",
9     "address": {
10      "country": "El Salvador",
11      "city": "La Libertad"
12    },
13     "isActive": true,
14     "courses": [
15       "Programación",
16       "Redes",
17       "Seguridad"
18     ]
19   }
20 }
```

JSON 499B, 29ms, now

10. DELETE - Error 404

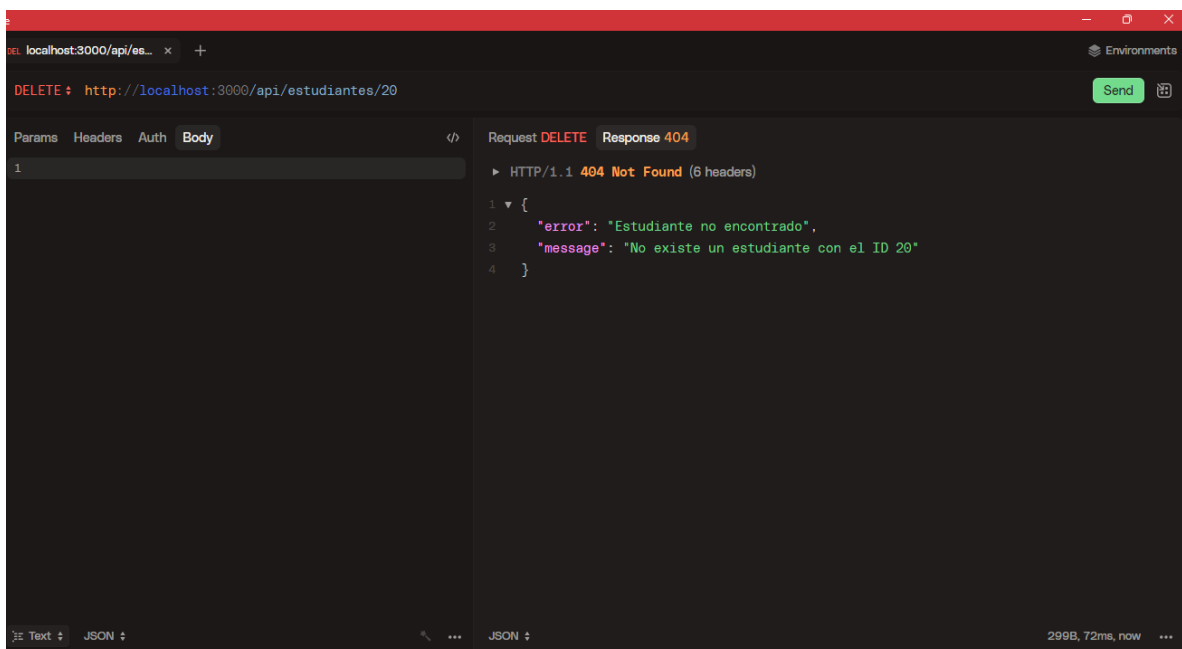

DELETE `http://localhost:3000/api/estudiantes/20` Send

Params Headers Auth **Body**

1

Request **DELETE** Response **404**

▶ HTTP/1.1 404 Not Found (6 headers)

```
1 {
2   "error": "Estudiante no encontrado",
3   "message": "No existe un estudiante con el ID 20"
4 }
```

JSON 299B, 72ms, now