

Snort 3 User Manual

REVISION HISTORY			
NUMBER	DATE	DESCRIPTION	NAME

Contents

1	Overview	1
1.1	First Steps	2
1.2	Configuration	3
1.2.1	Environment	4
1.2.2	Command Line	4
1.2.3	Configuration File	4
1.2.4	Rules	5
1.2.5	Converting Your 2.X Configuration	5
1.3	Output	6
1.3.1	Basic Statistics	6
1.3.2	Alerts	6
1.3.3	Files and Paths	6
1.3.4	Performance Statistics	7
2	Concepts	7
2.1	Terminology	7
2.2	Modules	8
2.3	Parameters	9
2.4	Plugins	10
2.5	Operation	10
2.5.1	Snort 2 Processing	11
2.5.2	Snort 3 Processing	11
2.6	Rules	11
2.7	Pattern Matching	12
2.7.1	Rule Groups	12
2.7.2	Fast Patterns	13
2.7.3	Rule Evaluation	13
3	Tutorial	13
3.1	Dependencies	13
3.2	Building	14
3.3	Running	15
3.4	Tips	15
3.5	Help	17
3.6	Common Errors	17
3.7	Gotchas	18

4	Usage	19
4.1	Environment	19
4.2	Help	19
4.3	Sniffing and Logging	20
4.4	Configuration	20
4.5	IDS mode	21
4.6	Plugins	21
4.7	Output Files	22
4.8	DAQ Alternatives	22
4.9	Logger Alternatives	23
4.10	Shell	23
4.11	Signals	23
5	Features	24
5.1	AppId	24
5.1.1	Overview	24
5.1.2	Dependency Requirements	24
5.1.3	Configuration	25
5.1.4	Session Application Identifiers	26
5.1.5	AppId Usage Statistics	26
5.1.6	Open Detector Package (ODP) Installation	26
5.1.7	User Created Application Detectors	27
5.1.8	Application Detector Creation Tool	27
5.2	Binder	28
5.3	DCE Inspectors	28
5.3.1	Overview	28
5.3.2	Quick Guide	29
5.3.3	Target Based	29
5.3.4	Reassembling	30
5.3.5	SMB	30
	Finger Print Policy	30
	File Inspection	31
5.3.6	TCP	31
5.3.7	UDP	31
5.3.8	Rule Options	32
	dce_iface	32
	dce_opnum	33
	dce_stub_data	33
	byte_test and byte_jump	34

5.4	File Processing	34
5.4.1	Overview	34
5.4.2	Quick Guide	34
5.4.3	Pre-packaged File Magic Rules	35
5.4.4	File Policy	36
5.4.5	File Capture	36
5.4.6	File Events	36
5.5	High Availability	37
5.5.1	HA	37
5.5.2	Connector	37
	Connector (parent plugin class)	37
	TcpConnector	38
	FileConnector	38
5.5.3	Side Channel	39
5.6	HTTP Inspector	40
5.6.1	Overview	40
5.6.2	Configuration	41
	request_depth and response_depth	41
	gzip	41
	normalize_utf	41
	decompress_pdf	41
	decompress_swf	41
	normalize_javascript	42
	URI processing	42
5.6.3	Detection rules	43
	http_uri and http_raw_uri	44
	http_header and http_raw_header	45
	http_trailer and http_raw_trailer	45
	http_cookie and http_raw_cookie	45
	http_client_body	45
	http_method	45
	http_stat_code	45
	http_stat_msg	45
	http_version	46
	http_raw_request and http_raw_status	46
	file_data and packet data	46
5.6.4	Timing issues and combining rule options	46
5.7	Performance Monitor	48
5.7.1	Overview	48

5.7.2	Base Tracker	48
5.7.3	Flow Tracker	49
5.7.4	FlowIP Tracker	49
5.7.5	CPU Tracker	49
5.8	Sensitive Data Filtering	49
5.8.1	Hyperscan	49
5.8.2	Syntax	49
	Pattern	49
	Threshold	50
	Obfuscating Credit Cards and Social Security Numbers	50
5.8.3	Example	50
5.8.4	Caveats	51
5.9	Wizard	51
6	Basic Modules	51
6.1	active	52
6.2	alerts	52
6.3	attribute_table	52
6.4	classifications	53
6.5	daq	53
6.6	decode	54
6.7	detection	54
6.8	event_filter	55
6.9	event_queue	55
6.10	high_availability	56
6.11	host_cache	56
6.12	host_tracker	56
6.13	hosts	57
6.14	ips	57
6.15	latency	57
6.16	memory	58
6.17	network	58
6.18	output	59
6.19	packets	59
6.20	process	60
6.21	profiler	60
6.22	rate_filter	61
6.23	references	61
6.24	rule_state	61
6.25	search_engine	61
6.26	side_channel	62
6.27	snort	63
6.28	suppress	67

7	Codec Modules	67
7.1	arp	67
7.2	auth	67
7.3	ciscometadata	67
7.4	eapol	68
7.5	erspan2	68
7.6	erspan3	68
7.7	esp	68
7.8	eth	68
7.9	fabricpath	69
7.10	gre	69
7.11	gtp	69
7.12	icmp4	69
7.13	icmp6	70
7.14	igmp	71
7.15	ipv4	71
7.16	ipv6	72
7.17	mpls	73
7.18	pgm	73
7.19	pppoe	73
7.20	tcp	74
7.21	token_ring	74
7.22	udp	75
7.23	vlan	75
7.24	wlan	75
8	Connector Modules	76
8.1	file_connector	76
8.2	tcp_connector	76
9	Inspector Modules	76
9.1	appid	77
9.2	arp_spoof	79
9.3	back_orifice	80
9.4	binder	80
9.5	data_log	81
9.6	dce_http_proxy	81
9.7	dce_http_server	81
9.8	dce_smb	82

9.9	dce_tcp	85
9.10	dce_udp	87
9.11	dnp3	88
9.12	dns	88
9.13	dpx	89
9.14	file_id	89
9.15	file_log	90
9.16	ftp_client	90
9.17	ftp_data	91
9.18	ftp_server	91
9.19	gtp_inspect	92
9.20	http_global	93
9.21	http_inspect	95
9.22	http_server	99
9.23	imap	101
9.24	modbus	102
9.25	normalizer	102
9.26	packet_capture	105
9.27	perf_monitor	105
9.28	pop	106
9.29	port_scan	106
9.30	port_scan_global	108
9.31	reputation	108
9.32	rpc_decode	109
9.33	sip	109
9.34	smtp	111
9.35	ssh	113
9.36	ssl	114
9.37	stream	115
9.38	stream_file	117
9.39	stream_icmp	117
9.40	stream_ip	117
9.41	stream_tcp	119
9.42	stream_udp	121
9.43	stream_user	121
9.44	telnet	122
9.45	wizard	122

10 IPS Action Modules	123
10.1 react	123
10.2 reject	123
10.3 rewrite	123
11 IPS Option Modules	123
11.1 ack	123
11.2 appids	124
11.3 asn1	124
11.4 base64_decode	124
11.5 bufferlen	124
11.6 byte_extract	125
11.7 byte_jump	125
11.8 byte_test	126
11.9 classtype	126
11.10content	126
11.11cvs	127
11.12dce_iface	127
11.13dce_opnum	127
11.14dce_stub_data	127
11.15detection_filter	127
11.16dnp3_data	127
11.17dnp3_func	128
11.18dnp3_ind	128
11.19dnp3_obj	128
11.20dsize	128
11.21file_data	128
11.22file_type	128
11.23flags	129
11.24flow	129
11.25flowbits	129
11.26fragbits	129
11.27fragoffset	130
11.28gid	130
11.29gtp_info	130
11.30gtp_type	130
11.31gtp_version	130
11.32http_client_body	130
11.33http_cookie	131

11.34http_header	131
11.35http_method	131
11.36http_raw_cookie	131
11.37http_raw_header	131
11.38http_raw_request	131
11.39http_raw_status	131
11.40http_raw_trailer	132
11.41http_raw_uri	132
11.42http_stat_code	132
11.43http_stat_msg	132
11.44http_trailer	132
11.45http_uri	132
11.46http_version	133
11.47icmp_id	133
11.48icmp_seq	133
11.49icode	133
11.50id	133
11.51ip_proto	133
11.52ipopts	134
11.53isdataat	134
11.54itype	134
11.55md5	134
11.56metadata	134
11.57modbus_data	135
11.58modbus_func	135
11.59modbus_unit	135
11.60msg	135
11.61pcre	135
11.62pkt_data	135
11.63pkt_num	135
11.64priority	136
11.65raw_data	136
11.66reference	136
11.67regex	136
11.68rem	136
11.69replace	137
11.70rev	137
11.71rpc	137
11.72sd_pattern	137

11.73seq	137
11.74session	138
11.75sha256	138
11.76sha512	138
11.77sid	138
11.78sip_body	138
11.79sip_header	139
11.80sip_method	139
11.81sip_stat_code	139
11.82so	139
11.83soid	139
11.84ssl_state	139
11.85ssl_version	140
11.86stream_reassemble	140
11.87stream_size	141
11.88tag	141
11.89tos	141
11.90ttl	141
11.91urg	141
11.92window	142
12 Search Engine Modules	142
13 SO Rule Modules	142
14 Logger Modules	142
14.1 alert_csv	142
14.2 alert_ex	142
14.3 alert_fast	143
14.4 alert_full	143
14.5 alert_sfsocket	143
14.6 alert_syslog	143
14.7 alert_unixsock	144
14.8 log_codecs	144
14.9 log_hext	144
14.10log_pcap	144
14.11unified2	144

15 DAQ Modules	145
15.1 Building the DAQ Library and DAQ Modules	145
15.2 PCAP Module	145
15.3 AFPACKET Module	146
15.4 NFQ Module	146
15.5 IPQ Module	147
15.6 IPFW Module	147
15.7 Dump Module	148
15.8 Netmap Module	148
15.8.1 FreeBSD	148
15.8.2 Linux	149
15.9 Notes on iptables	149
15.10 Notes on FreeBSD::IPFW	150
15.11 Notes on OpenBSD::IPFW	152
15.12 Socket Module	152
15.13 File Module	153
15.14 Hext Module	153
16 Snort 3 vs Snort 2	154
16.1 Build Options	154
16.2 Command Line	154
16.3 Conf File	155
16.4 Rules	156
16.5 Output	157
16.6 HTTP Profiles	157
16.7 SDF Preprocessor	158
17 Snort2Lua	159
17.1 Snort2Lua Command Line	159
17.1.1 Usage: snort2lua [OPTIONS]... -c <snort_conf> ...	159
Options:	159
Required option:	160
Default values:	160
17.2 Known Problems	161
17.3 Usage	161

18 Extending Snort	162
18.1 Plugins	162
18.2 Modules	162
18.3 Inspectors	163
18.4 Codecs	163
18.5 IPS Actions	165
18.6 Developers Guide	166
18.7 Piglet Test Harness	166
18.8 Piglet Lua API	166
18.8.1 Plugin Instances	166
Interface Objects	168
19 Coding Style	172
19.1 General	173
19.2 C++ Specific	173
19.3 Naming	173
19.4 Comments	174
19.5 Logging	174
19.6 Types	174
19.7 Macros (aka defines)	175
19.8 Formatting	175
19.9 Headers	176
19.10 Warnings	177
19.11 Uncrustify	177
20 Reference	178
20.1 Build Options	178
20.2 Environment Variables	178
20.3 Command Line Options	178
20.4 Configuration	182
20.5 Counts	208
20.6 Generators	225
20.7 Builtin Rules	227
20.8 Command Set	242
20.9 Signals	242
20.10 Configuration Changes	243
20.11 Module Listing	247
20.12 Plugin Listing	254
20.13 Bugs	260

20.13.1 Build	260
20.13.2 Config	260
20.13.3 Rules	260
20.13.4 snort2lua	261
20.13.5 Runtime	261



```
/*-      -*> Snort++ <*-  
o"  )~   Version 3.0.0-a4 (Build 225) from 2.9.8-383  
''''     By Martin Roesch & The Snort Team  
          http://snort.org/contact#team  
          Copyright (C) 2014-2016 Cisco and/or its affiliates. All rights reserved.  
          Copyright (C) 1998-2013 Sourcefire, Inc., et al.
```

1 Overview

Snort 3.0 is an updated version of the Snort Intrusion Prevention System (IPS) which features a new design that provides a superset of Snort 2.X functionality with better throughput, detection, scalability, and usability. Some of the key features of Snort 3.0 are:

- Support multiple packet processing threads
 - Use a shared configuration and attribute table
 - Autodetect services for portless configuration
 - Modular design
 - Plugin framework with over 200 plugins
 - More scalable memory profile
 - LuaJIT configuration, loggers, and rule options
 - Hyperscan support
 - Rewritten TCP handling
 - New rule parser and syntax
 - Service rules like alert http
 - Rule "sticky" buffers
-

- Way better SO rules
- New HTTP inspector
- New performance monitor
- New time and space profiling
- New latency monitoring and enforcement
- Piglets to facilitate component testing
- Inspection Events
- Automake and Cmake
- Autogenerate reference documentation

Additional features are on the road map:

- Use a shared network map
- Support hardware offload for fast pattern acceleration
- Provide support for DPDK and ODP
- Support pipelining of packet processing
- Support proxy mode
- Multi-tenant support
- Incremental reload
- New serialization of perf data and events
- Enhanced rule processing
- Windows support
- Anomaly detection
- and more!

The remainder of this section provides a high level survey of the inputs, processing, and outputs available with Snort 3.0.

Snort++ is the project that is creating Snort 3.0. In this manual "Snort" or "Snort 3" refers to the 3.0 version and earlier versions will be referred to as "Snort 2" where the distinction is relevant.

1.1 First Steps

Snort can be configured to perform complex packet processing and deep packet inspection but it is best start simply and work up to more interesting tasks. Snort won't do anything you didn't specifically ask it to do so it is safe to just try things out and see what happens. Let's start by just running Snort with no arguments:

```
$ snort
```

That will output usage information including some basic help commands. You should run all of these commands now to see what is available:

```
$ snort -V
$ snort -?
$ snort --help
```


Note that Snort has extensive command line help available so if anything below isn't clear, there is probably a way to get the exact information you need from the command line.

Now let's examine the packets in a capture file (pcap):

```
$ snort -r a.pcap
```

Snort will decode and count the packets in the file and output some statistics. Note that the output excludes non-zero numbers so it is easy to see what is there.

You may have noticed that there are command line options to limit the number of packets examined or set a filter to select particular packets. Now is a good time to experiment with those options.

If you want to see details on each packet, you can dump the packets to console like this:

```
$ snort -r a.pcap -L dump
```

Add the `-d` option to see the TCP and UDP payload. Now let's switch to live traffic. Replace `eth0` in the below command with an available network interface:

```
$ snort -i eth0 -L dump
```

Unless the interface is taken down, Snort will just keep running, so enter Control-C to terminate or use the `-n` option to limit the number of packets.

Generally it is better to capture the packets for later analysis like this:

```
$ snort -i eth0 -L pcap -n 10
```

Snort will write 10 packets to `log.pcap.#` where `#` is a timestamp value. You can read these back with `-r` and `dump` to console or `pcap` with `-L`. You get the idea.

Note that you can do similar things with other tools like `tcpdump` or `Wireshark` however these commands are very useful when you want to check your Snort setup.

The examples above use the default pcap DAQ. Snort supports non-pcap interfaces as well via the DAQ (data acquisition) library. Other DAQs provide additional functionality such as inline operation and/or higher performance. There are even DAQs that support raw file processing (ie without packets), socket processing, and plain text packets. To load external DAQ libraries and see available DAQs or select a particular DAQ use one of these commands:

```
$ snort --daq-dir <path> --daq-list  
$ snort --daq-dir <path> --daq <type>
```

Be sure to put the `--daq-dir` option ahead of the `--daq-list` option or the external DAQs won't appear in the list.

To leverage intrusion detection features of Snort you will need to provide some configuration details. The next section breaks down what must be done.

1.2 Configuration

Effective configuration of Snort is done via the environment, command line, a Lua configuration file, and a set of rules.

Note that backwards compatibility with Snort 2 was sacrificed to obtain new and improved functionality. While Snort 3 leverages some of the Snort 2 code base, a lot has changed. The configuration of Snort 3 is done with Lua, so your old conf won't work as is. Rules are still text based but with syntax tweaks, so your 2.X rules must be fixed up. However, `snort2lua` will help you convert your conf and rules to the new format.

1.2.1 Environment

LUA_PATH must be set based on your install:

```
LUA_PATH=$install_prefix/include/snort/lua/\?.lua\;\;
```

SNORT_LUA_PATH must be set to load auxiliary configuration files if you use the default snort.lua. For example:

```
export SNORT_LUA_PATH=$install_prefix/etc/snort
```

1.2.2 Command Line

A simple command line might look like this:

```
snort -c snort.lua -R cool.rules -r some.pcap -A cmg
```

To understand what that does, you can start by just running snort with no arguments by running `snort --help`. Help for all configuration and rule options is available via a suitable command line. In this case:

-c snort.lua is the main configuration file. This is a Lua script that is executed when loaded.

-R cool.rules contains some detection rules. You can write your own or obtain them from Talos (native 3.0 rules are not yet available from Talos so you must convert them with `snort2lua`). You can also put your rules directly in your configuration file.

-r some.pcap tells Snort to read network traffic from the given packet capture file. You could instead use `-i eth0` to read from a live interface. There many other options available too depending on the DAQ you use.

-A cmg says to output intrusion events in "cmg" format, which has basic header details followed by the payload in hex and text.

Note that you add to and/or override anything in your configuration file by using the `--lua` command line option. For example:

```
--lua 'ips = { enable_builtin_rules = true }'
```

will load the built-in decoder and inspector rules. In this case, `ips` is overwritten with the config you see above. If you just want to change the config given in your configuration file you would do it like this:

```
--lua 'ips.enable_builtin_rules = true'
```

1.2.3 Configuration File

The configuration file gives you complete control over how Snort processes packets. Start with the default `snort.lua` included in the distribution because that contains some key ingredients. Note that most of the configurations look like:

```
stream = { }
```

This means enable the stream module using internal defaults. To see what those are, you could run:

```
snort --help-config stream
```

Snort is organized into a collection of builtin and plugin modules. If a module has parameters, it is configured by a Lua table of the same name. For example, we can see what the active module has to offer with this command:

```
$ snort --help-module active
```

```
What: configure responses
```

```
Type: basic
```

Configuration:

```
int active.attempts = 0: number of TCP packets sent per response (with
varying sequence numbers) { 0:20 }

string active.device: use 'ip' for network layer responses or 'eth0' etc
for link layer

string active.dst_mac: use format '01:23:45:67:89:ab'

int active.max_responses = 0: maximum number of responses { 0: }

int active.min_interval = 255: minimum number of seconds between
responses { 1: }
```

This says active is a basic module that has several parameters. For each, you will see:

```
type module.name = default: help { range }
```

For example, the active module has a max_responses parameter that takes non-negative integer values and defaults to zero. We can change that in Lua as follows:

```
active = { max_responses = 1 }
```

or:

```
active = { }
active.max_responses = 1
```

If we also wanted to limit retries to at least 5 seconds, we could do:

```
active = { max_responses = 1, min_interval = 5 }
```

1.2.4 Rules

Rules determine what Snort is looking for. They can be put directly in your Lua configuration file with the ips module, on the command line with --lua, or in external files. Generally you will have many rules obtained from various sources such as Talos and loading external files is the way to go so we will summarize that here. Add this to your Lua configuration:

```
ips = { include = 'rules.txt' }
```

to load the external rules file named rules.txt. You can only specify one file this way but rules files can include other rules files with the include statement. In addition you can load rules like:

```
$ sort -c snort.lua -R rules.txt
```

You can use both approaches together.

1.2.5 Converting Your 2.X Configuration

If you have a working 2.X configuration snort2lua makes it easy to get up and running with Snort 3. This tool will convert your configuration and/or rules files automatically. You will want to clean up the results and double check that it is doing exactly what you need.

```
snort2lua -c snort.conf
```

The above command will generate snort.lua based on your 2.X configuration. For more information and options for more sophisticated use cases, see the Snort2Lua section later in the manual.

1.3 Output

Snort can produce quite a lot of data. In the following we will summarize the key aspects of the core output types. Additional data such as from appid is covered later.

1.3.1 Basic Statistics

At shutdown, Snort will output various counts depending on configuration and the traffic processed. Generally, you may see:

- Packet Statistics - this includes data from the DAQ and decoders such as the number of packets received and number of UDP packets.
- Module Statistics - each module tracks activity via a set of peg counts that indicate how many times something was observed or performed. This might include the number of HTTP GET requests processed and the number of TCP reset packets trimmed.
- File Statistics - look here for a breakdown of file type, bytes, signatures.
- Summary Statistics - this includes total runtime for packet processing and the packets per second. Profiling data will appear here as well if configured.

Note that only the non-zero counts are output. Run this to see the available counts:

```
$ snort --help-counts
```

1.3.2 Alerts

If you configured rules, you will need to configure alerts to see the details of detection events. Use the `-A` option like this:

```
$ snort -c snort.lua -r a.pcap -A cmg
```

There are many types of alert outputs possible. Here is a brief list:

- `-A cmg` is the same as `-A fast -d -e` and will show information about the alert along with packet headers and payload.
- `-A u2` is the same as `-A unified2` and will log events and triggering packets in a binary file that you can feed to other tools for post processing. Note that Snort 3 does not provide the raw packets for alerts on PDUs; you will get the actual buffer that alerted.
- `-A csv` will output various fields in comma separated value format. This is entirely customizable and very useful for pcap analysis.

To see the available alert types, you can run this command:

```
$ snort --list-plugins | grep logger
```

1.3.3 Files and Paths

Note that output is specific to each packet thread. If you run 4 packet threads with u2 output, you will get 4 different u2 files. The basic structure is:

```
<logdir>/[<run_prefix>][<id#>][<X>]<name>
```

where:

- `logdir` is set with `-l` and defaults to `./`

- `run_prefix` is set with `--run-prefix` else not used
- `id#` is the packet thread number that writes the file; with one packet thread, `id#` (zero) is omitted without `--id-zero`
- `X` is `/` if you use `--id-subdir`, else `_` if `id#` is used
- `name` is based on module name that writes the file

Additional considerations:

- There is no way to explicitly configure a full path to avoid issues with multiple packet threads.
- All text mode outputs default to `stdout`

1.3.4 Performance Statistics

Still more data is available beyond the above.

- By configuring the `perf_monitor` module you can capture a configurable set of peg counts during runtime. This is useful to feed to an external program so you can see what is happening without stopping Snort.
- The profiler module allows you to track time and space used by module and rules. Use this data to tune your system for best performance. The output will show up under Summary Statistics at shutdown.

2 Concepts

This section provides background on essential aspects of Snort's operation.

2.1 Terminology

- **basic module**: a module integrated into Snort that does not come from a plugin.
 - **binder**: inspector that maps configuration to traffic
 - **builtin rules**: codec and inspector rules for anomalies detected internally.
 - **codec**: short for coder / decoder. These plugins are used for basic protocol decoding, anomaly detection, and construction of active responses.
 - **data module**: an adjunct configuration plugin for use with certain inspectors.
 - **dynamic rules**: plugin rules loaded at runtime. See SO rules.
 - **fast pattern**: the content in an IPS rule that must be found by the search engine in order for a rule to be evaluated.
 - **fast pattern matcher**: see search engine.
 - **hex**: a type of protocol magic that the wizard uses to identify binary protocols.
 - **inspector**: plugin that processes packets (similar to the Snort 2 preprocessor)
 - **IPS**: intrusion prevention system, like Snort.
 - **IPS action**: plugin that allows you to perform custom actions when events are generated. Unlike loggers, these are invoked before thresholding and can be used to control external agents or send active responses.
 - **IPS option**: this plugin is the building blocks of IPS rules.
 - **logger**: a plugin that performs output of events and packets. Events are thresholded before reaching loggers.
-

- **module**: the user facing portion of a Snort component. Modules chiefly provide configuration parameters, but may also provide commands, builtin rules, profiling statistics, peg counts, etc. Note that not all modules are plugins and not all plugins have modules.
- **peg count**: the number of times a given event or condition occurs.
- **plugin**: one of several types of software components that can be loaded from a dynamic library when Snort starts up. Some plugins are coupled with the main engine in such a way that they must be built statically, but a newer version can be loaded dynamically.
- **search engine**: a plugin that performs multipattern searching of packets and payload to find rules that should be evaluated. There are currently no specific modules, although there are several search engine plugins. Related configuration is done with the basic detection module. Aka fast pattern matcher.
- **SO rule**: a IPS rule plugin that performs custom detection that can't be done by a text rule. These rules typically do not have associated modules. SO comes from shared object, meaning dynamic library.
- **spell**: a type of protocol magic that the wizard uses to identify ASCII protocols.
- **text rule**: a rule loaded from the configuration that has a header and body. The header specifies action, protocol, source and destination IP addresses and ports, and direction. The body specifies detection and non-detection options.
- **wizard**: inspector that applies protocol magic to determine which inspectors should be bound to traffic absent a port specific binding. See hex and spell.

2.2 Modules

Modules are the building blocks of Snort. They encapsulate the types of data that many components need including parameters, peg counts, profiling, builtin rules, and commands. This allows Snort to handle them generically and consistently. You can learn quite a lot about any given module from the command line. For example, to see what `stream_tcp` is all about, do this:

```
$ snort --help-config stream_tcp
```

Modules are configured using Lua tables with the same name. So the `stream_tcp` module is configured with defaults like this:

```
stream_tcp = { }
```

The earlier help output showed that the default session tracking timeout is 30 seconds. To change that to 60 seconds, you can configure it this way:

```
stream_tcp = { session_timeout = 60 }
```

Or this way:

```
stream_tcp = { }  
stream_tcp.session_timeout = 60
```

More on parameters is given in the next section.

Other things to note about modules:

- Shutdown output will show the non-zero peg counts for all modules. For example, if `stream_tcp` did anything, you would see the number of sessions processed among other things.
 - Providing the builtin rules allows the documentation to include them automatically and also allows for autogenerating the rules at startup.
 - Only a few module provide commands at this point, most notably the `snort` module.
-

2.3 Parameters

Parameters are given with this format:

```
type name = default: help { range }
```

The following types are used:

- **addr**: any valid IP4 or IP6 address or CIDR
- **addr_list**: a space separated list of addr values
- **bit_list**: a list of consecutive integer values from 1 to the range maximum
- **bool**: true or false
- **dynamic**: a select type determined by loaded plugins
- **enum**: a string selected from the given range
- **implied**: an IPS rule option that takes no value but means true
- **int**: a whole number in the given range
- **ip4**: an IP4 address or CIDR
- **mac**: an ethernet address with the form 01:02:03:04:05:06
- **multi**: one or more space separated strings from the given range
- **port**: an int in the range 0:65535 indicating a TCP or UDP port number
- **real**: a real number in the given range
- **select**: a string selected from the given range
- **string**: any string with no more than the given length, if any

The parameter name may be adorned in various ways to indicate additional information about the type and use of the parameter:

- For Lua configuration (not IPS rules), if the name ends with [] it is a list item and can be repeated.
- For IPS rules only, names starting with ~ indicate positional parameters. The names of such parameters do not appear in the rule.
- IPS rules may also have a wild card parameter, which is indicated by a *. Only used for metadata that Snort ignores.
- The snort module has command line options starting with a -.

Some additional details to note:

- Table and variable names are case sensitive; use lower case only.
 - String values are case sensitive too; use lower case only.
 - Numeric ranges may be of the form low:high where low and high are bounds included in the range. If either is omitted, there is no hard bound. E.g. 0: means any x where x >= 0.
 - Strings may have a numeric range indicating a length limit; otherwise there is no hard limit.
 - bit_list is typically used to store a set of byte, port, or VLAN ID values.
-

2.4 Plugins

Snort uses a variety of plugins to accomplish much of its processing objectives, including:

- Codec - to decode and encode packets
- Inspector - like Snort 2 preprocessors, for normalization, etc.
- IpsOption - for detection in Snort rules
- IpsAction - for custom actions
- Logger - for handling events
- Mpse - for fast pattern matching
- So - for dynamic rules


The power of plugins is that they have a very focused purpose and can be created with relative ease. For example, you can extend the rule language by writing your own IpsOption and it will plug in and function just like existing options. The extra directory has examples of each type of plugin.

Most plugins can be built statically or dynamically. By default they are all static. There is no difference in functionality between static or dynamic plugins but the dynamic build generates a slightly lighter weight binary. Either way you can add dynamic plugins with `--plugin-path` and newer versions will replace older versions, even when built statically.

A single dynamic library may contain more than one plugin. For example, an inspector will typically be packaged together with any associated rule options.

2.5 Operation

Snort is a signature-based IPS, which means that as it receives network packets it reassembles and normalizes the content so that a set of rules can be evaluated to detect the presence of any significant conditions that merit further action. A rough processing flow is as follows:



The steps are:

1. Decode each packet to determine the basic network characteristics such as source and destination addresses and ports. A typical packet might have ethernet containing IP containing TCP containing HTTP (ie eth:ip:tcp:http). The various encapsulating protocols are examined for sanity and anomalies as the packet is decoded. This is essentially a stateless effort.
2. Preprocess each decoded packet using accumulated state to determine the purpose and content of the innermost message. This step may involve reordering and reassembling IP fragments and TCP segments to produce the original application protocol data unit (PDU). Such PDUs are analyzed and normalized as needed to support further processing.
3. Detection is a two step process. For efficiency, most rules contain a specific content pattern that can be searched for such that if no match is found no further processing is necessary. Upon start up, the rules are compiled into pattern groups such that a single, parallel search can be done for all patterns in the group. If any match is found, the full rule is examined according to the specifics of the signature.
4. The logging step is where Snort saves any pertinent information resulting from the earlier steps. More generally, this is where other actions can be taken as well such as blocking the packet.

2.5.1 Snort 2 Processing

The preprocess step in Snort 2 is highly configurable. Arbitrary preprocessors can be loaded dynamically at startup, configured in `snort.conf`, and then executed at runtime. Basically, the preprocessors are put into a list which is iterated for each packet. Recent versions have tweaked the list handling some, but the same basic architecture has allowed Snort 2 to grow from a sniffer, with no preprocessing, to a full-fledged IPS, with lots of preprocessing.


While this "list of plugins" approach has considerable flexibility, it hampers future development when the flow of data from one preprocessor to the next depends on traffic conditions, a common situation with advanced features like application identification. In this case, a preprocessor like HTTP may be extracting and normalizing data that ultimately is not used, or `appID` may be repeatedly checking for data that is just not available.

Callbacks help break out of the preprocess straitjacket. This is where one preprocessor supplies another with a function to call when certain data is available. Snort has started to take this approach to pass some HTTP and SIP preprocessor data to `appID`. However, it remains a peripheral feature and still requires the production of data that may not be consumed.

2.5.2 Snort 3 Processing

One of the goals of Snort 3 is to provide a more flexible framework for packet processing by implementing an event-driven approach. Another is to produce data only when needed to minimize expensive normalizations. However, the basic packet processing provides very similar functionality.

The basic processing steps Snort 3 takes are similar to Snort 2 as seen in the following diagram. The preprocess step employs specific inspector types instead of a generalized list, but the basic procedure includes stateless packet decoding, TCP stream reassembly, and service specific analysis in both cases. (Snort 3 provides hooks for arbitrary inspectors, but they are not central to basic flow processing and are not shown.)

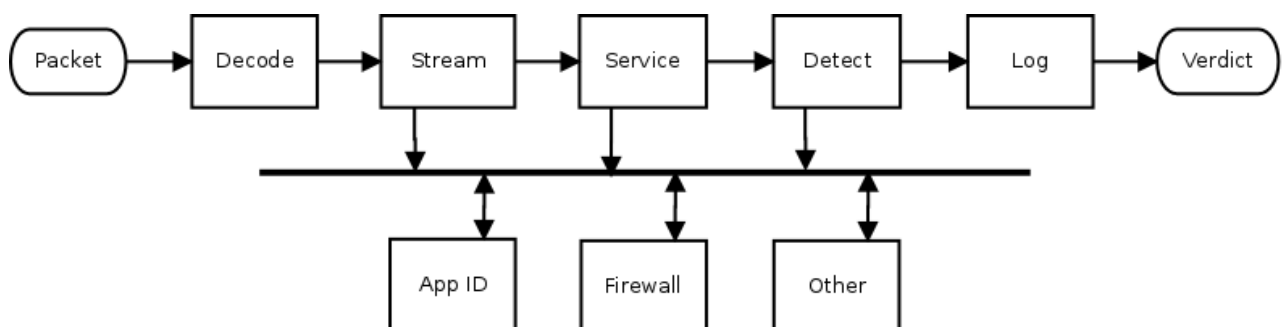

However, Snort 3 also provides a more flexible mechanism than callback functions. By using inspection events, it is possible for an inspector to supply data that other inspectors can process. This is known as the observer pattern or publish-subscribe pattern.

Note that the data is not actually published. Instead, access to the data is published, and that means that subscribers can access the raw or normalized version(s) as needed. Normalizations are done only on the first access, and subsequent accesses get the previously normalized data. This results in just in time (JIT) processing.

A basic example of this in action is provided by the extra `data_log` plugin. It is a passive inspector, ie it does nothing until it receives the data it subscribed for (*other* in the above diagram). By adding the following to your `snort.lua` configuration, you will get a simple URI logger.

```
data_log = { key = 'http_raw_uri' }
```

Inspection events coupled with pluggable inspectors provide a very flexible framework for implementing new features. And JIT buffer stuffers allow Snort to work smarter, not harder. These capabilities will be leveraged more and more as Snort development continues.

2.6 Rules

Rules tell Snort how to detect interesting conditions, such as an attack, and what to do when the condition is detected. Here is an example rule:

```
alert tcp any any -> 192.168.1.1 80 ( msg:"A ha!"; content:"attack"; sid:1; )
```

The structure is:

```
action proto source dir dest ( body )
```

Where:

action - tells Snort what to do when a rule "fires", ie when the signature matches. In this case Snort will log the event. It can also do thing like block the flow when running inline.

proto - tells Snort what protocol applies. This may be ip, icmp, tcp, udp, http, etc.

source - specifies the sending IP address and port, either of which can be the keyword any, which is a wildcard.

dir - must be either unidirectional as above or bidirectional indicated by <>.

dest - similar to source but indicates the receiving end.

body - detection and other information contained in parenthesis.

There are many rule options available to construct as sophisticated a signature as needed. In this case we are simply looking for the "attack" in any TCP packet. A better rule might look like this:

```
alert http
(
    msg:"Gotcha!";
    flow:established, to_server;
    http_uri:"attack";
    sid:2;
)
```

Note that these examples have a sid option, which indicates the signature ID. In general rules are specified by gid:sid:rev notation, where gid is the generator ID and rev is the revision of the rule. By default, text rules are gid 1 and shared-object (SO) rules are gid 3. The various components within Snort that generate events have 1XX gids, for example the decoder is gid 116. You can list the internal gids and sids with these commands:

```
$ snort --list-gids
$ snort --list-builtin
```

For details on these and other options, see the reference section.

2.7 Pattern Matching

Snort evaluates rules in a two-step process which includes a fast pattern search and full evaluation of the signature. More details on this process follow.

2.7.1 Rule Groups

When Snort starts or reloads configuration, rules are grouped by protocol, port and service. For example, all TCP rules using the HTTP_PORTS variable will go in one group and all service HTTP rules will go in another group. These rule groups are compiled into multipattern search engines (MPSE) which are designed to search for all patterns with just a single pass through a given packet or buffer. You can select the algorithm to use for fast pattern searches with search_engine.search_method which defaults to *ac_bnfa*, which balances speed and memory. For a faster search at the expense of significantly more memory, use *ac_full*. For best performance and reasonable memory, download the hyperscan source from Intel.

2.7.2 Fast Patterns

Fast patterns are content strings that have the `fast_pattern` option or which have been selected by Snort automatically to be used as a fast pattern. Snort will by default choose the longest pattern in the rule since that is likely to be most unique. That is not always the case so add `fast_pattern` to the appropriate content option for best performance. The ideal fast pattern is one which, if found, is very likely to result in a rule match. Fast patterns that match frequently for unrelated traffic will cause Snort to work hard with little to show for it.

Certain contents are not eligible to be used as fast patterns. Specifically, if a content is negated, then if it is also relative to another content, case sensitive, or has non-zero offset or depth, then it is not eligible to be used as a fast pattern.

2.7.3 Rule Evaluation

For each fast pattern match, the corresponding rule(s) are evaluated left-to-right. Rule evaluation requires checking each detection option in a rule and is a fairly costly process which is why fast patterns are so important. Rule evaluation aborts on the first non-matching option.

When rule evaluation takes place, the fast pattern may or may not need to be searched for a second time. Note that this differs from Snort 2 which provided the `fast_pattern:only` option to designate such cases. This was removed because it is difficult for the rule writer get it right.

3 Tutorial

The section will walk you through building and running Snort. It is not exhaustive but, once you master this material, you should be able to figure out more advanced usage.

3.1 Dependencies

Required:

- autotools or cmake to build from source
- daq from <http://www.snort.org> for packet IO
- g++ >= 4.8 or other recent C++11 compiler
- dnet from <https://github.com/dugsong/libdnet.git> for network utility functions
- hwloc from <https://www.open-mpi.org/projects/hwloc/> for CPU affinity management
- LuaJIT from <http://luajit.org> for configuration and scripting
- OpenSSL from <https://www.openssl.org/source/> for SHA and MD5 file signatures, the `protected_content` rule option, and SSL service detection
- pcap from <http://www.tcpdump.org> for tcpdump style logging
- pcre from <http://www.pcre.org> for regular expression pattern matching
- pkgconfig from <https://www.freedesktop.org/wiki/Software/pkg-config/> to locate build dependencies
- zlib from <http://www.zlib.net> for decompression (>= 1.2.8 recommended)

Optional:

- lzma >= 5.1.2 from <http://tukaani.org/xz/> for decompression of SWF and PDF files
- hyperscan from <https://github.com/01org/hyperscan> to build new and improved regex and (coming soon) fast pattern support

- cputest from <http://cputest.github.io> to run additional unit tests with make check
- asciidoc from <http://www.methods.co.nz/asciidoc/> to build the HTML manual
- dblatex from <http://dblatex.sourceforge.net> to build the pdf manual (in addition to asciidoc)
- w3m from <http://sourceforge.net/projects/w3m/> to build the plain text manual
- source-highlight from <http://www.gnu.org/software/src-highlite/> to generate the dev guide
- safec from <https://sourceforge.net/projects/safeclib/> for runtime bounds checks on certain legacy C-library calls.

3.2 Building

- Optionally built features are listed in the reference section.
- Create an install path:

```
export my_path=/path/to/snorty
mkdir -p $my_path
```

- If you are using a github clone with autotools, do this:

```
autoreconf -isvf
```

- Now do one of the following:

- a. To build with autotools, simply do the usual from the top level directory:

```
./configure --prefix=$my_path
make -j 8
make install
```

- b. To build with cmake and make, run configure_cmake.sh. It will automatically create and populate a new subdirectory named *build*.

```
./configure_cmake.sh --prefix=$my_path
cd build
make -j 8
make install
ln -s $my_path/conf $my_path/etc
```

- c. You can also specify a cmake project generator:

```
./configure_cmake.sh --generator=Xcode --prefix=$my_path
```

- d. Or use cmake directly to configure and generate from an arbitrary build directory like one of these:

```
ccmake -G Xcode /path/to/Snort++/tree
open snort.xcodeproj
```

```
ccmake -G "Eclipse CDT4 - Unix Makefiles" /path/to/Snort++/tree
run eclipse and do File > Import > Existing Eclipse Project
```

- To build with g++ on OS X where clang is installed, do this first:

```
export CXX=g++
```

3.3 Running

First set up the environment:

```
export LUA_PATH=$my_path/include/snort/lua/\?.lua\;\;
export SNORT_LUA_PATH=$my_path/etc/snort/
```

Then give it a go:

- Get some help:

```
$my_path/bin/snort --help
$my_path/bin/snort --help-module suppress
$my_path/bin/snort --help-config | grep thread
```

- Examine and dump a pcap:

```
$my_path/bin/snort -r <pcap>
$my_path/bin/snort -L dump -d -e -q -r <pcap>
```

- Verify config, with or w/o rules:

```
$my_path/bin/snort -c $my_path/etc/snort/snort.lua
$my_path/bin/snort -c $my_path/etc/snort/snort.lua -R $my_path/etc/snort/sample. ←
rules
```

- Run IDS mode. To keep it brief, look at the first n packets in each file:

```
$my_path/bin/snort -c $my_path/etc/snort/snort.lua -R $my_path/etc/snort/sample. ←
rules \
-r <pcap> -A alert_test -n 100000
```

- Let's suppress 1:2123. We could edit the conf or just do this:

```
$my_path/bin/snort -c $my_path/etc/snort/snort.lua -R $my_path/etc/snort/sample. ←
rules \
-r <pcap> -A alert_test -n 100000 --lua "suppress = { { gid = 1, sid = 2123 } ←
}"
```

- Go whole hog on a directory with multiple packet threads:

```
$my_path/bin/snort -c $my_path/etc/snort/snort.lua -R $my_path/etc/snort/sample. ←
rules \
--pcap-filter \*.pcap --pcap-dir <dir> -A alert_fast -n 1000 --max-packet- ←
threads 8
```

For more examples, see the usage section.

3.4 Tips

One of the goals of Snort 3 is to make it easier to configure your sensor. Here is a summary of tips and tricks you may find useful.

General Use

- Snort tries hard not to error out too quickly. It will report multiple semantic errors.

- Snort always assumes the simplest mode of operation. Eg, you can omit the -T option to validate the conf if you don't provide a packet source.
- Warnings are not emitted unless --warn-* is specified. --warn-all enables all warnings, and --pedantic makes such warnings fatal.
- You can process multiple sources at one time by using the -z or --max-threads option.
- To make it easy to find the important data, zero counts are not output at shutdown.
- Load plugins from the command line with --plugin-path /path/to/install/lib.
- You can process multiple sources at one time by using the -z or --max-threads option.
- Unit tests are configured with --enable-unit-tests. They can then be run with snort --catch-test [tags]all.

Lua Configuration

- Configure the wizard and default bindings will be created based on configured inspectors. No need to explicitly bind ports in this case.
- You can override or add to your Lua conf with the --lua command line option.
- The Lua conf is a live script that is executed when loaded. You can add functions, grab environment variables, compute values, etc.
- You can also rename symbols that you want to disable. For example, changing normalizer to Xnormalizer (an unknown symbol) will disable the normalizer. This can be easier than commenting in some cases.
- By default, symbols unknown to Snort are silently ignored. You can generate warnings for them with --warn-unknown. To ignore such symbols, export them in the environment variable SNORT_IGNORE.

Writing and Loading Rules

Snort rules allow arbitrary whitespace. Multi-line rules make it easier to structure your rule for clarity. There are multiple ways to add comments to your rules:

- The # character starts a comment to end of line. In addition, all lines between #begin and #end are comments.
- The rem option allows you to write a comment that is conveyed with the rule.
- C style multi-line comments are allowed, which means you can comment out portions of a rule while testing it out by putting the options between /* and */.

There are multiple ways to load rules too:

- Set ips.rules or ips.include.
- include statements can be used in rules files.
- Use -R to load a rules file.
- Use --stdin-rules with command line redirection.
- Use --lua to specify one or more rules as a command line argument.

Output Files

To make it simple to configure outputs when you run with multiple packet threads, output files are not explicitly configured. Instead, you can use the options below to format the paths:

```
<logdir>/[<run_prefix>][<id#>][<X>]<name>
```

- logdir is set with -l and defaults to ./
- run_prefix is set with --run-prefix else not used
- id# is the packet thread number that writes the file; with one packet thread, id# (zero) is omitted without --id-zero
- X is / if you use --id-subdir, else _ if id# is used
- name is based on module name that writes the file
- all text mode outputs default to stdout

3.5 Help

Snort has several options to get more help:

```
-? list command line options (same as --help)
--help this overview of help
--help-commands [<module prefix>] output matching commands
--help-config [<module prefix>] output matching config options
--help-counts [<module prefix>] output matching peg counts
--help-module <module> output description of given module
--help-modules list all available modules with brief help
--help-plugins list all available plugins with brief help
--help-options [<option prefix>] output matching command line options
--help-signals dump available control signals
--list-buffers output available inspection buffers
--list-builtin [<module prefix>] output matching builtin rules
--list-gids [<module prefix>] output matching generators
--list-modules [<module type>] list all known modules
--list-plugins list all known modules
--show-plugins list module and plugin versions
```

--help* and --list* options preempt other processing so should be last on the command line since any following options are ignored. To ensure options like --markup and --plugin-path take effect, place them ahead of the help or list options.

Options that filter output based on a matching prefix, such as --help-config won't output anything if there is no match. If no prefix is given, everything matches.

Report bugs to bugs@snort.org.

3.6 Common Errors

FATAL: snort_config is required

- add this line near top of file:
`require('snort_config')`

PANIC: unprotected error in call to Lua API (cannot open snort_defaults.lua: No such file or directory)

- export SNORT_LUA_PATH to point to any dofiles

ERROR can't find xyz

- if xyz is the name of a module, make sure you are not assigning a scalar where a table is required (e.g. xyz = 2 should be xyz = { }).

ERROR can't find x.y

- module x does not have a parameter named y. check --help-module x for available parameters.

ERROR invalid x.y = z

- the value z is out of range for x.y. check --help-config x.y for the range allowed.

ERROR: x = { y = z } is in conf but is not being applied

- make sure that x = { } isn't set later because it will override the earlier setting. same for x.y.

FATAL: can't load lua/errors.lua: lua/errors.lua:68: = expected near ';'

- this is a syntax error reported by Lua to Snort on line 68 of errors.lua.

ERROR: rules(2) unknown rule keyword: find.

- this was due to not including the --script-path.

WARNING: unknown symbol x

- if you any variables, you can squelch such warnings by setting them in an environment variable SNORT_IGNORE. to ignore x, y, and z:

```
export SNORT_IGNORE="x y z"
```

3.7 Gotchas

- A nil key in a table will not caught. Neither will a nil value in a table. Neither of the following will cause errors, nor will they actually set http_server.post_depth:

```
http_server = { post_depth }
http_server = { post_depth = undefined_symbol }
```

- It is not an error to set a value multiple times. The actual value applied may not be the last in the table either. It is best to avoid such cases.

```
http_server =
{
    post_depth = 1234,
    post_depth = 4321
}
```

- Snort can't tell you the exact filename or line number of a semantic error but it will tell you the fully qualified name.
- The dump DAQ will not work with multiple threads unless you use --daq-var file=/dev/null. This will be fixed in at some point to use the Snort log directory, etc.
- Variables are currently processed in an order determined by the Lua hash table which is effectively random. That means you will need to use Lua string concatenation to ensure Snort doesn't try to use a variable before it is defined (even when it is defined ahead of use in the file):


```
-- this may fail:
MY_SERVERS = [[ 172.20.0.0/16 172.21.0.0/16 ]]
EXTERNAL_NET = '!$MY_SERVERS'
```

```
-- this will work:
MY_SERVERS = [[ 172.20.0.0/16 172.21.0.0/16 ]]
EXTERNAL_NET = '!' .. MY_SERVERS
```

- configure will use clang by default if it is installed. To compile with g instead:

```
export CXX=g++
```

- If you build with hyperscan on OS X and see:

```
dyld: Library not loaded: @rpath/libhs.4.0.dylib
```

when you try to run `src/snort`, export `DYLD_LIBRARY_PATH` with the path to `libhs`. You can also do:

```
install_name_tool -change @rpath/libhs.4.0.dylib \
    /path-to/libhs.4.0.dylib src/snort
```

4 Usage

For the following examples "`$my_path`" is assumed to be the path to the Snort install directory. Additionally, it is assumed that "`$my_path/bin`" is in your `PATH`.

4.1 Environment

`LUA_PATH` is used directly by Lua to load and run required libraries. `SNORT_LUA_PATH` is used by Snort to load supplemental configuration files.

```
export LUA_PATH=$my_path/include/snort/lua/\?.lua\;\;
export SNORT_LUA_PATH=$my_path/etc/snort
```

4.2 Help

Print the help summary:

```
snort --help
```

Get help on a specific module ("stream", for example):

```
snort --help-module stream
```

Get help on the "-A" command line option:

```
snort --help-options A
```

Grep for help on threads:

```
snort --help-config | grep thread
```

Output help on "rule" options in AsciiDoc format:

```
snort --markup --help-options rule
```

Note

Snort stops reading command-line options after the "--help-" and "--list-" options, so any other options should be placed before them.

4.3 Sniffing and Logging

Read a pcap:

```
snort -r /path/to/my.pcap
```

Dump the packets to stdout:

```
snort -r /path/to/my.pcap -L dump
```

Dump packets with application data and layer 2 headers

```
snort -r /path/to/my.pcap -L dump -d -e
```

Note

Command line options must be specified separately. "snort -de" won't work. You can still concatenate options and their arguments, however, so "snort -Ldump" will work.

Dump packets from all pcaps in a directory:

```
snort --pcap-dir /path/to/pcap/dir --pcap-filter '*.pcap' -L dump -d -e
```

Log packets to a directory:

```
snort --pcap-dir /path/to/pcap/dir --pcap-filter '*.pcap' -L dump -l /path/to/log/ ↵  
dir
```

4.4 Configuration

Validate a configuration file:

```
snort -c $my_path/etc/snort/snort.lua
```

Validate a configuration file and a separate rules file:

```
snort -c $my_path/etc/snort/snort.lua -R $my_path/etc/snort/sample.rules
```

Read rules from stdin and validate:

```
snort -c $my_path/etc/snort/snort.lua --stdin-rules < $my_path/etc/snort/sample. ↵  
rules
```

Enable warnings for Lua configurations and make warnings fatal:

```
snort -c $my_path/etc/snort/snort.lua --warn-all --pedantic
```

Tell Snort where to look for additional Lua scripts:

```
snort --script-path /path/to/script/dir
```

4.5 IDS mode

Run Snort in IDS mode, reading packets from a pcap:

```
snort -c $my_path/etc/snort/snort.lua -r /path/to/my.pcap
```

Log any generated alerts to the console using the "-A" option:

```
snort -c $my_path/etc/snort/snort.lua -r /path/to/my.pcap -A alert_full
```

Add or modify a configuration from the command line using the "--lua" option:

```
snort -c $my_path/etc/snort/snort.lua -r /path/to/my.pcap -A cmg \
  --lua 'ips = { enable_built_in_rules = true }'
```

Note

The "--lua" option can be specified multiple times.

Run Snort in IDS mode on an entire directory of pcaps, processing each input source on a separate thread:

```
snort -c $my_path/etc/snort/snort.lua --pcap-dir /path/to/pcap/dir \
  --pcap-filter '*.pcap' --max-packet-threads 8
```

Run Snort on 2 interfaces, eth0 and eth1:

```
snort -c $my_path/etc/snort/snort.lua -i "eth0 eth1" -z 2 -A cmg
```

Run Snort inline with the afpacket DAQ:

```
snort -c $my_path/etc/snort/snort.lua --daq afpacket -i "eth0:eth1" \
  -A cmg
```

4.6 Plugins

Load external plugins and use the "ex" alert:

```
snort -c $my_path/etc/snort/snort.lua \
  --plugin-path $my_path/lib/snort_extra \
  -A alert_ex -r /path/to/my.pcap
```

Test the LuaJIT rule option *find* loaded from stdin:

```
snort -c $my_path/etc/snort/snort.lua \
  --script-path $my_path/lib/snort_extra \
  --stdin-rules -A cmg -r /path/to/my.pcap << END
alert tcp any any -> any 80 (
  sid:3; msg:"found"; content:"GET";
  find:"pat='HTTP/1%.%d'" ; )
END
```

4.7 Output Files

To make it simple to configure outputs when you run with multiple packet threads, output files are not explicitly configured. Instead, you can use the options below to format the paths:

```
<logdir>/[<run_prefix>][<id#>][<X>]<name>
```

Log to unified in the current directory:

```
snort -c $my_path/etc/snort/snort.lua -r /path/to/my.pcap -A unified2
```

Log to unified in the current directory with a different prefix:

```
snort -c $my_path/etc/snort/snort.lua -r /path/to/my.pcap -A unified2 \
  --run-prefix take2
```

Log to unified in /tmp:

```
snort -c $my_path/etc/snort/snort.lua -r /path/to/my.pcap -A unified2 -l /tmp
```

Run 4 packet threads and log with thread number prefix (0-3):

```
snort -c $my_path/etc/snort/snort.lua --pcap-dir /path/to/pcap/dir \
  --pcap-filter '*.pcap' -z 4 -A unified2
```

Run 4 packet threads and log in thread number subdirs (0-3):

```
snort -c $my_path/etc/snort/snort.lua --pcap-dir /path/to/pcap/dir \
  --pcap-filter '*.pcap' -z 4 -A unified2 --id-subdir
```

Note

subdirectories are created automatically if required. Log filename is based on module name that writes the file. All text mode outputs default to stdout. These options can be combined.

4.8 DAQ Alternatives

Process hex packets from stdin:

```
snort -c $my_path/etc/snort/snort.lua \
  --daq-dir $my_path/lib/snort/daqs --daq hex -i tty << END
$packet 10.1.2.3 48620 -> 10.9.8.7 80
"GET / HTTP/1.1\r\n"
"Host: localhost\r\n"
"\r\n"
END
```

Process raw ethernet from hex file:

```
snort -c $my_path/etc/snort/snort.lua \
  --daq-dir $my_path/lib/snort/daqs --daq hex \
  --daq-var dlt=1 -r <hex-file>
```

Process a directory of plain files (ie non-pcap) with 4 threads with 8K buffers:

```
snort -c $my_path/etc/snort/snort.lua \
  --daq-dir $my_path/lib/snort/daqs --daq file \
  --pcap-dir path/to/files -z 4 -s 8192
```

Bridge two TCP connections on port 8000 and inspect the traffic:

```
snort -c $my_path/etc/snort/snort.lua \  
    --daq-dir $my_path/lib/snort/daqs --daq socket
```

4.9 Logger Alternatives

Dump TCP stream payload in hex mode:

```
snort -c $my_path/etc/snort/snort.lua -L hex
```

Output timestamp, pkt_num, proto, pkt_gen, dgm_len, dir, src_ap, dst_ap, rule, action for each alert:

```
snort -c $my_path/etc/snort/snort.lua -A csv
```

Output the old test format alerts:

```
snort -c $my_path/etc/snort/snort.lua \  
    --lua "alert_csv = { fields = 'pkt_num gid sid rev', separator = '\t' }"
```

4.10 Shell

You must build with `--enable-shell` to make the command line shell available.

Enable shell mode:

```
snort --shell <args>
```

You will see the shell mode command prompt, which looks like this:

```
o") ~
```

(The prompt can be changed with the `SNORT_PROMPT` environment variable.)

You can pause immediately after loading the configuration and again before exiting with:

```
snort --shell --pause <args>
```

In that case you must issue the `resume()` command to continue. Enter `quit()` to terminate Snort or `detach()` to exit the shell. You can list the available commands with `help()`.

To enable local telnet access on port 12345:

```
snort --shell -j 12345 <args>
```

The command line interface is still under development. Suggestions are welcome.

4.11 Signals

Note

The following examples assume that Snort is currently running and has a process ID of `<pid>`.

Modify and Reload Configuration:

```
echo 'suppress = { { gid = 1, sid = 2215 } }' >> $my_path/etc/snort/snort.lua  
kill -hup <pid>
```

Dump stats to stdout:

```
kill -usr1 <pid>
```

Shutdown normally:

```
kill -term <pid>
```

Exit without flushing packets:

```
kill -quit <pid>
```

List available signals:

```
snort --help-signals
```

Note

The available signals may vary from platform to platform.

5 Features

This section explains how to use key features of Snort.

5.1 AppId

Network administrators need application awareness in order to fine tune their management of the ever-growing number of applications passing traffic over the network. Application awareness allows an administrator to create rules for applications as needed by the business. The rules can be used to take action based on the application, such as block, allow or alert.

5.1.1 Overview

The AppId inspector provides an application level view when managing networks by providing the following features:

- Network control: The inspector works with Snort rules by providing a set of application identifiers (AppIds) to Snort rule writers.
- Application usage awareness: The inspector outputs statistics to show how many times applications are being used on the network.
- Custom applications: Administrators can create their own application detectors to detect new applications. The detectors are written in Lua and interface with Snort using a well-defined C-Lua API.
- Open Detector Package (ODP): A set of pre-defined application detectors are provided by the Snort team and can be downloaded from snort.org.

5.1.2 Dependency Requirements

For proper functioning of the AppId inspector, at a minimum stream flow tracking must be enabled. In addition, to identify TCP-based or UDP-based applications then the appropriate stream inspector must be enabled, e.g. `stream_tcp` or `stream_udp`.

In addition, in order to identify HTTP-based applications, the HTTP inspector must be enabled. Otherwise, only non-HTTP applications will be identified.

AppId subscribes to the inspection events published by other inspectors, such as the HTTP and SSL inspectors, to gain access to the data needed. It uses that data to help determine the application ID.

5.1.3 Configuration

The AppId feature can be enabled via configuration. To enable it with the default settings use:

```
appid = { }
```

To use an AppId as a matching parameter in an IPS rule, use the *appids* keyword. For example, to block HTTP traffic that contains a specific header:

```
block tcp any any -> 192.168.0.1 any ( msg:"Block Malicious HTTP header";
  appids:"HTTP"; content:"X-Header: malicious"; sid:18000; )
```

Alternatively, the HTTP application can be specified in place of *tcp* instead of using the *appids* keyword. The AppId inspector will set the service when it is discovered so it can be used in IPS rules like this. Note that this rule also does not specify the IPs or ports which default to *any*.

```
block http ( msg:"Block Malicious HTTP header";
  content:"X-Header: malicious"; sid:18000; )
```

It's possible to specify multiple applications (as many as desired) with the *appids* keyword. A rule is considered a match if any of the applications on the rule match. Note that this rule does not match specific content which will reduce performance.

```
alert tcp any any -> 192.168.0.1 any ( msg:"Alert ";
  appids:"telnet,ssh,smtp,http";
```

Below is a minimal Snort configuration that is sufficient to block flows based on a specific HTTP header:

```
require("snort_config")

dir = os.getenv('SNORT_LUA_PATH')

if ( not dir ) then
  dir = '.'
end

dofile(dir .. '/snort_defaults.lua')

local_rules =
[[
block http ( msg:"openAppId: test content match for app http";
content:"X-Header: malicious"; sid:18760; rev:4; )
]]

stream = { }

stream_tcp = { }

binder =
{
  {
    when =
    {
      proto = 'tcp',
      ports = [[ 80 8080 ]],
    },
    use =
```

```
        {
            type = 'http_inspect',
        },
    },
}

http_inspect = { }

appid = { }

ips =
{
    rules = local_rules,
}
```

5.1.4 Session Application Identifiers

There are up to four AppIds stored in a session as defined below:

- serviceAppId - An appId associated with server side of a session. Example: http server.
- clientAppId - An appId associated with application on client side of a session. Example: Firefox.
- payloadAppId - For services like http this appId is associated with a webserver host. Example: Facebook.
- miscAppId - For some encapsulated protocols, this is the highest encapsulated application.

For packets originating from the client, a payloadAppId in a session is matched with all AppIds listed on a rule. Thereafter miscAppId, clientAppId and serviceAppId are matched. Since Alert Events contain one AppId, only the first match is reported. If a rule without an appids option matches, then the most specific appId (in order of payload, misc, client, server) is reported.

The same logic is followed for packets originating from the server with one exception. The order of matching is changed to make serviceAppId come before clientAppId.

5.1.5 AppId Usage Statistics

The AppId inspector prints application network usage periodically in the snort log directory in unified2 format. File name, time interval for statistic and file rollover are controlled by appId inspection configuration.

5.1.6 Open Detector Package (ODP) Installation

Application detectors from Snort team will be delivered in a separate package called the Open Detector Package (ODP) that can be downloaded from snort.org. ODP is a package that contains the following artifacts:

- Application detectors in the Lua language.
- Port detectors, which are port only application detectors, in meta-data in YAML format.
- appMapping.data file containing application metadata. This file should not be modified. The first column contains application identifier and second column contains application name. Other columns contain internal information.
- Lua library files DetectorCommon.lua, flowTrackerModule.lua and hostServiceTrackerModule.lua

A user can install the ODP package in any directory and configure this directory via the app_detector_dir option in the appId preprocessor configuration. Installing ODP will not modify any subdirectory named custom, where user-created detectors are located.

When installed, ODP will create following sub-directories:

- odp/port //Cisco port-only detectors
- odp/lua //Cisco Lua detectors
- odp/libs //Cisco Lua modules

5.1.7 User Created Application Detectors

Users can detect new applications by adding detectors in the Lua language. A document will be posted on the Snort Website with details on API. Users can also copy over Snort team provided detectors and modify them. Users can also use the detector creation tool described in the next section.

Users must organize their Lua detectors and libraries by creating the following directory structure, under the ODP installation directory.

- custom/port //port-only detectors
- custom/lua //Lua detectors
- custom/libs //Lua modules

The root path is specified by the "app_detector_dir" parameter of the appid section of snort.conf:

```
appid =
{
    app_detector_dir = '/usr/local/lib/openappid',
}
```

So the path to the user-created lua files would be /usr/local/lib/openappid/custom/lua/

None of the directories below /usr/local/lib/openappid/ would be added for you.

5.1.8 Application Detector Creation Tool

For rudimentary Lua detectors, there is a tool provided called appid_detector_builder.sh. This is a simple, menu-driven bash script which creates .lua files in your current directory, based on your choices and on patterns you supply.

When you launch the script, it will prompt for the Application Id that you are giving for your detector. This is free-form ASCII with minor restrictions. The Lua detector file will be named based on your Application Id. If the file name already exists you will be prompted to overwrite it.

You will also be prompted for a description of your detector to be placed in the comments of the Lua source code. This is optional.

You will then be asked a series of questions designed to construct Lua code based on the kind of pattern data, protocol, port(s), etc.

When complete, the Protocol menu will be changed to include the option, "Save Detector". Instead of saving the file and exiting the script, you are allowed to give additional criteria for another pattern which may also be incorporated in the detection scheme. Then either pattern, when matched, will be considered a valid detection.

For example, your first choices might create an HTTP detection pattern of "example.com", and the next set of choices would add the HTTP detection pattern of "example.uk.co" (an equally fictional British counterpart). They would then co-exist in the Lua detector, and either would cause a detection with the name you give for your Application Id.

The resulting .lua file will need to be placed in the directory, "custom/lua", described in the previous section of the README above called "User Created Application Detectors"

5.2 Binder

One of the fundamental differences between Snort 2 and Snort 3 concerns configuration related to networks and ports. Here is a brief review of Snort 2 configuration for network and service related components:

- Snort's configuration has a default policy and optional policies selected by VLAN or network (with config binding).
- Each policy contains a user defined set of preprocessor configurations.
- Each preprocessor has a default configuration and some support non-default configurations selected by network.
- Most preprocessors have port configurations.
- The default policy may also contain a list of ports to ignore.

In Snort 3, the above configurations are done in a single module called the binder. Here is an example:

```
binder =
{
    -- allow all tcp port 22:
    -- (similar to Snort 2 config ignore_ports)
    { when = { proto = 'tcp', ports = '22' }, use = { action = 'allow' } },

    -- select a config file by vlan
    -- (similar to Snort 2 config binding by vlan)
    { when = { vlans = '1024' }, use = { file = 'vlan.lua' } },

    -- use a non-default HTTP inspector for port 8080:
    -- (similar to a Snort 2 targeted preprocessor config)
    { when = { nets = '192.168.0.0/16', proto = 'tcp', ports = '8080' },
      use = { name = 'alt_http', type = 'http_inspect' } },

    -- use the default inspectors:
    -- (similar to a Snort 2 default preprocessor config)
    { when = { proto = 'tcp' }, use = { type = 'stream_tcp' } },
    { when = { service = 'http' }, use = { type = 'http_inspect' } },

    -- figure out which inspector to run automatically:
    { use = { type = 'wizard' } }
}
```

Bindings are evaluated when a session starts and again if and when service is identified on the session. Essentially, the bindings are a list of when-use rules evaluated from top to bottom. The first matching network and service configurations are applied. `binder.when` can contain any combination of criteria and `binder.use` can specify an action, config file, or inspector configuration.

5.3 DCE Inspectors

The main purpose of these inspector are to perform SMB desegmentation and DCE/RPC defragmentation to avoid rule evasion using these techniques.

5.3.1 Overview

The following transports are supported for DCE/RPC: SMB, TCP, and UDP. New rule options have been implemented to improve performance, reduce false positives and reduce the count and complexity of DCE/RPC based rules.

Different from Snort 2, the DCE-RPC preprocessor is split into three inspectors - one for each transport: `dce_smb`, `dce_tcp`, `dce_udp`. This includes the configuration as well as the inspector modules. The Snort 2 server configuration is now split between the inspectors. Options that are meaningful to all inspectors, such as policy and defragmentation, are copied into each inspector configuration. The address/port mapping is handled by the binder. Autodetect functionality is replaced by wizard curses.

5.3.2 Quick Guide

A typical dcerpce configuration looks like this:

```
binder =
{
    {
        when =
        {
            proto = 'tcp',
            ports = '139 445 1025',
        },
        use =
        {
            type = 'dce_smb',
        },
    },
    {
        when =
        {
            proto = 'tcp',
            ports = '135 2103',
        },
        use =
        {
            type = 'dce_tcp',
        },
    },
    {
        when =
        {
            proto = 'udp',
            ports = '1030',
        },
        use =
        {
            type = 'dce_udp',
        },
    },
}

dce_smb = { }

dce_tcp = { }

dce_udp = { }
```

In this example, it defines smb, tcp and udp inspectors based on port. All the configurations are default.

5.3.3 Target Based

There are enough important differences between Windows and Samba versions that a target based approach has been implemented. Some important differences:

- Named pipe instance tracking

- Accepted SMB commands
- AndX command chaining
- Transaction tracking
- Multiple Bind requests
- DCE/RPC Fragmented requests - Context ID
- DCE/RPC Fragmented requests - Operation number
- DCE/RPC Stub data byte order

Because of those differences, each inspector can be configured to different policy. Here are the list of policies supported:

- WinXP (default)
- Win2000
- WinVista
- Win2003
- Win2008
- Win7
- Samba
- Samba-3.0.37
- Samba-3.0.22
- Samba-3.0.20

5.3.4 Reassembling

Both SMB inspector and TCP inspector support reassemble. Reassemble threshold specifies a minimum number of bytes in the DCE/RPC desegmentation and defragmentation buffers before creating a reassembly packet to send to the detection engine. This option is useful in inline mode so as to potentially catch an exploit early before full defragmentation is done. A value of 0 supplied as an argument to this option will, in effect, disable this option. Default is disabled.

5.3.5 SMB

SMB inspector is one of the most complex inspectors. In addition to supporting rule options and lots of inspector rule events, it also supports file processing for both SMB version 1, 2, and 3.

Finger Print Policy

In the initial phase of an SMB session, the client needs to authenticate with a SessionSetupAndX. Both the request and response to this command contain OS and version information that can allow the inspector to dynamically set the policy for a session which allows for better protection against Windows and Samba specific evasions.

File Inspection

SMB inspector supports file inspection. A typical configuration looks like this:

```
binder =
{
  {
    when =
    {
      proto = 'tcp',
      ports = '139 445',
    },
    use =
    {
      type = 'dce_smb',
    },
  },
},

dce_smb =
{
  smb_file_inspection = 'on',
  smb_file_depth = 0,
}

file_id =
{
  enable_type = true,
  enable_signature = true,
  enable_capture = true,
  file_rules = magics,
}
```

First, define a binder to map tcp port 139 and 445 to smb. Then, enable file inspection in smb inspection and set the file depth as unlimited. Lastly, enable file inspector to inspect file type, calculate file signature, and capture file. The details of file inspector are explained in file processing section.

SMB inspector does inspection of normal SMB file transfers. This includes doing file type and signature through the file processing as well as setting a pointer for the "file_data" rule option. Note that the "file_depth" option only applies to the maximum amount of file data for which it will set the pointer for the "file_data" rule option. For file type and signature it will use the value configured for the file API. If "only" is specified, the inspector will only do SMB file inspection, i.e. it will not do any DCE/RPC tracking or inspection. If "on" is specified with no arguments, the default file depth is 16384 bytes. An argument of -1 to "file-depth" disables setting the pointer for "file_data", effectively disabling SMB file inspection in rules. An argument of 0 to "file_depth" means unlimited. Default is "off", i.e. no SMB file inspection is done in the inspector.

5.3.6 TCP

dce_tcp inspector supports defragmentation, reassembling, and policy that is similar to SMB.

5.3.7 UDP

dce_udp is a very simple inspector that only supports defragmentation

5.3.8 Rule Options

New rule options are supported by enabling the dcerpc2 inspectors:

- dce_iface
- dce_opnum
- dce_stub_data

New modifiers to existing byte_test and byte_jump rule options:

- byte_test: dce
- byte_jump: dce

dce_iface

For DCE/RPC based rules it has been necessary to set flow-bits based on a client bind to a service to avoid false positives. It is necessary for a client to bind to a service before being able to make a call to it. When a client sends a bind request to the server, it can, however, specify one or more service interfaces to bind to. Each interface is represented by a UUID. Each interface UUID is paired with a unique index (or context id) that future requests can use to reference the service that the client is making a call to. The server will respond with the interface UUIDs it accepts as valid and will allow the client to make requests to those services. When a client makes a request, it will specify the context id so the server knows what service the client is making a request to. Instead of using flow-bits, a rule can simply ask the inspector, using this rule option, whether or not the client has bound to a specific interface UUID and whether or not this client request is making a request to it. This can eliminate false positives where more than one service is bound to successfully since the inspector can correlate the bind UUID to the context id used in the request. A DCE/RPC request can specify whether numbers are represented as big endian or little endian. The representation of the interface UUID is different depending on the endianness specified in the DCE/RPC previously requiring two rules - one for big endian and one for little endian. The inspector eliminates the need for two rules by normalizing the UUID. An interface contains a version. Some versions of an interface may not be vulnerable to a certain exploit. Also, a DCE/RPC request can be broken up into 1 or more fragments. Flags (and a field in the connectionless header) are set in the DCE/RPC header to indicate whether the fragment is the first, a middle or the last fragment. Many checks for data in the DCE/RPC request are only relevant if the DCE/RPC request is a first fragment (or full request), since subsequent fragments will contain data deeper into the DCE/RPC request. A rule which is looking for data, say 5 bytes into the request (maybe it's a length field), will be looking at the wrong data on a fragment other than the first, since the beginning of subsequent fragments are already offset some length from the beginning of the request. This can be a source of false positives in fragmented DCE/RPC traffic. By default it is reasonable to only evaluate if the request is a first fragment (or full request). However, if the "any_frag" option is used to specify evaluating on all fragments.

Examples:

```
dce_iface: 4b324fc8-1670-01d3-1278-5a47bf6ee188;  
dce_iface: 4b324fc8-1670-01d3-1278-5a47bf6ee188,<2;  
dce_iface: 4b324fc8-1670-01d3-1278-5a47bf6ee188,any_frag;  
dce_iface: 4b324fc8-1670-01d3-1278-5a47bf6ee188,=1,any_frag;
```

This option is used to specify an interface UUID. Optional arguments are an interface version and operator to specify that the version be less than (<), greater than (>), equal to (=) or not equal to (!) the version specified. Also, by default the rule will only be evaluated for a first fragment (or full request, i.e. not a fragment) since most rules are written to start at the beginning of a request. The "any_frag" argument says to evaluate for middle and last fragments as well. This option requires tracking client Bind and Alter Context requests as well as server Bind Ack and Alter Context responses for connection-oriented DCE/RPC in the inspector. For each Bind and Alter Context request, the client specifies a list of interface UUIDs along with a handle (or context id) for each interface UUID that will be used during the DCE/RPC session to reference the interface. The server response indicates which interfaces it will allow the client to make requests to - it either accepts or rejects the client's wish to bind to a certain interface. This tracking is required so that when a request is processed, the context id used in the request can be correlated with the interface UUID it is a handle for.

hexlong and hexshort will be specified and interpreted to be in big endian order (this is usually the default way an interface UUID will be seen and represented). As an example, the following Messenger interface UUID as taken off the wire from a little endian Bind request:

```
| f8 91 7b 5a 00 ff d0 11 a9 b2 00 c0 4f b6 e6 fc |
```

must be written as:

```
5a7b91f8-ff00-11d0-a9b2-00c04fb6e6fc
```

The same UUID taken off the wire from a big endian Bind request:

```
| 5a 7b 91 f8 ff 00 11 d0 a9 b2 00 c0 4f b6 e6 fc |
```

must be written the same way:

```
5a7b91f8-ff00-11d0-a9b2-00c04fb6e6fc
```

This option matches if the specified interface UUID matches the interface UUID (as referred to by the context id) of the DCE/RPC request and if supplied, the version operation is true. This option will not match if the fragment is not a first fragment (or full request) unless the "any_frag" option is supplied in which case only the interface UUID and version need match. Note that a defragmented DCE/RPC request will be considered a full request.

Using this rule option will automatically insert fast pattern contents into the fast pattern matcher. For UDP rules, the interface UUID, in both big and little endian format will be inserted into the fast pattern matcher. For TCP rules, (1) if the rule option "flow:to_server|from_client" is used, |05 00 00| will be inserted into the fast pattern matcher, (2) if the rule option "flow:from_server|to_client" is used, |05 00 02| will be inserted into the fast pattern matcher and (3) if the flow isn't known, |05 00| will be inserted into the fast pattern matcher. Note that if the rule already has content rule options in it, the best (meaning longest) pattern will be used. If a content in the rule uses the fast_pattern rule option, it will unequivocally be used over the above mentioned patterns.

dce_opnum

The opnum represents a specific function call to an interface. After it has been determined that a client has bound to a specific interface and is making a request to it (see above - dce_iface) usually we want to know what function call it is making to that service. It is likely that an exploit lies in the particular DCE/RPC function call.

Examples:

```
dce_opnum: 15;  
dce_opnum: 15-18;  
dce_opnum: 15,18-20;  
dce_opnum: 15,17,20-22;
```

This option is used to specify an opnum (or operation number), opnum range or list containing either or both opnum and/or opnum-range. The opnum of a DCE/RPC request will be matched against the opnums specified with this option. This option matches if any one of the opnums specified match the opnum of the DCE/RPC request.

dce_stub_data

Since most DCE/RPC based rules had to do protocol decoding only to get to the DCE/RPC stub data, i.e. the remote procedure call or function call data, this option will alleviate this need and place the cursor at the beginning of the DCE/RPC stub data. This reduces the number of rule option checks and the complexity of the rule.

This option takes no arguments.

Example:

```
dce_stub_data;
```

This option is used to place the cursor (used to walk the packet payload in rules processing) at the beginning of the DCE/RPC stub data, regardless of preceding rule options. There are no arguments to this option. This option matches if there is DCE/RPC stub data.

The cursor is moved to the beginning of the stub data. All ensuing rule options will be considered "sticky" to this buffer. The first rule option following `dce_stub_data` should use absolute location modifiers if it is position-dependent. Subsequent rule options should use a relative modifier if they are meant to be relative to a previous rule option match in the stub data buffer. Any rule option that does not specify a relative modifier will be evaluated from the start of the stub data buffer. To leave the stub data buffer and return to the main payload buffer, use the `"pkt_data"` rule option.

byte_test and byte_jump

A DCE/RPC request can specify whether numbers are represented in big or little endian. These rule options will take as a new argument `"dce"` and will work basically the same as the normal `byte_test/byte_jump`, but since the DCE/RPC inspector will know the endianness of the request, it will be able to do the correct conversion.

Examples:

```
byte_test: 4,>,35000,0,relative,dce;  
byte_test: 2,!=",2280,-10,relative,dce;
```

When using the `"dce"` argument to a `byte_test`, the following normal `byte_test` arguments will not be allowed: `"big"`, `"little"`, `"string"`, `"hex"`, `"dec"` and `"oct"`.

Examples:

```
byte_jump:4,-4,relative,align,multiplier 2,post_offset -4,dce;
```

When using the `dce` argument to a `byte_jump`, the following normal `byte_jump` arguments will not be allowed: `"big"`, `"little"`, `"string"`, `"hex"`, `"dec"`, `"oct"` and `"from_beginning"`

5.4 File Processing

With the volume of malware transferred through network increasing, network file inspection becomes more and more important. This feature will provide file type identification, file signature creation, and file capture capabilities to help users deal with those challenges.

5.4.1 Overview

There are two parts of file services: file APIs and file policy. File APIs provides all the file inspection functionalities, such as file type identification, file signature calculation, and file capture. File policy provides users ability to control file services, such as enable/disable/configure file type identification, file signature, or file capture.

In addition to all capabilities from Snort 2, we support customized file policy along with file event log.

- Supported protocols: HTTP, SMTP, IMAP, POP3, FTP, and SMB.
- Supported file signature calculation: SHA256

5.4.2 Quick Guide

A very simple configuration has been included in `lua/snort.lua` file. A typical file configuration looks like this:

```
dofile('magic.lua')
```

```

my_file_policy =
{
  { when = { file_type_id = 0 }, use = { verdict = 'log', enable_file_signature ←
    = true, enable_file_capture = true } }
  { when = { file_type_id = 22 }, use = { verdict = 'log', ←
    enable_file_signature = true } },
  { when = { sha256 = " ←
    F74DC976BC8387E7D4FC0716A069017A0C7ED13F309A523CC41A8739CCB7D4B6" }, use = ←
    { verdict = 'block' } },
}

file_id =
{
  enable_type = true,
  enable_signature = true,
  enable_capture = true,
  file_rules = magics,
  trace_type = true,
  trace_signature = true,
  trace_stream = true,
  file_policy = my_file_policy,
}

file_log =
{
  log_pkt_time = true,
  log_sys_time = false,
}

```

There are 3 steps to enable file processing:

- First, you need to include the file magic rules.
- Then, define the file policy and configure the inspector
- At last, enable file_log to get detailed information about file event

5.4.3 Pre-packaged File Magic Rules

A set of file magic rules is packaged with Snort. They can be located at "lua/file_magic.lua". To use this feature, it is recommended that these pre-packaged rules are used; doing so requires that you include the file in your Snort configuration as such (already in snort.lua):

```
dofile('magic.lua')
```

Example:

```

{ type = "GIF", id = 62, category = "Graphics", rev = 1,
  magic = { { content = "| 47 49 46 38 37 61 |",offset = 0 } } },

{ type = "GIF", id = 63, category = "Graphics", rev = 1,
  magic = { { content = "| 47 49 46 38 39 61 |",offset = 0 } } },

```

The previous two rules define GIF format, because two file magics are different. File magics are specified by content and offset, which look at content at particular file offset to identify the file type. In this case, two magics look at the beginning of the file. You can use character if it is printable or hex value in between "|".

5.4.4 File Policy

You can enable file type, file signature, or file capture by configuring `file_id`. In addition, you can enable trace to see file stream data, file type, and file signature information.

Most importantly, you can configure a file policy that can block/alert some file type or an individual file based on SHA. This allows you build a file blacklist or whitelist.

Example:

```
file_policy =
{
  { when = { file_type_id = 22 }, use = { verdict = 'log', ↵
    enable_file_signature = true } },
  { when = { sha256 = " ↵
    F74DC976BC8387E7D4FC0716A069017A0C7ED13F309A523CC41A8739CCB7D4B6" }, use = ↵
    { verdict = 'block' } },
  { when = { file_type_id = 0 }, use = { verdict = 'log', enable_file_signature ↵
    = true, enable_file_capture = true } }
}
```

In this example, it enables this policy:

- For PDF files, they will be logged with signatures.
- For the file matching this SHA, it will be blocked
- For all file types identified, they will be logged with signature, and also captured onto log folder.

5.4.5 File Capture

File can be captured and stored to log folder. We use SHA as file name instead of actual file name to avoid conflicts. You can capture either all files, some file type, or a particular file based on SHA.

You can enable file capture through this config:

```
enable_capture = true,
```

or enable it for some file or file type in your file policy:

```
{ when = { file_type_id = 22 }, use = { verdict = 'log', enable_file_capture = ↵
  true } },
```

The above rule will enable PDF file capture.

5.4.6 File Events

File inspect preprocessor also works as a dynamic output plugin for file events. It logs basic information about file. The log file is in the same folder as other log files with name starting with "file.log".

Example:

```
file_log = { log_pkt_time = true, log_sys_time = false }
```

All file events will be logged in packet time, system time is not logged.

File event example:

```
08/14-19:14:19.100891 10.22.75.72:33734 -> 10.22.75.36:80,
[Name: "malware.exe"] [Verdict: Block] [Type: MSEXEX]
[SHA: 6F26E721FDB1AAFD29B41BCF90196DEE3A5412550615A856DAE8E3634BCE9F7A]
[Size: 1039328]
```

5.5 High Availability

High Availability includes the HA flow synchronization and the SideChannel messaging subsystems.

5.5.1 HA

HighAvailability (or HA) is a Snort module that provides state coherency between two partner snort instances. It uses SideChannel for messaging.

There can be multiple types of HA within Snort and Snort plugins. HA implements an extensible architecture to enable plugins to subscribe to the base flow HA messaging. These plugins can then include their own messages along with the flow cache HA messages.

HA produces and consumes two type of messages:

- Update - Update flow status. Plugins may add their own data to the messages
- Delete - A flow has been removed from the cache

The HA module is configured with these items:

```
high_availability =
{
    ports = "1",
    enable = true,
    min_age = 0.0,
    min_sync = 0.0
}
```

The *ports* item maps to the SideChannel port to use for the HA messaging.

The *enabled* item controls the overall HA operation.

The items *min_age* and *min_sync* are used in the stream HA logic. *min_age* is the number of seconds that a flow must exist in the flow cache before sending HA messages to the partner. *min_sync* is the minimum time between HA status updates. HA messages for a particular flow will not be sent faster than *min_sync*. Both are expressed as a floating point number of seconds.

HA messages are composed of the base *stream* information plus any content from additional modules. Modules subscribe HA in order to add message content. The *stream* HA content is always present in the messages while the ancillary module content is only present when requested via a status change request.

5.5.2 Connector

Connectors are a set of modules that are used to exchange message-oriented data among Snort threads and the external world. A typical use-case is HA (High Availability) message exchange. Connectors serve to decouple the message transport from the message creation/consumption. Connectors expose a common API for several forms of message transport.

Connectors are a Snort plugin type.

Connector (parent plugin class)

Connectors may either be a simplex channel and perform unidirectional communications. Or may be duplex and perform bidirectional communications. The *TcpConnector* is duplex while the *FileConnector* is simplex.

All subtypes of Connector have a *direction* configuration element and a *connector* element. The *connector* string is the key used to identify the element for sidechannel configuration. The *direction* element may have a default value, for instance *TcpConnector*'s are *duplex*.

There are currently two implementations of Connectors:

- *TcpConnector* - Exchange messages over a tcp channel.
 - *FileConnector* - Write messages to files and read messages from files.
-

TcpConnector

TcpConnector is a subclass of Connector and implements a DUPLEX type Connector, able to send and receive messages over a tcp session.

TcpConnector adds a few session setup configuration elements:

- `setup = call` or `answer` - `call` is used to have TcpConnector initiate the connection. `answer` is used to have TcpConnector accept incoming connections.
- `address = <addr>` - used for `call` setup to specify the partner
- `base_port = port` - used to construct the actual port number for `call` and `answer` modes. Actual port used is (`base_port` + `instance_id`).

An example segment of TcpConnector configuration:

```
tcp_connector =
{
    {
        connector = 'tcp_1',
        address = '127.0.0.1',
        setup = 'call',
        base_port = 11000
    },
}
```

FileConnector

FileConnector implements a Connector that can either read from files or write to files. FileConnector's are simplex and must be configured to be `CONN_TRANSMIT` or `CONN_RECEIVE`.

FileConnector configuration adds two additional element:

- `name = string` - used as part of the message file name
- `format = text` or `binary` - FileConnector supports two file types

The configured `name` string is used to construct the actual names as in:

- `file_connector_NAME_transmit` and `file_connector_NAME_receive`

All messages for one Snort invocation are read and written to one file.

In the case of a receive FileConnector, all messages are read from the file prior to the start of packet processing. This allows the messages to establish state information for all processed packets.

Connectors are used solely by SideChannel

An example segment of FileConnector configuration:

```
file_connector =
{
    {
        connector = 'file_tx_1',
        direction = 'transmit',
        format = 'text',
        name = 'HA'
    },
    {
```

```

        connector = 'file_rx_1',
        direction = 'receive',
        format = 'text',
        name = 'HA'
    },
}

```

5.5.3 Side Channel

SideChannel is a Snort module that uses Connectors to implement a messaging infrastructure that is used to communicate between Snort threads and the outside world.

SideChannel adds functionality onto the Connector as:

- message multiplexing/demultiplexing - An additional protocol layer is added to the messages. This port number is used to direct message to/from various SideClass instances.
- application receive processing - handler for received messages on a specific port.

SideChannel's are always implement a duplex (bidirectional) messaging model and can map to separate transmit and receive Connectors.

The message handling model leverages the underlying Connector handling. So please refer to the Connector documentation.

SideChannel's are instantiated by various applications. The SideChannel port numbers are the configuration element used to map SideChannel's to applications.

The SideChannel configuration mostly serves to map a port number to a Connector or set of connectors. Each port mapping can have at most one transmit plus one receive connector or one duplex connector. Multiple SideChannel's may be configured and instantiated to support multiple applications.

An example SideChannel configuration along with the corresponding Connector configuration:

```

side_channel =
{
    {
        ports = '1',
        connectors =
        {
            {
                connector = 'file_rx_1',
            },
            {
                connector = 'file_tx_1',
            }
        },
    },
}

```

```

file_connector =
{
    {
        connector = 'file_tx_1',
        direction = 'transmit',
        format = 'text',
        name = 'HA'
    },
    {

```

```
connector = 'file_rx_1',  
direction = 'receive',  
format = 'text',  
name = 'HA'  
},  
}
```

5.6 HTTP Inspector

One of the major undertakings for Snort 3 is developing a completely new HTTP inspector.

5.6.1 Overview

You can configure it by adding:

```
http_inspect = {}
```

to your snort.lua configuration file. Or you can read about it in the source code under `src/service_inspectors/http_inspect`.

The classic HTTP preprocessor is still available in the alpha release under `extra`. It has been renamed `http_server`. Be sure not to configure both old and new HTTP inspectors at the same time.

So why a new HTTP inspector?

For starters it is object-oriented. That's good for us because we maintain this software. But it should also be really nice for open-source developers. You can make meaningful changes and additions to HTTP processing without having to understand the whole thing. In fact much of the new HTTP inspector's knowledge of HTTP is centralized in a series of tables where it can be easily reviewed and modified. Many significant changes can be made just by updating these tables.

`http_inspect` is the first inspector written specifically for the new Snort 3 architecture. This provides access to one of the very best features of Snort 3: purely PDU-based inspection. The classic preprocessor processes HTTP messages, but even while doing so it is constantly aware of IP packets and how they divide up the TCP data stream. The same HTTP message might be processed differently depending on how the sender (bad guy) divided it up into IP packets.

`http_inspect` is free of this burden and can focus exclusively on HTTP. This makes it much simpler, easier to test, and less prone to false positives. It also greatly reduces the opportunity for adversaries to probe the inspector for weak spots by adjusting packet boundaries to disguise bad behavior.

Dealing solely with HTTP messages also opens the door for developing major new features. The `http_inspect` design supports true stateful processing. Want to ask questions that involve both the client request and the server response? Or different requests in the same session? These things are possible.

Another new feature on the horizon is HTTP/2 analysis. HTTP/2 derives from Google's SPDY project and is in the process of being standardized. Despite the name, it is better to think of HTTP/2 not as a newer version of HTTP/1.1, but rather a separate protocol layer that runs under HTTP/1.1 and on top of TLS or TCP. It's a perfect fit for the new Snort 3 architecture because a new HTTP/2 inspector would naturally output HTTP/1.1 messages but not any underlying packets. Exactly what `http_inspect` wants to input.

`http_inspect` is taking a very different approach to HTTP header fields. The classic preprocessor divides all the HTTP headers following the start line into cookies and everything else. It normalizes the two pieces using a generic process and puts them in buffers that one can write rules against. There is some limited support for examining individual headers within the inspector but it is very specific.

The new concept is that every header should be normalized in an appropriate and specific way and individually made available for the user to write rules against it. If for example a header is supposed to be a date then normalization means put that date in a standard format.

5.6.2 Configuration

Configuration can be as simple as adding:

```
http_inspect = {}
```

to your snort.lua file. The default configuration provides a thorough inspection and may be all that you need. But there are some options that provide extra features, tweak how things are done, or conserve resources by doing less.

request_depth and response_depth

These replace the flow depth parameters used by the old HTTP inspector but they work differently.

The default is to inspect the entire HTTP message body. That's a very sound approach but if your HTTP traffic includes many very large files such as videos the load on Snort can become burdensome. Setting the request_depth and response_depth parameters will limit the amount of body data that is sent to the rule engine. For example:

```
request_depth = 10000,  
response_depth = 80000,
```

would examine only the first 10000 bytes of POST, PUT, and other message bodies sent by the client. Responses from the server would be limited to 80000 bytes.

These limits apply only to the message bodies. HTTP headers are always completely inspected.

If you want to only inspect headers and no body, set the depth to 0. If you want to inspect the entire body set the depth to -1 or simply omit the depth parameter entirely because that is the default.

These limits have no effect on how much data is forwarded to file processing.

gzip

http_inspect by default decompresses deflate and gzip message bodies before inspecting them. This feature can be turned off by unzip = false. Turning off decompression provides a substantial performance improvement but at a very high price. It is unlikely that any meaningful inspection of message bodies will be possible. Effectively HTTP processing would be limited to the headers.

normalize_utf

http_inspect will decode utf-8, utf-7, utf-16le, utf-16be, utf-32le, and utf-32be in response message bodies based on the Content-Type header. This feature is on by default: normalize_utf = false will deactivate it.

decompress_pdf

decompress_pdf = true will enable decompression of compressed portions of PDF files encountered in a response body. http_inspect will examine the response body for PDF files that are then parsed to locate PDF streams with a single /FlateDecode filter. The compressed content is decompressed and made available through the file data rule option.

decompress_swf

decompress_swf = true will enable decompression of compressed SWF (Adobe Flash content) files encountered in a response body. The available decompression modes are 'deflate' and 'lzma'. http_inspect will search for the file signatures CWS for Deflate/ZLIB and ZWS for LZMA. The compressed content is decompressed and made available through the file data rule option. The compressed SWF file signature is converted to FWS to indicate an uncompressed file.

normalize_javascript

`normalize_javascript = true` will enable normalization of JavaScript within the HTTP response body. `http_inspect` looks for JavaScript by searching for the `<script>` tag without a type. Obfuscated data within the JavaScript functions such as `unescape`, `String.fromCharCode`, `decodeURI`, and `decodeURIComponent` are normalized. The different encodings handled within the `unescape`, `decodeURI`, or `decodeURIComponent` are `%XX`, `%uXXXX`, `XX` and `uXXXXi`. `http_inspect` also replaces consecutive whitespaces with a single space and normalizes the plus by concatenating the strings.

URI processing

Normalization and inspection of the URI in the HTTP request message is a key aspect of what `http_inspect` does. The best way to normalize a URI is very dependent on the idiosyncrasies of the HTTP server being accessed. The goal is to interpret the URI the same way as the server will so that nothing the server will see can be hidden from the rule engine.

The default URI inspection parameters are oriented toward following the HTTP RFCs—reading the URI the way the standards say it should be read. Most servers deviate from this ideal in various ways that can be exploited by an attacker. The options provide tools for the user to cope with that.

```
utf8 = true
plus_to_space = true
percent_u = false
utf8_bare_byte = false
iis_unicode = false
iis_double_decode = false
```

The HTTP inspector normalizes percent encodings found in URIs. For instance it will convert `"%48%69%64%64%65%6e"` to `"Hidden"`. All the options listed above control how this is done. The options listed as `true` are fairly standard features that are decoded by default. You don't need to list them in `snort.lua` unless you want to turn them off by setting them to `false`. But that is not recommended unless you know what you are doing and have a definite reason.

The other options are primarily for the protection of servers that support irregular forms of decoding. These features are off by default but you can activate them if you need to by setting them to `true` in `snort.lua`.

```
bad_characters = "0x25 0x7e 0x6b 0x80 0x81 0x82 0x83 0x84"
```

That's a list of 8-bit Ascii characters that you don't want present in any normalized URI after the percent decoding is done. For example `0x25` is a hexadecimal number (37 in decimal) which stands for the `%` character. The `%` character is legitimately used for encoding special characters in a URI. But if there is still a percent after normalization one might conclude that something is wrong. If you choose to configure `0x25` as a bad character there will be an alert whenever this happens.

Another example is `0x00` which signifies the null character zero. Null characters in a URI are generally wrong and very suspicious.

The default is not to alert on any of the 256 8-bit Ascii characters. Add this option to your configuration if you want to define some bad characters.

```
ignore_unreserved = "abc123"
```

Percent encoding common characters such as letters and numbers that have no special meaning in HTTP is suspicious. It's legal but why would you do it unless you have something to hide? `http_inspect` will alert whenever an upper-case or lower-case letter, a digit, period, underscore, tilde, or minus is percent-encoded. But if a legitimate application in your environment encodes some of these characters for some reason this allows you to create exemptions for those characters.

In the example, the lower-case letters `a`, `b`, and `c` and the digits `1`, `2`, and `3` are exempted. These may be percent-encoded without generating an alert.

```
simplify_path = true
backslash_to_slash = false
```

HTTP inspector simplifies directory paths in URIs by eliminating extra traversals using `..`, `...`, and `/.`

For example I can take a simple URI such as


```
/very/easy/example
```

and complicate it like this:

```
/very/../../very/../../../easy////////detour/to/nowhere/../../../../example
```

which may be very difficult to match with a detection rule. `simplify_path` is on by default and you should not turn it off unless you have no interest in URI paths.

`backslash_to_slash` is a tweak to path simplification for servers that allow directories to be separated by backslashes:

```
/this/is/the/normal/way/to/write/a/path
```

```
\this\is\the\other\way\to\write\a\path
```

`backslash_to_slash` is turned off by default. If you are protecting such a server then set `backslash_to_slash = true` and all the backslashes will be replaced with slashes during normalization.

5.6.3 Detection rules

`http_inspect` parses HTTP messages into their components and makes them available to the detection engine through rule options. Let's start with an example:

```
alert tcp any any -> any any ( msg:"URI example"; flow:established,
to_server; http_uri; content:"chocolate"; sid:1; rev:1; )
```

This rule looks for chocolate in the URI portion of the request message. Specifically, the `http_uri` rule option is the normalized URI with all the percent encodings removed. It will find chocolate in both:

```
GET /chocolate/cake HTTP/1.1
```

and

```
GET /%63%68$6F%63%6F%6C%61%74%65/%63%61%6B%65 HTTP/1.1
```

It is also possible to search the unnormalized URI

```
alert tcp any any -> any any ( msg:"Raw URI example"; flow:established,
to_server; http_raw_uri; content:"chocolate"; sid:2; rev:1; )
```

will match the first message but not the second. If you want to detect someone who is trying to hide his request for chocolate then

```
alert tcp any any -> any any ( msg:"Raw URI example"; flow:established,
to_server; http_raw_uri; content:"%63%68$6F%63%6F%6C%61%74%65";
sid:3; rev:1; )
```

will do the trick.

Let's look at possible ways of writing a rule to match HTTP response messages with the Content-Language header set to "da" (Danish). You could write:

```
alert tcp any any -> any any ( msg:"whole header search";
flow:established, to_client; http_header; content:
"Content-Language: da", nocase; sid:4; rev:1; )
```

This rule leaves much to be desired. Modern headers are often thousands of bytes and seem to get longer every year. Searching all of the headers consumes a lot of resources. Furthermore this rule is easily evaded:

```
HTTP/1.1 ... Content-Language: da ...
```

the extra space before the "da" throws the rule off. Or how about:

```
HTTP/1.1 ... Content-Language: xx,da ...
```

By adding a made up second language the attacker has once again thwarted the match.

A better way to write this rule is:

```
alert tcp any any -> any any ( msg:"individual header search";  
flow:established, to_client; http_header: field content-language;  
content:"da", nocase; sid:4; rev:2; )
```

The field option improves performance by narrowing the search to the Content-Language field of the header. Because it uses the header parsing abilities of http_inspect to find the field of interest it will not be thrown off by extra spaces or other languages in the list.

In addition to the headers there are rule options for virtually every part of the HTTP message.

http_uri and http_raw_uri

These provide the URI of the request message. The raw form is exactly as it appeared in the message and the normalized form is determined by the URI normalization options you selected. In addition to searching the entire URI there are six components that can be searched individually:

```
alert tcp any any -> any any ( msg:"URI path"; flow:established,  
to_server; http_uri: path; content:"chocolate"; sid:1; rev:2; )
```

By specifying "path" the search is limited to the path portion of the URI. Informally this is the part consisting of the directory path and file name. Thus it will match:

```
GET /chocolate/cake HTTP/1.1
```

but not:

```
GET /book/recipes?chocolate+cake HTTP/1.1
```

The question mark ends the path and begins the query portion of the URI. Informally the query is where parameter values are set and often contains a search to be performed.

The six components are:

1. path: directory and file
2. query: user parameters
3. fragment: part of the file requested, normally found only inside a browser and not transmitted over the network
4. host: domain name of the server being addressed
5. port: TCP port number being addressed
6. scheme: normally "http" or "https" but others are possible such as "ftp"

Here is an example with all six:

```
GET https://www.samplehost.com:287/basic/example/of/path?with-query  
#and-fragment HTTP/1.1\r\n
```

The URI is everything between the first space and the last space. "https" is the scheme, "www.samplehost.com" is the host, "287" is the port, "/basic/example/of/path" is the path, "with-query" is the query, and "and-fragment" is the fragment.

Note: this section uses informal language to explain some things. Nothing here is intended to conflict with the technical language of the HTTP RFCs and the implementation follows the RFCs.

http_header and http_raw_header

These cover all the header lines except the first one. You may specify an individual header by name using the field option as shown in this earlier example:

```
alert tcp any any -> any any ( msg:"individual header search";  
flow:established, to_client; http_header: field content-language;  
content:"da", nocase; sid:4; rev:2; )
```

This rule searches the value of the Content-Language header. Header names are not case sensitive and may be written in the rule in any mixture of upper and lower case.

With `http_header` the individual header value is normalized in a way that is appropriate for that header.

Specifying an individual header is not available for `http_raw_header`.

If you don't specify a header you get all of the headers except for the cookie headers `Cookie` and `Set-Cookie`. `http_raw_header` includes the unmodified header names and values as they appeared in the original message. `http_header` is the same except percent encodings are removed and paths are simplified exactly as if the headers were a URI.

In most cases specifying individual headers creates a more efficient and accurate rule. It is recommended that new rules be written using individual headers whenever possible.

http_trailer and http_raw_trailer

HTTP permits header lines to appear after a chunked body ends. Typically they contain information about the message content that was not available when the headers were created. For convenience we call them trailers.

`http_trailer` and `http_raw_trailer` are identical to their header counterparts except they apply to these end headers. If you want a rule to inspect both kinds of headers you need to write two rules, one using `header` and one using `trailer`.

http_cookie and http_raw_cookie

These provide the value of the `Cookie` header for a request message and the `Set-Cookie` for a response message. If multiple cookies are present they will be concatenated into a comma-separated list.

Normalization for `http_cookie` is the same URI-style normalization applied to `http_header` when no specific header is specified.

http_client_body

This is the body of a request message such as `POST` or `PUT`. Normalization for `http_client_body` is the same URI-like normalization applied to `http_header` when no specific header is specified.

http_method

The method field of a request message. Common values are `"GET"`, `"POST"`, `"OPTIONS"`, `"HEAD"`, `"DELETE"`, `"PUT"`, `"TRACE"`, and `"CONNECT"`.

http_stat_code

The status code field of a response message. This is normally a 3-digit number between 100 and 599. In this example it is 200.

```
HTTP/1.1 200 OK
```

http_stat_msg

The reason phrase field of a response message. This is the human-readable text following the status code. `"OK"` in the previous example.

http_version

The protocol version information that appears on the first line of an HTTP message. This is usually "HTTP/1.0" or "HTTP/1.1".

http_raw_request and http_raw_status

These are the unmodified first header line of the HTTP request and response messages respectively. These rule options are a safety valve in case you need to do something you cannot otherwise do. In most cases it is better to use a rule option for a specific part of the first header line. For a request message those are `http_method`, `http_raw_uri`, and `http_version`. For a response message those are `http_version`, `http_stat_code`, and `http_stat_msg`.

file_data and packet_data

`file_data` contains the normalized message body. This is the normalization described above under `gzip`, `normalize_utf`, `decompress_pdf`, `decompress_swf`, and `normalize_javascript`.

The unnormalized message body is available in the packet data. If `gzip` is configured the packet data will be unzipped.

5.6.4 Timing issues and combining rule options

HTTP inspector is stateful. That means it is aware of a bigger picture than the packet in front of it. It knows what all the pieces of a message are, the dividing lines between one message and the next, which request message triggered which response message, pipelines, and how many messages have been sent over the current connection.

Some rules use a single rule option:

```
alert tcp any any -> any any ( msg:"URI example"; flow:established,
to_server; http_uri; content:"chocolate"; sid:1; rev:1; )
```

Whenever a new URI is available this rule will be evaluated. Nothing complicated about that, but suppose we use more than one rule option:

```
alert tcp any any -> any any ( msg:"combined example"; flow:established,
to_server; http_uri; content:"chocolate"; file_data;
content:"sinister POST data"; sid:5; rev:1; )
```

This rule requires both the URI and the request message body. That sounds simple until one considers that the message body may be millions of bytes long. The headers with the URI may be long gone by that time.

Is this rule going to work or do we need to do something different?

It is helpful to understand when things happen. All the message headers and the first few thousand bytes of the body go through detection at the same time. Commonly this is about 16K bytes but there are several exceptions and there is no guaranteed minimum amount.

That may be all you need. In many cases that will be the entire message. Or it may be more than your `request_depth/response_depth`. Or this rule may simply not care what happens after that in a very long message body.

Beyond that the message body will continue to be subdivided into roughly 16K-byte sections and inspected. But the previous rule will not be able to see the URI and hence will not work unless we rewrite it:

```
alert tcp any any -> any any ( msg:"URI with_body"; flow:established,
to_server; http_uri: with_body; content:"chocolate"; file_data;
content:"sinister POST data"; sid:5; rev:2; )
```

The `with_body` option to `http_uri` causes the URI to be made available with every body section, not just the first one. These extra inspections have a performance cost which is why they are not done automatically. `with_body` is an option to be used when you actually need it.

The `with_trailer` option is analogous and causes an earlier message element to be made available at the end of the message when the trailers following a chunked body arrive.

```
alert tcp any any -> any any ( msg:"double content-language";  
flow:established, to_client; http_header: with_trailer, field  
content-language; content:"da", nocase; http_trailer: field  
content-language; content:"en", nocase; sid:6; rev:1; )
```

This rule will alert if the Content-Language changes from Danish in the headers to English in the trailers. The `with_trailer` option is essential to make this rule work.

It is also possible to write rules that examine both the client request and the server response to it.

```
alert tcp any any -> any any ( msg:"request and response example";  
flow:established, to_client; http_uri: with_body; content:"chocolate";  
file_data; content:"white chocolate"; sid:7; rev:1; )
```

This rule looks for white chocolate in a response message body where the URI of the request contained chocolate. Note that this is a "to_client" rule that will alert on and potentially block a server response containing white chocolate, but only if the client URI requested chocolate. If the rule were rewritten "to_server" it would be nonsense and not work. Snort cannot block a client request based on what the server response will be because that has not happened yet.

Another point is "with_body" for `http_uri`. This ensures the rule works on the entire response body. If we were looking for white chocolate in the response headers this would not be necessary.

Response messages do not have a URI so there was only one thing `http_uri` could have meant in the previous rule. It had to be referring to the request message. Sometimes that is not so clear.

```
alert tcp any any -> any any ( msg:"header ambiguity example 1";  
flow:established, to_client; http_header: with_body; content:  
"chocolate"; file_data; content:"white chocolate"; sid:8; rev:1; )
```

```
alert tcp any any -> any any ( msg:"header ambiguity example 2";  
flow:established, to_client; http_header: with_body, request; content:  
"chocolate"; file_data; content:"white chocolate"; sid:8; rev:2; )
```

Our search for chocolate has moved from the URI to the message headers. Both the request and response messages have headers—which one are we asking about? Ambiguity is always resolved in favor of looking in the current message which is the response. The first rule is looking for a server response containing chocolate in the headers and white chocolate in the body.

The second rule uses the "request" option to explicitly say that the `http_header` to be searched is the request header.

Let's put all of this together. There are six opportunities to do detection:

1. When the first part of the request message body arrives. The request line, all of the headers, and the first part of the body all go through detection at the same time. Of course most requests don't have a body. In that case the request line and the headers are the whole message and get done at the same time.
2. When subsequent sections of the request message body arrive. If you want to combine this with something from the request line or headers you must use the `with_body` option.
3. When the request trailers arrive. If you want to combine this with something from the request line or headers you must use the `with_trailer` option.
4. When the first part of the response message body arrives. The status line, all of the headers, and the first part of the body all go through detection at the same time. These may be combined with elements from the request line, request headers, or request trailers. Where ambiguity arises use the `request` option.
5. When subsequent sections of the response message body arrive. These may be combined with the status line, response headers, request line, request headers, or request trailers as described above.
6. When the response trailers arrive. Again these may be combined as described above.

Message body data can only go through detection at the time it is received. Headers may be combined with later items but the body cannot.

5.7 Performance Monitor

The new and improved performance monitor! Is your sensor being bogged down by too many flows? `perf_monitor`! Why are certain TCP segments being dropped without hitting a rule? `perf_monitor`! Why is a sensor leaking water? Not `perf_monitor`, check with `stream...`

5.7.1 Overview

The Snort performance monitor is the built-in utility for monitoring system and traffic statistics. All statistics are separated by processing thread. `perf_monitor` supports several trackers for monitoring such data:

5.7.2 Base Tracker

The base tracker is used to gather running statistics about Snort and its running modules. All Snort modules gather, at the very least, counters for the number of packets reaching it. Most supplement these counts with those for domain specific functions, such as `http_inspect`'s number of GET requests seen.

Statistics are gathered live and can be reported at regular intervals. The stats reported correspond only to the interval in question and are reset at the beginning of each interval.

These are the same counts displayed when Snort shuts down, only sorted amongst the discrete intervals in which they occurred.

Base differs from prior implementations in Snort in that all stats gathered are only raw counts, allowing the data to be evaluated as needed. Additionally, base is entirely pluggable. Data from new Snort plugins can be added to the existing stats either automatically or, if specified, by name and function.

All plugins and counters can be enabled or disabled individually, allowing for only the data that is actually desired instead of overly verbose performance logs.

To enable everything:

```
perf_monitor = { modules = {} }
```

To enable everything within a module:

```
perf_monitor =
{
  modules =
  {
    {
      name = 'stream_tcp',
      pegs = [[ ]]
    },
  }
}
```

To enable specific counts within modules:

```
perf_monitor =
{
  modules =
  {
    {
      name = 'stream_tcp',
      pegs = [[ overlaps gaps ]]
    },
  }
}
```

Note: Event stats from prior Snorts are now located within base statistics.

5.7.3 Flow Tracker

Flow tracks statistics regarding traffic and L3/L4 protocol distributions. This data can be used to build a profile of traffic for inspector tuning and for identifying where Snort may be stressed.

To enable:

```
perf_monitor = { flow = true }
```

5.7.4 FlowIP Tracker

FlowIP provides statistics for individual hosts within a network. This data can be used for identifying communication habits, such as generating large or small amounts of data, opening a small or large number of sessions, and tendency to send smaller or larger IP packets.

To enable:

```
perf_monitor = { flow_ip = true }
```

5.7.5 CPU Tracker

This tracker monitors the CPU and wall time spent by a given processing thread.

To enable:

```
perf_monitor = { cpu = true }
```

5.8 Sensitive Data Filtering

The `sd_pattern` IPS option provides detection and filtering of Personally Identifiable Information (PII). This information includes credit card numbers, U.S. Social Security numbers, and email addresses. A rich regular expression syntax is available for defining your own PII.

5.8.1 Hyperscan

The `sd_pattern` rule option is powered by the open source Hyperscan library from Intel. It provides a regex grammar which is mostly PCRE compatible. To learn more about Hyperscan see <http://01org.github.io/hyperscan/dev-reference/>

5.8.2 Syntax

Snort provides `sd_pattern` as IPS rule option with no additional inspector overhead. The Rule option takes the following syntax.

```
sd_pattern: "<pattern>"[, threshold <count>];
```

Pattern

Pattern is the most important and is the only required parameter to `sd_pattern`. It supports 3 built in patterns which are configured by name: "credit_card", "us_social" and "us_social_nodashes", as well as user defined regular expressions of the Hyperscan dialect (see <http://01org.github.io/hyperscan/dev-reference/compilation.html#pattern-support>).

```
sd_pattern:"credit_card";
```

When configured, Snort will replace the pattern *credit_card* with the built in pattern. In addition to pattern matching, Snort will validate that the matched digits will pass the Luhn-check algorithm. Currently the only pattern that performs extra verification.

```
sd_pattern:"us_social";
sd_pattern:"us_social_nodashes";
```

These special patterns will also be replaced with a built in pattern. Naturally, "us_social" is a pattern of 9 digits separated by –'s in the canonical form.

```
sd_pattern:"\b\w+@ourdomain\.com\b"
```

This is a user defined pattern which matches what is most likely email addresses for the site "ourdomain.com". The pattern is a PCRE compatible regex, *\b* matches a word boundary (whitespace, end of line, non-word characters) and *\w+* matches one or more word characters. *\.* matches a literal ..

The above pattern would match "a@ourdomain.com", "aa@ourdomain.com" but would not match 1@ourdomain.com ab12@ourdomain.com or @ourdomain.com.

Note: This is just an example, this pattern is not suitable to detect many correctly formatted emails.

Threshold

Threshold is an optional parameter allowing you to change built in default value (default value is *1*). The following two instances are identical. The first will assume the default value of *1* the second declaration explicitly sets the threshold to *1*.

```
sd_pattern:"This rule requires 1 match";
sd_pattern:"This rule requires 1 match", threshold 1;
```

That's pretty easy, but here is one more example anyway.

```
sd_pattern:"This is a string literal", threshold 300;
```

This example requires 300 matches of the pattern "This is a string literal" to qualify as a positive match. That is, if the string only occurred 299 times in a packet, you will not see an event.

Obfuscating Credit Cards and Social Security Numbers

Snort provides discreet logging for the built in patterns "credit_card", "us_social" and "us_social_nodashes". Enabling `output.obfuscate_pii` makes Snort obfuscate the suspect packet payload which was matched by the patterns. This configuration is disabled by default.

```
output =
{
    obfuscate_pii = true
}
```

5.8.3 Example

A complete Snort IPS rule

```
alert tcp ( sid:1; msg:"Credit Card"; sd_pattern:"credit_card"; )
```

Logged output when running Snort in "cmg" alert format.

```

02/25-21:19:05.125553 [**] [1:1:0] "Credit Card" [**] [Priority: 0] {TCP}  ←
10.1.2.3:48620 -> 10.9.8.7:8
02:01:02:03:04:05 -> 02:09:08:07:06:05 type:0x800 len:0x46
10.1.2.3:48620 -> 10.9.8.7:8 TCP TTL:64 TOS:0x0 ID:14 IpLen:20 DgmLen:56
***A*** Seq: 0xB2 Ack: 0x2 Win: 0x2000 TcpLen: 20
- - - raw[16] - - - - -
58 58 58 58 58 58 58 58 58 58 58 58 39 32 39 34 XXXXXXXXXXXXX9294
- - - - -

```

5.8.4 Caveats

1. Snort currently requires setting the fast pattern engine to use "hyperscan" in order for `sd_pattern` ips option to function correctly.

```
search_engine = { search_method = 'hyperscan' }
```
2. Log obfuscation is only applicable to CMG and Unified2 logging formats.
3. Log obfuscation doesn't support user defined PII patterns. It is currently only supported for the built in patterns for Credit Cards and US Social Security numbers.
4. Log obfuscation doesn't work with stream rebuilt packet payloads. (This is a known bug).

5.9 Wizard

Using the wizard enables port-independent configuration and the detection of malware command and control channels. If the wizard is bound to a session, it peeks at the initial payload to determine the service. For example, *GET* would indicate HTTP and *HELO* would indicate SMTP. Upon finding a match, the service bindings are reevaluated so the session can be handed off to the appropriate inspector. The wizard is still under development; if you find you need to tweak the defaults please let us know.

Additional Details:

- If the wizard and one or more service inspectors are configured w/o explicitly configuring the binder, default bindings will be generated which should work for most common cases.
- Also note that while Snort 2 bindings can only be configured in the default policy, each Snort 3 policy can contain a binder leading to an arbitrary hierarchy.
- The entire configuration can be reloaded and hot-swapped during run-time via signal or command in both Snort 2 and Snort 3. Ultimately, Snort 3 will support commands to update the binder on the fly, thus enabling incremental reloads of individual inspectors.
- Both Snort 2 and Snort 3 support server specific configurations via a hosts table (XML in Snort 2 and Lua in Snort 3). The table allows you to map network, protocol, and port to a service and policy. This table can be reloaded and hot-swapped separately from the config file.
- You can find the specifics on the binder, wizard, and hosts tables in the manual or command line like this: `snort --help-module binder`, etc.

6 Basic Modules

Internal modules which are not plugins are termed "basic". These include configuration for core processing.

6.1 active

What: configure responses

Type: basic

Configuration:

- int **active.attempts** = 0: number of TCP packets sent per response (with varying sequence numbers) { 0:20 }
- string **active.device**: use *ip* for network layer responses or *eth0* etc for link layer
- string **active.dst_mac**: use format *01:23:45:67:89:ab*
- int **active.max_responses** = 0: maximum number of responses { 0: }
- int **active.min_interval** = 255: minimum number of seconds between responses { 1: }

6.2 alerts

What: configure alerts

Type: basic

Configuration:

- bool **alerts.alert_with_interface_name** = false: include interface in alert info (fast, full, or syslog only)
- bool **alerts.default_rule_state** = true: enable or disable ips rules
- int **alerts.detection_filter_memcap** = 1048576: set available bytes of memory for detection_filters { 0: }
- int **alerts.event_filter_memcap** = 1048576: set available bytes of memory for event_filters { 0: }
- string **alerts.order** = pass drop alert log: change the order of rule action application
- int **alerts.rate_filter_memcap** = 1048576: set available bytes of memory for rate_filters { 0: }
- string **alerts.reference_net**: set the CIDR for homenet (for use with -l or -B, does NOT change \$HOME_NET in IDS mode)
- bool **alerts.stateful** = false: don't alert w/o established session (note: rule action still taken)
- string **alerts.tunnel_verdicts**: let DAQ handle non-allow verdicts for GTP|Teredo|6in4|4in6 traffic

6.3 attribute_table

What: configure hosts loading

Type: basic

Configuration:

- int **attribute_table.max_hosts** = 1024: maximum number of hosts in attribute table { 32:207551 }
 - int **attribute_table.max_services_per_host** = 8: maximum number of services per host entry in attribute table { 1:65535 }
 - int **attribute_table.max_metadata_services** = 8: maximum number of services in rule metadata { 1:256 }
-

6.4 classifications

What: define rule categories with priority

Type: basic

Configuration:

- string **classifications[].name**: name used with classtype rule option
- int **classifications[].priority** = 1: default priority for class { 0: }
- string **classifications[].text**: description of class

6.5 daq

What: configure packet acquisition interface

Type: basic

Configuration:

- string **daq.module_dirs[].str**: string parameter
- string **daq.input_spec**: input specification
- string **daq.module**: DAQ module to use
- string **daq.variables[].str**: string parameter
- int **daq.instances[].id**: instance ID (required) { 0: }
- string **daq.instances[].input_spec**: input specification
- string **daq.instances[].variables[].str**: string parameter
- int **daq.snaplen**: set snap length (same as -s) { 0:65535 }
- bool **daq.no_promisc** = false: whether to put DAQ device into promiscuous mode

Peg counts:

- **daq.pcaps**: total files and interfaces processed
 - **daq.received**: total packets received from DAQ
 - **daq.analyzed**: total packets analyzed from DAQ
 - **daq.dropped**: packets dropped
 - **daq.filtered**: packets filtered out
 - **daq.outstanding**: packets unprocessed
 - **daq.injected**: active responses or replacements
 - **daq.allow**: total allow verdicts
 - **daq.block**: total block verdicts
 - **daq.replace**: total replace verdicts
 - **daq.whitelist**: total whitelist verdicts
 - **daq.blacklist**: total blacklist verdicts
-

- **daq.ignore**: total ignore verdicts
- **daq.internal_blacklist**: packets blacklisted internally due to lack of DAQ support
- **daq.internal_whitelist**: packets whitelisted internally due to lack of DAQ support
- **daq.skipped**: packets skipped at startup
- **daq.idle**: attempts to acquire from DAQ without available packets

6.6 decode

What: general decoder rules

Type: basic

Rules:

- **116:450** (decode) bad IP protocol
- **116:293** (decode) two or more IP (v4 and/or v6) encapsulation layers present
- **116:459** (decode) fragment with zero length
- **116:150** (decode) loopback IP
- **116:151** (decode) same src/dst IP
- **116:449** (decode) unassigned/reserved IP protocol
- **116:472** (decode) too many protocols present

6.7 detection

What: configure general IPS rule processing parameters

Type: basic

Configuration:

- int **detection.asn1** = 256: maximum decode nodes { 1: }
- bool **detection.pcre_enable** = true: disable pcre pattern matching
- int **detection.pcre_match_limit** = 1500: limit pcre backtracking, -1 = max, 0 = off { -1:1000000 }
- int **detection.pcre_match_limit_recursion** = 1500: limit pcre stack consumption, -1 = max, 0 = off { -1:10000 }

Peg counts:

- **detection.analyzed**: packets sent to detection
 - **detection.hard_evals**: non-fast pattern rule evaluations
 - **detection.raw_searches**: fast pattern searches in raw packet data
 - **detection.cooked_searches**: fast pattern searches in cooked packet data
 - **detection.pkt_searches**: fast pattern searches in packet data
 - **detection.alt_searches**: alt fast pattern searches in packet data
 - **detection.key_searches**: fast pattern searches in key buffer
-

- **detection.header_searches**: fast pattern searches in header buffer
- **detection.body_searches**: fast pattern searches in body buffer
- **detection.file_searches**: fast pattern searches in file buffer
- **detection.alerts**: alerts not including IP reputation
- **detection.total_alerts**: alerts including IP reputation
- **detection.logged**: logged packets
- **detection.passed**: passed packets
- **detection.match_limit**: fast pattern matches not processed
- **detection.queue_limit**: events not queued because queue full
- **detection.log_limit**: events queued but not logged
- **detection.event_limit**: events filtered
- **detection.alert_limit**: events previously triggered on same PDU

6.8 event_filter

What: configure thresholding of events

Type: basic

Configuration:

- **int event_filter[].gid** = 1: rule generator ID { 0: }
- **int event_filter[].sid** = 1: rule signature ID { 0: }
- **enum event_filter[].type**: 1st count events | every count events | once after count events { limit | threshold | both }
- **enum event_filter[].track**: filter only matching source or destination addresses { by_src | by_dst }
- **int event_filter[].count** = 0: number of events in interval before tripping; -1 to disable { -1: }
- **int event_filter[].seconds** = 0: count interval { 0: }
- **string event_filter[].ip**: restrict filter to these addresses according to track

6.9 event_queue

What: configure event queue parameters

Type: basic

Configuration:

- **int event_queue.max_queue** = 8: maximum events to queue { 1: }
- **int event_queue.log** = 3: maximum events to log { 1: }
- **enum event_queue.order_events** = content_length: criteria for ordering incoming events { priority | content_length }
- **bool event_queue.process_all_events** = false: process just first action group or all action groups

6.10 high_availability

What: implement flow tracking high availability

Type: basic

Configuration:

- bool **high_availability.enable** = false: enable high availability
- bool **high_availability.daq_channel** = false: enable use of daq data plane channel
- bit_list **high_availability.ports**: side channel message port list { 65535 }
- real **high_availability.min_age** = 1.0: minimum session life before HA updates { 0.0:100.0 }
- real **high_availability.min_sync** = 1.0: minimum interval between HA updates { 0.0:100.0 }

6.11 host_cache

What: configure hosts

Type: basic

Configuration:

- int **host_cache[].size**: size of host cache

Peg counts:

- **host_cache.lru_cache_adds**: lru cache added new entry
- **host_cache.lru_cache_replaces**: lru cache replaced existing entry
- **host_cache.lru_cache_prunes**: lru cache pruned entry to make space for new entry
- **host_cache.lru_cache_find_hits**: lru cache found entry in cache
- **host_cache.lru_cache_find_misses**: lru cache did not find entry in cache
- **host_cache.lru_cache_removes**: lru cache found entry and removed it
- **host_cache.lru_cache_clears**: lru cache clear API calls

6.12 host_tracker

What: configure hosts

Type: basic

Configuration:

- addr **host_tracker[].ip** = 0.0.0.0/32: hosts address / cidr
 - enum **host_tracker[].frag_policy**: defragmentation policy { first | linux | bsd | bsd_right | last | windows | solaris }
 - enum **host_tracker[].tcp_policy**: tcp reassembly policy { first | last | linux | old_linux | bsd | macos | solaris | irix | hpux11 | hpux10 | windows | win_2003 | vista | proxy }
 - string **host_tracker[].services[].name**: service identifier
 - enum **host_tracker[].services[].proto** = tcp: ip protocol { tcp | udp }
-

- port **host_tracker[].services[].port**: port number

Peg counts:

- **host_tracker.service_adds**: host service adds
- **host_tracker.service_finds**: host service finds
- **host_tracker.service_removes**: host service removes

6.13 hosts

What: configure hosts

Type: basic

Configuration:

- addr **hosts[].ip** = 0.0.0.0/32: hosts address / cidr
- enum **hosts[].frag_policy**: defragmentation policy { first | linux | bsd | bsd_right | last | windows | solaris }
- enum **hosts[].tcp_policy**: tcp reassembly policy { first | last | linux | old_linux | bsd | macos | solaris | irix | hpux11 | hpux10 | windows | win_2003 | vista | proxy }
- string **hosts[].services[].name**: service identifier
- enum **hosts[].services[].proto** = tcp: ip protocol { tcp | udp }
- port **hosts[].services[].port**: port number

6.14 ips

What: configure IPS rule processing

Type: basic

Configuration:

- bool **ips.enable_builtin_rules** = false: enable events from builtin rules w/o stubs
- int **ips.id** = 0: correlate unified2 events with configuration { 0:65535 }
- string **ips.include**: legacy snort rules and includes
- enum **ips.mode**: set policy mode { tap | inline | inline-test }
- string **ips.rules**: snort rules and includes

6.15 latency

What: packet and rule latency monitoring and control

Type: basic

Configuration:

- int **latency.packet.max_time** = 500: set timeout for packet latency thresholding (usec) { 0: }
 - bool **latency.packet.fastpath** = false: fastpath expensive packets (max_time exceeded)
 - enum **latency.packet.action** = none: event action if packet times out and is fastpathed { none | alert | log | alert_and_log }
-

- int **latency.rule.max_time** = 500: set timeout for rule evaluation (usec) { 0: }
- bool **latency.rule.suspend** = false: temporarily suspend expensive rules
- int **latency.rule.suspend_threshold** = 5: set threshold for number of timeouts before suspending a rule { 1: }
- int **latency.rule.max_suspend_time** = 30000: set max time for suspending a rule (ms, 0 means permanently disable rule) { 0: }
- enum **latency.rule.action** = none: event action for rule latency enable and suspend events { none | alert | log | alert_and_log }

Rules:

- **134:1** (latency) rule tree suspended due to latency
- **134:2** (latency) rule tree re-enabled after suspend timeout
- **134:3** (latency) packet fastpathed due to latency

Peg counts:

- **latency.total_packets**: total packets monitored
- **latency.total_usecs**: total usecs elapsed
- **latency.max_usecs**: maximum usecs elapsed
- **latency.packet_timeouts**: packets that timed out
- **latency.total_rule_evals**: total rule evals monitored
- **latency.rule_eval_timeouts**: rule evals that timed out
- **latency.rule_tree_enables**: rule tree re-enables

6.16 memory

What: memory management configuration

Type: basic

Configuration:

- int **memory.cap** = 0: set the per-packet-thread cap on memory (bytes, 0 to disable) { 0: }
- bool **memory.soft** = false: always succeed in allocating memory, even if above the cap
- int **memory.threshold** = 0: set the per-packet-thread threshold for preemptive cleanup actions (percent, 0 to disable) { 0: }

6.17 network

What: configure basic network parameters

Type: basic

Configuration:

- multi **network.checksum_drop** = none: drop if checksum is bad { all | ip | noip | tcp | notcp | udp | noudp | icmp | noicmp | none }
- multi **network.checksum_eval** = none: checksums to verify { all | ip | noip | tcp | notcp | udp | noudp | icmp | noicmp | none }

- bool **network.decode_drops** = false: enable dropping of packets by the decoder
- int **network.id** = 0: correlate unified2 events with configuration { 0:65535 }
- int **network.min_ttl** = 1: alert / normalize packets with lower ttl / hop limit (you must enable rules and / or normalization also) { 1:255 }
- int **network.new_ttl** = 1: use this value for responses and when normalizing { 1:255 }
- int **network.layers** = 40: the maximum number of protocols that Snort can correctly decode { 3:255 }
- int **network.max_ip6_extensions** = 0: the maximum number of IP6 options Snort will process for a given IPv6 layer before raising 116:456 (0 = unlimited) { 0:255 }
- int **network.max_ip_layers** = 0: the maximum number of IP layers Snort will process for a given packet before raising 116:293 (0 = unlimited) { 0:255 }

6.18 output

What: configure general output parameters

Type: basic

Configuration:

- bool **output.dump_chars_only** = false: turns on character dumps (same as -C)
- bool **output.dump_payload** = false: dumps application layer (same as -d)
- bool **output.dump_payload_verbose** = false: dumps raw packet starting at link layer (same as -X)
- bool **output.log_ipv6_extra_data** = false: log IPv6 source and destination addresses as unified2 extra data records
- int **output.event_trace.max_data** = 0: maximum amount of packet data to capture { 0:65535 }
- bool **output.quiet** = false: suppress non-fatal information (still show alerts, same as -q)
- string **output.logdir** = .: where to put log files (same as -l)
- bool **output.obfuscate** = false: obfuscate the logged IP addresses (same as -O)
- bool **output.obfuscate_pii** = false: mask all but the last 4 characters of credit card and social security numbers
- bool **output.show_year** = false: include year in timestamp in the alert and log files (same as -y)
- int **output.tagged_packet_limit** = 256: maximum number of packets tagged for non-packet metrics { 0: }
- bool **output.verbose** = false: be verbose (same as -v)

6.19 packets

What: configure basic packet handling

Type: basic

Configuration:

- bool **packets.address_space_agnostic** = false: determines whether DAQ address space info is used to track fragments and connections
 - string **packets.bpf_file**: file with BPF to select traffic for Snort
 - int **packets.limit** = 0: maximum number of packets to process before stopping (0 is unlimited) { 0: }
 - int **packets.skip** = 0: number of packets to skip before before processing { 0: }
 - bool **packets.vlan_agnostic** = false: determines whether VLAN info is used to track fragments and connections
-

6.20 process

What: configure basic process setup

Type: basic

Configuration:

- string **process.chroot**: set chroot directory (same as -t)
- string **process.threads[].cpuset**: pin the associated thread to this cpuset
- int **process.threads[].thread** = 0: set cpu affinity for the <cur_thread_num> thread that runs { 0: }
- bool **process.daemon** = false: fork as a daemon (same as -D)
- bool **process.dirty_pig** = false: shutdown without internal cleanup
- string **process.set_gid**: set group ID (same as -g)
- string **process.set_uid**: set user ID (same as -u)
- string **process.umask**: set process umask (same as -m)
- bool **process.utc** = false: use UTC instead of local time for timestamps

6.21 profiler

What: configure profiling of rules and/or modules

Type: basic

Configuration:

- bool **profiler.modules.show** = true: show module time profile stats
 - int **profiler.modules.count** = 0: limit results to count items per level (0 = no limit) { 0: }
 - enum **profiler.modules.sort** = total_time: sort by given field { none | checks | avg_check | total_time }
 - int **profiler.modules.max_depth** = -1: limit depth to max_depth (-1 = no limit) { -1: }
 - bool **profiler.memory.show** = true: show module memory profile stats
 - int **profiler.memory.count** = 0: limit results to count items per level (0 = no limit) { 0: }
 - enum **profiler.memory.sort** = total_used: sort by given field { none | allocations | total_used | avg_allocation }
 - int **profiler.memory.max_depth** = -1: limit depth to max_depth (-1 = no limit) { -1: }
 - bool **profiler.rules.show** = true: show rule time profile stats
 - int **profiler.rules.count** = 0: print results to given level (0 = all) { 0: }
 - enum **profiler.rules.sort** = total_time: sort by given field { none | checks | avg_check | total_time | matches | no_matches | avg_match | avg_no_match }
-

6.22 rate_filter

What: configure rate filters (which change rule actions)

Type: basic

Configuration:

- int **rate_filter[].gid** = 1: rule generator ID { 0: }
- int **rate_filter[].sid** = 1: rule signature ID { 0: }
- enum **rate_filter[].track** = by_src: filter only matching source or destination addresses { by_src | by_dst | by_rule }
- int **rate_filter[].count** = 1: number of events in interval before tripping { 0: }
- int **rate_filter[].seconds** = 1: count interval { 0: }
- enum **rate_filter[].new_action** = alert: take this action on future hits until timeout { log | pass | alert | drop | block | reset }
- int **rate_filter[].timeout** = 1: count interval { 0: }
- string **rate_filter[].apply_to**: restrict filter to these addresses according to track

6.23 references

What: define reference systems used in rules

Type: basic

Configuration:

- string **references[].name**: name used with reference rule option
- string **references[].url**: where this reference is defined

6.24 rule_state

What: enable/disable specific IPS rules

Type: basic

Configuration:

- int **rule_state.gid** = 0: rule generator ID { 0: }
- int **rule_state.sid** = 0: rule signature ID { 0: }
- bool **rule_state.enable** = true: enable or disable rule in all policies

6.25 search_engine

What: configure fast pattern matcher

Type: basic

Configuration:

- int **search_engine.bleedover_port_limit** = 1024: maximum ports in rule before demotion to any-any port group { 1: }
 - bool **search_engine.bleedover_warnings_enabled** = false: print warning if a rule is demoted to any-any port group
-

- bool **search_engine.enable_single_rule_group** = false: put all rules into one group
- bool **search_engine.debug** = false: print verbose fast pattern info
- bool **search_engine.debug_print_nocontent_rule_tests** = false: print rule group info during packet evaluation
- bool **search_engine.debug_print_rule_group_build_details** = false: print rule group info during compilation
- bool **search_engine.debug_print_rule_groups_uncompiled** = false: prints uncompiled rule group information
- bool **search_engine.debug_print_rule_groups_compiled** = false: prints compiled rule group information
- int **search_engine.max_pattern_len** = 0: truncate patterns when compiling into state machine (0 means no maximum) { 0: }
- int **search_engine.max_queue_events** = 5: maximum number of matching fast pattern states to queue per packet
- bool **search_engine.inspect_stream_inserts** = false: inspect reassembled payload - disabling is good for performance, bad for detection
- dynamic **search_engine.search_method** = ac_bnfa: set fast pattern algorithm - choose available search engine { ac_banded | ac_bnfa | ac_full | ac_sparse | ac_sparse_bands | ac_std | hyperscan }
- bool **search_engine.search_optimize** = true: tweak state machine construction for better performance
- bool **search_engine.show_fast_patterns** = false: print fast pattern info for each rule
- bool **search_engine.split_any_any** = false: evaluate any-any rules separately to save memory

Peg counts:

- **search_engine.max_queued**: maximum fast pattern matches queued for further evaluation
- **search_engine.total_flushed**: fast pattern matches discarded due to overflow
- **search_engine.total_inserts**: total fast pattern hits
- **search_engine.total_unique**: total unique fast pattern hits
- **search_engine.non_qualified_events**: total non-qualified events
- **search_engine.qualified_events**: total qualified events

6.26 side_channel

What: implement the side-channel asynchronous messaging subsystem

Type: basic

Configuration:

- bit_list **side_channel.ports**: side channel message port list { 65535 }
 - string **side_channel.connectors[].connector**: connector handle
 - string **side_channel.connector**: connector handle
-

6.27 snort

What: command line configuration and shell commands

Type: basic

Configuration:

- string **snort.-?**: <option prefix> output matching command line option quick help (same as --help-options) { (optional) }
- string **snort.-A**: <mode> set alert mode: none, cmg, or alert_*
- addr **snort.-B** = 255.255.255.255/32: <mask> obfuscated IP addresses in alerts and packet dumps using CIDR mask
- implied **snort.-C**: print out payloads with character data only (no hex)
- string **snort.-c**: <conf> use this configuration
- implied **snort.-D**: run Snort in background (daemon) mode
- implied **snort.-d**: dump the Application Layer
- implied **snort.-e**: display the second layer header info
- implied **snort.-f**: turn off fflush() calls after binary log writes
- int **snort.-G**: <0xid> (same as --logid) { 0:65535 }
- string **snort.-g**: <gname> run snort gid as <gname> group (or gid) after initialization
- implied **snort.-H**: make hash tables deterministic
- string **snort.-i**: <iface>... list of interfaces
- port **snort.-j**: <port> to listen for telnet connections
- enum **snort.-k** = all: <mode> checksum mode; default is all { all|no|pl|notc|plnoud|plnoic|mpl|none }
- string **snort.-L**: <mode> logging mode (none, dump, pcap, or log_*)
- string **snort.-l**: <logdir> log to this directory instead of current directory
- implied **snort.-M**: log messages to syslog (not alerts)
- int **snort.-m**: <umask> set umask = <umask> { 0: }
- int **snort.-n**: <count> stop after count packets { 0: }
- implied **snort.-O**: obfuscate the logged IP addresses
- implied **snort.-Q**: enable inline mode operation
- implied **snort.-q**: quiet mode - Don't show banner and status report
- string **snort.-R**: <rules> include this rules file in the default policy
- string **snort.-r**: <pcap>... (same as --pcap-list)
- string **snort.-S**: <x=v> set config variable x equal to value v
- int **snort.-s** = 1514: <snap> (same as --snaplen); default is 1514 { 68:65535 }
- implied **snort.-T**: test and report on the current Snort configuration
- string **snort.-t**: <dir> chroots process to <dir> after initialization
- implied **snort.-U**: use UTC for timestamps

- string **snort.-u**: <uname> run snort as <uname> or <uid> after initialization
 - implied **snort.-V**: (same as --version)
 - implied **snort.-v**: be verbose
 - implied **snort.-W**: lists available interfaces
 - implied **snort.-X**: dump the raw packet data starting at the link layer
 - implied **snort.-x**: same as --pedantic
 - implied **snort.-y**: include year in timestamp in the alert and log files
 - int **snort.-z** = 1: <count> maximum number of packet threads (same as --max-packet-threads); 0 gets the number of CPU cores reported by the system; default is 1 { 0: }
 - implied **snort.--alert-before-pass**: process alert, drop, sdrop, or reject before pass; default is pass before alert, drop,...
 - string **snort.--bpf**: <filter options> are standard BPF options, as seen in TCPDump
 - string **snort.--c2x**: output hex for given char (see also --x2c)
 - implied **snort.--create-pidfile**: create PID file, even when not in Daemon mode
 - string **snort.--daq**: <type> select packet acquisition module (default is pcap)
 - string **snort.--daq-dir**: <dir> tell snort where to find desired DAQ
 - implied **snort.--daq-list**: list packet acquisition modules available in optional dir, default is static modules only
 - string **snort.--daq-var**: <name=value> specify extra DAQ configuration variable
 - implied **snort.--dirty-pig**: don't flush packets on shutdown
 - implied **snort.--dump-builtin-rules**: [<module prefix>] output stub rules for selected modules
 - implied **snort.--dump-dynamic-rules**: output stub rules for all loaded rules libraries
 - string **snort.--dump-defaults**: [<module prefix>] output module defaults in Lua format { (optional) }
 - implied **snort.--dump-version**: output the version, the whole version, and only the version
 - implied **snort.--enable-inline-test**: enable Inline-Test Mode Operation
 - implied **snort.--help**: list command line options
 - string **snort.--help-commands**: [<module prefix>] output matching commands { (optional) }
 - string **snort.--help-config**: [<module prefix>] output matching config options { (optional) }
 - string **snort.--help-counts**: [<module prefix>] output matching peg counts { (optional) }
 - string **snort.--help-module**: <module> output description of given module
 - implied **snort.--help-modules**: list all available modules with brief help
 - string **snort.--help-options**: <option prefix> output matching command line option quick help (same as -?) { (optional) }
 - implied **snort.--help-plugins**: list all available plugins with brief help
 - implied **snort.--help-signals**: dump available control signals
 - implied **snort.--id-subdir**: create/use instance subdirectories in logdir instead of instance filename prefix
 - implied **snort.--id-zero**: use id prefix / subdirectory even with one packet thread
 - implied **snort.--list-buffers**: output available inspection buffers
-

- string **snort.--list-builtin**: <module prefix> output matching builtin rules { (optional) }
 - string **snort.--list-gids**: [<module prefix>] output matching generators { (optional) }
 - string **snort.--list-modules**: [<module type>] list all known modules of given type { (optional) }
 - implied **snort.--list-plugins**: list all known plugins
 - string **snort.--lua**: <chunk> extend/override conf with chunk; may be repeated
 - int **snort.--logid**: <0xid> log Identifier to uniquely id events for multiple snorts (same as -G) { 0:65535 }
 - implied **snort.--markup**: output help in asciidoc compatible format
 - int **snort.--max-packet-threads** = 1: <count> configure maximum number of packet threads (same as -z) { 0: }
 - implied **snort.--nostamps**: don't include timestamps in log file names
 - implied **snort.--nolock-pidfile**: do not try to lock Snort PID file
 - implied **snort.--pause**: wait for resume/quit command before processing packets/terminating
 - string **snort.--pcap-file**: <file> file that contains a list of pcaps to read - read mode is implied
 - string **snort.--pcap-list**: <list> a space separated list of pcaps to read - read mode is implied
 - string **snort.--pcap-dir**: <dir> a directory to recurse to look for pcaps - read mode is implied
 - string **snort.--pcap-filter**: <filter> filter to apply when getting pcaps from file or directory
 - int **snort.--pcap-loop**: <count> read all pcaps <count> times; 0 will read until Snort is terminated { -1: }
 - implied **snort.--pcap-no-filter**: reset to use no filter when getting pcaps from file or directory
 - implied **snort.--pcap-reload**: if reading multiple pcaps, reload snort config between pcaps
 - implied **snort.--pcap-show**: print a line saying what pcap is currently being read
 - implied **snort.--pedantic**: warnings are fatal
 - string **snort.--plugin-path**: <path> where to find plugins
 - implied **snort.--process-all-events**: process all action groups
 - string **snort.--rule**: <rules> to be added to configuration; may be repeated
 - implied **snort.--rule-to-hex**: output so rule header to stdout for text rule on stdin
 - implied **snort.--rule-to-text**: output plain so rule header to stdout for text rule on stdin
 - string **snort.--run-prefix**: <pfx> prepend this to each output file
 - string **snort.--script-path**: <path> to a luajit script or directory containing luajit scripts
 - implied **snort.--shell**: enable the interactive command line
 - implied **snort.--piglet**: enable piglet test harness mode
 - implied **snort.--show-plugins**: list module and plugin versions
 - int **snort.--skip**: <n> skip 1st n packets { 0: }
 - int **snort.--snaplen** = 1514: <snap> set snaplen of packet (same as -s) { 68:65535 }
 - implied **snort.--stdin-rules**: read rules from stdin until EOF or a line starting with END is read
 - implied **snort.--treat-drop-as-alert**: converts drop, sdrops, and reject rules into alert rules during startup
 - implied **snort.--treat-drop-as-ignore**: use drop, sdrops, and reject rules to ignore session traffic when not inline
-

- string **snort.--catch-test**: comma separated list of cat unit test tags or *all*
- implied **snort.--version**: show version number (same as -V)
- implied **snort.--warn-all**: enable all warnings
- implied **snort.--warn-conf**: warn about configuration issues
- implied **snort.--warn-daq**: warn about DAQ issues, usually related to mode
- implied **snort.--warn-flowbits**: warn about flowbits that are checked but not set and vice-versa
- implied **snort.--warn-hosts**: warn about host table issues
- implied **snort.--warn-plugins**: warn about issues that prevent plugins from loading
- implied **snort.--warn-rules**: warn about duplicate rules and rule parsing issues
- implied **snort.--warn-scripts**: warn about issues discovered while processing Lua scripts
- implied **snort.--warn-symbols**: warn about unknown symbols in your Lua config
- implied **snort.--warn-vars**: warn about variable definition and usage issues
- int **snort.--x2c**: output ASCII char for given hex (see also --c2x)
- string **snort.--x2s**: output ASCII string for given byte code (see also --x2c)

Commands:

- **snort.show_plugins()**: show available plugins
- **snort.dump_stats()**: show summary statistics
- **snort.rotate_stats()**: roll perfmonitor log files
- **snort.reload_config(filename)**: load new configuration
- **snort.reload_hosts(filename)**: load a new hosts table
- **snort.pause()**: suspend packet processing
- **snort.resume()**: continue packet processing
- **snort.detach()**: exit shell w/o shutdown
- **snort.quit()**: shutdown and dump-stats
- **snort.help()**: this output

Peg counts:

- **snort.local_commands**: total local commands processed
 - **snort.remote_commands**: total remote commands processed
 - **snort.signals**: total signals processed
 - **snort.conf_reloads**: number of times configuration was reloaded
 - **snort.attribute_table_reloads**: number of times hosts table was reloaded
 - **snort.attribute_table_hosts**: total number of hosts in table
-

6.28 suppress

What: configure event suppressions

Type: basic

Configuration:

- int **suppress[].gid** = 0: rule generator ID { 0: }
- int **suppress[].sid** = 0: rule signature ID { 0: }
- enum **suppress[].track**: suppress only matching source or destination addresses { by_src | by_dst }
- string **suppress[].ip**: restrict suppression to these addresses according to track

7 Codec Modules

Codec is short for coder / decoder. These modules are used for basic protocol decoding, anomaly detection, and construction of active responses.

7.1 arp

What: support for address resolution protocol

Type: codec

Rules:

- **116:109** (arp) truncated ARP

7.2 auth

What: support for IP authentication header

Type: codec

Rules:

- **116:465** (auth) truncated authentication header
- **116:466** (auth) bad authentication header length

7.3 ciscometadata

What: support for cisco metadata

Type: codec

Rules:

- **116:468** (ciscometadata) truncated Cisco Metadata header
 - **116:469** (ciscometadata) invalid Cisco Metadata option length
 - **116:470** (ciscometadata) invalid Cisco Metadata option type
 - **116:471** (ciscometadata) invalid Cisco Metadata SGT
-

7.4 eapol

What: support for extensible authentication protocol over LAN

Type: codec

Rules:

- **116:110** (eapol) truncated EAP header
- **116:111** (eapol) EAP key truncated
- **116:112** (eapol) EAP header truncated

7.5 erspan2

What: support for encapsulated remote switched port analyzer - type 2

Type: codec

Rules:

- **116:462** (erspan2) ERSpan header version mismatch
- **116:463** (erspan2) captured length < ERSpan type2 header length

7.6 erspan3

What: support for encapsulated remote switched port analyzer - type 3

Type: codec

Rules:

- **116:464** (erspan3) captured < ERSpan type3 header length

7.7 esp

What: support for encapsulating security payload

Type: codec

Configuration:

- bool **esp.decode_esp** = false: enable for inspection of esp traffic that has authentication but not encryption

Rules:

- **116:294** (esp) truncated encapsulated security payload header

7.8 eth

What: support for ethernet protocol (DLT 1) (DLT 51)

Type: codec

Rules:

- **116:424** (eth) truncated ethernet header
-

7.9 fabricpath

What: support for fabricpath

Type: codec

Rules:

- **116:467** (fabricpath) truncated FabricPath header

7.10 gre

What: support for generic routing encapsulation

Type: codec

Rules:

- **116:160** (gre) GRE header length > payload length
- **116:161** (gre) multiple encapsulations in packet
- **116:162** (gre) invalid GRE version
- **116:163** (gre) invalid GRE header
- **116:164** (gre) invalid GRE v.1 PPTP header
- **116:165** (gre) GRE trans header length > payload length

7.11 gtp

What: support for general-packet-radio-service tunnelling protocol

Type: codec

Rules:

- **116:297** (gtp) two or more GTP encapsulation layers present
- **116:298** (gtp) GTP header length is invalid

7.12 icmp4

What: support for Internet control message protocol v4

Type: codec

Rules:

- **116:105** (icmp4) ICMP header truncated
 - **116:106** (icmp4) ICMP timestamp header truncated
 - **116:107** (icmp4) ICMP address header truncated
 - **116:250** (icmp4) ICMP original IP header truncated
 - **116:251** (icmp4) ICMP version and original IP header versions differ
 - **116:252** (icmp4) ICMP original datagram length < original IP header length
-

- **116:253** (icmp4) ICMP original IP payload < 64 bits
- **116:254** (icmp4) ICMP original IP payload > 576 bytes
- **116:255** (icmp4) ICMP original IP fragmented and offset not 0
- **116:415** (icmp4) ICMP4 packet to multicast dest address
- **116:416** (icmp4) ICMP4 packet to broadcast dest address
- **116:418** (icmp4) ICMP4 type other
- **116:434** (icmp4) ICMP ping Nmap
- **116:435** (icmp4) ICMP icmpenum v1.1.1
- **116:436** (icmp4) ICMP redirect host
- **116:437** (icmp4) ICMP redirect net
- **116:438** (icmp4) ICMP traceroute ipopts
- **116:439** (icmp4) ICMP source quench
- **116:440** (icmp4) broadscan smurf scanner
- **116:441** (icmp4) ICMP destination unreachable communication administratively prohibited
- **116:442** (icmp4) ICMP destination unreachable communication with destination host is administratively prohibited
- **116:443** (icmp4) ICMP destination unreachable communication with destination network is administratively prohibited
- **116:451** (icmp4) ICMP path MTU denial of service attempt
- **116:452** (icmp4) Linux ICMP header DOS attempt
- **116:426** (icmp4) truncated ICMP4 header

Peg counts:

- **icmp4.bad_checksum**: non-zero icmp checksums

7.13 icmp6

What: support for Internet control message protocol v6

Type: codec

Rules:

- **116:427** (icmp6) truncated ICMP6 header
 - **116:431** (icmp6) ICMPv6 type not decoded
 - **116:432** (icmp6) ICMPv6 packet to multicast address
 - **116:285** (icmp6) ICMPv6 packet of type 2 (message too big) with MTU field < 1280
 - **116:286** (icmp6) ICMPv6 packet of type 1 (destination unreachable) with non-RFC 2463 code
 - **116:287** (icmp6) ICMPv6 router solicitation packet with a code not equal to 0
 - **116:288** (icmp6) ICMPv6 router advertisement packet with a code not equal to 0
 - **116:289** (icmp6) ICMPv6 router solicitation packet with the reserved field not equal to 0
-

- **116:290** (icmp6) ICMPv6 router advertisement packet with the reachable time field set > 1 hour
- **116:457** (icmp6) ICMPv6 packet of type 1 (destination unreachable) with non-RFC 4443 code
- **116:460** (icmp6) ICMPv6 node info query/response packet with a code greater than 2

Peg counts:

- **icmp6.bad_icmp4_checksum**: nonzero ipcm4 checksums
- **icmp6.bad_icmp6_checksum**: nonzero ipcm6 checksums

7.14 igmp

What: support for Internet group management protocol

Type: codec

Rules:

- **116:455** (igmp) DOS IGMP IP options validation attempt

7.15 ipv4

What: support for Internet protocol v4

Type: codec

Rules:

- **116:1** (ipv4) not IPv4 datagram
 - **116:2** (ipv4) IPv4 header length < minimum
 - **116:3** (ipv4) IPv4 datagram length < header field
 - **116:4** (ipv4) IPv4 options found with bad lengths
 - **116:5** (ipv4) truncated IPv4 options
 - **116:6** (ipv4) IPv4 datagram length > captured length
 - **116:404** (ipv4) IPv4 packet with zero TTL
 - **116:405** (ipv4) IPv4 packet with bad frag bits (both MF and DF set)
 - **116:407** (ipv4) IPv4 packet frag offset + length exceed maximum
 - **116:408** (ipv4) IPv4 packet from *current net* source address
 - **116:409** (ipv4) IPv4 packet to *current net* dest address
 - **116:410** (ipv4) IPv4 packet from multicast source address
 - **116:411** (ipv4) IPv4 packet from reserved source address
 - **116:412** (ipv4) IPv4 packet to reserved dest address
 - **116:413** (ipv4) IPv4 packet from broadcast source address
 - **116:414** (ipv4) IPv4 packet to broadcast dest address
 - **116:428** (ipv4) IPv4 packet below TTL limit
-

- **116:430** (ipv4) IPv4 packet both DF and offset set
- **116:448** (ipv4) IPv4 reserved bit set
- **116:444** (ipv4) IPv4 option set
- **116:425** (ipv4) truncated IPv4 header

Peg counts:

- **ipv4.bad_checksum**: nonzero ip checksums

7.16 ipv6

What: support for Internet protocol v6

Type: codec

Rules:

- **116:270** (ipv6) IPv6 packet below TTL limit
 - **116:271** (ipv6) IPv6 header claims to not be IPv6
 - **116:272** (ipv6) IPv6 truncated extension header
 - **116:273** (ipv6) IPv6 truncated header
 - **116:274** (ipv6) IPv6 datagram length < header field
 - **116:275** (ipv6) IPv6 datagram length > captured length
 - **116:276** (ipv6) IPv6 packet with destination address ::0
 - **116:277** (ipv6) IPv6 packet with multicast source address
 - **116:278** (ipv6) IPv6 packet with reserved multicast destination address
 - **116:279** (ipv6) IPv6 header includes an undefined option type
 - **116:280** (ipv6) IPv6 address includes an unassigned multicast scope value
 - **116:281** (ipv6) IPv6 header includes an invalid value for the *next header* field
 - **116:282** (ipv6) IPv6 header includes a routing extension header followed by a hop-by-hop header
 - **116:283** (ipv6) IPv6 header includes two routing extension headers
 - **116:292** (ipv6) IPv6 header has destination options followed by a routing header
 - **116:291** (ipv6) IPv6 tunneled over IPv4, IPv6 header truncated, possible Linux kernel attack
 - **116:295** (ipv6) IPv6 header includes an option which is too big for the containing header
 - **116:296** (ipv6) IPv6 packet includes out-of-order extension headers
 - **116:429** (ipv6) IPv6 packet has zero hop limit
 - **116:453** (ipv6) ISATAP-addressed IPv6 traffic spoofing attempt
 - **116:458** (ipv6) bogus fragmentation packet, possible BSD attack
 - **116:461** (ipv6) IPv6 routing type 0 extension header
 - **116:456** (ipv6) too many IPv6 extension headers
-

7.17 mpls

What: support for multiprotocol label switching

Type: codec

Configuration:

- bool **mpls.enable_mpls_multicast** = false: enables support for MPLS multicast
- bool **mpls.enable_mpls_overlapping_ip** = false: enable if private network addresses overlap and must be differentiated by MPLS label(s)
- int **mpls.max_mpls_stack_depth** = -1: set MPLS stack depth { -1: }
- enum **mpls.mpls_payload_type** = ip4: set encapsulated payload type { eth | ip4 | ip6 }

Rules:

- **116:170** (mpls) bad MPLS frame
- **116:171** (mpls) MPLS label 0 appears in non-bottom header
- **116:172** (mpls) MPLS label 1 appears in bottom header
- **116:173** (mpls) MPLS label 2 appears in non-bottom header
- **116:174** (mpls) MPLS label 3 appears in header
- **116:175** (mpls) MPLS label 4, 5,... or 15 appears in header
- **116:176** (mpls) too many MPLS headers

Peg counts:

- **mpls.total_packets**: total mpls labeled packets processed
- **mpls.total_bytes**: total mpls labeled bytes processed

7.18 pgm

What: support for pragmatic general multicast

Type: codec

Rules:

- **116:454** (pgm) PGM nak list overflow attempt

7.19 pppoe

What: support for point-to-point protocol over ethernet

Type: codec

Rules:

- **116:120** (pppoe) bad PPPOE frame detected
-

7.20 tcp

What: support for transmission control protocol

Type: codec

Rules:

- **116:45** (tcp) TCP packet length is smaller than 20 bytes
- **116:46** (tcp) TCP data offset is less than 5
- **116:47** (tcp) TCP header length exceeds packet length
- **116:54** (tcp) TCP options found with bad lengths
- **116:55** (tcp) truncated TCP options
- **116:56** (tcp) T/TCP detected
- **116:57** (tcp) obsolete TCP options found
- **116:58** (tcp) experimental TCP options found
- **116:59** (tcp) TCP window scale option found with length > 14
- **116:400** (tcp) XMAS attack detected
- **116:401** (tcp) Nmap XMAS attack detected
- **116:419** (tcp) TCP urgent pointer exceeds payload length or no payload
- **116:420** (tcp) TCP SYN with FIN
- **116:421** (tcp) TCP SYN with RST
- **116:422** (tcp) TCP PDU missing ack for established session
- **116:423** (tcp) TCP has no SYN, ACK, or RST
- **116:433** (tcp) DDOS shaft SYN flood
- **116:446** (tcp) TCP port 0 traffic
- **116:402** (tcp) DOS NAPTHA vulnerability detected
- **116:403** (tcp) SYN to multicast address

Peg counts:

- **tcp.bad_tcp4_checksum**: nonzero tcp over ip checksums
- **tcp.bad_tcp6_checksum**: nonzero tcp over ipv6 checksums

7.21 token_ring

What: support for token ring decoding

Type: codec

Rules:

- **116:140** (token_ring) bad Token Ring header
 - **116:141** (token_ring) bad Token Ring ETHLLC header
 - **116:142** (token_ring) bad Token Ring MRLEN header
 - **116:143** (token_ring) bad Token Ring MR header
-

7.22 udp

What: support for user datagram protocol

Type: codec

Configuration:

- bool **udp.deep_teredo_inspection** = false: look for Teredo on all UDP ports (default is only 3544)
- bool **udp.enable_gtp** = false: decode GTP encapsulations
- bit_list **udp.gtp_ports** = 2152 3386: set GTP ports { 65535 }

Rules:

- **116:95** (udp) truncated UDP header
- **116:96** (udp) invalid UDP header, length field < 8
- **116:97** (udp) short UDP packet, length field > payload length
- **116:98** (udp) long UDP packet, length field < payload length
- **116:406** (udp) invalid IPv6 UDP packet, checksum zero
- **116:445** (udp) large UDP packet (> 4000 bytes)
- **116:447** (udp) UDP port 0 traffic

Peg counts:

- **udp.bad_udp4_checksum**: nonzero udp over ipv4 checksums
- **udp.bad_udp6_checksum**: nonzero udp over ipv6 checksums

7.23 vlan

What: support for local area network

Type: codec

Rules:

- **116:130** (vlan) bad VLAN frame
- **116:131** (vlan) bad LLC header
- **116:132** (vlan) bad extra LLC info

7.24 wlan

What: support for wireless local area network protocol (DLT 105)

Type: codec

Rules:

- **116:133** (wlan) bad 802.11 LLC header
 - **116:134** (wlan) bad 802.11 extra LLC info
-

8 Connector Modules

Connectors support High Availability communication links.

8.1 file_connector

What: implement the file based connector

Type: connector

Configuration:

- string **file_connector.connector**: connector name
- string **file_connector.name**: channel name
- enum **file_connector.format**: file format { binary | text }
- enum **file_connector.direction**: usage { receive | transmit | duplex }

Peg counts:

- **file_connector.messages**: total messages

8.2 tcp_connector

What: implement the tcp stream connector

Type: connector

Configuration:

- string **tcp_connector.connector**: connector name
- string **tcp_connector.address**: address
- port **tcp_connector.base_port**: base port number
- enum **tcp_connector.setup**: stream establishment { call | answer }

Peg counts:

- **tcp_connector.messages**: total messages

9 Inspector Modules

These modules perform a variety of functions, including analysis of protocols beyond basic decoding.

9.1 appid

What: application and service identification

Type: inspector

Configuration:

- int **appid.memcap** = 0: disregard - not implemented { 0: }
- bool **appid.log_stats** = false: enable logging of appid statistics
- int **appid.app_stats_period** = 300: time period for collecting and logging appid statistics { 0: }
- int **appid.app_stats_rollover_size** = 20971520: max file size for appid stats before rolling over the log file { 0: }
- int **appid.app_stats_rollover_time** = 86400: max time period for collection appid stats before rolling over the log file { 0: }
- string **appid.app_detector_dir**: directory to load appid detectors from
- int **appid.instance_id** = 0: instance id - need more details for what this is { 0: }
- bool **appid.debug** = false: enable appid debug logging
- bool **appid.dump_ports** = false: enable dump of appid port information
- addr **appid.session_log_filter.src_ip** = 0.0.0.0/32: source ip address in CIDR format
- addr **appid.session_log_filter.dst_ip** = 0.0.0.0/32: destination ip address in CIDR format
- port **appid.session_log_filter.src_port**: source port { 1: }
- port **appid.session_log_filter.dst_port**: destination port { 1: }
- string **appid.session_log_filter.protocol**: ip protocol
- bool **appid.session_log_filter.log_all_sessions** = false: enable logging for all appid sessions

Peg counts:

- **appid.packets**: count of packets received
 - **appid.processed_packets**: count of packets processed
 - **appid.ignored_packets**: count of packets ignored
 - **appid.aim_clients**: count of aim clients discovered
 - **appid.battlefield_flows**: count of battle field flows discovered
 - **appid.bgp_flows**: count of bgp flows discovered
 - **appid.bit_clients**: count of bittorrent clients discovered
 - **appid.bit_flows**: count of bittorrent flows discovered
 - **appid.bittracker_clients**: count of bittorrent tracker clients discovered
 - **appid.bootp_flows**: count of bootp flows discovered
 - **appid.dcerpc_tcp_flows**: count of dce rpc flows over tcp discovered
 - **appid.dcerpc_udp_flows**: count of dce rpc flows over udp discovered
 - **appid.direct_connect_flows**: count of direct connect flows discovered
 - **appid.dns_tcp_flows**: count of dns flows over tcp discovered
-

- **appid.dns_udp_flows**: count of dns flows over udp discovered
 - **appid.ftp_flows**: count of ftp flows discovered
 - **appid.ftps_flows**: count of ftps flows discovered
 - **appid.http_flows**: count of http flows discovered
 - **appid.imap_flows**: count of imap service flows discovered
 - **appid.imaps_flows**: count of imap TLS service flows discovered
 - **appid.irc_flows**: count of irc service flows discovered
 - **appid.kerberos_clients**: count of kerberos clients discovered
 - **appid.kerberos_flows**: count of kerberos service flows discovered
 - **appid.kerberos_users**: count of kerberos users discovered
 - **appid.lpr_flows**: count of lpr service flows discovered
 - **appid.mdns_flows**: count of mdns service flows discovered
 - **appid.msn_clients**: count of msn clients discovered
 - **appid.mysql_flows**: count of mysql service flows discovered
 - **appid.netbios_dgm_flows**: count of netbios-dgm service flows discovered
 - **appid.netbios_ns_flows**: count of netbios-ns service flows discovered
 - **appid.netbios_ssn_flows**: count of netbios-ssn service flows discovered
 - **appid.nntp_flows**: count of nntp flows discovered
 - **appid.ntp_flows**: count of ntp flows discovered
 - **appid.pop_flows**: count of pop service flows discovered
 - **appid.pop3_clients**: count of pop3 clients discovered
 - **appid.pop3s_clients**: count of pop3s clients discovered
 - **appid.radius_flows**: count of radius flows discovered
 - **appid.rexec_flows**: count of rexec flows discovered
 - **appid.rfb_flows**: count of rfb flows discovered
 - **appid.rlogin_flows**: count of rlogin flows discovered
 - **appid.rpc_flows**: count of rpc flows discovered
 - **appid.rshell_flows**: count of rshell flows discovered
 - **appid.rsync_flows**: count of rsync service flows discovered
 - **appid.rtmp_flows**: count of rtmp flows discovered
 - **appid.rtp_clients**: count of rtp clients discovered
 - **appid.sip_clients**: count of SIP clients discovered
 - **appid.sip_flows**: count of SIP flows discovered
 - **appid.smtp_aol_clients**: count of AOL smtp clients discovered
 - **appid.smtp_applemail_clients**: count of Apple Mail smtp clients discovered
-

- **appid.smtp_eudora_clients**: count of Eudora smtp clients discovered
- **appid.smtp_eudora_pro_clients**: count of Eudora Pro smtp clients discovered
- **appid.smtp_evolution_clients**: count of Evolution smtp clients discovered
- **appid.smtp_kmail_clients**: count of KMail smtp clients discovered
- **appid.smtp_lotus_notes_clients**: count of Lotus Notes smtp clients discovered
- **appid.smtp_microsoft_outlook_clients**: count of Microsoft Outlook smtp clients discovered
- **appid.smtp_microsoft_outlook_express_clients**: count of Microsoft Outlook Express smtp clients discovered
- **appid.smtp_microsoft_outlook_imo_clients**: count of Microsoft Outlook IMO smtp clients discovered
- **appid.smtp_mutt_clients**: count of Mutt smtp clients discovered
- **appid.smtp_thunderbird_clients**: count of Thunderbird smtp clients discovered
- **appid.smtp_flows**: count of smtp flows discovered
- **appid.smtps_flows**: count of smtps flows discovered
- **appid.snmp_flows**: count of snmp flows discovered
- **appid.ssh_clients**: count of ssh clients discovered
- **appid.ssh_flows**: count of ssh flows discovered
- **appid.ssl_flows**: count of ssl flows discovered
- **appid.telnet_flows**: count of telnet flows discovered
- **appid.tftp_flows**: count of tftp flows discovered
- **appid.timbuktu_clients**: count of timbuktu clients discovered
- **appid.timbuktu_flows**: count of timbuktu flows discovered
- **appid.tns_clients**: count of tns clients discovered
- **appid.tns_flows**: count of tns flows discovered
- **appid.vnc_clients**: count of vnc clients discovered
- **appid.yahoo_messenger_clients**: count of Yahoo Messenger clients discovered

9.2 arp_spoof

What: detect ARP attacks and anomalies

Type: inspector

Configuration:

- ip4 **arp_spoof.hosts[].ip**: host ip address
- mac **arp_spoof.hosts[].mac**: host mac address

Rules:

- **112:1** (arp_spoof) unicast ARP request
 - **112:2** (arp_spoof) ethernet/ARP mismatch request for source
-

- **112:3** (arp_spoof) ethernet/ARP mismatch request for destination
- **112:4** (arp_spoof) attempted ARP cache overwrite attack

Peg counts:

- **arp_spoof.packets**: total packets

9.3 back_orifice

What: back orifice detection

Type: inspector

Rules:

- **105:1** (back_orifice) BO traffic detected
- **105:2** (back_orifice) BO client traffic detected
- **105:3** (back_orifice) BO server traffic detected
- **105:4** (back_orifice) BO Snort buffer attack

Peg counts:

- **back_orifice.packets**: total packets

9.4 binder

What: configure processing based on CIDRs, ports, services, etc.

Type: inspector

Configuration:

- int **binder[].when.policy_id** = 0: unique ID for selection of this config by external logic { 0: }
 - bit_list **binder[].when.ifaces**: list of interface indices { 255 }
 - bit_list **binder[].when.vlans**: list of VLAN IDs { 4095 }
 - addr_list **binder[].when.nets**: list of networks
 - enum **binder[].when.proto**: protocol { any | ip | icmp | tcp | udp | user | file }
 - bit_list **binder[].when.ports**: list of ports { 65535 }
 - enum **binder[].when.role** = any: use the given configuration on one or any end of a session { client | server | any }
 - string **binder[].when.service**: override default configuration
 - enum **binder[].use.action** = inspect: what to do with matching traffic { reset | block | allow | inspect }
 - string **binder[].use.file**: use configuration in given file
 - string **binder[].use.service**: override automatic service identification
 - string **binder[].use.type**: select module for binding
 - string **binder[].use.name**: symbol name (defaults to type)
-

Peg counts:

- **binder.packets**: initial bindings
- **binder.resets**: reset bindings
- **binder.blocks**: block bindings
- **binder.allows**: allow bindings
- **binder.inspects**: inspect bindings

9.5 data_log

What: log selected published data to data.log

Type: inspector

Configuration:

- select **data_log.key** = http_raw_uri: name of data buffer to log { http_uri | http_raw_uri }

Peg counts:

- **data_log.packets**: total packets

9.6 dce_http_proxy

What: dce over http inspection - client to/from proxy

Type: inspector

Peg counts:

- **dce_http_proxy.http_proxy_sessions**: successful http proxy sessions
- **dce_http_proxy.http_proxy_session_failures**: failed http proxy sessions

9.7 dce_http_server

What: dce over http inspection - proxy to/from server

Type: inspector

Peg counts:

- **dce_http_server.http_server_sessions**: successful http server sessions
 - **dce_http_server.http_server_session_failures**: failed http server sessions
-

9.8 dce_smb

What: dce over smb inspection

Type: inspector

Configuration:

- bool **dce_smb.disable_defrag** = false: Disable DCE/RPC defragmentation
- int **dce_smb.max_frag_len** = 65535: Maximum fragment size for defragmentation { 1514:65535 }
- int **dce_smb.reassemble_threshold** = 0: Minimum bytes received before performing reassembly { 0:65535 }
- enum **dce_smb.smb_fingerprint_policy** = none: Target based SMB policy to use { none | client | server | both }
- enum **dce_smb.policy** = WinXP: Target based policy to use { Win2000 | WinXP | WinVista | Win2003 | Win2008 | Win7 | Samba | Samba-3.0.37 | Samba-3.0.22 | Samba-3.0.20 }
- int **dce_smb.smb_max_chain** = 3: SMB max chain size { 0:255 }
- int **dce_smb.smb_max_compound** = 3: SMB max compound size { 0:255 }
- multi **dce_smb.valid_smb_versions** = all: Valid SMB versions { v1 | v2 | all }
- enum **dce_smb.smb_file_inspection** = off: SMB file inspection { off | on | only }
- int **dce_smb.smb_file_depth** = 16384: SMB file depth for file data { -1: }
- string **dce_smb.smb_invalid_shares**: SMB shares to alert on
- bool **dce_smb.smb_legacy_mode** = false: inspect only SMBv1

Rules:

- **133:2** (dce_smb) SMB - bad NetBIOS session service session type
- **133:3** (dce_smb) SMB - bad SMB message type
- **133:4** (dce_smb) SMB - bad SMB Id (not \xffSMB for SMB1 or not \xfeSMB for SMB2)
- **133:5** (dce_smb) SMB - bad word count or structure size
- **133:6** (dce_smb) SMB - bad byte count
- **133:7** (dce_smb) SMB - bad format type
- **133:8** (dce_smb) SMB - bad offset
- **133:9** (dce_smb) SMB - zero total data count
- **133:10** (dce_smb) SMB - NetBIOS data length less than SMB header length
- **133:12** (dce_smb) SMB - remaining NetBIOS data length less than command byte count
- **133:13** (dce_smb) SMB - remaining NetBIOS data length less than command data size
- **133:14** (dce_smb) SMB - remaining total data count less than this command data size
- **133:15** (dce_smb) SMB - total data sent (STDu64) greater than command total data expected
- **133:16** (dce_smb) SMB - byte count less than command data size (STDu64)
- **133:17** (dce_smb) SMB - invalid command data size for byte count
- **133:18** (dce_smb) SMB - excessive tree connect requests with pending tree connect responses

- **133:19** (dce_smb) SMB - excessive read requests with pending read responses
 - **133:20** (dce_smb) SMB - excessive command chaining
 - **133:21** (dce_smb) SMB - multiple chained tree connect requests
 - **133:22** (dce_smb) SMB - multiple chained tree connect requests
 - **133:23** (dce_smb) SMB - chained/compounded login followed by logoff
 - **133:24** (dce_smb) SMB - chained/compounded tree connect followed by tree disconnect
 - **133:25** (dce_smb) SMB - chained/compounded open pipe followed by close pipe
 - **133:26** (dce_smb) SMB - invalid share access
 - **133:27** (dce_smb) connection oriented DCE/RPC - invalid major version
 - **133:28** (dce_smb) connection oriented DCE/RPC - invalid minor version
 - **133:29** (dce_smb) connection-oriented DCE/RPC - invalid PDU type
 - **133:30** (dce_smb) connection-oriented DCE/RPC - fragment length less than header size
 - **133:32** (dce_smb) connection-oriented DCE/RPC - no context items specified
 - **133:33** (dce_smb) connection-oriented DCE/RPC -no transfer syntaxes specified
 - **133:34** (dce_smb) connection-oriented DCE/RPC - fragment length on non-last fragment less than maximum negotiated fragment transmit size for client
 - **133:35** (dce_smb) connection-oriented DCE/RPC - fragment length greater than maximum negotiated fragment transmit size
 - **133:36** (dce_smb) connection-oriented DCE/RPC - alter context byte order different from bind
 - **133:37** (dce_smb) connection-oriented DCE/RPC - call id of non first/last fragment different from call id established for fragmented request
 - **133:38** (dce_smb) connection-oriented DCE/RPC - opnum of non first/last fragment different from opnum established for fragmented request
 - **133:39** (dce_smb) connection-oriented DCE/RPC - context id of non first/last fragment different from context id established for fragmented request
 - **133:44** (dce_smb) SMB - invalid SMB version 1 seen
 - **133:45** (dce_smb) SMB - invalid SMB version 2 seen
 - **133:46** (dce_smb) SMB - invalid user, tree connect, file binding
 - **133:47** (dce_smb) SMB - excessive command compounding
 - **133:48** (dce_smb) SMB - zero data count
 - **133:50** (dce_smb) SMB - maximum number of outstanding requests exceeded
 - **133:51** (dce_smb) SMB - outstanding requests with same MID
 - **133:52** (dce_smb) SMB - deprecated dialect negotiated
 - **133:53** (dce_smb) SMB - deprecated command used
 - **133:54** (dce_smb) SMB - unusual command used
 - **133:55** (dce_smb) SMB - invalid setup count for command
 - **133:56** (dce_smb) SMB - client attempted multiple dialect negotiations on session
-

- **133:57** (dce_smb) SMB - client attempted to create or set a file's attributes to readonly/hidden/system
- **133:58** (dce_smb) SMB - file offset provided is greater than file size specified
- **133:59** (dce_smb) SMB - next command specified in SMB2 header is beyond payload boundary

Peg counts:

- **dce_smb.events**: total events
 - **dce_smb.pdus**: total connection-oriented PDUs
 - **dce_smb.binds**: total connection-oriented binds
 - **dce_smb.bind_acks**: total connection-oriented binds acks
 - **dce_smb.alter_contexts**: total connection-oriented alter contexts
 - **dce_smb.alter_context_responses**: total connection-oriented alter context responses
 - **dce_smb.bind_naks**: total connection-oriented bind naks
 - **dce_smb.requests**: total connection-oriented requests
 - **dce_smb.responses**: total connection-oriented responses
 - **dce_smb.cancels**: total connection-oriented cancels
 - **dce_smb.orphaned**: total connection-oriented orphaned
 - **dce_smb.faults**: total connection-oriented faults
 - **dce_smb.auth3s**: total connection-oriented auth3s
 - **dce_smb.shutdowns**: total connection-oriented shutdowns
 - **dce_smb.rejects**: total connection-oriented rejects
 - **dce_smb.ms_rpc_http_pdus**: total connection-oriented MS requests to send RPC over HTTP
 - **dce_smb.other_requests**: total connection-oriented other requests
 - **dce_smb.other_responses**: total connection-oriented other responses
 - **dce_smb.request_fragments**: total connection-oriented request fragments
 - **dce_smb.response_fragments**: total connection-oriented response fragments
 - **dce_smb.client_max_fragment_size**: connection-oriented client maximum fragment size
 - **dce_smb.client_min_fragment_size**: connection-oriented client minimum fragment size
 - **dce_smb.client_segs_reassembled**: total connection-oriented client segments reassembled
 - **dce_smb.client_frgs_reassembled**: total connection-oriented client fragments reassembled
 - **dce_smb.server_max_fragment_size**: connection-oriented server maximum fragment size
 - **dce_smb.server_min_fragment_size**: connection-oriented server minimum fragment size
 - **dce_smb.server_segs_reassembled**: total connection-oriented server segments reassembled
 - **dce_smb.server_frgs_reassembled**: total connection-oriented server fragments reassembled
 - **dce_smb.sessions**: total smb sessions
 - **dce_smb.packets**: total smb packets
-

- **dce_smb.ignored_bytes**: total ignored bytes
- **dce_smb.client_segs_reassembled**: total smb client segments reassembled
- **dce_smb.server_segs_reassembled**: total smb server segments reassembled
- **dce_smb.max_outstanding_requests**: total smb maximum outstanding requests
- **dce_smb.files_processed**: total smb files processed
- **dce_smb.smbv2_create**: total number of SMBv2 create packets seen
- **dce_smb.smbv2_write**: total number of SMBv2 write packets seen
- **dce_smb.smbv2_read**: total number of SMBv2 read packets seen
- **dce_smb.smbv2_set_info**: total number of SMBv2 set info packets seen
- **dce_smb.smbv2_tree_connect**: total number of SMBv2 tree connect packets seen
- **dce_smb.smbv2_tree_disconnect**: total number of SMBv2 tree disconnect packets seen
- **dce_smb.smbv2_close**: total number of SMBv2 close packets seen

9.9 dce_tcp

What: dce over tcp inspection

Type: inspector

Configuration:

- bool **dce_tcp.disable_defrag** = false: Disable DCE/RPC defragmentation
- int **dce_tcp.max_frag_len** = 65535: Maximum fragment size for defragmentation { 1514:65535 }
- int **dce_tcp.reassemble_threshold** = 0: Minimum bytes received before performing reassembly { 0:65535 }
- enum **dce_tcp.policy** = WinXP: Target based policy to use { Win2000 | WinXP | WinVista | Win2003 | Win2008 | Win7 | Samba | Samba-3.0.37 | Samba-3.0.22 | Samba-3.0.20 }

Rules:

- **133:27** (dce_tcp) connection oriented DCE/RPC - invalid major version
 - **133:28** (dce_tcp) connection oriented DCE/RPC - invalid minor version
 - **133:29** (dce_tcp) connection-oriented DCE/RPC - invalid PDU type
 - **133:30** (dce_tcp) connection-oriented DCE/RPC - fragment length less than header size
 - **133:32** (dce_tcp) connection-oriented DCE/RPC - no context items specified
 - **133:33** (dce_tcp) connection-oriented DCE/RPC -no transfer syntaxes specified
 - **133:34** (dce_tcp) connection-oriented DCE/RPC - fragment length on non-last fragment less than maximum negotiated fragment transmit size for client
 - **133:35** (dce_tcp) connection-oriented DCE/RPC - fragment length greater than maximum negotiated fragment transmit size
 - **133:36** (dce_tcp) connection-oriented DCE/RPC - alter context byte order different from bind
 - **133:37** (dce_tcp) connection-oriented DCE/RPC - call id of non first/last fragment different from call id established for fragmented request
-

- **133:38** (dce_tcp) connection-oriented DCE/RPC - opnum of non first/last fragment different from opnum established for fragmented request
- **133:39** (dce_tcp) connection-oriented DCE/RPC - context id of non first/last fragment different from context id established for fragmented request

Peg counts:

- **dce_tcp.events**: total events
 - **dce_tcp.pdus**: total connection-oriented PDUs
 - **dce_tcp.binds**: total connection-oriented binds
 - **dce_tcp.bind_acks**: total connection-oriented binds acks
 - **dce_tcp.alter_contexts**: total connection-oriented alter contexts
 - **dce_tcp.alter_context_responses**: total connection-oriented alter context responses
 - **dce_tcp.bind_naks**: total connection-oriented bind naks
 - **dce_tcp.requests**: total connection-oriented requests
 - **dce_tcp.responses**: total connection-oriented responses
 - **dce_tcp.cancels**: total connection-oriented cancels
 - **dce_tcp.orphaned**: total connection-oriented orphaned
 - **dce_tcp.faults**: total connection-oriented faults
 - **dce_tcp.auth3s**: total connection-oriented auth3s
 - **dce_tcp.shutdowns**: total connection-oriented shutdowns
 - **dce_tcp.rejects**: total connection-oriented rejects
 - **dce_tcp.ms_rpc_http_pdus**: total connection-oriented MS requests to send RPC over HTTP
 - **dce_tcp.other_requests**: total connection-oriented other requests
 - **dce_tcp.other_responses**: total connection-oriented other responses
 - **dce_tcp.request_fragments**: total connection-oriented request fragments
 - **dce_tcp.response_fragments**: total connection-oriented response fragments
 - **dce_tcp.client_max_fragment_size**: connection-oriented client maximum fragment size
 - **dce_tcp.client_min_fragment_size**: connection-oriented client minimum fragment size
 - **dce_tcp.client_segs_reassembled**: total connection-oriented client segments reassembled
 - **dce_tcp.client_frags_reassembled**: total connection-oriented client fragments reassembled
 - **dce_tcp.server_max_fragment_size**: connection-oriented server maximum fragment size
 - **dce_tcp.server_min_fragment_size**: connection-oriented server minimum fragment size
 - **dce_tcp.server_segs_reassembled**: total connection-oriented server segments reassembled
 - **dce_tcp.server_frags_reassembled**: total connection-oriented server fragments reassembled
 - **dce_tcp.tcp_sessions**: total tcp sessions
 - **dce_tcp.tcp_packets**: total tcp packets
-

9.10 dce_udp

What: dce over udp inspection

Type: inspector

Configuration:

- bool **dce_udp.disable_defrag** = false: Disable DCE/RPC defragmentation
- int **dce_udp.max_frag_len** = 65535: Maximum fragment size for defragmentation { 1514:65535 }

Rules:

- **133:40** (dce_udp) connection-less DCE/RPC - invalid major version
- **133:41** (dce_udp) connection-less DCE/RPC - invalid PDU type
- **133:42** (dce_udp) connection-less DCE/RPC - data length less than header size
- **133:43** (dce_udp) connection-less DCE/RPC - bad sequence number

Peg counts:

- **dce_udp.events**: total events
 - **dce_udp.udp_sessions**: total udp sessions
 - **dce_udp.udp_packets**: total udp packets
 - **dce_udp.requests**: total connection-less requests
 - **dce_udp.acks**: total connection-less acks
 - **dce_udp.cancels**: total connection-less cancels
 - **dce_udp.client_facks**: total connection-less client facks
 - **dce_udp.ping**: total connection-less ping
 - **dce_udp.responses**: total connection-less responses
 - **dce_udp.rejects**: total connection-less rejects
 - **dce_udp.cancel_acks**: total connection-less cancel acks
 - **dce_udp.server_facks**: total connection-less server facks
 - **dce_udp.faults**: total connection-less faults
 - **dce_udp.no_calls**: total connection-less no calls
 - **dce_udp.working**: total connection-less working
 - **dce_udp.other_requests**: total connection-less other requests
 - **dce_udp.other_responses**: total connection-less other responses
 - **dce_udp.fragments**: total connection-less fragments
 - **dce_udp.max_fragment_size**: connection-less maximum fragment size
 - **dce_udp.frags_reassembled**: total connection-less fragments reassembled
 - **dce_udp.max_seqnum**: max connection-less seqnum
-

9.11 dnp3

What: dnp3 inspection

Type: inspector

Configuration:

- bool **dnp3.check_crc** = false: validate checksums in DNP3 link layer frames

Rules:

- **145:1** (dnp3) DNP3 link-layer frame contains bad CRC
- **145:2** (dnp3) DNP3 link-layer frame was dropped
- **145:3** (dnp3) DNP3 transport-layer segment was dropped during reassembly
- **145:4** (dnp3) DNP3 reassembly buffer was cleared without reassembling a complete message
- **145:5** (dnp3) DNP3 link-layer frame uses a reserved address
- **145:6** (dnp3) DNP3 application-layer fragment uses a reserved function code

Peg counts:

- **dnp3.total_packets**: total packets
- **dnp3.udp_packets**: total udp packets
- **dnp3.tcp_pdus**: total tcp pdus
- **dnp3.dnp3_link_layer_frames**: total dnp3 link layer frames
- **dnp3.dnp3_application_pdus**: total dnp3 application pdus

9.12 dns

What: dns inspection

Type: inspector

Rules:

- **131:1** (dns) obsolete DNS RR types
- **131:2** (dns) experimental DNS RR types
- **131:3** (dns) DNS client rdata txt overflow

Peg counts:

- **dns.packets**: total packets processed
 - **dns.requests**: total dns requests
 - **dns.responses**: total dns responses
-

9.13 dpx

What: dynamic inspector example

Type: inspector

Configuration:

- port **dpx.port**: port to check
- int **dpx.max** = 0: maximum payload before alert { 0:65535 }

Rules:

- **256:1** (dpx) too much data sent to port

Peg counts:

- **dpx.packets**: total packets

9.14 file_id

What: configure file identification

Type: inspector

Configuration:

- int **file_id.type_depth** = 1460: stop type ID at this point { 0: }
 - int **file_id.signature_depth** = 10485760: stop signature at this point { 0: }
 - int **file_id.block_timeout** = 86400: stop blocking after this many seconds { 0: }
 - int **file_id.lookup_timeout** = 2: give up on lookup after this many seconds { 0: }
 - bool **file_id.block_timeout_lookup** = false: block if lookup times out
 - int **file_id.capture_memcap** = 100: memcap for file capture in megabytes { 0: }
 - int **file_id.capture_max_size** = 1048576: stop file capture beyond this point { 0: }
 - int **file_id.capture_min_size** = 0: stop file capture if file size less than this { 0: }
 - int **file_id.capture_block_size** = 32768: file capture block size in bytes { 8: }
 - int **file_id.max_files_cached** = 65536: maximal number of files cached in memory { 8: }
 - bool **file_id.enable_type** = false: enable type ID
 - bool **file_id.enable_signature** = false: enable signature calculation
 - bool **file_id.enable_capture** = false: enable file capture
 - int **file_id.show_data_depth** = 100: print this many octets { 0: }
 - int **file_id.file_rules[].rev** = 0: rule revision { 0: }
 - string **file_id.file_rules[].msg**: information about the file type
 - string **file_id.file_rules[].type**: file type name
 - int **file_id.file_rules[].id** = 0: file type id { 0: }
-

- string **file_id.file_rules[].category**: file type category
- string **file_id.file_rules[].version**: file type version
- string **file_id.file_rules[].magic[].content**: file magic content
- int **file_id.file_rules[].magic[].offset** = 0: file magic offset { 0: }
- int **file_id.file_policy[].when.file_type_id** = 0: unique ID for file type in file magic rule { 0: }
- string **file_id.file_policy[].when.sha256**: SHA 256
- enum **file_id.file_policy[].use.verdict** = unknown: what to do with matching traffic { unknown | log | stop | block | reset }
- bool **file_id.file_policy[].use.enable_file_type** = false: true/false → enable/disable file type identification
- bool **file_id.file_policy[].use.enable_file_signature** = false: true/false → enable/disable file signature
- bool **file_id.file_policy[].use.enable_file_capture** = false: true/false → enable/disable file capture
- bool **file_id.trace_type** = false: enable runtime dump of type info
- bool **file_id.trace_signature** = false: enable runtime dump of signature info
- bool **file_id.trace_stream** = false: enable runtime dump of file data

Peg counts:

- **file_id.total_files**: number of files processed
- **file_id.total_file_data**: number of file data bytes processed
- **file_id.cache_failures**: number of file cache add failures

9.15 file_log

What: log file event to file.log

Type: inspector

Configuration:

- bool **file_log.log_pkt_time** = true: log the packet time when event generated
- bool **file_log.log_sys_time** = false: log the system time when event generated

Peg counts:

- **file_log.total_events**: total file events

9.16 ftp_client

What: FTP client configuration module for use with ftp_server

Type: inspector

Configuration:

- bool **ftp_client.bounce** = false: check for bounces
 - addr **ftp_client.bounce_to[].address** = 1.0.0.0/32: allowed ip address in CIDR format
 - port **ftp_client.bounce_to[].port** = 20: allowed port { 1: }
 - port **ftp_client.bounce_to[].last_port**: optional allowed range from port to last_port inclusive { 0: }
 - bool **ftp_client.ignore_telnet_erase_cmds** = false: ignore erase character and erase line commands when normalizing
 - int **ftp_client.max_resp_len** = -1: maximum ftp response accepted by client { -1: }
 - bool **ftp_client.telnet_cmds** = false: detect telnet escape sequences on ftp control channel
-

9.17 ftp_data

What: FTP data channel handler

Type: inspector

Peg counts:

- **ftp_data.packets**: total packets

9.18 ftp_server

What: main FTP module; ftp_client should also be configured

Type: inspector

Configuration:

- string **ftp_server.chk_str_fmt**: check the formatting of the given commands
- string **ftp_server.data_chan_cmds**: check the formatting of the given commands
- string **ftp_server.data_rest_cmds**: check the formatting of the given commands
- string **ftp_server.data_xfer_cmds**: check the formatting of the given commands
- string **ftp_server.directory_cmds[].dir_cmd**: directory command
- int **ftp_server.directory_cmds[].rsp_code** = 200: expected successful response code for command { 200: }
- string **ftp_server.file_put_cmds**: check the formatting of the given commands
- string **ftp_server.file_get_cmds**: check the formatting of the given commands
- string **ftp_server.encr_cmds**: check the formatting of the given commands
- string **ftp_server.login_cmds**: check the formatting of the given commands
- bool **ftp_server.check_encrypted** = false: check for end of encryption
- string **ftp_server.cmd_validity[].command**: command string
- string **ftp_server.cmd_validity[].format**: format specification
- int **ftp_server.cmd_validity[].length** = 0: specify non-default maximum for command { 0: }
- int **ftp_server.def_max_param_len** = 100: default maximum length of commands handled by server; 0 is unlimited { 1: }
- bool **ftp_server.encrypted_traffic** = false: check for encrypted telnet and ftp
- string **ftp_server.ftp_cmds**: specify additional commands supported by server beyond RFC 959
- bool **ftp_server.ignore_data_chan** = false: do not inspect ftp data channels
- bool **ftp_server.ignore_telnet_erase_cmds** = false: ignore erase character and erase line commands when normalizing
- bool **ftp_server.print_cmds** = false: print command configurations on start up
- bool **ftp_server.telnet_cmds** = false: detect telnet escape sequences of ftp control channel

Rules:

- **125:1** (ftp_server) TELNET cmd on FTP command channel
 - **125:2** (ftp_server) invalid FTP command
-

- **125:3** (ftp_server) FTP command parameters were too long
- **125:4** (ftp_server) FTP command parameters were malformed
- **125:5** (ftp_server) FTP command parameters contained potential string format
- **125:6** (ftp_server) FTP response message was too long
- **125:7** (ftp_server) FTP traffic encrypted
- **125:8** (ftp_server) FTP bounce attempt
- **125:9** (ftp_server) evasive (incomplete) TELNET cmd on FTP command channel

Peg counts:

- **ftp_server.packets**: total packets

9.19 gtp_inspect

What: gtp control channel inspection

Type: inspector

Configuration:

- int **gtp_inspect[].version** = 2: gtp version { 0:2 }
- int **gtp_inspect[].messages[].type** = 0: message type code { 0:255 }
- string **gtp_inspect[].messages[].name**: message name
- int **gtp_inspect[].infos[].type** = 0: information element type code { 0:255 }
- string **gtp_inspect[].infos[].name**: information element name
- int **gtp_inspect[].infos[].length** = 0: information element type code { 0:255 }

Rules:

- **143:1** (gtp_inspect) message length is invalid
- **143:2** (gtp_inspect) information element length is invalid
- **143:3** (gtp_inspect) information elements are out of order

Peg counts:

- **gtp_inspect.sessions**: total sessions processed
 - **gtp_inspect.events**: requests
 - **gtp_inspect.unknown_types**: unknown message types
 - **gtp_inspect.unknown_infos**: unknown information elements
-

9.20 http_global

What: http inspector global configuration and client rules for use with http_server

Type: inspector

Configuration:

- int **http_global.compress_depth** = 65535: maximum amount of packet payload to decompress { 1:65535 }
- int **http_global.decode.b64_decode_depth** = 0: single packet decode depth { -1:65535 }
- int **http_global.decode.bitenc_decode_depth** = 0: single packet decode depth { -1:65535 }
- int **http_global.decode.max_mime_mem** = 838860: single packet decode depth { 3276: }
- int **http_global.decode.qp_decode_depth** = 0: single packet decode depth { -1:65535 }
- int **http_global.decode.uu_decode_depth** = 0: single packet decode depth { -1:65535 }
- int **http_global.decompress_depth** = 65535: maximum amount of decompressed data to process { 1:65535 }
- bool **http_global.detect_anomalous_servers** = false: inspect non-configured ports for HTTP - bad idea
- int **http_global.max_gzip_mem** = 0: disregard - not implemented { 0: }
- int **http_global.memcap** = 0: disregard - not implemented { 0: }
- bool **http_global.proxy_alert** = false: alert on proxy usage for servers without allow_proxy_use
- int **http_global.unicode_map.code_page** = 1252: select code page in map file { 0: }
- string **http_global.unicode_map.map_file**: unicode map file

Rules:

- **319:1** (http_global) ascii encoding
 - **319:2** (http_global) double decoding attack
 - **319:3** (http_global) u encoding
 - **319:4** (http_global) bare byte unicode encoding
 - **319:5** (http_global) base36 encoding
 - **319:6** (http_global) UTF-8 encoding
 - **319:7** (http_global) IIS unicode codepoint encoding
 - **319:8** (http_global) multi_slash encoding
 - **319:9** (http_global) IIS backslash evasion
 - **319:10** (http_global) self directory traversal
 - **319:11** (http_global) directory traversal
 - **319:12** (http_global) apache whitespace (tab)
 - **319:13** (http_global) non-RFC http delimiter
 - **319:14** (http_global) non-RFC defined char
 - **319:15** (http_global) oversize request-URI directory
 - **319:16** (http_global) oversize chunk encoding
-

- **319:17** (http_global) unauthorized proxy use detected
- **319:18** (http_global) webroot directory traversal
- **319:19** (http_global) long header
- **319:20** (http_global) max header fields
- **319:21** (http_global) multiple content length
- **319:22** (http_global) chunk size mismatch detected
- **319:23** (http_global) invalid ip in true-client-IP/XFF header
- **319:24** (http_global) multiple host hdrs detected
- **319:25** (http_global) hostname exceeds 255 characters
- **319:26** (http_global) header parsing space saturation
- **319:27** (http_global) client consecutive small chunk sizes
- **319:28** (http_global) post w/o content-length or chunks
- **319:29** (http_global) multiple true IPs in a session
- **319:30** (http_global) both true-client-IP and XFF hdrs present
- **319:31** (http_global) unknown method
- **319:32** (http_global) simple request
- **319:33** (http_global) unescaped space in http URI
- **319:34** (http_global) too many pipelined requests

Peg counts:

- **http_global.packets**: total packets processed
 - **http_global.gets**: GET requests
 - **http_global.posts**: POST requests
 - **http_global.request_headers**: total requests
 - **http_global.response_headers**: total responses
 - **http_global.request_cookies**: requests with Cookie
 - **http_global.response_cookies**: responses with Set-Cookie
 - **http_global.post_params**: POST parameters extracted
 - **http_global.unicode**: unicode normalizations
 - **http_global.double_unicode**: double unicode normalizations
 - **http_global.non_ascii**: non-ascii normalizations
 - **http_global.paths_with_traversal**: directory traversal (../) normalizations
 - **http_global.paths_with_double_slash**: double slash (//) normalizations
 - **http_global.paths_with_relative**: relative directory (./) normalizations
 - **http_global.gzip_packets**: packets with gzip compression
 - **http_global.compressed_bytes**: total compressed bytes processed
 - **http_global.decompressed_bytes**: total bytes decompressed
-

9.21 http_inspect

What: HTTP inspector

Type: inspector

Configuration:

- int **http_inspect.request_depth** = -1: maximum request message body bytes to examine (-1 no limit) { -1: }
- int **http_inspect.response_depth** = -1: maximum response message body bytes to examine (-1 no limit) { -1: }
- bool **http_inspect.unzip** = true: decompress gzip and deflate message bodies
- bool **http_inspect.normalize_utf** = true: normalize charset utf encodings in response bodies
- bool **http_inspect.decompress_pdf** = false: decompress pdf files in response bodies
- bool **http_inspect.decompress_swf** = false: decompress swf files in response bodies
- bool **http_inspect.normalize_javascript** = false: normalize javascript in response bodies
- int **http_inspect.max_javascript_whitespaces** = 200: maximum consecutive whitespaces allowed within the Javascript obfuscated data { 1:65535 }
- bit_list **http_inspect.bad_characters**: alert when any of specified bytes are present in URI after percent decoding { 255 }
- string **http_inspect.ignore_unreserved**: do not alert when the specified unreserved characters are percent-encoded in a URI. Unreserved characters are 0-9, a-z, A-Z, period, underscore, tilde, and minus. { (optional) }
- bool **http_inspect.percent_u** = false: normalize %uNNNN and %UNNNN encodings
- bool **http_inspect.utf8** = true: normalize 2-byte and 3-byte UTF-8 characters to a single byte
- bool **http_inspect.utf8_bare_byte** = false: when doing UTF-8 character normalization include bytes that were not percent encoded
- bool **http_inspect.iis_unicode** = false: use IIS unicode code point mapping to normalize characters
- string **http_inspect.iis_unicode_map_file**: file containing code points for IIS unicode. { (optional) }
- int **http_inspect.iis_unicode_code_page** = 1252: code page to use from the IIS unicode map file { 0:65535 }
- bool **http_inspect.iis_double_decode** = false: perform double decoding of percent encodings to normalize characters
- int **http_inspect.oversize_dir_length** = 300: maximum length for URL directory { 1:65535 }
- bool **http_inspect.backslash_to_slash** = false: replace \ with / when normalizing URIs
- bool **http_inspect.plus_to_space** = true: replace + with <sp> when normalizing URIs
- bool **http_inspect.simplify_path** = true: reduce URI directory path to simplest form
- bool **http_inspect.test_input** = false: read HTTP messages from text file
- bool **http_inspect.test_output** = false: print out HTTP section data
- int **http_inspect.print_amount** = 1200: number of characters to print from a Field { 1:1000000 }
- bool **http_inspect.print_hex** = false: nonprinting characters printed in [HH] format instead of using an asterisk
- bool **http_inspect.show_pegs** = true: display peg counts with test output

Rules:

- **119:1** (http_inspect) ascii encoding

- **119:2** (http_inspect) double decoding attack
 - **119:3** (http_inspect) u encoding
 - **119:4** (http_inspect) bare byte unicode encoding
 - **119:5** (http_inspect) obsolete event—should not appear
 - **119:6** (http_inspect) UTF-8 encoding
 - **119:7** (http_inspect) IIS unicode codepoint encoding
 - **119:8** (http_inspect) multi_slash encoding
 - **119:9** (http_inspect) IIS backslash evasion
 - **119:10** (http_inspect) self directory traversal
 - **119:11** (http_inspect) directory traversal
 - **119:12** (http_inspect) apache whitespace (tab)
 - **119:13** (http_inspect) non-RFC http delimiter
 - **119:14** (http_inspect) non-RFC defined char
 - **119:15** (http_inspect) oversize request-uri directory
 - **119:16** (http_inspect) oversize chunk encoding
 - **119:17** (http_inspect) unauthorized proxy use detected
 - **119:18** (http_inspect) webroot directory traversal
 - **119:19** (http_inspect) long header
 - **119:20** (http_inspect) max header fields
 - **119:21** (http_inspect) multiple content length
 - **119:22** (http_inspect) chunk size mismatch detected
 - **119:23** (http_inspect) invalid IP in true-client-IP/XFF header
 - **119:24** (http_inspect) multiple host hdrs detected
 - **119:25** (http_inspect) hostname exceeds 255 characters
 - **119:26** (http_inspect) header parsing space saturation
 - **119:27** (http_inspect) client consecutive small chunk sizes
 - **119:28** (http_inspect) post w/o content-length or chunks
 - **119:29** (http_inspect) multiple true ips in a session
 - **119:30** (http_inspect) both true-client-IP and XFF hdrs present
 - **119:31** (http_inspect) unknown method
 - **119:32** (http_inspect) simple request
 - **119:33** (http_inspect) unescaped space in HTTP URI
 - **119:34** (http_inspect) too many pipelined requests
 - **119:35** (http_inspect) anomalous http server on undefined HTTP port
 - **119:36** (http_inspect) invalid status code in HTTP response
-

- **119:37** (http_inspect) no content-length or transfer-encoding in HTTP response
 - **119:38** (http_inspect) HTTP response has UTF charset which failed to normalize
 - **119:39** (http_inspect) HTTP response has UTF-7 charset
 - **119:40** (http_inspect) HTTP response gzip decompression failed
 - **119:41** (http_inspect) server consecutive small chunk sizes
 - **119:42** (http_inspect) invalid content-length or chunk size
 - **119:43** (http_inspect) javascript obfuscation levels exceeds 1
 - **119:44** (http_inspect) javascript whitespaces exceeds max allowed
 - **119:45** (http_inspect) multiple encodings within javascript obfuscated data
 - **119:46** (http_inspect) SWF file zlib decompression failure
 - **119:47** (http_inspect) SWF file LZMA decompression failure
 - **119:48** (http_inspect) PDF file deflate decompression failure
 - **119:49** (http_inspect) PDF file unsupported compression type
 - **119:50** (http_inspect) PDF file cascaded compression
 - **119:51** (http_inspect) PDF file parse failure
 - **119:52** (http_inspect) not HTTP traffic
 - **119:53** (http_inspect) chunk length has excessive leading zeros
 - **119:54** (http_inspect) white space before or between messages
 - **119:55** (http_inspect) request message without URI
 - **119:56** (http_inspect) control character in reason phrase
 - **119:57** (http_inspect) illegal extra whitespace in start line
 - **119:58** (http_inspect) corrupted HTTP version
 - **119:59** (http_inspect) unknown HTTP version
 - **119:60** (http_inspect) format error in HTTP header
 - **119:61** (http_inspect) chunk header options present
 - **119:62** (http_inspect) URI badly formatted
 - **119:63** (http_inspect) unrecognized type of percent encoding in URI
 - **119:64** (http_inspect) HTTP chunk misformatted
 - **119:65** (http_inspect) white space following chunk length
 - **119:66** (http_inspect) white space within header name
 - **119:67** (http_inspect) excessive gzip compression
 - **119:68** (http_inspect) gzip decompression failed
 - **119:69** (http_inspect) HTTP 0.9 requested followed by another request
 - **119:70** (http_inspect) HTTP 0.9 request following a normal request
 - **119:71** (http_inspect) message has both Content-Length and Transfer-Encoding
-

- **119:72** (`http_inspect`) status code implying no body combined with Transfer-Encoding or nonzero Content-Length
- **119:73** (`http_inspect`) Transfer-Encoding did not end with chunked
- **119:74** (`http_inspect`) Transfer-Encoding with chunked not at end
- **119:75** (`http_inspect`) misformatted HTTP traffic
- **119:76** (`http_inspect`) unsupported Transfer-Encoding or Content-Encoding used
- **119:77** (`http_inspect`) unknown Transfer-Encoding or Content-Encoding used
- **119:78** (`http_inspect`) multiple layers of compression encodings applied
- **119:79** (`http_inspect`) server response before client request
- **119:80** (`http_inspect`) PDF/SWF decompression of server response too big

Peg counts:

- **`http_inspect.flows`**: HTTP connections inspected
 - **`http_inspect.scans`**: TCP segments scanned looking for HTTP messages
 - **`http_inspect.reassembles`**: TCP segments combined into HTTP messages
 - **`http_inspect.inspections`**: total message sections inspected
 - **`http_inspect.requests`**: HTTP request messages inspected
 - **`http_inspect.responses`**: HTTP response messages inspected
 - **`http_inspect.get_requests`**: GET requests inspected
 - **`http_inspect.head_requests`**: HEAD requests inspected
 - **`http_inspect.post_requests`**: POST requests inspected
 - **`http_inspect.put_requests`**: PUT requests inspected
 - **`http_inspect.delete_requests`**: DELETE requests inspected
 - **`http_inspect.connect_requests`**: CONNECT requests inspected
 - **`http_inspect.options_requests`**: OPTIONS requests inspected
 - **`http_inspect.trace_requests`**: TRACE requests inspected
 - **`http_inspect.other_requests`**: other request methods inspected
 - **`http_inspect.request_bodies`**: POST, PUT, and other requests with message bodies
 - **`http_inspect.chunked`**: chunked message bodies
 - **`http_inspect.uri_normalizations`**: URIs needing to be normalization
 - **`http_inspect.uri_path`**: URIs with path problems
 - **`http_inspect.uri_coding`**: URIs with character coding problems
-

9.22 http_server

What: http inspection and server rules; also configure http_global

Type: inspector

Configuration:

- bool **http_server.allow_proxy_use** = false: don't alert on proxy use for this server
 - bool **http_server.decompress_pdf** = false: enable decompression of the compressed portions of PDF files
 - bool **http_server.decompress_swf** = false: enable decompression of SWF (Adobe Flash content)
 - bool **http_server.enable_cookies** = true: extract cookies
 - bool **http_server.enable_xff** = false: log True-Client-IP and X-Forwarded-For headers with unified2 alerts as extra data
 - bool **http_server.extended_ascii_uri** = false: allow extended ASCII codes in the request URI
 - bool **http_server.extended_response_inspection** = true: extract response headers
 - string **http_server.http_methods** = GET POST PUT SEARCH MKCOL COPY MOVE LOCK UNLOCK NOTIFY POLL BCOPY BDELETE BMOVE LINK UNLINK OPTIONS HEAD DELETE TRACE TRACK CONNECT SOURCE SUBSCRIBE UNSUBSCRIBE PROPFIND PROPPATCH BPROPFIND BPROPPATCH RPC_CONNECT PROXY_SUCCESS BITS_POST CCM_POST SMS_POST RPC_IN_DATA RPC_OUT_DATA RPC_ECHO_DATA: request methods allowed in addition to GET and POST
 - bool **http_server.inspect_gzip** = true: enable gzip decompression of compressed bodies
 - bool **http_server.inspect_uri_only** = false: disable all detection except for uricontent
 - bool **http_server.log_hostname** = false: enable logging of Hostname with unified2 alerts as extra data
 - bool **http_server.log_uri** = false: enable logging of URI with unified2 alerts as extra data
 - bool **http_server.no_pipeline_req** = false: don't inspect pipelined requests after first (still does general detection)
 - bit_list **http_server.non_rfc_chars** = 0x00 0x01 0x02 0x03 0x04 0x05 0x06 0x07: alert on given non-RFC chars being present in the URI { 255 }
 - bool **http_server.normalize_cookies** = false: normalize cookies similar to URI
 - bool **http_server.normalize_headers** = false: normalize headers other than cookie similar to URI
 - int **http_server.oversize_dir_length** = 500: alert if a URL has a directory longer than this limit { 0: }
 - bool **http_server.profile.apache_whitespace** = false: don't alert if tab is used in lieu of space characters
 - bool **http_server.profile.ascii** = false: enable decoding ASCII like %2f to /
 - bool **http_server.profile.bare_byte** = false: decode non-standard, non-ASCII character encodings
 - int **http_server.profile.chunk_length** = 500000: alert on chunk lengths greater than specified { 1: }
 - int **http_server.profile.client_flow_depth** = 0: raw request payload to inspect { -1:1460 }
 - bool **http_server.profile.directory** = false: normalize . and .. sequences out of URI
 - bool **http_server.profile.double_decode** = false: iis specific extra decoding
 - bool **http_server.profile.iis_backslash** = false: normalize directory slashes
 - bool **http_server.profile.iis_delimiter** = false: allow use of non-standard delimiter
 - bool **http_server.profile.iis_unicode** = false: enable unicode code point mapping using unicode_map settings
-

- int **http_server.profile.iis_unicode_map.code_page** = 1252: select code page in map file { 0: }
- string **http_server.profile.iis_unicode_map.map_file**: unicode map file
- int **http_server.profile.max_header_length** = 750: maximum allowed client request header field { 0:65535 }
- int **http_server.profile.max_headers** = 100: maximum allowed client request headers { 0:1024 }
- int **http_server.profile.max_spaces** = 200: maximum allowed whitespaces when folding { 0:65535 }
- bool **http_server.profile.multi_slash** = false: normalize out consecutive slashes in URI
- bool **http_server.profile.non_strict** = true: allows HTTP 0.9 processing
- int **http_server.profile.max_javascript_whitespaces** = 200: maximum number of consecutive whitespaces { 0: }
- bool **http_server.profile.normalize_utf** = true: normalize response bodies with UTF content-types
- bool **http_server.profile.normalize_javascript** = true: normalize javascript between <script> tags
- int **http_server.profile.post_depth** = 65495: amount of POST data to inspect { -1:65535 }
- enum **http_server.profile.profile_type** = default: set defaults appropriate for selected server { default | apache | iis | iis_40 | iis_50 }
- int **http_server.profile.server_flow_depth** = 0: response payload to inspect; includes headers with extended_response_inspection { -1:65535 }
- bool **http_server.profile.u_encode** = true: decode %uXXXX character sequences
- bool **http_server.profile.utf_8** = false: decode UTF-8 unicode sequences in URI
- bool **http_server.profile.webroot** = false: alert on directory traversals past the top level (web server root)
- bit_list **http_server.profile.whitespace_chars**: allowed white space characters { 255 }
- int **http_server.small_chunk_count** = 5: alert if more than this limit of consecutive chunks are below small_chunk_length { 0:255 }
- int **http_server.small_chunk_length** = 10: alert if more than small_chunk_count consecutive chunks below this limit { 0:255 }
- bool **http_server.tab_uri_delimiter** = false: whether a tab not preceded by a space is considered a delimiter or part of URI
- bool **http_server.unlimited_decompress** = true: decompress across multiple packets
- bool **http_server.xff_headers** = false: not implemented

Rules:

- **320:1** (http_server) anomalous http server on undefined HTTP port
 - **320:2** (http_server) invalid status code in HTTP response
 - **320:3** (http_server) no content-length or transfer-encoding in HTTP response
 - **320:4** (http_server) HTTP response has UTF charset which failed to normalize
 - **320:5** (http_server) HTTP response has UTF-7 charset
 - **320:6** (http_server) HTTP response gzip decompression failed
 - **320:7** (http_server) server consecutive small chunk sizes
 - **320:8** (http_server) invalid content-length or chunk size
 - **320:9** (http_server) javascript obfuscation levels exceeds 1
-

- **320:10** (http_server) javascript whitespaces exceeds max allowed
- **320:11** (http_server) multiple encodings within javascript obfuscated data
- **320:12** (http_server) HTTP response SWF file zlib decompression failure
- **320:13** (http_server) HTTP response SWF file LZMA decompression failure
- **320:14** (http_server) HTTP response PDF file deflate decompression failure
- **320:15** (http_server) HTTP response PDF file unsupported compression type
- **320:16** (http_server) HTTP response PDF file cascaded compression
- **320:17** (http_server) HTTP response PDF file parse failure

9.23 imap

What: imap inspection

Type: inspector

Configuration:

- int **imap.b64_decode_depth** = 1460: base64 decoding depth { -1:65535 }
- int **imap.bitenc_decode_depth** = 1460: non-Encoded MIME attachment extraction depth { -1:65535 }
- int **imap.qp_decode_depth** = 1460: quoted Printable decoding depth { -1:65535 }
- int **imap.uu_decode_depth** = 1460: Unix-to-Unix decoding depth { -1:65535 }

Rules:

- **141:1** (imap) unknown IMAP3 command
- **141:2** (imap) unknown IMAP3 response
- **141:4** (imap) base64 decoding failed
- **141:5** (imap) quoted-printable decoding failed
- **141:7** (imap) Unix-to-Unix decoding failed

Peg counts:

- **imap.packets**: total packets processed
 - **imap.sessions**: total imap sessions
 - **imap.b64_attachments**: total base64 attachments decoded
 - **imap.b64_decoded_bytes**: total base64 decoded bytes
 - **imap.qp_attachments**: total quoted-printable attachments decoded
 - **imap.qp_decoded_bytes**: total quoted-printable decoded bytes
 - **imap.uu_attachments**: total uu attachments decoded
 - **imap.uu_decoded_bytes**: total uu decoded bytes
 - **imap.non_encoded_attachments**: total non-encoded attachments extracted
 - **imap.non_encoded_bytes**: total non-encoded extracted bytes
-

9.24 modbus

What: modbus inspection

Type: inspector

Rules:

- **144:1** (modbus) length in Modbus MBAP header does not match the length needed for the given function
- **144:2** (modbus) Modbus protocol ID is non-zero
- **144:3** (modbus) reserved Modbus function code in use

Peg counts:

- **modbus.sessions**: total sessions processed
- **modbus.frames**: total Modbus messages

9.25 normalizer

What: packet scrubbing for inline mode

Type: inspector

Configuration:

- bool **normalizer.ip4.base** = true: clear options
- bool **normalizer.ip4.df** = false: clear don't frag flag
- bool **normalizer.ip4.rf** = false: clear reserved flag
- bool **normalizer.ip4.tos** = false: clear tos / differentiated services byte
- bool **normalizer.ip4.trim** = false: truncate excess payload beyond datagram length
- bool **normalizer.tcp.base** = true: clear reserved bits and option padding and fix urgent pointer / flags issues
- bool **normalizer.tcp.block** = true: allow packet drops during TCP normalization
- bool **normalizer.tcp.urp** = true: adjust urgent pointer if beyond segment length
- bool **normalizer.tcp.ips** = false: ensure consistency in retransmitted data
- select **normalizer.tcp.ecn** = off: clear ecn for all packets | sessions w/o ecn setup { off | packet | stream }
- bool **normalizer.tcp.pad** = true: clear any option padding bytes
- bool **normalizer.tcp.trim_syn** = false: remove data on SYN
- bool **normalizer.tcp.trim_rst** = false: remove any data from RST packet
- bool **normalizer.tcp.trim_win** = false: trim data to window
- bool **normalizer.tcp.trim_mss** = false: trim data to MSS
- bool **normalizer.tcp.trim** = false: enable all of the TCP trim options
- bool **normalizer.tcp.opts** = true: clear all options except mss, wscale, timestamp, and any explicitly allowed
- bool **normalizer.tcp.req_urg** = true: clear the urgent pointer if the urgent flag is not set
- bool **normalizer.tcp.req_pay** = true: clear the urgent pointer and the urgent flag if there is no payload

- bool **normalizer.tcp.rsv** = true: clear the reserved bits in the TCP header
- bool **normalizer.tcp.req_urp** = true: clear the urgent flag if the urgent pointer is not set
- multi **normalizer.tcp.allow_names**: don't clear given option names { sack | echo | partial_order | conn_count | alt_checksum | md5 }
- string **normalizer.tcp.allow_codes**: don't clear given option codes
- bool **normalizer.ip6** = false: clear reserved flag
- bool **normalizer.icmp4** = false: clear reserved flag
- bool **normalizer.icmp6** = false: clear reserved flag

Peg counts:

- **normalizer.ip4_trim**: eth packets trimmed to datagram size
 - **normalizer.test_ip4_trim**: test eth packets trimmed to datagram size
 - **normalizer.ip4_tos**: type of service normalizations
 - **normalizer.test_ip4_tos**: test type of service normalizations
 - **normalizer.ip4_df**: don't frag bit normalizations
 - **normalizer.test_ip4_df**: test don't frag bit normalizations
 - **normalizer.ip4_rf**: reserved flag bit clears
 - **normalizer.test_ip4_rf**: test reserved flag bit clears
 - **normalizer.ip4_ttl**: time-to-live normalizations
 - **normalizer.test_ip4_ttl**: test time-to-live normalizations
 - **normalizer.ip4_opts**: ip4 options cleared
 - **normalizer.test_ip4_opts**: test ip4 options cleared
 - **normalizer.icmp4_echo**: icmp4 ping normalizations
 - **normalizer.test_icmp4_echo**: test icmp4 ping normalizations
 - **normalizer.ip6_hops**: ip6 hop limit normalizations
 - **normalizer.test_ip6_hops**: test ip6 hop limit normalizations
 - **normalizer.ip6_options**: ip6 options cleared
 - **normalizer.test_ip6_options**: test ip6 options cleared
 - **normalizer.icmp6_echo**: icmp6 echo normalizations
 - **normalizer.test_icmp6_echo**: test icmp6 echo normalizations
 - **normalizer.tcp_syn_options**: SYN only options cleared from non-SYN packets
 - **normalizer.test_tcp_syn_options**: test SYN only options cleared from non-SYN packets
 - **normalizer.tcp_options**: packets with options cleared
 - **normalizer.test_tcp_options**: test packets with options cleared
 - **normalizer.tcp_padding**: packets with padding cleared
 - **normalizer.test_tcp_padding**: test packets with padding cleared
-

- **normalizer.tcp_reserved:** packets with reserved bits cleared
 - **normalizer.test_tcp_reserved:** test packets with reserved bits cleared
 - **normalizer.tcp_nonce:** packets with nonce bit cleared
 - **normalizer.test_tcp_nonce:** test packets with nonce bit cleared
 - **normalizer.tcp_urgent_ptr:** packets without data with urgent pointer cleared
 - **normalizer.test_tcp_urgent_ptr:** test packets without data with urgent pointer cleared
 - **normalizer.tcp_ecn_pkt:** packets with ECN bits cleared
 - **normalizer.test_tcp_ecn_pkt:** test packets with ECN bits cleared
 - **normalizer.tcp_ts_ecr:** timestamp cleared on non-ACKs
 - **normalizer.test_tcp_ts_ecr:** test timestamp cleared on non-ACKs
 - **normalizer.tcp_req_urg:** cleared urgent pointer when urgent flag is not set
 - **normalizer.test_tcp_req_urg:** test cleared urgent pointer when urgent flag is not set
 - **normalizer.tcp_req_pay:** cleared urgent pointer and urgent flag when there is no payload
 - **normalizer.test_tcp_req_pay:** test cleared urgent pointer and urgent flag when there is no payload
 - **normalizer.tcp_req_urp:** cleared the urgent flag if the urgent pointer is not set
 - **normalizer.test_tcp_req_urp:** test cleared the urgent flag if the urgent pointer is not set
 - **normalizer.tcp_trim_syn:** tcp segments trimmed on SYN
 - **normalizer.test_tcp_trim_syn:** test tcp segments trimmed on SYN
 - **normalizer.tcp_trim_rst:** RST packets with data trimmed
 - **normalizer.test_tcp_trim_rst:** test RST packets with data trimmed
 - **normalizer.tcp_trim_win:** data trimmed to window
 - **normalizer.test_tcp_trim_win:** test data trimmed to window
 - **normalizer.tcp_trim_mss:** data trimmed to MSS
 - **normalizer.test_tcp_trim_mss:** test data trimmed to MSS
 - **normalizer.tcp_ecn_session:** ECN bits cleared
 - **normalizer.test_tcp_ecn_session:** test ECN bits cleared
 - **normalizer.tcp_ts_nop:** timestamp options cleared
 - **normalizer.test_tcp_ts_nop:** test timestamp options cleared
 - **normalizer.tcp_ips_data:** normalized segments
 - **normalizer.test_tcp_ips_data:** test normalized segments
 - **normalizer.tcp_block:** blocked segments
 - **normalizer.test_tcp_block:** test blocked segments
-

9.26 packet_capture

What: raw packet dumping facility

Type: inspector

Configuration:

- bool **packet_capture.enable** = false: initially enable packet dumping
- string **packet_capture.filter**: bpf filter to use for packet dump

Commands:

- **packet_capture.enable**(filter): dump raw packets
- **packet_capture.disable**(): stop packet dump

Peg counts:

- **packet_capture.processed**: packets processed against filter
- **packet_capture.captured**: packets matching dumped after matching filter

9.27 perf_monitor

What: performance monitoring and flow statistics collection

Type: inspector

Configuration:

- bool **perf_monitor.base** = true: enable base statistics { nullptr }
- bool **perf_monitor.cpu** = false: enable cpu statistics { nullptr }
- bool **perf_monitor.flow** = false: enable traffic statistics
- bool **perf_monitor.flow_ip** = false: enable statistics on host pairs
- int **perf_monitor.packets** = 10000: minimum packets to report { 0: }
- int **perf_monitor.seconds** = 60: report interval { 1: }
- int **perf_monitor.flow_ip_memcap** = 52428800: maximum memory in bytes for flow tracking { 8200: }
- int **perf_monitor.max_file_size** = 1073741824: files will be rolled over if they exceed this size { 4096: }
- int **perf_monitor.flow_ports** = 1023: maximum ports to track { 0:65535 }
- enum **perf_monitor.output** = file: output location for stats { file | console }
- string **perf_monitor.modules[].name**: name of the module
- string **perf_monitor.modules[].pegs**: list of statistics to track or empty for all counters
- enum **perf_monitor.format** = csv: output format for stats { csv | text }
- bool **perf_monitor.summary** = false: output summary at shutdown

Peg counts:

- **perf_monitor.packets**: total packets
-

9.28 pop

What: pop inspection

Type: inspector

Configuration:

- int **pop.b64_decode_depth** = 1460: base64 decoding depth { -1:65535 }
- int **pop.bitenc_decode_depth** = 1460: Non-Encoded MIME attachment extraction depth { -1:65535 }
- int **pop.qp_decode_depth** = 1460: Quoted Printable decoding depth { -1:65535 }
- int **pop.uu_decode_depth** = 1460: Unix-to-Unix decoding depth { -1:65535 }

Rules:

- **142:1** (pop) unknown POP3 command
- **142:2** (pop) unknown POP3 response
- **142:4** (pop) base64 decoding failed
- **142:5** (pop) quoted-printable decoding failed
- **142:7** (pop) Unix-to-Unix decoding failed

Peg counts:

- **pop.packets**: total packets processed
- **pop.sessions**: total pop sessions
- **pop.b64_attachments**: total base64 attachments decoded
- **pop.b64_decoded_bytes**: total base64 decoded bytes
- **pop.qp_attachments**: total quoted-printable attachments decoded
- **pop.qp_decoded_bytes**: total quoted-printable decoded bytes
- **pop.uu_attachments**: total uu attachments decoded
- **pop.uu_decoded_bytes**: total uu decoded bytes
- **pop.non_encoded_attachments**: total non-encoded attachments extracted
- **pop.non_encoded_bytes**: total non-encoded extracted bytes

9.29 port_scan

What: port scan inspector; also configure `port_scan_global`

Type: inspector

Configuration:

- multi **port_scan.protos** = all: choose the protocols to monitor { tcp | udp | icmp | ip | all }
 - multi **port_scan.scan_types** = all: choose type of scans to look for { portscan | portsweep | decoy_portscan | distributed_portscan | all }
 - enum **port_scan.sense_level** = medium: choose the level of detection { low | medium | high }
-

- string **port_scan.watch_ip**: list of CIDRs with optional ports to watch
- string **port_scan.ignore_scanners**: list of CIDRs with optional ports to ignore if the source of scan alerts
- string **port_scan.ignore_scanned**: list of CIDRs with optional ports to ignore if the destination of scan alerts
- bool **port_scan.include_midstream** = false: list of CIDRs with optional ports
- bool **port_scan.logfile** = false: write scan events to file

Rules:

- **122:1** (port_scan) TCP portscan
 - **122:2** (port_scan) TCP decoy portscan
 - **122:3** (port_scan) TCP portsweep
 - **122:4** (port_scan) TCP distributed portscan
 - **122:5** (port_scan) TCP filtered portscan
 - **122:6** (port_scan) TCP filtered decoy portscan
 - **122:7** (port_scan) TCP filtered portsweep
 - **122:8** (port_scan) TCP filtered distributed portscan
 - **122:9** (port_scan) IP protocol scan
 - **122:10** (port_scan) IP decoy protocol scan
 - **122:11** (port_scan) IP protocol sweep
 - **122:12** (port_scan) IP distributed protocol scan
 - **122:13** (port_scan) IP filtered protocol scan
 - **122:14** (port_scan) IP filtered decoy protocol scan
 - **122:15** (port_scan) IP filtered protocol sweep
 - **122:16** (port_scan) IP filtered distributed protocol scan
 - **122:17** (port_scan) UDP portscan
 - **122:18** (port_scan) UDP decoy portscan
 - **122:19** (port_scan) UDP portsweep
 - **122:20** (port_scan) UDP distributed portscan
 - **122:21** (port_scan) UDP filtered portscan
 - **122:22** (port_scan) UDP filtered decoy portscan
 - **122:23** (port_scan) UDP filtered portsweep
 - **122:24** (port_scan) UDP filtered distributed portscan
 - **122:25** (port_scan) ICMP sweep
 - **122:26** (port_scan) ICMP filtered sweep
 - **122:27** (port_scan) open port
-

9.30 port_scan_global

What: shared settings for port_scan inspectors for use with port_scan

Type: inspector

Configuration:

- int **port_scan_global.memcap** = 1048576: maximum tracker memory in bytes { 1: }

Peg counts:

- **port_scan_global.packets**: total packets

9.31 reputation

What: reputation inspection

Type: inspector

Configuration:

- string **reputation.blacklist**: blacklist file name with ip lists
- int **reputation.memcap** = 500: maximum total MB of memory allocated { 1:4095 }
- enum **reputation.nested_ip** = inner: ip to use when there is IP encapsulation { inner|outer|all }
- enum **reputation.priority** = whitelist: defines priority when there is a decision conflict during run-time { blacklist|whitelist }
- bool **reputation.scan_local** = false: inspect local address defined in RFC 1918
- enum **reputation.white** = unblack: specify the meaning of whitelist { unblack|trust }
- string **reputation.whitelist**: whitelist file name with ip lists

Rules:

- **136:1** (reputation) packets blacklisted
- **136:2** (reputation) packets whitelisted
- **136:3** (reputation) packets monitored

Peg counts:

- **reputation.packets**: total packets processed
 - **reputation.blacklisted**: number of packets blacklisted
 - **reputation.whitelisted**: number of packets whitelisted
 - **reputation.monitored**: number of packets monitored
 - **reputation.memory_allocated**: total memory allocated
-

9.32 rpc_decode

What: RPC inspector

Type: inspector

Rules:

- **106:1** (rpc_decode) fragmented RPC records
- **106:2** (rpc_decode) multiple RPC records
- **106:3** (rpc_decode) large RPC record fragment
- **106:4** (rpc_decode) incomplete RPC segment
- **106:5** (rpc_decode) zero-length RPC fragment

Peg counts:

- **rpc_decode.packets**: total packets

9.33 sip

What: sip inspection

Type: inspector

Configuration:

- bool **sip.ignore_call_channel** = false: enables the support for ignoring audio/video data channel
- int **sip.max_call_id_len** = 256: maximum call id field size { 0:65535 }
- int **sip.max_contact_len** = 256: maximum contact field size { 0:65535 }
- int **sip.max_content_len** = 1024: maximum content length of the message body { 0:65535 }
- int **sip.max_dialogs** = 4: maximum number of dialogs within one stream session { 1:4194303 }
- int **sip.max_from_len** = 256: maximum from field size { 0:65535 }
- int **sip.max_requestName_len** = 20: maximum request name field size { 0:65535 }
- int **sip.max_sessions** = 10000: maximum number of sessions that can be allocated { 1024:4194303 }
- int **sip.max_to_len** = 256: maximum to field size { 0:65535 }
- int **sip.max_uri_len** = 256: maximum request uri field size { 0:65535 }
- int **sip.max_via_len** = 1024: maximum via field size { 0:65535 }
- string **sip.methods** = invite cancel ack bye register options: list of methods to check in sip messages

Rules:

- **140:1** (sip) maximum sessions reached
 - **140:2** (sip) empty request URI
 - **140:3** (sip) URI is too long
 - **140:4** (sip) empty call-Id
-

- **140:5** (sip) Call-Id is too long
- **140:6** (sip) CSeq number is too large or negative
- **140:7** (sip) request name in CSeq is too long
- **140:8** (sip) empty From header
- **140:9** (sip) From header is too long
- **140:10** (sip) empty To header
- **140:11** (sip) To header is too long
- **140:12** (sip) empty Via header
- **140:13** (sip) Via header is too long
- **140:14** (sip) empty Contact
- **140:15** (sip) contact is too long
- **140:16** (sip) content length is too large or negative
- **140:17** (sip) multiple SIP messages in a packet
- **140:18** (sip) content length mismatch
- **140:19** (sip) request name is invalid
- **140:20** (sip) Invite replay attack
- **140:21** (sip) illegal session information modification
- **140:22** (sip) response status code is not a 3 digit number
- **140:23** (sip) empty Content-type header
- **140:24** (sip) SIP version is invalid
- **140:25** (sip) mismatch in METHOD of request and the CSEQ header
- **140:26** (sip) method is unknown
- **140:27** (sip) maximum dialogs within a session reached

Peg counts:

- **sip.packets:** total packets
 - **sip.sessions:** total sessions
 - **sip.events:** events generated
 - **sip.dialogs:** total dialogs
 - **sip.ignored_channels:** total channels ignored
 - **sip.ignored_sessions:** total sessions ignored
 - **sip.total_requests:** total requests
 - **sip.invite:** invite
 - **sip.cancel:** cancel
 - **sip.ack:** ack
-

- **sip.bye:** bye
- **sip.register:** register
- **sip.options:** options
- **sip.refer:** refer
- **sip.subscribe:** subscribe
- **sip.update:** update
- **sip.join:** join
- **sip.info:** info
- **sip.message:** message
- **sip.notify:** notify
- **sip.prack:** prack
- **sip.total_responses:** total responses
- **sip.1xx:** 1xx
- **sip.2xx:** 2xx
- **sip.3xx:** 3xx
- **sip.4xx:** 4xx
- **sip.5xx:** 5xx
- **sip.6xx:** 6xx
- **sip.7xx:** 7xx
- **sip.8xx:** 8xx
- **sip.9xx:** 9xx

9.34 smtp

What: smtp inspection

Type: inspector

Configuration:

- string **smtp.alt_max_command_line_len[].command:** command string
 - int **smtp.alt_max_command_line_len[].length** = 0: specify non-default maximum for command { 0: }
 - string **smtp.auth_cmds:** commands that initiate an authentication exchange
 - string **smtp.binary_data_cmds:** commands that initiate sending of data and use a length value after the command
 - int **smtp.bitenc_decode_depth** = 25: depth used to extract the non-encoded MIME attachments { -1:65535 }
 - int **smtp.b64_decode_depth** = 25: depth used to decode the base64 encoded MIME attachments { -1:65535 }
 - string **smtp.data_cmds:** commands that initiate sending of data with an end of data delimiter
 - int **smtp.email_hdrs_log_depth** = 1464: depth for logging email headers { 0:20480 }
 - bool **smtp.ignore_data** = false: ignore data section of mail
-

- bool **smtp.ignore_tls_data** = false: ignore TLS-encrypted data when processing rules
- string **smtp.invalid_cmds**: alert if this command is sent from client side
- bool **smtp.log_email_hdrs** = false: log the SMTP email headers extracted from SMTP data
- bool **smtp.log_filename** = false: log the MIME attachment filenames extracted from the Content-Disposition header within the MIME body
- bool **smtp.log_mailfrom** = false: log the sender's email address extracted from the MAIL FROM command
- bool **smtp.log_rcptto** = false: log the recipient's email address extracted from the RCPT TO command
- int **smtp.max_auth_command_line_len** = 1000: max auth command Line Length { 0:65535 }
- int **smtp.max_command_line_len** = 0: max Command Line Length { 0:65535 }
- int **smtp.max_header_line_len** = 0: max SMTP DATA header line { 0:65535 }
- int **smtp.max_response_line_len** = 0: max SMTP response line { 0:65535 }
- enum **smtp.normalize** = none: turns on/off normalization { none | cmds | all }
- string **smtp.normalize_cmds**: list of commands to normalize
- int **smtp.qp_decode_depth** = 25: quoted-Printable decoding depth { -1:65535 }
- int **smtp.uu_decode_depth** = 25: unix-to-Unix decoding depth { -1:65535 }
- string **smtp.valid_cmds**: list of valid commands
- enum **smtp.xlink2state** = alert: enable/disable xlink2state alert { disable | alert | drop }

Rules:

- **124:1** (smtp) attempted command buffer overflow
- **124:2** (smtp) attempted data header buffer overflow
- **124:3** (smtp) attempted response buffer overflow
- **124:4** (smtp) attempted specific command buffer overflow
- **124:5** (smtp) unknown command
- **124:6** (smtp) illegal command
- **124:7** (smtp) attempted header name buffer overflow
- **124:8** (smtp) attempted X-Link2State command buffer overflow
- **124:10** (smtp) base64 decoding failed
- **124:11** (smtp) quoted-printable decoding failed
- **124:13** (smtp) Unix-to-Unix decoding failed
- **124:14** (smtp) Cyrus SASL authentication attack
- **124:15** (smtp) attempted authentication command buffer overflow

Peg counts:

- **smtp.packets**: total packets processed
 - **smtp.sessions**: total smtp sessions
-

- **smtp.concurrent_sessions**: total concurrent smtp sessions
- **smtp.max_concurrent_sessions**: maximum concurrent smtp sessions
- **smtp.b64_attachments**: total base64 attachments decoded
- **smtp.b64_decoded_bytes**: total base64 decoded bytes
- **smtp.qp_attachments**: total quoted-printable attachments decoded
- **smtp.qp_decoded_bytes**: total quoted-printable decoded bytes
- **smtp.uu_attachments**: total uu attachments decoded
- **smtp.uu_decoded_bytes**: total uu decoded bytes
- **smtp.non_encoded_attachments**: total non-encoded attachments extracted
- **smtp.non_encoded_bytes**: total non-encoded extracted bytes

9.35 ssh

What: ssh inspection

Type: inspector

Configuration:

- **int ssh.max_encrypted_packets** = 25: ignore session after this many encrypted packets { 0:65535 }
- **int ssh.max_client_bytes** = 19600: number of unanswered bytes before alerting on challenge-response overflow or CRC32 { 0:65535 }
- **int ssh.max_server_version_len** = 80: limit before alerting on secure CRT server version string overflow { 0:255 }

Rules:

- **128:1** (ssh) challenge-response overflow exploit
- **128:2** (ssh) SSH1 CRC32 exploit
- **128:3** (ssh) server version string overflow
- **128:5** (ssh) bad message direction
- **128:6** (ssh) payload size incorrect for the given payload
- **128:7** (ssh) failed to detect SSH version string

Peg counts:

- **ssh.packets**: total packets
-

9.36 ssl

What: ssl inspection

Type: inspector

Configuration:

- **bool `ssl.trust_servers`** = false: disables requirement that application (encrypted) data must be observed on both sides
- **int `ssl.max_heartbeat_length`** = 0: maximum length of heartbeat record allowed { 0:65535 }

Rules:

- **137:1** (ssl) invalid client HELLO after server HELLO detected
- **137:2** (ssl) invalid server HELLO without client HELLO detected
- **137:3** (ssl) heartbeat read overrun attempt detected
- **137:4** (ssl) large heartbeat response detected

Peg counts:

- **`ssl.packets`**: total packets processed
 - **`ssl.decoded`**: ssl packets decoded
 - **`ssl.client_hello`**: total client hellos
 - **`ssl.server_hello`**: total server hellos
 - **`ssl.certificate`**: total ssl certificates
 - **`ssl.server_done`**: total server done
 - **`ssl.client_key_exchange`**: total client key exchanges
 - **`ssl.server_key_exchange`**: total server key exchanges
 - **`ssl.change_cipher`**: total change cipher records
 - **`ssl.finished`**: total handshakes finished
 - **`ssl.client_application`**: total client application records
 - **`ssl.server_application`**: total server application records
 - **`ssl.alert`**: total ssl alert records
 - **`ssl.unrecognized_records`**: total unrecognized records
 - **`ssl.handshakes_completed`**: total completed ssl handshakes
 - **`ssl.bad_handshakes`**: total bad handshakes
 - **`ssl.sessions_ignored`**: total sessions ignore
 - **`ssl.detection_disabled`**: total detection disabled
-

9.37 stream

What: common flow tracking

Type: inspector

Configuration:

- bool **stream.ip_frgs_only** = false: don't process non-frag flows
- int **stream.ip_cache.max_sessions** = 16384: maximum simultaneous sessions tracked before pruning { 2: }
- int **stream.ip_cache.pruning_timeout** = 30: minimum inactive time before being eligible for pruning { 1: }
- int **stream.ip_cache.idle_timeout** = 180: maximum inactive time before retiring session tracker { 1: }
- int **stream.icmp_cache.max_sessions** = 65536: maximum simultaneous sessions tracked before pruning { 2: }
- int **stream.icmp_cache.pruning_timeout** = 30: minimum inactive time before being eligible for pruning { 1: }
- int **stream.icmp_cache.idle_timeout** = 180: maximum inactive time before retiring session tracker { 1: }
- int **stream.tcp_cache.max_sessions** = 262144: maximum simultaneous sessions tracked before pruning { 2: }
- int **stream.tcp_cache.pruning_timeout** = 30: minimum inactive time before being eligible for pruning { 1: }
- int **stream.tcp_cache.idle_timeout** = 180: maximum inactive time before retiring session tracker { 1: }
- int **stream.udp_cache.max_sessions** = 131072: maximum simultaneous sessions tracked before pruning { 2: }
- int **stream.udp_cache.pruning_timeout** = 30: minimum inactive time before being eligible for pruning { 1: }
- int **stream.udp_cache.idle_timeout** = 180: maximum inactive time before retiring session tracker { 1: }
- int **stream.user_cache.max_sessions** = 1024: maximum simultaneous sessions tracked before pruning { 2: }
- int **stream.user_cache.pruning_timeout** = 30: minimum inactive time before being eligible for pruning { 1: }
- int **stream.user_cache.idle_timeout** = 180: maximum inactive time before retiring session tracker { 1: }
- int **stream.file_cache.max_sessions** = 128: maximum simultaneous sessions tracked before pruning { 2: }
- int **stream.file_cache.pruning_timeout** = 30: minimum inactive time before being eligible for pruning { 1: }
- int **stream.file_cache.idle_timeout** = 180: maximum inactive time before retiring session tracker { 1: }

Peg counts:

- **stream.ip_flows**: total ip sessions
 - **stream.ip_total_prunes**: total ip sessions pruned
 - **stream.ip_idle_prunes**: ip sessions pruned due to timeout
 - **stream.ip_excess_prunes**: ip sessions pruned due to excess
 - **stream.ip_uni_prunes**: ip uni sessions pruned
 - **stream.ip_preemptive_prunes**: ip sessions pruned during preemptive pruning
 - **stream.ip_memcap_prunes**: ip sessions pruned due to memcap
 - **stream.ip_ha_prunes**: ip sessions pruned by high availability sync
 - **stream.icmp_flows**: total icmp sessions
 - **stream.icmp_total_prunes**: total icmp sessions pruned
-

- **stream.icmp_idle_prunes**: icmp sessions pruned due to timeout
 - **stream.icmp_excess_prunes**: icmp sessions pruned due to excess
 - **stream.icmp_uni_prunes**: icmp uni sessions pruned
 - **stream.icmp_preemptive_prunes**: icmp sessions pruned during preemptive pruning
 - **stream.icmp_memcap_prunes**: icmp sessions pruned due to memcap
 - **stream.icmp_ha_prunes**: icmp sessions pruned by high availability sync
 - **stream.tcp_flows**: total tcp sessions
 - **stream.tcp_total_prunes**: total tcp sessions pruned
 - **stream.tcp_idle_prunes**: tcp sessions pruned due to timeout
 - **stream.tcp_excess_prunes**: tcp sessions pruned due to excess
 - **stream.tcp_uni_prunes**: tcp uni sessions pruned
 - **stream.tcp_preemptive_prunes**: tcp sessions pruned during preemptive pruning
 - **stream.tcp_memcap_prunes**: tcp sessions pruned due to memcap
 - **stream.tcp_ha_prunes**: tcp sessions pruned by high availability sync
 - **stream.udp_flows**: total udp sessions
 - **stream.udp_total_prunes**: total udp sessions pruned
 - **stream.udp_idle_prunes**: udp sessions pruned due to timeout
 - **stream.udp_excess_prunes**: udp sessions pruned due to excess
 - **stream.udp_uni_prunes**: udp uni sessions pruned
 - **stream.udp_preemptive_prunes**: udp sessions pruned during preemptive pruning
 - **stream.udp_memcap_prunes**: udp sessions pruned due to memcap
 - **stream.udp_ha_prunes**: udp sessions pruned by high availability sync
 - **stream.user_flows**: total user sessions
 - **stream.user_total_prunes**: total user sessions pruned
 - **stream.user_idle_prunes**: user sessions pruned due to timeout
 - **stream.user_excess_prunes**: user sessions pruned due to excess
 - **stream.user_uni_prunes**: user uni sessions pruned
 - **stream.user_preemptive_prunes**: user sessions pruned during preemptive pruning
 - **stream.user_memcap_prunes**: user sessions pruned due to memcap
 - **stream.user_ha_prunes**: user sessions pruned by high availability sync
 - **stream.file_flows**: total file sessions
 - **stream.file_total_prunes**: total file sessions pruned
 - **stream.file_idle_prunes**: file sessions pruned due to timeout
 - **stream.file_excess_prunes**: file sessions pruned due to excess
 - **stream.file_uni_prunes**: file uni sessions pruned
 - **stream.file_preemptive_prunes**: file sessions pruned during preemptive pruning
 - **stream.file_memcap_prunes**: file sessions pruned due to memcap
 - **stream.file_ha_prunes**: file sessions pruned by high availability sync
-

9.38 stream_file

What: stream inspector for file flow tracking and processing

Type: inspector

Configuration:

- bool **stream_file.upload** = false: indicate file transfer direction

9.39 stream_icmp

What: stream inspector for ICMP flow tracking

Type: inspector

Configuration:

- int **stream_icmp.session_timeout** = 30: session tracking timeout { 1:86400 }

Peg counts:

- **stream_icmp.sessions**: total icmp_sessions
- **stream_icmp.max**: max icmp_sessions
- **stream_icmp.created**: icmp_session trackers created
- **stream_icmp.released**: icmp_session trackers released
- **stream_icmp.timeouts**: icmp_session timeouts
- **stream_icmp.prunes**: icmp_session prunes

9.40 stream_ip

What: stream inspector for IP flow tracking and defragmentation

Type: inspector

Configuration:

- int **stream_ip.max_fragments** = 8192: maximum number of simultaneous fragments being tracked { 1: }
- int **stream_ip.max_overlaps** = 0: maximum allowed overlaps per datagram; 0 is unlimited { 0: }
- int **stream_ip.min_frag_length** = 0: alert if fragment length is below this limit before or after trimming { 0: }
- int **stream_ip.min_ttl** = 1: discard fragments with ttl below the minimum { 1:255 }
- enum **stream_ip.policy** = linux: fragment reassembly policy { first | linux | bsd | bsd_right | last | windows | solaris }
- int **stream_ip.session_timeout** = 30: session tracking timeout { 1:86400 }
- int **stream_ip.trace**: mask for enabling debug traces in module

Rules:

- **123:1** (stream_ip) inconsistent IP options on fragmented packets
 - **123:2** (stream_ip) teardrop attack
-

- **123:3** (stream_ip) short fragment, possible DOS attempt
- **123:4** (stream_ip) fragment packet ends after defragmented packet
- **123:5** (stream_ip) zero-byte fragment packet
- **123:6** (stream_ip) bad fragment size, packet size is negative
- **123:7** (stream_ip) bad fragment size, packet size is greater than 65536
- **123:8** (stream_ip) fragmentation overlap
- **123:11** (stream_ip) TTL value less than configured minimum, not using for reassembly
- **123:12** (stream_ip) excessive fragment overlap
- **123:13** (stream_ip) tiny fragment

Peg counts:

- **stream_ip.sessions**: total ip_ sessions
 - **stream_ip.max**: max ip_ sessions
 - **stream_ip.created**: ip_ session trackers created
 - **stream_ip.released**: ip_ session trackers released
 - **stream_ip.timeouts**: ip_ session timeouts
 - **stream_ip.prunes**: ip_ session prunes
 - **stream_ip.total_frags**: total fragments
 - **stream_ip.current_frags**: current fragments
 - **stream_ip.max_frags**: max fragments
 - **stream_ip.reassembled**: reassembled datagrams
 - **stream_ip.discards**: fragments discarded
 - **stream_ip.frag_timeouts**: datagrams abandoned
 - **stream_ip.overlaps**: overlapping fragments
 - **stream_ip.anomalies**: anomalies detected
 - **stream_ip.alerts**: alerts generated
 - **stream_ip.drops**: fragments dropped
 - **stream_ip.trackers_added**: datagram trackers created
 - **stream_ip.trackers_freed**: datagram trackers released
 - **stream_ip.trackers_cleared**: datagram trackers cleared
 - **stream_ip.trackers_completed**: datagram trackers completed
 - **stream_ip.nodes_inserted**: fragments added to tracker
 - **stream_ip.nodes_deleted**: fragments deleted from tracker
 - **stream_ip.memory_used**: current memory usage in bytes
 - **stream_ip.reassembled_bytes**: total reassembled bytes
 - **stream_ip.fragmented_bytes**: total fragmented bytes
-

9.41 stream_tcp

What: stream inspector for TCP flow tracking and stream normalization and reassembly

Type: inspector

Configuration:

- int **stream_tcp.flush_factor** = 0: flush upon seeing a drop in segment size after given number of non-decreasing segments { 0: }
- bool **stream_tcp.ignore_any_rules** = false: process tcp content rules w/o ports only if rules with ports are present
- int **stream_tcp.max_window** = 0: maximum allowed tcp window { 0:1073725440 }
- int **stream_tcp.overlap_limit** = 0: maximum number of allowed overlapping segments per session { 0:255 }
- int **stream_tcp.max_pdu** = 16384: maximum reassembled PDU size { 1460:65535 }
- enum **stream_tcp.policy** = `bsd`: determines operating system characteristics like reassembly { `first` | `last` | `linux` | `old_linux` | `bsd` | `macos` | `solaris` | `irix` | `hpux11` | `hpux10` | `windows` | `win_2003` | `vista` | `proxy` }
- bool **stream_tcp.reassemble_async** = true: queue data for reassembly before traffic is seen in both directions
- int **stream_tcp.require_3whs** = -1: don't track midstream sessions after given seconds from start up; -1 tracks all { -1:86400 }
- bool **stream_tcp.show_rebuilt_packets** = false: enable cmg like output of reassembled packets
- int **stream_tcp.queue_limit.max_bytes** = 1048576: don't queue more than given bytes per session and direction { 0: }
- int **stream_tcp.queue_limit.max_segments** = 2621: don't queue more than given segments per session and direction { 0: }
- int **stream_tcp.small_segments.count** = 0: limit number of small segments queued { 0:2048 }
- int **stream_tcp.small_segments.maximum_size** = 0: limit number of small segments queued { 0:2048 }
- int **stream_tcp.session_timeout** = 30: session tracking timeout { 1:86400 }
- int **stream_tcp.footprint** = 0: use zero for production, non-zero for testing at given size { 0: }

Rules:

- **129:1** (stream_tcp) SYN on established session
 - **129:2** (stream_tcp) data on SYN packet
 - **129:3** (stream_tcp) data sent on stream not accepting data
 - **129:4** (stream_tcp) TCP timestamp is outside of PAWS window
 - **129:5** (stream_tcp) bad segment, adjusted size ≤ 0 (deprecated)
 - **129:6** (stream_tcp) window size (after scaling) larger than policy allows
 - **129:7** (stream_tcp) limit on number of overlapping TCP packets reached
 - **129:8** (stream_tcp) data sent on stream after TCP reset sent
 - **129:9** (stream_tcp) TCP client possibly hijacked, different ethernet address
 - **129:10** (stream_tcp) TCP server possibly hijacked, different ethernet address
 - **129:11** (stream_tcp) TCP data with no TCP flags set
 - **129:12** (stream_tcp) consecutive TCP small segments exceeding threshold
-

- **129:13** (stream_tcp) 4-way handshake detected
- **129:14** (stream_tcp) TCP timestamp is missing
- **129:15** (stream_tcp) reset outside window
- **129:16** (stream_tcp) FIN number is greater than prior FIN
- **129:17** (stream_tcp) ACK number is greater than prior FIN
- **129:18** (stream_tcp) data sent on stream after TCP reset received
- **129:19** (stream_tcp) TCP window closed before receiving data
- **129:20** (stream_tcp) TCP session without 3-way handshake

Peg counts:

- **stream_tcp.sessions**: total tcp_ sessions
 - **stream_tcp.max**: max tcp_ sessions
 - **stream_tcp.created**: tcp_ session trackers created
 - **stream_tcp.released**: tcp_ session trackers released
 - **stream_tcp.timeouts**: tcp_ session timeouts
 - **stream_tcp.prunes**: tcp_ session prunes
 - **stream_tcp.resyns**: SYN received on established session
 - **stream_tcp.discards**: tcp packets discarded
 - **stream_tcp.events**: events generated
 - **stream_tcp.ignored**: tcp packets ignored
 - **stream_tcp.untracked**: tcp packets not tracked
 - **stream_tcp.syn_trackers**: tcp session tracking started on syn
 - **stream_tcp.syn_ack_trackers**: tcp session tracking started on syn-ack
 - **stream_tcp.3way_trackers**: tcp session tracking started on ack
 - **stream_tcp.data_trackers**: tcp session tracking started on data
 - **stream_tcp.segs_queued**: total segments queued
 - **stream_tcp.segs_released**: total segments released
 - **stream_tcp.segs_split**: tcp segments split when reassembling PDUs
 - **stream_tcp.segs_used**: queued tcp segments applied to reassembled PDUs
 - **stream_tcp.rebuilt_packets**: total reassembled PDUs
 - **stream_tcp.rebuilt_buffers**: rebuilt PDU sections
 - **stream_tcp.rebuilt_bytes**: total rebuilt bytes
 - **stream_tcp.overlaps**: overlapping segments queued
 - **stream_tcp.gaps**: missing data between PDUs
 - **stream_tcp.exceeded_max_segs**: number of times the maximum queued segment limit was reached
-

- **stream_tcp.exceeded_max_bytes**: number of times the maximum queued byte limit was reached
- **stream_tcp.internal_events**: 135:X events generated
- **stream_tcp.client_cleanups**: number of times data from server was flushed when session released
- **stream_tcp.server_cleanups**: number of times data from client was flushed when session released
- **stream_tcp.memory**: current memory in use
- **stream_tcp.initializing**: number of sessions currently initializing
- **stream_tcp.established**: number of sessions currently established
- **stream_tcp.closing**: number of sessions currently closing

9.42 stream_udp

What: stream inspector for UDP flow tracking

Type: inspector

Configuration:

- int **stream_udp.session_timeout** = 30: session tracking timeout { 1:86400 }
- bool **stream_udp.ignore_any_rules** = false: process udp content rules w/o ports only if rules with ports are present

Peg counts:

- **stream_udp.sessions**: total udp_ sessions
- **stream_udp.max**: max udp_ sessions
- **stream_udp.created**: udp_ session trackers created
- **stream_udp.released**: udp_ session trackers released
- **stream_udp.timeouts**: udp_ session timeouts
- **stream_udp.prunes**: udp_ session prunes

9.43 stream_user

What: stream inspector for user flow tracking and reassembly

Type: inspector

Configuration:

- int **stream_user.session_timeout** = 30: session tracking timeout { 1:86400 }
 - int **stream_user.trace**: mask for enabling debug traces in module
-

9.44 telnet

What: telnet inspection and normalization

Type: inspector

Configuration:

- int **telnet.ayt_attack_thresh** = -1: alert on this number of consecutive telnet AYT commands { -1: }
- bool **telnet.check_encrypted** = false: check for end of encryption
- bool **telnet.encrypted_traffic** = false: check for encrypted telnet and ftp
- bool **telnet.normalize** = false: eliminate escape sequences

Rules:

- **126:1** (telnet) consecutive telnet AYT commands beyond threshold
- **126:2** (telnet) telnet traffic encrypted
- **126:3** (telnet) telnet subnegotiation begin command without subnegotiation end

Peg counts:

- **telnet.packets**: total packets

9.45 wizard

What: inspector that implements port-independent protocol identification

Type: inspector

Configuration:

- string **wizard.hexes[].service**: name of service
- select **wizard.hexes[].proto** = tcp: protocol to scan { tcp | udp }
- bool **wizard.hexes[].client_first** = true: which end initiates data transfer
- string **wizard.hexes[].to_server[].hex**: sequence of data with wild chars (?)
- string **wizard.hexes[].to_client[].hex**: sequence of data with wild chars (?)
- string **wizard.spells[].service**: name of service
- select **wizard.spells[].proto** = tcp: protocol to scan { tcp | udp }
- bool **wizard.spells[].client_first** = true: which end initiates data transfer
- string **wizard.spells[].to_server[].spell**: sequence of data with wild cards (*)
- string **wizard.spells[].to_client[].spell**: sequence of data with wild cards (*)
- multi **wizard.curses**: enable service identification based on internal algorithm { dce_smb | dce_udp | dce_tcp }

Peg counts:

- **wizard.tcp_scans**: tcp payload scans
 - **wizard.tcp_hits**: tcp identifications
 - **wizard.udp_scans**: udp payload scans
 - **wizard.udp_hits**: udp identifications
 - **wizard.user_scans**: user payload scans
 - **wizard.user_hits**: user identifications
-

10 IPS Action Modules

IPS actions allow you to perform custom actions when events are generated. Unlike loggers, these are invoked before thresholding and can be used to control external agents.

Externally defined actions must be configured to become available to the parser. For the reject rule, you can set `reject = { }` to get the rule to parse.

10.1 react

What: send response to client and terminate session

Type: `ips_action`

Configuration:

- bool **react.msg** = false: use rule msg in response page instead of default message
- string **react.page**: file containing HTTP response (headers and body)

10.2 reject

What: terminate session with TCP reset or ICMP unreachable

Type: `ips_action`

Configuration:

- enum **reject.reset**: send tcp reset to one or both ends { `source|dest|both` }
- enum **reject.control**: send icmp unreachable(s) { `network|host|port|all` }

10.3 rewrite

What: overwrite packet contents

Type: `ips_action`

Configuration:

- bool **rewrite.disable_replace** = false: disable replace of packet contents with rewrite rules

11 IPS Option Modules

IPS options are the building blocks of IPS rules.

11.1 ack

What: rule option to match on TCP ack numbers

Type: `ips_option`

Configuration:

- string **ack.~range**: check if tcp ack value is *value* | *min*<>*max* | <*max* | >*min*

11.2 appids

What: detection option for application ids

Type: ips_option

Configuration:

- string **appids.~**: comma separated list of application names

11.3 asn1

What: rule option for asn1 detection

Type: ips_option

Configuration:

- implied **asn1.bitstring_overflow**: detects invalid bitstring encodings that are known to be remotely exploitable
- implied **asn1.double_overflow**: detects a double ASCII encoding that is larger than a standard buffer
- implied **asn1.print**: dump decode data to console; always true
- int **asn1.oversize_length**: compares ASN.1 type lengths with the supplied argument { 0: }
- int **asn1.absolute_offset**: absolute offset from the beginning of the packet { 0: }
- int **asn1.relative_offset**: relative offset from the cursor

11.4 base64_decode

What: rule option to decode base64 data - must be used with base64_data option

Type: ips_option

Configuration:

- int **base64_decode.bytes**: number of base64 encoded bytes to decode { 1: }
- int **base64_decode.offset** = 0: bytes past start of buffer to start decoding { 0: }
- implied **base64_decode.relative**: apply offset to cursor instead of start of buffer

11.5 bufferlen

What: rule option to check length of current buffer

Type: ips_option

Configuration:

- string **bufferlen.~range**: len | min<>max | <max | >min
-

11.6 byte_extract

What: rule option to convert data to an integer variable

Type: ips_option

Configuration:

- int **byte_extract.~count**: number of bytes to pick up from the buffer { 1:10 }
- int **byte_extract.~offset**: number of bytes into the buffer to start processing { -65535:65535 }
- string **byte_extract.~name**: name of the variable that will be used in other rule options
- implied **byte_extract.relative**: offset from cursor instead of start of buffer
- int **byte_extract.multiplier** = 1: scale extracted value by given amount { 1:65535 }
- int **byte_extract.align** = 0: round the number of converted bytes up to the next 2- or 4-byte boundary { 0:4 }
- implied **byte_extract.big**: big endian
- implied **byte_extract.little**: little endian
- implied **byte_extract.dce**: dcerpc2 determines endianness
- implied **byte_extract.string**: convert from string
- implied **byte_extract.hex**: convert from hex string
- implied **byte_extract.oct**: convert from octal string
- implied **byte_extract.dec**: convert from decimal string

11.7 byte_jump

What: rule option to move the detection cursor

Type: ips_option

Configuration:

- int **byte_jump.~count**: number of bytes to pick up from the buffer { 1:10 }
 - string **byte_jump.~offset**: variable name or number of bytes into the buffer to start processing
 - implied **byte_jump.relative**: offset from cursor instead of start of buffer
 - implied **byte_jump.from_beginning**: jump from start of buffer instead of cursor
 - int **byte_jump.multiplier** = 1: scale extracted value by given amount { 1:65535 }
 - int **byte_jump.align** = 0: round the number of converted bytes up to the next 2- or 4-byte boundary { 0:4 }
 - int **byte_jump.post_offset** = 0: also skip forward or backwards (positive or negative value) this number of bytes { -65535:65535 }
 - implied **byte_jump.big**: big endian
 - implied **byte_jump.little**: little endian
 - implied **byte_jump.dce**: dcerpc2 determines endianness
 - implied **byte_jump.string**: convert from string
 - implied **byte_jump.hex**: convert from hex string
 - implied **byte_jump.oct**: convert from octal string
 - implied **byte_jump.dec**: convert from decimal string
-

11.8 byte_test

What: rule option to convert data to integer and compare

Type: ips_option

Configuration:

- int **byte_test.~count**: number of bytes to pick up from the buffer { 1:10 }
- string **byte_test.~operator**: variable name or number of bytes into the buffer to start processing
- string **byte_test.~compare**: variable name or value to test the converted result against
- string **byte_test.~offset**: variable name or number of bytes into the payload to start processing
- implied **byte_test.relative**: offset from cursor instead of start of buffer
- implied **byte_test.big**: big endian
- implied **byte_test.little**: little endian
- implied **byte_test.dce**: dcerpc2 determines endianness
- implied **byte_test.string**: convert from string
- implied **byte_test.hex**: convert from hex string
- implied **byte_test.oct**: convert from octal string
- implied **byte_test.dec**: convert from decimal string

11.9 classtype

What: general rule option for rule classification

Type: ips_option

Configuration:

- string **classtype.~**: classification for this rule

11.10 content

What: payload rule option for basic pattern matching

Type: ips_option

Configuration:

- string **content.~data**: data to match
 - implied **content.nocase**: case insensitive match
 - implied **content.fast_pattern**: use this content in the fast pattern matcher instead of the content selected by default
 - int **content.fast_pattern_offset** = 0: number of leading characters of this content the fast pattern matcher should exclude { 0: }
 - int **content.fast_pattern_length**: maximum number of characters from this content the fast pattern matcher should use { 1: }
 - string **content.offset**: var or number of bytes from start of buffer to start search
 - string **content.depth**: var or maximum number of bytes to search from beginning of buffer
 - string **content.distance**: var or number of bytes from cursor to start search
 - string **content.within**: var or maximum number of bytes to search from cursor
-

11.11 cvs

What: payload rule option for detecting specific attacks

Type: ips_option

Configuration:

- implied **cvs.invalid-entry**: looks for an invalid Entry string

11.12 dce_iface

What: detection option to check dcerpc interface

Type: ips_option

Configuration:

- string **dce_iface.uuid**: match given dcerpc uuid
- string **dce_iface.version**: interface version
- implied **dce_iface.any_frag**: match on any fragment

11.13 dce_opnum

What: detection option to check dcerpc operation number

Type: ips_option

Configuration:

- string **dce_opnum.~**: match given dcerpc operation number, range or list

11.14 dce_stub_data

What: sets the cursor to dcerpc stub data

Type: ips_option

11.15 detection_filter

What: rule option to require multiple hits before a rule generates an event

Type: ips_option

Configuration:

- enum **detection_filter.track**: track hits by source or destination IP address { by_src | by_dst }
- int **detection_filter.count**: hits in interval before allowing the rule to fire { 1: }
- int **detection_filter.seconds**: length of interval to count hits { 1: }

11.16 dnp3_data

What: sets the cursor to dnp3 data

Type: ips_option

11.17 dnp3_func

What: detection option to check dnp3 function code

Type: ips_option

Configuration:

- string **dnp3_func.~**: match dnp3 function code or name

11.18 dnp3_ind

What: detection option to check dnp3 indicator flags

Type: ips_option

Configuration:

- string **dnp3_ind.~**: match given dnp3 indicator flags

11.19 dnp3_obj

What: detection option to check dnp3 object headers

Type: ips_option

Configuration:

- int **dnp3_obj.group** = 0: match given dnp3 object header group { 0:255 }
- int **dnp3_obj.var** = 0: match given dnp3 object header var { 0:255 }

11.20 dsize

What: rule option to test payload size

Type: ips_option

Configuration:

- string **dsize.~range**: check if packet payload size is *size* | *min*<>*max* | <*max* | >*min*

11.21 file_data

What: rule option to set detection cursor to file data

Type: ips_option

11.22 file_type

What: rule option to check file type

Type: ips_option

Configuration:

- string **file_type.~**: list of file type IDs to match
-

11.23 flags

What: rule option to test TCP control flags

Type: ips_option

Configuration:

- string **flags.~test_flags**: these flags are tested
- string **flags.~mask_flags**: these flags are don't cares

11.24 flow

What: rule option to check session properties

Type: ips_option

Configuration:

- implied **flow.to_client**: match on server responses
- implied **flow.to_server**: match on client requests
- implied **flow.from_client**: same as to_server
- implied **flow.from_server**: same as to_client
- implied **flow.established**: match only during data transfer phase
- implied **flow.not_established**: match only outside data transfer phase
- implied **flow.stateless**: match regardless of stream state
- implied **flow.no_stream**: match on raw packets only
- implied **flow.only_stream**: match on reassembled packets only
- implied **flow.no_frag**: match on raw packets only
- implied **flow.only_frag**: match on defragmented packets only

11.25 flowbits

What: rule option to set and test arbitrary boolean flags

Type: ips_option

Configuration:

- string **flowbits.~command**: set/reset/lisset/etc.
- string **flowbits.~arg1**: bits or group
- string **flowbits.~arg2**: group if arg1 is bits

11.26 fragbits

What: rule option to test IP frag flags

Type: ips_option

Configuration:

- string **fragbits.~flags**: these flags are tested
-

11.27 fragoffset

What: rule option to test IP frag offset

Type: ips_option

Configuration:

- string **fragoffset.~range**: check if ip fragment offset value is *value* | *min*<>*max* | <*max* | >*min*

11.28 gid

What: rule option specifying rule generator

Type: ips_option

Configuration:

- int **gid.~**: generator id { 1: }

11.29 gtp_info

What: rule option to check gtp info element

Type: ips_option

Configuration:

- string **gtp_info.~**: info element to match

11.30 gtp_type

What: rule option to check gtp types

Type: ips_option

Configuration:

- string **gtp_type.~**: list of types to match

11.31 gtp_version

What: rule option to check gtp version

Type: ips_option

Configuration:

- int **gtp_version.~**: version to match { 0:2 }

11.32 http_client_body

What: rule option to set the detection cursor to the request body

Type: ips_option

11.33 http_cookie

What: rule option to set the detection cursor to the HTTP cookie

Type: ips_option

11.34 http_header

What: rule option to set the detection cursor to the normalized header(s)

Type: ips_option

Configuration:

- string **http_header.~name**: restrict to given header

11.35 http_method

What: rule option to set the detection cursor to the HTTP request method

Type: ips_option

11.36 http_raw_cookie

What: rule option to set the detection cursor to the unnormalized cookie

Type: ips_option

11.37 http_raw_header

What: rule option to set the detection cursor to the unnormalized headers

Type: ips_option

11.38 http_raw_request

What: rule option to set the detection cursor to the unnormalized request line

Type: ips_option

Configuration:

- implied **http_raw_request.with_body**: parts of this rule examine HTTP message body
- implied **http_raw_request.with_trailer**: parts of this rule examine HTTP message trailers

11.39 http_raw_status

What: rule option to set the detection cursor to the unnormalized status line

Type: ips_option

Configuration:

- implied **http_raw_status.with_body**: parts of this rule examine HTTP message body
 - implied **http_raw_status.with_trailer**: parts of this rule examine HTTP message trailers
-

11.40 http_raw_trailer

What: rule option to set the detection cursor to the unnormalized trailers

Type: ips_option

Configuration:

- implied **http_raw_trailer.request**: match against the trailers from the request message even when examining the response
- implied **http_raw_trailer.with_header**: parts of this rule examine HTTP response message headers (must be combined with request)
- implied **http_raw_trailer.with_body**: parts of this rule examine HTTP response message body (must be combined with request)

11.41 http_raw_uri

What: rule option to set the detection cursor to the unnormalized URI

Type: ips_option

11.42 http_stat_code

What: rule option to set the detection cursor to the HTTP status code

Type: ips_option

11.43 http_stat_msg

What: rule option to set the detection cursor to the HTTP status message

Type: ips_option

11.44 http_trailer

What: rule option to set the detection cursor to the normalized trailers

Type: ips_option

Configuration:

- string **http_trailer.field**: restrict to given trailer
- implied **http_trailer.request**: match against the trailers from the request message even when examining the response
- implied **http_trailer.with_header**: parts of this rule examine HTTP response message headers (must be combined with request)
- implied **http_trailer.with_body**: parts of this rule examine HTTP message body (must be combined with request)

11.45 http_uri

What: rule option to set the detection cursor to the normalized URI buffer

Type: ips_option

11.46 http_version

What: rule option to set the detection cursor to the version buffer

Type: ips_option

Configuration:

- implied **http_version.request**: match against the version from the request message even when examining the response
- implied **http_version.with_body**: parts of this rule examine HTTP message body
- implied **http_version.with_trailer**: parts of this rule examine HTTP message trailers

11.47 icmp_id

What: rule option to check ICMP ID

Type: ips_option

Configuration:

- string **icmp_id.~range**: check if icmp id is *id* | *min*<>*max* | <*max* | >*min*

11.48 icmp_seq

What: rule option to check ICMP sequence number

Type: ips_option

Configuration:

- string **icmp_seq.~range**: check if icmp sequence number is *seq* | *min*<>*max* | <*max* | >*min*

11.49 icode

What: rule option to check ICMP code

Type: ips_option

Configuration:

- string **icode.~range**: check if ICMP code is *code* | *min*<>*max* | <*max* | >*min*

11.50 id

What: rule option to check the IP ID field

Type: ips_option

Configuration:

- string **id.~range**: check if the IP ID is *id* | *min*<>*max* | <*max* | >*min*

11.51 ip_proto

What: rule option to check the IP protocol number

Type: ips_option

Configuration:

- string **ip_proto.~proto**: [!>|<] name or number

11.52 ipopts

What: rule option to check for IP options

Type: ips_option

Configuration:

- select **ipopts.~opt**: output format { rrleollnopltslseclseccllsrrllsrrlssrrlsatidlany }

11.53 isdataat

What: rule option to check for the presence of payload data

Type: ips_option

Configuration:

- string **isdataat.~length**: num | !num
- implied **isdataat.relative**: offset from cursor instead of start of buffer

11.54 itype

What: rule option to check ICMP type

Type: ips_option

Configuration:

- string **itype.~range**: check if icmp type is *type* | *min*<>*max* | <*max* | >*min*

11.55 md5

What: payload rule option for hash matching

Type: ips_option

Configuration:

- string **md5.~hash**: data to match
- int **md5.length**: number of octets in plain text { 1:65535 }
- string **md5.offset**: var or number of bytes from start of buffer to start search
- implied **md5.relative** = false: offset from cursor instead of start of buffer

11.56 metadata

What: rule option for conveying arbitrary name, value data within the rule text

Type: ips_option

Configuration:

- string **metadata.service**: service name
 - string **metadata.***: additional parameters not used by snort
-

11.57 modbus_data

What: rule option to set cursor to modbus data

Type: ips_option

11.58 modbus_func

What: rule option to check modbus function code

Type: ips_option

Configuration:

- string **modbus_func.~**: function code to match

11.59 modbus_unit

What: rule option to check modbus unit ID

Type: ips_option

Configuration:

- int **modbus_unit.~**: modbus unit ID { 0:255 }

11.60 msg

What: rule option summarizing rule purpose output with events

Type: ips_option

Configuration:

- string **msg.~**: message describing rule

11.61 pcre

What: rule option for matching payload data with pcre

Type: ips_option

Configuration:

- string **pcre.~re**: Snort regular expression

11.62 pkt_data

What: rule option to set the detection cursor to the normalized packet data

Type: ips_option

11.63 pkt_num

What: alert on raw packet number

Type: ips_option

Configuration:

- string **pkt_num.~range**: check if packet number is in given range
-

11.64 priority

What: rule option for prioritizing events

Type: ips_option

Configuration:

- int **priority.~**: relative severity level; 1 is highest priority { 1: }

11.65 raw_data

What: rule option to set the detection cursor to the raw packet data

Type: ips_option

11.66 reference

What: rule option to indicate relevant attack identification system

Type: ips_option

Configuration:

- string **reference.~scheme**: reference scheme
- string **reference.~id**: reference id

11.67 regex

What: rule option for matching payload data with hyperscan regex

Type: ips_option

Configuration:

- string **regex.~re**: hyperscan regular expression
- implied **regex.nocase**: case insensitive match
- implied **regex.dotall**: matching a . will not exclude newlines
- implied **regex.multiline**: ^ and \$ anchors match any newlines in data
- implied **regex.relative**: start search from end of last match instead of start of buffer

11.68 rem

What: rule option to convey an arbitrary comment in the rule body

Type: ips_option

Configuration:

- string **rem.~**: comment
-

11.69 replace

What: rule option to overwrite payload data; use with rewrite action

Type: ips_option

Configuration:

- string **replace.~**: byte code to replace with

11.70 rev

What: rule option to indicate current revision of signature

Type: ips_option

Configuration:

- int **rev.~**: revision { 1: }

11.71 rpc

What: rule option to check SUNRPC CALL parameters

Type: ips_option

Configuration:

- int **rpc.~app**: application number
- int **rpc.ver**: version number or * for any
- int **rpc.proc**: procedure number or * for any

11.72 sd_pattern

What: rule option for detecting sensitive data

Type: ips_option

Configuration:

- string **sd_pattern.~pattern**: The pattern to search for
- int **sd_pattern.threshold**: number of matches before alerting { 1 }

Peg counts:

- **sd_pattern.below_threshold**: sd_pattern matched but missed threshold
- **sd_pattern.pattern_not_found**: sd_pattern did not match
- **sd_pattern.terminated**: hyperscan terminated

11.73 seq

What: rule option to check TCP sequence number

Type: ips_option

Configuration:

- string **seq.~range**: check if tcp sequence number value is *value* | *min*<>*max* | <*max* | >*min*

11.74 session

What: rule option to check user data from TCP sessions

Type: ips_option

Configuration:

- enum **session.~mode**: output format { printable|binary|all }

11.75 sha256

What: payload rule option for hash matching

Type: ips_option

Configuration:

- string **sha256.~hash**: data to match
- int **sha256.length**: number of octets in plain text { 1:65535 }
- string **sha256.offset**: var or number of bytes from start of buffer to start search
- implied **sha256.relative** = false: offset from cursor instead of start of buffer

11.76 sha512

What: payload rule option for hash matching

Type: ips_option

Configuration:

- string **sha512.~hash**: data to match
- int **sha512.length**: number of octets in plain text { 1:65535 }
- string **sha512.offset**: var or number of bytes from start of buffer to start search
- implied **sha512.relative** = false: offset from cursor instead of start of buffer

11.77 sid

What: rule option to indicate signature number

Type: ips_option

Configuration:

- int **sid.~**: signature id { 1: }

11.78 sip_body

What: rule option to set the detection cursor to the request body

Type: ips_option

11.79 sip_header

What: rule option to set the detection cursor to the SIP header buffer

Type: ips_option

11.80 sip_method

What: detection option for sip stat code

Type: ips_option

Configuration:

- string **sip_method.*method**: sip method

11.81 sip_stat_code

What: detection option for sip stat code

Type: ips_option

Configuration:

- int **sip_stat_code.*code**: stat code { 1:999 }

11.82 so

What: rule option to call custom eval function

Type: ips_option

Configuration:

- string **so.~func**: name of eval function

11.83 soid

What: rule option to specify a shared object rule ID

Type: ips_option

Configuration:

- string **soid.~**: SO rule ID has <gid>|<sid> format, like 3|12345

11.84 ssl_state

What: detection option for ssl state

Type: ips_option

Configuration:

- implied **ssl_state.client_hello**: check for client hello
 - implied **ssl_state.server_hello**: check for server hello
 - implied **ssl_state.client_keyx**: check for client keyx
-

- implied **ssl_state.server_keyx**: check for server keyx
- implied **ssl_state.unknown**: check for unknown record
- implied **ssl_state.!client_hello**: check for records that are not client hello
- implied **ssl_state.!server_hello**: check for records that are not server hello
- implied **ssl_state.!client_keyx**: check for records that are not client keyx
- implied **ssl_state.!server_keyx**: check for records that are not server keyx
- implied **ssl_state.!unknown**: check for records that are not unknown

11.85 ssl_version

What: detection option for ssl version

Type: ips_option

Configuration:

- implied **ssl_version.sslv2**: check for sslv2
- implied **ssl_version.sslv3**: check for sslv3
- implied **ssl_version.tls1.0**: check for tls1.0
- implied **ssl_version.tls1.1**: check for tls1.1
- implied **ssl_version.tls1.2**: check for tls1.2
- implied **ssl_version.!sslv2**: check for records that are not sslv2
- implied **ssl_version.!sslv3**: check for records that are not sslv3
- implied **ssl_version.!tls1.0**: check for records that are not tls1.0
- implied **ssl_version.!tls1.1**: check for records that are not tls1.1
- implied **ssl_version.!tls1.2**: check for records that are not tls1.2

11.86 stream_reassemble

What: detection option for stream reassembly control

Type: ips_option

Configuration:

- enum **stream_reassemble.action**: stop or start stream reassembly { disable|enable }
 - enum **stream_reassemble.direction**: action applies to the given direction(s) { client|server|both }
 - implied **stream_reassemble.noalert**: don't alert when rule matches
 - implied **stream_reassemble.fastpath**: optionally whitelist the remainder of the session
-

11.87 stream_size

What: detection option for stream size checking

Type: ips_option

Configuration:

- string **stream_size.~range**: size for comparison
- enum **stream_size.~direction**: compare applies to the given direction(s) { either|to_server|to_client|both }

11.88 tag

What: rule option to log additional packets

Type: ips_option

Configuration:

- enum **tag.~**: log all packets in session or all packets to or from host { session|host_src|host_dst }
- int **tag.packets**: tag this many packets { 1: }
- int **tag.seconds**: tag for this many seconds { 1: }
- int **tag.bytes**: tag for this many bytes { 1: }

11.89 tos

What: rule option to check type of service field

Type: ips_option

Configuration:

- string **tos.~range**: check if ip tos value is *value* | *min*<>*max* | <*max* | >*min*

11.90 ttl

What: rule option to check time to live field

Type: ips_option

Configuration:

- string **ttl.~range**: check if ip ttl field value is *value* | *min*<>*max* | <*max* | >*min*

11.91 urg

What: detection for TCP urgent pointer

Type: ips_option

Configuration:

- string **urg.~range**: check if urgent offset is *min*<>*max* | <*max* | >*min*
-

11.92 window

What: rule option to check TCP window field

Type: `ips_option`

Configuration:

- string **window.*~range***: check if tcp window field size is *size* | *min*<>*max* | <*max* | >*min*

12 Search Engine Modules

Search engines perform multipattern searching of packets and payload to find rules that should be evaluated. There are currently no specific modules, although there are several search engine plugins. Related configuration is done with the basic detection module.

13 SO Rule Modules

SO rules are dynamic rules that require custom coding to perform detection not possible with the existing rule options. These rules typically do not have associated modules.

14 Logger Modules

All output of events and packets is done by Loggers.

14.1 alert_csv

What: output event in csv format

Type: `logger`

Configuration:

- bool **alert_csv.file** = false: output to alert_csv.txt instead of stdout
- multi **alert_csv.fields** = timestamp pkt_num proto pkt_gen dgm_len dir src_ap dst_ap rule action: selected fields will be output in given order left to right { action | dir | dgm_len | dst_addr | dst_ap | dst_port | eth_dst | eth_len | eth_src | eth_type | gid | icmp_code | icmp_id | icmp_seq | icmp_type | iface | ip_id | ip_len | msg | pkt_gen | pkt_num | proto | rev | rule | sid | src_addr | src_ap | src_port | tcp_ack | tcp_flags | tcp_len | tcp_seq | tcp_win | timestamp | tos | ttl | udp_len }
- int **alert_csv.limit** = 0: set limit (0 is unlimited) { 0: }
- string **alert_csv.separator** = , : separate fields with this character sequence
- enum **alert_csv.units** = B: bytes | KB | MB | GB { B | K | M | G }

14.2 alert_ex

What: output gid:sid:rev for alerts

Type: `logger`

Configuration:

- bool **alert_ex.upper** = false: true/false → convert to upper/lower case

14.3 alert_fast

What: output event with brief text format

Type: logger

Configuration:

- bool **alert_fast.file** = false: output to alert_fast.txt instead of stdout
- bool **alert_fast.packet** = false: output packet dump with alert
- int **alert_fast.limit** = 0: set limit (0 is unlimited) { 0: }
- enum **alert_fast.units** = B: bytes | KB | MB | GB { B | K | M | G }

14.4 alert_full

What: output event with full packet dump

Type: logger

Configuration:

- bool **alert_full.file** = false: output to alert_full.txt instead of stdout
- int **alert_full.limit** = 0: set limit (0 is unlimited) { 0: }
- enum **alert_full.units** = B: limit is in bytes | KB | MB | GB { B | K | M | G }

14.5 alert_sfsocket

What: output event over socket

Type: logger

Configuration:

- string **alert_sfsocket.file**: name of unix socket file
- int **alert_sfsocket.rules[].gid** = 1: rule generator ID { 1: }
- int **alert_sfsocket.rules[].sid** = 1: rule signature ID { 1: }

14.6 alert_syslog

What: output event to syslog

Type: logger

Configuration:

- enum **alert_syslog.facility** = auth: part of priority applied to each message { auth | authpriv | daemon | user | local0 | local1 | local2 | local3 | local4 | local5 | local6 | local7 }
 - enum **alert_syslog.level** = info: part of priority applied to each message { emerg | alert | crit | err | warning | notice | info | debug }
 - multi **alert_syslog.options**: used to open the syslog connection { cons | ndelay | perror | pid }
-

14.7 alert_unixsock

What: output event over unix socket

Type: logger

14.8 log_codecs

What: log protocols in packet by layer

Type: logger

Configuration:

- bool **log_codecs.file** = false: output to log_codecs.txt instead of stdout
- bool **log_codecs.msg** = false: include alert msg

14.9 log_hext

What: output payload suitable for daq hext

Type: logger

Configuration:

- bool **log_hext.file** = false: output to log_hext.txt instead of stdout
- bool **log_hext.raw** = false: output all full packets if true, else just TCP payload
- int **log_hext.limit** = 0: set limit (0 is unlimited) { 0: }
- enum **log_hext.units** = B: bytes | KB | MB | GB { B | K | M | G }
- int **log_hext.width** = 20: set line width (0 is unlimited) { 0: }

14.10 log_pcap

What: log packet in pcap format

Type: logger

Configuration:

- int **log_pcap.limit** = 0: set limit (0 is unlimited) { 0: }
- enum **log_pcap.units** = B: bytes | KB | MB | GB { B | K | M | G }

14.11 unified2

What: output event and packet in unified2 format file

Type: logger

Configuration:

- int **unified2.limit** = 0: set limit (0 is unlimited) { 0: }
 - enum **unified2.units** = B: limit multiplier { B | K | M | G }
 - bool **unified2.nostamp** = true: append file creation time to name (in Unix Epoch format)
 - bool **unified2.mpls_event_types** = false: include mpls labels in events
 - bool **unified2.vlan_event_types** = false: include vlan IDs in events
-

15 DAQ Modules

The Data Acquisition library (DAQ), provides pluggable packet I/O. The DAQ replaces direct calls to libraries like libpcap with an abstraction layer that facilitates operation on a variety of hardware and software interfaces without requiring changes to Snort. It is possible to select the DAQ type and mode when invoking Snort to perform pcap readback or inline operation, etc. The DAQ library may be useful for other packet processing applications and the modular nature allows you to build new modules for other platforms.

The DAQ library is provided as an external package on snort.org. There are a few additional modules provided with Snort 3. This section summarizes the important things you need to know to use these DAQ modules. There are also 3rd DAQ modules available.

15.1 Building the DAQ Library and DAQ Modules

The DAQ is bundled with Snort but must be built first using these steps:

```
./configure
make
sudo make install
```

This will build and install both static and dynamic DAQ modules.

Note that pcap >= 1.0.0 is required. pcap 1.1.1 is available at the time of this writing and is recommended.

Also, libdnet is required for IPQ and NFQ DAQs. If you get a relocation error trying to build those DAQs, you may need to reinstall libdnet and configure it with something like this:

```
./configure "CFLAGS=-fPIC -g -O2"
```

You may also experience problems trying to find the dynamic dnet library because it isn't always named properly. Try creating a link to the shared library (identified by its .x or .x.y etc. extension) with the same name but with ".so" inserted as follows:

```
$ ln -s libdnet.1.1 libdnet.so.1.1
$ ldconfig -Rv /usr/local/lib 2>&1 | grep dnet
Adding /usr/local/lib/libdnet.so.1.1
```

Alternatively, you should be able to fix both issues as follows:

```
libtoolize --copy --force
aclocal -I config
autoheader
autoconf
automake --foreign
```

When the DAQ library is built, both static and dynamic flavors will be generated. The various DAQ modules will be built if the requisite headers and libraries are available. You can disable individual modules, etc. with options to configure. For the complete list of configure options, run:

```
./configure --help
```

15.2 PCAP Module

pcap is the default DAQ. If snort is run w/o any DAQ arguments, it will operate as it always did using this module. These are equivalent:

```
./snort -i <device>
./snort -r <file>
```

```
./snort --daq pcap --daq-mode passive -i <device>
./snort --daq pcap --daq-mode read-file -r <file>
```

You can specify the buffer size pcap uses with:

```
./snort --daq pcap --daq-var buffer_size=<#bytes>
```

- The pcap DAQ does not count filtered packets. *

15.3 AF PACKET Module

afpacket functions similar to the pcap DAQ but with better performance:

```
./snort --daq afpacket -i <device>
      [--daq-var buffer_size_mb=<#MB>]
      [--daq-var debug]
```

If you want to run afpacket in inline mode, you must craft the device string as one or more interface pairs, where each member of a pair is separated by a single colon and each pair is separated by a double colon like this:

```
eth0:eth1
```

or this:

```
eth0:eth1::eth2:eth3
```

By default, the afpacket DAQ allocates 128MB for packet memory. You can change this with:

```
--daq-var buffer_size_mb=<#MB>
```

Note that the total allocated is actually higher, here's why. Assuming the default packet memory with a snaplen of 1518, the numbers break down like this:

- The frame size is 1518 (snaplen) + the size of the AFPacket header (66 bytes) = 1584 bytes.
- The number of frames is 128 MB / 1518 = 84733.
- The smallest block size that can fit at least one frame is 4 KB = 4096 bytes @ 2 frames per block.
- As a result, we need 84733 / 2 = 42366 blocks.
- Actual memory allocated is 42366 * 4 KB = 165.5 MB.

Note

Linux kernel version 2.6.31 or higher is required for the AFPacket DAQ module due to its dependency on both TPACKET v2 and PACKET_TX_RING support.

15.4 NFQ Module

NFQ is the new and improved way to process iptables packets:

```
./snort --daq nfq \
      [--daq-var device=<dev>] \
      [--daq-var proto=<proto>] \
      [--daq-var queue=<qid>]
```

```
<dev> ::= ip | eth0, etc; default is IP injection
<proto> ::= ip4 | ip6 |; default is ip4
<qid> ::= 0..65535; default is 0
```

This module can not run unprivileged so `./snort -u -g` will produce a warning and won't change user or group.

Notes on iptables are given below.

15.5 IPQ Module

IPQ is the old way to process iptables packets. It replaces the inline version available in pre-2.9 versions built with this:

```
./configure --enable-inline
```

Note that layer 2 resets are not supported with the IPQ DAQ:

```
config layer2resets[: <mac>]
```

Start the IPQ DAQ as follows:

```
./snort --daq ipq \
    [--daq-var device=<dev>] \
    [--daq-var proto=<proto>] \
```

```
<dev> ::= ip | eth0, etc; default is IP injection
<proto> ::= ip4 | ip6; default is ip4
```

This module can not run unprivileged so `./snort -u -g` will produce a warning and won't change user or group.

Notes on iptables are given below.

15.6 IPFW Module

IPFW is available for BSD systems. It replaces the inline version available in pre-2.9 versions built with this:

```
./configure --enable-ipfw
```

This command line argument is no longer supported:

```
./snort -J <port#>
```

Instead, start Snort like this:

```
./snort --daq ipfw [--daq-var port=<port>]
```

```
<port> ::= 1..65535; default is 8000
```

- IPFW only supports ip4 traffic.

Notes on FreeBSD and OpenBSD are given below.

15.7 Dump Module

The dump DAQ allows you to test the various inline mode features available in Snort like injection and normalization.

```
./snort -i <device> --daq dump
./snort -r <pcap> --daq dump
```

By default a file named inline-out.pcap will be created containing all packets that passed through or were generated by snort. You can optionally specify a different name.

```
./snort --daq dump --daq-var file=<name>
```

dump uses the pcap daq for packet acquisition. It therefore does not count filtered packets (a pcap limitation).

Note that the dump DAQ inline mode is not an actual inline mode. Furthermore, you will probably want to have the pcap DAQ acquire in another mode like this:

```
./snort -r <pcap> -Q --daq dump --daq-var load-mode=read-file
./snort -i <device> -Q --daq dump --daq-var load-mode=passive
```

15.8 Netmap Module

The netmap project is a framework for very high speed packet I/O. It is available on both FreeBSD and Linux with varying amounts of preparatory setup required. Specific notes for each follow.

```
./snort --daq netmap -i <device>
    [--daq-var debug]
```

If you want to run netmap in inline mode, you must craft the device string as one or more interface pairs, where each member of a pair is separated by a single colon and each pair is separated by a double colon like this:

```
em1:em2
```

or this:

```
em1:em2::em3:em4
```

Inline operation performs Layer 2 forwarding with no MAC filtering, akin to the AFPacket module's behavior. All packets received on one interface in an inline pair will be forwarded out the other interface unless dropped by the reader and vice versa.



Important

The interfaces will need to be up and in promiscuous mode in order to function (*ifconfig em1 up promisc*). The DAQ module does not currently do either of these configuration steps for itself.

15.8.1 FreeBSD

In FreeBSD 10.0, netmap has been integrated into the core OS. In order to use it, you must recompile your kernel with the line

```
device netmap
```

added to your kernel config.

15.8.2 Linux

You will need to download the netmap source code from the project's repository:

<https://code.google.com/p/netmap/>

Follow the instructions on the project's homepage for compiling and installing the code:

<http://info.iet.unipi.it/~luigi/netmap/>

It will involve a standalone kernel module (netmap_lin) as well as patching and rebuilding the kernel module used to drive your network adapters. The following drivers are supported under Linux at the time of writing (June 2014):

```
e1000
e1000e
forcedeth
igb
ixgbe
r8169
virtio
```

TODO:

- Support for attaching to only a single ring (queue) on a network adapter.
- Support for VALE and netmap pipes.

15.9 Notes on iptables

These notes are just a quick reminder that you need to set up iptables to use the IPQ or NFQ DAQs. Doing so may cause problems with your network so tread carefully. The examples below are intentionally incomplete so please read the related documentation first.

Here is a blog post by Marty for historical reference:

<http://archives.neohapsis.com/archives/snort/2000-11/0394.html>

You can check this out for queue sizing tips:

[http://www.inliniac.net/blog/2008/01/23/improving-snort_inlines-nfq-performance.](http://www.inliniac.net/blog/2008/01/23/improving-snort_inlines-nfq-performance.html) ↩
html

You might find useful IPQ info here:

<http://snort-inline.sourceforge.net/>

Use this to examine your iptables:

```
sudo /sbin/iptables -L
```

Use something like this to set up NFQ:

```
sudo /sbin/iptables
  -I <table> [<protocol stuff>] [<state stuff>]
  -j NFQUEUE --queue-num 1
```

Use something like this to set up IPQ:

```
sudo iptables -I FORWARD -j QUEUE
```

Use something like this to "disconnect" snort:

```
sudo /sbin/iptables -D <table> <rule pos>
```

Be sure to start Snort prior to routing packets through NFQ with iptables. Such packets will be dropped until Snort is started.

The queue-num is the number you must give Snort.

If you are running on a system with both NFQ and IPQ support, you may experience some start-up failures of the sort:

The solution seems to be to remove both modules from the kernel like this:

```
modprobe -r nfnetlink_queue
modprobe -r ip_queue
```

and then install the module you want:

```
modprobe ip_queue
```

or:

```
modprobe nfnetlink_queue
```

These DAQs should be run with a snaplen of 65535 since the kernel defrags the packets before queuing. Also, no need to configure frag3.

15.10 Notes on FreeBSD::IPFW

Check the online manual at:

<http://www.freebsd.org/doc/handbook/firewalls-ipfw.html>.

Here is a brief example to divert icmp packets to Snort at port 8000:

To enable support for divert sockets, place the following lines in the kernel configuration file:

```
options IPFIREWALL
options IPDIVERT
```

(The file in this case was: /usr/src/sys/i386/conf/GENERIC; which is platform dependent.)

You may need to also set these to use the loadable kernel modules:

```
/etc/rc.conf:
firewall_enable="YES"
```

```
/boot/loader.conf:
ipfw_load="YES"
ipdivert_load="YES"
```

```
$ dmesg | grep ipfw
ipfw2 (+ipv6) initialized, divert loadable, nat loadable, rule-based
forwarding disabled, default to deny, logging disabled
```

```
$ kldload -v ipdivert
Loaded ipdivert, id=4
```

```
$ ipfw add 75 divert 8000 icmp from any to any
00075 divert 8000 icmp from any to any
```

```
$ ipfw list
...
00075 divert 8000 icmp from any to any
00080 allow icmp from any to any
...
```

- Note that on FreeBSD, divert sockets don't work with bridges!

Please refer to the following articles for more information:

- <https://forums.snort.org/forums/support/topics/snort-inline-on-freebsd-ipfw>
- http://freebsd.rogness.net/snort_inline/

NAT gateway can be used with divert sockets if the network environment is conducive to using NAT.

The steps to set up NAT with ipfw are as follows:

1. Set up NAT with two interface em0 and em1 by adding the following to /etc/rc.conf. Here em0 is connected to external network and em1 to host-only LAN.

```
gateway_enable="YES"
natd_program="/sbin/natd"    # path to natd
natd_enable="YES"           # Enable natd (if firewall_enable == YES)
natd_interface="em0"        # Public interface or IP Address
natd_flags="-dynamic"       # Additional flags
defaultrouter=""
ifconfig_em0="DHCP"
ifconfig_em1="inet 192.168.1.2 netmask 255.255.255.0"
firewall_enable="YES"
firewall_script="/etc/rc.firewall"
firewall_type="simple"
```

2. Add the following divert rules to divert packets to Snort above and below the NAT rule in the "Simple" section of /etc/rc.firewall.

```
...
# Inspect outbound packets (those arriving on "inside" interface)
# before NAT translation.
${fwcmd} add divert 8000 all from any to any in via ${iif}
case ${natd_enable} in
[Yy][Ee][Ss])
    if [ -n "${natd_interface}" ]; then
        ${fwcmd} add divert natd all from any to any via ${natd_interface}
    fi
    ;;
esac
...
# Inspect inbound packets (those arriving on "outside" interface)
# after NAT translation that aren't blocked for other reasons,
# after the TCP "established" rule.
${fwcmd} add divert 8000 all from any to any in via ${oif}
```

15.11 Notes on OpenBSD::IPFW

OpenBSD supports divert sockets as of 4.7, so we use the ipfw DAQ.

Here is one way to set things up:

1. Configure the system to forward packets:

```
$ sysctl net.inet.ip.forwarding=1
$ sysctl net.inet6.ip6.forwarding=1
```

(You can also put that in `/etc/sysctl.conf` to enable on boot.)

2. Set up interfaces

```
$ dhclient vic1
$ dhclient vic2
```

3. Set up packet filter rules:

```
$ echo "pass out on vic1 divert-packet port 9000 keep-state" > rules.txt
$ echo "pass out on vic2 divert-packet port 9000 keep-state" >> rules.txt

$ pfctl -v -f rules.txt
```

4. Analyze packets diverted to port 9000:

```
$ ./snort --daq ipfw --daq-var port=9000
```

- Note that on OpenBSD, divert sockets don't work with bridges!

15.12 Socket Module

The socket module provides provides a stream socket server that will accept up to 2 simultaneous connections and bridge them together while also passing data to Snort for inspection. The first connection accepted is considered the client and the second connection accepted is considered the server. If there is only one connection, stream data can't be forwarded but it is still inspected.

Each read from a socket of up to `snaplen` bytes is passed as a packet to Snort along with a `DAQ_SktHdr_t` pointer in `DAQ_PktHdr_t`→`priv`. `DAQ_SktHdr_t` conveys IP4 address, ports, protocol, and direction. Socket packets can be configured to be TCP or UDP. The socket DAQ can be operated in inline mode and is able to block packets.

The socket DAQ uses `DLT_SOCKET` and requires that Snort load the socket codec which is included in the extra package.

To use the socket DAQ, start Snort like this:

```
./snort --plugin-path /path/to/lib/snort_extra \
  --daq socket [--daq-var port=<port>] [--daq-var proto=<proto>] [-Q]
```

<port> ::= 1..65535; default is 8000

<proto> ::= tcp | udp

- This module only supports ip4 traffic.
 - This module is only supported by Snort 3. It is not compatible with Snort 2.
 - This module is primarily for development and test.
-

15.13 File Module

The file module provides the ability to process files directly w/o having to extract them from pcaps. Use the file module with Snort's stream_file to get file type identification and signature services. The usual IPS detection and logging etc. is available too.

You can process all the files in a directory recursively using 8 threads with these Snort options:

```
--pcap-dir path -z 8
```

- This module is only supported by Snort 3. It is not compatible with Snort 2.
- This module is primarily for development and test.

15.14 Hext Module

The hext module generates packets suitable for processing by Snort from hex/plain text. Raw packets include full headers and are processed normally. Otherwise the packets contain only payload and are accompanied with flow information (4-tuple) suitable for processing by stream_user.

The first character of the line determines it's purpose:

```
'$' command  
'#' comment  
'"' quoted string packet data  
'x' hex packet data  
' ' empty line separates packets
```

The available commands are:

```
$client <ip4> <port>  
$server <ip4> <port>
```

```
$packet -> client  
$packet -> server
```

```
$packet <addr> <port> -> <addr> <port>
```

Client and server are determined as follows. \$packet → client indicates to the client (from server) and \$packet → server indicates a packet to the server (from client). \$packet followed by a 4-tuple uses the heuristic that the client is the side with the lower port number.

The default client and server are 192.168.1.1 12345 and 10.1.2.3 80 respectively. \$packet commands with a 4-tuple do not change client and server set with the other \$packet commands.

\$packet commands should be followed by packet data, which may contain any combination of hex and strings. Data for a packet ends with the next command or a blank line. Data after a blank line will start another packet with the same tuple as the prior one.

Strings may contain the following escape sequences:

```
\r = 0x0D = carriage return  
\n = 0x0A = new line  
\t = 0x09 = tab  
\ = 0x5C = \
```

Format your input carefully; there is minimal error checking and little tolerance for arbitrary whitespace. You can use Snort's -L hext option to generate hext input from a pcap.

- This module only supports ip4 traffic.

- This module is only supported by Snort 3. It is not compatible with Snort 2.
- This module is primarily for development and test.

The hex DAQ also supports a raw mode which is activated by setting the data link type. For example, you can input full ethernet packets with `--daq-var dlt=1` (Data link types are defined in the DAQ include `sfbpf_dlt.h`.) Combine that with the hex logger in raw mode for a quick (and dirty) way to edit pcaps. With `--lua "log_hext = { raw = true }"`, the hex logger will dump the full packet in a way that can be read by the hex DAQ in raw mode. Here is an example:

```
# 3 [96]

x02 09 08 07 06 05 02 01 02 03 04 05 08 00 45 00 00 52 00 03 # .....E..R ↵
..
x00 00 40 06 5C 90 0A 01 02 03 0A 09 08 07 BD EC 00 50 00 00 # ..@.\.....P ↵
..
x00 02 00 00 00 02 50 10 20 00 8A E1 00 00 47 45 54 20 2F 74 # .....P. ....GET ↵
/t
x72 69 67 67 65 72 2F 31 20 48 54 54 50 2F 31 2E 31 0D 0A 48 # rigger/1 HTTP ↵
/1.1..H
x6F 73 74 3A 20 6C 6F 63 61 6C 68 6F 73 74 0D 0A # ost: localhost..
```

A comment indicating packet number and size precedes each packet dump. Note that the commands are not applicable in raw mode and have no effect.

16 Snort 3 vs Snort 2

Snort 3 differs from Snort 2 in the following ways:

- command line and conf file syntax made more uniform
- removed unused and deprecated features
- remove as many barriers to successful run as possible (e.g.: no upper bounds on memcaps)
- assume the simplest mode of operation (e.g.: never assume input from or output to some hardcoded filename)
- all Snort 2 config options are grouped into Snort 3 modules

16.1 Build Options

- configure `--with-lib{pcap,pcre}-*` → `--with-{pcap,pcre}-*`
- control socket, `cs_dir`, and users were deleted
- `POLICY_BY_ID_ONLY` code was deleted
- hardened `--enable-inline-init-failopen` / `INLINE_FAILOPEN`

16.2 Command Line

- `--pause` loads config and waits for resume before processing packets
- `--require-rule-sid` is hardened
- `--shell` enables interactive Lua shell
- `-T` is assumed if no input given

- added --help-config prefix to dump all matching settings
- added --script-path
- added -L noneldumplpcap
- added -z <#> and --max-packet-threads <#>
- delete --enable-mpls-multicast, --enable-mpls-overlapping-ip, --max-mpls-labelchain-len, --mpls-payload-type
- deleted --pid-path and --no-interface-pidfile
- deleting command line options which will be available with --lua or some such including: -I, -h, -F, -p, --disable-inline-init-failopen
- hardened -n < 0
- removed --search-method
- replaced "unknown args are bpf" with --bpf
- replaced --dynamic-*-lib[-dir] with --plugin-path (with : separators)
- removed -b, -N, -Z and, --perfmon-file options

16.3 Conf File

- Snort 3 has a default unicode.map
 - Snort 3 will not enforce an upper bound on memcaps and the like within 64 bits
 - Snort 3 will supply a default *_global config if not specified (Snort 2 would fatal; e.g. http_inspect_server w/o http_inspect_global)
 - address list syntax changes: [[and]] must be [[and]] to avoid Lua string parsing errors (unless in quoted string)
 - because the Lua conf is live code, we lose file:line locations in app error messages (syntax errors from Lua have file:line)
 - changed search-method names for consistency
 - delete config include_vlan_in_alerts (not used in code)
 - delete config so_rule_memcap (not used in code)
 - deleted --disable-attribute-table-reload-thread
 - deleted config decode_*_{alerts,drops} (use rules only)
 - deleted config dump-dynamic-rules-path
 - deleted config ipv6_frag (not actually used)
 - deleted config threshold and ips rule threshold (→ event_filter)
 - eliminated ac-split; must use ac-full-q split-any-any
 - frag3 → defrag, arpspoof → arp_spoof, sfportscan → port_scan, perfmonitor → perf_monitor, bo → back_orifice
 - limits like "1234K" are now "limit = 1234, units = K"
 - lua field names are (lower) case sensitive; snort.conf largely wasn't
 - module filenames are not configurable: always <log-dir>/<module-name><suffix> (suffix is determined by module)
 - no positional parameters; all name = value
 - perf_monitor configuration was simplified
-

- portscan.detect_ack_scans deleted (exact same as include_midstream)
- removed various run modes - now just one
- frag3 default policy is Linux not bsd
- lowmem* search methods are now in snort_examples
- deleted unused http_inspect stateful mode
- deleted stateless inspection from ftp and telnet
- deleted http and ftp alert options (now strictly rule based)
- preprocessor disabled settings deleted since no longer relevant
- sessions are always created; snort config stateful checks eliminated
- stream5_tcp: prune_log_max deleted; to be replaced with histogram
- stream5_tcp: max_active_responses, min_response_seconds moved to active.max_responses, min_interval

16.4 Rules

- all rules must have a sid
 - deleted activate / dynamic rules
 - deleted metadata engine shared
 - deleted metadata: rule-flushing (with PDU flushing rule flushing can cause missed attacks, the opposite of its intent)
 - deleted unused rule_state.action
 - fastpattern_offset, fast_pattern_length
 - no ; separated content suboptions
 - offset, depth, distance, and within must use a space separator not colon (e.g. offset:5; becomes offset 5;)
 - rule option sequence: <stub> soid <hidden>
 - sid == 0 not allowed
 - soid is now a non-metadata option
 - content suboptions http_* are now full options and should be place before content
 - the following pcre options have been deleted: use sticky buffers instead B, U, P, H, M, C, I, D, K, S, Y
 - deleted uricontent ips rule option. uricontent:"foo" -> http_uri; content:"foo"
 - deleted urilen raw and norm; must use http_raw_uri and http_uri instead
 - deleted unused http_encode option
 - urilen replaced with generic bufferlen which applies to current sticky buffer
 - added optional selector to http_header, e.g. http_header:User-Agent;
 - multiline rules w/o \n
 - #begin ... #end comments
-

16.5 Output

- alert_fast includes packet data by default
- all text mode outputs default to stdout
- changed default logging mode to -L none
- deleted layer2resets and flexresp2_*
- deleted log_ascii
- general output guideline: don't print zero counts
- Snort 3 queues decoder and inspector events to the main event queue before ips policy is selected; since some events may not be enabled, the queue needs to be sized larger than with Snort 2 which used an intermediate queue for decoder events.
- deleted the intermediate http and ftp_telnet event queues
- alert_unified2 and log_unified2 have been deleted

16.6 HTTP Profiles

This section describes the changes to the Http Inspect config option "profile".

Snort 2 allows users to select pre-defined HTTP server profiles using the config option "profile". The user can choose one of five predefined profiles. When defined, this option will set defaults for other config options within Http Inspect.

With Snort 3, the user has the flexibility of defining and fine tuning custom profiles along with the five predefined profiles.

Snort 2 conf

```
preprocessor http_inspect_server: server default \  
    profile apache ports { 80 3128 } max_headers 200
```

Snort 3 conf

```
http_inspect = { profile = http_profile_apache }  
http_inspect.profile.max_headers = 200  
  
binder =  
{  
    {  
        when = { proto = 'tcp', ports = '80 3128', },  
        use = { type = 'http_inspect' },  
    },  
}
```

Note

The "profile" option now points to a table "http_profile_apache" which is defined in "snort_defaults.lua" (as follows).

```
http_profile_apache =  
{  
    profile_type = 'apache',  
    server_flow_depth = 300,  
    client_flow_depth = 300,  
    post_depth = -1,  
    chunk_length = 500000,  
}
```

```
    ascii = true,  
    multi_slash = true,  
    directory = true,  
    webroot = true,  
    utf_8 = true,  
    apache_whitespace = true,  
    non_strict = true,  
    normalize_utf = true,  
    normalize_javascript = false,  
    max_header_length = 0,  
    max_headers = 0,  
    max_spaces = 200,  
    max_javascript_whitespace = 200,  
    whitespace_chars = '0x9 0xb 0xc 0xd'  
}
```

Note

The config option "max_headers" is set to 0 in the profile, but overwritten by "http_inspect.profile.max_headers = 200".

Conversion

snort2lua can convert the existing snort.conf with the "profile" option to Snort 3 compatible "profile". Please refer to the snort2Lua post for more details.

Examples

```
"profile all" ==> "profile = http_profile_default"  
"profile apache" ==> "profile = http_profile_apache"  
"profile iis" ==> "profile = http_profile_iis"  
"profile iis_40" ==> "profile = http_profile_iis_40"  
"profile iis_50" ==> "profile = http_profile_iis_50"
```

Defining custom profiles

The complete set of Http Inspect config options that a custom profile can configure can be found by running the following command:

```
snort --help-config http_inspect | grep http_inspect.profile
```

16.7 SDF Preprocessor

The Snort 2.X SDF Preprocessor is gone, replaced by ips option `sd_pattern`. The `sd_pattern` rule option is synonymous with the `sd_pattern` option used for gid:138 rules, but has a different syntax. A major difference in syntax is the use of Hyperscan pattern matching library which provides a regex language similar to PCRE.

To facilitate continued performance, `sd_pattern` rule option is implemented with Hyperscan pattern matching library. The rule option is now also utilized as a "fast pattern" in the Snort engine which provides a significant performance improvement over the separate detection step of earlier implementations.

The preprocessor alert SDF_COMBO_ALERT (139:1) has been removed and has no replacement in Snort 3.X. This is because the rule offered no additional value over gid:138 rules and was difficult to interpret the result of.

For more information, See Features > Sensitive Data Filtering for details.

17 Snort2Lua

One of the major differences between Snort 2 and Snort 3 is the configuration. Snort 2 configuration files are written in Snort-specific syntax while Snort 3 configuration files are written in Lua. Snort2Lua is a program specifically designed to convert Snort 2 configuration files into Lua files that Snort 3 can understand.

Snort2Lua reads your legacy Snort conf file(s) and generates Snort 3 Lua and rules files. When running this program, the only mandatory option is to provide Snort2Lua with a Snort 2 configuration file. The default output file is `snort.lua`, the default error file will be `snort.rej`, and the default rule file is the output file (default is `snort.lua`). When Snort2Lua finishes running, the resulting configuration file can be successfully run as the Snort3.0 configuration file. The sole exception to this rule is when Snort2Lua cannot find an included file. If that occurs, the file will still be included in the output file and you will need to manually adjust or comment the file name. Additionally, if the exit code is not zero, some of the information may not be successfully converted. Check the error file for all of the conversion problems.

Those errors can occur for a multitude of reasons and are not necessarily bad. For instance, Snort2Lua will only convert preprocessors that are currently supported. Therefore, any unsupported preprocessors or configuration options including DCERP, SIP, and SMTP, will cause an error in Snort2Lua since Snort 3 does not support those preprocessors. Additionally, any rule options associated with those preprocessors are also not supported. Finally, Snort2Lua expects a valid Snort 2 configuration. Therefore, if the configuration is invalid or has questionable syntax, Snort2Lua may fail to parse the configuration file or create an invalid Snort 3 configuration file.

There are also a few peculiarities of Snort2Lua that may be confusing to a first time user. Specifically, aside from an initial configuration file (which is specified from the command line or as the file in 'config binding'), every file that is included into Snort 3 must be either a Lua file or a rule file; the file cannot contain both rules and Lua syntax. Therefore, when parsing a file specified with the 'include' command, Snort2Lua will output both a Lua file and a rule file. Additionally, any line that is a comment in a configuration file will be added in to a comments section at the bottom of the main configuration file. Finally, rules that contain unsupported options will be converted to the best of Snort2Lua's capability and then printed as a comment in the rule file.

17.1 Snort2Lua Command Line

By default, Snort2Lua will attempt to parse every 'include' file and every 'binding' file. There is an option to change this functionality.

When specifying a rule file with one of the command line options, Snort2Lua will output all of the converted rules to that specified rule file. This is especially useful when you are only interesting in converting rules since there is no Lua syntax in rule files. There is also an option that tells Snort2Lua to output every rule for a given configuration into a single rule file. Similarly, there is an option to pull all of the Lua syntax from every 'include' file into the output file.

There are currently three output modes: default, quiet, and differences. As expected, quiet mode produces a Snort configuration. All errors (aside from Fatal Snort2Lua errors), differences, and comments will be omitted from the final output file. Default mode will print everything. That means you will be able to see exactly what changes have occurred between Snort 2 and Snort 3 in addition to the new syntax, the original file's comments, and all errors that have occurred. Finally, differences mode will not actually output a valid Snort 3 configuration. Instead, you can see the exact options from the input configuration that have changed.

17.1.1 Usage: `snort2lua [OPTIONS]... -c <snort_conf> ...`

Converts the Snort configuration file specified by the `-c` or `--conf-file` options into a Snort++ configuration file

Options:

- `-?` show usage
 - `-h` this overview of snort2lua
 - `-a` default option. print all data
-

- **-c <snort_conf>** The Snort <snort_conf> file to convert
- **-d** print the differences, and only the differences, between the Snort and Snort++ configurations to the <out_file>
- **-e <error_file>** output all errors to <error_file>
- **-i** if <snort_conf> file contains any <include_file> or <policy_file> (i.e. *include path/to/conf/other_conf*), do NOT parse those files
- **-m** add a remark to the end of every converted rule
- **-o <out_file>** output the new Snort++ lua configuration to <out_file>
- **-q** quiet mode. Only output valid configuration information to the <out_file>
- **-r <rule_file>** output any converted rule to <rule_file>
- **-s** when parsing <include_file>, write <include_file>'s rules to <rule_file>. Meaningless if *-i* provided
- **-t** when parsing <include_file>, write <include_file>'s information, excluding rules, to <out_file>. Meaningless if *-i* provided
- **-V** Print the current Snort2Lua version
- **--conf-file** Same as *-c*. A Snort <snort_conf> file which will be converted
- **--dont-parse-includes** Same as *-p*. if <snort_conf> file contains any <include_file> or <policy_file> (i.e. *include path/to/conf/other_conf*), do NOT parse those files
- **--error-file=<error_file>** Same as *-e*. output all errors to <error_file>
- **--help** Same as *-h*. this overview of snort2lua
- **--markup** print help in asciidoc compatible format
- **--ohi** Use Old Http Inspect format
- **--output-file=<out_file>** Same as *-o*. output the new Snort++ lua configuration to <out_file>
- **--print-all** Same as *-a*. default option. print all data
- **--print-differences** Same as *-d*. output the differences, and only the differences, between the Snort and Snort++ configurations to the <out_file>
- **--quiet** Same as *-q*. quiet mode. Only output valid configuration information to the <out_file>
- **--remark** same as *-m*. add a remark to the end of every converted rule
- **--rule-file=<rule_file>** Same as *-r*. output any converted rule to <rule_file>
- **--single-conf-file** Same as *-t*. when parsing <include_file>, write <include_file>'s information, excluding rules, to <out_file>
- **--single-rule-file** Same as *-s*. when parsing <include_file>, write <include_file>'s rules to <rule_file>.
- **--version** Same as *-V*. Print the current Snort2Lua version

Required option:

- A Snort configuration file to convert. Set with either *-c* or *--conf-file*

Default values:

- <out_file> = snort.lua
- <rule_file> = <out_file> = snort.lua. Rules are written to the *local_rules* variable in the <out_file>
- <error_file> = snort.rej. This file will not be created in quiet mode.

17.2 Known Problems

- Any Snort 2 ‘string’ which is dependent on a variable will no longer have that variable in the Lua string.
- Snort2Lua currently does not handle variables well. First, that means variables will not always be parsed correctly. Second, sometimes a variables value will be outoput in the lua file rather than a variable. For instance, if Snort2Lua attempted to convert the line `include $RULE_PATH/example.rule`, the output may ouput `include /etc/rules/example.rule` instead.
- When Snort2Lua parses a ‘binding’ configuration file, the rules and configuration will automatically be combined into the same file. Also, the new files name will automatically become the old file’s name with a .lua extension. There is currently no way to specify or change that files name.
- If a rule’s action is a custom ruletype, that rule action will be silently converted to the ruletype’s *type*. No warnings or errors are currently emmitted. Additionally, the custom ruletypes outputs will be silently discarded.
- If the original configuration contains a binding that points to another file and the binding file contains an error, Snort2Lua will output the number of rejects for the binding file in addition to the number of rejects in the main file. The two numbers will eventually be combined into one output.

17.3 Usage

Snort2Lua is included in the Snort 3 distribution. The Snort2Lua source code is located in the tools/snort2lua directory. The program is automatically built and installed.

Translating your configuration

To run Snort2Lua, the only requirement is a file containing Snort 2 syntax. Assuming your configuration file is named `snort.conf`, run the command

```
snort2lua -c snort.conf
```

Snort2Lua will output a file named `snort.lua`. Assuming your `snort.conf` file is a valid Snort 2 configuration file, then the resulting `snort.lua` file will always be a valid Snort 3 configuration file; any errors that occur are because Snort 3 currently does not support all of the Snort 2 options.

Every keyword from the Snort configuration can be found in the output file. If the option or keyword has changed, then a comment containing both the option or keyword’s old name and new name will be present in the output file.

Translating a rule file

Snort2Lua can also accommodate translating individual rule files. Assuming the Snort 2 rule file is named `snort.rules` and you want the new rule file to be name `updated.rules`, run the command

```
snort2lua -c snort.rules -r updated.rules
```

Snort2Lua will output a file named `updated.rules`. That file, `updated.rules`, will always be a valid Snort 3 rule file. Any rule that contains unsupported options will be a comment in the output file.

Understanding the Output

Although Snort2Lua outputs very little to the console, there are several things that occur when Snort2Lua runs. This is a list of Snort2Lua outputs.

The console. Every line that Snort2Lua is unable to translate from the Snort 2.X format to the Snort 3 format is considered an error. Upon exiting, Snort2Lua will print the number of errors that occurred. Snort2Lua will also print the name of the error file.

The output file. As previously mentioned, Snort2Lua will create a Lua file with valid Snort 3 syntax. The default Lua file is named `snort.lua`. This file is the equivalent of your main Snort 2 configuration file.

The rule file. By default, all rules will be printed to the Lua file. However, if a rule file is specified on the command line, any rules found in the Snort 2 configuration will be written to the rule file instead

The error file. By default, the error file is `snort.rej`. It will only be created if errors exist. Every error referenced on the command line can be found in this file. There are two reasons an error can occur.

- The Snort 2 configuration file has invalid syntax. If Snort 2 cannot parse the configuration file, neither can Snort2Lua. In the example below, Snort2Lua could not convert the line *config bad_option*. Since that is not valid Snort 2 syntax, this is a syntax error.
- The Snort 2 configuration file contains preprocessors and rule options that are not supported in Snort 3. If Snort 2 can parse a line that Snort2Lua cannot parse, than Snort 3 does not support something in the line. As Snort 3 begins supporting these preprocessors and rule options, Snort2Lua will also begin translating these lines. One example of such an error is dcerpc2.

Additional .lua and .rules files. Every time Snort2Lua parses the include or binding keyword, the program will attempt to parse the file referenced by the keyword. Snort2Lua will then create one or two new files. The new files will have a .lua or .rules extension appended to the original filename.

18 Extending Snort

18.1 Plugins

Plugins have an associated API defined for each type, all of which share a common *header*, called the BaseApi. A dynamic library makes its plugins available by exporting the `snort_plugins` symbol, which is a null terminated array of BaseApi pointers.

The BaseApi includes type, name, API version, plugin version, and function pointers for constructing and destructing a Module. The specific API add various other data and functions for their given roles.

18.2 Modules

If we are defining a new Inspector called, say, gadget, it might be configured in `snort.lua` like this:

```
gadget =
{
    brain = true,
    claw = 3
}
```

When the gadget table is processed, Snort will look for a module called gadget. If that Module has an associated API, it will be used to configure a new instance of the plugin. In this case, a GadgetModule would be instantiated, brain and claw would be set, and the Module instance would be passed to the GadgetInspector constructor.

Module has three key virtual methods:

- **begin()** - called when Snort starts processing the associated Lua table. This is a good place to allocate any required data and set defaults.
- **set()** - called to set each parameter after validation.
- **end()** - called when Snort finishes processing the associated Lua table. This is where additional integrity checks of related parameters should be done.

The configured Module is passed to the plugin constructor which pulls the configuration data from the Module. For non-trivial configurations, the working paradigm is that Module hands a pointer to the configured data to the plugin instance which takes ownership.

Note that there is at most one instance of a given Module, even if multiple plugin instances are created which use that Module. (Multiple instances require Snort binding configuration.)

18.3 Inspectors

There are several types of inspector, which determines which inspectors are executed when:

- IT_BINDER - determines which inspectors apply to given flows
- IT_WIZARD - determines which service inspector to use if none explicitly bound
- IT_PACKET - used to process all packets before session and service processing (e.g. normalize)
- IT_NETWORK - processes packets w/o service (e.g. arp_spoof, back_orifice)
- IT_STREAM - for flow tracking, ip defrag, and tcp reassembly
- IT_SERVICE - for http, ftp, telnet, etc.
- IT_PROBE - process all packets after all the above (e.g. perf_monitor, port_scan)

18.4 Codecs

The Snort Codecs decipher raw packets. These Codecs are now completely pluggable; almost every Snort Codec can be built dynamically and replaced with an alternative, customized Codec. The pluggable nature has also made it easier to build new Codecs for protocols without having to touch the Snort code base.

The first step in creating a Codec is defining its class and protocol. Every Codec must inherit from the Snort Codec class defined in "framework/codec.h". The following is an example Codec named "example" and has an associated struct that is 14 bytes long.

```
#include <cstdint>
#include <arpa/inet.h>
#include "framework/codec.h"
#include "main/snort_types.h"

#define EX_NAME "example"
#define EX_HELP "example codec help string"

struct Example
{
    uint8_t dst[6];
    uint8_t src[6];
    uint16_t ethertype;

    static inline uint8_t size()
    { return 14; }
}

class ExCodec : public Codec
{
public:
    ExCodec() : Codec(EX_NAME) { }
    ~ExCodec() { }

    bool decode(const RawData&, CodecData&, DecodeData&) override;
    void get_protocol_ids(std::vector<uint16_t>&) override;
};
```

After defining `ExCodec`, the next step is adding the Codec's decode functionality. The function below does this by implementing a valid decode function. The first parameter, which is the `RawData` struct, provides both a pointer to the raw data that has come from a wire and the length of that raw data. The function takes this information and validates that there are enough bytes for this protocol. If the raw data's length is less than 14 bytes, the function returns false and Snort discards the packet; the packet is neither inspected nor processed. If the length is greater than 14 bytes, the function populates two fields in the `CodecData` struct, `next_prot_id` and `lyr_len`. The `lyr_len` field tells Snort the number of bytes that this layer contains. The `next_prot_id` field provides Snort the value of the next `EtherType` or IP protocol number.

```
bool ExCodec::decode(const RawData& raw, CodecData& codec, DecodeData&)
{
    if ( raw.len < Example::size() )
        return false;

    const Example* const ex = reinterpret_cast<const Example*>(raw.data);
    codec.next_prot_id = ntohs(ex->ethertype);
    codec.lyr_len = ex->size();
    return true;
}
```

For instance, assume this decode function receives the following raw data with a validated length of 32 bytes:

```
00 11 22 33 44 55 66 77      88 99 aa bb 08 00 45 00
00 38 00 01 00 00 40 06      5c ac 0a 01 02 03 0a 09
```

The `Example` struct's `EtherType` field is the 13 and 14 bytes. Therefore, this function tells Snort that the next protocol has an `EtherType` of 0x0800. Additionally, since the `lyr_len` is set to 14, Snort knows that the next protocol begins 14 bytes after the beginning of this protocol. The Codec with `EtherType` 0x0800, which happens to be the IPv4 Codec, will receive the following data with a validated length of 18 (== 32 - 14):

```
45 00 00 38 00 01 00 00      40 06 5c ac 0a 01 02 03
0a 09
```

How does Snort know that the IPv4 Codec has an `EtherType` of 0x0800? The Codec class has a second virtual function named `get_protocol_ids()`. When implementing the function, a Codec can register for any number of values between 0x0000 - 0xFFFF. Then, if the `next_proto_id` is set to a value for which this Codec has registered, this Codec's decode function will be called. As a general note, the protocol ids between [0, 0x00FF] are IP protocol numbers, [0x0100, 0x05FF] are custom types, and [0x0600, 0xFFFF] are `EtherTypes`.

For example, in the `get_protocol_ids` function below, the `ExCodec` registers for the protocols numbers 17, 787, and 2054. 17 happens to be the protocol number for UDP while 2054 is ARP's `EtherType`. Therefore, this Codec will now attempt to decode UDP and ARP data. Additionally, if any Codec sets the `next_protocol_id` to 787, `ExCodec`'s decode function will be called. Some custom protocols are already defined in the file "protocols/protocol_ids.h"

```
void ExCodec::get_protocol_ids(std::vector<uint16_t>&v)
{
    v.push_back(0x0011); // == 17 == UDP
    v.push_back(0x1313); // == 787 == custom
    v.push_back(0x0806); // == 2054 == ARP
}
```

To register a Codec for Data Link Type's rather than protocols, the function `get_data_link_type()` can be similarly implemented.

The final step to creating a pluggable Codec is the `snort_plugins` array. This array is important because when Snort loads a dynamic library, the program only find plugins that are inside the `snort_plugins` array. In other words, if a plugin has not been added to the `snort_plugins` array, that plugin will not be loaded into Snort.

Although the details will not be covered in this post, the following code snippet is a basic `CodecApi` that Snort can load. This snippet can be copied and used with only three minor changes. First, in the function ctor, `ExCodec` should be replaced with the name of the Codec that is being built. Second, `EX_NAME` must match the Codec's name or Snort will be unable to load this Codec. Third, `EX_HELP` should be replaced with the general description of this Codec. Once this code snippet has been added, `ExCodec` is ready to be compiled and plugged into Snort.

```

static Codec* ctor(Module*)
{ return new ExCodec; }

static void dtor(Codec *cd)
{ delete cd; }

static const CodecApi ex_api =
{
    {
        PT_CODEC,
        EX_NAME,
        EX_HELP,
        CDAPI_PLUGIN_V0,
        0,
        nullptr,
        nullptr,
    },
    nullptr, // pointer to a function called during Snort's startup.
    nullptr, // pointer to a function called during Snort's exit.
    nullptr, // pointer to a function called during thread's startup.
    nullptr, // pointer to a function called during thread's destruction.
    ctor, // pointer to the codec constructor.
    dtor, // pointer to the codec destructor.
};

SO_PUBLIC const BaseApi* snort_plugins[] =
{
    &ex_api.base,
    nullptr
};

```

Two example Codecs are available in the extra directory on git and the extra tarball on the Snort page. One of those examples is the Token Ring Codec while the other example is the PIM Codec.

As a final note, there are four more virtual functions that a Codec should implement: encode, format, update, and log. If the functions are not implemented Snort will not throw any errors. However, Snort may also be unable to accomplish some of its basic functionality.

- encode is called whenever Snort actively responds and needs to build a packet, i.e. whenever a rule using an IPS ACTION like react, reject, or rewrite is triggered. This function is used to build the response packet protocol by protocol.
- format is called when Snort is rebuilding a packet. For instance, every time Snort reassembles a TCP stream or IP fragment, format is called. Generally, this function either swaps any source and destination fields in the protocol or does nothing.
- update is similar to format in that it is called when Snort is reassembling a packet. Unlike format, this function only sets length fields.
- log is called when either the log_codecs logger or a custom logger that calls PacketManager::log_protocols is used when running Snort.

18.5 IPS Actions

Action plugins specify a builtin action in the API which is used to determine verdict. (Conversely, builtin actions don't have an associated plugin function.)

18.6 Developers Guide

Run `doc/dev_guide.sh` to generate `/tmp/dev_guide.html`, an annotated guide to the source tree.

18.7 Piglet Test Harness

In order to assist with plugin development, an experimental mode called "piglet" mode is provided. With piglet mode, you can call individual methods for a specific plugin. The piglet tests are specified as Lua scripts. Each piglet test script defines a test for a specific plugin.

Here is a minimal example of a piglet test script for the IPv4 Codec plugin:

```
plugin =
{
    type = "piglet",
    name = "codec::ipv4",
    use_defaults = true,
    test = function()
        local daq_header = DAQHeader.new()
        local raw_buffer = RawBuffer.new("some data")
        local codec_data = CodecData.new()
        local decode_data = DecodeData.new()

        return Codec.decode(
            daq_header,
            raw_buffer,
            codec_data,
            decode_data
        )
    end
}
```

To run snort in piglet mode, first build snort with the `ENABLE_PIGLET` option turned on (pass the flag `-DENABLE_PIGLET:BOOL=ON` in `cmake`).

Then, run the following command:

```
snort --script-path $test_scripts --piglet
```

(where `$test_scripts` is the directory containing your piglet tests).

The test runner will generate a check-like output, indicating the the results of each test script.

18.8 Piglet Lua API

This section documents the API that piglet exposes to Lua. Refer to the piglet directory in the source tree for examples of usage.

Note: Because of the differences between the Lua and C++ data model and type system, not all parameters map directly to the parameters of the underlying C++ member functions. Every effort has been made to keep the mappings consist, but there are still some differences. They are documented below.

18.8.1 Plugin Instances

For each test, piglet instantiates plugin specified in the `name` field of the `plugin` table. The virtual methods of the instance are exposed in a table unique to each plugin type. The name of the table is the CamelCase name of the plugin type.

For example, codec plugins have a virtual method called `decode`. This method is called like this:

`Codec.decode(...)`

Codec

- `Codec.get_data_link_type() → { int, int, ... }`
- `Codec.get_protocol_ids() → { int, int, ... }`
- `Codec.decode(DAQHeader, RawBuffer, CodecData, DecodeData) → bool`
- `Codec.log(RawBuffer, uint[lyr_len])`
- `Codec.encode(RawBuffer, EncState, Buffer) → bool`
- `Codec.update(uint[flags_hi], uint[flags_lo], RawBuffer, uint[lyr_len] → int`
- `Codec.format(bool[reverse], RawBuffer, DecodeData)`

Differences:

- In `Codec.update()`, the `(uint64_t) flags` parameter has been split into `flags_hi` and `flags_lo`

Inspector

- `Inspector.configure()`
- `Inspector.tinit()`
- `Inspector.tterm()`
- `Inspector.likes(Packet)`
- `Inspector.eval(Packet)`
- `Inspector.clear(Packet)`
- `Inspector.get_buf_from_key(string[key], Packet, RawBuffer) → bool`
- `Inspector.get_buf_from_id(uint[id], Packet, RawBuffer) → bool`
- `Inspector.get_buf_from_type(uint[type], Packet, RawBuffer) → bool`
- `Inspector.get_splitter(bool[to_server]) → StreamSplitter`

Differences: * In `Inspector.configure()`, the `SnortConfig*` parameter is passed implicitly. * the overloaded `get_buf()` member function has been split into three separate methods.

IpsOption

- `IpsOption.hash() → int`
- `IpsOption.is_relative() → bool`
- `IpsOption.fp_research() → bool`
- `IpsOption.get_cursor_type() → int`
- `IpsOption.eval(Cursor, Packet) → int`
- `IpsOption.action(Packet)`

IpsAction

- `IpsAction.exec(Packet)`

Logger

- `Logger.open()`
- `Logger.close()`
- `Logger.reset()`
- `Logger.alert(Packet, string[message], Event)`
- `Logger.log(Packet, string[message], Event)`

SearchEngine

Currently, SearchEngine does not expose any methods.

SoRule

Currently, SoRule does not expose any methods.

Interface Objects

Many of the plugins take C++ classes and structs as arguments. These objects are exposed to the Lua API as Lua userdata. Exposed objects are instantiated by calling the `new` method from each object's method table.

For example, the `DecodeData` object can be instantiated and exposed to Lua like this:

```
local decode_data = DecodeData.new(...)
```

Each object also exposes useful methods for getting and setting member variables, and calling the C++ methods contained in the the object. These methods can be accessed using the `:` accessor syntax:

```
decode_data:set({ sp = 80, dp = 3500 })
```

Since this is just syntactic sugar for passing the object as the first parameter of the function `DecodeData.set`, an equivalent form is:

```
decode_data.set(decode_data, { sp = 80, dp = 3500 })
```

or even:

```
DecodeData.set(decode_data, { sp = 80, dp = 3500 })
```

Buffer

- `Buffer.new(string[data]) → Buffer`
- `Buffer.new(uint[length]) → Buffer`
- `Buffer.new(RawBuffer) → Buffer`
- `Buffer:allocate(uint[length]) → bool`
- `Buffer:clear()`

CodecData

- `CodecData.new() → CodecData`
 - `CodecData.new(uint[next_prot_id]) → CodecData`
-

- `CodecData.new(fields) → CodecData`
- `CodecData:get() → fields`
- `CodecData:set(fields)`

`fields` is a table with the following contents:

- `next_prot_id`
- `lyr_len`
- `invalid_bytes`
- `proto_bits`
- `codec_flags`
- `ip_layer_cnt`
- `ip6_extension_count`
- `curr_ip6_extension`
- `ip6_csum_proto`

Cursor

- `Cursor.new() → Cursor`
- `Cursor.new(Packet) → Cursor`
- `Cursor.new(string[data]) → Cursor`
- `Cursor.new(RawBuffer) → Cursor`
- `Cursor:reset()`
- `Cursor:reset(Packet)`
- `Cursor:reset(string[data])`
- `Cursor:reset(RawBuffer)`

DAQHeader

- `DAQHeader.new() → DAQHeader`
- `DAQHeader.new(fields) → DAQHeader`
- `DAQHeader:get() → fields`
- `DAQHeader:set(fields)`

`fields` is a table with the following contents:

- `caplen`
 - `pktlen`
 - `ingress_index`
 - `egress_index`
 - `ingress_group`
-

- `egress_group`
- `flags`
- `opaque`

DecodeData

- `DecodeData.new()` → `DecodeData`
- `DecodeData.new(fields)` → `DecodeData`
- `DecodeData:reset()`
- `DecodeData:get()` → `fields`
- `DecodeData:set(fields)`
- `DecodeData:set_ipv4_hdr(RawBuffer, uint[offset])`

`fields` is a table with the following contents:

- `sp`
- `dp`
- `decode_flags`
- `type`

EncState

- `EncState.new()` → `EncState`
- `EncState.new(uint[flags_lo])` → `EncState`
- `EncState.new(uint[flags_lo], uint[flags_hi])` → `EncState`
- `EncState.new(uint[flags_lo], uint[flags_hi], uint[next_proto])` → `EncState`
- `EncState.new(uint[flags_lo], uint[flags_hi], uint[next_proto], uint[ttl])` → `EncState`
- `EncState.new(uint[flags_lo], uint[flags_hi], uint[next_proto], uint[ttl], uint[dsize])` → `EncState`

Event

- `Event.new()` → `Event`
- `Event.new(fields)` → `Event`
- `Event:get()` → `fields`
- `Event:set(fields)`

`fields` is a table with the following contents:

- `event_id`
 - `event_reference`
 - `sig_info`
-

- generator
- id
- rev
- class_id
- priority
- text_rule
- num_services

Flow

- `Flow.new()` → `Flow`
- `Flow:reset()`

Packet

- `Packet.new()` → `Packet`
- `Packet.new(string[data])` → `Packet`
- `Packet.new(uint[size])` → `Packet`
- `Packet.new(fields)` → `Packet`
- `Packet.new(RawBuffer)` → `Packet`
- `Packet.new(DAQHeader)` → `Packet`
- `Packet:set_decode_data(DecodeData)`
- `Packet:set_data(uint[offset], uint[length])`
- `Packet:set_flow(Flow)`
- `Packet:get()` → `fields`
- `Packet:set()`
- `Packet:set(string[data])`
- `Packet:set(uint[size])`
- `Packet:set(fields)`
- `Packet:set(RawBuffer)`
- `Packet:set(DAQHeader)`

`fields` is a table with the following contents:

- `packet_flags`
 - `xtradata_mask`
 - `proto_bits`
 - `application_protocol_ordinal`
 - `alt_dsize`
 - `num_layers`
-

- `iplist_id`
- `user_policy_id`
- `ps_proto`

Note: `Packet.new()` and `Packet:set()` accept multiple arguments of the types described above in any order

RawBuffer

- `RawBuffer.new()` → `RawBuffer`
- `RawBuffer.new(uint[size])` → `RawBuffer`
- `RawBuffer.new(string[data])` → `RawBuffer`
- `RawBuffer:size()` → `int`
- `RawBuffer:resize(uint[size])`
- `RawBuffer:write(string[data])`
- `RawBuffer:write(string[data], uint[size])`
- `RawBuffer:read()` → `string`
- `RawBuffer:read(uint[end])` → `string`
- `RawBuffer:read(uint[start], uint[end])` → `string`

Note: calling `RawBuffer.new()` with no arguments returns a `RawBuffer` of size 0

StreamSplitter

- `StreamSplitter:scan(Flow, RawBuffer)` → `int, int`
- `StreamSplitter:scan(Flow, RawBuffer, uint[len])` → `int, int`
- `StreamSplitter:scan(Flow, RawBuffer, uint[len], uint[flags])` → `int, int`
- `StreamSplitter:reassemble(Flow, uint[total], uint[offset], RawBuffer)` → `int, RawBuffer`
- `StreamSplitter:reassemble(Flow, uint[total], uint[offset], RawBuffer, uint[len])` → `int, RawBuffer`
- `StreamSplitter:reassemble(Flow, uint[total], uint[offset], RawBuffer, uint[len], uint[flags])` → `int, RawBuffer`
- `StreamSplitter:finish(Flow)` → `bool`

Note: `StreamSplitter` does not have a `new()` method, it must be created by an inspector via `Inspector.get_splitter()`

19 Coding Style

All new code should try to follow these style guidelines. These are not yet firm so feedback is welcome to get something we can live with.

19.1 General

- Generally try to follow <http://google-styleguide.googlecode.com/svn/trunk/cppguide.xml>, but there are some differences documented here.
- Each source directory should have a dev_notes.txt file summarizing the key points and design decisions for the code in that directory. These are built into the developers guide.
- Makefile.am and CMakeLists.txt should have the same files listed in alpha order. This makes it easier to maintain both build systems.
- All new code must come with unit tests providing 95% coverage or better.
- Generally, Catch is preferred for tests in the source file and CppUTest is preferred for test executables in a test subdirectory.

19.2 C++ Specific

- Do not use exceptions. Exception-safe code is non-trivial and we have ported legacy code that makes use of exceptions unwise. There are a few exceptions to this rule for the memory manager, shell, etc. Other code should handle errors as errors.
- Do not use dynamic_cast or RTTI. Although compilers are getting better all the time, there is a time and space cost to this that is easily avoided.
- Use smart pointers judiciously as they aren't free. If you would have to roll your own, then use a smart pointer. If you just need a dtor to delete something, write the dtor.
- Prefer *and* over *&&* and *or* over *||* for new source files.
- Use nullptr instead of NULL.
- Use new, delete, and their [] counterparts instead of malloc and free except where realloc must be used. But try not to use realloc. New and delete can't return nullptr so no need to check. And Snort's memory manager will ensure that we live within our memory budget.
- Use references in lieu of pointers wherever possible.
- Use the order public, protected, private top to bottom in a class declaration.
- Keep inline functions in a class declaration very brief, preferably just one line. If you need a more complex inline function, move the definition below the class declaration.
- The goal is to have highly readable class declarations. The user shouldn't have to sift through implementation details to see what is available to the client.
- Any using statements in source files should be added only after all includes have been declared.

19.3 Naming

- Use camel case for namespaces, classes, and types like WhizBangPdfChecker.
 - Use lower case identifiers with underscore separators, e.g. some_function() and my_var.
 - Do not start or end variable names with an underscore. This has a good chance of conflicting with macro and/or system definitions.
 - Use lower case filenames with underscores.
-

19.4 Comments

- Write comments sparingly with a mind towards future proofing. Often the comments can be obviated with better code. Clear code is better than a comment.
- Heed Tim Ottinger's Rule on Comments (https://disqus.com/by/tim_ottinger/):
 1. Comments should only say what the code is incapable of saying.
 2. Comments that repeat (or pre-state) what the code is doing must be removed.
 3. If the code CAN say what the comment is saying, it must be changed at least until rule #2 is in force.
- Function comment blocks are generally just noise that quickly becomes obsolete. If you absolutely must comment on parameters, put each on a separate line along with the comment. That way changing the signature may prompt a change to the comments too.
- Use FIXIT (not FIXTHIS or TODO or whatever) to mark things left for a day or even just a minute. That way we can find them easily and won't lose track of them.
- Presently using FIXIT-X where X = A | W | P | H | M | L, indicating analysis, warning, perf, high, med, or low priority. Place A and W comments on the exact warning line so we can match up comments and build output. Supporting comments can be added above.
- Put the copyright(s) and license in a comment block at the top of each source file (.h and .cc). Don't bother with trivial scripts and make foo. Some interesting Lua code should get a comment block too. Copy and paste exactly from src/main.h (don't reformat).
- Put author, description, etc. in separate comment(s) following the license. Do not put such comments in the middle of the license foo. Be sure to put the author line ahead of the header guard to exclude them from the developers guide. Use the following format, and include a mention to the original author if this is derived work:

```
// ips_dnp3_obj.cc author Maya Dagon <mdagon@cisco.com>
// based on work by Ryan Jordan
```
- Each header should have a comment immediately after the header guard to give an overview of the file so the reader knows what's going on.

19.5 Logging

- Messages intended for the user should not look like debug messages. Eg, the function name should not be included. It is generally unhelpful to include pointers.
- Most debug messages should just be deleted.
- Don't bang your error messages (no !). The user feels bad enough about the problem already w/o you shouting at him.

19.6 Types

- Use logical types to make the code clearer and to help the compiler catch problems. `typedef uint16_t Port; bool foo(Port)` is way better than `int foo(int port)`.
 - Use forward declarations (e.g. `struct SnortConfig;`) instead of `void*`.
 - Try not to use extern data unless absolutely necessary and then put the extern in an appropriate header. Exceptions for things used in exactly one place like BaseApi pointers.
 - Use const liberally. In most cases, `const char* s = "foo"` should be `const char* const s = "foo"`. The former goes in the initialized data section and the latter in read only data section.
-

- But use `const char s[] = "foo"` instead of `const char* s = "foo"` when possible. The latter form allocates a pointer variable and the data while the former allocates only the data.
- Use `static` wherever possible to minimize public symbols and eliminate unneeded relocations.
- Declare functions `virtual` only in the parent class introducing the function (not in a derived class that is overriding the function). This makes it clear which class introduces the function.
- Declare functions as `override` if they are intended to override a function. This makes it possible to find derived implementations that didn't get updated and therefore won't get called due a change in the parent signature.
- Use `bool` functions instead of `int` unless there is truly a need for multiple error returns. The C-style use of zero for success and -1 for error is less readable and often leads to messy code that either ignores the various errors anyway or needlessly and ineffectively tries to do something about them. Generally that code is not updated if new errors are added.

19.7 Macros (aka defines)

- In many cases, even in C++, use `#define name "value"` instead of `const char* const name = "value"` because it will eliminate a symbol from the binary.
- Use inline functions instead of macros where possible (pretty much all cases except where stringification is necessary). Functions offer better typing, avoid re-expansions, and a debugger can break there.
- All macros except simple const values should be wrapped in `()` and all args should be wrapped in `()` too to avoid surprises upon expansion. Example:

```
#define SEQ_LT(a,b)  ((int)((a) - (b)) < 0)
```

- Multiline macros should be blocked (i.e. inside `{ }`) to avoid if-else type surprises.

19.8 Formatting

- Try to keep all source files under 2500 lines. 3000 is the max allowed. If you need more lines, chances are that the code needs to be refactored.
- Indent 4 space chars ... no tabs!
- If you need to indent many times, something could be rewritten or restructured to make it clearer. Fewer indents is generally easier to write, easier to read, and overall better code.
- Braces go on the line immediately following a new scope (function signature, if, else, loop, switch, etc).
- Use consistent spacing and line breaks. Always indent 4 spaces from the breaking line. Keep lines less than 100 chars; it greatly helps readability.

No:

```
calling_a_func_with_a_long_name(arg1,
                                arg2,
                                arg3);
```

Yes:

```
calling_a_func_with_a_long_name(
    arg1, arg2, arg3);
```

- Put function signature on one line, except when breaking for the arg list:

No:

```
inline
bool foo()
{ // ...
```

```
Yes:
    inline bool foo()
    { // ...
```

- Put conditional code on the line following the if so it is easy to break on the conditional block:

```
No:
    if ( test ) foo();
```

```
Yes:
    if ( test )
        foo();
```

19.9 Headers

- Don't hesitate to create a new header if it is needed. Don't lump unrelated stuff into an header because it is convenient.
- Write header guards like this (leading underscores are reserved for system stuff). In my_header.h:

```
#ifndef MY_HEADER_H
#define MY_HEADER_H
// ...
#endif
```

- Includes from a different directory should specify parent directory. This makes it clear exactly what is included and avoids the primordial soup that results from using -I this -I that -I the_other_thing

```
// given:
src/foo/foo.cc
src/bar/bar.cc
src/bar/baz.cc
```

```
// in baz.cc
#include "bar.h"
```

```
// in foo.cc
#include "bar/bar.h"
```

- Includes within installed headers should specify parent directory.
- Just because it is a #define doesn't mean it goes in a header. Everything should be scoped as tightly as possible. Shared implementation declarations should go in a separate header from the interface. And so on.
- All .cc files should include config.h with the standard block shown below immediately following the initial comment blocks and before anything else. This presents a consistent view of all included header files as well as access to any other configure-time definitions. No .h files should include config.h unless they are guaranteed to be local header files (never installed).

```
#ifdef HAVE_CONFIG_H
#include "config.h"
#endif
```

- A .cc should include its own .h before any others aside from the aforementioned config.h (including system headers). This ensures that the header stands on its own and can be used by clients without include prerequisites and the developer will be the first to find a dependency issue.

- Split headers included from the local directory into a final block of headers. For a .cc file, the final order of sets of header includes should look like this:
 1. config.h
 2. its own .h file
 3. system headers (.h/.hpp/.hxx)
 4. C++ standard library headers (no file extension)
 5. Snort headers external to the local directory (path-prefixed)
 6. Snort headers in the local directory
- Include required headers, all required headers, and nothing but required headers. Don't just clone a bunch of headers because it is convenient.
- Keep includes in alphabetical order. This makes it easier to maintain, avoid duplicates, etc.
- Do not put using statements in headers unless they are tightly scoped.

19.10 Warnings

- With g++, use at least these compiler flags:

```
-Wall -Wextra -pedantic -Wformat -Wformat-security  
-Wunused-but-set-variable -Wno-deprecated-declarations  
-fsanitize=address -fno-omit-frame-pointer
```
- With clang, use at least these compiler flags:

```
-Wall -Wextra -pedantic -Wformat -Wformat-security  
-Wno-deprecated-declarations  
-fsanitize=address -fno-omit-frame-pointer
```
- Two macros (PADDING_GUARD_BEGIN and PADDING_GUARD_END) are provided by utils/cpp_macros.h. These should be used to surround any structure used as a hash key with a raw comparator or that would otherwise suffer from unintentional padding. A compiler warning will be generated if any structure definition is automatically padded between the macro invocations.
- Then Fix All Warnings and Aborts. None Allowed.

19.11 Uncrustify

Currently using uncrustify from at <https://github.com/bengardner/uncrustify> to reformat legacy code and anything that happens to need a makeover at some point.

The working config is crusty.cfg in the top level directory. It does well but will munge some things. Specially formatted INDENT-OFF comments were added in 2 places to avoid a real mess.

You can use uncrustify something like this:

```
uncrustify -c crusty.cfg --replace file.cc
```

20 Reference

20.1 Build Options

The options listed below must be explicitly enabled so they are built into the Snort binary. For a full list of build options, run `./configure --help`.

- **--enable-shell**: enable building local and remote command line shell support.

These options are built only if the required libraries and headers are present. There is no need to explicitly enable.

- **lzma**: for decompression of SWF and PDF files.
- **openssl**: for SHA and MD5 file signatures and the `protected_content` rule option.
- ***intel-soft-cpm**: an optional pattern matcher based on a library from Intel.
- **hyperscan** for the `regex` rule option and hyperscan search engine.

If you need to use headers and/or libraries in non-standard locations, you can use these options:

- **--with-pkg-includes**: specify the directory containing the package headers.
- **--with-pkg-libraries**: specify the directory containing the package libraries.

These can be use for pcap, luajit, pcre, dnet, daq, lzma, openssl, intel-soft-cpm, and hyperscan packages. For more information on these libraries see the Getting Started section of the manual.

20.2 Environment Variables

- **HOSTTYPE**: optional string that is output with the version at end of line.
- **LUA_PATH**: you must export as follows so LuaJIT can find required files.
`LUA_PATH=$install_dir/include/snort/lua/\?.lua\;;`
- **SNORT_IGNORE**: the list of symbols Snort should ignore when parsing the Lua conf. Unknown symbols not in `SNORT_IGNORE` will cause warnings with `--warn-unknown` or fatals with `--warn-unknown --pedantic`.
- **SNORT_LUA_PATH**: an optional path where Snort can find supplemental conf files such as `classification.lua`.
- **SNORT_PROMPT**: the character sequence that is printed at startup, shutdown, and in the shell. The default is the mini-pig: `o")~ .`
- **SNORT_PLUGIN_PATH**: an optional path where Snort can find supplemental shared libraries. This is only used when Snort is building manuals. Modules in supplemental shared libraries will be added to the manuals.

20.3 Command Line Options

- **--alert-before-pass** process alert, drop, sdrops, or reject before pass; default is pass before alert, drop,...
 - **-A <mode>** set alert mode: none, cmg, or alert_*
 - **-B <mask>** obfuscated IP addresses in alerts and packet dumps using CIDR mask
 - **--bpf <filter options>** are standard BPF options, as seen in TCPDump
 - **--c2x** output hex for given char (see also `--x2c`)
-

- **--catch-test** comma separated list of cat unit test tags or *all*
 - **-c** <conf> use this configuration
 - **-C** print out payloads with character data only (no hex)
 - **--create-pidfile** create PID file, even when not in Daemon mode
 - **--daq-dir** <dir> tell snort where to find desired DAQ
 - **--daq-list** list packet acquisition modules available in optional dir, default is static modules only
 - **--daq** <type> select packet acquisition module (default is pcap)
 - **--daq-var** <name=value> specify extra DAQ configuration variable
 - **-d** dump the Application Layer
 - **--dirty-pig** don't flush packets on shutdown
 - **-D** run Snort in background (daemon) mode
 - **--dump-builtin-rules** [<module prefix>] output stub rules for selected modules
 - **--dump-defaults** [<module prefix>] output module defaults in Lua format (optional)
 - **--dump-dynamic-rules** output stub rules for all loaded rules libraries
 - **--dump-version** output the version, the whole version, and only the version
 - **-e** display the second layer header info
 - **--enable-inline-test** enable Inline-Test Mode Operation
 - **-f** turn off fflush() calls after binary log writes
 - **-G** <0xid> (same as --logid) (0:65535)
 - **-g** <gname> run snort gid as <gname> group (or gid) after initialization
 - **--help-commands** [<module prefix>] output matching commands (optional)
 - **--help-config** [<module prefix>] output matching config options (optional)
 - **--help-counts** [<module prefix>] output matching peg counts (optional)
 - **--help** list command line options
 - **--help-module** <module> output description of given module
 - **--help-modules** list all available modules with brief help
 - **--help-options** <option prefix> output matching command line option quick help (same as -?) (optional)
 - **--help-plugins** list all available plugins with brief help
 - **--help-signals** dump available control signals
 - **-H** make hash tables deterministic
 - **--id-subdir** create/use instance subdirectories in logdir instead of instance filename prefix
 - **--id-zero** use id prefix / subdirectory even with one packet thread
 - **-i** <iface>... list of interfaces
 - **-j** <port> to listen for telnet connections
 - **-k** <mode> checksum mode; default is all (allnoiplnotcplnoudplnoicmplnone)
-

- **--list-buffers** output available inspection buffers
 - **--list-builtin** <module prefix> output matching builtin rules (optional)
 - **--list-gids** [<module prefix>] output matching generators (optional)
 - **--list-modules** [<module type>] list all known modules of given type (optional)
 - **--list-plugins** list all known plugins
 - **-l** <logdir> log to this directory instead of current directory
 - **-L** <mode> logging mode (none, dump, pcap, or log_*)
 - **--logid** <0xid> log Identifier to uniquely id events for multiple snorts (same as -G) (0:65535)
 - **--lua** <chunk> extend/override conf with chunk; may be repeated
 - **--markup** output help in asciidoc compatible format
 - **--max-packet-threads** <count> configure maximum number of packet threads (same as -z) (0:)
 - **-M** log messages to syslog (not alerts)
 - **-m** <umask> set umask = <umask> (0:)
 - **-n** <count> stop after count packets (0:)
 - **--nolock-pidfile** do not try to lock Snort PID file
 - **--nostamps** don't include timestamps in log file names
 - **-O** obfuscate the logged IP addresses
 - **-?** <option prefix> output matching command line option quick help (same as --help-options) (optional)
 - **--pause** wait for resume/quit command before processing packets/terminating
 - **--pcap-dir** <dir> a directory to recurse to look for pcaps - read mode is implied
 - **--pcap-file** <file> file that contains a list of pcaps to read - read mode is implied
 - **--pcap-filter** <filter> filter to apply when getting pcaps from file or directory
 - **--pcap-list** <list> a space separated list of pcaps to read - read mode is implied
 - **--pcap-loop** <count> read all pcaps <count> times; 0 will read until Snort is terminated (-1:)
 - **--pcap-no-filter** reset to use no filter when getting pcaps from file or directory
 - **--pcap-reload** if reading multiple pcaps, reload snort config between pcaps
 - **--pcap-show** print a line saying what pcap is currently being read
 - **--pedantic** warnings are fatal
 - **--piglet** enable piglet test harness mode
 - **--plugin-path** <path> where to find plugins
 - **--process-all-events** process all action groups
 - **-Q** enable inline mode operation
 - **-q** quiet mode - Don't show banner and status report
 - **-r** <pcap>... (same as --pcap-list)
 - **-R** <rules> include this rules file in the default policy
-

- **--rule** <rules> to be added to configuration; may be repeated
 - **--rule-to-hex** output so rule header to stdout for text rule on stdin
 - **--rule-to-text** output plain so rule header to stdout for text rule on stdin
 - **--run-prefix** <pfx> prepend this to each output file
 - **--script-path** <path> to a luajit script or directory containing luajit scripts
 - **--shell** enable the interactive command line
 - **--show-plugins** list module and plugin versions
 - **--skip** <n> skip 1st n packets (0:)
 - **--snaplen** <snap> set snaplen of packet (same as -s) (68:65535)
 - **-s** <snap> (same as --snaplen); default is 1514 (68:65535)
 - **--stdin-rules** read rules from stdin until EOF or a line starting with END is read
 - **-S** <x=v> set config variable x equal to value v
 - **-t** <dir> chroots process to <dir> after initialization
 - **--treat-drop-as-alert** converts drop, sdrops, and reject rules into alert rules during startup
 - **--treat-drop-as-ignore** use drop, sdrops, and reject rules to ignore session traffic when not inline
 - **-T** test and report on the current Snort configuration
 - **-u** <uname> run snort as <uname> or <uid> after initialization
 - **-U** use UTC for timestamps
 - **-v** be verbose
 - **--version** show version number (same as -V)
 - **-V** (same as --version)
 - **--warn-all** enable all warnings
 - **--warn-conf** warn about configuration issues
 - **--warn-daq** warn about DAQ issues, usually related to mode
 - **--warn-flowbits** warn about flowbits that are checked but not set and vice-versa
 - **--warn-hosts** warn about host table issues
 - **--warn-plugins** warn about issues that prevent plugins from loading
 - **--warn-rules** warn about duplicate rules and rule parsing issues
 - **--warn-scripts** warn about issues discovered while processing Lua scripts
 - **--warn-symbols** warn about unknown symbols in your Lua config
 - **--warn-vars** warn about variable definition and usage issues
 - **-W** lists available interfaces
 - **--x2c** output ASCII char for given hex (see also --c2x)
 - **--x2s** output ASCII string for given byte code (see also --c2x)
 - **-X** dump the raw packet data starting at the link layer
-

- **-x** same as `--pedantic`
- **-y** include year in timestamp in the alert and log files
- **-z <count>** maximum number of packet threads (same as `--max-packet-threads`); 0 gets the number of CPU cores reported by the system; default is 1 (0:)

20.4 Configuration

- string **ack.range**: check if tcp ack value is *value* | *min*<>*max* | <*max* | >*min*
- int **active.attempts** = 0: number of TCP packets sent per response (with varying sequence numbers) { 0:20 }
- string **active.device**: use *ip* for network layer responses or *eth0* etc for link layer
- string **active.dst_mac**: use format *01:23:45:67:89:ab*
- int **active.max_responses** = 0: maximum number of responses { 0: }
- int **active.min_interval** = 255: minimum number of seconds between responses { 1: }
- multi **alert_csv.fields** = timestamp pkt_num proto pkt_gen dgm_len dir src_ap dst_ap rule action: selected fields will be output in given order left to right { action | dir | dgm_len | dst_addr | dst_ap | dst_port | eth_dst | eth_len | eth_src | eth_type | gid | icmp_code | icmp_id | icmp_seq | icmp_type | iface | ip_id | ip_len | msg | pkt_gen | pkt_num | proto | rev | rule | sid | src_addr | src_ap | src_port | tcp_ack | tcp_flags | tcp_len | tcp_seq | tcp_win | timestamp | tos | ttl | udp_len }
- bool **alert_csv.file** = false: output to alert_csv.txt instead of stdout
- int **alert_csv.limit** = 0: set limit (0 is unlimited) { 0: }
- string **alert_csv.separator** = , : separate fields with this character sequence
- enum **alert_csv.units** = B: bytes | KB | MB | GB { B | K | M | G }
- bool **alert_ex.upper** = false: true/false → convert to upper/lower case
- bool **alert_fast.file** = false: output to alert_fast.txt instead of stdout
- int **alert_fast.limit** = 0: set limit (0 is unlimited) { 0: }
- bool **alert_fast.packet** = false: output packet dump with alert
- enum **alert_fast.units** = B: bytes | KB | MB | GB { B | K | M | G }
- bool **alert_full.file** = false: output to alert_full.txt instead of stdout
- int **alert_full.limit** = 0: set limit (0 is unlimited) { 0: }
- enum **alert_full.units** = B: limit is in bytes | KB | MB | GB { B | K | M | G }
- bool **alerts.alert_with_interface_name** = false: include interface in alert info (fast, full, or syslog only)
- bool **alerts.default_rule_state** = true: enable or disable ips rules
- int **alerts.detection_filter_memcap** = 1048576: set available bytes of memory for detection_filters { 0: }
- int **alerts.event_filter_memcap** = 1048576: set available bytes of memory for event_filters { 0: }
- string **alert_sfsocket.file**: name of unix socket file
- int **alert_sfsocket.rules[].gid** = 1: rule generator ID { 1: }
- int **alert_sfsocket.rules[].sid** = 1: rule signature ID { 1: }
- string **alerts.order** = pass drop alert log: change the order of rule action application

- int **alerts.rate_filter_memcap** = 1048576: set available bytes of memory for rate_filters { 0: }
 - string **alerts.reference_net**: set the CIDR for homenet (for use with -I or -B, does NOT change \$HOME_NET in IDS mode)
 - bool **alerts.stateful** = false: don't alert w/o established session (note: rule action still taken)
 - string **alerts.tunnel_verdicts**: let DAQ handle non-allow verdicts for GTP/Teredo/6in4/4in6 traffic
 - enum **alert_syslog.facility** = auth: part of priority applied to each message { auth | authpriv | daemon | user | local0 | local1 | local2 | local3 | local4 | local5 | local6 | local7 }
 - enum **alert_syslog.level** = info: part of priority applied to each message { emerg | alert | crit | err | warning | notice | info | debug }
 - multi **alert_syslog.options**: used to open the syslog connection { cons | ndelay | perror | pid }
 - string **appid.app_detector_dir**: directory to load appid detectors from
 - int **appid.app_stats_period** = 300: time period for collecting and logging appid statistics { 0: }
 - int **appid.app_stats_rollover_size** = 20971520: max file size for appid stats before rolling over the log file { 0: }
 - int **appid.app_stats_rollover_time** = 86400: max time period for collection appid stats before rolling over the log file { 0: }
 - bool **appid.debug** = false: enable appid debug logging
 - bool **appid.dump_ports** = false: enable dump of appid port information
 - int **appid.instance_id** = 0: instance id - need more details for what this is { 0: }
 - bool **appid.log_stats** = false: enable logging of appid statistics
 - int **appid.memcap** = 0: disregard - not implemented { 0: }
 - string **appids.~**: comma separated list of application names
 - addr **appid.session_log_filter.dst_ip** = 0.0.0.0/32: destination ip address in CIDR format
 - port **appid.session_log_filter.dst_port**: destination port { 1: }
 - bool **appid.session_log_filter.log_all_sessions** = false: enable logging for all appid sessions
 - string **appid.session_log_filter.protocol**: ip protocol
 - addr **appid.session_log_filter.src_ip** = 0.0.0.0/32: source ip address in CIDR format
 - port **appid.session_log_filter.src_port**: source port { 1: }
 - ip4 **arp_spoof.hosts[].ip**: host ip address
 - mac **arp_spoof.hosts[].mac**: host mac address
 - int **asn1.absolute_offset**: absolute offset from the beginning of the packet { 0: }
 - implied **asn1.bitstring_overflow**: detects invalid bitstring encodings that are known to be remotely exploitable
 - implied **asn1.double_overflow**: detects a double ASCII encoding that is larger than a standard buffer
 - int **asn1.oversize_length**: compares ASN.1 type lengths with the supplied argument { 0: }
 - implied **asn1.print**: dump decode data to console; always true
 - int **asn1.relative_offset**: relative offset from the cursor
 - int **attribute_table.max_hosts** = 1024: maximum number of hosts in attribute table { 32:207551 }
 - int **attribute_table.max_metadata_services** = 8: maximum number of services in rule metadata { 1:256 }
 - int **attribute_table.max_services_per_host** = 8: maximum number of services per host entry in attribute table { 1:65535 }
-

- int **base64_decode.bytes**: number of base64 encoded bytes to decode { 1: }
 - int **base64_decode.offset** = 0: bytes past start of buffer to start decoding { 0: }
 - implied **base64_decode.relative**: apply offset to cursor instead of start of buffer
 - enum **binder[].use.action** = inspect: what to do with matching traffic { reset | block | allow | inspect }
 - string **binder[].use.file**: use configuration in given file
 - string **binder[].use.name**: symbol name (defaults to type)
 - string **binder[].use.service**: override automatic service identification
 - string **binder[].use.type**: select module for binding
 - bit_list **binder[].when.ifaces**: list of interface indices { 255 }
 - addr_list **binder[].when.nets**: list of networks
 - int **binder[].when.policy_id** = 0: unique ID for selection of this config by external logic { 0: }
 - bit_list **binder[].when.ports**: list of ports { 65535 }
 - enum **binder[].when.proto**: protocol { any | ip | icmp | tcp | udp | user | file }
 - enum **binder[].when.role** = any: use the given configuration on one or any end of a session { client | server | any }
 - string **binder[].when.service**: override default configuration
 - bit_list **binder[].when.vlans**: list of VLAN IDs { 4095 }
 - string **bufferlen.~range**: len | min<>max | <max | >min
 - int **byte_extract.align** = 0: round the number of converted bytes up to the next 2- or 4-byte boundary { 0:4 }
 - implied **byte_extract.big**: big endian
 - int **byte_extract.~count**: number of bytes to pick up from the buffer { 1:10 }
 - implied **byte_extract.dce**: dcerpc2 determines endianness
 - implied **byte_extract.dec**: convert from decimal string
 - implied **byte_extract.hex**: convert from hex string
 - implied **byte_extract.little**: little endian
 - int **byte_extract.multiplier** = 1: scale extracted value by given amount { 1:65535 }
 - string **byte_extract.~name**: name of the variable that will be used in other rule options
 - implied **byte_extract.oct**: convert from octal string
 - int **byte_extract.~offset**: number of bytes into the buffer to start processing { -65535:65535 }
 - implied **byte_extract.relative**: offset from cursor instead of start of buffer
 - implied **byte_extract.string**: convert from string
 - int **byte_jump.align** = 0: round the number of converted bytes up to the next 2- or 4-byte boundary { 0:4 }
 - implied **byte_jump.big**: big endian
 - int **byte_jump.~count**: number of bytes to pick up from the buffer { 1:10 }
 - implied **byte_jump.dce**: dcerpc2 determines endianness
 - implied **byte_jump.dec**: convert from decimal string
-

- implied **byte_jump.from_beginning**: jump from start of buffer instead of cursor
 - implied **byte_jump.hex**: convert from hex string
 - implied **byte_jump.little**: little endian
 - int **byte_jump.multiplier** = 1: scale extracted value by given amount { 1:65535 }
 - implied **byte_jump.oct**: convert from octal string
 - string **byte_jump.~offset**: variable name or number of bytes into the buffer to start processing
 - int **byte_jump.post_offset** = 0: also skip forward or backwards (positive or negative value) this number of bytes { -65535:65535 }
 - implied **byte_jump.relative**: offset from cursor instead of start of buffer
 - implied **byte_jump.string**: convert from string
 - implied **byte_test.big**: big endian
 - string **byte_test.~compare**: variable name or value to test the converted result against
 - int **byte_test.~count**: number of bytes to pick up from the buffer { 1:10 }
 - implied **byte_test.dce**: dcerpc2 determines endianness
 - implied **byte_test.dec**: convert from decimal string
 - implied **byte_test.hex**: convert from hex string
 - implied **byte_test.little**: little endian
 - implied **byte_test.oct**: convert from octal string
 - string **byte_test.~offset**: variable name or number of bytes into the payload to start processing
 - string **byte_test.~operator**: variable name or number of bytes into the buffer to start processing
 - implied **byte_test.relative**: offset from cursor instead of start of buffer
 - implied **byte_test.string**: convert from string
 - string **classifications[].name**: name used with classtype rule option
 - int **classifications[].priority** = 1: default priority for class { 0: }
 - string **classifications[].text**: description of class
 - string **classtype.~**: classification for this rule
 - string **content.~data**: data to match
 - string **content.depth**: var or maximum number of bytes to search from beginning of buffer
 - string **content.distance**: var or number of bytes from cursor to start search
 - int **content.fast_pattern_length**: maximum number of characters from this content the fast pattern matcher should use { 1: }
 - int **content.fast_pattern_offset** = 0: number of leading characters of this content the fast pattern matcher should exclude { 0: }
 - implied **content.fast_pattern**: use this content in the fast pattern matcher instead of the content selected by default
 - implied **content.nocase**: case insensitive match
 - string **content.offset**: var or number of bytes from start of buffer to start search
 - string **content.within**: var or maximum number of bytes to search from cursor
-

- implied **cvts.invalid-entry**: looks for an invalid Entry string
 - string **daq.input_spec**: input specification
 - int **daq.instances[].id**: instance ID (required) { 0: }
 - string **daq.instances[].input_spec**: input specification
 - string **daq.instances[].variables[].str**: string parameter
 - string **daq.module**: DAQ module to use
 - string **daq.module_dirs[].str**: string parameter
 - bool **daq.no_promisc** = false: whether to put DAQ device into promiscuous mode
 - int **daq.snaplen**: set snap length (same as -s) { 0:65535 }
 - string **daq.variables[].str**: string parameter
 - select **data_log.key** = http_raw_uri: name of data buffer to log { http_uri | http_raw_uri }
 - implied **dce_iface.any_frag**: match on any fragment
 - string **dce_iface.uuid**: match given dcerpc uuid
 - string **dce_iface.version**: interface version
 - string **dce_opnum.~**: match given dcerpc operation number, range or list
 - bool **dce_smb.disable_defrag** = false: Disable DCE/RPC defragmentation
 - int **dce_smb.max_frag_len** = 65535: Maximum fragment size for defragmentation { 1514:65535 }
 - enum **dce_smb.policy** = WinXP: Target based policy to use { Win2000 | WinXP | WinVista | Win2003 | Win2008 | Win7 | Samba | Samba-3.0.37 | Samba-3.0.22 | Samba-3.0.20 }
 - int **dce_smb.reassemble_threshold** = 0: Minimum bytes received before performing reassembly { 0:65535 }
 - int **dce_smb.smb_file_depth** = 16384: SMB file depth for file data { -1: }
 - enum **dce_smb.smb_file_inspection** = off: SMB file inspection { off | on | only }
 - enum **dce_smb.smb_fingerprint_policy** = none: Target based SMB policy to use { none | client | server | both }
 - string **dce_smb.smb_invalid_shares**: SMB shares to alert on
 - bool **dce_smb.smb_legacy_mode** = false: inspect only SMBv1
 - int **dce_smb.smb_max_chain** = 3: SMB max chain size { 0:255 }
 - int **dce_smb.smb_max_compound** = 3: SMB max compound size { 0:255 }
 - multi **dce_smb.valid_smb_versions** = all: Valid SMB versions { v1 | v2 | all }
 - bool **dce_tcp.disable_defrag** = false: Disable DCE/RPC defragmentation
 - int **dce_tcp.max_frag_len** = 65535: Maximum fragment size for defragmentation { 1514:65535 }
 - enum **dce_tcp.policy** = WinXP: Target based policy to use { Win2000 | WinXP | WinVista | Win2003 | Win2008 | Win7 | Samba | Samba-3.0.37 | Samba-3.0.22 | Samba-3.0.20 }
 - int **dce_tcp.reassemble_threshold** = 0: Minimum bytes received before performing reassembly { 0:65535 }
 - bool **dce_udp.disable_defrag** = false: Disable DCE/RPC defragmentation
 - int **dce_udp.max_frag_len** = 65535: Maximum fragment size for defragmentation { 1514:65535 }
 - int **detection.asn1** = 256: maximum decode nodes { 1: }
-

- int **detection_filter.count**: hits in interval before allowing the rule to fire { 1: }
 - int **detection_filter.seconds**: length of interval to count hits { 1: }
 - enum **detection_filter.track**: track hits by source or destination IP address { by_src | by_dst }
 - bool **detection.pcre_enable** = true: disable pcre pattern matching
 - int **detection.pcre_match_limit** = 1500: limit pcre backtracking, -1 = max, 0 = off { -1:1000000 }
 - int **detection.pcre_match_limit_recursion** = 1500: limit pcre stack consumption, -1 = max, 0 = off { -1:10000 }
 - bool **dnp3.check_crc** = false: validate checksums in DNP3 link layer frames
 - string **dnp3_func.~**: match dnp3 function code or name
 - string **dnp3_ind.~**: match given dnp3 indicator flags
 - int **dnp3_obj.group** = 0: match given dnp3 object header group { 0:255 }
 - int **dnp3_obj.var** = 0: match given dnp3 object header var { 0:255 }
 - int **dpx.max** = 0: maximum payload before alert { 0:65535 }
 - port **dpx.port**: port to check
 - string **dsize.~range**: check if packet payload size is *size* | *min*<>*max* | <*max* | >*min*
 - bool **esp.decode_esp** = false: enable for inspection of esp traffic that has authentication but not encryption
 - int **event_filter[].count** = 0: number of events in interval before tripping; -1 to disable { -1: }
 - int **event_filter[].gid** = 1: rule generator ID { 0: }
 - string **event_filter[].ip**: restrict filter to these addresses according to track
 - int **event_filter[].seconds** = 0: count interval { 0: }
 - int **event_filter[].sid** = 1: rule signature ID { 0: }
 - enum **event_filter[].track**: filter only matching source or destination addresses { by_src | by_dst }
 - enum **event_filter[].type**: 1st count events | every count events | once after count events { limit | threshold | both }
 - int **event_queue.log** = 3: maximum events to log { 1: }
 - int **event_queue.max_queue** = 8: maximum events to queue { 1: }
 - enum **event_queue.order_events** = content_length: criteria for ordering incoming events { priority | content_length }
 - bool **event_queue.process_all_events** = false: process just first action group or all action groups
 - string **file_connector.connector**: connector name
 - enum **file_connector.direction**: usage { receive | transmit | duplex }
 - enum **file_connector.format**: file format { binary | text }
 - string **file_connector.name**: channel name
 - int **file_id.block_timeout** = 86400: stop blocking after this many seconds { 0: }
 - bool **file_id.block_timeout_lookup** = false: block if lookup times out
 - int **file_id.capture_block_size** = 32768: file capture block size in bytes { 8: }
 - int **file_id.capture_max_size** = 1048576: stop file capture beyond this point { 0: }
 - int **file_id.capture_memcap** = 100: memcap for file capture in megabytes { 0: }
-

- int **file_id.capture_min_size** = 0: stop file capture if file size less than this { 0: }
 - bool **file_id.enable_capture** = false: enable file capture
 - bool **file_id.enable_signature** = false: enable signature calculation
 - bool **file_id.enable_type** = false: enable type ID
 - bool **file_id.file_policy[].use.enable_file_capture** = false: true/false → enable/disable file capture
 - bool **file_id.file_policy[].use.enable_file_signature** = false: true/false → enable/disable file signature
 - bool **file_id.file_policy[].use.enable_file_type** = false: true/false → enable/disable file type identification
 - enum **file_id.file_policy[].use.verdict** = unknown: what to do with matching traffic { unknown | log | stop | block | reset }
 - int **file_id.file_policy[].when.file_type_id** = 0: unique ID for file type in file magic rule { 0: }
 - string **file_id.file_policy[].when.sha256**: SHA 256
 - string **file_id.file_rules[].category**: file type category
 - int **file_id.file_rules[].id** = 0: file type id { 0: }
 - string **file_id.file_rules[].magic[].content**: file magic content
 - int **file_id.file_rules[].magic[].offset** = 0: file magic offset { 0: }
 - string **file_id.file_rules[].msg**: information about the file type
 - int **file_id.file_rules[].rev** = 0: rule revision { 0: }
 - string **file_id.file_rules[].type**: file type name
 - string **file_id.file_rules[].version**: file type version
 - int **file_id.lookup_timeout** = 2: give up on lookup after this many seconds { 0: }
 - int **file_id.max_files_cached** = 65536: maximal number of files cached in memory { 8: }
 - int **file_id.show_data_depth** = 100: print this many octets { 0: }
 - int **file_id.signature_depth** = 10485760: stop signature at this point { 0: }
 - bool **file_id.trace_signature** = false: enable runtime dump of signature info
 - bool **file_id.trace_stream** = false: enable runtime dump of file data
 - bool **file_id.trace_type** = false: enable runtime dump of type info
 - int **file_id.type_depth** = 1460: stop type ID at this point { 0: }
 - bool **file_log.log_pkt_time** = true: log the packet time when event generated
 - bool **file_log.log_sys_time** = false: log the system time when event generated
 - string **file_type.~**: list of file type IDs to match
 - string **flags.~mask_flags**: these flags are don't cares
 - string **flags.~test_flags**: these flags are tested
 - string **flowbits.~arg1**: bits or group
 - string **flowbits.~arg2**: group if arg1 is bits
 - string **flowbits.~command**: set|reset|isset|etc.
 - implied **flow.established**: match only during data transfer phase
-

- implied **flow.from_client**: same as to_server
 - implied **flow.from_server**: same as to_client
 - implied **flow.no_frag**: match on raw packets only
 - implied **flow.no_stream**: match on raw packets only
 - implied **flow.not_established**: match only outside data transfer phase
 - implied **flow.only_frag**: match on defragmented packets only
 - implied **flow.only_stream**: match on reassembled packets only
 - implied **flow.stateless**: match regardless of stream state
 - implied **flow.to_client**: match on server responses
 - implied **flow.to_server**: match on client requests
 - string **fragbits.flags**: these flags are tested
 - string **fragoffset.range**: check if ip fragment offset value is *value* | *min*<>*max* | <*max* | >*min*
 - bool **ftp_client.bounce** = false: check for bounces
 - addr **ftp_client.bounce_to[].address** = 1.0.0.0/32: allowed ip address in CIDR format
 - port **ftp_client.bounce_to[].last_port**: optional allowed range from port to last_port inclusive { 0: }
 - port **ftp_client.bounce_to[].port** = 20: allowed port { 1: }
 - bool **ftp_client.ignore_telnet_erase_cmds** = false: ignore erase character and erase line commands when normalizing
 - int **ftp_client.max_resp_len** = -1: maximum ftp response accepted by client { -1: }
 - bool **ftp_client.telnet_cmds** = false: detect telnet escape sequences on ftp control channel
 - bool **ftp_server.check_encrypted** = false: check for end of encryption
 - string **ftp_server.chk_str_fmt**: check the formatting of the given commands
 - string **ftp_server.cmd_validity[].command**: command string
 - string **ftp_server.cmd_validity[].format**: format specification
 - int **ftp_server.cmd_validity[].length** = 0: specify non-default maximum for command { 0: }
 - string **ftp_server.data_chan_cmds**: check the formatting of the given commands
 - string **ftp_server.data_rest_cmds**: check the formatting of the given commands
 - string **ftp_server.data_xfer_cmds**: check the formatting of the given commands
 - int **ftp_server.def_max_param_len** = 100: default maximum length of commands handled by server; 0 is unlimited { 1: }
 - string **ftp_server.directory_cmds[].dir_cmd**: directory command
 - int **ftp_server.directory_cmds[].rsp_code** = 200: expected successful response code for command { 200: }
 - string **ftp_server.encl_cmds**: check the formatting of the given commands
 - bool **ftp_server.encrypted_traffic** = false: check for encrypted telnet and ftp
 - string **ftp_server.file_get_cmds**: check the formatting of the given commands
 - string **ftp_server.file_put_cmds**: check the formatting of the given commands
 - string **ftp_server.ftp_cmds**: specify additional commands supported by server beyond RFC 959
-

- bool **ftp_server.ignore_data_chan** = false: do not inspect ftp data channels
 - bool **ftp_server.ignore_telnet_erase_cmds** = false: ignore erase character and erase line commands when normalizing
 - string **ftp_server.login_cmds**: check the formatting of the given commands
 - bool **ftp_server.print_cmds** = false: print command configurations on start up
 - bool **ftp_server.telnet_cmds** = false: detect telnet escape sequences of ftp control channel
 - int **gid.~**: generator id { 1: }
 - string **gtp_info.~**: info element to match
 - int **gtp_inspect[].infos[].length** = 0: information element type code { 0:255 }
 - string **gtp_inspect[].infos[].name**: information element name
 - int **gtp_inspect[].infos[].type** = 0: information element type code { 0:255 }
 - string **gtp_inspect[].messages[].name**: message name
 - int **gtp_inspect[].messages[].type** = 0: message type code { 0:255 }
 - int **gtp_inspect[].version** = 2: gtp version { 0:2 }
 - string **gtp_type.~**: list of types to match
 - int **gtp_version.~**: version to match { 0:2 }
 - bool **high_availability.daq_channel** = false: enable use of daq data plane channel
 - bool **high_availability.enable** = false: enable high availability
 - real **high_availability.min_age** = 1.0: minimum session life before HA updates { 0.0:100.0 }
 - real **high_availability.min_sync** = 1.0: minimum interval between HA updates { 0.0:100.0 }
 - bit_list **high_availability.ports**: side channel message port list { 65535 }
 - int **host_cache[].size**: size of host cache
 - enum **hosts[].frag_policy**: defragmentation policy { first | linux | bsd | bsd_right | last | windows | solaris }
 - addr **hosts[].ip** = 0.0.0.0/32: hosts address / cidr
 - string **hosts[].services[].name**: service identifier
 - port **hosts[].services[].port**: port number
 - enum **hosts[].services[].proto** = tcp: ip protocol { tcp | udp }
 - enum **hosts[].tcp_policy**: tcp reassembly policy { first | last | linux | old_linux | bsd | macos | solaris | irix | hpux11 | hpux10 | windows | win_2003 | vista | proxy }
 - enum **host_tracker[].frag_policy**: defragmentation policy { first | linux | bsd | bsd_right | last | windows | solaris }
 - addr **host_tracker[].ip** = 0.0.0.0/32: hosts address / cidr
 - string **host_tracker[].services[].name**: service identifier
 - port **host_tracker[].services[].port**: port number
 - enum **host_tracker[].services[].proto** = tcp: ip protocol { tcp | udp }
 - enum **host_tracker[].tcp_policy**: tcp reassembly policy { first | last | linux | old_linux | bsd | macos | solaris | irix | hpux11 | hpux10 | windows | win_2003 | vista | proxy }
 - int **http_global.compress_depth** = 65535: maximum amount of packet payload to decompress { 1:65535 }
-

- int **http_global.decode.b64_decode_depth** = 0: single packet decode depth { -1:65535 }
 - int **http_global.decode.bitenc_decode_depth** = 0: single packet decode depth { -1:65535 }
 - int **http_global.decode.max_mime_mem** = 838860: single packet decode depth { 3276: }
 - int **http_global.decode.qp_decode_depth** = 0: single packet decode depth { -1:65535 }
 - int **http_global.decode.uu_decode_depth** = 0: single packet decode depth { -1:65535 }
 - int **http_global.decompress_depth** = 65535: maximum amount of decompressed data to process { 1:65535 }
 - bool **http_global.detect_anomalous_servers** = false: inspect non-configured ports for HTTP - bad idea
 - int **http_global.max_gzip_mem** = 0: disregard - not implemented { 0: }
 - int **http_global.memcap** = 0: disregard - not implemented { 0: }
 - bool **http_global.proxy_alert** = false: alert on proxy usage for servers without allow_proxy_use
 - int **http_global.unicode_map.code_page** = 1252: select code page in map file { 0: }
 - string **http_global.unicode_map.map_file**: unicode map file
 - string **http_header.~name**: restrict to given header
 - bool **http_inspect.backslash_to_slash** = false: replace \ with / when normalizing URIs
 - bit_list **http_inspect.bad_characters**: alert when any of specified bytes are present in URI after percent decoding { 255 }
 - bool **http_inspect.decompress_pdf** = false: decompress pdf files in response bodies
 - bool **http_inspect.decompress_swf** = false: decompress swf files in response bodies
 - string **http_inspect.ignore_unreserved**: do not alert when the specified unreserved characters are percent-encoded in a URI. Unreserved characters are 0-9, a-z, A-Z, period, underscore, tilde, and minus. { (optional) }
 - bool **http_inspect.iis_double_decode** = false: perform double decoding of percent encodings to normalize characters
 - int **http_inspect.iis_unicode_code_page** = 1252: code page to use from the IIS unicode map file { 0:65535 }
 - bool **http_inspect.iis_unicode** = false: use IIS unicode code point mapping to normalize characters
 - string **http_inspect.iis_unicode_map_file**: file containing code points for IIS unicode. { (optional) }
 - int **http_inspect.max_javascript_whitespaces** = 200: maximum consecutive whitespaces allowed within the Javascript obfuscated data { 1:65535 }
 - bool **http_inspect.normalize_javascript** = false: normalize javascript in response bodies
 - bool **http_inspect.normalize_utf** = true: normalize charset utf encodings in response bodies
 - int **http_inspect.oversize_dir_length** = 300: maximum length for URL directory { 1:65535 }
 - bool **http_inspect.percent_u** = false: normalize %uNNNN and %UNNNN encodings
 - bool **http_inspect.plus_to_space** = true: replace + with <sp> when normalizing URIs
 - int **http_inspect.print_amount** = 1200: number of characters to print from a Field { 1:1000000 }
 - bool **http_inspect.print_hex** = false: nonprinting characters printed in [HH] format instead of using an asterisk
 - int **http_inspect.request_depth** = -1: maximum request message body bytes to examine (-1 no limit) { -1: }
 - int **http_inspect.response_depth** = -1: maximum response message body bytes to examine (-1 no limit) { -1: }
 - bool **http_inspect.show_pegs** = true: display peg counts with test output
 - bool **http_inspect.simplify_path** = true: reduce URI directory path to simplest form
-

- bool **http_inspect.test_input** = false: read HTTP messages from text file
 - bool **http_inspect.test_output** = false: print out HTTP section data
 - bool **http_inspect.unzip** = true: decompress gzip and deflate message bodies
 - bool **http_inspect.utf8_bare_byte** = false: when doing UTF-8 character normalization include bytes that were not percent encoded
 - bool **http_inspect.utf8** = true: normalize 2-byte and 3-byte UTF-8 characters to a single byte
 - implied **http_raw_request.with_body**: parts of this rule examine HTTP message body
 - implied **http_raw_request.with_trailer**: parts of this rule examine HTTP message trailers
 - implied **http_raw_status.with_body**: parts of this rule examine HTTP message body
 - implied **http_raw_status.with_trailer**: parts of this rule examine HTTP message trailers
 - implied **http_raw_trailer.request**: match against the trailers from the request message even when examining the response
 - implied **http_raw_trailer.with_body**: parts of this rule examine HTTP response message body (must be combined with request)
 - implied **http_raw_trailer.with_header**: parts of this rule examine HTTP response message headers (must be combined with request)
 - bool **http_server.allow_proxy_use** = false: don't alert on proxy use for this server
 - bool **http_server.decompress_pdf** = false: enable decompression of the compressed portions of PDF files
 - bool **http_server.decompress_swf** = false: enable decompression of SWF (Adobe Flash content)
 - bool **http_server.enable_cookies** = true: extract cookies
 - bool **http_server.enable_xff** = false: log True-Client-IP and X-Forwarded-For headers with unified2 alerts as extra data
 - bool **http_server.extended_ascii_uri** = false: allow extended ASCII codes in the request URI
 - bool **http_server.extended_response_inspection** = true: extract response headers
 - string **http_server.http_methods** = GET POST PUT SEARCH MKCOL COPY MOVE LOCK UNLOCK NOTIFY POLL BCOPY BDELETE BMOVE LINK UNLINK OPTIONS HEAD DELETE TRACE TRACK CONNECT SOURCE SUBSCRIBE UNSUBSCRIBE PROPFIND PROPPATCH BPROPFIND BPROPPATCH RPC_CONNECT PROXY_SUCCESS BITS_POST CCM_POST SMS_POST RPC_IN_DATA RPC_OUT_DATA RPC_ECHO_DATA: request methods allowed in addition to GET and POST
 - bool **http_server.inspect_gzip** = true: enable gzip decompression of compressed bodies
 - bool **http_server.inspect_uri_only** = false: disable all detection except for uricontent
 - bool **http_server.log_hostname** = false: enable logging of Hostname with unified2 alerts as extra data
 - bool **http_server.log_uri** = false: enable logging of URI with unified2 alerts as extra data
 - bit_list **http_server.non_rfc_chars** = 0x00 0x01 0x02 0x03 0x04 0x05 0x06 0x07: alert on given non-RFC chars being present in the URI { 255 }
 - bool **http_server.no_pipeline_req** = false: don't inspect pipelined requests after first (still does general detection)
 - bool **http_server.normalize_cookies** = false: normalize cookies similar to URI
 - bool **http_server.normalize_headers** = false: normalize headers other than cookie similar to URI
 - int **http_server.oversize_dir_length** = 500: alert if a URL has a directory longer than this limit { 0: }
 - bool **http_server.profile.apache_whitespace** = false: don't alert if tab is used in lieu of space characters
-

- bool **http_server.profile.ascii** = false: enable decoding ASCII like %2f to /
 - bool **http_server.profile.bare_byte** = false: decode non-standard, non-ASCII character encodings
 - int **http_server.profile.chunk_length** = 500000: alert on chunk lengths greater than specified { 1: }
 - int **http_server.profile.client_flow_depth** = 0: raw request payload to inspect { -1:1460 }
 - bool **http_server.profile.directory** = false: normalize . and .. sequences out of URI
 - bool **http_server.profile.double_decode** = false: iis specific extra decoding
 - bool **http_server.profile.iis_backslash** = false: normalize directory slashes
 - bool **http_server.profile.iis_delimiter** = false: allow use of non-standard delimiter
 - bool **http_server.profile.iis_unicode** = false: enable unicode code point mapping using unicode_map settings
 - int **http_server.profile.iis_unicode_map.code_page** = 1252: select code page in map file { 0: }
 - string **http_server.profile.iis_unicode_map.map_file**: unicode map file
 - int **http_server.profile.max_header_length** = 750: maximum allowed client request header field { 0:65535 }
 - int **http_server.profile.max_headers** = 100: maximum allowed client request headers { 0:1024 }
 - int **http_server.profile.max_javascript_whitespaces** = 200: maximum number of consecutive whitespaces { 0: }
 - int **http_server.profile.max_spaces** = 200: maximum allowed whitespaces when folding { 0:65535 }
 - bool **http_server.profile.multi_slash** = false: normalize out consecutive slashes in URI
 - bool **http_server.profile.non_strict** = true: allows HTTP 0.9 processing
 - bool **http_server.profile.normalize_javascript** = true: normalize javascript between <script> tags
 - bool **http_server.profile.normalize_utf** = true: normalize response bodies with UTF content-types
 - int **http_server.profile.post_depth** = 65495: amount of POST data to inspect { -1:65535 }
 - enum **http_server.profile.profile_type** = default: set defaults appropriate for selected server { default | apache | iis | iis_40 | iis_50 }
 - int **http_server.profile.server_flow_depth** = 0: response payload to inspect; includes headers with extended_response_inspection { -1:65535 }
 - bool **http_server.profile.u_encode** = true: decode %uXXXX character sequences
 - bool **http_server.profile.utf_8** = false: decode UTF-8 unicode sequences in URI
 - bool **http_server.profile.webroot** = false: alert on directory traversals past the top level (web server root)
 - bit_list **http_server.profile.whitespace_chars**: allowed white space characters { 255 }
 - int **http_server.small_chunk_count** = 5: alert if more than this limit of consecutive chunks are below small_chunk_length { 0:255 }
 - int **http_server.small_chunk_length** = 10: alert if more than small_chunk_count consecutive chunks below this limit { 0:255 }
 - bool **http_server.tab_uri_delimiter** = false: whether a tab not preceded by a space is considered a delimiter or part of URI
 - bool **http_server.unlimited_decompress** = true: decompress across multiple packets
 - bool **http_server.xff_headers** = false: not implemented
 - string **http_trailer.field**: restrict to given trailer
-

- implied **http_trailer.request**: match against the trailers from the request message even when examining the response
 - implied **http_trailer.with_body**: parts of this rule examine HTTP message body (must be combined with request)
 - implied **http_trailer.with_header**: parts of this rule examine HTTP response message headers (must be combined with request)
 - implied **http_version.request**: match against the version from the request message even when examining the response
 - implied **http_version.with_body**: parts of this rule examine HTTP message body
 - implied **http_version.with_trailer**: parts of this rule examine HTTP message trailers
 - string **icmp_id.~range**: check if icmp id is *id* | *min*<>*max* | <*max* | >*min*
 - string **icmp_seq.~range**: check if icmp sequence number is *seq* | *min*<>*max* | <*max* | >*min*
 - string **icode.~range**: check if ICMP code is *code* | *min*<>*max* | <*max* | >*min*
 - string **id.~range**: check if the IP ID is *id* | *min*<>*max* | <*max* | >*min*
 - int **imap.b64_decode_depth** = 1460: base64 decoding depth { -1:65535 }
 - int **imap.bitenc_decode_depth** = 1460: non-Encoded MIME attachment extraction depth { -1:65535 }
 - int **imap.qp_decode_depth** = 1460: quoted Printable decoding depth { -1:65535 }
 - int **imap.uu_decode_depth** = 1460: Unix-to-Unix decoding depth { -1:65535 }
 - select **ipopts.~opt**: output format { *rrleollnopltslseclsecllrrllsrrelssrllsatidlany* }
 - string **ip_proto.~proto**: [*!*|>|<] name or number
 - bool **ips.enable_builtin_rules** = false: enable events from builtin rules w/o stubs
 - int **ips.id** = 0: correlate unified2 events with configuration { 0:65535 }
 - string **ips.include**: legacy snort rules and includes
 - enum **ips.mode**: set policy mode { *tap* | *inline* | *inline-test* }
 - string **ips.rules**: snort rules and includes
 - string **isdataat.~length**: *num* | *!num*
 - implied **isdataat.relative**: offset from cursor instead of start of buffer
 - string **itype.~range**: check if icmp type is *type* | *min*<>*max* | <*max* | >*min*
 - enum **latency.packet.action** = none: event action if packet times out and is fastpathed { *none* | *alert* | *log* | *alert_and_log* }
 - bool **latency.packet.fastpath** = false: fastpath expensive packets (*max_time* exceeded)
 - int **latency.packet.max_time** = 500: set timeout for packet latency thresholding (usec) { 0: }
 - enum **latency.rule.action** = none: event action for rule latency enable and suspend events { *none* | *alert* | *log* | *alert_and_log* }
 - int **latency.rule.max_suspend_time** = 30000: set max time for suspending a rule (ms, 0 means permanently disable rule) { 0: }
 - int **latency.rule.max_time** = 500: set timeout for rule evaluation (usec) { 0: }
 - bool **latency.rule.suspend** = false: temporarily suspend expensive rules
 - int **latency.rule.suspend_threshold** = 5: set threshold for number of timeouts before suspending a rule { 1: }
 - bool **log_codecs.file** = false: output to log_codecs.txt instead of stdout
 - bool **log_codecs.msg** = false: include alert msg
-

- bool **log_hex.file** = false: output to log_hex.txt instead of stdout
 - int **log_hex.limit** = 0: set limit (0 is unlimited) { 0: }
 - bool **log_hex.raw** = false: output all full packets if true, else just TCP payload
 - enum **log_hex.units** = B: bytes | KB | MB | GB { B | K | M | G }
 - int **log_hex.width** = 20: set line width (0 is unlimited) { 0: }
 - int **log_pcap.limit** = 0: set limit (0 is unlimited) { 0: }
 - enum **log_pcap.units** = B: bytes | KB | MB | GB { B | K | M | G }
 - string **md5.hash**: data to match
 - int **md5.length**: number of octets in plain text { 1:65535 }
 - string **md5.offset**: var or number of bytes from start of buffer to start search
 - implied **md5.relative** = false: offset from cursor instead of start of buffer
 - int **memory.cap** = 0: set the per-packet-thread cap on memory (bytes, 0 to disable) { 0: }
 - bool **memory.soft** = false: always succeed in allocating memory, even if above the cap
 - int **memory.threshold** = 0: set the per-packet-thread threshold for preemptive cleanup actions (percent, 0 to disable) { 0: }
 - string **metadata.***: additional parameters not used by snort
 - string **metadata.service**: service name
 - string **modbus_func.~**: function code to match
 - int **modbus_unit.~**: modbus unit ID { 0:255 }
 - bool **mpls.enable_mpls_multicast** = false: enables support for MPLS multicast
 - bool **mpls.enable_mpls_overlapping_ip** = false: enable if private network addresses overlap and must be differentiated by MPLS label(s)
 - int **mpls.max_mpls_stack_depth** = -1: set MPLS stack depth { -1: }
 - enum **mpls.mpls_payload_type** = ip4: set encapsulated payload type { eth | ip4 | ip6 }
 - string **msg.~**: message describing rule
 - multi **network.checksum_drop** = none: drop if checksum is bad { all | ip | noip | tcp | notcp | udp | noudp | icmp | noicmp | none }
 - multi **network.checksum_eval** = none: checksums to verify { all | ip | noip | tcp | notcp | udp | noudp | icmp | noicmp | none }
 - bool **network.decode_drops** = false: enable dropping of packets by the decoder
 - int **network.id** = 0: correlate unified2 events with configuration { 0:65535 }
 - int **network.layers** = 40: the maximum number of protocols that Snort can correctly decode { 3:255 }
 - int **network.max_ip6_extensions** = 0: the maximum number of IP6 options Snort will process for a given IPv6 layer before raising 116:456 (0 = unlimited) { 0:255 }
 - int **network.max_ip_layers** = 0: the maximum number of IP layers Snort will process for a given packet before raising 116:293 (0 = unlimited) { 0:255 }
 - int **network.min_ttl** = 1: alert / normalize packets with lower ttl / hop limit (you must enable rules and / or normalization also) { 1:255 }
 - int **network.new_ttl** = 1: use this value for responses and when normalizing { 1:255 }
-

- bool **normalizer.icmp4** = false: clear reserved flag
 - bool **normalizer.icmp6** = false: clear reserved flag
 - bool **normalizer.ip4.base** = true: clear options
 - bool **normalizer.ip4.df** = false: clear don't frag flag
 - bool **normalizer.ip4.rf** = false: clear reserved flag
 - bool **normalizer.ip4.tos** = false: clear tos / differentiated services byte
 - bool **normalizer.ip4.trim** = false: truncate excess payload beyond datagram length
 - bool **normalizer.ip6** = false: clear reserved flag
 - string **normalizer.tcp.allow_codes**: don't clear given option codes
 - multi **normalizer.tcp.allow_names**: don't clear given option names { sack | echo | partial_order | conn_count | alt_checksum | md5 }
 - bool **normalizer.tcp.base** = true: clear reserved bits and option padding and fix urgent pointer / flags issues
 - bool **normalizer.tcp.block** = true: allow packet drops during TCP normalization
 - select **normalizer.tcp.ecn** = off: clear ecn for all packets | sessions w/o ecn setup { off | packet | stream }
 - bool **normalizer.tcp.ips** = false: ensure consistency in retransmitted data
 - bool **normalizer.tcp.opts** = true: clear all options except mss, wscale, timestamp, and any explicitly allowed
 - bool **normalizer.tcp.pad** = true: clear any option padding bytes
 - bool **normalizer.tcp.req_pay** = true: clear the urgent pointer and the urgent flag if there is no payload
 - bool **normalizer.tcp.req_urg** = true: clear the urgent pointer if the urgent flag is not set
 - bool **normalizer.tcp.req_urp** = true: clear the urgent flag if the urgent pointer is not set
 - bool **normalizer.tcp.rsv** = true: clear the reserved bits in the TCP header
 - bool **normalizer.tcp.trim** = false: enable all of the TCP trim options
 - bool **normalizer.tcp.trim_mss** = false: trim data to MSS
 - bool **normalizer.tcp.trim_rst** = false: remove any data from RST packet
 - bool **normalizer.tcp.trim_syn** = false: remove data on SYN
 - bool **normalizer.tcp.trim_win** = false: trim data to window
 - bool **normalizer.tcp.urp** = true: adjust urgent pointer if beyond segment length
 - bool **output.dump_chars_only** = false: turns on character dumps (same as -C)
 - bool **output.dump_payload** = false: dumps application layer (same as -d)
 - bool **output.dump_payload_verbose** = false: dumps raw packet starting at link layer (same as -X)
 - int **output.event_trace.max_data** = 0: maximum amount of packet data to capture { 0:65535 }
 - string **output.logdir** = .: where to put log files (same as -l)
 - bool **output.log_ipv6_extra_data** = false: log IPv6 source and destination addresses as unified2 extra data records
 - bool **output.obfuscate** = false: obfuscate the logged IP addresses (same as -O)
 - bool **output.obfuscate_pii** = false: mask all but the last 4 characters of credit card and social security numbers
-

- bool **output.quiet** = false: suppress non-fatal information (still show alerts, same as -q)
 - bool **output.show_year** = false: include year in timestamp in the alert and log files (same as -y)
 - int **output.tagged_packet_limit** = 256: maximum number of packets tagged for non-packet metrics { 0: }
 - bool **output.verbose** = false: be verbose (same as -v)
 - bool **packet_capture.enable** = false: initially enable packet dumping
 - string **packet_capture.filter**: bpf filter to use for packet dump
 - bool **packets.address_space_agnostic** = false: determines whether DAQ address space info is used to track fragments and connections
 - string **packets.bpf_file**: file with BPF to select traffic for Snort
 - int **packets.limit** = 0: maximum number of packets to process before stopping (0 is unlimited) { 0: }
 - int **packets.skip** = 0: number of packets to skip before before processing { 0: }
 - bool **packets.vlan_agnostic** = false: determines whether VLAN info is used to track fragments and connections
 - string **pcr.~re**: Snort regular expression
 - bool **perf_monitor.base** = true: enable base statistics { nullptr }
 - bool **perf_monitor.cpu** = false: enable cpu statistics { nullptr }
 - bool **perf_monitor.flow** = false: enable traffic statistics
 - bool **perf_monitor.flow_ip** = false: enable statistics on host pairs
 - int **perf_monitor.flow_ip_memcap** = 52428800: maximum memory in bytes for flow tracking { 8200: }
 - int **perf_monitor.flow_ports** = 1023: maximum ports to track { 0:65535 }
 - enum **perf_monitor.format** = csv: output format for stats { csv | text }
 - int **perf_monitor.max_file_size** = 1073741824: files will be rolled over if they exceed this size { 4096: }
 - string **perf_monitor.modules[].name**: name of the module
 - string **perf_monitor.modules[].pegs**: list of statistics to track or empty for all counters
 - enum **perf_monitor.output** = file: output location for stats { file | console }
 - int **perf_monitor.packets** = 10000: minimum packets to report { 0: }
 - int **perf_monitor.seconds** = 60: report interval { 1: }
 - bool **perf_monitor.summary** = false: output summary at shutdown
 - string **pkt_num.~range**: check if packet number is in given range
 - int **pop.b64_decode_depth** = 1460: base64 decoding depth { -1:65535 }
 - int **pop.bitenc_decode_depth** = 1460: Non-Encoded MIME attachment extraction depth { -1:65535 }
 - int **pop.qp_decode_depth** = 1460: Quoted Printable decoding depth { -1:65535 }
 - int **pop.uu_decode_depth** = 1460: Unix-to-Unix decoding depth { -1:65535 }
 - int **port_scan_global.memcap** = 1048576: maximum tracker memory in bytes { 1: }
 - string **port_scan.ignore_scanned**: list of CIDRs with optional ports to ignore if the destination of scan alerts
 - string **port_scan.ignore_scanners**: list of CIDRs with optional ports to ignore if the source of scan alerts
-

- bool **port_scan.include_midstream** = false: list of CIDRs with optional ports
 - bool **port_scan.logfile** = false: write scan events to file
 - multi **port_scan.protos** = all: choose the protocols to monitor { tcp | udp | icmp | ip | all }
 - multi **port_scan.scan_types** = all: choose type of scans to look for { portscan | portsweep | decoy_portscan | distributed_portscan | all }
 - enum **port_scan.sense_level** = medium: choose the level of detection { low | medium | high }
 - string **port_scan.watch_ip**: list of CIDRs with optional ports to watch
 - int **priority.~**: relative severity level; 1 is highest priority { 1: }
 - string **process.chroot**: set chroot directory (same as -t)
 - bool **process.daemon** = false: fork as a daemon (same as -D)
 - bool **process.dirty_pig** = false: shutdown without internal cleanup
 - string **process.set_gid**: set group ID (same as -g)
 - string **process.set_uid**: set user ID (same as -u)
 - string **process.threads[].cpuset**: pin the associated thread to this cpuset
 - int **process.threads[].thread** = 0: set cpu affinity for the <cur_thread_num> thread that runs { 0: }
 - string **process.umask**: set process umask (same as -m)
 - bool **process.utc** = false: use UTC instead of local time for timestamps
 - int **profiler.memory.count** = 0: limit results to count items per level (0 = no limit) { 0: }
 - int **profiler.memory.max_depth** = -1: limit depth to max_depth (-1 = no limit) { -1: }
 - bool **profiler.memory.show** = true: show module memory profile stats
 - enum **profiler.memory.sort** = total_used: sort by given field { none | allocations | total_used | avg_allocation }
 - int **profiler.modules.count** = 0: limit results to count items per level (0 = no limit) { 0: }
 - int **profiler.modules.max_depth** = -1: limit depth to max_depth (-1 = no limit) { -1: }
 - bool **profiler.modules.show** = true: show module time profile stats
 - enum **profiler.modules.sort** = total_time: sort by given field { none | checks | avg_check | total_time }
 - int **profiler.rules.count** = 0: print results to given level (0 = all) { 0: }
 - bool **profiler.rules.show** = true: show rule time profile stats
 - enum **profiler.rules.sort** = total_time: sort by given field { none | checks | avg_check | total_time | matches | no_matches | avg_match | avg_no_match }
 - string **rate_filter[].apply_to**: restrict filter to these addresses according to track
 - int **rate_filter[].count** = 1: number of events in interval before tripping { 0: }
 - int **rate_filter[].gid** = 1: rule generator ID { 0: }
 - enum **rate_filter[].new_action** = alert: take this action on future hits until timeout { log | pass | alert | drop | block | reset }
 - int **rate_filter[].seconds** = 1: count interval { 0: }
 - int **rate_filter[].sid** = 1: rule signature ID { 0: }
 - int **rate_filter[].timeout** = 1: count interval { 0: }
-

- enum **rate_filter[].track** = by_src: filter only matching source or destination addresses { by_src | by_dst | by_rule }
 - bool **react.msg** = false: use rule msg in response page instead of default message
 - string **react.page**: file containing HTTP response (headers and body)
 - string **reference.~id**: reference id
 - string **reference.~scheme**: reference scheme
 - string **references[].name**: name used with reference rule option
 - string **references[].url**: where this reference is defined
 - implied **regex.dotall**: matching a . will not exclude newlines
 - implied **regex.multiline**: ^ and \$ anchors match any newlines in data
 - implied **regex.nocase**: case insensitive match
 - string **regex.~re**: hyperscan regular expression
 - implied **regex.relative**: start search from end of last match instead of start of buffer
 - enum **reject.control**: send icmp unreachable(s) { network|host|port|all }
 - enum **reject.reset**: send tcp reset to one or both ends { source|dest|both }
 - string **rem.~**: comment
 - string **replace.~**: byte code to replace with
 - string **reputation.blacklist**: blacklist file name with ip lists
 - int **reputation.memcap** = 500: maximum total MB of memory allocated { 1:4095 }
 - enum **reputation.nested_ip** = inner: ip to use when there is IP encapsulation { inner|outer|all }
 - enum **reputation.priority** = whitelist: defines priority when there is a decision conflict during run-time { blacklist|whitelist }
 - bool **reputation.scan_local** = false: inspect local address defined in RFC 1918
 - string **reputation.whitelist**: whitelist file name with ip lists
 - enum **reputation.white** = unblack: specify the meaning of whitelist { unblack|trust }
 - int **rev.~**: revision { 1: }
 - bool **rewrite.disable_replace** = false: disable replace of packet contents with rewrite rules
 - int **rpc.~app**: application number
 - int **rpc.proc**: procedure number or * for any
 - int **rpc.ver**: version number or * for any
 - bool **rule_state.enable** = true: enable or disable rule in all policies
 - int **rule_state.gid** = 0: rule generator ID { 0: }
 - int **rule_state.sid** = 0: rule signature ID { 0: }
 - string **sd_pattern.~pattern**: The pattern to search for
 - int **sd_pattern.threshold**: number of matches before alerting { 1 }
 - int **search_engine.bleedover_port_limit** = 1024: maximum ports in rule before demotion to any-any port group { 1: }
 - bool **search_engine.bleedover_warnings_enabled** = false: print warning if a rule is demoted to any-any port group
-

- bool **search_engine.debug** = false: print verbose fast pattern info
- bool **search_engine.debug_print_nocontent_rule_tests** = false: print rule group info during packet evaluation
- bool **search_engine.debug_print_rule_group_build_details** = false: print rule group info during compilation
- bool **search_engine.debug_print_rule_groups_compiled** = false: prints compiled rule group information
- bool **search_engine.debug_print_rule_groups_uncompiled** = false: prints uncompiled rule group information
- bool **search_engine.enable_single_rule_group** = false: put all rules into one group
- bool **search_engine.inspect_stream_inserts** = false: inspect reassembled payload - disabling is good for performance, bad for detection
- int **search_engine.max_pattern_len** = 0: truncate patterns when compiling into state machine (0 means no maximum) { 0: }
- int **search_engine.max_queue_events** = 5: maximum number of matching fast pattern states to queue per packet
- dynamic **search_engine.search_method** = ac_bnfa: set fast pattern algorithm - choose available search engine { ac_banded | ac_bnfa | ac_full | ac_sparse | ac_sparse_bands | ac_std | hyperscan | lowmem }
- bool **search_engine.search_optimize** = true: tweak state machine construction for better performance
- bool **search_engine.show_fast_patterns** = false: print fast pattern info for each rule
- bool **search_engine.split_any_any** = false: evaluate any-any rules separately to save memory
- string **seq.~range**: check if tcp sequence number value is *value* | *min*<>*max* | <*max* | >*min*
- enum **session.~mode**: output format { printable|binary|all }
- string **sha256.~hash**: data to match
- int **sha256.length**: number of octets in plain text { 1:65535 }
- string **sha256.offset**: var or number of bytes from start of buffer to start search
- implied **sha256.relative** = false: offset from cursor instead of start of buffer
- string **sha512.~hash**: data to match
- int **sha512.length**: number of octets in plain text { 1:65535 }
- string **sha512.offset**: var or number of bytes from start of buffer to start search
- implied **sha512.relative** = false: offset from cursor instead of start of buffer
- string **side_channel.connector**: connector handle
- string **side_channel.connectors[].connector**: connector handle
- bit_list **side_channel.ports**: side channel message port list { 65535 }
- int **sid.~**: signature id { 1: }
- bool **sip.ignore_call_channel** = false: enables the support for ignoring audio/video data channel
- int **sip.max_call_id_len** = 256: maximum call id field size { 0:65535 }
- int **sip.max_contact_len** = 256: maximum contact field size { 0:65535 }
- int **sip.max_content_len** = 1024: maximum content length of the message body { 0:65535 }
- int **sip.max_dialogs** = 4: maximum number of dialogs within one stream session { 1:4194303 }
- int **sip.max_from_len** = 256: maximum from field size { 0:65535 }
- int **sip.max_requestName_len** = 20: maximum request name field size { 0:65535 }

- int **sip.max_sessions** = 10000: maximum number of sessions that can be allocated { 1024:4194303 }
 - int **sip.max_to_len** = 256: maximum to field size { 0:65535 }
 - int **sip.max_uri_len** = 256: maximum request uri field size { 0:65535 }
 - int **sip.max_via_len** = 1024: maximum via field size { 0:65535 }
 - string **sip_method.*method**: sip method
 - string **sip.methods** = invite cancel ack bye register options: list of methods to check in sip messages
 - int **sip_stat_code.*code**: stat code { 1:999 }
 - string **smtp.alt_max_command_line_len[].command**: command string
 - int **smtp.alt_max_command_line_len[].length** = 0: specify non-default maximum for command { 0: }
 - string **smtp.auth_cmds**: commands that initiate an authentication exchange
 - int **smtp.b64_decode_depth** = 25: depth used to decode the base64 encoded MIME attachments { -1:65535 }
 - string **smtp.binary_data_cmds**: commands that initiate sending of data and use a length value after the command
 - int **smtp.bitenc_decode_depth** = 25: depth used to extract the non-encoded MIME attachments { -1:65535 }
 - string **smtp.data_cmds**: commands that initiate sending of data with an end of data delimiter
 - int **smtp.email_hdrs_log_depth** = 1464: depth for logging email headers { 0:20480 }
 - bool **smtp.ignore_data** = false: ignore data section of mail
 - bool **smtp.ignore_tls_data** = false: ignore TLS-encrypted data when processing rules
 - string **smtp.invalid_cmds**: alert if this command is sent from client side
 - bool **smtp.log_email_hdrs** = false: log the SMTP email headers extracted from SMTP data
 - bool **smtp.log_filename** = false: log the MIME attachment filenames extracted from the Content-Disposition header within the MIME body
 - bool **smtp.log_mailfrom** = false: log the sender's email address extracted from the MAIL FROM command
 - bool **smtp.log_rcptto** = false: log the recipient's email address extracted from the RCPT TO command
 - int **smtp.max_auth_command_line_len** = 1000: max auth command Line Length { 0:65535 }
 - int **smtp.max_command_line_len** = 0: max Command Line Length { 0:65535 }
 - int **smtp.max_header_line_len** = 0: max SMTP DATA header line { 0:65535 }
 - int **smtp.max_response_line_len** = 0: max SMTP response line { 0:65535 }
 - string **smtp.normalize_cmds**: list of commands to normalize
 - enum **smtp.normalize** = none: turns on/off normalization { none | cmds | all }
 - int **smtp.qp_decode_depth** = 25: quoted-Printable decoding depth { -1:65535 }
 - int **smtp.uu_decode_depth** = 25: unix-to-Unix decoding depth { -1:65535 }
 - string **smtp.valid_cmds**: list of valid commands
 - enum **smtp.xlink2state** = alert: enable/disable xlink2state alert { disable | alert | drop }
 - implied **snort.--alert-before-pass**: process alert, drop, sdrop, or reject before pass; default is pass before alert, drop,...
 - string **snort.-A**: <mode> set alert mode: none, cmg, or alert_*
-

- addr **snort.-B** = 255.255.255.255/32: <mask> obfuscated IP addresses in alerts and packet dumps using CIDR mask
 - string **snort.--bpf**: <filter options> are standard BPF options, as seen in TCPDump
 - string **snort.--c2x**: output hex for given char (see also --x2c)
 - string **snort.--catch-test**: comma separated list of cat unit test tags or *all*
 - string **snort.-c**: <conf> use this configuration
 - implied **snort.-C**: print out payloads with character data only (no hex)
 - implied **snort.--create-pidfile**: create PID file, even when not in Daemon mode
 - string **snort.--daq-dir**: <dir> tell snort where to find desired DAQ
 - implied **snort.--daq-list**: list packet acquisition modules available in optional dir, default is static modules only
 - string **snort.--daq**: <type> select packet acquisition module (default is pcap)
 - string **snort.--daq-var**: <name=value> specify extra DAQ configuration variable
 - implied **snort.-d**: dump the Application Layer
 - implied **snort.--dirty-pig**: don't flush packets on shutdown
 - implied **snort.-D**: run Snort in background (daemon) mode
 - implied **snort.--dump-builtin-rules**: [<module prefix>] output stub rules for selected modules
 - string **snort.--dump-defaults**: [<module prefix>] output module defaults in Lua format { (optional) }
 - implied **snort.--dump-dynamic-rules**: output stub rules for all loaded rules libraries
 - implied **snort.--dump-version**: output the version, the whole version, and only the version
 - implied **snort.-e**: display the second layer header info
 - implied **snort.--enable-inline-test**: enable Inline-Test Mode Operation
 - implied **snort.-f**: turn off fflush() calls after binary log writes
 - int **snort.-G**: <0xid> (same as --logid) { 0:65535 }
 - string **snort.-g**: <gname> run snort gid as <gname> group (or gid) after initialization
 - string **snort.--help-commands**: [<module prefix>] output matching commands { (optional) }
 - string **snort.--help-config**: [<module prefix>] output matching config options { (optional) }
 - string **snort.--help-counts**: [<module prefix>] output matching peg counts { (optional) }
 - implied **snort.--help**: list command line options
 - string **snort.--help-module**: <module> output description of given module
 - implied **snort.--help-modules**: list all available modules with brief help
 - string **snort.--help-options**: <option prefix> output matching command line option quick help (same as -?) { (optional) }
 - implied **snort.--help-plugins**: list all available plugins with brief help
 - implied **snort.--help-signals**: dump available control signals
 - implied **snort.-H**: make hash tables deterministic
 - implied **snort.--id-subdir**: create/use instance subdirectories in logdir instead of instance filename prefix
 - implied **snort.--id-zero**: use id prefix / subdirectory even with one packet thread
-

- string **snort.-i**: <iface>... list of interfaces
 - port **snort.-j**: <port> to listen for telnet connections
 - enum **snort.-k** = all: <mode> checksum mode; default is all { all|no|pl|not|cp|noud|plno|ic|mpl|none }
 - implied **snort.--list-buffers**: output available inspection buffers
 - string **snort.--list-builtin**: <module prefix> output matching builtin rules { (optional) }
 - string **snort.--list-gids**: [<module prefix>] output matching generators { (optional) }
 - string **snort.--list-modules**: [<module type>] list all known modules of given type { (optional) }
 - implied **snort.--list-plugins**: list all known plugins
 - string **snort.-l**: <logdir> log to this directory instead of current directory
 - string **snort.-L**: <mode> logging mode (none, dump, pcap, or log_*)
 - int **snort.--logid**: <0xid> log Identifier to uniquely id events for multiple snorts (same as -G) { 0:65535 }
 - string **snort.--lua**: <chunk> extend/override conf with chunk; may be repeated
 - implied **snort.--markup**: output help in asciidoc compatible format
 - int **snort.--max-packet-threads** = 1: <count> configure maximum number of packet threads (same as -z) { 0: }
 - implied **snort.-M**: log messages to syslog (not alerts)
 - int **snort.-m**: <umask> set umask = <umask> { 0: }
 - int **snort.-n**: <count> stop after count packets { 0: }
 - implied **snort.--nolock-pidfile**: do not try to lock Snort PID file
 - implied **snort.--nostamps**: don't include timestamps in log file names
 - implied **snort.-O**: obfuscate the logged IP addresses
 - string **snort.-?**: <option prefix> output matching command line option quick help (same as --help-options) { (optional) }
 - implied **snort.--pause**: wait for resume/quit command before processing packets/terminating
 - string **snort.--pcap-dir**: <dir> a directory to recurse to look for pcaps - read mode is implied
 - string **snort.--pcap-file**: <file> file that contains a list of pcaps to read - read mode is implied
 - string **snort.--pcap-filter**: <filter> filter to apply when getting pcaps from file or directory
 - string **snort.--pcap-list**: <list> a space separated list of pcaps to read - read mode is implied
 - int **snort.--pcap-loop**: <count> read all pcaps <count> times; 0 will read until Snort is terminated { -1: }
 - implied **snort.--pcap-no-filter**: reset to use no filter when getting pcaps from file or directory
 - implied **snort.--pcap-reload**: if reading multiple pcaps, reload snort config between pcaps
 - implied **snort.--pcap-show**: print a line saying what pcap is currently being read
 - implied **snort.--pedantic**: warnings are fatal
 - implied **snort.--piglet**: enable piglet test harness mode
 - string **snort.--plugin-path**: <path> where to find plugins
 - implied **snort.--process-all-events**: process all action groups
 - implied **snort.-Q**: enable inline mode operation
-

- implied **snort.-q**: quiet mode - Don't show banner and status report
 - string **snort.-r**: <pcap>... (same as --pcap-list)
 - string **snort.-R**: <rules> include this rules file in the default policy
 - string **snort.--rule**: <rules> to be added to configuration; may be repeated
 - implied **snort.--rule-to-hex**: output so rule header to stdout for text rule on stdin
 - implied **snort.--rule-to-text**: output plain so rule header to stdout for text rule on stdin
 - string **snort.--run-prefix**: <pfx> prepend this to each output file
 - int **snort.-s** = 1514: <snap> (same as --snaplen); default is 1514 { 68:65535 }
 - string **snort.--script-path**: <path> to a luajit script or directory containing luajit scripts
 - implied **snort.--shell**: enable the interactive command line
 - implied **snort.--show-plugins**: list module and plugin versions
 - int **snort.--skip**: <n> skip 1st n packets { 0: }
 - int **snort.--snaplen** = 1514: <snap> set snaplen of packet (same as -s) { 68:65535 }
 - implied **snort.--stdin-rules**: read rules from stdin until EOF or a line starting with END is read
 - string **snort.-S**: <x=v> set config variable x equal to value v
 - string **snort.-t**: <dir> chroots process to <dir> after initialization
 - implied **snort.--treat-drop-as-alert**: converts drop, sdrops, and reject rules into alert rules during startup
 - implied **snort.--treat-drop-as-ignore**: use drop, sdrops, and reject rules to ignore session traffic when not inline
 - implied **snort.-T**: test and report on the current Snort configuration
 - string **snort.-u**: <uname> run snort as <uname> or <uid> after initialization
 - implied **snort.-U**: use UTC for timestamps
 - implied **snort.-v**: be verbose
 - implied **snort.--version**: show version number (same as -V)
 - implied **snort.-V**: (same as --version)
 - implied **snort.--warn-all**: enable all warnings
 - implied **snort.--warn-conf**: warn about configuration issues
 - implied **snort.--warn-daqs**: warn about DAQ issues, usually related to mode
 - implied **snort.--warn-flowbits**: warn about flowbits that are checked but not set and vice-versa
 - implied **snort.--warn-hosts**: warn about host table issues
 - implied **snort.--warn-plugins**: warn about issues that prevent plugins from loading
 - implied **snort.--warn-rules**: warn about duplicate rules and rule parsing issues
 - implied **snort.--warn-scripts**: warn about issues discovered while processing Lua scripts
 - implied **snort.--warn-symbols**: warn about unknown symbols in your Lua config
 - implied **snort.--warn-vars**: warn about variable definition and usage issues
 - implied **snort.-W**: lists available interfaces
-

- int **snort.--x2c**: output ASCII char for given hex (see also --c2x)
 - string **snort.--x2s**: output ASCII string for given byte code (see also --x2c)
 - implied **snort.-X**: dump the raw packet data starting at the link layer
 - implied **snort.-x**: same as --pedantic
 - implied **snort.-y**: include year in timestamp in the alert and log files
 - int **snort.-z = 1**: <count> maximum number of packet threads (same as --max-packet-threads); 0 gets the number of CPU cores reported by the system; default is 1 { 0: }
 - string **so.~func**: name of eval function
 - string **soid.~**: SO rule ID has <gid>|<sid> format, like 3|12345
 - int **ssh.max_client_bytes = 19600**: number of unanswered bytes before alerting on challenge-response overflow or CRC32 { 0:65535 }
 - int **ssh.max_encrypted_packets = 25**: ignore session after this many encrypted packets { 0:65535 }
 - int **ssh.max_server_version_len = 80**: limit before alerting on secure CRT server version string overflow { 0:255 }
 - int **ssl.max_heartbeat_length = 0**: maximum length of heartbeat record allowed { 0:65535 }
 - implied **ssl_state.client_hello**: check for client hello
 - implied **ssl_state.!client_hello**: check for records that are not client hello
 - implied **ssl_state.client_keyx**: check for client keyx
 - implied **ssl_state.!client_keyx**: check for records that are not client keyx
 - implied **ssl_state.!server_hello**: check for records that are not server hello
 - implied **ssl_state.server_hello**: check for server hello
 - implied **ssl_state.!server_keyx**: check for records that are not server keyx
 - implied **ssl_state.server_keyx**: check for server keyx
 - implied **ssl_state.!unknown**: check for records that are not unknown
 - implied **ssl_state.unknown**: check for unknown record
 - bool **ssl.trust_servers = false**: disables requirement that application (encrypted) data must be observed on both sides
 - implied **ssl_version.!sslv2**: check for records that are not sslv2
 - implied **ssl_version.sslv2**: check for sslv2
 - implied **ssl_version.!sslv3**: check for records that are not sslv3
 - implied **ssl_version.sslv3**: check for sslv3
 - implied **ssl_version.!tls1.0**: check for records that are not tls1.0
 - implied **ssl_version.tls1.0**: check for tls1.0
 - implied **ssl_version.!tls1.1**: check for records that are not tls1.1
 - implied **ssl_version.tls1.1**: check for tls1.1
 - implied **ssl_version.!tls1.2**: check for records that are not tls1.2
 - implied **ssl_version.tls1.2**: check for tls1.2
 - int **stream.file_cache.idle_timeout = 180**: maximum inactive time before retiring session tracker { 1: }
-

- int **stream.file_cache.max_sessions** = 128: maximum simultaneous sessions tracked before pruning { 2: }
- int **stream.file_cache.pruning_timeout** = 30: minimum inactive time before being eligible for pruning { 1: }
- bool **stream_file.upload** = false: indicate file transfer direction
- int **stream.icmp_cache.idle_timeout** = 180: maximum inactive time before retiring session tracker { 1: }
- int **stream.icmp_cache.max_sessions** = 65536: maximum simultaneous sessions tracked before pruning { 2: }
- int **stream.icmp_cache.pruning_timeout** = 30: minimum inactive time before being eligible for pruning { 1: }
- int **stream_icmp.session_timeout** = 30: session tracking timeout { 1:86400 }
- int **stream.ip_cache.idle_timeout** = 180: maximum inactive time before retiring session tracker { 1: }
- int **stream.ip_cache.max_sessions** = 16384: maximum simultaneous sessions tracked before pruning { 2: }
- int **stream.ip_cache.pruning_timeout** = 30: minimum inactive time before being eligible for pruning { 1: }
- bool **stream.ip_frags_only** = false: don't process non-frag flows
- int **stream_ip.max_frags** = 8192: maximum number of simultaneous fragments being tracked { 1: }
- int **stream_ip.max_overlaps** = 0: maximum allowed overlaps per datagram; 0 is unlimited { 0: }
- int **stream_ip.min_frag_length** = 0: alert if fragment length is below this limit before or after trimming { 0: }
- int **stream_ip.min_ttl** = 1: discard fragments with ttl below the minimum { 1:255 }
- enum **stream_ip.policy** = linux: fragment reassembly policy { first | linux | bsd | bsd_right | last | windows | solaris }
- int **stream_ip.session_timeout** = 30: session tracking timeout { 1:86400 }
- int **stream_ip.trace**: mask for enabling debug traces in module
- enum **stream_reassemble.action**: stop or start stream reassembly { disable | enable }
- enum **stream_reassemble.direction**: action applies to the given direction(s) { client | server | both }
- implied **stream_reassemble.fastpath**: optionally whitelist the remainder of the session
- implied **stream_reassemble.noalert**: don't alert when rule matches
- enum **stream_size.~direction**: compare applies to the given direction(s) { either | to_server | to_client | both }
- string **stream_size.~range**: size for comparison
- int **stream.tcp_cache.idle_timeout** = 180: maximum inactive time before retiring session tracker { 1: }
- int **stream.tcp_cache.max_sessions** = 262144: maximum simultaneous sessions tracked before pruning { 2: }
- int **stream.tcp_cache.pruning_timeout** = 30: minimum inactive time before being eligible for pruning { 1: }
- int **stream_tcp.flush_factor** = 0: flush upon seeing a drop in segment size after given number of non-decreasing segments { 0: }
- int **stream_tcp.footprint** = 0: use zero for production, non-zero for testing at given size { 0: }
- bool **stream_tcp.ignore_any_rules** = false: process tcp content rules w/o ports only if rules with ports are present
- int **stream_tcp.max_pdu** = 16384: maximum reassembled PDU size { 1460:65535 }
- int **stream_tcp.max_window** = 0: maximum allowed tcp window { 0:1073725440 }
- int **stream_tcp.overlap_limit** = 0: maximum number of allowed overlapping segments per session { 0:255 }
- enum **stream_tcp.policy** = bsd: determines operating system characteristics like reassembly { first | last | linux | old_linux | bsd | macos | solaris | irix | hpux11 | hpux10 | windows | win_2003 | vista | proxy }

- int **stream_tcp.queue_limit.max_bytes** = 1048576: don't queue more than given bytes per session and direction { 0: }
 - int **stream_tcp.queue_limit.max_segments** = 2621: don't queue more than given segments per session and direction { 0: }
 - bool **stream_tcp.reassemble_async** = true: queue data for reassembly before traffic is seen in both directions
 - int **stream_tcp.require_3whs** = -1: don't track midstream sessions after given seconds from start up; -1 tracks all { -1:86400 }
 - int **stream_tcp.session_timeout** = 30: session tracking timeout { 1:86400 }
 - bool **stream_tcp.show_rebuilt_packets** = false: enable cmg like output of reassembled packets
 - int **stream_tcp.small_segments.count** = 0: limit number of small segments queued { 0:2048 }
 - int **stream_tcp.small_segments.maximum_size** = 0: limit number of small segments queued { 0:2048 }
 - int **stream_udp_cache.idle_timeout** = 180: maximum inactive time before retiring session tracker { 1: }
 - int **stream_udp_cache.max_sessions** = 131072: maximum simultaneous sessions tracked before pruning { 2: }
 - int **stream_udp_cache.pruning_timeout** = 30: minimum inactive time before being eligible for pruning { 1: }
 - bool **stream_udp.ignore_any_rules** = false: process udp content rules w/o ports only if rules with ports are present
 - int **stream_udp.session_timeout** = 30: session tracking timeout { 1:86400 }
 - int **stream.user_cache.idle_timeout** = 180: maximum inactive time before retiring session tracker { 1: }
 - int **stream.user_cache.max_sessions** = 1024: maximum simultaneous sessions tracked before pruning { 2: }
 - int **stream.user_cache.pruning_timeout** = 30: minimum inactive time before being eligible for pruning { 1: }
 - int **stream_user.session_timeout** = 30: session tracking timeout { 1:86400 }
 - int **stream_user.trace**: mask for enabling debug traces in module
 - int **suppress[].gid** = 0: rule generator ID { 0: }
 - string **suppress[].ip**: restrict suppression to these addresses according to track
 - int **suppress[].sid** = 0: rule signature ID { 0: }
 - enum **suppress[].track**: suppress only matching source or destination addresses { by_src | by_dst }
 - int **tag.bytes**: tag for this many bytes { 1: }
 - enum **tag.~**: log all packets in session or all packets to or from host { session | host_src | host_dst }
 - int **tag.packets**: tag this many packets { 1: }
 - int **tag.seconds**: tag for this many seconds { 1: }
 - string **tcp_connector.address**: address
 - port **tcp_connector.base_port**: base port number
 - string **tcp_connector.connector**: connector name
 - enum **tcp_connector.setup**: stream establishment { call | answer }
 - int **telnet.ayt_attack_thresh** = -1: alert on this number of consecutive telnet AYT commands { -1: }
 - bool **telnet.check_encrypted** = false: check for end of encryption
 - bool **telnet.encrypted_traffic** = false: check for encrypted telnet and ftp
 - bool **telnet.normalize** = false: eliminate escape sequences
-

- string **tos.~range**: check if ip tos value is *value* | *min*<>*max* | <*max* | >*min*
- string **ttl.~range**: check if ip ttl field value is *value* | *min*<>*max* | <*max* | >*min*
- bool **udp.deep_teredo_inspection** = false: look for Teredo on all UDP ports (default is only 3544)
- bool **udp.enable_gtp** = false: decode GTP encapsulations
- bit_list **udp.gtp_ports** = 2152 3386: set GTP ports { 65535 }
- int **unified2.limit** = 0: set limit (0 is unlimited) { 0: }
- bool **unified2.mpls_event_types** = false: include mpls labels in events
- bool **unified2.nostamp** = true: append file creation time to name (in Unix Epoch format)
- enum **unified2.units** = B: limit multiplier { B | K | M | G }
- bool **unified2.vlan_event_types** = false: include vlan IDs in events
- string **urg.~range**: check if urgent offset is *min*<>*max* | <*max* | >*min*
- string **window.~range**: check if tcp window field size is *size* | *min*<>*max* | <*max* | >*min*
- multi **wizard.curses**: enable service identification based on internal algorithm { dce_smb | dce_udp | dce_tcp }
- bool **wizard.hexes[].client_first** = true: which end initiates data transfer
- select **wizard.hexes[].proto** = tcp: protocol to scan { tcp | udp }
- string **wizard.hexes[].service**: name of service
- string **wizard.hexes[].to_client[].hex**: sequence of data with wild chars (?)
- string **wizard.hexes[].to_server[].hex**: sequence of data with wild chars (?)
- bool **wizard.spells[].client_first** = true: which end initiates data transfer
- select **wizard.spells[].proto** = tcp: protocol to scan { tcp | udp }
- string **wizard.spells[].service**: name of service
- string **wizard.spells[].to_client[].spell**: sequence of data with wild cards (*)
- string **wizard.spells[].to_server[].spell**: sequence of data with wild cards (*)

20.5 Counts

- **appid.aim_clients**: count of aim clients discovered
- **appid.battlefield_flows**: count of battle field flows discovered
- **appid.bgp_flows**: count of bgp flows discovered
- **appid.bit_clients**: count of bittorrent clients discovered
- **appid.bit_flows**: count of bittorrent flows discovered
- **appid.bittracker_clients**: count of bittorrent tracker clients discovered
- **appid.bootp_flows**: count of bootp flows discovered
- **appid.dcerpc_tcp_flows**: count of dce rpc flows over tcp discovered
- **appid.dcerpc_udp_flows**: count of dce rpc flows over udp discovered
- **appid.direct_connect_flows**: count of direct connect flows discovered

- **appid.dns_tcp_flows**: count of dns flows over tcp discovered
 - **appid.dns_udp_flows**: count of dns flows over udp discovered
 - **appid.ftp_flows**: count of ftp flows discovered
 - **appid.ftps_flows**: count of ftps flows discovered
 - **appid.http_flows**: count of http flows discovered
 - **appid.ignored_packets**: count of packets ignored
 - **appid.imap_flows**: count of imap service flows discovered
 - **appid.imaps_flows**: count of imap TLS service flows discovered
 - **appid.irc_flows**: count of irc service flows discovered
 - **appid.kerberos_clients**: count of kerberos clients discovered
 - **appid.kerberos_flows**: count of kerberos service flows discovered
 - **appid.kerberos_users**: count of kerberos users discovered
 - **appid.lpr_flows**: count of lpr service flows discovered
 - **appid.mdns_flows**: count of mdns service flows discovered
 - **appid.msn_clients**: count of msn clients discovered
 - **appid.mysql_flows**: count of mysql service flows discovered
 - **appid.netbios_dgm_flows**: count of netbios-dgm service flows discovered
 - **appid.netbios_ns_flows**: count of netbios-ns service flows discovered
 - **appid.netbios_ssn_flows**: count of netbios-ssn service flows discovered
 - **appid.nntp_flows**: count of nntp flows discovered
 - **appid.ntp_flows**: count of ntp flows discovered
 - **appid.packets**: count of packets received
 - **appid.pop3_clients**: count of pop3 clients discovered
 - **appid.pop3s_clients**: count of pop3s clients discovered
 - **appid.pop_flows**: count of pop service flows discovered
 - **appid.processed_packets**: count of packets processed
 - **appid.radius_flows**: count of radius flows discovered
 - **appid.rexec_flows**: count of rexec flows discovered
 - **appid.rfb_flows**: count of rfb flows discovered
 - **appid.rlogin_flows**: count of rlogin flows discovered
 - **appid.rpc_flows**: count of rpc flows discovered
 - **appid.rshell_flows**: count of rshell flows discovered
 - **appid.rsync_flows**: count of rsync service flows discovered
 - **appid.rtmp_flows**: count of rtmp flows discovered
 - **appid.rtp_clients**: count of rtp clients discovered
-

- **appid.sip_clients**: count of SIP clients discovered
 - **appid.sip_flows**: count of SIP flows discovered
 - **appid.smtp_aol_clients**: count of AOL smtp clients discovered
 - **appid.smtp_applemail_clients**: count of Apple Mail smtp clients discovered
 - **appid.smtp_eudora_clients**: count of Eudora smtp clients discovered
 - **appid.smtp_eudora_pro_clients**: count of Eudora Pro smtp clients discovered
 - **appid.smtp_evolution_clients**: count of Evolution smtp clients discovered
 - **appid.smtp_flows**: count of smtp flows discovered
 - **appid.smtp_kmail_clients**: count of KMail smtp clients discovered
 - **appid.smtp_lotus_notes_clients**: count of Lotus Notes smtp clients discovered
 - **appid.smtp_microsoft_outlook_clients**: count of Microsoft Outlook smtp clients discovered
 - **appid.smtp_microsoft_outlook_express_clients**: count of Microsoft Outlook Express smtp clients discovered
 - **appid.smtp_microsoft_outlook_imo_clients**: count of Microsoft Outlook IMO smtp clients discovered
 - **appid.smtp_mutt_clients**: count of Mutt smtp clients discovered
 - **appid.smtps_flows**: count of smtps flows discovered
 - **appid.smtp_thunderbird_clients**: count of Thunderbird smtp clients discovered
 - **appid.snmp_flows**: count of snmp flows discovered
 - **appid.ssh_clients**: count of ssh clients discovered
 - **appid.ssh_flows**: count of ssh flows discovered
 - **appid.ssl_flows**: count of ssl flows discovered
 - **appid.telnet_flows**: count of telnet flows discovered
 - **appid.tftp_flows**: count of tftp flows discovered
 - **appid.timbuktu_clients**: count of timbuktu clients discovered
 - **appid.timbuktu_flows**: count of timbuktu flows discovered
 - **appid.tns_clients**: count of tns clients discovered
 - **appid.tns_flows**: count of tns flows discovered
 - **appid.vnc_clients**: count of vnc clients discovered
 - **appid.yahoo_messenger_clients**: count of Yahoo Messenger clients discovered
 - **arp_spoof.packets**: total packets
 - **back_orifice.packets**: total packets
 - **binder.allows**: allow bindings
 - **binder.blocks**: block bindings
 - **binder.inspects**: inspect bindings
 - **binder.packets**: initial bindings
 - **binder.resets**: reset bindings
-

- **daq.allow**: total allow verdicts
 - **daq.analyzed**: total packets analyzed from DAQ
 - **daq.blacklist**: total blacklist verdicts
 - **daq.block**: total block verdicts
 - **daq.dropped**: packets dropped
 - **daq.filtered**: packets filtered out
 - **daq.idle**: attempts to acquire from DAQ without available packets
 - **daq.ignore**: total ignore verdicts
 - **daq.injected**: active responses or replacements
 - **daq.internal_blacklist**: packets blacklisted internally due to lack of DAQ support
 - **daq.internal_whitelist**: packets whitelisted internally due to lack of DAQ support
 - **daq.outstanding**: packets unprocessed
 - **daq.pcaps**: total files and interfaces processed
 - **daq.received**: total packets received from DAQ
 - **daq.replace**: total replace verdicts
 - **daq.skipped**: packets skipped at startup
 - **daq.whitelist**: total whitelist verdicts
 - **data_log.packets**: total packets
 - **dce_http_proxy.http_proxy_session_failures**: failed http proxy sessions
 - **dce_http_proxy.http_proxy_sessions**: successful http proxy sessions
 - **dce_http_server.http_server_session_failures**: failed http server sessions
 - **dce_http_server.http_server_sessions**: successful http server sessions
 - **dce_smb.alter_context_responses**: total connection-oriented alter context responses
 - **dce_smb.alter_contexts**: total connection-oriented alter contexts
 - **dce_smb.auth3s**: total connection-oriented auth3s
 - **dce_smb.bind_acks**: total connection-oriented binds acks
 - **dce_smb.bind_naks**: total connection-oriented bind naks
 - **dce_smb.binds**: total connection-oriented binds
 - **dce_smb.cancels**: total connection-oriented cancels
 - **dce_smb.client_fragments_reassembled**: total connection-oriented client fragments reassembled
 - **dce_smb.client_max_fragment_size**: connection-oriented client maximum fragment size
 - **dce_smb.client_min_fragment_size**: connection-oriented client minimum fragment size
 - **dce_smb.client_segs_reassembled**: total connection-oriented client segments reassembled
 - **dce_smb.client_segs_reassembled**: total smb client segments reassembled
 - **dce_smb.events**: total events
-

- **dce_smb.faults**: total connection-oriented faults
 - **dce_smb.files_processed**: total smb files processed
 - **dce_smb.ignored_bytes**: total ignored bytes
 - **dce_smb.max_outstanding_requests**: total smb maximum outstanding requests
 - **dce_smb.ms_rpc_http_pdus**: total connection-oriented MS requests to send RPC over HTTP
 - **dce_smb.orphaned**: total connection-oriented orphaned
 - **dce_smb.other_requests**: total connection-oriented other requests
 - **dce_smb.other_responses**: total connection-oriented other responses
 - **dce_smb.packets**: total smb packets
 - **dce_smb.pdus**: total connection-oriented PDUs
 - **dce_smb.rejects**: total connection-oriented rejects
 - **dce_smb.request_fragments**: total connection-oriented request fragments
 - **dce_smb.requests**: total connection-oriented requests
 - **dce_smb.response_fragments**: total connection-oriented response fragments
 - **dce_smb.responses**: total connection-oriented responses
 - **dce_smb.server_frags_reassembled**: total connection-oriented server fragments reassembled
 - **dce_smb.server_max_fragment_size**: connection-oriented server maximum fragment size
 - **dce_smb.server_min_fragment_size**: connection-oriented server minimum fragment size
 - **dce_smb.server_segs_reassembled**: total connection-oriented server segments reassembled
 - **dce_smb.server_segs_reassembled**: total smb server segments reassembled
 - **dce_smb.sessions**: total smb sessions
 - **dce_smb.shutdowns**: total connection-oriented shutdowns
 - **dce_smb.smbv2_close**: total number of SMBv2 close packets seen
 - **dce_smb.smbv2_create**: total number of SMBv2 create packets seen
 - **dce_smb.smbv2_read**: total number of SMBv2 read packets seen
 - **dce_smb.smbv2_set_info**: total number of SMBv2 set info packets seen
 - **dce_smb.smbv2_tree_connect**: total number of SMBv2 tree connect packets seen
 - **dce_smb.smbv2_tree_disconnect**: total number of SMBv2 tree disconnect packets seen
 - **dce_smb.smbv2_write**: total number of SMBv2 write packets seen
 - **dce_tcp.alter_context_responses**: total connection-oriented alter context responses
 - **dce_tcp.alter_contexts**: total connection-oriented alter contexts
 - **dce_tcp.auth3s**: total connection-oriented auth3s
 - **dce_tcp.bind_acks**: total connection-oriented binds acks
 - **dce_tcp.bind_naks**: total connection-oriented bind naks
 - **dce_tcp.binds**: total connection-oriented binds
-

- **dce_tcp.cancels**: total connection-oriented cancels
 - **dce_tcp.client_fragments_reassembled**: total connection-oriented client fragments reassembled
 - **dce_tcp.client_max_fragment_size**: connection-oriented client maximum fragment size
 - **dce_tcp.client_min_fragment_size**: connection-oriented client minimum fragment size
 - **dce_tcp.client_segs_reassembled**: total connection-oriented client segments reassembled
 - **dce_tcp.events**: total events
 - **dce_tcp.faults**: total connection-oriented faults
 - **dce_tcp.ms_rpc_http_pdus**: total connection-oriented MS requests to send RPC over HTTP
 - **dce_tcp.orphaned**: total connection-oriented orphaned
 - **dce_tcp.other_requests**: total connection-oriented other requests
 - **dce_tcp.other_responses**: total connection-oriented other responses
 - **dce_tcp.pdus**: total connection-oriented PDUs
 - **dce_tcp.rejects**: total connection-oriented rejects
 - **dce_tcp.request_fragments**: total connection-oriented request fragments
 - **dce_tcp.requests**: total connection-oriented requests
 - **dce_tcp.response_fragments**: total connection-oriented response fragments
 - **dce_tcp.responses**: total connection-oriented responses
 - **dce_tcp.server_fragments_reassembled**: total connection-oriented server fragments reassembled
 - **dce_tcp.server_max_fragment_size**: connection-oriented server maximum fragment size
 - **dce_tcp.server_min_fragment_size**: connection-oriented server minimum fragment size
 - **dce_tcp.server_segs_reassembled**: total connection-oriented server segments reassembled
 - **dce_tcp.shutdowns**: total connection-oriented shutdowns
 - **dce_tcp.tcp_packets**: total tcp packets
 - **dce_tcp.tcp_sessions**: total tcp sessions
 - **dce_udp.acks**: total connection-less acks
 - **dce_udp.cancel_acks**: total connection-less cancel acks
 - **dce_udp.cancels**: total connection-less cancels
 - **dce_udp.client_facks**: total connection-less client facks
 - **dce_udp.events**: total events
 - **dce_udp.faults**: total connection-less faults
 - **dce_udp.fragments**: total connection-less fragments
 - **dce_udp.fragments_reassembled**: total connection-less fragments reassembled
 - **dce_udp.max_fragment_size**: connection-less maximum fragment size
 - **dce_udp.max_seqnum**: max connection-less seqnum
 - **dce_udp.no_calls**: total connection-less no calls
-

- **dce_udp.other_requests**: total connection-less other requests
 - **dce_udp.other_responses**: total connection-less other responses
 - **dce_udp.ping**: total connection-less ping
 - **dce_udp.rejects**: total connection-less rejects
 - **dce_udp.requests**: total connection-less requests
 - **dce_udp.responses**: total connection-less responses
 - **dce_udp.server_facks**: total connection-less server facks
 - **dce_udp.udp_packets**: total udp packets
 - **dce_udp.udp_sessions**: total udp sessions
 - **dce_udp.working**: total connection-less working
 - **detection.alert_limit**: events previously triggered on same PDU
 - **detection.alerts**: alerts not including IP reputation
 - **detection.alt_searches**: alt fast pattern searches in packet data
 - **detection.analyzed**: packets sent to detection
 - **detection.body_searches**: fast pattern searches in body buffer
 - **detection.cooked_searches**: fast pattern searches in cooked packet data
 - **detection.event_limit**: events filtered
 - **detection.file_searches**: fast pattern searches in file buffer
 - **detection.hard_evals**: non-fast pattern rule evaluations
 - **detection.header_searches**: fast pattern searches in header buffer
 - **detection.key_searches**: fast pattern searches in key buffer
 - **detection.logged**: logged packets
 - **detection.log_limit**: events queued but not logged
 - **detection.match_limit**: fast pattern matches not processed
 - **detection.passed**: passed packets
 - **detection.pkt_searches**: fast pattern searches in packet data
 - **detection.queue_limit**: events not queued because queue full
 - **detection.raw_searches**: fast pattern searches in raw packet data
 - **detection.total_alerts**: alerts including IP reputation
 - **dnp3.dnp3_application_pdus**: total dnp3 application pdus
 - **dnp3.dnp3_link_layer_frames**: total dnp3 link layer frames
 - **dnp3.tcp_pdus**: total tcp pdus
 - **dnp3.total_packets**: total packets
 - **dnp3.udp_packets**: total udp packets
 - **dns.packets**: total packets processed
-

- **dns.requests**: total dns requests
 - **dns.responses**: total dns responses
 - **dpx.packets**: total packets
 - **file_connector.messages**: total messages
 - **file_id.cache_failures**: number of file cache add failures
 - **file_id.total_file_data**: number of file data bytes processed
 - **file_id.total_files**: number of files processed
 - **file_log.total_events**: total file events
 - **ftp_data.packets**: total packets
 - **ftp_server.packets**: total packets
 - **gtp_inspect.events**: requests
 - **gtp_inspect.sessions**: total sessions processed
 - **gtp_inspect.unknown_infos**: unknown information elements
 - **gtp_inspect.unknown_types**: unknown message types
 - **host_cache.lru_cache_adds**: lru cache added new entry
 - **host_cache.lru_cache_clears**: lru cache clear API calls
 - **host_cache.lru_cache_find_hits**: lru cache found entry in cache
 - **host_cache.lru_cache_find_misses**: lru cache did not find entry in cache
 - **host_cache.lru_cache_prunes**: lru cache pruned entry to make space for new entry
 - **host_cache.lru_cache_removes**: lru cache found entry and removed it
 - **host_cache.lru_cache_replaces**: lru cache replaced existing entry
 - **host_tracker.service_adds**: host service adds
 - **host_tracker.service_finds**: host service finds
 - **host_tracker.service_removes**: host service removes
 - **http_global.compressed_bytes**: total compressed bytes processed
 - **http_global.decompressed_bytes**: total bytes decompressed
 - **http_global.double_unicode**: double unicode normalizations
 - **http_global.gets**: GET requests
 - **http_global.gzip_packets**: packets with gzip compression
 - **http_global.non_ascii**: non-ascii normalizations
 - **http_global.packets**: total packets processed
 - **http_global.paths_with_double_slash**: double slash (//) normalizations
 - **http_global.paths_with_relative**: relative directory (./) normalizations
 - **http_global.paths_with_traversal**: directory traversal (../) normalizations
 - **http_global.post_params**: POST parameters extracted
-

- **http_global.posts**: POST requests
 - **http_global.request_cookies**: requests with Cookie
 - **http_global.request_headers**: total requests
 - **http_global.response_cookies**: responses with Set-Cookie
 - **http_global.response_headers**: total responses
 - **http_global.unicode**: unicode normalizations
 - **http_inspect.chunked**: chunked message bodies
 - **http_inspect.connect_requests**: CONNECT requests inspected
 - **http_inspect.delete_requests**: DELETE requests inspected
 - **http_inspect.flows**: HTTP connections inspected
 - **http_inspect.get_requests**: GET requests inspected
 - **http_inspect.head_requests**: HEAD requests inspected
 - **http_inspect.inspections**: total message sections inspected
 - **http_inspect.options_requests**: OPTIONS requests inspected
 - **http_inspect.other_requests**: other request methods inspected
 - **http_inspect.post_requests**: POST requests inspected
 - **http_inspect.put_requests**: PUT requests inspected
 - **http_inspect.reassembles**: TCP segments combined into HTTP messages
 - **http_inspect.request_bodies**: POST, PUT, and other requests with message bodies
 - **http_inspect.requests**: HTTP request messages inspected
 - **http_inspect.responses**: HTTP response messages inspected
 - **http_inspect.scans**: TCP segments scanned looking for HTTP messages
 - **http_inspect.trace_requests**: TRACE requests inspected
 - **http_inspect.uri_coding**: URIs with character coding problems
 - **http_inspect.uri_normalizations**: URIs needing to be normalization
 - **http_inspect.uri_path**: URIs with path problems
 - **icmp4.bad_checksum**: non-zero icmp checksums
 - **icmp6.bad_icmp4_checksum**: nonzero ipcm4 checksums
 - **icmp6.bad_icmp6_checksum**: nonzero ipcm6 checksums
 - **imap.b64_attachments**: total base64 attachments decoded
 - **imap.b64_decoded_bytes**: total base64 decoded bytes
 - **imap.non_encoded_attachments**: total non-encoded attachments extracted
 - **imap.non_encoded_bytes**: total non-encoded extracted bytes
 - **imap.packets**: total packets processed
 - **imap.qp_attachments**: total quoted-printable attachments decoded
-

- **imap.qp_decoded_bytes**: total quoted-printable decoded bytes
 - **imap.sessions**: total imap sessions
 - **imap.uu_attachments**: total uu attachments decoded
 - **imap.uu_decoded_bytes**: total uu decoded bytes
 - **ipv4.bad_checksum**: nonzero ip checksums
 - **latency.max_usecs**: maximum usecs elapsed
 - **latency.packet_timeouts**: packets that timed out
 - **latency.rule_eval_timeouts**: rule evals that timed out
 - **latency.rule_tree_enables**: rule tree re-enables
 - **latency.total_packets**: total packets monitored
 - **latency.total_rule_evals**: total rule evals monitored
 - **latency.total_usecs**: total usecs elapsed
 - **modbus.frames**: total Modbus messages
 - **modbus.sessions**: total sessions processed
 - **mpls.total_bytes**: total mpls labeled bytes processed
 - **mpls.total_packets**: total mpls labeled packets processed
 - **normalizer.icmp4_echo**: icmp4 ping normalizations
 - **normalizer.icmp6_echo**: icmp6 echo normalizations
 - **normalizer.ip4_df**: don't frag bit normalizations
 - **normalizer.ip4_opts**: ip4 options cleared
 - **normalizer.ip4_rf**: reserved flag bit clears
 - **normalizer.ip4_tos**: type of service normalizations
 - **normalizer.ip4_trim**: eth packets trimmed to datagram size
 - **normalizer.ip4_ttl**: time-to-live normalizations
 - **normalizer.ip6_hops**: ip6 hop limit normalizations
 - **normalizer.ip6_options**: ip6 options cleared
 - **normalizer.tcp_block**: blocked segments
 - **normalizer.tcp_ecn_pkt**: packets with ECN bits cleared
 - **normalizer.tcp_ecn_session**: ECN bits cleared
 - **normalizer.tcp_ips_data**: normalized segments
 - **normalizer.tcp_nonce**: packets with nonce bit cleared
 - **normalizer.tcp_options**: packets with options cleared
 - **normalizer.tcp_padding**: packets with padding cleared
 - **normalizer.tcp_req_pay**: cleared urgent pointer and urgent flag when there is no payload
 - **normalizer.tcp_req_urg**: cleared urgent pointer when urgent flag is not set
-

- **normalizer.tcp_req_urp**: cleared the urgent flag if the urgent pointer is not set
 - **normalizer.tcp_reserved**: packets with reserved bits cleared
 - **normalizer.tcp_syn_options**: SYN only options cleared from non-SYN packets
 - **normalizer.tcp_trim_mss**: data trimmed to MSS
 - **normalizer.tcp_trim_rst**: RST packets with data trimmed
 - **normalizer.tcp_trim_syn**: tcp segments trimmed on SYN
 - **normalizer.tcp_trim_win**: data trimmed to window
 - **normalizer.tcp_ts_ecr**: timestamp cleared on non-ACKs
 - **normalizer.tcp_ts_nop**: timestamp options cleared
 - **normalizer.tcp_urgent_ptr**: packets without data with urgent pointer cleared
 - **normalizer.test_icmp4_echo**: test icmp4 ping normalizations
 - **normalizer.test_icmp6_echo**: test icmp6 echo normalizations
 - **normalizer.test_ip4_df**: test don't frag bit normalizations
 - **normalizer.test_ip4_opts**: test ip4 options cleared
 - **normalizer.test_ip4_rf**: test reserved flag bit clears
 - **normalizer.test_ip4_tos**: test type of service normalizations
 - **normalizer.test_ip4_trim**: test eth packets trimmed to datagram size
 - **normalizer.test_ip4_ttl**: test time-to-live normalizations
 - **normalizer.test_ip6_hops**: test ip6 hop limit normalizations
 - **normalizer.test_ip6_options**: test ip6 options cleared
 - **normalizer.test_tcp_block**: test blocked segments
 - **normalizer.test_tcp_ecn_pkt**: test packets with ECN bits cleared
 - **normalizer.test_tcp_ecn_session**: test ECN bits cleared
 - **normalizer.test_tcp_ips_data**: test normalized segments
 - **normalizer.test_tcp_nonce**: test packets with nonce bit cleared
 - **normalizer.test_tcp_options**: test packets with options cleared
 - **normalizer.test_tcp_padding**: test packets with padding cleared
 - **normalizer.test_tcp_req_pay**: test cleared urgent pointer and urgent flag when there is no payload
 - **normalizer.test_tcp_req_urg**: test cleared urgent pointer when urgent flag is not set
 - **normalizer.test_tcp_req_urp**: test cleared the urgent flag if the urgent pointer is not set
 - **normalizer.test_tcp_reserved**: test packets with reserved bits cleared
 - **normalizer.test_tcp_syn_options**: test SYN only options cleared from non-SYN packets
 - **normalizer.test_tcp_trim_mss**: test data trimmed to MSS
 - **normalizer.test_tcp_trim_rst**: test RST packets with data trimmed
 - **normalizer.test_tcp_trim_syn**: test tcp segments trimmed on SYN
-

- **normalizer.test_tcp_trim_win**: test data trimmed to window
 - **normalizer.test_tcp_ts_ecr**: test timestamp cleared on non-ACKs
 - **normalizer.test_tcp_ts_nop**: test timestamp options cleared
 - **normalizer.test_tcp_urgent_ptr**: test packets without data with urgent pointer cleared
 - **packet_capture.captured**: packets matching dumped after matching filter
 - **packet_capture.processed**: packets processed against filter
 - **perf_monitor.packets**: total packets
 - **pop.b64_attachments**: total base64 attachments decoded
 - **pop.b64_decoded_bytes**: total base64 decoded bytes
 - **pop.non_encoded_attachments**: total non-encoded attachments extracted
 - **pop.non_encoded_bytes**: total non-encoded extracted bytes
 - **pop.packets**: total packets processed
 - **pop.qp_attachments**: total quoted-printable attachments decoded
 - **pop.qp_decoded_bytes**: total quoted-printable decoded bytes
 - **pop.sessions**: total pop sessions
 - **pop.uu_attachments**: total uu attachments decoded
 - **pop.uu_decoded_bytes**: total uu decoded bytes
 - **port_scan_global.packets**: total packets
 - **reputation.blacklisted**: number of packets blacklisted
 - **reputation.memory_allocated**: total memory allocated
 - **reputation.monitored**: number of packets monitored
 - **reputation.packets**: total packets processed
 - **reputation.whitelisted**: number of packets whitelisted
 - **rpc_decode.packets**: total packets
 - **sd_pattern.below_threshold**: sd_pattern matched but missed threshold
 - **sd_pattern.pattern_not_found**: sd_pattern did not not match
 - **sd_pattern.terminated**: hyperscan terminated
 - **search_engine.max_queued**: maximum fast pattern matches queued for further evaluation
 - **search_engine.non_qualified_events**: total non-qualified events
 - **search_engine.qualified_events**: total qualified events
 - **search_engine.total_flushed**: fast pattern matches discarded due to overflow
 - **search_engine.total_inserts**: total fast pattern hits
 - **search_engine.total_unique**: total unique fast pattern hits
 - **sip.1xx**: 1xx
 - **sip.2xx**: 2xx
-

- **sip.3xx:** 3xx
 - **sip.4xx:** 4xx
 - **sip.5xx:** 5xx
 - **sip.6xx:** 6xx
 - **sip.7xx:** 7xx
 - **sip.8xx:** 8xx
 - **sip.9xx:** 9xx
 - **sip.ack:** ack
 - **sip.bye:** bye
 - **sip.cancel:** cancel
 - **sip.dialogs:** total dialogs
 - **sip.events:** events generated
 - **sip.ignored_channels:** total channels ignored
 - **sip.ignored_sessions:** total sessions ignored
 - **sip.info:** info
 - **sip.invite:** invite
 - **sip.join:** join
 - **sip.message:** message
 - **sip.notify:** notify
 - **sip.options:** options
 - **sip.packets:** total packets
 - **sip.prack:** prack
 - **sip.refer:** refer
 - **sip.register:** register
 - **sip.sessions:** total sessions
 - **sip.subscribe:** subscribe
 - **sip.total_requests:** total requests
 - **sip.total_responses:** total responses
 - **sip.update:** update
 - **smtp.b64_attachments:** total base64 attachments decoded
 - **smtp.b64_decoded_bytes:** total base64 decoded bytes
 - **smtp.concurrent_sessions:** total concurrent smtp sessions
 - **smtp.max_concurrent_sessions:** maximum concurrent smtp sessions
 - **smtp.non_encoded_attachments:** total non-encoded attachments extracted
 - **smtp.non_encoded_bytes:** total non-encoded extracted bytes
-

- **smtp.packets**: total packets processed
 - **smtp.qp_attachments**: total quoted-printable attachments decoded
 - **smtp.qp_decoded_bytes**: total quoted-printable decoded bytes
 - **smtp.sessions**: total smtp sessions
 - **smtp.uu_attachments**: total uu attachments decoded
 - **smtp.uu_decoded_bytes**: total uu decoded bytes
 - **snort.attribute_table_hosts**: total number of hosts in table
 - **snort.attribute_table_reloads**: number of times hosts table was reloaded
 - **snort.conf_reloads**: number of times configuration was reloaded
 - **snort.local_commands**: total local commands processed
 - **snort.remote_commands**: total remote commands processed
 - **snort.signals**: total signals processed
 - **ssh.packets**: total packets
 - **ssl.alert**: total ssl alert records
 - **ssl.bad_handshakes**: total bad handshakes
 - **ssl.certificate**: total ssl certificates
 - **ssl.change_cipher**: total change cipher records
 - **ssl.client_application**: total client application records
 - **ssl.client_hello**: total client hellos
 - **ssl.client_key_exchange**: total client key exchanges
 - **ssl.decoded**: ssl packets decoded
 - **ssl.detection_disabled**: total detection disabled
 - **ssl.finished**: total handshakes finished
 - **ssl.handshakes_completed**: total completed ssl handshakes
 - **ssl.packets**: total packets processed
 - **ssl.server_application**: total server application records
 - **ssl.server_done**: total server done
 - **ssl.server_hello**: total server hellos
 - **ssl.server_key_exchange**: total server key exchanges
 - **ssl.sessions_ignored**: total sessions ignore
 - **ssl.unrecognized_records**: total unrecognized records
 - **stream.file_excess_prunes**: file sessions pruned due to excess
 - **stream.file_flows**: total file sessions
 - **stream.file_ha_prunes**: file sessions pruned by high availability sync
 - **stream.file_idle_prunes**: file sessions pruned due to timeout
-

- **stream.file_memcap_prunes**: file sessions pruned due to memcap
 - **stream.file_preemptive_prunes**: file sessions pruned during preemptive pruning
 - **stream.file_total_prunes**: total file sessions pruned
 - **stream.file_uni_prunes**: file uni sessions pruned
 - **stream_icmp.created**: icmp_session trackers created
 - **stream.icmp_excess_prunes**: icmp sessions pruned due to excess
 - **stream.icmp_flows**: total icmp sessions
 - **stream.icmp_ha_prunes**: icmp sessions pruned by high availability sync
 - **stream.icmp_idle_prunes**: icmp sessions pruned due to timeout
 - **stream_icmp.max**: max icmp_sessions
 - **stream.icmp_memcap_prunes**: icmp sessions pruned due to memcap
 - **stream.icmp_preemptive_prunes**: icmp sessions pruned during preemptive pruning
 - **stream_icmp.prunes**: icmp_session prunes
 - **stream_icmp.released**: icmp_session trackers released
 - **stream_icmp.sessions**: total icmp_sessions
 - **stream_icmp.timeouts**: icmp_session timeouts
 - **stream.icmp_total_prunes**: total icmp sessions pruned
 - **stream.icmp_uni_prunes**: icmp uni sessions pruned
 - **stream_ip.alerts**: alerts generated
 - **stream_ip.anomalies**: anomalies detected
 - **stream_ip.created**: ip_session trackers created
 - **stream_ip.current_frags**: current fragments
 - **stream_ip.discards**: fragments discarded
 - **stream_ip.drops**: fragments dropped
 - **stream.ip_excess_prunes**: ip sessions pruned due to excess
 - **stream.ip_flows**: total ip sessions
 - **stream_ip.fragmented_bytes**: total fragmented bytes
 - **stream_ip.frag_timeouts**: datagrams abandoned
 - **stream.ip_ha_prunes**: ip sessions pruned by high availability sync
 - **stream.ip_idle_prunes**: ip sessions pruned due to timeout
 - **stream_ip.max_frags**: max fragments
 - **stream_ip.max**: max ip_sessions
 - **stream.ip_memcap_prunes**: ip sessions pruned due to memcap
 - **stream_ip.memory_used**: current memory usage in bytes
 - **stream_ip.nodes_deleted**: fragments deleted from tracker
-

- **stream_ip.nodes_inserted**: fragments added to tracker
 - **stream_ip.overlaps**: overlapping fragments
 - **stream_ip.preemptive_prunes**: ip sessions pruned during preemptive pruning
 - **stream_ip.prunes**: ip_session prunes
 - **stream_ip.reassembled_bytes**: total reassembled bytes
 - **stream_ip.reassembled**: reassembled datagrams
 - **stream_ip.released**: ip_session trackers released
 - **stream_ip.sessions**: total ip_sessions
 - **stream_ip.timeouts**: ip_session timeouts
 - **stream_ip.total_frgs**: total fragments
 - **stream_ip_total_prunes**: total ip sessions pruned
 - **stream_ip.trackers_added**: datagram trackers created
 - **stream_ip.trackers_cleared**: datagram trackers cleared
 - **stream_ip.trackers_completed**: datagram trackers completed
 - **stream_ip.trackers_freed**: datagram trackers released
 - **stream_ip_uni_prunes**: ip_uni sessions pruned
 - **stream_tcp.3way_trackers**: tcp session tracking started on ack
 - **stream_tcp.client_cleanups**: number of times data from server was flushed when session released
 - **stream_tcp.closing**: number of sessions currently closing
 - **stream_tcp.created**: tcp_session trackers created
 - **stream_tcp.data_trackers**: tcp session tracking started on data
 - **stream_tcp.discards**: tcp packets discarded
 - **stream_tcp.established**: number of sessions currently established
 - **stream_tcp.events**: events generated
 - **stream_tcp.exceeded_max_bytes**: number of times the maximum queued byte limit was reached
 - **stream_tcp.exceeded_max_segs**: number of times the maximum queued segment limit was reached
 - **stream_tcp_excess_prunes**: tcp sessions pruned due to excess
 - **stream_tcp.flows**: total tcp sessions
 - **stream_tcp.gaps**: missing data between PDUs
 - **stream_tcp_ha_prunes**: tcp sessions pruned by high availability sync
 - **stream_tcp_idle_prunes**: tcp sessions pruned due to timeout
 - **stream_tcp.ignored**: tcp packets ignored
 - **stream_tcp.initializing**: number of sessions currently initializing
 - **stream_tcp.internal_events**: 135:X events generated
 - **stream_tcp.max**: max tcp_sessions
-

- **stream.tcp.memcap_prunes**: tcp sessions pruned due to memcap
 - **stream.tcp.memory**: current memory in use
 - **stream.tcp.overlaps**: overlapping segments queued
 - **stream.tcp.preemptive_prunes**: tcp sessions pruned during preemptive pruning
 - **stream.tcp.prunes**: tcp_session prunes
 - **stream.tcp.rebuilt_buffers**: rebuilt PDU sections
 - **stream.tcp.rebuilt_bytes**: total rebuilt bytes
 - **stream.tcp.rebuilt_packets**: total reassembled PDUs
 - **stream.tcp.released**: tcp_session trackers released
 - **stream.tcp.resyns**: SYN received on established session
 - **stream.tcp.segs_queued**: total segments queued
 - **stream.tcp.segs_released**: total segments released
 - **stream.tcp.segs_split**: tcp segments split when reassembling PDUs
 - **stream.tcp.segs_used**: queued tcp segments applied to reassembled PDUs
 - **stream.tcp.server_cleanups**: number of times data from client was flushed when session released
 - **stream.tcp.sessions**: total tcp_sessions
 - **stream.tcp.syn_ack_trackers**: tcp session tracking started on syn-ack
 - **stream.tcp.syn_trackers**: tcp session tracking started on syn
 - **stream.tcp.timeouts**: tcp_session timeouts
 - **stream.tcp_total_prunes**: total tcp sessions pruned
 - **stream.tcp_uni_prunes**: tcp uni sessions pruned
 - **stream.tcp.untracked**: tcp packets not tracked
 - **stream_udp.created**: udp_session trackers created
 - **stream_udp.excess_prunes**: udp sessions pruned due to excess
 - **stream_udp.flows**: total udp sessions
 - **stream_udp_ha_prunes**: udp sessions pruned by high availability sync
 - **stream_udp_idle_prunes**: udp sessions pruned due to timeout
 - **stream_udp.max**: max udp_sessions
 - **stream_udp_memcap_prunes**: udp sessions pruned due to memcap
 - **stream_udp_preemptive_prunes**: udp sessions pruned during preemptive pruning
 - **stream_udp.prunes**: udp_session prunes
 - **stream_udp.released**: udp_session trackers released
 - **stream_udp.sessions**: total udp_sessions
 - **stream_udp.timeouts**: udp_session timeouts
 - **stream_udp_total_prunes**: total udp sessions pruned
-

- **stream.udp_uni_prunes**: udp uni sessions pruned
- **stream.user_excess_prunes**: user sessions pruned due to excess
- **stream.user_flows**: total user sessions
- **stream.user_ha_prunes**: user sessions pruned by high availability sync
- **stream.user_idle_prunes**: user sessions pruned due to timeout
- **stream.user_memcap_prunes**: user sessions pruned due to memcap
- **stream.user_preemptive_prunes**: user sessions pruned during preemptive pruning
- **stream.user_total_prunes**: total user sessions pruned
- **stream.user_uni_prunes**: user uni sessions pruned
- **tcp.bad_tcp4_checksum**: nonzero tcp over ip checksums
- **tcp.bad_tcp6_checksum**: nonzero tcp over ipv6 checksums
- **tcp.connector.messages**: total messages
- **telnet.packets**: total packets
- **udp.bad_udp4_checksum**: nonzero udp over ipv4 checksums
- **udp.bad_udp6_checksum**: nonzero udp over ipv6 checksums
- **wizard.tcp_hits**: tcp identifications
- **wizard.tcp_scans**: tcp payload scans
- **wizard.udp_hits**: udp identifications
- **wizard.udp_scans**: udp payload scans
- **wizard.user_hits**: user identifications
- **wizard.user_scans**: user payload scans

20.6 Generators

- **105**: back_orifice
 - **106**: rpc_decode
 - **112**: arp_spoof
 - **116**: arp
 - **116**: auth
 - **116**: cisco_metadata
 - **116**: decode
 - **116**: eapol
 - **116**: erspan2
 - **116**: erspan3
 - **116**: esp
 - **116**: eth
-

- **116:** fabricpath
 - **116:** gre
 - **116:** gtp
 - **116:** icmp4
 - **116:** icmp6
 - **116:** igmp
 - **116:** ipv4
 - **116:** ipv6
 - **116:** mpls
 - **116:** pgm
 - **116:** pppoe
 - **116:** tcp
 - **116:** token_ring
 - **116:** udp
 - **116:** vlan
 - **116:** wlan
 - **119:** http_inspect
 - **122:** port_scan
 - **123:** stream_ip
 - **124:** smtp
 - **125:** ftp_server
 - **126:** telnet
 - **128:** ssh
 - **129:** stream_tcp
 - **131:** dns
 - **133:** dce_http_proxy
 - **133:** dce_http_server
 - **133:** dce_smb
 - **133:** dce_tcp
 - **133:** dce_udp
 - **134:** latency
 - **136:** reputation
 - **137:** ssl
 - **140:** sip
 - **141:** imap
-

- **142:** pop
- **143:** gtp_inspect
- **144:** modbus
- **145:** dnp3
- **256:** dpx
- **319:** http_global
- **320:** http_server

20.7 Builtin Rules

- **105:1** (back_orifice) BO traffic detected
 - **105:2** (back_orifice) BO client traffic detected
 - **105:3** (back_orifice) BO server traffic detected
 - **105:4** (back_orifice) BO Snort buffer attack
 - **106:1** (rpc_decode) fragmented RPC records
 - **106:2** (rpc_decode) multiple RPC records
 - **106:3** (rpc_decode) large RPC record fragment
 - **106:4** (rpc_decode) incomplete RPC segment
 - **106:5** (rpc_decode) zero-length RPC fragment
 - **112:1** (arp_spoof) unicast ARP request
 - **112:2** (arp_spoof) ethernet/ARP mismatch request for source
 - **112:3** (arp_spoof) ethernet/ARP mismatch request for destination
 - **112:4** (arp_spoof) attempted ARP cache overwrite attack
 - **116:1** (ipv4) not IPv4 datagram
 - **116:2** (ipv4) IPv4 header length < minimum
 - **116:3** (ipv4) IPv4 datagram length < header field
 - **116:4** (ipv4) IPv4 options found with bad lengths
 - **116:5** (ipv4) truncated IPv4 options
 - **116:6** (ipv4) IPv4 datagram length > captured length
 - **116:45** (tcp) TCP packet length is smaller than 20 bytes
 - **116:46** (tcp) TCP data offset is less than 5
 - **116:47** (tcp) TCP header length exceeds packet length
 - **116:54** (tcp) TCP options found with bad lengths
 - **116:55** (tcp) truncated TCP options
 - **116:56** (tcp) T/TCP detected
 - **116:57** (tcp) obsolete TCP options found
-

- **116:58** (tcp) experimental TCP options found
 - **116:59** (tcp) TCP window scale option found with length > 14
 - **116:95** (udp) truncated UDP header
 - **116:96** (udp) invalid UDP header, length field < 8
 - **116:97** (udp) short UDP packet, length field > payload length
 - **116:98** (udp) long UDP packet, length field < payload length
 - **116:105** (icmp4) ICMP header truncated
 - **116:106** (icmp4) ICMP timestamp header truncated
 - **116:107** (icmp4) ICMP address header truncated
 - **116:109** (arp) truncated ARP
 - **116:110** (eapol) truncated EAP header
 - **116:111** (eapol) EAP key truncated
 - **116:112** (eapol) EAP header truncated
 - **116:120** (pppoe) bad PPPOE frame detected
 - **116:130** (vlan) bad VLAN frame
 - **116:131** (vlan) bad LLC header
 - **116:132** (vlan) bad extra LLC info
 - **116:133** (wlan) bad 802.11 LLC header
 - **116:134** (wlan) bad 802.11 extra LLC info
 - **116:140** (token_ring) bad Token Ring header
 - **116:141** (token_ring) bad Token Ring ETHLLC header
 - **116:142** (token_ring) bad Token Ring MRLEN header
 - **116:143** (token_ring) bad Token Ring MR header
 - **116:150** (decode) loopback IP
 - **116:151** (decode) same src/dst IP
 - **116:160** (gre) GRE header length > payload length
 - **116:161** (gre) multiple encapsulations in packet
 - **116:162** (gre) invalid GRE version
 - **116:163** (gre) invalid GRE header
 - **116:164** (gre) invalid GRE v.1 PPTP header
 - **116:165** (gre) GRE trans header length > payload length
 - **116:170** (mpls) bad MPLS frame
 - **116:171** (mpls) MPLS label 0 appears in non-bottom header
 - **116:172** (mpls) MPLS label 1 appears in bottom header
 - **116:173** (mpls) MPLS label 2 appears in non-bottom header
-

- **116:174** (mpls) MPLS label 3 appears in header
 - **116:175** (mpls) MPLS label 4, 5,.. or 15 appears in header
 - **116:176** (mpls) too many MPLS headers
 - **116:250** (icmp4) ICMP original IP header truncated
 - **116:251** (icmp4) ICMP version and original IP header versions differ
 - **116:252** (icmp4) ICMP original datagram length < original IP header length
 - **116:253** (icmp4) ICMP original IP payload < 64 bits
 - **116:254** (icmp4) ICMP original IP payload > 576 bytes
 - **116:255** (icmp4) ICMP original IP fragmented and offset not 0
 - **116:270** (ipv6) IPv6 packet below TTL limit
 - **116:271** (ipv6) IPv6 header claims to not be IPv6
 - **116:272** (ipv6) IPv6 truncated extension header
 - **116:273** (ipv6) IPv6 truncated header
 - **116:274** (ipv6) IPv6 datagram length < header field
 - **116:275** (ipv6) IPv6 datagram length > captured length
 - **116:276** (ipv6) IPv6 packet with destination address ::0
 - **116:277** (ipv6) IPv6 packet with multicast source address
 - **116:278** (ipv6) IPv6 packet with reserved multicast destination address
 - **116:279** (ipv6) IPv6 header includes an undefined option type
 - **116:280** (ipv6) IPv6 address includes an unassigned multicast scope value
 - **116:281** (ipv6) IPv6 header includes an invalid value for the *next header* field
 - **116:282** (ipv6) IPv6 header includes a routing extension header followed by a hop-by-hop header
 - **116:283** (ipv6) IPv6 header includes two routing extension headers
 - **116:285** (icmp6) ICMPv6 packet of type 2 (message too big) with MTU field < 1280
 - **116:286** (icmp6) ICMPv6 packet of type 1 (destination unreachable) with non-RFC 2463 code
 - **116:287** (icmp6) ICMPv6 router solicitation packet with a code not equal to 0
 - **116:288** (icmp6) ICMPv6 router advertisement packet with a code not equal to 0
 - **116:289** (icmp6) ICMPv6 router solicitation packet with the reserved field not equal to 0
 - **116:290** (icmp6) ICMPv6 router advertisement packet with the reachable time field set > 1 hour
 - **116:291** (ipv6) IPV6 tunneled over IPv4, IPv6 header truncated, possible Linux kernel attack
 - **116:292** (ipv6) IPv6 header has destination options followed by a routing header
 - **116:293** (decode) two or more IP (v4 and/or v6) encapsulation layers present
 - **116:294** (esp) truncated encapsulated security payload header
 - **116:295** (ipv6) IPv6 header includes an option which is too big for the containing header
 - **116:296** (ipv6) IPv6 packet includes out-of-order extension headers
-

- **116:297** (gtp) two or more GTP encapsulation layers present
 - **116:298** (gtp) GTP header length is invalid
 - **116:400** (tcp) XMAS attack detected
 - **116:401** (tcp) Nmap XMAS attack detected
 - **116:402** (tcp) DOS NAPTHA vulnerability detected
 - **116:403** (tcp) SYN to multicast address
 - **116:404** (ipv4) IPv4 packet with zero TTL
 - **116:405** (ipv4) IPv4 packet with bad frag bits (both MF and DF set)
 - **116:406** (udp) invalid IPv6 UDP packet, checksum zero
 - **116:407** (ipv4) IPv4 packet frag offset + length exceed maximum
 - **116:408** (ipv4) IPv4 packet from *current net* source address
 - **116:409** (ipv4) IPv4 packet to *current net* dest address
 - **116:410** (ipv4) IPv4 packet from multicast source address
 - **116:411** (ipv4) IPv4 packet from reserved source address
 - **116:412** (ipv4) IPv4 packet to reserved dest address
 - **116:413** (ipv4) IPv4 packet from broadcast source address
 - **116:414** (ipv4) IPv4 packet to broadcast dest address
 - **116:415** (icmp4) ICMP4 packet to multicast dest address
 - **116:416** (icmp4) ICMP4 packet to broadcast dest address
 - **116:418** (icmp4) ICMP4 type other
 - **116:419** (tcp) TCP urgent pointer exceeds payload length or no payload
 - **116:420** (tcp) TCP SYN with FIN
 - **116:421** (tcp) TCP SYN with RST
 - **116:422** (tcp) TCP PDU missing ack for established session
 - **116:423** (tcp) TCP has no SYN, ACK, or RST
 - **116:424** (eth) truncated ethernet header
 - **116:425** (ipv4) truncated IPv4 header
 - **116:426** (icmp4) truncated ICMP4 header
 - **116:427** (icmp6) truncated ICMP6 header
 - **116:428** (ipv4) IPv4 packet below TTL limit
 - **116:429** (ipv6) IPv6 packet has zero hop limit
 - **116:430** (ipv4) IPv4 packet both DF and offset set
 - **116:431** (icmp6) ICMPv6 type not decoded
 - **116:432** (icmp6) ICMPv6 packet to multicast address
 - **116:433** (tcp) DDOS shaft SYN flood
-

- **116:434** (icmp4) ICMP ping Nmap
 - **116:435** (icmp4) ICMP icmpenum v1.1.1
 - **116:436** (icmp4) ICMP redirect host
 - **116:437** (icmp4) ICMP redirect net
 - **116:438** (icmp4) ICMP traceroute ipopts
 - **116:439** (icmp4) ICMP source quench
 - **116:440** (icmp4) broadscan smurf scanner
 - **116:441** (icmp4) ICMP destination unreachable communication administratively prohibited
 - **116:442** (icmp4) ICMP destination unreachable communication with destination host is administratively prohibited
 - **116:443** (icmp4) ICMP destination unreachable communication with destination network is administratively prohibited
 - **116:444** (ipv4) IPv4 option set
 - **116:445** (udp) large UDP packet (> 4000 bytes)
 - **116:446** (tcp) TCP port 0 traffic
 - **116:447** (udp) UDP port 0 traffic
 - **116:448** (ipv4) IPv4 reserved bit set
 - **116:449** (decode) unassigned/reserved IP protocol
 - **116:450** (decode) bad IP protocol
 - **116:451** (icmp4) ICMP path MTU denial of service attempt
 - **116:452** (icmp4) Linux ICMP header DOS attempt
 - **116:453** (ipv6) ISATAP-addressed IPv6 traffic spoofing attempt
 - **116:454** (pgm) PGM nak list overflow attempt
 - **116:455** (igmp) DOS IGMP IP options validation attempt
 - **116:456** (ipv6) too many IPv6 extension headers
 - **116:457** (icmp6) ICMPv6 packet of type 1 (destination unreachable) with non-RFC 4443 code
 - **116:458** (ipv6) bogus fragmentation packet, possible BSD attack
 - **116:459** (decode) fragment with zero length
 - **116:460** (icmp6) ICMPv6 node info query/response packet with a code greater than 2
 - **116:461** (ipv6) IPv6 routing type 0 extension header
 - **116:462** (erspan2) ERSpan header version mismatch
 - **116:463** (erspan2) captured length < ERSpan type2 header length
 - **116:464** (erspan3) captured < ERSpan type3 header length
 - **116:465** (auth) truncated authentication header
 - **116:466** (auth) bad authentication header length
 - **116:467** (fabricpath) truncated FabricPath header
 - **116:468** (ciscometadata) truncated Cisco Metadata header
-

- **116:469** (cisco metadata) invalid Cisco Metadata option length
 - **116:470** (cisco metadata) invalid Cisco Metadata option type
 - **116:471** (cisco metadata) invalid Cisco Metadata SGT
 - **116:472** (decode) too many protocols present
 - **119:1** (http_inspect) ascii encoding
 - **119:2** (http_inspect) double decoding attack
 - **119:3** (http_inspect) u encoding
 - **119:4** (http_inspect) bare byte unicode encoding
 - **119:5** (http_inspect) obsolete event—should not appear
 - **119:6** (http_inspect) UTF-8 encoding
 - **119:7** (http_inspect) IIS unicode codepoint encoding
 - **119:8** (http_inspect) multi_slash encoding
 - **119:9** (http_inspect) IIS backslash evasion
 - **119:10** (http_inspect) self directory traversal
 - **119:11** (http_inspect) directory traversal
 - **119:12** (http_inspect) apache whitespace (tab)
 - **119:13** (http_inspect) non-RFC http delimiter
 - **119:14** (http_inspect) non-RFC defined char
 - **119:15** (http_inspect) oversize request-uri directory
 - **119:16** (http_inspect) oversize chunk encoding
 - **119:17** (http_inspect) unauthorized proxy use detected
 - **119:18** (http_inspect) webroot directory traversal
 - **119:19** (http_inspect) long header
 - **119:20** (http_inspect) max header fields
 - **119:21** (http_inspect) multiple content length
 - **119:22** (http_inspect) chunk size mismatch detected
 - **119:23** (http_inspect) invalid IP in true-client-IP/XFF header
 - **119:24** (http_inspect) multiple host hdrs detected
 - **119:25** (http_inspect) hostname exceeds 255 characters
 - **119:26** (http_inspect) header parsing space saturation
 - **119:27** (http_inspect) client consecutive small chunk sizes
 - **119:28** (http_inspect) post w/o content-length or chunks
 - **119:29** (http_inspect) multiple true ips in a session
 - **119:30** (http_inspect) both true-client-IP and XFF hdrs present
 - **119:31** (http_inspect) unknown method
-

- **119:32** (http_inspect) simple request
 - **119:33** (http_inspect) unescaped space in HTTP URI
 - **119:34** (http_inspect) too many pipelined requests
 - **119:35** (http_inspect) anomalous http server on undefined HTTP port
 - **119:36** (http_inspect) invalid status code in HTTP response
 - **119:37** (http_inspect) no content-length or transfer-encoding in HTTP response
 - **119:38** (http_inspect) HTTP response has UTF charset which failed to normalize
 - **119:39** (http_inspect) HTTP response has UTF-7 charset
 - **119:40** (http_inspect) HTTP response gzip decompression failed
 - **119:41** (http_inspect) server consecutive small chunk sizes
 - **119:42** (http_inspect) invalid content-length or chunk size
 - **119:43** (http_inspect) javascript obfuscation levels exceeds 1
 - **119:44** (http_inspect) javascript whitespaces exceeds max allowed
 - **119:45** (http_inspect) multiple encodings within javascript obfuscated data
 - **119:46** (http_inspect) SWF file zlib decompression failure
 - **119:47** (http_inspect) SWF file LZMA decompression failure
 - **119:48** (http_inspect) PDF file deflate decompression failure
 - **119:49** (http_inspect) PDF file unsupported compression type
 - **119:50** (http_inspect) PDF file cascaded compression
 - **119:51** (http_inspect) PDF file parse failure
 - **119:52** (http_inspect) not HTTP traffic
 - **119:53** (http_inspect) chunk length has excessive leading zeros
 - **119:54** (http_inspect) white space before or between messages
 - **119:55** (http_inspect) request message without URI
 - **119:56** (http_inspect) control character in reason phrase
 - **119:57** (http_inspect) illegal extra whitespace in start line
 - **119:58** (http_inspect) corrupted HTTP version
 - **119:59** (http_inspect) unknown HTTP version
 - **119:60** (http_inspect) format error in HTTP header
 - **119:61** (http_inspect) chunk header options present
 - **119:62** (http_inspect) URI badly formatted
 - **119:63** (http_inspect) unrecognized type of percent encoding in URI
 - **119:64** (http_inspect) HTTP chunk misformatted
 - **119:65** (http_inspect) white space following chunk length
 - **119:66** (http_inspect) white space within header name
-

- **119:67** (http_inspect) excessive gzip compression
 - **119:68** (http_inspect) gzip decompression failed
 - **119:69** (http_inspect) HTTP 0.9 requested followed by another request
 - **119:70** (http_inspect) HTTP 0.9 request following a normal request
 - **119:71** (http_inspect) message has both Content-Length and Transfer-Encoding
 - **119:72** (http_inspect) status code implying no body combined with Transfer-Encoding or nonzero Content-Length
 - **119:73** (http_inspect) Transfer-Encoding did not end with chunked
 - **119:74** (http_inspect) Transfer-Encoding with chunked not at end
 - **119:75** (http_inspect) misformatted HTTP traffic
 - **119:76** (http_inspect) unsupported Transfer-Encoding or Content-Encoding used
 - **119:77** (http_inspect) unknown Transfer-Encoding or Content-Encoding used
 - **119:78** (http_inspect) multiple layers of compression encodings applied
 - **119:79** (http_inspect) server response before client request
 - **119:80** (http_inspect) PDF/SWF decompression of server response too big
 - **122:1** (port_scan) TCP portscan
 - **122:2** (port_scan) TCP decoy portscan
 - **122:3** (port_scan) TCP portsweep
 - **122:4** (port_scan) TCP distributed portscan
 - **122:5** (port_scan) TCP filtered portscan
 - **122:6** (port_scan) TCP filtered decoy portscan
 - **122:7** (port_scan) TCP filtered portsweep
 - **122:8** (port_scan) TCP filtered distributed portscan
 - **122:9** (port_scan) IP protocol scan
 - **122:10** (port_scan) IP decoy protocol scan
 - **122:11** (port_scan) IP protocol sweep
 - **122:12** (port_scan) IP distributed protocol scan
 - **122:13** (port_scan) IP filtered protocol scan
 - **122:14** (port_scan) IP filtered decoy protocol scan
 - **122:15** (port_scan) IP filtered protocol sweep
 - **122:16** (port_scan) IP filtered distributed protocol scan
 - **122:17** (port_scan) UDP portscan
 - **122:18** (port_scan) UDP decoy portscan
 - **122:19** (port_scan) UDP portsweep
 - **122:20** (port_scan) UDP distributed portscan
 - **122:21** (port_scan) UDP filtered portscan
-

- **122:22** (port_scan) UDP filtered decoy portscan
 - **122:23** (port_scan) UDP filtered portsweep
 - **122:24** (port_scan) UDP filtered distributed portscan
 - **122:25** (port_scan) ICMP sweep
 - **122:26** (port_scan) ICMP filtered sweep
 - **122:27** (port_scan) open port
 - **123:1** (stream_ip) inconsistent IP options on fragmented packets
 - **123:2** (stream_ip) teardrop attack
 - **123:3** (stream_ip) short fragment, possible DOS attempt
 - **123:4** (stream_ip) fragment packet ends after defragmented packet
 - **123:5** (stream_ip) zero-byte fragment packet
 - **123:6** (stream_ip) bad fragment size, packet size is negative
 - **123:7** (stream_ip) bad fragment size, packet size is greater than 65536
 - **123:8** (stream_ip) fragmentation overlap
 - **123:11** (stream_ip) TTL value less than configured minimum, not using for reassembly
 - **123:12** (stream_ip) excessive fragment overlap
 - **123:13** (stream_ip) tiny fragment
 - **124:1** (smtp) attempted command buffer overflow
 - **124:2** (smtp) attempted data header buffer overflow
 - **124:3** (smtp) attempted response buffer overflow
 - **124:4** (smtp) attempted specific command buffer overflow
 - **124:5** (smtp) unknown command
 - **124:6** (smtp) illegal command
 - **124:7** (smtp) attempted header name buffer overflow
 - **124:8** (smtp) attempted X-Link2State command buffer overflow
 - **124:10** (smtp) base64 decoding failed
 - **124:11** (smtp) quoted-printable decoding failed
 - **124:13** (smtp) Unix-to-Unix decoding failed
 - **124:14** (smtp) Cyrus SASL authentication attack
 - **124:15** (smtp) attempted authentication command buffer overflow
 - **125:1** (ftp_server) TELNET cmd on FTP command channel
 - **125:2** (ftp_server) invalid FTP command
 - **125:3** (ftp_server) FTP command parameters were too long
 - **125:4** (ftp_server) FTP command parameters were malformed
 - **125:5** (ftp_server) FTP command parameters contained potential string format
-

- **125:6** (ftp_server) FTP response message was too long
 - **125:7** (ftp_server) FTP traffic encrypted
 - **125:8** (ftp_server) FTP bounce attempt
 - **125:9** (ftp_server) evasive (incomplete) TELNET cmd on FTP command channel
 - **126:1** (telnet) consecutive telnet AYT commands beyond threshold
 - **126:2** (telnet) telnet traffic encrypted
 - **126:3** (telnet) telnet subnegotiation begin command without subnegotiation end
 - **128:1** (ssh) challenge-response overflow exploit
 - **128:2** (ssh) SSH1 CRC32 exploit
 - **128:3** (ssh) server version string overflow
 - **128:5** (ssh) bad message direction
 - **128:6** (ssh) payload size incorrect for the given payload
 - **128:7** (ssh) failed to detect SSH version string
 - **129:1** (stream_tcp) SYN on established session
 - **129:2** (stream_tcp) data on SYN packet
 - **129:3** (stream_tcp) data sent on stream not accepting data
 - **129:4** (stream_tcp) TCP timestamp is outside of PAWS window
 - **129:5** (stream_tcp) bad segment, adjusted size ≤ 0 (deprecated)
 - **129:6** (stream_tcp) window size (after scaling) larger than policy allows
 - **129:7** (stream_tcp) limit on number of overlapping TCP packets reached
 - **129:8** (stream_tcp) data sent on stream after TCP reset sent
 - **129:9** (stream_tcp) TCP client possibly hijacked, different ethernet address
 - **129:10** (stream_tcp) TCP server possibly hijacked, different ethernet address
 - **129:11** (stream_tcp) TCP data with no TCP flags set
 - **129:12** (stream_tcp) consecutive TCP small segments exceeding threshold
 - **129:13** (stream_tcp) 4-way handshake detected
 - **129:14** (stream_tcp) TCP timestamp is missing
 - **129:15** (stream_tcp) reset outside window
 - **129:16** (stream_tcp) FIN number is greater than prior FIN
 - **129:17** (stream_tcp) ACK number is greater than prior FIN
 - **129:18** (stream_tcp) data sent on stream after TCP reset received
 - **129:19** (stream_tcp) TCP window closed before receiving data
 - **129:20** (stream_tcp) TCP session without 3-way handshake
 - **131:1** (dns) obsolete DNS RR types
 - **131:2** (dns) experimental DNS RR types
-

- **131:3** (dns) DNS client rdata txt overflow
 - **133:2** (dce_smb) SMB - bad NetBIOS session service session type
 - **133:3** (dce_smb) SMB - bad SMB message type
 - **133:4** (dce_smb) SMB - bad SMB Id (not \xffSMB for SMB1 or not \xfeSMB for SMB2)
 - **133:5** (dce_smb) SMB - bad word count or structure size
 - **133:6** (dce_smb) SMB - bad byte count
 - **133:7** (dce_smb) SMB - bad format type
 - **133:8** (dce_smb) SMB - bad offset
 - **133:9** (dce_smb) SMB - zero total data count
 - **133:10** (dce_smb) SMB - NetBIOS data length less than SMB header length
 - **133:12** (dce_smb) SMB - remaining NetBIOS data length less than command byte count
 - **133:13** (dce_smb) SMB - remaining NetBIOS data length less than command data size
 - **133:14** (dce_smb) SMB - remaining total data count less than this command data size
 - **133:15** (dce_smb) SMB - total data sent (STDu64) greater than command total data expected
 - **133:16** (dce_smb) SMB - byte count less than command data size (STDu64)
 - **133:17** (dce_smb) SMB - invalid command data size for byte count
 - **133:18** (dce_smb) SMB - excessive tree connect requests with pending tree connect responses
 - **133:19** (dce_smb) SMB - excessive read requests with pending read responses
 - **133:20** (dce_smb) SMB - excessive command chaining
 - **133:21** (dce_smb) SMB - multiple chained tree connect requests
 - **133:22** (dce_smb) SMB - multiple chained tree connect requests
 - **133:23** (dce_smb) SMB - chained/compounded login followed by logoff
 - **133:24** (dce_smb) SMB - chained/compounded tree connect followed by tree disconnect
 - **133:25** (dce_smb) SMB - chained/compounded open pipe followed by close pipe
 - **133:26** (dce_smb) SMB - invalid share access
 - **133:27** (dce_smb) connection oriented DCE/RPC - invalid major version
 - **133:27** (dce_tcp) connection oriented DCE/RPC - invalid major version
 - **133:28** (dce_smb) connection oriented DCE/RPC - invalid minor version
 - **133:28** (dce_tcp) connection oriented DCE/RPC - invalid minor version
 - **133:29** (dce_smb) connection-oriented DCE/RPC - invalid PDU type
 - **133:29** (dce_tcp) connection-oriented DCE/RPC - invalid PDU type
 - **133:30** (dce_smb) connection-oriented DCE/RPC - fragment length less than header size
 - **133:30** (dce_tcp) connection-oriented DCE/RPC - fragment length less than header size
 - **133:32** (dce_smb) connection-oriented DCE/RPC - no context items specified
 - **133:32** (dce_tcp) connection-oriented DCE/RPC - no context items specified
-

- **133:33** (dce_smb) connection-oriented DCE/RPC -no transfer syntaxes specified
 - **133:33** (dce_tcp) connection-oriented DCE/RPC -no transfer syntaxes specified
 - **133:34** (dce_smb) connection-oriented DCE/RPC - fragment length on non-last fragment less than maximum negotiated fragment transmit size for client
 - **133:34** (dce_tcp) connection-oriented DCE/RPC - fragment length on non-last fragment less than maximum negotiated fragment transmit size for client
 - **133:35** (dce_smb) connection-oriented DCE/RPC - fragment length greater than maximum negotiated fragment transmit size
 - **133:35** (dce_tcp) connection-oriented DCE/RPC - fragment length greater than maximum negotiated fragment transmit size
 - **133:36** (dce_smb) connection-oriented DCE/RPC - alter context byte order different from bind
 - **133:36** (dce_tcp) connection-oriented DCE/RPC - alter context byte order different from bind
 - **133:37** (dce_smb) connection-oriented DCE/RPC - call id of non first/last fragment different from call id established for fragmented request
 - **133:37** (dce_tcp) connection-oriented DCE/RPC - call id of non first/last fragment different from call id established for fragmented request
 - **133:38** (dce_smb) connection-oriented DCE/RPC - opnum of non first/last fragment different from opnum established for fragmented request
 - **133:38** (dce_tcp) connection-oriented DCE/RPC - opnum of non first/last fragment different from opnum established for fragmented request
 - **133:39** (dce_smb) connection-oriented DCE/RPC - context id of non first/last fragment different from context id established for fragmented request
 - **133:39** (dce_tcp) connection-oriented DCE/RPC - context id of non first/last fragment different from context id established for fragmented request
 - **133:40** (dce_udp) connection-less DCE/RPC - invalid major version
 - **133:41** (dce_udp) connection-less DCE/RPC - invalid PDU type
 - **133:42** (dce_udp) connection-less DCE/RPC - data length less than header size
 - **133:43** (dce_udp) connection-less DCE/RPC - bad sequence number
 - **133:44** (dce_smb) SMB - invalid SMB version 1 seen
 - **133:45** (dce_smb) SMB - invalid SMB version 2 seen
 - **133:46** (dce_smb) SMB - invalid user, tree connect, file binding
 - **133:47** (dce_smb) SMB - excessive command compounding
 - **133:48** (dce_smb) SMB - zero data count
 - **133:50** (dce_smb) SMB - maximum number of outstanding requests exceeded
 - **133:51** (dce_smb) SMB - outstanding requests with same MID
 - **133:52** (dce_smb) SMB - deprecated dialect negotiated
 - **133:53** (dce_smb) SMB - deprecated command used
 - **133:54** (dce_smb) SMB - unusual command used
 - **133:55** (dce_smb) SMB - invalid setup count for command
 - **133:56** (dce_smb) SMB - client attempted multiple dialect negotiations on session
-

- **133:57** (dce_smb) SMB - client attempted to create or set a file's attributes to readonly/hidden/system
 - **133:58** (dce_smb) SMB - file offset provided is greater than file size specified
 - **133:59** (dce_smb) SMB - next command specified in SMB2 header is beyond payload boundary
 - **134:1** (latency) rule tree suspended due to latency
 - **134:2** (latency) rule tree re-enabled after suspend timeout
 - **134:3** (latency) packet fastpathed due to latency
 - **136:1** (reputation) packets blacklisted
 - **136:2** (reputation) packets whitelisted
 - **136:3** (reputation) packets monitored
 - **137:1** (ssl) invalid client HELLO after server HELLO detected
 - **137:2** (ssl) invalid server HELLO without client HELLO detected
 - **137:3** (ssl) heartbeat read overrun attempt detected
 - **137:4** (ssl) large heartbeat response detected
 - **140:1** (sip) maximum sessions reached
 - **140:2** (sip) empty request URI
 - **140:3** (sip) URI is too long
 - **140:4** (sip) empty call-Id
 - **140:5** (sip) Call-Id is too long
 - **140:6** (sip) CSeq number is too large or negative
 - **140:7** (sip) request name in CSeq is too long
 - **140:8** (sip) empty From header
 - **140:9** (sip) From header is too long
 - **140:10** (sip) empty To header
 - **140:11** (sip) To header is too long
 - **140:12** (sip) empty Via header
 - **140:13** (sip) Via header is too long
 - **140:14** (sip) empty Contact
 - **140:15** (sip) contact is too long
 - **140:16** (sip) content length is too large or negative
 - **140:17** (sip) multiple SIP messages in a packet
 - **140:18** (sip) content length mismatch
 - **140:19** (sip) request name is invalid
 - **140:20** (sip) Invite replay attack
 - **140:21** (sip) illegal session information modification
 - **140:22** (sip) response status code is not a 3 digit number
-

- **140:23** (sip) empty Content-type header
 - **140:24** (sip) SIP version is invalid
 - **140:25** (sip) mismatch in METHOD of request and the CSEQ header
 - **140:26** (sip) method is unknown
 - **140:27** (sip) maximum dialogs within a session reached
 - **141:1** (imap) unknown IMAP3 command
 - **141:2** (imap) unknown IMAP3 response
 - **141:4** (imap) base64 decoding failed
 - **141:5** (imap) quoted-printable decoding failed
 - **141:7** (imap) Unix-to-Unix decoding failed
 - **142:1** (pop) unknown POP3 command
 - **142:2** (pop) unknown POP3 response
 - **142:4** (pop) base64 decoding failed
 - **142:5** (pop) quoted-printable decoding failed
 - **142:7** (pop) Unix-to-Unix decoding failed
 - **143:1** (gtp_inspect) message length is invalid
 - **143:2** (gtp_inspect) information element length is invalid
 - **143:3** (gtp_inspect) information elements are out of order
 - **144:1** (modbus) length in Modbus MBAP header does not match the length needed for the given function
 - **144:2** (modbus) Modbus protocol ID is non-zero
 - **144:3** (modbus) reserved Modbus function code in use
 - **145:1** (dnp3) DNP3 link-layer frame contains bad CRC
 - **145:2** (dnp3) DNP3 link-layer frame was dropped
 - **145:3** (dnp3) DNP3 transport-layer segment was dropped during reassembly
 - **145:4** (dnp3) DNP3 reassembly buffer was cleared without reassembling a complete message
 - **145:5** (dnp3) DNP3 link-layer frame uses a reserved address
 - **145:6** (dnp3) DNP3 application-layer fragment uses a reserved function code
 - **256:1** (dpx) too much data sent to port
 - **319:1** (http_global) ascii encoding
 - **319:2** (http_global) double decoding attack
 - **319:3** (http_global) u encoding
 - **319:4** (http_global) bare byte unicode encoding
 - **319:5** (http_global) base36 encoding
 - **319:6** (http_global) UTF-8 encoding
 - **319:7** (http_global) IIS unicode codepoint encoding
-

- **319:8** (http_global) multi_slash encoding
 - **319:9** (http_global) IIS backslash evasion
 - **319:10** (http_global) self directory traversal
 - **319:11** (http_global) directory traversal
 - **319:12** (http_global) apache whitespace (tab)
 - **319:13** (http_global) non-RFC http delimiter
 - **319:14** (http_global) non-RFC defined char
 - **319:15** (http_global) oversize request-URI directory
 - **319:16** (http_global) oversize chunk encoding
 - **319:17** (http_global) unauthorized proxy use detected
 - **319:18** (http_global) webroot directory traversal
 - **319:19** (http_global) long header
 - **319:20** (http_global) max header fields
 - **319:21** (http_global) multiple content length
 - **319:22** (http_global) chunk size mismatch detected
 - **319:23** (http_global) invalid ip in true-client-IP/XFF header
 - **319:24** (http_global) multiple host hdrs detected
 - **319:25** (http_global) hostname exceeds 255 characters
 - **319:26** (http_global) header parsing space saturation
 - **319:27** (http_global) client consecutive small chunk sizes
 - **319:28** (http_global) post w/o content-length or chunks
 - **319:29** (http_global) multiple true IPs in a session
 - **319:30** (http_global) both true-client-IP and XFF hdrs present
 - **319:31** (http_global) unknown method
 - **319:32** (http_global) simple request
 - **319:33** (http_global) unescaped space in http URI
 - **319:34** (http_global) too many pipelined requests
 - **320:1** (http_server) anomalous http server on undefined HTTP port
 - **320:2** (http_server) invalid status code in HTTP response
 - **320:3** (http_server) no content-length or transfer-encoding in HTTP response
 - **320:4** (http_server) HTTP response has UTF charset which failed to normalize
 - **320:5** (http_server) HTTP response has UTF-7 charset
 - **320:6** (http_server) HTTP response gzip decompression failed
 - **320:7** (http_server) server consecutive small chunk sizes
 - **320:8** (http_server) invalid content-length or chunk size
-

- **320:9** (http_server) javascript obfuscation levels exceeds 1
- **320:10** (http_server) javascript whitespaces exceeds max allowed
- **320:11** (http_server) multiple encodings within javascript obfuscated data
- **320:12** (http_server) HTTP response SWF file zlib decompression failure
- **320:13** (http_server) HTTP response SWF file LZMA decompression failure
- **320:14** (http_server) HTTP response PDF file deflate decompression failure
- **320:15** (http_server) HTTP response PDF file unsupported compression type
- **320:16** (http_server) HTTP response PDF file cascaded compression
- **320:17** (http_server) HTTP response PDF file parse failure

20.8 Command Set

- **packet_capture.disable()**: stop packet dump
- **packet_capture.enable(filter)**: dump raw packets
- **snort.detach()**: exit shell w/o shutdown
- **snort.dump_stats()**: show summary statistics
- **snort.help()**: this output
- **snort.pause()**: suspend packet processing
- **snort.quit()**: shutdown and dump-stats
- **snort.reload_config(filename)**: load new configuration
- **snort.reload_hosts(filename)**: load a new hosts table
- **snort.resume()**: continue packet processing
- **snort.rotate_stats()**: roll perfmonitor log files
- **snort.show_plugins()**: show available plugins

20.9 Signals



Important

Signal numbers are for the system that generated this documentation and are not applicable elsewhere.

- **hosts(23)**: reload hosts file
 - **int(2)**: shutdown normally
 - **quit(3)**: shutdown as if started with --dirty-pig
 - **reload(1)**: reload config file
 - **rotate(12)**: rotate stats files
 - **stats(10)**: dump stats to stdout
 - **term(15)**: shutdown normally
-

20.10 Configuration Changes

```

change -> dynamicdetection ==> 'snort.--plugin_path=<path>'
change -> dynamicengine ==> 'snort.--plugin_path=<path>'
change -> dynamicpreprocessor ==> 'snort.--plugin_path=<path>'
change -> dynamicsidechannel ==> 'snort.--plugin_path=<path>'
change -> alertfile: 'config alertfile:' ==> 'alert_fast.file'
change -> alertfile: 'config alertfile:' ==> 'alert_full.file'
change -> attribute_table: 'STREAM_POLICY' ==> 'hosts: tcp_policy'
change -> attribute_table: 'filename <file_name>' ==> 'hosts[]'
change -> config ' addressspace_agnostic' ==> ' packets. address_space_agnostic'
change -> config ' checksum_mode' ==> ' network. checksum_eval'
change -> config ' daq' ==> ' daq. type'
change -> config ' daq_dir' ==> ' daq. dir'
change -> config ' daq_mode' ==> ' daq. mode'
change -> config ' daq_var' ==> ' daq. var'
change -> config ' detection_filter' ==> ' alerts. detection_filter_memcap'
change -> config ' enable_deep_teredo_inspection' ==> ' udp. deep_teredo_inspection'
change -> config ' event_filter' ==> ' alerts. event_filter_memcap'
change -> config ' max_attribute_hosts' ==> ' attribute_table. max_hosts'
change -> config ' max_attribute_services_per_host' ==> ' attribute_table. ←
    max_services_per_host'
change -> config ' nopcre' ==> ' detection. pcre_enable'
change -> config ' pkt_count' ==> ' packets. limit'
change -> config ' rate_filter' ==> ' alerts. rate_filter_memcap'
change -> config ' react' ==> ' react. page'
change -> config ' threshold' ==> ' alerts. event_filter_memcap'
change -> csv: 'dgmmlen' ==> 'dgm_len'
change -> csv: 'dst' ==> 'dst_addr'
change -> csv: 'dstport' ==> 'dst_port'
change -> csv: 'ethdst' ==> 'eth_dst'
change -> csv: 'ethlen' ==> 'eth_len'
change -> csv: 'ethsrc' ==> 'eth_src'
change -> csv: 'ethtype' ==> 'eth_type'
change -> csv: 'icmpcode' ==> 'icmp_code'
change -> csv: 'icmpid' ==> 'icmp_id'
change -> csv: 'icmpseq' ==> 'icmp_seq'
change -> csv: 'icmptype' ==> 'icmp_type'
change -> csv: 'iplen' ==> 'ip_len'
change -> csv: 'sig_generator' ==> 'gid'
change -> csv: 'sig_id' ==> 'sid'
change -> csv: 'sig_rev' ==> 'rev'
change -> csv: 'src' ==> 'src_addr'
change -> csv: 'srcport' ==> 'src_port'
change -> csv: 'tcpack' ==> 'tcp_ack'
change -> csv: 'tcpflags' ==> 'tcp_flags'
change -> csv: 'tcplen' ==> 'tcp_len'
change -> csv: 'tcpseq' ==> 'tcp_seq'
change -> csv: 'tcpwindow' ==> 'tcp_win'
change -> csv: 'udplength' ==> 'udp_len'
change -> detection: 'ac' ==> 'ac_full_q'
change -> detection: 'ac-banded' ==> 'ac_banded'
change -> detection: 'ac-bnfa' ==> 'ac_bnfa_q'
change -> detection: 'ac-bnfa-nq' ==> 'ac_bnfa'
change -> detection: 'ac-bnfa-q' ==> 'ac_bnfa_q'
change -> detection: 'ac-nq' ==> 'ac_full'
change -> detection: 'ac-q' ==> 'ac_full_q'
change -> detection: 'ac-sparsebands' ==> 'ac_sparse_bands'
change -> detection: 'ac-split' ==> 'ac_full_q'
change -> detection: 'ac-split' ==> 'split_any_any'
change -> detection: 'ac-std' ==> 'ac_std'
change -> detection: 'acs' ==> 'ac_sparse'

```

```
change -> detection: 'bleedover-port-limit' ==> 'bleedover_port_limit'
change -> detection: 'intel-cpm' ==> 'intel_cpm'
change -> detection: 'lowmem' ==> 'lowmem_q'
change -> detection: 'lowmem-ng' ==> 'lowmem'
change -> detection: 'lowmem-q' ==> 'lowmem_q'
change -> detection: 'max-pattern-len' ==> 'max_pattern_len'
change -> detection: 'search-method' ==> 'search_method'
change -> detection: 'search-optimize' ==> 'search_optimize'
change -> detection: 'split-any-any' ==> 'split_any_any'
change -> dns: 'ports' ==> 'bindings'
change -> event_filter: 'gen_id' ==> 'gid'
change -> event_filter: 'sig_id' ==> 'sid'
change -> event_filter: 'threshold' ==> 'event_filter'
change -> file: 'config file: file_block_timeout' ==> 'block_timeout'
change -> file: 'config file: file_type_depth' ==> 'type_depth'
change -> file: 'config file: signature' ==> 'enable_signature'
change -> file: 'config file: type_id' ==> 'enable_type'
change -> frag3_engine: 'min_fragment_length' ==> 'min_frag_length'
change -> frag3_engine: 'overlap_limit' ==> 'max_overlaps'
change -> frag3_engine: 'policy bsd-right' ==> 'policy = bsd_right'
change -> frag3_engine: 'timeout' ==> 'session_timeout'
change -> ftp_telnet_protocol: 'alt_max_param_len' ==> 'cmd_validity'
change -> ftp_telnet_protocol: 'data_chan' ==> 'ignore_data_chan'
change -> ftp_telnet_protocol: 'ports' ==> 'bindings'
change -> gtp: 'ports' ==> 'gtp_ports'
change -> http_inspect: 'http_inspect' ==> 'http_global'
change -> http_inspect_server: 'apache_whitespace' ==> 'profile.apache_whitespace'
change -> http_inspect_server: 'ascii' ==> 'profile.ascii'
change -> http_inspect_server: 'bare_byte' ==> 'profile.bare_byte'
change -> http_inspect_server: 'chunk_length' ==> 'profile.chunk_length'
change -> http_inspect_server: 'client_flow_depth' ==> 'profile.client_flow_depth'
change -> http_inspect_server: 'directory' ==> 'profile.directory'
change -> http_inspect_server: 'double_decode' ==> 'profile.double_decode'
change -> http_inspect_server: 'enable_cookie' ==> 'enable_cookies'
change -> http_inspect_server: 'flow_depth' ==> 'server_flow_depth'
change -> http_inspect_server: 'http_inspect_server' ==> 'http_inspect'
change -> http_inspect_server: 'iis_backslash' ==> 'profile.iis_backslash'
change -> http_inspect_server: 'iis_delimiter' ==> 'profile.iis_delimiter'
change -> http_inspect_server: 'iis_unicode' ==> 'profile.iis_unicode'
change -> http_inspect_server: 'max_header_length' ==> 'profile.max_header_length'
change -> http_inspect_server: 'max_headers' ==> 'profile.max_headers'
change -> http_inspect_server: 'max_spaces' ==> 'profile.max_spaces'
change -> http_inspect_server: 'multi_slash' ==> 'profile.multi_slash'
change -> http_inspect_server: 'non_rfc_char' ==> 'non_rfc_chars'
change -> http_inspect_server: 'non_strict' ==> 'profile.non_strict'
change -> http_inspect_server: 'normalize_utf' ==> 'profile.normalize_utf'
change -> http_inspect_server: 'ports' ==> 'bindings'
change -> http_inspect_server: 'u_encode' ==> 'profile.u_encode'
change -> http_inspect_server: 'utf_8' ==> 'profile.utf_8'
change -> http_inspect_server: 'webroot' ==> 'profile.webroot'
change -> http_inspect_server: 'whitespace_chars' ==> 'profile.whitespace_chars'
change -> imap: 'ports' ==> 'bindings'
change -> paf_max: 'paf_max [0:63780]' ==> 'max_pdu [1460:63780]'
change -> perfmonitor: 'accumulate' ==> 'reset = false'
change -> perfmonitor: 'flow-file' ==> 'flow_file = true'
change -> perfmonitor: 'flow-ip' ==> 'flow_ip'
change -> perfmonitor: 'flow-ip-file' ==> 'flow_ip_file = true'
change -> perfmonitor: 'flow-ip-memcap' ==> 'flow_ip_memcap'
change -> perfmonitor: 'flow-ports' ==> 'flow_ports'
change -> perfmonitor: 'pktcnt' ==> 'packets'
change -> perfmonitor: 'snortfile' ==> 'file = true'
change -> perfmonitor: 'time' ==> 'seconds'
```

```
change -> policy_mode: 'inline_test' ==> 'inline-test'
change -> pop: 'ports' ==> 'bindings'
change -> ppm: 'max-pkt-time' ==> 'max_pkt_time'
change -> ppm: 'max-rule-time' ==> 'max_rule_time'
change -> ppm: 'pkt-log' ==> 'pkt_log'
change -> ppm: 'rule-log' ==> 'rule_log'
change -> ppm: 'suspend-timeout' ==> 'suspend_timeout'
change -> preprocessor 'normalize_icmp4' ==> 'normalize.icmp4'
change -> preprocessor 'normalize_icmp6' ==> 'normalize.icmp6'
change -> preprocessor 'normalize_ip6' ==> 'normalize.ip6'
change -> profile: 'print' ==> 'count'
change -> rate_filter: 'gen_id' ==> 'gid'
change -> rate_filter: 'sig_id' ==> 'sid'
change -> rule_state: 'disabled' ==> 'enable'
change -> rule_state: 'enabled' ==> 'enable'
change -> sfportscan: 'proto' ==> 'protos'
change -> sfportscan: 'scan_type' ==> 'scan_types'
change -> sip: 'ports' ==> 'bindings'
change -> smtp: 'ports' ==> 'bindings'
change -> ssh: 'server_ports' ==> 'bindings'
change -> ssl: 'ports' ==> 'bindings'
change -> stream5_global: 'max_active_responses' ==> 'max_responses'
change -> stream5_global: 'max_icmp' ==> 'max_sessions'
change -> stream5_global: 'max_ip' ==> 'max_sessions'
change -> stream5_global: 'max_tcp' ==> 'max_sessions'
change -> stream5_global: 'max_udp' ==> 'max_sessions'
change -> stream5_global: 'min_response_seconds' ==> 'min_interval'
change -> stream5_global: 'prune_log_max' ==> 'histogram'
change -> stream5_global: 'tcp_cache_nominal_timeout' ==> 'pruning_timeout'
change -> stream5_global: 'tcp_cache_pruning_timeout' ==> 'idle_timeout'
change -> stream5_global: 'udp_cache_nominal_timeout' ==> 'idle_timeout'
change -> stream5_global: 'udp_cache_pruning_timeout' ==> 'pruning_timeout'
change -> stream5_ip: 'timeout' ==> 'session_timeout'
change -> stream5_tcp: 'bind_to' ==> 'bindings'
change -> stream5_tcp: 'dont_reassemble_async' ==> 'reassemble_async'
change -> stream5_tcp: 'max_queued_bytes' ==> 'queue_limit.max_bytes'
change -> stream5_tcp: 'max_queued_segs' ==> 'queue_limit.max_segments'
change -> stream5_tcp: 'policy hpux' ==> 'stream_tcp.policy = hpux11'
change -> stream5_tcp: 'timeout' ==> 'session_timeout'
change -> stream5_tcp: 'use_static_footprint_sizes' ==> 'footprint'
change -> stream5_udp: 'timeout' ==> 'session_timeout'
change -> suppress: 'gen_id' ==> 'gid'
change -> suppress: 'sig_id' ==> 'sid'
change -> syslog: 'log_alert' ==> 'level = alert'
change -> syslog: 'log_auth' ==> 'facility = auth'
change -> syslog: 'log_authpriv' ==> 'facility = authpriv'
change -> syslog: 'log_cons' ==> 'options = cons'
change -> syslog: 'log_crit' ==> 'level = crit'
change -> syslog: 'log_daemon' ==> 'facility = daemon'
change -> syslog: 'log_debug' ==> 'level = debug'
change -> syslog: 'log_emerg' ==> 'level = emerg'
change -> syslog: 'log_err' ==> 'level = err'
change -> syslog: 'log_info' ==> 'level = info'
change -> syslog: 'log_local0' ==> 'facility = local0'
change -> syslog: 'log_local1' ==> 'facility = local1'
change -> syslog: 'log_local2' ==> 'facility = local2'
change -> syslog: 'log_local3' ==> 'facility = local3'
change -> syslog: 'log_local4' ==> 'facility = local4'
change -> syslog: 'log_local5' ==> 'facility = local5'
change -> syslog: 'log_local6' ==> 'facility = local6'
change -> syslog: 'log_local7' ==> 'facility = local7'
change -> syslog: 'log_ndelay' ==> 'options = ndelay'
```

```
change -> syslog: 'log_notice' ==> 'level = notice'
change -> syslog: 'log_perror' ==> 'options = perror'
change -> syslog: 'log_pid' ==> 'options = pid'
change -> syslog: 'log_user' ==> 'facility = user'
change -> syslog: 'log_warning' ==> 'level = warning'
change -> threshold: 'ips_option: threshold' ==> 'event_filter'
change -> unified2: ' alert_unified2' ==> 'unified2'
change -> unified2: ' log_unified2' ==> 'unified2'
change -> unified2: ' unified2' ==> 'unified2'
deleted -> arpspoof: 'unicast'
deleted -> attribute_table: '<FRAG_POLICY>hpux</FRAG_POLICY>'
deleted -> attribute_table: '<FRAG_POLICY>irix</FRAG_POLICY>'
deleted -> attribute_table: '<FRAG_POLICY>old-linux</FRAG_POLICY>'
deleted -> attribute_table: '<FRAG_POLICY>unknown</FRAG_POLICY>'
deleted -> attribute_table: '<STREAM_POLICY>noack</STREAM_POLICY>'
deleted -> attribute_table: '<STREAM_POLICY>unknown</STREAM_POLICY>'
deleted -> config ' cs_dir'
deleted -> config ' disable_attribute_reload_thread'
deleted -> config ' disable_decode_alerts'
deleted -> config ' disable_decode_drops'
deleted -> config ' disable_ipopt_alerts'
deleted -> config ' disable_ipopt_drops'
deleted -> config ' disable_tcpopt_alerts'
deleted -> config ' disable_tcpopt_drops'
deleted -> config ' disable_tcpopt_experimental_alerts'
deleted -> config ' disable_tcpopt_experimental_drops'
deleted -> config ' disable_tcpopt_obsolete_alerts'
deleted -> config ' disable_tcpopt_obsolete_drops'
deleted -> config ' disable_tcpopt_ttcp_alerts'
deleted -> config ' disable_ttcp_alerts'
deleted -> config ' disable_ttcp_drops'
deleted -> config ' dump_dynamic_rules_path'
deleted -> config ' enable_decode_drops'
deleted -> config ' enable_decode_oversized_alerts'
deleted -> config ' enable_decode_oversized_drops'
deleted -> config ' enable_ipopt_drops'
deleted -> config ' enable_tcpopt_drops'
deleted -> config ' enable_tcpopt_experimental_drops'
deleted -> config ' enable_tcpopt_obsolete_drops'
deleted -> config ' enable_tcpopt_ttcp_drops'
deleted -> config ' enable_ttcp_drops'
deleted -> config ' flexresp2_attempts'
deleted -> config ' flexresp2_interface'
deleted -> config ' flexresp2_memcap'
deleted -> config ' flexresp2_rows'
deleted -> config ' flowbits_size'
deleted -> config ' include_vlan_in_alerts'
deleted -> config ' interface'
deleted -> config ' layer2resets'
deleted -> config ' policy_version'
deleted -> config ' so_rule_memcap'
deleted -> csv: '<filename> can no longer be specific'
deleted -> csv: 'default'
deleted -> csv: 'trheader'
deleted -> detection: 'mwm'
deleted -> dns: 'enable_experimental_types'
deleted -> dns: 'enable_obsolete_types'
deleted -> dns: 'enable_rdata_overflow'
deleted -> fast: '<filename> can no longer be specific'
deleted -> frag3_engine: 'detect_anomalies'
deleted -> frag3_global: 'disabled'
deleted -> ftp_telnet_protocol: 'detect_anomalies'
```

```
deleted -> full: '<filename> can no longer be specific'
deleted -> http_inspect: 'disabled'
deleted -> http_inspect_server: 'no_alerts'
deleted -> imap: 'disabled'
deleted -> imap: 'max_mime_mem'
deleted -> imap: 'memcap'
deleted -> perfmonitor: 'atexitonly'
deleted -> perfmonitor: 'atexitonly: base-stats'
deleted -> perfmonitor: 'atexitonly: events-stats'
deleted -> perfmonitor: 'atexitonly: flow-ip-stats'
deleted -> perfmonitor: 'atexitonly: flow-stats'
deleted -> pop: 'disabled'
deleted -> pop: 'max_mime_mem'
deleted -> pop: 'memcap'
deleted -> ppm: 'debug-pkts'
deleted -> react: 'block'
deleted -> react: 'warn'
deleted -> rpc_decode: 'alert_fragments'
deleted -> rpc_decode: 'no_alert_incomplete'
deleted -> rpc_decode: 'no_alert_large_fragments'
deleted -> rpc_decode: 'no_alert_multiple_requests'
deleted -> rule_state: 'action'
deleted -> sfportscan: 'detect_ack_scans'
deleted -> sfportscan: 'disabled'
deleted -> sfportscan: 'logfile'
deleted -> sip: 'disabled'
deleted -> smtp: 'alert_unknown_cmds'
deleted -> smtp: 'disabled'
deleted -> smtp: 'enable_mime_decoding'
deleted -> smtp: 'inspection_type'
deleted -> smtp: 'max_mime_depth'
deleted -> smtp: 'max_mime_mem'
deleted -> smtp: 'memcap'
deleted -> smtp: 'no_alerts'
deleted -> smtp: 'print_cmds'
deleted -> ssh: 'autodetect'
deleted -> ssh: 'enable_badmsgdir'
deleted -> ssh: 'enable_paysize'
deleted -> ssh: 'enable_protomismatch'
deleted -> ssh: 'enable_recognition'
deleted -> ssh: 'enable_respoverflow'
deleted -> ssh: 'enable_srvoverflow'
deleted -> ssh: 'enable_ssh1crc32'
deleted -> ssl: 'noinspect_encrypted'
deleted -> stream5_global: 'disabled'
deleted -> stream5_global: 'flush_on_alert'
deleted -> stream5_global: 'no_midstream_drop_alerts'
deleted -> stream5_tcp: 'check_session_hijacking'
deleted -> stream5_tcp: 'detect_anomalies'
deleted -> stream5_tcp: 'dont_store_large_packets'
deleted -> stream5_tcp: 'policy noack'
deleted -> stream5_tcp: 'policy unknown'
deleted -> tcpdump: '<filename> can no longer be specific'
deleted -> test: 'file'
deleted -> test: 'stdout'
deleted -> unified2: 'filename'
```

20.11 Module Listing

- **ack** (ips_option): rule option to match on TCP ack numbers

- **active** (basic): configure responses
 - **alert_csv** (logger): output event in csv format
 - **alert_ex** (logger): output gid:sid:rev for alerts
 - **alert_fast** (logger): output event with brief text format
 - **alert_full** (logger): output event with full packet dump
 - **alert_sfsocket** (logger): output event over socket
 - **alert_syslog** (logger): output event to syslog
 - **alert_unixsock** (logger): output event over unix socket
 - **alerts** (basic): configure alerts
 - **appid** (inspector): application and service identification
 - **appids** (ips_option): detection option for application ids
 - **arp** (codec): support for address resolution protocol
 - **arp_spoof** (inspector): detect ARP attacks and anomalies
 - **asn1** (ips_option): rule option for asn1 detection
 - **attribute_table** (basic): configure hosts loading
 - **auth** (codec): support for IP authentication header
 - **back_orifice** (inspector): back orifice detection
 - **base64_decode** (ips_option): rule option to decode base64 data - must be used with base64_data option
 - **binder** (inspector): configure processing based on CIDRs, ports, services, etc.
 - **bufferlen** (ips_option): rule option to check length of current buffer
 - **byte_extract** (ips_option): rule option to convert data to an integer variable
 - **byte_jump** (ips_option): rule option to move the detection cursor
 - **byte_test** (ips_option): rule option to convert data to integer and compare
 - **ciscometadata** (codec): support for cisco metadata
 - **classifications** (basic): define rule categories with priority
 - **classtype** (ips_option): general rule option for rule classification
 - **content** (ips_option): payload rule option for basic pattern matching
 - **cvs** (ips_option): payload rule option for detecting specific attacks
 - **daq** (basic): configure packet acquisition interface
 - **data_log** (inspector): log selected published data to data.log
 - **dce_http_proxy** (inspector): dce over http inspection - client to/from proxy
 - **dce_http_server** (inspector): dce over http inspection - proxy to/from server
 - **dce_iface** (ips_option): detection option to check dcerpc interface
 - **dce_opnum** (ips_option): detection option to check dcerpc operation number
 - **dce_smb** (inspector): dce over smb inspection
-

- **dce_stub_data** (ips_option): sets the cursor to dcerpc stub data
 - **dce_tcp** (inspector): dce over tcp inspection
 - **dce_udp** (inspector): dce over udp inspection
 - **decode** (basic): general decoder rules
 - **detection** (basic): configure general IPS rule processing parameters
 - **detection_filter** (ips_option): rule option to require multiple hits before a rule generates an event
 - **dnp3** (inspector): dnp3 inspection
 - **dnp3_data** (ips_option): sets the cursor to dnp3 data
 - **dnp3_func** (ips_option): detection option to check dnp3 function code
 - **dnp3_ind** (ips_option): detection option to check dnp3 indicator flags
 - **dnp3_obj** (ips_option): detection option to check dnp3 object headers
 - **dns** (inspector): dns inspection
 - **dpx** (inspector): dynamic inspector example
 - **dsize** (ips_option): rule option to test payload size
 - **eapol** (codec): support for extensible authentication protocol over LAN
 - **erspan2** (codec): support for encapsulated remote switched port analyzer - type 2
 - **erspan3** (codec): support for encapsulated remote switched port analyzer - type 3
 - **esp** (codec): support for encapsulating security payload
 - **eth** (codec): support for ethernet protocol (DLT 1) (DLT 51)
 - **event_filter** (basic): configure thresholding of events
 - **event_queue** (basic): configure event queue parameters
 - **fabricpath** (codec): support for fabricpath
 - **file_connector** (connector): implement the file based connector
 - **file_data** (ips_option): rule option to set detection cursor to file data
 - **file_id** (inspector): configure file identification
 - **file_log** (inspector): log file event to file.log
 - **file_type** (ips_option): rule option to check file type
 - **flags** (ips_option): rule option to test TCP control flags
 - **flow** (ips_option): rule option to check session properties
 - **flowbits** (ips_option): rule option to set and test arbitrary boolean flags
 - **fragbits** (ips_option): rule option to test IP frag flags
 - **fragoffset** (ips_option): rule option to test IP frag offset
 - **ftp_client** (inspector): FTP client configuration module for use with ftp_server
 - **ftp_data** (inspector): FTP data channel handler
 - **ftp_server** (inspector): main FTP module; ftp_client should also be configured
-

- **gid** (ips_option): rule option specifying rule generator
 - **gre** (codec): support for generic routing encapsulation
 - **gtp** (codec): support for general-packet-radio-service tunnelling protocol
 - **gtp_info** (ips_option): rule option to check gtp info element
 - **gtp_inspect** (inspector): gtp control channel inspection
 - **gtp_type** (ips_option): rule option to check gtp types
 - **gtp_version** (ips_option): rule option to check gtp version
 - **high_availability** (basic): implement flow tracking high availability
 - **host_cache** (basic): configure hosts
 - **host_tracker** (basic): configure hosts
 - **hosts** (basic): configure hosts
 - **http_client_body** (ips_option): rule option to set the detection cursor to the request body
 - **http_cookie** (ips_option): rule option to set the detection cursor to the HTTP cookie
 - **http_global** (inspector): http inspector global configuration and client rules for use with http_server
 - **http_header** (ips_option): rule option to set the detection cursor to the normalized header(s)
 - **http_inspect** (inspector): HTTP inspector
 - **http_method** (ips_option): rule option to set the detection cursor to the HTTP request method
 - **http_raw_cookie** (ips_option): rule option to set the detection cursor to the unnormalized cookie
 - **http_raw_header** (ips_option): rule option to set the detection cursor to the unnormalized headers
 - **http_raw_request** (ips_option): rule option to set the detection cursor to the unnormalized request line
 - **http_raw_status** (ips_option): rule option to set the detection cursor to the unnormalized status line
 - **http_raw_trailer** (ips_option): rule option to set the detection cursor to the unnormalized trailers
 - **http_raw_uri** (ips_option): rule option to set the detection cursor to the unnormalized URI
 - **http_server** (inspector): http inspection and server rules; also configure http_global
 - **http_stat_code** (ips_option): rule option to set the detection cursor to the HTTP status code
 - **http_stat_msg** (ips_option): rule option to set the detection cursor to the HTTP status message
 - **http_trailer** (ips_option): rule option to set the detection cursor to the normalized trailers
 - **http_uri** (ips_option): rule option to set the detection cursor to the normalized URI buffer
 - **http_version** (ips_option): rule option to set the detection cursor to the version buffer
 - **icmp4** (codec): support for Internet control message protocol v4
 - **icmp6** (codec): support for Internet control message protocol v6
 - **icmp_id** (ips_option): rule option to check ICMP ID
 - **icmp_seq** (ips_option): rule option to check ICMP sequence number
 - **icode** (ips_option): rule option to check ICMP code
 - **id** (ips_option): rule option to check the IP ID field
-

- **igmp** (codec): support for Internet group management protocol
 - **imap** (inspector): imap inspection
 - **ip_proto** (ips_option): rule option to check the IP protocol number
 - **ipopts** (ips_option): rule option to check for IP options
 - **ips** (basic): configure IPS rule processing
 - **ipv4** (codec): support for Internet protocol v4
 - **ipv6** (codec): support for Internet protocol v6
 - **isdataat** (ips_option): rule option to check for the presence of payload data
 - **itype** (ips_option): rule option to check ICMP type
 - **latency** (basic): packet and rule latency monitoring and control
 - **log_codecs** (logger): log protocols in packet by layer
 - **log_hext** (logger): output payload suitable for daq hext
 - **log_pcap** (logger): log packet in pcap format
 - **md5** (ips_option): payload rule option for hash matching
 - **memory** (basic): memory management configuration
 - **metadata** (ips_option): rule option for conveying arbitrary name, value data within the rule text
 - **modbus** (inspector): modbus inspection
 - **modbus_data** (ips_option): rule option to set cursor to modbus data
 - **modbus_func** (ips_option): rule option to check modbus function code
 - **modbus_unit** (ips_option): rule option to check modbus unit ID
 - **mpls** (codec): support for multiprotocol label switching
 - **msg** (ips_option): rule option summarizing rule purpose output with events
 - **network** (basic): configure basic network parameters
 - **normalizer** (inspector): packet scrubbing for inline mode
 - **output** (basic): configure general output parameters
 - **packet_capture** (inspector): raw packet dumping facility
 - **packets** (basic): configure basic packet handling
 - **pcre** (ips_option): rule option for matching payload data with pcre
 - **perf_monitor** (inspector): performance monitoring and flow statistics collection
 - **pgm** (codec): support for pragmatic general multicast
 - **pkt_data** (ips_option): rule option to set the detection cursor to the normalized packet data
 - **pkt_num** (ips_option): alert on raw packet number
 - **pop** (inspector): pop inspection
 - **port_scan** (inspector): port scan inspector; also configure port_scan_global
 - **port_scan_global** (inspector): shared settings for port_scan inspectors for use with port_scan
-

- **pppoe** (codec): support for point-to-point protocol over ethernet
 - **priority** (ips_option): rule option for prioritizing events
 - **process** (basic): configure basic process setup
 - **profiler** (basic): configure profiling of rules and/or modules
 - **rate_filter** (basic): configure rate filters (which change rule actions)
 - **raw_data** (ips_option): rule option to set the detection cursor to the raw packet data
 - **react** (ips_action): send response to client and terminate session
 - **reference** (ips_option): rule option to indicate relevant attack identification system
 - **references** (basic): define reference systems used in rules
 - **regex** (ips_option): rule option for matching payload data with hyperscan regex
 - **reject** (ips_action): terminate session with TCP reset or ICMP unreachable
 - **rem** (ips_option): rule option to convey an arbitrary comment in the rule body
 - **replace** (ips_option): rule option to overwrite payload data; use with rewrite action
 - **reputation** (inspector): reputation inspection
 - **rev** (ips_option): rule option to indicate current revision of signature
 - **rewrite** (ips_action): overwrite packet contents
 - **rpc** (ips_option): rule option to check SUNRPC CALL parameters
 - **rpc_decode** (inspector): RPC inspector
 - **rule_state** (basic): enable/disable specific IPS rules
 - **sd_pattern** (ips_option): rule option for detecting sensitive data
 - **search_engine** (basic): configure fast pattern matcher
 - **seq** (ips_option): rule option to check TCP sequence number
 - **session** (ips_option): rule option to check user data from TCP sessions
 - **sha256** (ips_option): payload rule option for hash matching
 - **sha512** (ips_option): payload rule option for hash matching
 - **sid** (ips_option): rule option to indicate signature number
 - **side_channel** (basic): implement the side-channel asynchronous messaging subsystem
 - **sip** (inspector): sip inspection
 - **sip_body** (ips_option): rule option to set the detection cursor to the request body
 - **sip_header** (ips_option): rule option to set the detection cursor to the SIP header buffer
 - **sip_method** (ips_option): detection option for sip stat code
 - **sip_stat_code** (ips_option): detection option for sip stat code
 - **smtp** (inspector): smtp inspection
 - **snort** (basic): command line configuration and shell commands
 - **so** (ips_option): rule option to call custom eval function
-

- **soid** (ips_option): rule option to specify a shared object rule ID
 - **ssh** (inspector): ssh inspection
 - **ssl** (inspector): ssl inspection
 - **ssl_state** (ips_option): detection option for ssl state
 - **ssl_version** (ips_option): detection option for ssl version
 - **stream** (inspector): common flow tracking
 - **stream_file** (inspector): stream inspector for file flow tracking and processing
 - **stream_icmp** (inspector): stream inspector for ICMP flow tracking
 - **stream_ip** (inspector): stream inspector for IP flow tracking and defragmentation
 - **stream_reassemble** (ips_option): detection option for stream reassembly control
 - **stream_size** (ips_option): detection option for stream size checking
 - **stream_tcp** (inspector): stream inspector for TCP flow tracking and stream normalization and reassembly
 - **stream_udp** (inspector): stream inspector for UDP flow tracking
 - **stream_user** (inspector): stream inspector for user flow tracking and reassembly
 - **suppress** (basic): configure event suppressions
 - **tag** (ips_option): rule option to log additional packets
 - **tcp** (codec): support for transmission control protocol
 - **tcp_connector** (connector): implement the tcp stream connector
 - **telnet** (inspector): telnet inspection and normalization
 - **token_ring** (codec): support for token ring decoding
 - **tos** (ips_option): rule option to check type of service field
 - **ttl** (ips_option): rule option to check time to live field
 - **udp** (codec): support for user datagram protocol
 - **unified2** (logger): output event and packet in unified2 format file
 - **urg** (ips_option): detection for TCP urgent pointer
 - **vlan** (codec): support for local area network
 - **window** (ips_option): rule option to check TCP window field
 - **wizard** (inspector): inspector that implements port-independent protocol identification
 - **wlan** (codec): support for wireless local area network protocol (DLT 105)
-

20.12 Plugin Listing

- **codec::arp**: support for address resolution protocol
 - **codec::auth**: support for IP authentication header
 - **codec::cisco metadata**: support for cisco metadata
 - **codec::eapol**: support for extensible authentication protocol over LAN
 - **codec::erspan2**: support for encapsulated remote switched port analyzer - type 2
 - **codec::erspan3**: support for encapsulated remote switched port analyzer - type 3
 - **codec::esp**: support for encapsulating security payload
 - **codec::eth**: support for ethernet protocol (DLT 1) (DLT 51)
 - **codec::fabricpath**: support for fabricpath
 - **codec::gre**: support for generic routing encapsulation
 - **codec::gtp**: support for general-packet-radio-service tunnelling protocol
 - **codec::icmp4**: support for Internet control message protocol v4
 - **codec::icmp4_ip**: support for IP in ICMPv4
 - **codec::icmp6**: support for Internet control message protocol v6
 - **codec::icmp6_ip**: support for IP in ICMPv6
 - **codec::igmp**: support for Internet group management protocol
 - **codec::ipv4**: support for Internet protocol v4
 - **codec::ipv6**: support for Internet protocol v6
 - **codec::ipv6_dst_opts**: support for ipv6 destination options
 - **codec::ipv6_frag**: support for IPv6 fragment decoding
 - **codec::ipv6_hop_opts**: support for IPv6 hop options
 - **codec::ipv6_mobility**: support for mobility
 - **codec::ipv6_no_next**: sentinel codec
 - **codec::ipv6_routing**: support for IPv6 routing extension
 - **codec::linux_sll**: support for Linux SLL (DLT 113)
 - **codec::llc**: support for logical link control
 - **codec::mpls**: support for multiprotocol label switching
 - **codec::null**: support for null encapsulation (DLT 0)
 - **codec::pflog**: support for OpenBSD PF log (DLT 117)
 - **codec::pgm**: support for pragmatic general multicast
 - **codec::pim**: support for protocol independent multicast
 - **codec::ppp**: support for point-to-point encapsulation (DLT 9)
 - **codec::ppp_encap**: support for point-to-point encapsulation
 - **codec::pppoe_disc**: support for point-to-point discovery
-

- **codec::pppoe_sess**: support for point-to-point session
 - **codec::raw4**: support for unencapsulated IPv4 (DLT 12) (DLT 228)
 - **codec::raw6**: support for unencapsulated IPv6 (DLT 229)
 - **codec::slip**: support for slip protocol (DLT 8)
 - **codec::sun_nd**: support for Sun ND
 - **codec::swipe**: support for Swipe
 - **codec::tcp**: support for transmission control protocol
 - **codec::teredo**: support for teredo
 - **codec::token_ring**: support for token ring decoding
 - **codec::trans_bridge**: support for trans-bridging
 - **codec::udp**: support for user datagram protocol
 - **codec::user**: support for user sessions (DLT 230)
 - **codec::vlan**: support for local area network
 - **codec::wlan**: support for wireless local area network protocol (DLT 105)
 - **connector::file_connector**: implement the file based connector
 - **connector::tcp_connector**: implement the tcp stream connector
 - **inspector::appid**: application and service identification
 - **inspector::arp_spoof**: detect ARP attacks and anomalies
 - **inspector::back_orifice**: back orifice detection
 - **inspector::binder**: configure processing based on CIDRs, ports, services, etc.
 - **inspector::data_log**: log selected published data to data.log
 - **inspector::dce_http_proxy**: dce over http inspection - client to/from proxy
 - **inspector::dce_http_server**: dce over http inspection - proxy to/from server
 - **inspector::dce_smb**: dce over smb inspection
 - **inspector::dce_tcp**: dce over tcp inspection
 - **inspector::dce_udp**: dce over udp inspection
 - **inspector::dnp3**: dnp3 inspection
 - **inspector::dns**: dns inspection
 - **inspector::dpx**: dynamic inspector example
 - **inspector::file_id**: configure file identification
 - **inspector::file_log**: log file event to file.log
 - **inspector::ftp_client**: FTP inspector client module
 - **inspector::ftp_data**: FTP data channel handler
 - **inspector::ftp_server**: FTP inspector server module
 - **inspector::gtp_inspect**: gtp control channel inspection
-

- **inspector::http_global**: shared HTTP inspector settings
 - **inspector::http_inspect**: the new HTTP inspector!
 - **inspector::http_server**: main HTTP inspector module
 - **inspector::imap**: imap inspection
 - **inspector::modbus**: modbus inspection
 - **inspector::normalizer**: packet scrubbing for inline mode
 - **inspector::packet_capture**: raw packet dumping facility
 - **inspector::perf_monitor**: performance monitoring and flow statistics collection
 - **inspector::pop**: pop inspection
 - **inspector::port_scan**: port scan inspector; also configure port_scan_global
 - **inspector::port_scan_global**: shared settings for port_scan inspectors for use with port_scan
 - **inspector::reputation**: reputation inspection
 - **inspector::rpc_decode**: RPC inspector
 - **inspector::sip**: sip inspection
 - **inspector::smtp**: smtp inspection
 - **inspector::ssh**: ssh inspection
 - **inspector::ssl**: ssl inspection
 - **inspector::stream**: common flow tracking
 - **inspector::stream_file**: stream inspector for file flow tracking and processing
 - **inspector::stream_icmp**: stream inspector for ICMP flow tracking
 - **inspector::stream_ip**: stream inspector for IP flow tracking and defragmentation
 - **inspector::stream_tcp**: stream inspector for TCP flow tracking and stream normalization and reassembly
 - **inspector::stream_udp**: stream inspector for UDP flow tracking
 - **inspector::stream_user**: stream inspector for user flow tracking and reassembly
 - **inspector::telnet**: telnet inspection and normalization
 - **inspector::wizard**: inspector that implements port-independent protocol identification
 - **ips_action::react**: send response to client and terminate session
 - **ips_action::reject**: terminate session with TCP reset or ICMP unreachable
 - **ips_action::rewrite**: overwrite packet contents
 - **ips_option::ack**: rule option to match on TCP ack numbers
 - **ips_option::appids**: detection option for application ids
 - **ips_option::asn1**: rule option for asn1 detection
 - **ips_option::base64_data**: set detection cursor to decoded Base64 data
 - **ips_option::base64_decode**: rule option to decode base64 data - must be used with base64_data option
 - **ips_option::bufferlen**: rule option to check length of current buffer
-

- **ips_option::byte_extract**: rule option to convert data to an integer variable
 - **ips_option::byte_jump**: rule option to move the detection cursor
 - **ips_option::byte_test**: rule option to convert data to integer and compare
 - **ips_option::classtype**: general rule option for rule classification
 - **ips_option::content**: payload rule option for basic pattern matching
 - **ips_option::cvs**: payload rule option for detecting specific attacks
 - **ips_option::dce_iface**: detection option to check dcerpc interface
 - **ips_option::dce_opnum**: detection option to check dcerpc operation number
 - **ips_option::dce_stub_data**: sets the cursor to dcerpc stub data
 - **ips_option::detection_filter**: rule option to require multiple hits before a rule generates an event
 - **ips_option::dnp3_data**: sets the cursor to dnp3 data
 - **ips_option::dnp3_func**: detection option to check dnp3 function code
 - **ips_option::dnp3_ind**: detection option to check dnp3 indicator flags
 - **ips_option::dnp3_obj**: detection option to check dnp3 object headers
 - **ips_option::dsize**: rule option to test payload size
 - **ips_option::file_data**: rule option to set detection cursor to file data
 - **ips_option::file_type**: rule option to check file type
 - **ips_option::flags**: rule option to test TCP control flags
 - **ips_option::flow**: rule option to check session properties
 - **ips_option::flowbits**: rule option to set and test arbitrary boolean flags
 - **ips_option::fragbits**: rule option to test IP frag flags
 - **ips_option::fragoffset**: rule option to test IP frag offset
 - **ips_option::gid**: rule option specifying rule generator
 - **ips_option::gtp_info**: rule option to check gtp info element
 - **ips_option::gtp_type**: rule option to check gtp types
 - **ips_option::gtp_version**: rule option to check gtp version
 - **ips_option::http_client_body**: rule option to set the detection cursor to the request body
 - **ips_option::http_cookie**: rule option to set the detection cursor to the HTTP cookie
 - **ips_option::http_header**: rule option to set the detection cursor to the normalized header(s)
 - **ips_option::http_method**: rule option to set the detection cursor to the HTTP request method
 - **ips_option::http_raw_cookie**: rule option to set the detection cursor to the unnormalized cookie
 - **ips_option::http_raw_header**: rule option to set the detection cursor to the unnormalized headers
 - **ips_option::http_raw_request**: rule option to set the detection cursor to the unnormalized request line
 - **ips_option::http_raw_status**: rule option to set the detection cursor to the unnormalized status line
 - **ips_option::http_raw_trailer**: rule option to set the detection cursor to the unnormalized trailers
-

- **ips_option::http_raw_uri**: rule option to set the detection cursor to the unnormalized URI
 - **ips_option::http_stat_code**: rule option to set the detection cursor to the HTTP status code
 - **ips_option::http_stat_msg**: rule option to set the detection cursor to the HTTP status message
 - **ips_option::http_trailer**: rule option to set the detection cursor to the normalized trailers
 - **ips_option::http_uri**: rule option to set the detection cursor to the normalized URI buffer
 - **ips_option::http_version**: rule option to set the detection cursor to the version buffer
 - **ips_option::icmp_id**: rule option to check ICMP ID
 - **ips_option::icmp_seq**: rule option to check ICMP sequence number
 - **ips_option::icode**: rule option to check ICMP code
 - **ips_option::id**: rule option to check the IP ID field
 - **ips_option::ip_proto**: rule option to check the IP protocol number
 - **ips_option::ipopts**: rule option to check for IP options
 - **ips_option::isdataat**: rule option to check for the presence of payload data
 - **ips_option::itype**: rule option to check ICMP type
 - **ips_option::md5**: payload rule option for hash matching
 - **ips_option::metadata**: rule option for conveying arbitrary name, value data within the rule text
 - **ips_option::modbus_data**: rule option to set cursor to modbus data
 - **ips_option::modbus_func**: rule option to check modbus function code
 - **ips_option::modbus_unit**: rule option to check modbus unit ID
 - **ips_option::msg**: rule option summarizing rule purpose output with events
 - **ips_option::pcrc**: rule option for matching payload data with pcrc
 - **ips_option::pkt_data**: rule option to set the detection cursor to the normalized packet data
 - **ips_option::pkt_num**: alert on raw packet number
 - **ips_option::priority**: rule option for prioritizing events
 - **ips_option::raw_data**: rule option to set the detection cursor to the raw packet data
 - **ips_option::reference**: rule option to indicate relevant attack identification system
 - **ips_option::regex**: rule option for matching payload data with hyperscan regex
 - **ips_option::rem**: rule option to convey an arbitrary comment in the rule body
 - **ips_option::replace**: rule option to overwrite payload data; use with rewrite action
 - **ips_option::rev**: rule option to indicate current revision of signature
 - **ips_option::rpc**: rule option to check SUNRPC CALL parameters
 - **ips_option::sd_pattern**: rule option for detecting sensitive data
 - **ips_option::seq**: rule option to check TCP sequence number
 - **ips_option::session**: rule option to check user data from TCP sessions
 - **ips_option::sha256**: payload rule option for hash matching
-

- **ips_option::sha512**: payload rule option for hash matching
 - **ips_option::sid**: rule option to indicate signature number
 - **ips_option::sip_body**: rule option to set the detection cursor to the request body
 - **ips_option::sip_header**: rule option to set the detection cursor to the SIP header buffer
 - **ips_option::sip_method**: detection option for sip stat code
 - **ips_option::sip_stat_code**: detection option for sip stat code
 - **ips_option::so**: rule option to call custom eval function
 - **ips_option::soid**: rule option to specify a shared object rule ID
 - **ips_option::ssl_state**: detection option for ssl state
 - **ips_option::ssl_version**: detection option for ssl version
 - **ips_option::stream_reassemble**: detection option for stream reassembly control
 - **ips_option::stream_size**: detection option for stream size checking
 - **ips_option::tag**: rule option to log additional packets
 - **ips_option::tos**: rule option to check type of service field
 - **ips_option::ttl**: rule option to check time to live field
 - **ips_option::urg**: detection for TCP urgent pointer
 - **ips_option::window**: rule option to check TCP window field
 - **logger::alert_csv**: output event in csv format
 - **logger::alert_ex**: output gid:sid:rev for alerts
 - **logger::alert_fast**: output event with brief text format
 - **logger::alert_full**: output event with full packet dump
 - **logger::alert_sfsocket**: output event over socket
 - **logger::alert_syslog**: output event to syslog
 - **logger::alert_unixsock**: output event over unix socket
 - **logger::log_codecs**: log protocols in packet by layer
 - **logger::log_hext**: output payload suitable for daq hex
 - **logger::log_null**: disable logging of packets
 - **logger::log_pcap**: log packet in pcap format
 - **logger::unified2**: output event and packet in unified2 format file
 - **piglet::pp_codec**: Codec piglet
 - **piglet::pp_inspector**: Inspector piglet
 - **piglet::pp_ips_action**: Ips action piglet
 - **piglet::pp_ips_option**: Ips option piglet
 - **piglet::pp_logger**: Logger piglet
 - **piglet::pp_search_engine**: Search engine piglet
-

- **piglet::pp_so_rule**: SO rule piglet
- **piglet::pp_test**: Test piglet
- **search_engine::ac_banded**: Aho-Corasick Banded (high memory, moderate performance)
- **search_engine::ac_bnfa**: Aho-Corasick Binary NFA (low memory, high performance) MPSE
- **search_engine::ac_full**: Aho-Corasick Full (high memory, best performance), implements search_all()
- **search_engine::ac_sparse**: Aho-Corasick Sparse (high memory, moderate performance) MPSE
- **search_engine::ac_sparse_bands**: Aho-Corasick Sparse-Banded (high memory, moderate performance) MPSE
- **search_engine::ac_std**: Aho-Corasick Full (high memory, best performance) MPSE
- **search_engine::hyperscan**: intel hyperscan-based mpse with regex support
- **search_engine::lowmem**: Keyword Trie (low memory, moderate performance) MPSE
- **so_rule::3l18758**: SO rule example

20.13 Bugs

20.13.1 Build

- Enabling large pcap may erroneously affect the number of packets processed from pcaps.
- Enabling debug messages may erroneously affect the number of packets processed from pcaps.
- g++ 4.9.2 with -O3 reports:

```
src/service_inspectors/back_orifice/back_orifice.cc:231:25: warning:
iteration 930u invokes undefined behavior [-Waggressive-loop-optimizations]
```
- Building with clang and autotools on Linux will show the following warning many times. Please ignore.

```
clang: warning: argument unused during compilation: '-pthread'
```

20.13.2 Config

- Parsing issue with IP lists. can't parse rules with \$EXTERNAL_NET defined as below because of the space between ! and 10.

```
HOME_NET = [ [ 10.0.17.0/24 10.0.14.0/24 10.247.0.0/16 10.246.0.0/16 ] ]
EXTERNAL_NET = ' ! ' .. HOME_NET
```
- Multiple versions of luajit scripts are not handled correctly. The first loaded version will always be executed even though plugin manager saves the correct version.
- When using -c and -L together, the last on the command line wins (-c -L will dump; -L -c will analyze).
- Modules instantiated by command line only will not get default settings unless hard-coded. This notably applies to -A and -L options.
- --lua can only be used in addition to, not in place of, a -c config. Ideally, --lua could be used in lieu of -c.

20.13.3 Rules

- metadata:service foo; metadata:service foo; won't cause a duplicate service warning as does metadata:service foo, service foo;
- ip_proto doesn't work properly with reassembled packets so it can't be used to restrict the protocol of service rules.

20.13.4 snort2lua

- `uricontent:"foo"; content:"bar"; → http_uri; content:"foo"; content:"bar";` (missing `pkt_data`)
- `stream_tcp` ports and protocols both go into a single `binder.when;` this is incorrect as the `when` fields are logically anded together (ie must all be true). Should create 2 separate bindings.
- There is a bug in `pps_stream_tcp.cc..` when `stream_tcp:` is specified without any arguments, `snort2lua` doesn't convert it. Same for `stream_udp`.
- Loses the ip list delimiters `[]`; change to `()`

```
in snort.conf: var HOME_NET [A,B,C]
in snort.lua: HOME_NET = [[A B C]]
```

- Won't convert packet rules (alert tcp etc.) to service rules (alert http etc.).
- `alert_fast` and `alert_full`: output configuration includes `"file = foo.bar"`, but `file` is a bool and you cannot specify an output file name in the configuration.
- `preprocessor ports` option: `ports <number>` not supported.

20.13.5 Runtime

- `-B <mask>` feature does not work. It does ordinary IP address obfuscation instead of using the mask.
- Obfuscation does not work for csv format.
- The hex DAQ will append a newline to text lines (starting with `"`).
- The hex DAQ does not support embedded quotes in text lines (use hex lines as a workaround).
- `stream_tcp` alert squash mechanism incorrectly squashes alerts for different TCP packets.