

Table A. Admission evidence

Online TDX comparison


Lifecycle state	Full A/D/U	Native A/D/U	Business access Full / native	Current checks Full / native	First rejection Full / native
A. Legal admission	TBD	TBD	TBD	TBD	TBD
B. Record unconfirmed	TBD	TBD	TBD	TBD	TBD
C. Record confirmed	TBD	TBD	TBD	TBD	TBD

Offline history diagnostics


Policy case	Evidence source	Verifier decision
Eligible recorded history	TBD	TBD
Permitted unrelated history	TBD	TBD
Ineligible launch history	TBD	TBD

Planned n=3 paired runs per mode. A/D/U = allow/deny/unknown. TBD = data pending. Offline cases retain their evidence type.


(a) Binding configuration change

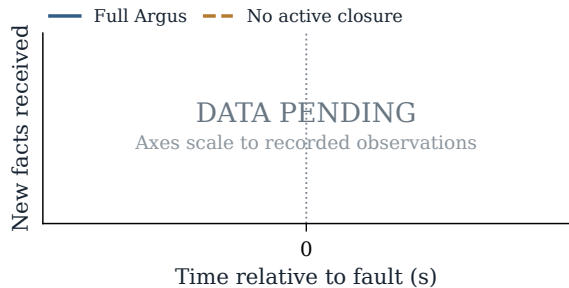


(b) Helper freeze

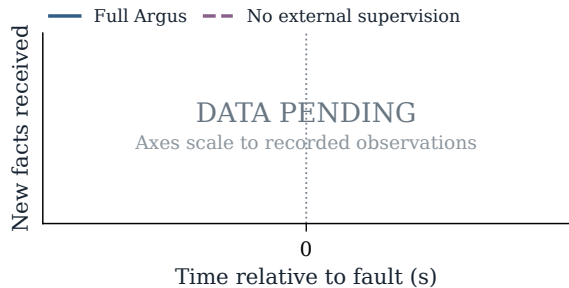

(c) Closure after fault

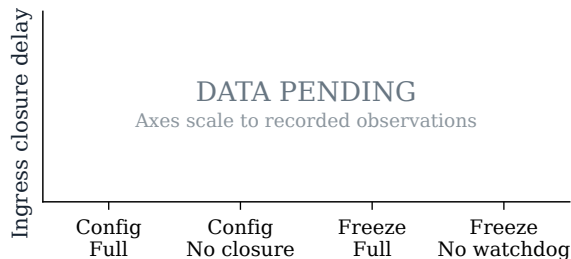

(d) Receipt at window end

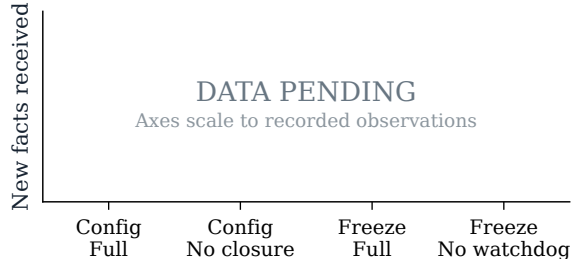


Each dot: one run. Hollow triangle: closure right-censored at the observation end. Gaps break traces.

Table B. Agent task continuation

Pair	Condition	S1	S2	S3	S4	S5	S6	Readback k / K	Correct continuation	Complete task	Access / continue from re-admission (s)
1	Healthy	TBD	TBD	TBD	TBD	TBD	TBD	TBD	N/A	TBD	N/A
1	Recovery	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
2	Healthy	TBD	TBD	TBD	TBD	TBD	TBD	TBD	N/A	TBD	N/A
2	Recovery	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD
3	Healthy	TBD	TBD	TBD	TBD	TBD	TBD	TBD	N/A	TBD	N/A
3	Recovery	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD	TBD

C correct; X incorrect; R rejected; T timeout; U unknown; N not dispatched. k/K: verified readback / all confirmed proposals. TBD: data pending.

One row per complete task; all six planned steps remain visible. The two recovery intervals share a start and are not added.

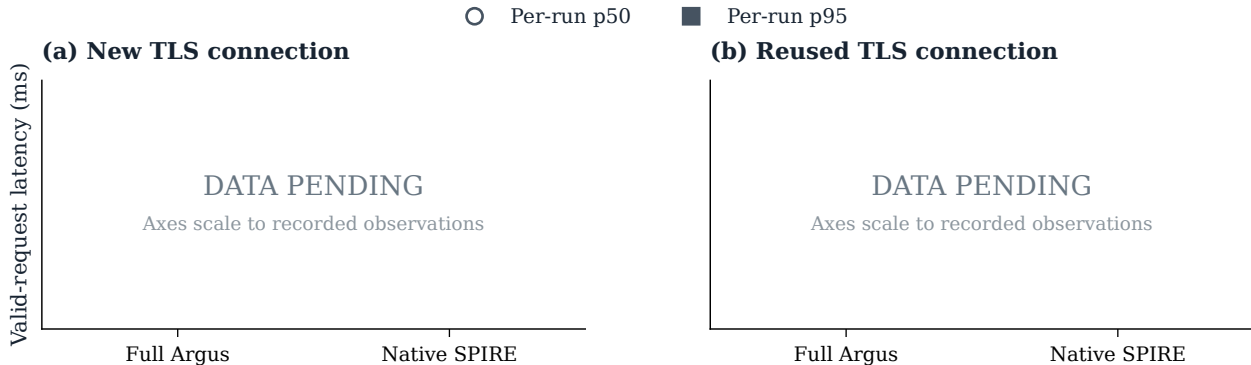

Dots show individual runs; short lines show medians. Request outcomes and resources are in Table S2.

Table S1. Reuse and attestation

Mode	Window (s)	Node Quotes	Workload Quotes	Identity subscriptions	Node SVIDs	Workload SVIDs	New admissions
Full Argus	TBD	TBD	TBD	TBD	TBD	TBD	TBD
Native SPIRE	TBD	TBD	TBD	TBD	TBD	TBD	TBD

Counts refer to each actual healthy window. SVID counts use distinct certificate serials; Quote counts require attestation originals. TBD is not zero.

Table S2. Supporting cost evidence

Normal access: outcomes and resources

Mode	TLS	Valid / attempted	R / F / T / I	Valid requests/s	CPU (% of one core)	RSS (MiB)
Full	New	TBD	TBD	TBD	TBD	TBD
Full	Reuse	TBD	TBD	TBD	TBD	TBD
Native	New	TBD	TBD	TBD	TBD	TBD
Native	Reuse	TBD	TBD	TBD	TBD	TBD

Full Argus: directly measured intervals

Measured interval	Establishment (ms)	Recovery (ms)
Workload Quote	TBD	TBD
Remote appraisal	TBD	TBD
Identity delivery	TBD	TBD
Ingress readiness	TBD	TBD
First legal access	TBD	TBD
Deliberate barrier hold	TBD	TBD

Offline history processing

History case	Source	Records	Bytes	Offline verification (ms)
Eligible recorded history	TBD	TBD	TBD	TBD
Permitted unrelated history	TBD	TBD	TBD	TBD
Ineligible launch history	TBD	TBD	TBD	TBD

Numeric summaries are median [min, max] of observed runs. R/F/T/I = rejected/failed/timed out/invalid. Deliberate holds and offline timings remain separate from online processing cost; intervals are not summed.