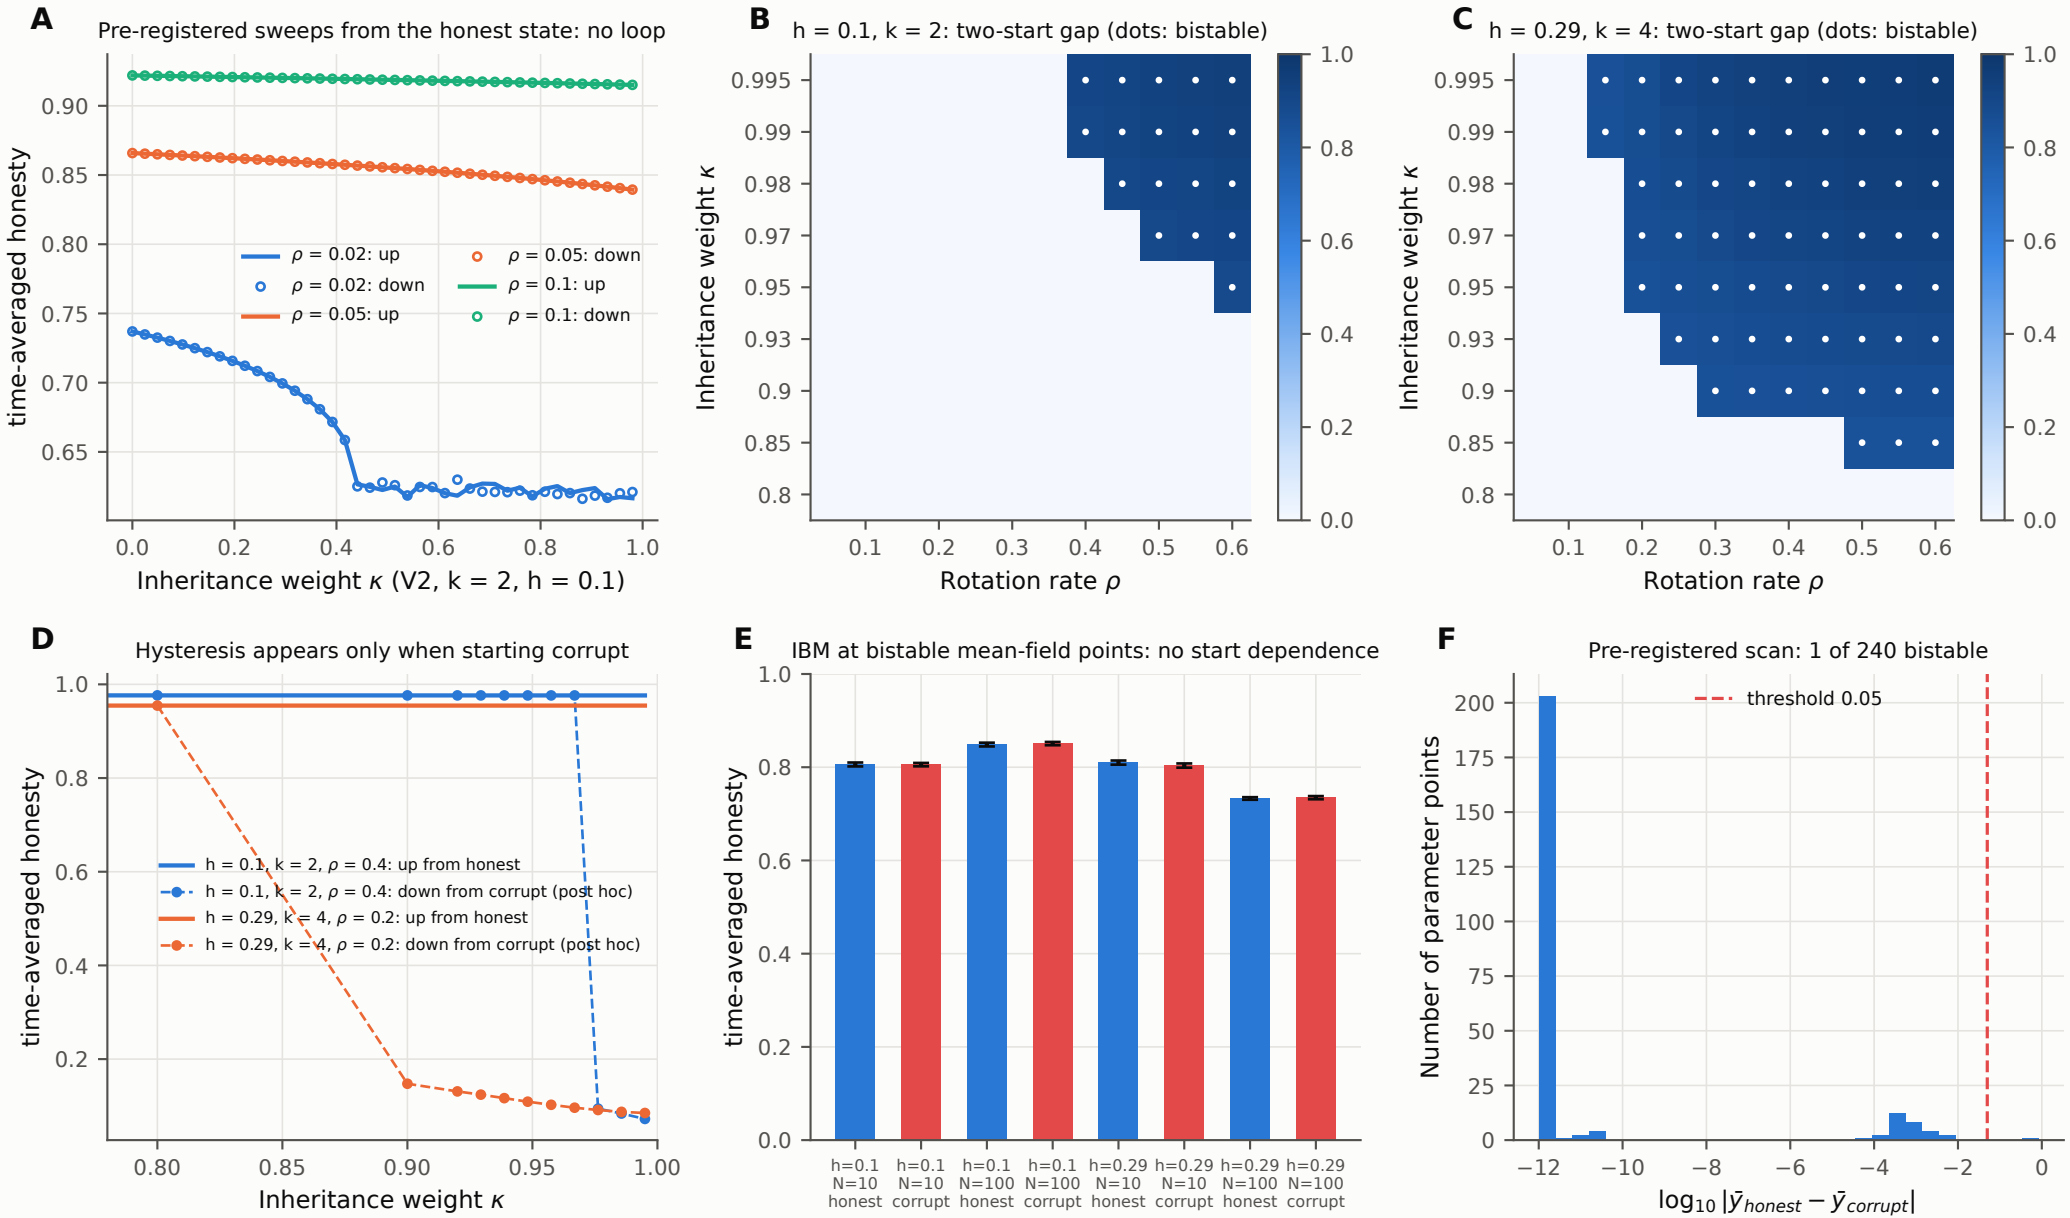
A
Pre-registered sweeps from the honest state: no loop
time-averaged honesty
Inheritance weight κ (V2, k = 2, h = 0.1)
ρ = 0.02: up
ρ = 0.02: down
ρ = 0.05: up
ρ = 0.05: down
ρ = 0.1: up
ρ = 0.1: down
B
h = 0.1, k = 2: two-start gap (dots: bistable)
Inheritance weight κ
Rotation rate ρ
C
h = 0.29, k = 4: two-start gap (dots: bistable)
Inheritance weight κ
Rotation rate ρ
D
Hysteresis appears only when starting corrupt
time-averaged honesty
Inheritance weight κ
h = 0.1, k = 2, ρ = 0.4: up from honest
h = 0.1, k = 2, ρ = 0.4: down from corrupt (post hoc)
h = 0.29, k = 4, ρ = 0.2: up from honest
h = 0.29, k = 4, ρ = 0.2: down from corrupt (post hoc)
E
IBM at bistable mean-field points: no start dependence
time-averaged honesty
h=0.1 N=10 honest
h=0.1 N=10 corrupt
h=0.1 N=100 honest
h=0.1 N=100 corrupt
h=0.29 N=10 honest
h=0.29 N=10 corrupt
h=0.29 N=100 honest
h=0.29 N=100 corrupt
F
Pre-registered scan: 1 of 240 bistable
threshold 0.05
Number of parameter points
log10 |ȳhonest − ȳcorrupt|