



VHH72 retrospective diagnostics: sequence priors suppress key paper mutations


A. ESM2 + AbLang2 sequence prior

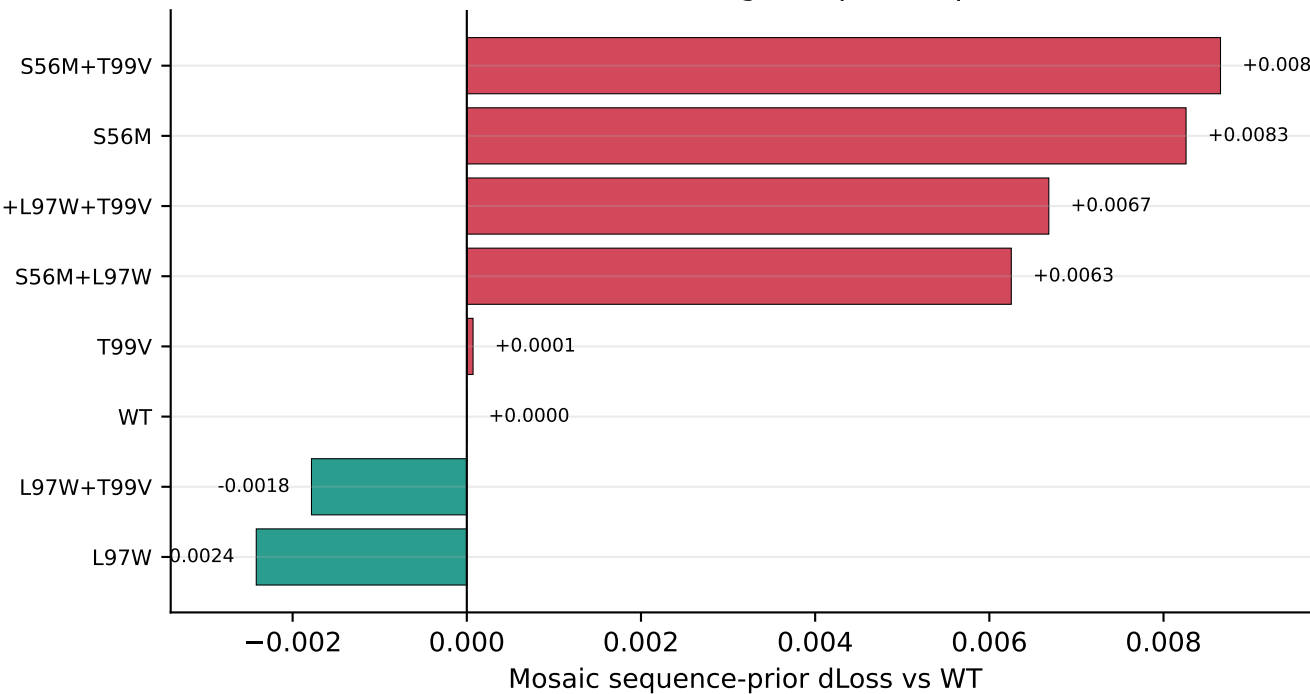


B. Vanilla MULTI-evolve zero-shot

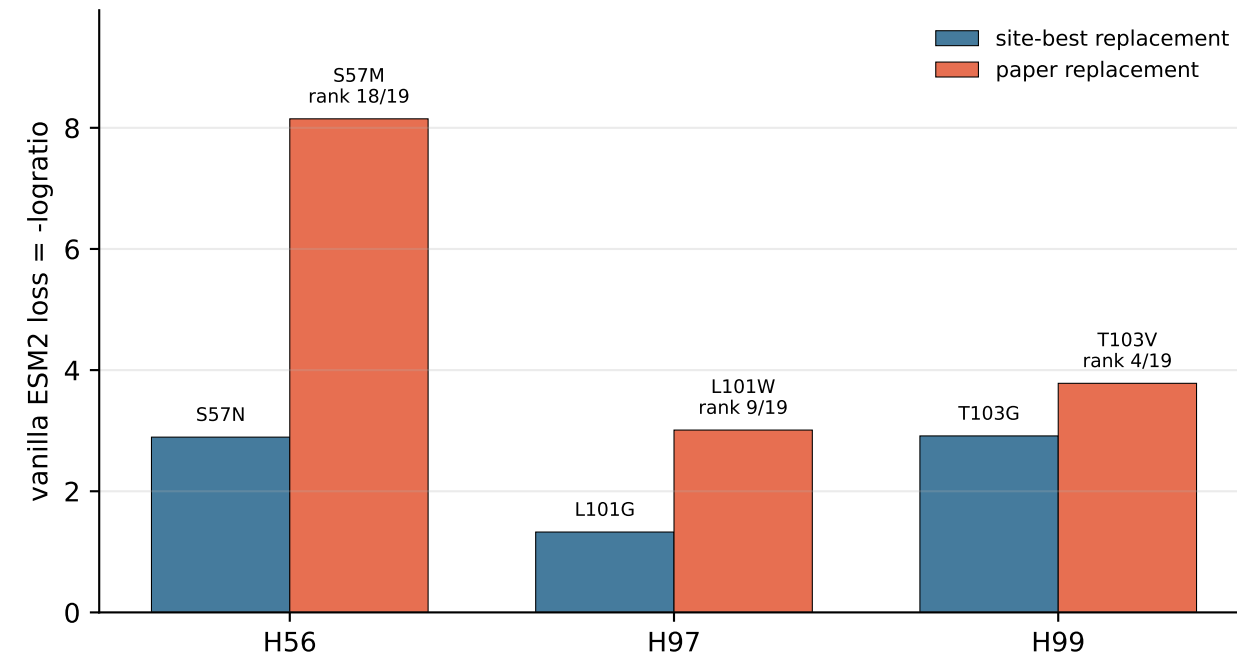

C. Standard Mosaic run recovery

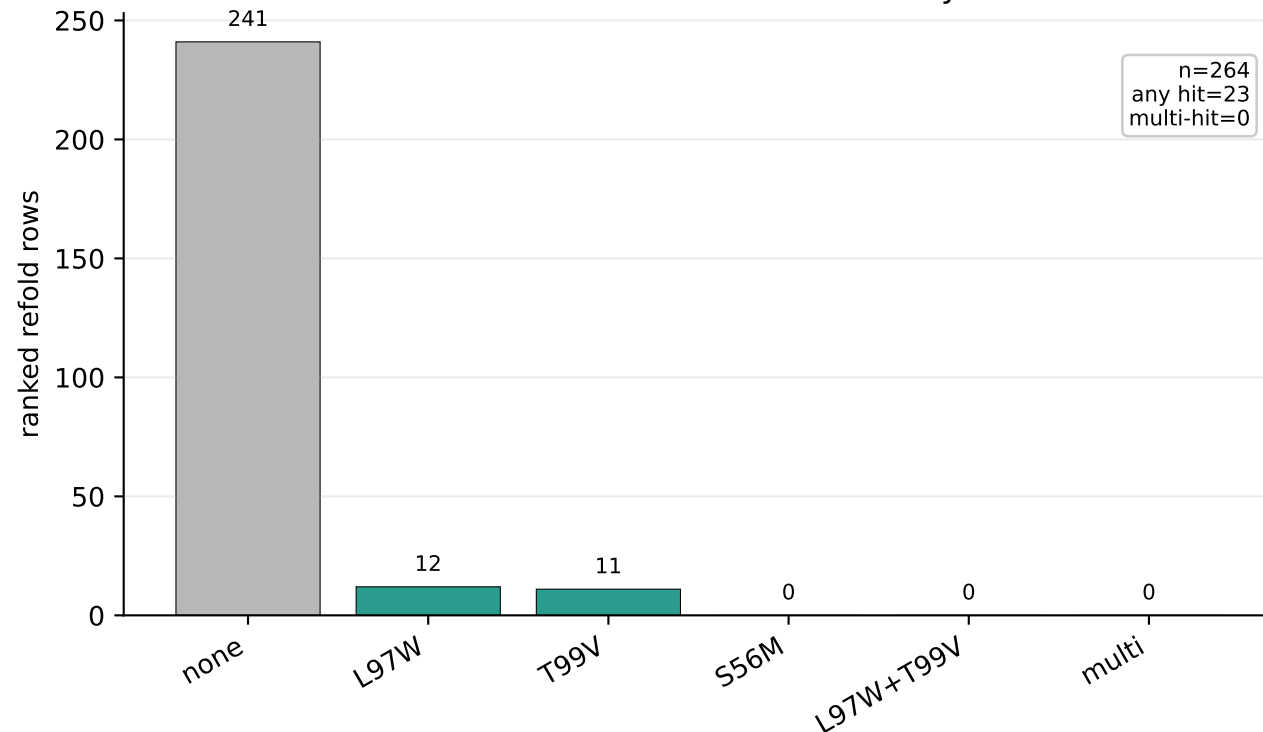

D. Refold pose gate vs ipSAE

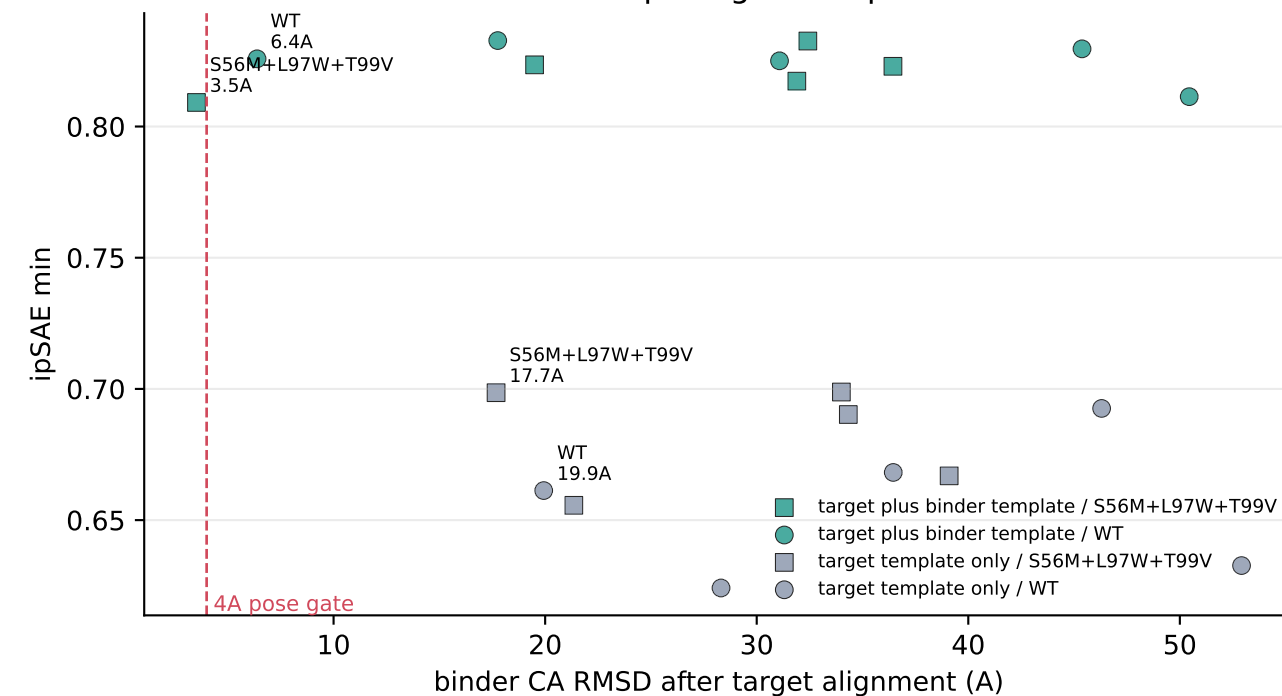

Takeaway: blind PLM sequence priors do not recover the VHH72 affinity mutations; RMSD/pose gating is required before ranking ipSAE.