

Chapter 3

Result And Discussion

Following the experimental and analysis procedures explained in Chapter 2, the ODT capture efficiency was characterized and optimized. This chapter presents the corresponding experimental results.

The first stage of the optimization process consist of minimizing the molasses temperature through the adjustment of the cooling laser detuning, the AOM amplitude, and the compensation coil currents.

Subsequently, the ODT loading is optimized by exploiting the compensation coils to displace the MOT after loading. This optimization aims to maximize the spatial overlap between the atomic cloud and the ODT beam, thereby enhancing the capture efficiency.

3.1 Molasses temperature optimization

Before performing any optimization, the six beams in the vacuum chamber were realigned in order to minimize their overlap mismatch at the MOT position. This procedure was necessary since thermal drifts can induce misalignment in the optical components.

Preliminary values for the compensation coil currents has also been obtained prior the realignment using the Release-and -Recapture (R&R) technique:

$$\begin{aligned} I_x &= 80 \text{ mA} \\ I_y &= -200 \text{ mA} \\ I_z &= -400 \text{ mA}. \end{aligned} \tag{3.1}$$

These values were used as the starting point for the subsequent optimization procedure.

3.1.1 Detuning frequency optimization

The first optimization step consisted of measuring the molasses temperature for different values of the cooling laser detuning. The detuning was varied from -24.4 MHz ($4.0 \Gamma/2\pi$)

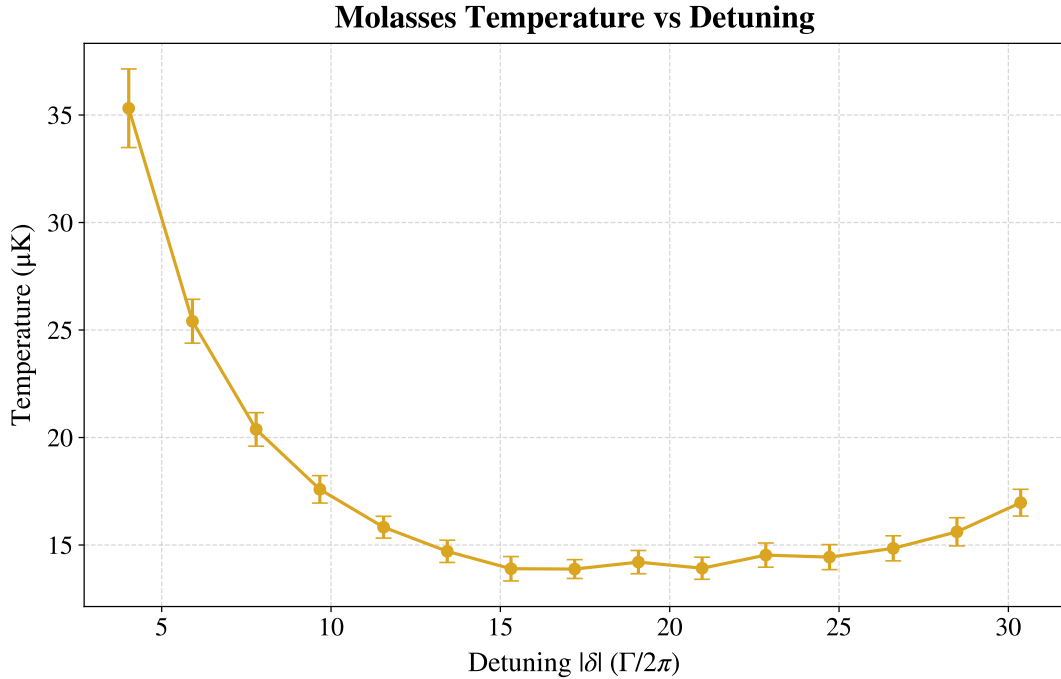


Figure 3.1: *Optical molasses temperature as a function of laser detuning. The horizontal axis represents the absolute value of the applied red detuning $|\delta|$, normalized to the natural linewidth $\Gamma/2\pi$. The data exhibits optimal sub-Doppler cooling in the region $|\delta| \approx 15 - 20$, reaching a minimum temperature of $13.9 \pm 0.4 \mu\text{K}$. For detunings up to $|\delta| \approx 15$, the temperature follows the $1/|\delta|$ dependence expected for an ideal Sisyphus cooling. At larger detunings, the curve flattens and eventually begins to rise.*

to -184 MHz ($30.4 \Gamma/2\pi$), with a step of -11.4 MHz .

The resulting average temperature is shown in Figure 3.1 as a function of the detuning expressed in units of $\Gamma/2\pi$. At small detunings, the data follow the expected $1/|\delta|$ dependence typical of the Sisyphus cooling. As the detuning increases two phenomena becomes relevant: excessive decrease of the optical cycle rate $\Gamma_p \propto 1/\delta^2$ and the approach of the transition $F = 2 \rightarrow F' = 2$ which is found 267 MHz below the cooler target transition $F = 2 \rightarrow F' = 2$ (see Figure ref??). These effects cause the temperature curve to flatten in the region $|\delta| \approx 15 - 20$ and eventually start to increase again for larger detunings.

The lowest average temperature was obtained for a detuning of $|\delta| = 17.2$ corresponding to $|\delta| = 104.2 \text{ MHz}$. Figure 3.2 shows the fit of equation (2.9) for the optimal temperature configuration. The resulting temperature along the Cartesian axis are $T_x = (14.1 \pm 0.5) \mu\text{K}$ and $T_y = (13.5 \pm 0.7) \mu\text{K}$. Their weighted average yields the final temperature $T = (13.9 \pm 0.4) \mu\text{K}$.

As observed in Figure 3.2, the data points at long TOF diverge appreciably from the linear trend, consistently falling below the expected values. This behavior is consistently observed for all measurements. The hypothesis is that at sufficiently long TOF the cloud radius becomes non-negligible compared to the probe beam radius, violating the assumption of uniform illumination. This makes the outer region of the cloud lie in a region

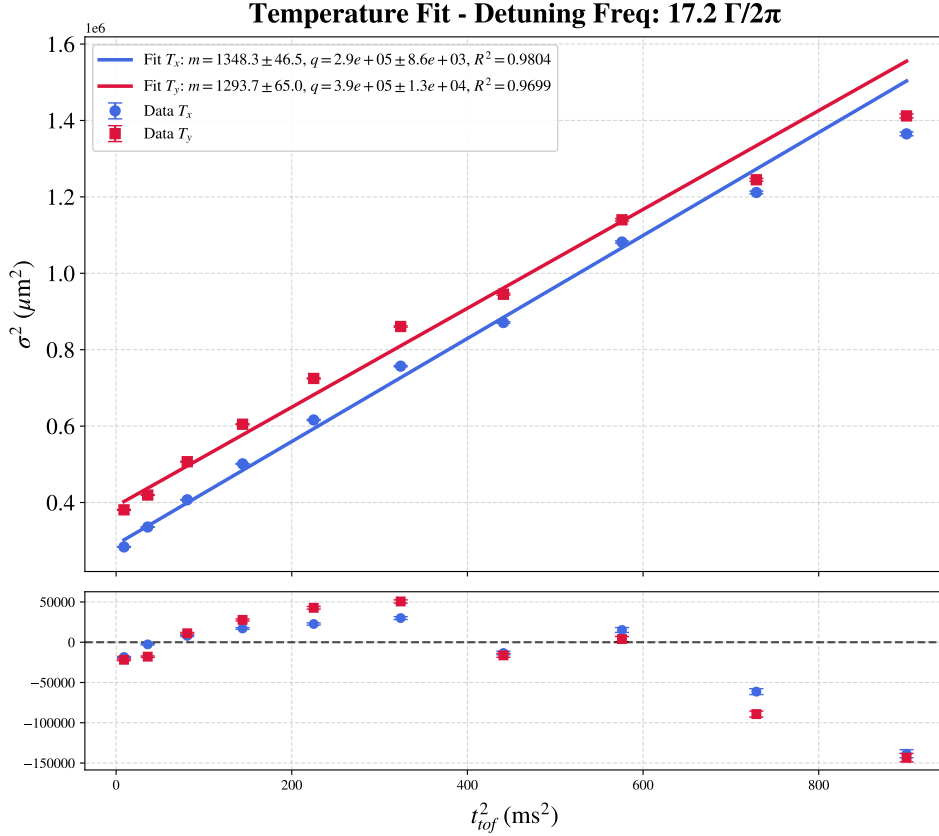


Figure 3.2: *Optical molasses temperature fit for $|\delta| = 17.2 \Gamma/2\pi$ with residuals. The large residuals of the last three data points from the linear fit are attributed to the cloud expansion, which makes its radial size non-negligible compared to the probe beam profile.*

of lower intensity, which leads the Gaussian fit to systematically underestimate the true variance. Fortunately, this effect is expected to become less disturbing as the temperature is lowered.

3.1.2 AOM amplitude optimization

As a second optimization step, the influence of cooling beam power was investigated by varying the AOM drive amplitude and the duration of the amplitude ramp. The ramp is applied at the beginning of the molasses phase. The AOM amplitude expressed in arbitrary units (a.u.) controls the RF amplitude driving the AOM. Three values were tested: 385, 475 and 550 a.u., corresponding respectively to approximately 0.7, 0.85 and 1.0 times the AOM amplitude during the MOT phase. In addition, ramp durations of 5 ms and 20 ms were tested for the transition of the AOM amplitude from the MOT value to the molasses value. The measurements were repeated for different values of the cooling detuning. The results of the optimization are shown in figure 3.3. Although small variations in the expected values of the temperature can be observed for different values of the AOM amplitude, these differences are smaller compared to the errors bars. There-

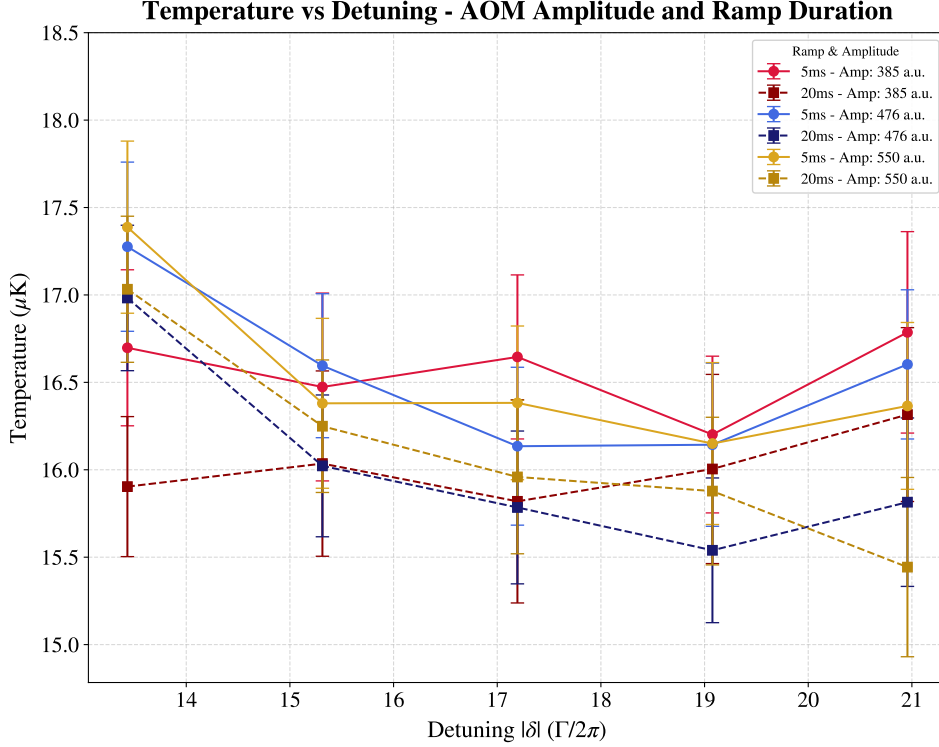


Figure 3.3: *Optical molasses temperature versus cooler detuning for different AOM amplitude and ramp durations. No clear optimal AOM amplitude is observed as the variations remain within the uncertainty. Temperatures corresponding to a ramp duration of 20 ms (dashed lines) are systematically lower than those obtained with 5 ms ramp (solid lines).*

fore, the measurements do not show statistically significant dependence of the molasses temperature on the AOM amplitude, and no clear optimum could be identified within the tested range. However lower amplitudes were not investigated to avoid operating the AOM too far from its optimal efficiency regime.

On the other hand, as shown in Figure 3.3, the temperatures obtained with a 20ms ramp are systematically lower than those obtained with a 5 ms ramp, yielding an average temperature reduction of approximately $0.5 \mu\text{K}$. This improvement was relatively small, and was considered sufficient for the scope of the experiment, since further optimization of the order of few tens of microkelvin was non required, no other ramp times were tested. Consequently, a ramp duration of 20 ms was selected for the subsequent measurements.

It is worth noting that during the ODT loading characterization, this optimization was found to introduce additional fluctuations in the system. For this reason, the subsequent optimization of the compensation coil currents was carried out using an AOM amplitude of 385 a.u. corresponding to the lowest temperature measured at $|\delta| = 17.2 \Gamma/2\pi$, with a ramp duration of 20 ms. However, during the later optimization of the ODT, these parameters were adjusting again. Nevertheless, the measurements presented in this section revealed that their influence on the molasses temperature remains limited to a few tens of microkelvin, and therefore does not significantly affect the final temperature achieved.

3.1.3 Compensation field optimization

The final stage of the molasses optimization procedure, consisted in adjusting the compensation magnetic field. The compensation coil currents are set to the molasses values 5 ms after the MOT magnetic field had been switched off. This 5 ms delay is introduced to ensure that the MOT magnetic field power supply had fully discharged, and the quadrupole field had sufficiently decayed. The optimization was performed sequentially. First, the z-axis current was optimized while keeping the x- and y-axis currents fixed to the preliminary values (3.1). Then the x-axis current was optimized using the optimal z value, and finally the y-axis current was optimized using the optimal currents for both the z- and x-axis. The results are shown in figures 3.4, 3.5 and 3.6 for the z-, x-, and y-axis coils respectively.

The resulting optimized currents used in the subsequent ODT loading stage are:

$$\begin{aligned} I_x &= -15 \text{ mA} \\ I_y &= -185 \text{ mA} \\ I_z &= -230 \text{ mA} \end{aligned} \tag{3.2}$$

The value of the z-axis compensation coil current deviated the most from its preliminary value, while the x-axis current underwent a smaller but still appreciably correction. In contrast, the y-axis coils current remained close to its preliminary values.

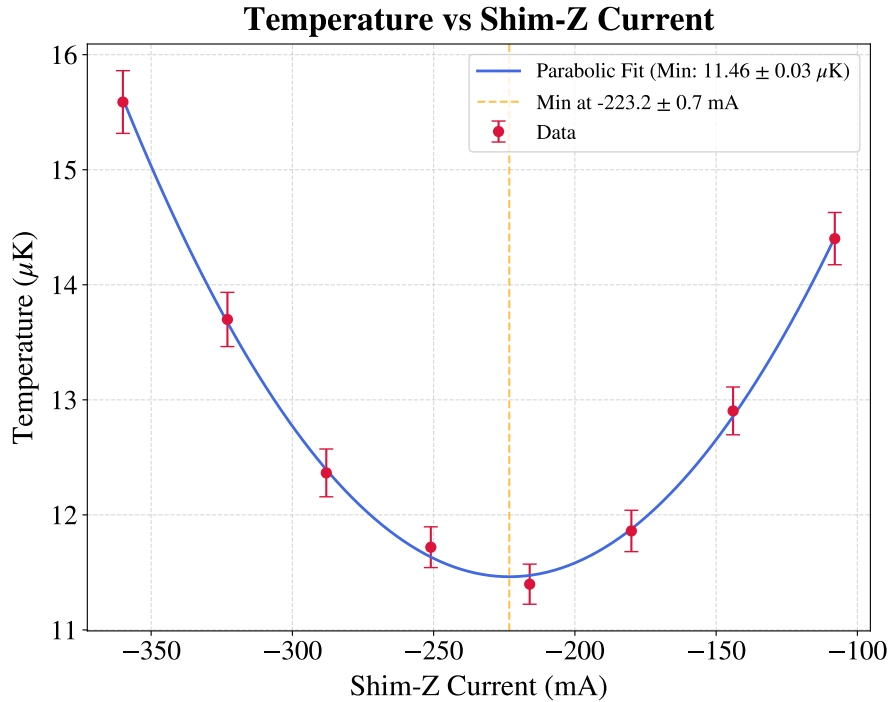


Figure 3.4: *Optical molasses temperature versus. Shim-Z current. The parabolic fit retrieves a minimum temperature $T = (11.46 \pm 0.03) \mu\text{K}$ at a current $I_z = (-223.2 \pm 0.7) \text{ mA}$.*

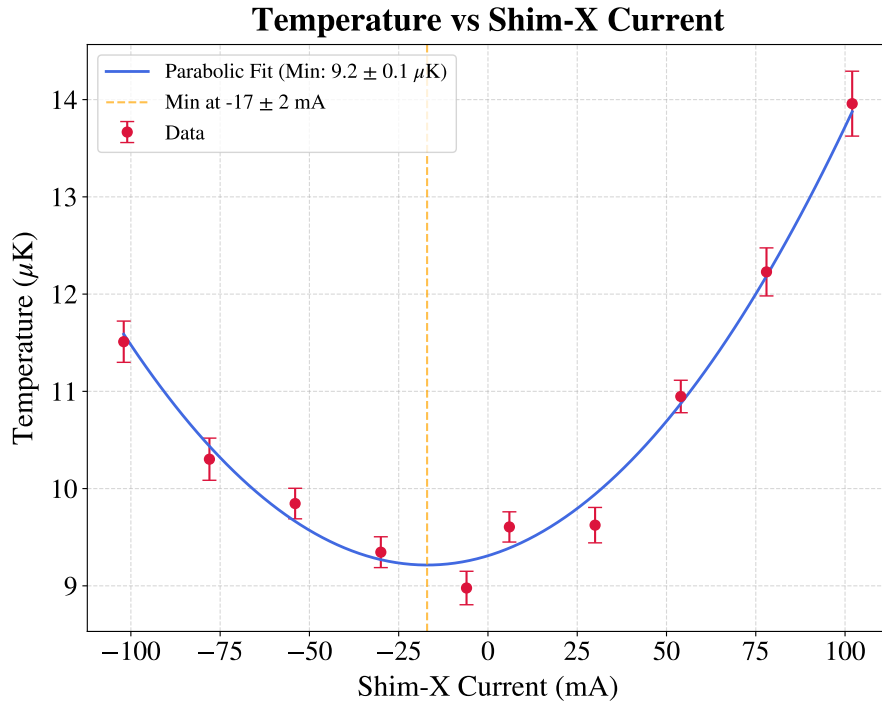


Figure 3.5: *Optical molasses temperature versus Shim-X current. The parabolic fit retrieves a minimum temperature $T = (9.2 \pm 0.1) \mu\text{K}$ at a current $I_x = (-17 \pm 2) \text{ mA}$.*

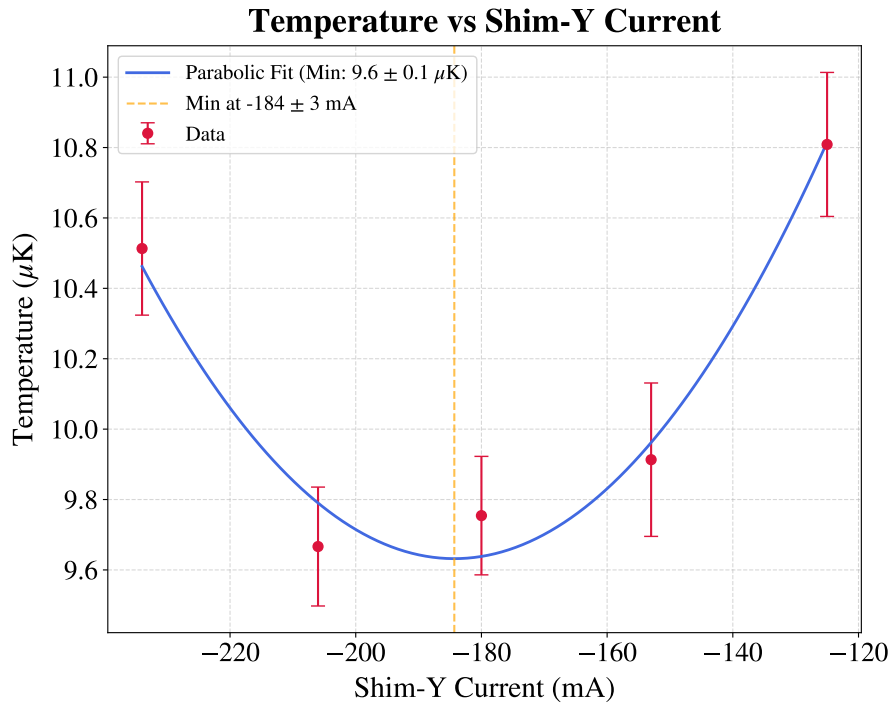


Figure 3.6: *Optical molasses temperature versus Shim-Y current. The parabolic fit retrieves a minimum temperature of $T = (9.6 \pm 0.1) \mu\text{K}$ at a current $I_y = (-184 \pm 3) \text{ mA}$.*

3.2 ODT loading optimization

The optimal parameters obtained for the molasses were used for the optimization of the ODT loading. This optimization was mainly focussed on the compensation magnetic field. The idea is to load the MOT and before switching off the magnetic field, exploit the compensation magnetic field to shift the MOT position. Indeed, the MOT is formed where the magnetic field is approximately zero, this by adjusting the compensation coil currents, it is possible to shift the zero and move the MOT. This makes the MOT loose atom since it is moved away from the optimal position of the intersection of the beams, but there is a trade-off with the better intersection with the ODT beam, that increase the number of captured atoms. As long as this shift is small the molasses optimal parameters found in the previous sections of this chapter should nullify the residual magnetic field well, and they do not need a second revision.

In particular the compensation coil currents are adjusted to the loading values after load with 200 ms ramp in 20 steps. The time and the ramp are needed to make the translation smooth, in order to minimize the loosing of atom in the process.

3.2.1 Shifted MOT

3.2.1.1 Preliminary measurements

The first measurements were taken using the FLIR camera and by employing the optimal parameters from the molasses temperature optimization.

Unfortunately using the analysis described in [2.3.3](#), both in the two-dimensional and flattened one-dimensional images there was any ODT signal visible. This was caused by two factors, the difference of the image with the ODT on and off have a residual background large compared with the expected signal of the ODT, therefore the signal is submerged in the noise, second the ODT beam radius is small compared with the cloud radius, therefore the ODT should be visible just in on few number of pixel.

3.2.1.2 Results

3.2.2 Compressed MOT