PBI迁移手册


1. 登陆RL堡垒机

https://bh.cloud.tencent.com/host?appTag=kmIxW5jfPJ0biAeW73e9d3333bd01455

输入手机号和密码，输入二次验证号码



点击访问，访问方式选择Web，登陆堡垒机

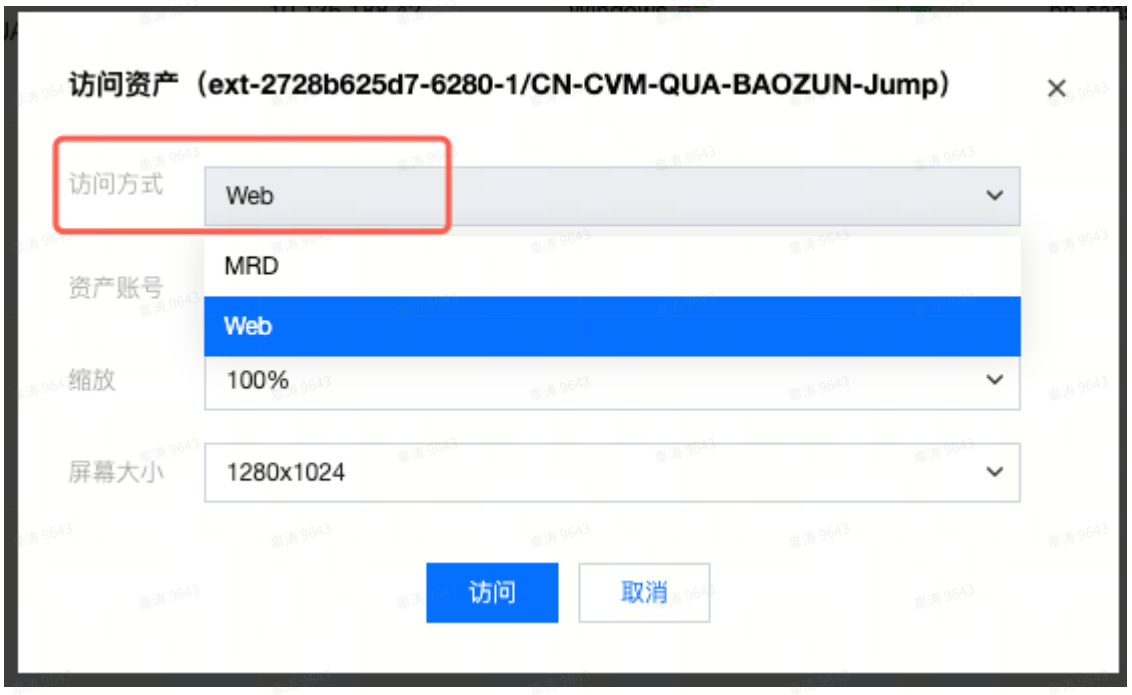

2. 登陆RL开发机


登陆堡垒机之后，在搜索框中输入 mstsc 命令，打开远程桌面连接；或者点击任务开始栏中的图标，登陆开发机。



3. 上传本地.pbi文件到开发机


本地开发的dashboard文件上传到开发机上需要经过开发机中转，步骤如下：


- 利用堡垒机上的web上传工具将本地文件上传至堡垒机中转站
- 将堡垒机中转站的文件复制至堡垒机下载文件夹
- 复制堡垒机下载文件夹中的文件，粘贴至开发机的 E:\RL_E2E 路径下

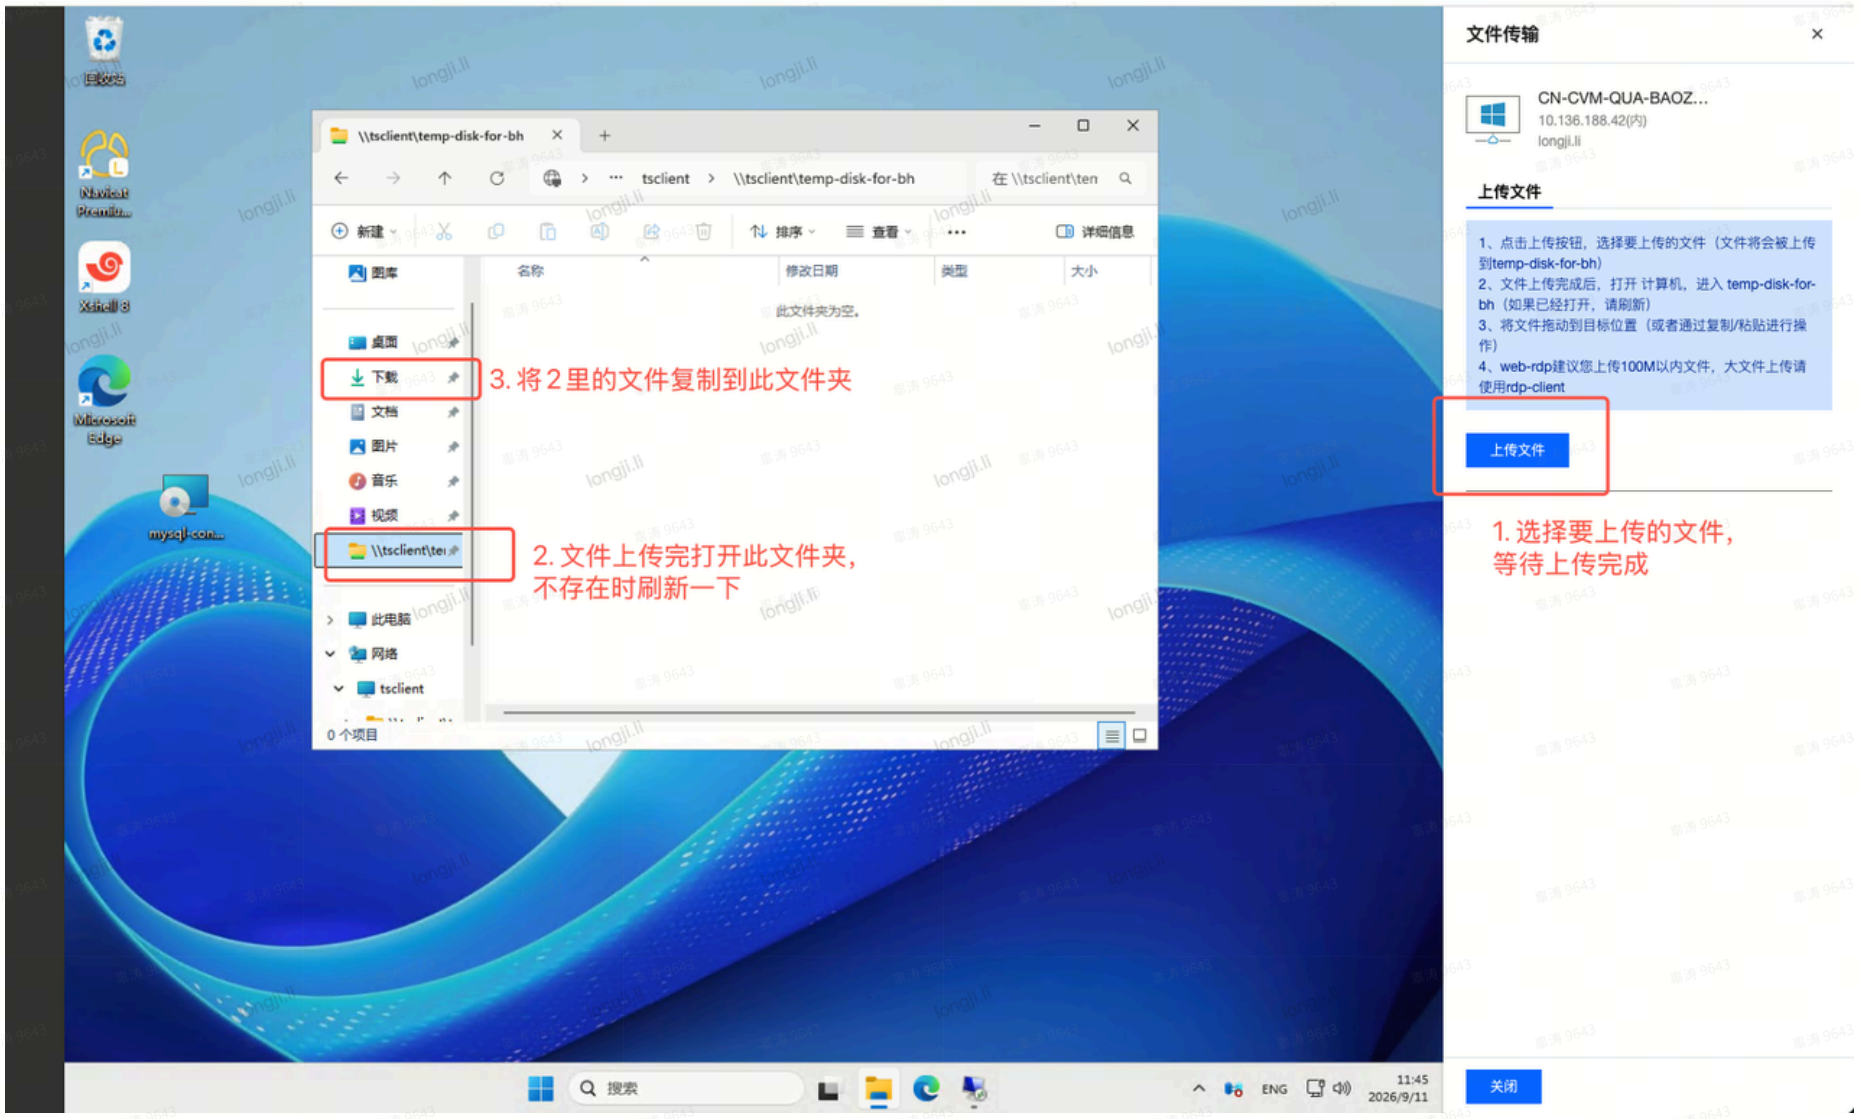

文件传输
CN-CVM-QUA-BAOZ...
10.136.188.42(内)
longji.li
上传文件
1、点击上传按钮，选择要上传的文件（文件将会被上传到temp-disk-for-bh）
2、文件上传完成后，打开 计算机，进入 temp-disk-for-bh（如果已经打开，请刷新）
3、将文件拖动到目标位置（或者通过复制/粘贴进行操作）
4、web-rdp建议您上传100M以内文件，大文件上传请使用rdp-client
上传文件
1. 选择要上传的文件，等待上传完成
关闭
\\tsclient\temp-disk-for-bh
tsclient
此文件夹为空。
3. 将2里的文件复制到此文件夹
2. 文件上传完打开此文件夹，不存在时刷新一下
0 个项目
搜索
11:45
2026/9/11

4. 创建数据源参数

打开pbi文件，点击 Transform data，点击 New Parameter，新增参数

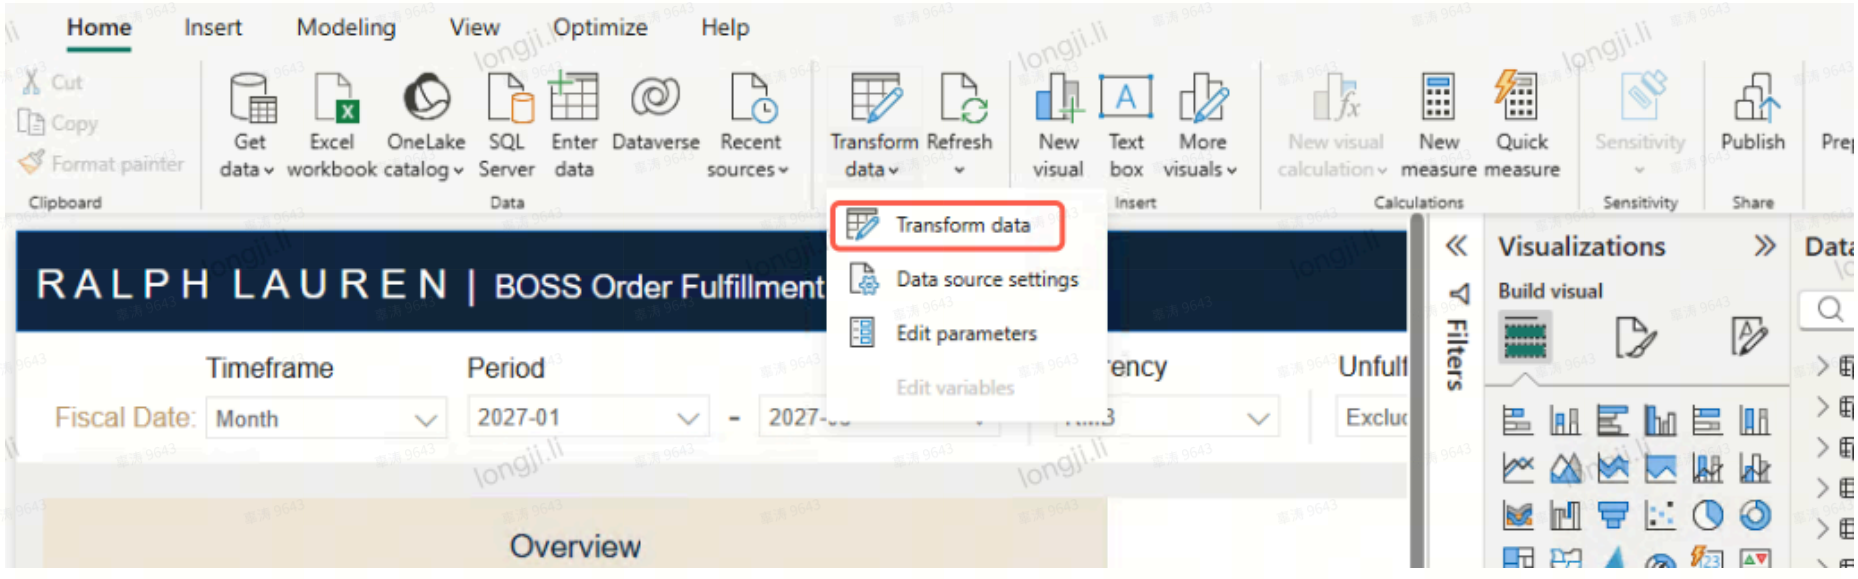


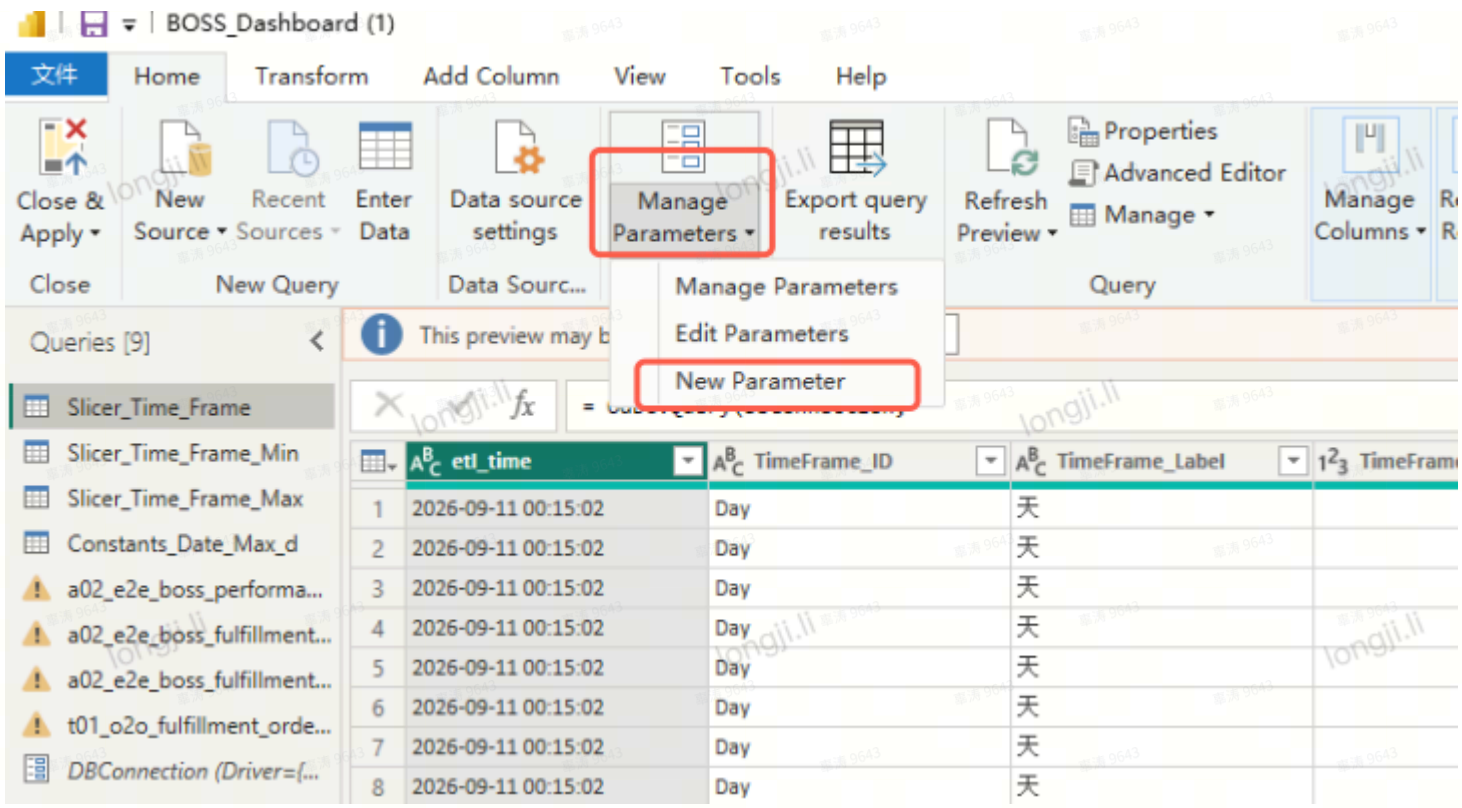

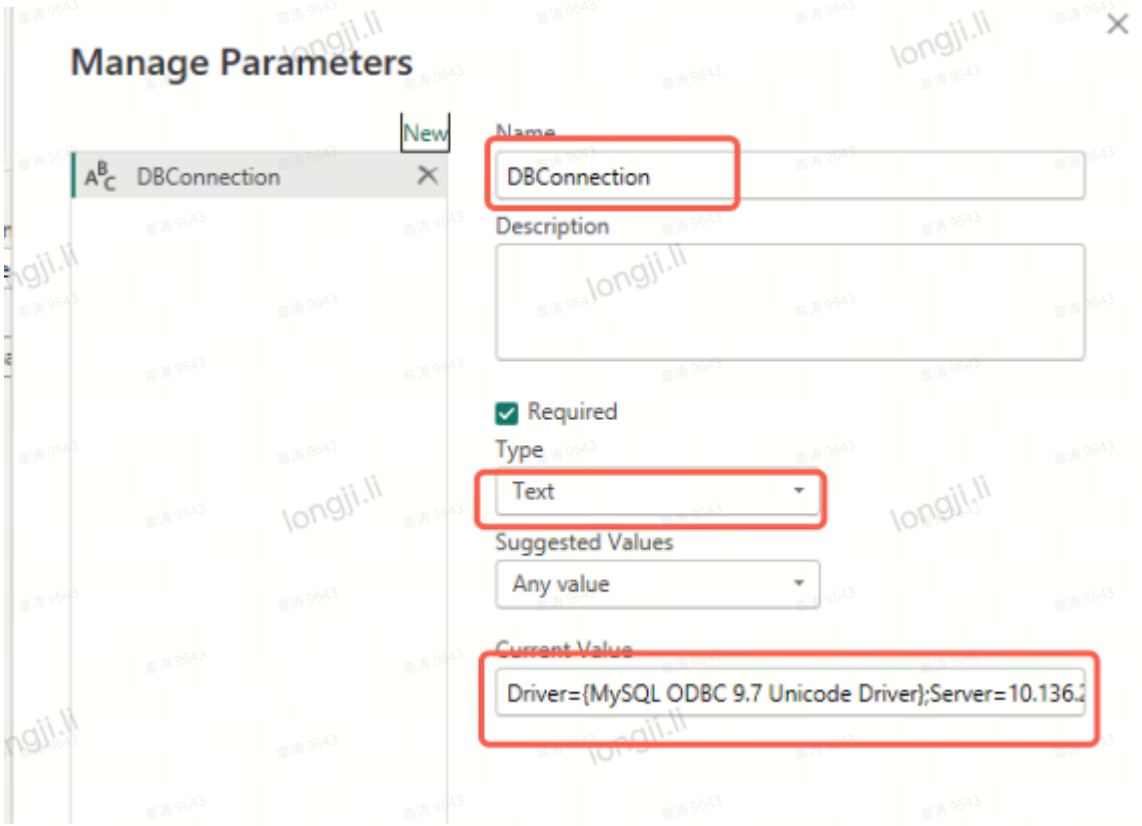

Driver={MySQL ODBC 9.7 Unicode Driver};Server=10.136.25.34;Port=9030;Database=dec2_gold;NO_CACHE=1;FORWARD_CURSOR=1;COMPRESSED_PROTO=1;

5. 修改sql

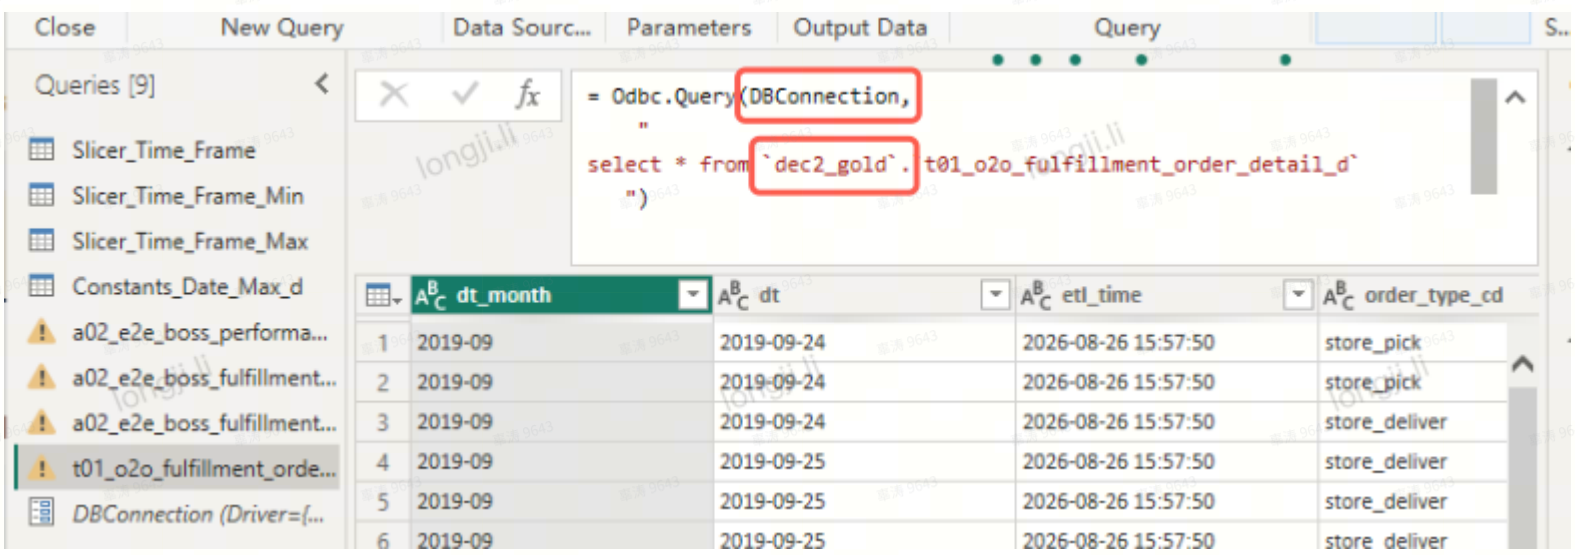

- unsigned 改成 int 类型
- 注释 // 改成 --

- 修改特定sql

📝 Customer -- Product Path

📝 Traffic Operation -- Dim_Media_Mix_Channel

```
let
    源 = Odbc.Query(DBConnection, "
        WITH detail_data AS (
        -- 动态抽取明细渠道数据，过滤掉空值与总计类型
        SELECT
            d.platform AS Platform,
            CASE d.platform WHEN 'TM' THEN 1 WHEN 'JD' THEN 2 END AS Platform_Sort,
            d.channel AS Channel,
            -- 动态生成 Channel_Sort：按 channel_type 分组排序，明细步长为 10
            CASE
                -- TM 排序逻辑：RTB(10起), 品销宝(510起), JCGP(1010起)
                WHEN d.platform = 'TM' AND d.channel_type = 'RTB'     THEN 10 + (ROW_NUMBER() OVER (PARTITION BY d.platform, d.channel_type ORDER BY d.channel) - 1) * 10
                WHEN d.platform = 'TM' AND d.channel_type = '品销宝'    THEN 510 + (ROW_NUMBER() OVER (PARTITION BY d.platform, d.channel_type ORDER BY d.channel) - 1) * 10
                WHEN d.platform = 'TM' AND d.channel_type = 'JCGP'     THEN 1010 + (ROW_NUMBER() OVER (PARTITION BY d.platform, d.channel_type ORDER BY d.channel) - 1) * 10
                -- JD 排序逻辑：RTB(10起), Brandzone(510起), JCGP(1010起)
                WHEN d.platform = 'JD' AND d.channel_type = 'RTB'     THEN 10 + (ROW_NUMBER() OVER (PARTITION BY d.platform, d.channel_type ORDER BY d.channel) - 1) * 10
                WHEN d.platform = 'JD' AND d.channel_type IN ('Brandzone','Branzone') THEN 510 + (ROW_NUMBER() OVER (PARTITION BY d.platform, d.channel_type ORDER BY d.channel) - 1) * 10
                WHEN d.platform = 'JD' AND d.channel_type = 'JCGP'     THEN 1010 + (ROW_NUMBER() OVER (PARTITION BY d.platform, d.channel_type ORDER BY d.channel) - 1) * 10
                ELSE 99999 -- 兜底未识别类型
            END AS Channel_Sort,
            d.channel AS Channel_Label,
            NULL AS Channel_Description,
            'DETAIL' AS Channel_Type,
            CONCAT(d.platform, '', d.channel) AS Channel_ID,
            CONCAT(d.platform, '', d.channel) AS Summary_Scope, -- 明细行的 Scope 为自身
            -- 动态匹配父级 SUMMARY 行
            CASE
                -- TM 归属逻辑
                WHEN d.platform = 'TM' AND d.channel_type = 'RTB'     THEN 'TM_RTB Total'
```

```
        WHEN d.platform = 'TM' AND d.channel_type = '品销宝'    THEN 'TM_品销宝 Total'
        WHEN d.platform = 'TM' AND d.channel_type = 'JCGP'     THEN 'TM_JCGP Total'
        -- JD 归属逻辑
        WHEN d.platform = 'JD' AND d.channel_type = 'RTB'      THEN 'JD_RTB Total'
        WHEN d.platform = 'JD' AND d.channel_type IN ('Brandzone','Branzone') THEN 'JD_Brandzone'
        WHEN d.platform = 'JD' AND d.channel_type = 'JCGP'     THEN 'JD_JCGP Total'
        ELSE 'UNKNOWN'
    END AS Parent_Channel_ID
  FROM (
    SELECT DISTINCT
      platform,
      channel,
      channel_type
    FROM dec2_gold.a05_e2e_paid_media_channel_data_d
    WHERE platform IN ('JD', 'TM')
      AND channel_type IS NOT NULL
      AND channel_type != ''
      AND channel_type IN ('JCGP', 'RTB', '品销宝', 'Brandzone','Branzone')
  ) d
),
dynamic_scope AS (
  -- 【新增】基于明细行的 Channel_ID 和 Parent_Channel_ID，按层级动态拼接 Summary_Scope
  -- 适配 ClickHouse：使用 arrayStringConcat(collect_set(...), '|') 进行去重并拼接
  SELECT 'TM_RTB Total' AS Channel_ID, concat_ws('|', collect_set(Channel_ID)) AS Summary_Scope
  FROM detail_data WHERE Platform = 'TM' AND Parent_Channel_ID = 'TM_RTB Total'
  UNION ALL
  SELECT 'TM_品销宝 Total', concat_ws('|', collect_set(Channel_ID))
  FROM detail_data WHERE Platform = 'TM' AND Parent_Channel_ID = 'TM_品销宝 Total'
  UNION ALL
  -- TM_JCGP Total 需要包含： JCGP明细
  SELECT 'TM_JCGP Total', concat_ws('|', collect_set(Channel_ID))
  FROM detail_data WHERE Platform = 'TM' AND Parent_Channel_ID IN ('TM_JCGP Total')
  UNION ALL
  SELECT 'TM_Total', concat_ws('|', collect_set(Channel_ID))
  FROM detail_data WHERE Platform = 'TM'
  UNION ALL
  -- TM_Total 不含JCGP（仅含RTB）
  SELECT 'TM_Total 不含JCGP', concat_ws('|', collect_set(Channel_ID))
  FROM detail_data WHERE Platform = 'TM' AND Parent_Channel_ID NOT IN ('TM_JCGP Total')
  UNION ALL
```

```
    SELECT 'JD_RTB Total', concat_ws('|', collect_set(Channel_ID))
    FROM detail_data WHERE Platform = 'JD' AND Parent_Channel_ID = 'JD_RTB Total'
    UNION ALL
    -- 包含“京选店铺”
    SELECT 'JD_RTB Total + 京选店铺', concat_ws('|', collect_set(Channel_ID))
    FROM detail_data WHERE Platform = 'JD' AND Parent_Channel_ID IN ('JD_RTB Total') OR  Channel_ID = 'JD_京选店铺'
    UNION ALL
    SELECT 'JD_Brandzone', concat_ws('|', collect_set(Channel_ID))
    FROM detail_data WHERE Platform = 'JD' AND Parent_Channel_ID = 'JD_Brandzone'
    UNION ALL
    SELECT 'JD_JCGP Total', concat_ws('|', collect_set(Channel_ID))
    FROM detail_data WHERE Platform = 'JD' AND Parent_Channel_ID = 'JD_JCGP Total'
    UNION ALL
    SELECT 'JD_Total', concat_ws('|', collect_set(Channel_ID))
    FROM detail_data WHERE Platform = 'JD'
    UNION ALL
    -- JD_Total 不含JCGP（即剔除JCGP，保留 RTB + Brandzone）
    SELECT 'JD_Total 不含JCGP', concat_ws('|', collect_set(Channel_ID))
    FROM detail_data WHERE Platform = 'JD' AND Parent_Channel_ID NOT IN ('JD_JCGP Total', 'UNKNOWN')
  ),
  summary_base AS (
    -- 写死的 SUMMARY 汇总行基础属性（Channel_Sort 固定为 500 的倍数，Summary_Scope 置空待动态匹配）
    SELECT 'TM' AS Platform, 1 AS Platform_Sort, 'RTB Total' AS Channel, 500 AS Channel_Sort, 'RTB Total' AS Channel_Label,
        'TM平台-RTB合计：直通车 + 引力魔方 + 全站推/万象台 + 超级短视频 之和' AS Channel_Description, 'SUMMARY' AS Channel_Type,
        'TM_RTB Total' AS Channel_ID, NULL AS Summary_Scope, 'TM_RTB Total' AS Parent_Channel_ID
    UNION ALL SELECT 'TM', 1, '品销宝 Total', 1000, '品销宝 Total', 'TM平台-品销宝合计：品牌专区相关渠道汇总（品销宝产品线整体）', 'SUMMARY', 'TM_品销宝 Total', NULL, 'TM_品销宝 Total'
    UNION ALL SELECT 'TM', 1, 'JCGP Total', 1500, 'JCGP Total', 'TM平台-JCGP合计：品销宝 Total + 品牌特秀（品牌类渠道整体汇总）', 'SUMMARY', 'TM_JCGP Total', NULL, 'TM_JCGP Total'
    UNION ALL SELECT 'TM', 1, 'Total', 2000, 'Total', 'TM平台-全渠道合计：RTB Total + JCGP Total，即 TM 平台所有渠道总和', 'SUMMARY', 'TM_Total', NULL, 'TM_Total'
    UNION ALL SELECT 'TM', 1, 'Total 不含JCGP', 2500, 'Total 不含JCGP', 'TM平台-全渠道合计（剔除JCGP）：Total - JCGP Total，即纯效果类渠道（RTB类）合计', 'SUMMARY', 'TM_Total 不含JCGP', NULL, 'TM_Total 不含JCGP'
    UNION ALL SELECT 'JD', 2, 'RTB Total', 500, 'RTB Total ', 'JD平台-RTB合计：快车 + 触点 + 海投 + 直投 之和', 'SUMMARY', 'JD_RTB Total', NULL, 'JD_RTB Total'
    UNION ALL SELECT 'JD', 2, 'RTB Total + 京选店铺', 501, 'RTB Total + 京选店铺', 'JD平台-RTB合计（含京选店铺）：RTB Total + 京选店铺，含京选店铺口径的效果类汇总', 'SUMMARY', 'JD_RTB Total + 京选店铺', NULL, 'JD_RTB Total + 京选店铺'
```

```
    UNION ALL SELECT 'JD', 2, 'Brandzone', 1000, 'Brandzone', 'JD平台-Brandzone汇总：所有Brandzone类型的品牌展示广告渠道汇总', 'SUMMARY', 'JD_Brandzone', NULL, 'JD_Brandzone'
    UNION ALL SELECT 'JD', 2, 'JCGP Total', 1500, 'JCGP Total ', 'JD平台-JCGP合计：品牌类渠道整体汇总（不含Brandzone）', 'SUMMARY', 'JD_JCGP Total', NULL, 'JD_JCGP Total'
    UNION ALL SELECT 'JD', 2, 'Total', 2500, 'Total ', 'JD平台-全渠道合计：RTB Total + Brandzone + JCGP Total，即JD 平台所有渠道总和', 'SUMMARY', 'JD_Total', NULL, 'JD_Total'
    UNION ALL SELECT 'JD', 2, 'Total 不含JCGP', 3000, 'Total 不含JCGP ', 'JD平台-全渠道合计（剔除JCGP）：Total - JCGP Total，纯效果类渠道（RTB类）合计', 'SUMMARY', 'JD_Total 不含JCGP', NULL, 'JD_Total 不含JCGP'
  ),
  summary_data AS (
    -- 将汇总行基础属性与动态拼接的 Scope 关联
    SELECT
      s.Platform,
      s.Platform_Sort,
      s.Channel,
      s.Channel_Sort,
      s.Channel_Label,
      s.Channel_Description,
      s.Channel_Type,
      s.Channel_ID,
      COALESCE(d.Summary_Scope, '') AS Summary_Scope,
      s.Parent_Channel_ID
    FROM summary_base s
    LEFT JOIN dynamic_scope d ON s.Channel_ID = d.Channel_ID
  )
  -- 最终合并输出并打序号
  SELECT
    ROW_NUMBER() OVER (ORDER BY Platform_Sort, Channel_Sort) AS Channel_PK,
    Platform,
    Platform_Sort,
    Channel,
     IF(Platform = 'TM',Channel_Sort,Channel_Sort*10) AS Channel_Sort,
    --  Channel_Label,
    IF(Platform = 'TM',Channel_Label,CONCAT(Channel_Label,CHAR(8203))) AS Channel_Label,
    Channel_Description,
    Channel_Type,
    Channel_ID,
    Summary_Scope,
    IF(Platform = 'TM','TM_Total','JD_Total') AS Parent_Channel_ID
  FROM (
    SELECT * FROM detail_data
```


```
    UNION ALL
    SELECT * FROM summary_data
  ) AS dim_channel_config
  ORDER BY Platform_Sort, Channel_Sort
  ;
  ")
in
  源
```

6. 保存dashboard


将修改后的文件保存

7. 登陆RL PBI Server


环境名称	PBI链接	数据库地址
QUA	https://app.powerbi.cn/groups/fc6dc296-7c36-4b5c-9044-c21192c4a49c/list?ctid=f8305e14-456a-409e-b438-6d8f5ecbbb29	10.136.33.31:9030 pbi_user
VAL	https://app.powerbi.cn/groups/389225f9-8a94-4ef8-a238-dcf6cca394af/list?ctid=f8305e14-456a-409e-b438-6d8f5ecbbb29	10.136.25.34:9030 pbi_user
PRD	https://app.powerbi.cn/groups/1d7a86f6-a9de-4f6d-a2b2-b713f01f9b7c/list?ctid=f8305e14-456a-409e-b438-6d8f5ecbbb29	10.136.27.7:9030 pbi_user

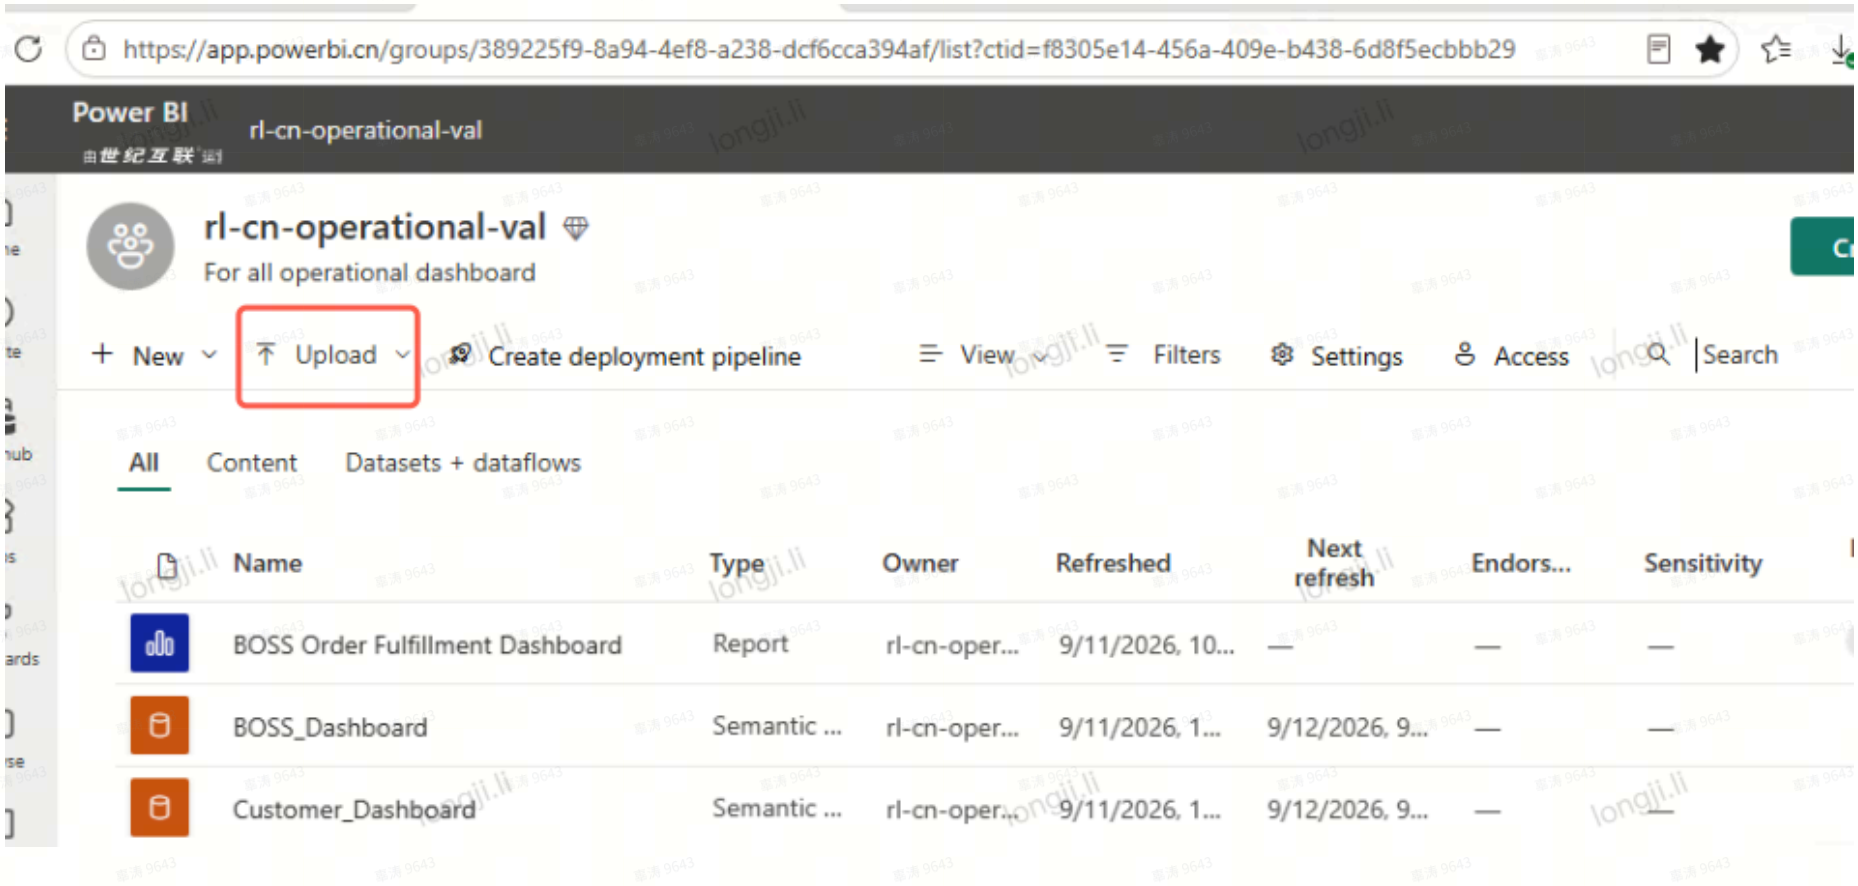

8. 上传dashboard

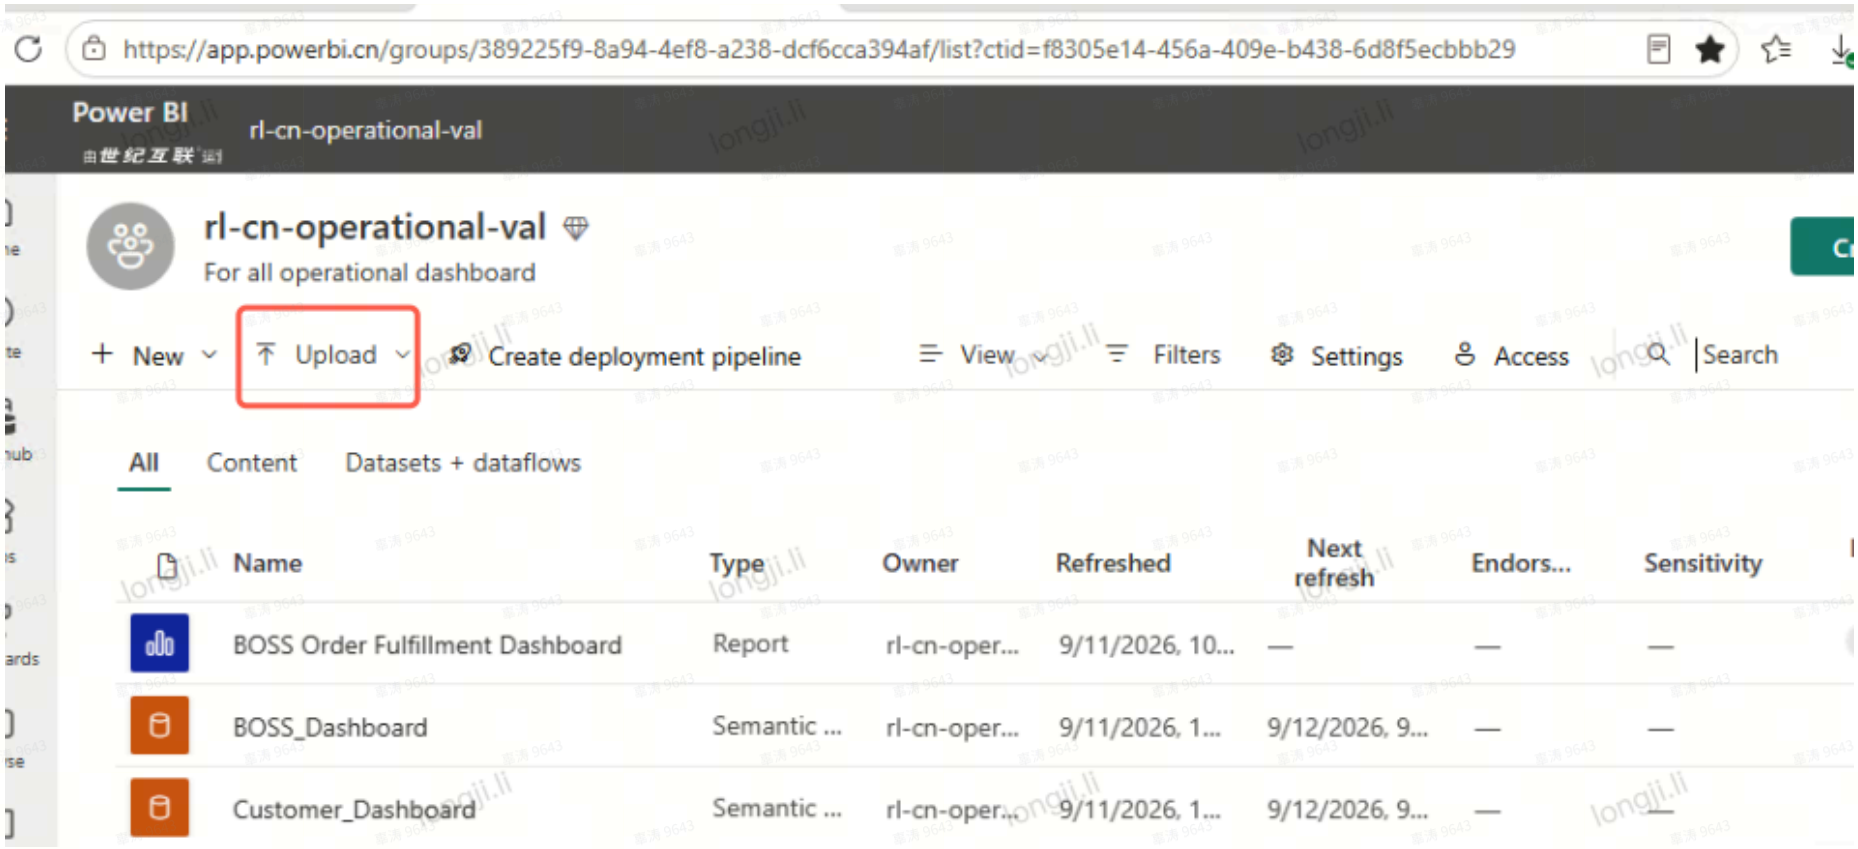


9. 修改数据源参数

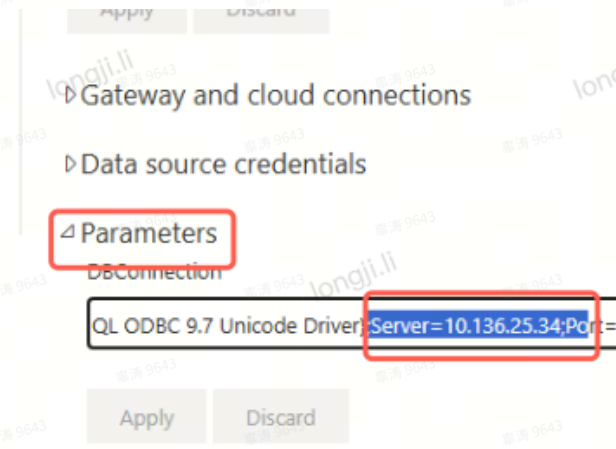


环境名称	数据库地址
QUA	10.136.33.31:9030 pbi_user
VAL	10.136.25.34:9030
PRD	10.136.27.7:9030 pbi_user

10. 配置网关

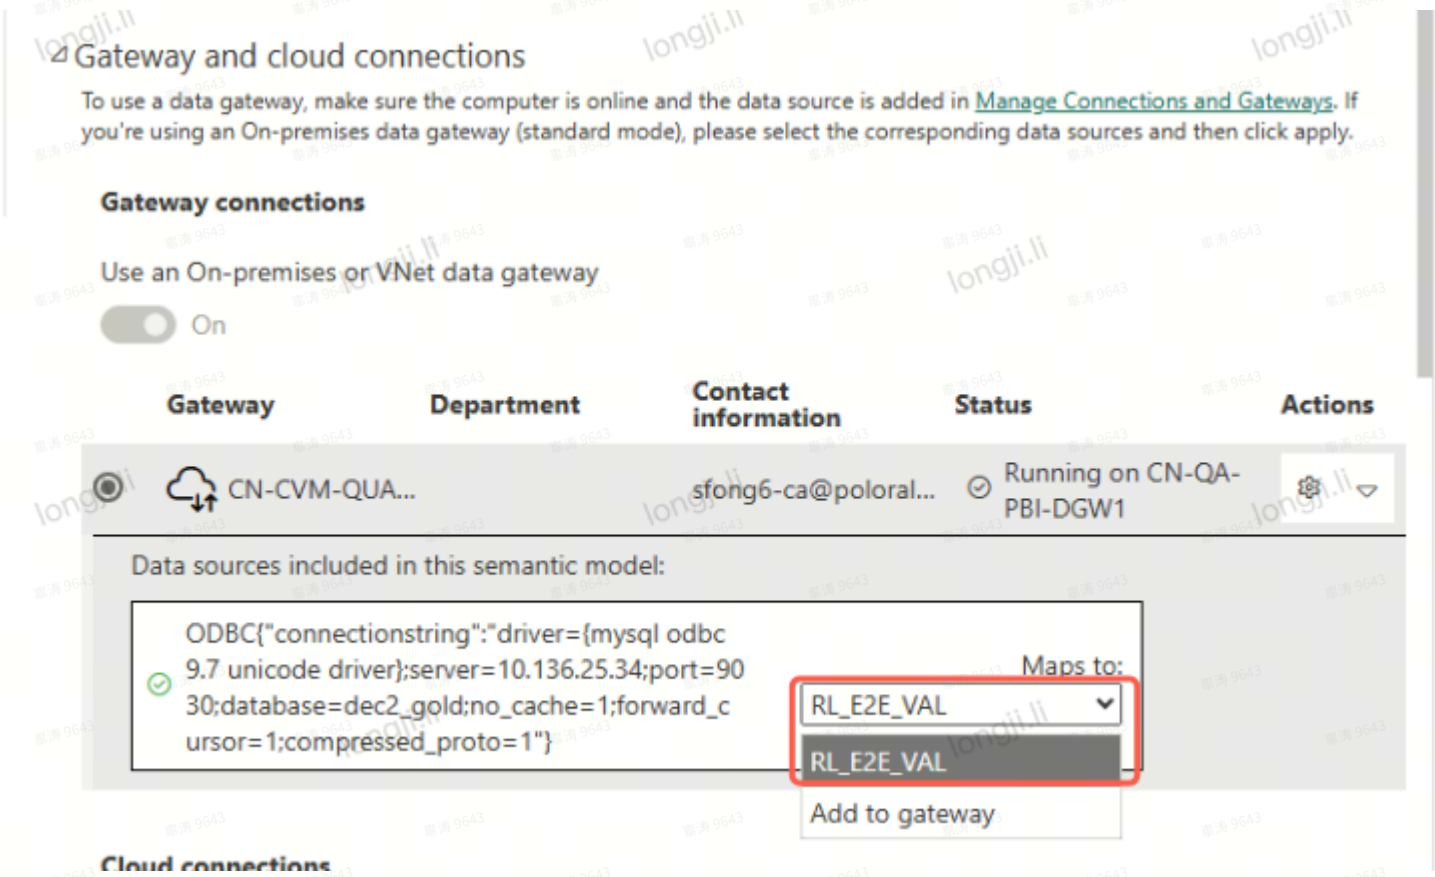

11. 设置自动刷新

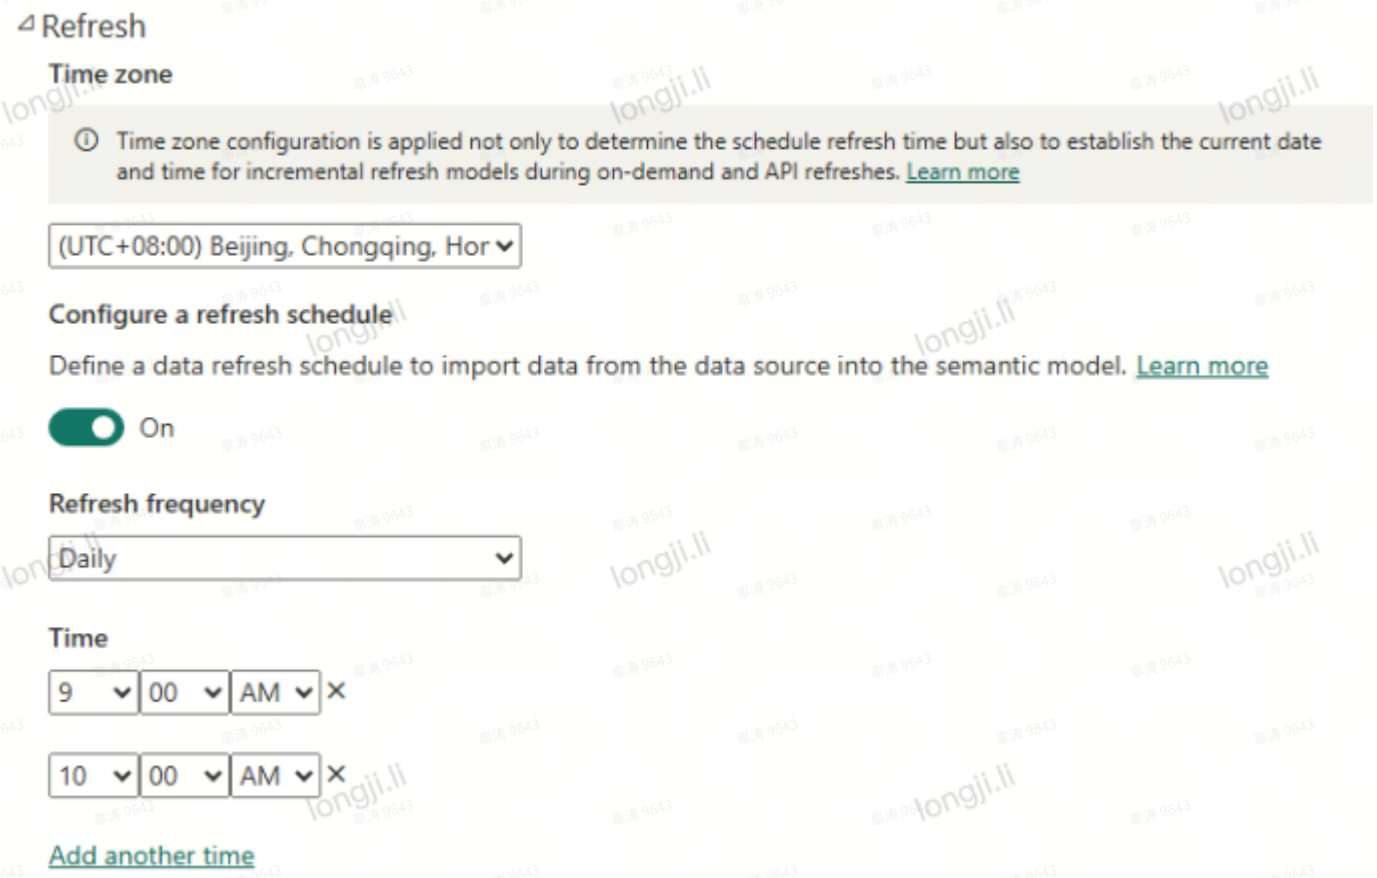
Refresh
Time zone
Time zone configuration is applied not only to determine the schedule refresh time but also to establish the current date and time for incremental refresh models during on-demand and API refreshes. Learn more
(UTC+08:00) Beijing, Chongqing, Hor
Configure a refresh schedule
Define a data refresh schedule to import data from the data source into the semantic model. Learn more
On
Refresh frequency
Daily
Time
9 00 AM
10 00 AM
Add another time