


Ansible playbooks

- A playbook is a **YAML file**.
- It tells Ansible **what tasks to perform, on which servers, and in what order**.

An **Ansible Playbook** is a YAML file that **defines a series of tasks to be executed on one or more managed hosts**. It is used to **automate configuration, deployment, and orchestration** of systems.

Each playbook contains one or more **plays**, and each play maps a group of hosts to a set of **tasks** (like installing software, starting services, copying files, etc.).

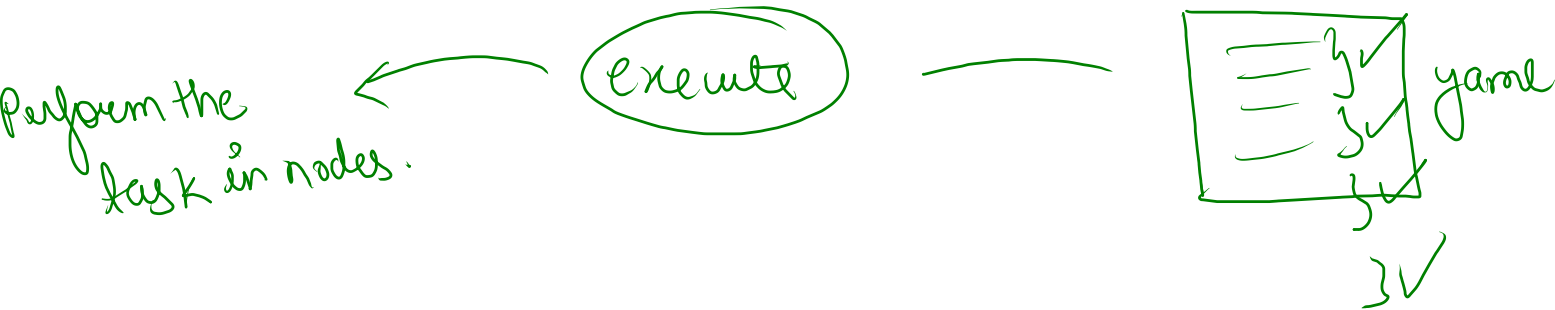

module1

module2

module3

module4



ansible-playbook < playbook.yml



Execute all the modules
in the nodes.

```
8:~$ vi myfirstplaybook.yml
```

any name

Remember ansible
playbook always
starts with **---**

```
---  
- hosts: all  
  become: true  
  tasks:  
    - name: Install apache  
      ansible.builtin.package:  
        name: apache2  
        state: present  
    - name: Start service apache, if not started  
      ansible.builtin.service:  
        name: apache2  
        state: started
```

Task1

Task2

all the tasks in
the playbook
will be executed with
root permissions

Press Esc :wq

```
devops@ip-172-31-4-38:~$ vi myfirstplaybook.yml
devops@ip-172-31-4-38:~$ ansible-playbook myfirstplaybook.yml
```

```
PLAY [all] *****
TASK [Gathering Facts] *****
```



Execute the playbook

write a playbook to install docker in the nodes and copy a file named myfile.txt from ansible server to the nodes

touch myfile.txt

```
vi mysecondplaybook.yml
```

```
-- --
- hosts: all
  become: true
  tasks:
    - name: Install docker
      ansible.builtin.package:
        name: docker.io
        state: present
    - name: Copy file with owner and permissions
      ansible.builtin.copy:
        src: /home/devops/myfile.txt
        dest: /home/devops
```

to execute the playbook:

```
$ ansible-playbook mysecondplaybook.yml
```