

Hidden Markov Models (HMMs)

HMMs are a class of models that are one step more complex than mixture models. In this case, the added complexity will make it so that the evidence is tractable, but the joint posterior $P(Z|X)$ is not.


Generative process:

$$z_0 \sim P(z_0)$$

$$\text{for } t=1 \dots T$$

$$z_t \sim P(z_t | z_{t-1})$$

$$x_t \sim P(x_t | z_t)$$

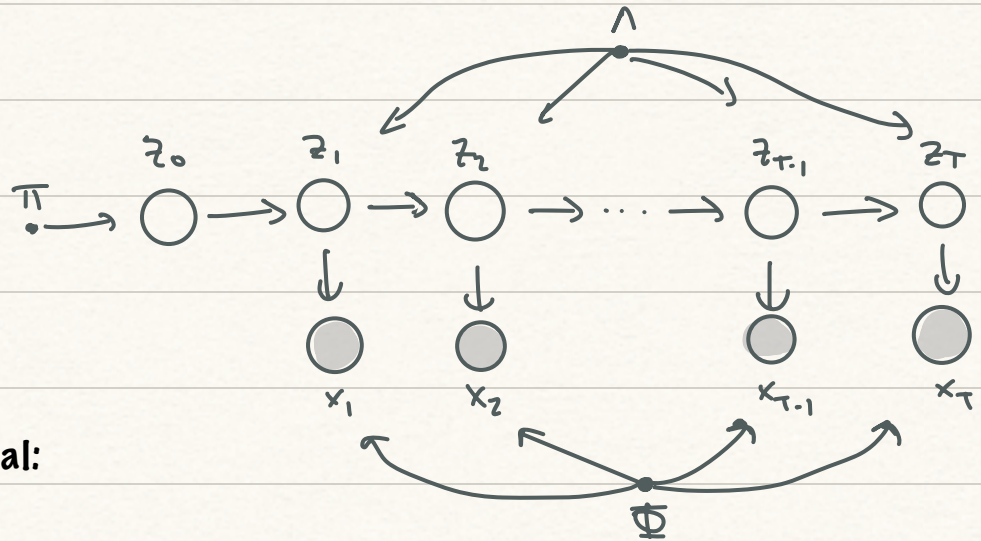

“Latent states” are categorical:

$$z_t \in \{1 \dots K\}$$

“initial distribution”

$$P(z_0 = k) = \pi_k, \quad \sum_k \pi_k = 1$$

“transition distribution”

“transition matrix” is a $K \times K$ row-stochastic matrix

$$P(z_t = k | z_{t-1} = j) = \Lambda_{jk}, \quad \sum_k \Lambda_{jk} = 1$$

“emission distribution” (i.e., class-conditional likelihood) can be anything:

$$P(x_t | z_t = k) = g(x_t | \phi_k), \quad x_t \in \mathbb{R}^D$$

Example of applications:

Speech recognition

$$x_t \in \mathbb{R}^D \quad \text{acoustic signals}$$

$$z_t \in \text{WORDS} \quad \text{words}$$

$$P_\Lambda(z_t | z_{t-1}) \quad \text{language model}$$

$$P_\phi(x_t | z_t) \quad \text{word-to-speech model}$$

Activity recognition

$$x_t \in \mathbb{R}^D \quad \text{video frame of subject}$$

$$z_t \in \{\text{RUN, WALK, ...}\} \quad \text{activity of subject}$$

$$P_\Lambda(z_t | z_{t-1}) \quad \text{activity-to-activity transition model}$$

$$P_\phi(x_t | z_t) \quad \text{activity-to-video model}$$

Inference queries of interest:

$$p(z_t | x_{1:t}) \quad \text{"filtering"}$$

$$p(z_{t+1} | x_{1:t}) \quad \text{"predictive"}$$

$$p(z_t | x_{1:T}) \quad \text{"smoothing"}$$

$$p(x_{t+1} | x_{1:t}) \quad \text{"forecasting"}$$

$$p(x_t | x_{1:T}, t) \quad \text{"imputing"}$$

$$p(x_{1:T}) \quad \text{"evidence"}$$

Learning in HMMs with EM:

$$\operatorname{argmax}_{\theta} p_{\theta}(x_{1:T}),$$

all parameters

$$\theta = \{ \lambda, \pi, \Phi \}$$

Evidence lower bound (ELBO):

$$\log p_{\theta}(x_{1:T}) \geq \mathbb{E}_q \left[\log \frac{p_{\theta}(x_{1:T}, z_{1:T})}{q(z_{1:T})} \right] \equiv \mathcal{B}(q, \theta)$$

E-step: we know from last time, that the optimal E-step update is:

$$\operatorname{argmax}_q \mathcal{B}(q, \theta) = p(z_{1:T} | x_{1:T}, \theta)$$

...however the Z 's are no longer conditionally independent in their posterior due to the dependence in their prior. **So this posterior has K^T terms and is not tractable to compute.**

Nevertheless, we will be able to do EM by **computing only the posterior expectations needed by the M-step**. To see which ones are needed, let's look at the M-step...

M-step: we also know from last time that the optimal M-step update is:

$$\operatorname{argmax}_{\theta} \mathcal{B}(q, \theta) = \operatorname{argmax}_{\theta} \mathbb{E}_q [\log p_{\theta}(x_{1:T}, z_{1:T})]$$

$$= \underset{\theta}{\operatorname{argmax}} \mathbb{E}_q [\log p_\theta(x_{1:T} | z_{1:T})] + \mathbb{E}_q [\log p(z_{1:T})]$$

$$= \underset{\phi, \pi, \lambda}{\operatorname{argmax}} \mathbb{E}_q \left[\log \prod_{t=1}^T \prod_{k=1}^K g(x_t | \phi_k)^{\mathbb{1}(z_t=k)} \right] \\ + \mathbb{E}_q \left[\log \prod_{t=1}^T \prod_{j=1}^K \prod_{k=1}^K \Lambda_{j,k}^{\mathbb{1}(z_t=k, z_{t-1}=j)} \right] \\ + \mathbb{E}_q \left[\log \prod_{k=1}^K \pi_k^{\mathbb{1}(z_0=k)} \right]$$

So this splits into three separate optimization problems:

$$\underset{\phi}{\operatorname{argmax}} \sum_t \sum_k \mathbb{E}_q [\mathbb{1}(z_t=k)] \log g(x_t | \phi_k)$$

$$\underset{\lambda}{\operatorname{argmax}} \sum_t \sum_j \sum_k \mathbb{E}_q [\mathbb{1}(z_t=k, z_{t-1}=j)] \log \Lambda_{j,k}$$

$$\underset{\pi}{\operatorname{argmax}} \sum_k \mathbb{E}_q [\mathbb{1}(z_0=k)] \log \pi_k$$

where the only thing we need from $q(\dots)$ are the singleton and pairwise marginals.

E-step: So if we can compute the following "beliefs" (i.e., posterior marginals) in the E-step, it will be as if we computed the full posterior (since the M-step only needs beliefs):

full posterior (intractable)

$$q(z_{1:T}) = p(z_{1:T} | x_{1:T}, \theta)$$

singleton "beliefs"

$$\mathbb{E}_q [\mathbb{1}(z_t=k)] = q(z_t=k) = p(z_t=k | x_{1:T}, \theta) \quad \forall k$$

pairwise "beliefs"

$$\mathbb{E}_q [\mathbb{1}(z_t=k, z_{t-1}=j)] = p(z_t=k, z_{t-1}=j | x_{1:T}, \theta) \quad \forall j, k$$

Inference in HMMs: the forwards-backwards algorithm

Even though the full posterior over latent states is intractable, it turns out that we can still compute the posterior marginals tractably using a "dynamic programming" algorithm.

Forward pass:

Consider the following predictive marginal:

$$p(z_{t+1} = k \mid x_{1:t}) = \frac{p(z_{t+1} = k, x_{1:t})}{\sum_j p(z_{t+1} = j, x_{1:t})}$$

Define the numerator to be a function of just z_{t+1} :

$$\alpha(z_{t+1}) \equiv p(z_{t+1}, x_{1:t}) = \sum_{z_t} \cdots \sum_{z_1} p(z_{t+1}, z_{1:t}, x_{1:t})$$

$\underbrace{\hspace{10em}}_{k^t \text{ terms}}$

Marginalizing over all previous states involves many terms, however the sums distribute

$$= \sum_{z_t} p(z_{t+1} \mid z_t) p(x_t \mid z_t) \sum_{z_{t-1}} \cdots \sum_{z_1} p(z_t, z_{1:t-1}, x_{1:t-1})$$

Factoring out only the first term reveals a recursion:

$$= \sum_{z_t} p(z_{t+1} \mid z_t) p(x_t \mid z_t) \alpha_t(z_t)$$

Going back all the way to $t=2$:

$$\alpha_2(z_2 = k) = p(z_2 = k, x_1) = \sum_{j=1}^K p(z_2 = k \mid z_1 = j) p(x_1 \mid z_1 = j) \alpha_1(z_1 = j)$$

The "base case" of the recursion is at $t=1$:

$$\alpha_1(z_1 = k) = p(z_1 = k) = \sum_{j=1}^K p(z_1 = k \mid z_0 = j) p(z_0 = j) = \sum_j \Lambda_{kj} \pi_j$$

The forward pass in vectorized form:

$$\vec{\alpha}_t = \begin{bmatrix} \alpha_t^{(1)} \\ \vdots \\ \alpha_t^{(K)} \end{bmatrix}, \quad \vec{l}_t = \begin{bmatrix} l_t^{(1)} \\ \vdots \\ l_t^{(K)} \end{bmatrix} \quad \text{where } l_t^{(k)} \equiv p(x_t | z_t = k)$$

$$\vec{\alpha}_1 = \Lambda^T \pi$$

for $t = 2 \dots T+1$:

$$\vec{\alpha}_t = \Lambda^T (\vec{\alpha}_{t-1} \odot \vec{l}_{t-1})$$

Hadamard (elementwise) product
underflow concerns?

This involves T matrix-times-vector products that are each $O(K^2)$.

What marginals can we compute with just the forward pass?

$$\alpha_{T+1}^{(k)} = p(z_{T+1} = k, x_{1:T})$$

$\Downarrow$

$$p(z_{T+1} = k | x_{1:T}) = \frac{\alpha_{T+1}^{(k)}}{\sum_j \alpha_{T+1}^{(j)}}$$

Question: what does the denominator compute?

evidence... of 1 to t .

$$\sum_j \alpha_{T+1}^{(j)} = ?$$

$$\sum_j \alpha_t^{(j)} = ?$$

What marginals can't we compute with only the forward pass?

$$p(z_t | x_{1:T}) \quad \text{for } t < T+1$$

These are the beliefs we need for EM, so we'll also need the **backward pass**.

Backward pass:

$$p(z_t = k \mid x_{1:T}) \propto p(z_t = k, x_{1:T})$$

$$p(z_t, x_{1:T}) = \sum_{z_T} \cdots \sum_{z_{t+1}} \sum_{z_{t-1}} \cdots \sum_{z_1} p(z_{1:T}, x_{1:T})$$

^ skipped z_t !

$$= \sum_{z_T} \cdots \sum_{z_{t+1}} \sum_{z_{t-1}} \cdots \sum_{z_1} p(z_{t+1:T}, x_{t+1:T} \mid z_t) p(x_t \mid z_t) p(z_{1:t}, x_{1:t-1})$$

$$= p(x_t \mid z_t) \left[\sum_{z_T} \cdots \sum_{z_{t+1}} p(z_{t+1:T}, x_{t+1:T} \mid z_t) \right] \left[\sum_{z_{t-1}} \cdots \sum_{z_1} p(z_t, z_{1:t-1}, x_{1:t-1}) \right]$$

$$= \underbrace{p(x_t \mid z_t)}_{\equiv \ell_t(z_t)} \underbrace{p(x_{t+1:T} \mid z_t)}_{\equiv \beta_t(z_t)} \underbrace{p(z_t, x_{1:t-1})}_{\equiv \alpha_t(z_t)}$$

These are the missing pieces: the **backward messages**.

$$\beta_t(k) = p(x_{t+1:T} \mid z_t = k) = \sum_{z_T} \cdots \sum_{z_{t+1}} p(z_{t+1:T}, x_{t+1:T} \mid z_t = k)$$

Factoring out only the last state reveals another recursion:

$$= \sum_{j=1} p(z_{t+1}=j \mid z_t=k) \underbrace{p(x_{t+1} \mid z_{t+1}=j)}_{\equiv \ell_{t+1}(j)} \underbrace{\sum_{z_{t+2}} \cdots \sum_{z_T} p(z_{t+2:T}, x_{t+2:T} \mid z_{t+1}=j)}_{\equiv p(x_{t+2:T} \mid z_{t+1}=j) \equiv \beta_{t+1}(j)} \\ = \Lambda_{kj} \ell_{t+1}(j) \beta_{t+1}(j)$$

Going back to $T-1$:

$$\beta_{T-1}(k) = p(x_T \mid z_{T-1}=k) = \sum_j \Lambda_{kj} \ell_T(j) \beta_T(j)$$

The "base case" is then at T :

$$\beta_T(k) = 1$$

The backward pass in vectorized form:

$$\vec{\beta}_t = \begin{bmatrix} \beta_t(z_t=1) \\ \vdots \\ \beta_t(z_t=K) \end{bmatrix}$$

$$\begin{aligned} \vec{\beta}_T &= \mathbf{1}_K \\ \text{for } t = T-1, \dots, 0: \\ \vec{\beta}_t &= \Lambda(\vec{z}_{t+1} \odot \vec{\beta}_{t+1}) \end{aligned}$$

Computing singleton beliefs:

$$\begin{aligned} \mathbb{E}[1(z_t=k)] &= p(z_t=k | X_{1:T}) = \frac{p(z_t=k, X_{1:T})}{\sum_j p(z_t=j, X_{1:T})} \\ &= \frac{p(z_t=k, X_{1:t-1}) p(x_t | z_t=k) p(X_{t+1:T} | z_t=k)}{\sum_j \dots} \\ &= \frac{\alpha_t(k) \ell_t(k) \beta_t(k)}{\sum_j \alpha_t(j) \ell_t(j) \beta_t(j)} \end{aligned}$$

So we just need to run the forward and backward pass once (each), and we have everything we need to compute the singleton beliefs in $O(K^2)$.

note: so therefore, if streaming, have to recompute every time?

Computing pairwise beliefs:

$$\begin{aligned} p(z_t=k, z_{t+1}=j | X_{1:T}) &= \frac{p(z_t=k, z_{t+1}=j | X_{1:T})}{\sum_{k'} \sum_{j'} p(z_t=k', z_{t+1}=j' | X_{1:T})} \\ &= p(z_{t+1}=j | X_{1:t-1}) p(x_{t+1} | z_{t+1}=j) p(z_t=k | z_{t+1}=j) p(x_t | z_t=k) p(X_{t+1:T} | z_t=k) \\ &\quad \propto \alpha_{t+1}(j) \ell_{t+1}(j) \Lambda_{jk} \ell_t(k) \beta_t(k) \end{aligned}$$

Historical notes:


- The forwards-backwards algorithm goes back at least to Rainer & Juang (1986) and is a special case of belief propagation and the sum-product algorithm (next time).
- EM for HMMs is known as the **Baum-Welch algorithm** and it was invented in 1970 before the general EM algorithm by Dempster et al. (1977)!

M-order HMMs

The latent Markov transition process is now M-order:

$$z_t \sim p(z_t | z_{t-1:t-m})$$

eg. $m=2$

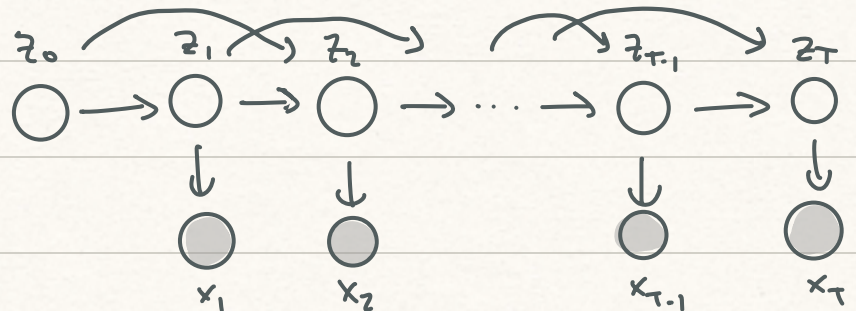

(The transition matrix is now $MK \times K$.)

EM would now require the M-order marginals to learn the transition matrix:

$$\mathbb{E}_q[\mathbb{1}(z_t \dots z_{t+m})] = p(z_t \dots z_{t+m} | x_{1:T}, \theta)$$

These become intractable to compute exactly for larger M.

However, if we could sample sequences of latent states, we could instead compute a Monte Carlo estimate of the belief:

$$\hat{\pi} \approx \frac{1}{S} \sum_{s=1}^S \mathbb{1}(z_t^s = z_t \dots z_{t+m}^s = z_{t+m})$$

$$\text{where } z_1^s \dots z_T^s \stackrel{iid}{\sim} p(z_1 \dots z_T | x_{1:T})$$

This is called **Monte Carlo EM (MC-EM)**. For $S=1$ it is called stochastic EM. We only need to be able to draw samples of the latent states from their full posterior.

Forward-filtering backward sampling (FFBS)

① Forward pass: $z_t(u)$

② $z_T \sim p(z_T | x_{1:T})$

③ for $t = T-1 \dots 0$:

$$z_t \sim p(z_t | z_{t+1}, x_{1:T})$$

???? how does this work in M-case?

MAP inference in HMMs: the Viterbi algorithm

We won't go through the details today, but another important connection is the Viterbi algorithm, which finds the maximum posterior assignment of latent states in HMMs. The main idea is that the max operation pushes across products (like the sum operation):

$$\begin{aligned} \max_{z_{1:T}} p(z_{1:T} | x_{1:T}) \\ = \max_{z_1} p(z_1 | x_{1:T}) \dots \max_{z_T} p(z_T | z_{1:T-1}, x_{1:T}) \end{aligned}$$

This allows us to derive an efficient dynamic programming algorithm. The Viterbi algorithm is a special case of the max-product algorithm (next time).

The search for the USS Scorpion

In May 1968 a US Navy submarine (the USS Scorpion) disappeared, carrying two nuclear missiles and 99 crew. There was an urgent search-and-rescue operation led by the USS Mizar on which statistician John Craven pioneered fundamental techniques in Bayesian search theory to find the missing sub.

The Navy created a search grid of 140 square miles in the Atlantic. Based on measurements (e.g., sonar, magnetometer readings, ...) and searches, they updated a posterior distribution over which cell in the grid the missing sub was.

One important aspect of their search was expert-elicited Markov-chain priors. They asked submarine Captains questions like "if you were in this cell at this time, and in this scenario, what would you do next?". Based on their answers, the statisticians developed a Markov transition model describing how probable the sub would transition from cell j to cell k at time t . In your next homework, you will use your knowledge of HMMs to find the Scorpion.

