

Experiment:-1 Kali Linux Basic Commands

AIM

To execute and display the results of the following commands in the Kali Linux operating system:

- rm command
- users command
- tree command

PROCEDURE

1. Open **Kali Linux**.
2. Open the **Terminal**.
3. Create a sample file and directory for testing.
4. Execute the rm command to remove the sample file.
5. Execute the users command to display the currently logged-in users.
6. Execute the tree command to display the directory structure.
7. Observe and record the output of each command.

CODE / COMMANDS

A. rm Command

Purpose: Removes files or directories.

Command:


```
touch sample.txt
ls
rm sample.txt
ls
```

Sample Input

```
touch sample.txt
ls
rm sample.txt
ls
```

Sample Output

sample.txt

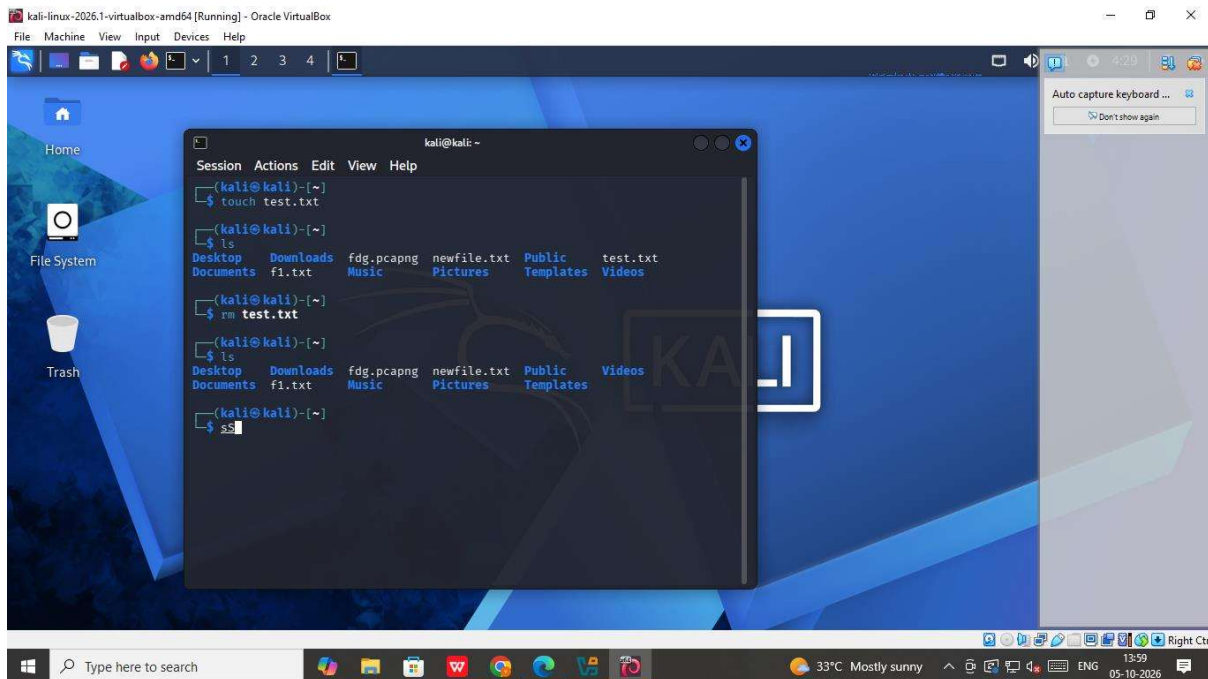

B. users Command

Purpose: Displays the usernames of users currently logged into the system.

Command:


```
users
```

Sample Input

```
users
```

Sample Output

```
kali
```

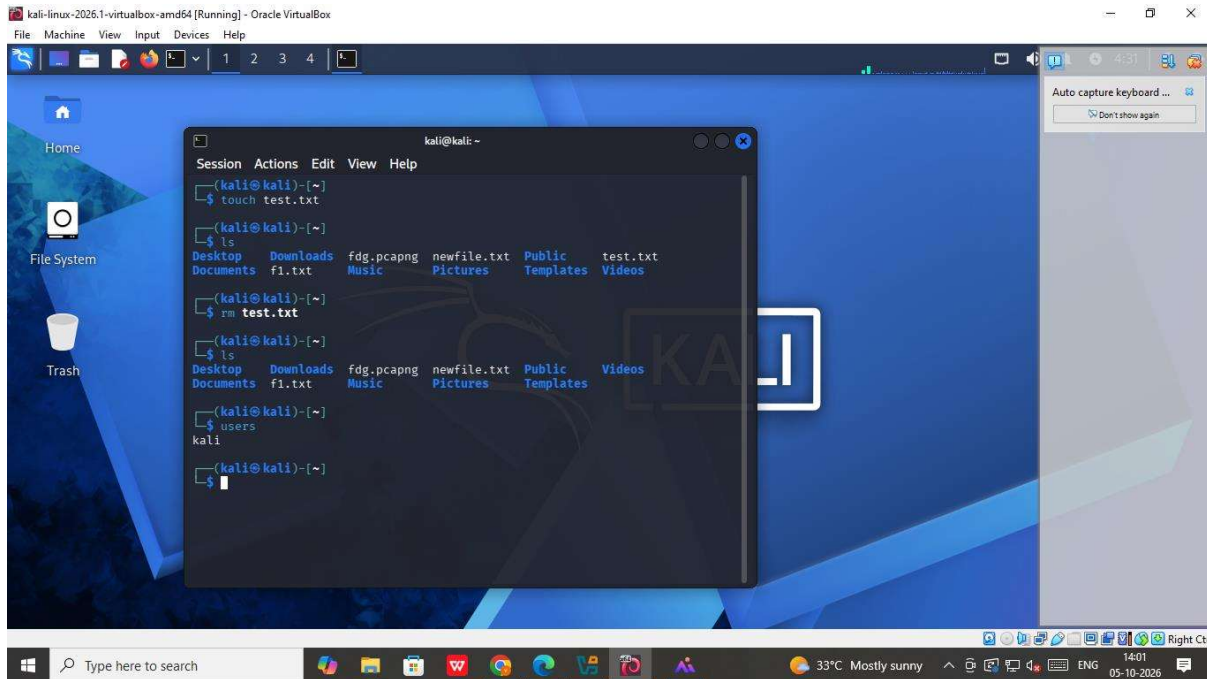

C. tree Command

Purpose: Displays files and directories in a tree-like structure.

Command:

```
mkdir lab
touch lab/file1.txt
touch lab/file2.txt
mkdir lab/folder1
touch lab/folder1/file3.txt
tree lab
```


Sample Input

```
mkdir lab
touch lab/file1.txt
touch lab/file2.txt
mkdir lab/folder1
touch lab/folder1/file3.txt
tree lab
```

Sample Output

lab

```
|— file1.txt
|— file2.txt
|— folder1
   |— file3.txt
```

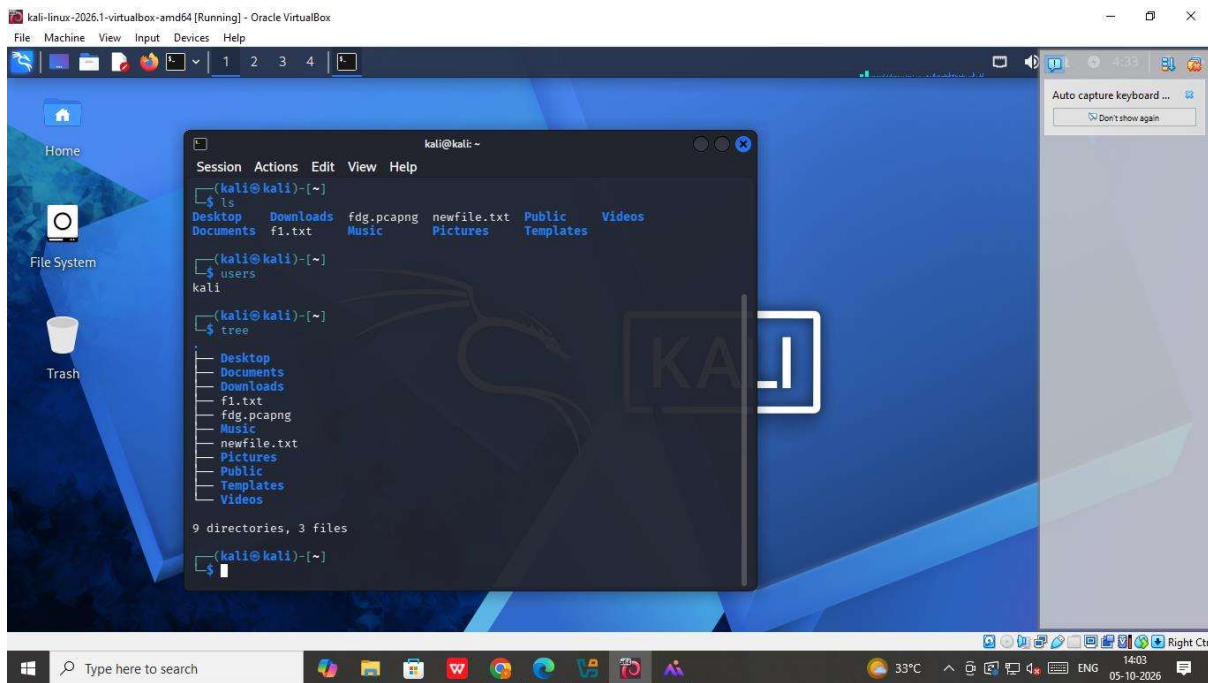

RESULT

The `rm`, `users`, and `tree` commands were successfully executed in **Kali Linux**. The `rm` command removed the specified file, `users` displayed the logged-in user, and `tree` displayed the directory structure successfully.