

User Manual

for S32K1_S32M24X RESOURCE Driver

Document Number: UM2RESOURCEASRR21-11 Rev0000R3.0.0 Rev. 1.0

1 Revision History	2
2 Introduction	3
2.1 Supported Derivatives	3
2.2 Overview	4
2.3 About This Manual	4
2.4 Acronyms and Definitions	5
2.5 Reference List	5
3 Driver	6
3.1 Requirements	6
3.2 Driver Design Summary	6
3.3 Hardware Resources	6
3.4 Deviations from Requirements	6
3.5 Driver Limitations	6
3.6 Driver usage and configuration tips	7
3.7 Runtime errors	7
3.8 Symbolic Names Disclaimer	7
3.9 Usage in non AUTOSAR context	7
4 Configuration Parameters	9
4.1 Resource	9
4.1.1 Module Resource	10
4.1.2 Container CommonPublishedInformation	10
4.1.3 Parameter ArReleaseMajorVersion	11
4.1.4 Parameter ArReleaseMinorVersion	11
4.1.5 Parameter ArReleaseRevisionVersion	11
4.1.6 Parameter ModuleId	12
4.1.7 Parameter SwMajorVersion	12
4.1.8 Parameter SwMinorVersion	13
4.1.9 Parameter SwPatchVersion	13
4.1.10 Parameter VendorApiInfix	13
4.1.11 Parameter VendorId	14
4.1.12 Container ResourceGeneral	14
4.1.13 Parameter ResourceSubderivative	15
4.1.14 Parameter ARM_CoreArchitecture	15

Chapter 1

Revision History

Revision	Date	Author	Description
1.0	07.03.2025	NXP RTD Team	S32K1_S32M24X Real-Time Drivers AUTOSAR R21-11 Version 3.0.0

Chapter 2

Introduction

- [Supported Derivatives](#)
- [Overview](#)
- [About This Manual](#)
- [Acronyms and Definitions](#)
- [Reference List](#)

This User Manual describes the NXP Semiconductor RESOURCE driver for S32K1_S32M24X platform.

2.1 Supported Derivatives

The software described in this document is intended to be used with the following microcontroller devices of NXP Semiconductors:

- s32k116_qfn32
- s32k116_lqfp48
- s32k118_lqfp48
- s32k118_lqfp64
- s32k142_lqfp48
- s32k142_lqfp64
- s32k142_lqfp100
- s32k142w_lqfp48
- s32k142w_lqfp64
- s32k144_lqfp48
- s32k144_lqfp64 / MWCT1014S_lqfp64
- s32k144_lqfp100 / MWCT1014S_lqfp100
- s32k144_mapbga100
- s32k144w_lqfp48
- s32k144w_lqfp64
- s32k146_lqfp64
- s32k146_lqfp100 / MWCT1015S_lqfp100

- s32k146_mapbga100 / MWCT1015S_mapbga100
- s32k146_lqfp144
- s32k148_lqfp100
- s32k148_mapbga100 / MWCT1016S_mapbga100
- s32k148_lqfp144
- s32k148_lqfp176
- s32m241_lqfp64
- s32m242_lqfp64
- s32m243_lqfp64
- s32m244_lqfp64

All of the above microcontroller devices are collectively named as S32K1_S32M24X. Note: MWCT part numbers contain NXP confidential IP for Qi Wireless Power

2.2 Overview

AUTOSAR (AUTomotive Open System ARchitecture) is an industry partnership working to establish standards for software interfaces and software modules for automobile electronic control systems.

AUTOSAR:

- paves the way for innovative electronic systems that further improve performance, safety and environmental friendliness.
- is a strong global partnership that creates one common standard: "Cooperate on standards, compete on implementation".
- is a key enabling technology to manage the growing electrics/electronics complexity. It aims to be prepared for the upcoming technologies and to improve cost-efficiency without making any compromise with respect to quality.
- facilitates the exchange and update of software and hardware over the service life of the vehicle.

2.3 About This Manual

This Technical Reference employs the following typographical conventions:

- **Boldface** style: Used for important terms, notes and warnings.
- *Italic* style: Used for code snippets in the text. Note that C language modifiers such "const" or "volatile" are sometimes omitted to improve readability of the presented code.

Notes and warnings are shown as below:

Note

This is a note.

Warning

This is a warning

2.4 Acronyms and Definitions

Term	Definition
API	Application Programming Interface
ASM	Assembler
BSMI	Basic Software Make file Interface
CAN	Controller Area Network
C/CPP	C and C++ Source Code
CS	Chip Select
CTU	Cross Trigger Unit
DEM	Diagnostic Event Manager
DET	Development Error Tracer
DMA	Direct Memory Access
ECU	Electronic Control Unit
FIFO	First In First Out
LSB	Least Significant Bit
MCU	Micro Controller Unit
MIDE	Multi Integrated Development Environment
MSB	Most Significant Bit
N/A	Not Applicable
RAM	Random Access Memory
SWS	Software Specification
VLE	Variable Length Encoding
XML	Extensible Markup Language

2.5 Reference List

#	Title	Version
1	S32K1xx Reference Manual	Rev.14.1, 01/2024
2	S32M24x Reference Manual	Rev. 5, 12/2024
3	S32K1xx Data Sheet	Rev. 14, 08/2021
4	S32M2xx Data Sheet	Rev. 7, 12/2024
5	S32K116 Errata	Mask Set Errata for Mask 0N96V Rev. 17/JAN/2024, 1/2024
6	S32K118 Errata	Mask Set Errata for Mask 0N97V Rev. 15/JAN/2024, 1/2024
7	S32K142 Errata	Mask Set Errata for Mask 0N33V Rev. 15/JAN/2024, 1/2024
8	S32K144 Errata	Mask Set Errata for Mask 0N57U Rev. 15/JAN/2024, 1/2024
9	S32K144W Errata	Mask Set Errata for Mask 0P64A Rev. 03/JUL/2024, 7/2024
10	S32K146 Errata	Mask Set Errata for Mask 0N73V Rev. 15/JAN/2024, 1/2024
11	S32K148 Errata	Mask Set Errata for Mask 0N20V Rev. 15/JAN/2024, 1/2024
12	S32M242 Errata	Mask Set Errata for Mask N33V+P69K Rev.1, 8/2024
13	S32M244 Errata	Mask Set Errata for Mask P64A+P69K Rev.1, 8/2024

Chapter 3

Driver

- [Requirements](#)
- [Driver Design Summary](#)
- [Hardware Resources](#)
- [Deviations from Requirements](#)
- [Driver Limitations](#)
- [Driver usage and configuration tips](#)
- [Runtime errors](#)
- [Symbolic Names Disclaimer](#)
- [Usage in non AUTOSAR context](#)

3.1 Requirements

RESOURCE is an EB Tresos specific module, so AUTOSAR only specifies some guidelines for the design and configuration. Other details for this module can be found in EB tresos Studio developer's guide.

3.2 Driver Design Summary

The RESOURCE is only a configuration module so it does not contain any executable code. The configuration set in this module is used by EB Tresos Studio to load derivative specific data into all other driver configurations.

3.3 Hardware Resources

None.

3.4 Deviations from Requirements

Since this is a EB Tresos specific Module, there are no AUTOSAR requirements for the functionality. AUTOSAR provides some guidelines for design and configuration the RESOURCE Module.

3.5 Driver Limitations

None.

3.6 Driver usage and configuration tips

None.

3.7 Runtime errors

The module does not generate any DEM errors at runtime.

Function	Error Code	Condition triggering the error
N/A	N/A	N/A

3.8 Symbolic Names Disclaimer

All containers having symbolicNameValue set to TRUE in the AUTOSAR schema will generate defines like: `#define <Mip>Conf_<Container_ShortName>_<Container_ID>`

For this reason it is forbidden to duplicate the names of such containers across the RTD configurations or to use names that may trigger other compile issues (e.g. match existing `#ifdefs` arguments).

3.9 Usage in non AUTOSAR context

For the non-ASR environments, both High-Level and IP layer interfaces are exposed and can be used by software units above. These may consist of either higher level NXP SW deliverables, like stacks and middleware, or the application code itself.

The goal of the product is to be versatile, easy to use and integrate with other SW environments, offering both standardized and optimized low-level interfaces.

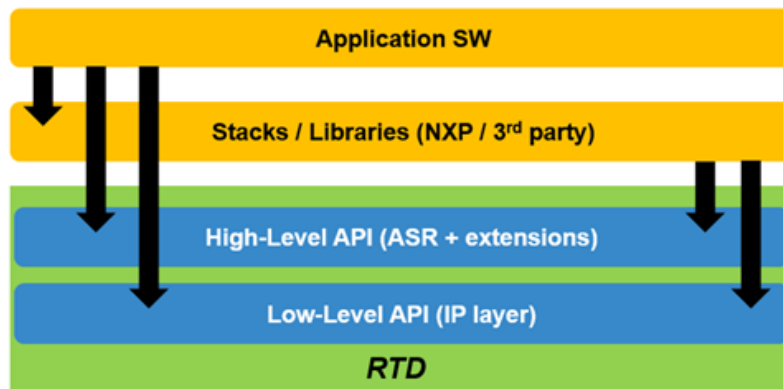


Figure 3.1 RTD Usage in non-ASR Context

In the non-AUTOSAR environment, there are no specific ECU states defined, but an external assumption for the application is that the correct sequence of initialization takes place prior to calling any runtime APIs.

The constraints considered for defining the APIs in the non-AUTOSAR environment are:

- Hardware resources used by the drivers must be properly initialized prior to runtime usage by calling the initialization function with configuration parameters generated by the configuration tools
- All dependencies must be initialized prior to the usage of a driver that depends on them; this translates to a general initialization sequence applicable for all applications, as follows:

1. Initialization of the device clock tree so other periphery can be initialized
2. Configuration of the pinout so peripherals with external connections can communicate with the outside world
3. Configuration of the common resources (e.g. DMA channels, memory regions, access rights, etc) prior to the usage of any runtime functionality that has to benefit from this overall SoC configuration
4. Initialization of specific drivers
5. Runtime functionality
6. Deinitialization (inverse initialization order)

High-level and IP layer functionalities cannot be used simultaneously over the same hardware resource. The granularity of the resource must be defined specifically for each driver, but as a general rule the default granularity considered is the peripheral instance (e.g. Gpt high level APIs cannot be called interchangeably with Pit_Ip low level APIs over the same PIT hardware instance).

The diagram below shows a generic, high-level sequence of calls to RTD interfaces in the non-AUTOSAR scenario:

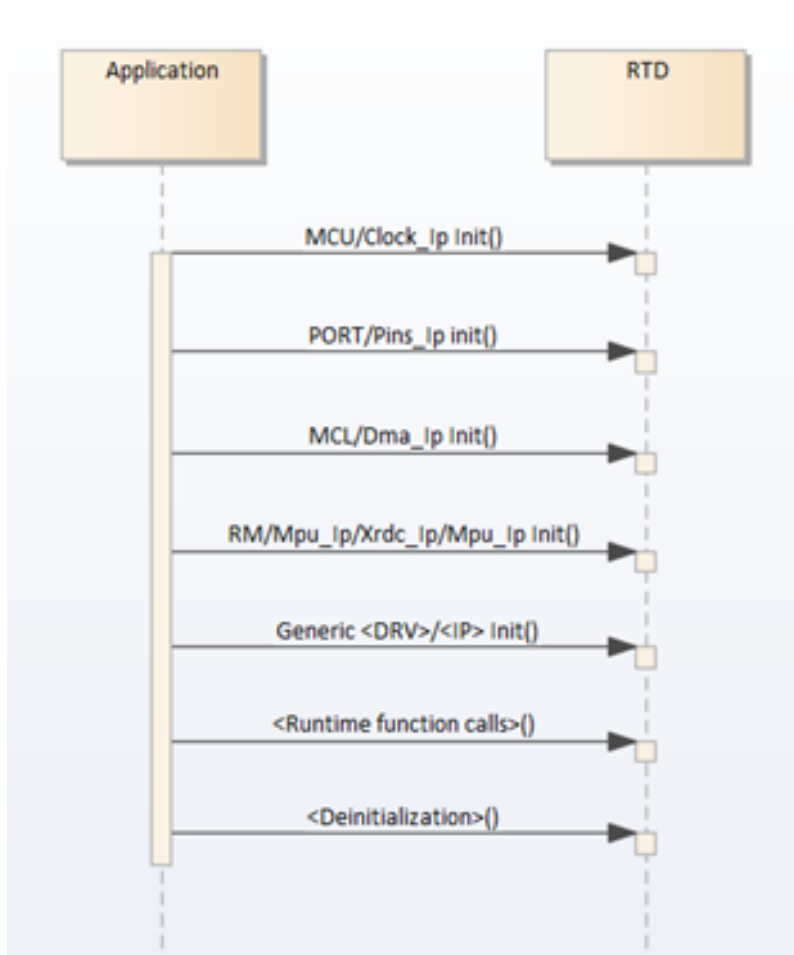


Figure 3.2 Non-AUTOSAR Sequence diagram

Chapter 4

Configuration Parameters

RTD provides configuration schema for the high level driver in EB Tresos proprietary format (**.xdm**), S32CT proprietary format (**.component**), but also in a standardized AUTOSAR format (**.epd**). For the low level driver configuration only the S32CT proprietary format (**.component**) is supported. The configuration data of the project can be saved in EB Tresos proprietary format (**.xdm**) and AUTOSAR standardized format (**.epc**) from EB Tresos and in S32CT proprietary format (**.mex**) and AUTOSAR standardized format (**.epc**) from S32 Design Studio. RTD provides templates for parsing the configuration data and generating configuration structures from it in XPath format, to be used with the EB Tresos generator and in JS format, to be used with the S32CT generator. Since the generation process is not standardized by AUTOSAR, only the two mentioned tools can be used with the provided templates. Using the same input configuration data, the same configuration structures will be obtained using any of the generators.

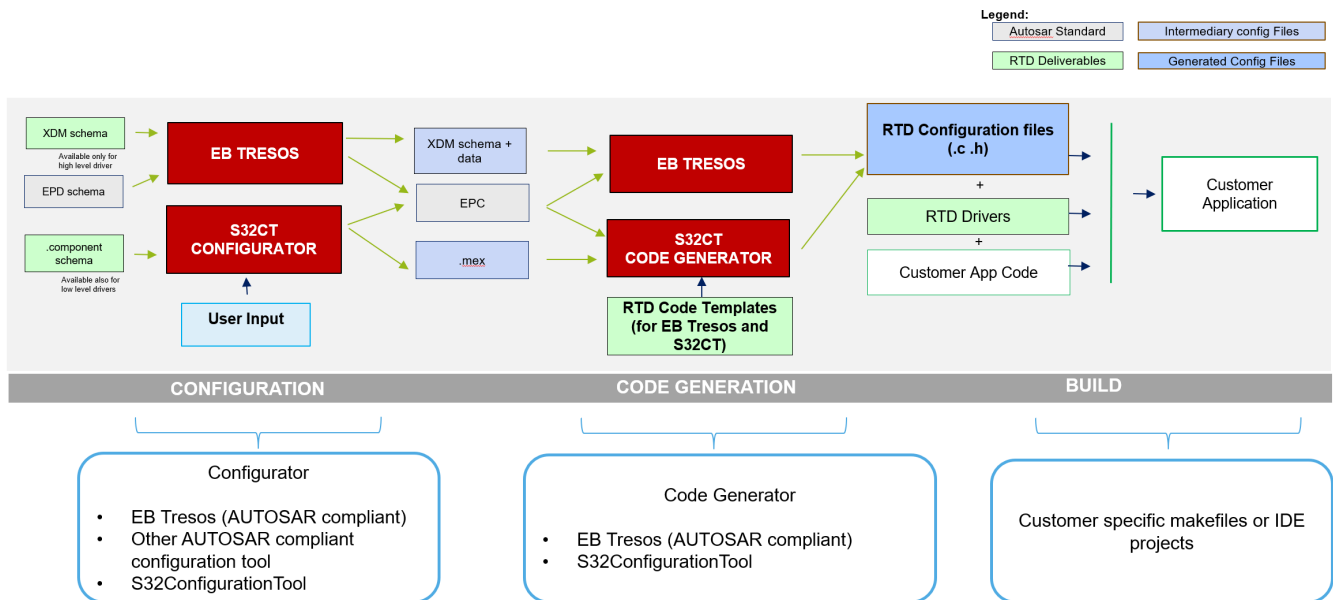


Figure 4.1 Configuration generation flow

- [Resource](#)

4.1 Resource

- Module [Resource](#)

- Container [CommonPublishedInformation](#)
 - * Parameter [ArReleaseMajorVersion](#)
 - * Parameter [ArReleaseMinorVersion](#)
 - * Parameter [ArReleaseRevisionVersion](#)
 - * Parameter [ModuleId](#)
 - * Parameter [SwMajorVersion](#)
 - * Parameter [SwMinorVersion](#)
 - * Parameter [SwPatchVersion](#)
 - * Parameter [VendorApiInfix](#)
 - * Parameter [VendorId](#)
- Container [ResourceGeneral](#)
 - * Parameter [ResourceSubderivative](#)
 - * Parameter [ARM_CoreArchitecture](#)

4.1.1 Module Resource

Configuration of Resource module.

Included containers:

- [CommonPublishedInformation](#)
- [ResourceGeneral](#)

Property	Value
type	ECUC-MODULE-DEF
lowerMultiplicity	1
upperMultiplicity	1
postBuildVariantSupport	False
supportedConfigVariants	VARIANT-PRE-COMPILE

4.1.2 Container CommonPublishedInformation

Common container, aggregated by all modules. It contains published information about vendor and versions.

Included subcontainers:

- None

Property	Value
type	ECUC-PARAM-CONF-CONTAINER-DEF
lowerMultiplicity	1
upperMultiplicity	1
postBuildVariantMultiplicity	N/A
multiplicityConfigClasses	N/A

4.1.3 Parameter ArReleaseMajorVersion

Major version number of AUTOSAR specification on which the appropriate implementation is based on.

Property	Value
type	ECUC-INTEGER-PARAM-DEF
origin	NXP
symbolicNameValue	false
lowerMultiplicity	1
upperMultiplicity	1
postBuildVariantMultiplicity	N/A
multiplicityConfigClasses	N/A
postBuildVariantValue	false
valueConfigClasses	VARIANT-PRE-COMPILE: PRE-COMPILE
defaultValue	4
max	4
min	4

4.1.4 Parameter ArReleaseMinorVersion

Minor version number of AUTOSAR specification on which the appropriate implementation is based on.

Property	Value
type	ECUC-INTEGER-PARAM-DEF
origin	NXP
symbolicNameValue	false
lowerMultiplicity	1
upperMultiplicity	1
postBuildVariantMultiplicity	N/A
multiplicityConfigClasses	N/A
postBuildVariantValue	false
valueConfigClasses	VARIANT-PRE-COMPILE: PRE-COMPILE
defaultValue	7
max	7
min	7

4.1.5 Parameter ArReleaseRevisionVersion

Revision version number of AUTOSAR specification on which the appropriate implementation is based on.

Property	Value
type	ECUC-INTEGER-PARAM-DEF
origin	NXP
symbolicNameValue	false
lowerMultiplicity	1
upperMultiplicity	1

Configuration Parameters

Property	Value
postBuildVariantMultiplicity	N/A
multiplicityConfigClasses	N/A
postBuildVariantValue	false
valueConfigClasses	VARIANT-PRE-COMPILE: PRE-COMPILE
defaultValue	0
max	0
min	0

4.1.6 Parameter ModuleId

Module ID of this module from Module List.

Property	Value
type	ECUC-INTEGER-PARAM-DEF
origin	NXP
symbolicNameValue	false
lowerMultiplicity	1
upperMultiplicity	1
postBuildVariantMultiplicity	N/A
multiplicityConfigClasses	N/A
postBuildVariantValue	false
valueConfigClasses	VARIANT-PRE-COMPILE: PRE-COMPILE
defaultValue	0
max	0
min	0

4.1.7 Parameter SwMajorVersion

Major version number of the vendor specific implementation of the module. The numbering is vendor specific.

Property	Value
type	ECUC-INTEGER-PARAM-DEF
origin	NXP
symbolicNameValue	false
lowerMultiplicity	1
upperMultiplicity	1
postBuildVariantMultiplicity	N/A
multiplicityConfigClasses	N/A
postBuildVariantValue	false
valueConfigClasses	VARIANT-PRE-COMPILE: PRE-COMPILE
defaultValue	3
max	3
min	3

4.1.8 Parameter SwMinorVersion

Minor version number of the vendor specific implementation of the module. The numbering is vendor specific.

Property	Value
type	ECUC-INTEGER-PARAM-DEF
origin	NXP
symbolicNameValue	false
lowerMultiplicity	1
upperMultiplicity	1
postBuildVariantMultiplicity	N/A
multiplicityConfigClasses	N/A
postBuildVariantValue	false
valueConfigClasses	VARIANT-PRE-COMPILE: PRE-COMPILE
defaultValue	0
max	0
min	0

4.1.9 Parameter SwPatchVersion

Patch level version number of the vendor specific implementation of the module. The numbering is vendor specific.

Property	Value
type	ECUC-INTEGER-PARAM-DEF
origin	NXP
symbolicNameValue	false
lowerMultiplicity	1
upperMultiplicity	1
postBuildVariantMultiplicity	N/A
multiplicityConfigClasses	N/A
postBuildVariantValue	false
valueConfigClasses	VARIANT-PRE-COMPILE: PRE-COMPILE
defaultValue	0
max	0
min	0

4.1.10 Parameter VendorApiInfix

In driver modules which can be instantiated several times on a single ECU, BSW00347 requires that the name of APIs is extended by the VendorId and a vendor specific name.

This parameter is used to specify the vendor specific name. In total, the implementation specific name is generated as follows:

<ModuleName>_<VendorId>_<VendorApiInfix>.

E.g. assuming that the VendorId of the implementor is 123 and the implementer chose a VendorApiInfix of "v11r456" a api name Can_Write defined in the SWS will translate to Can_123_v11r456Write.

This parameter is mandatory for all modules with upper multiplicity > 1. It shall not be used for modules with upper multiplicity =1.

Property	Value
type	ECUC-STRING-PARAM-DEF
origin	NXP
symbolicNameValue	false
lowerMultiplicity	0
upperMultiplicity	1
postBuildVariantMultiplicity	false
multiplicityConfigClasses	VARIANT-PRE-COMPILE: PRE-COMPILE
postBuildVariantValue	false
valueConfigClasses	VARIANT-PRE-COMPILE: PRE-COMPILE
defaultValue	

4.1.11 Parameter VendorId

Vendor ID of the dedicated implementation of this module according to the AUTOSAR vendor list.

Property	Value
type	ECUC-INTEGER-PARAM-DEF
origin	NXP
symbolicNameValue	false
lowerMultiplicity	1
upperMultiplicity	1
postBuildVariantMultiplicity	N/A
multiplicityConfigClasses	N/A
postBuildVariantValue	false
valueConfigClasses	VARIANT-PRE-COMPILE: PRE-COMPILE
defaultValue	43
max	43
min	43

4.1.12 Container ResourceGeneral

Resource General config. container.

Included subcontainers:

- None

Property	Value
type	ECUC-PARAM-CONF-CONTAINER-DEF
lowerMultiplicity	1
upperMultiplicity	1
postBuildVariantMultiplicity	N/A
multiplicityConfigClasses	N/A

4.1.13 Parameter ResourceSubderivative

Sub-derivative selector for the current platform.

Property	Value
type	ECUC-ENUMERATION-PARAM-DEF
origin	NXP
symbolicNameValue	false
lowerMultiplicity	1
upperMultiplicity	1
postBuildVariantMultiplicity	N/A
multiplicityConfigClasses	N/A
postBuildVariantValue	false
valueConfigClasses	VARIANT-PRE-COMPILE: PRE-COMPILE
default Value	s32m244_lqfp64
literals	['s32m244_lqfp64', 's32m242_lqfp64', 's32m241_lqfp64', 's32m243_lqfp64', 's32k116_qfn32', 's32k116_lqfp48', 's32k118_lqfp48', 's32k118_lqfp64', 's32k142_lqfp48', 's32k142_lqfp64', 's32k142_lqfp100', 's32k142w_lqfp48', 's32k142w_lqfp64', 's32k144_lqfp48', 's32k144_lqfp64', 's32k144_lqfp100', 's32k144_lqfp100', 's32k144_mapbga100', 's32k144w_lqfp48', 's32k144w_lqfp64', 's32k146_lqfp64', 's32k146_lqfp100', 's32k146_mapbga100', 's32k146_lqfp144', 's32k148_lqfp100', 's32k148_mapbga100', 's32k148_lqfp144', 's32k148_lqfp176']

4.1.14 Parameter ARM_CoreArchitecture

Arm core architecture selector for the current platform. Select:

ARM_A64_ARCH - for 64 Bit ARM core architecture

ARM_M_ARCH - for Mx ARM core architecture

Property	Value
type	ECUC-ENUMERATION-PARAM-DEF
origin	NXP
symbolicNameValue	false
lowerMultiplicity	1
upperMultiplicity	1
postBuildVariantMultiplicity	N/A
multiplicityConfigClasses	N/A
postBuildVariantValue	false
valueConfigClasses	VARIANT-PRE-COMPILE: PRE-COMPILE
default Value	ARM_M_ARCH
literals	['ARM_M_ARCH']

How to Reach Us:

Home Page:

nxp.com

Web Support:

nxp.com/support

Limited warranty and liability - Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors.

Right to make changes - NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications - This NXP product has been qualified for use in automotive applications. If this product is used by customer in the development of, or for incorporation into, products or services (a) used in safety critical applications or (b) in which failure could lead to death, personal injury, or severe physical or environmental damage (such products and services hereinafter referred to as "Critical Applications"), then customer makes the ultimate design decisions regarding its products and is solely responsible for compliance with all legal, regulatory, safety, and security related requirements concerning its products, regardless of any information or support that may be provided by NXP. As such, customer assumes all risk related to use of any products in Critical Applications and NXP and its suppliers shall not be liable for any such use by customer. Accordingly, customer will indemnify and hold NXP harmless from any claims, liabilities, damages and associated costs and expenses (including attorneys' fees) that NXP may incur related to customer's incorporation of any product in a Critical Application.

Applications - Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Terms and conditions of commercial sale - NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

Export control - This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Translations — A non-English (translated) version of a document, including the legal information in that document, is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Security — Customer understands that all NXP products may be subject to unidentified vulnerabilities or may support established security standards or specifications with known limitations. Customer is responsible for the design and operation of its applications and products throughout their lifecycles to reduce the effect of these vulnerabilities on customer's applications and products. Customer's responsibility also extends to other open and/or proprietary technologies supported by NXP products for use in customer's applications. NXP accepts no liability for any vulnerability. Customer should regularly check security updates from NXP and follow up appropriately.

Customer shall select products with security features that best meet rules, regulations, and standards of the intended application and make the ultimate design decisions regarding its products and is solely responsible for compliance with all legal, regulatory, and security related requirements concerning its products, regardless of any information or support that may be provided by NXP.

NXP has a Product Security Incident Response Team (PSIRT) (reachable at <mailto:PSIRT@nxp.com>) that manages the investigation, reporting, and solution release to security vulnerabilities of NXP products.

NXP B.V. - NXP B.V. is not an operating company and it does not distribute or sell products.