

Experiment 9: Nmap Timing and Performance Commands in Kali Linux

Aim

To execute Nmap timing and performance commands in Kali Linux and observe how scan timing affects network scanning.

Procedure

1. Open the Kali Linux terminal.
2. Check whether Nmap is installed using `nmap --version`.
3. Select a target machine that you own or have permission to scan.
4. Execute the polite and normal timing commands.
5. Observe the scan output and compare the scanning behavior.


Commands / Code

(i) Polite scan

Sample Input:

```
nmap -T2 192.168.1.10
```

Sample Output (illustrative):

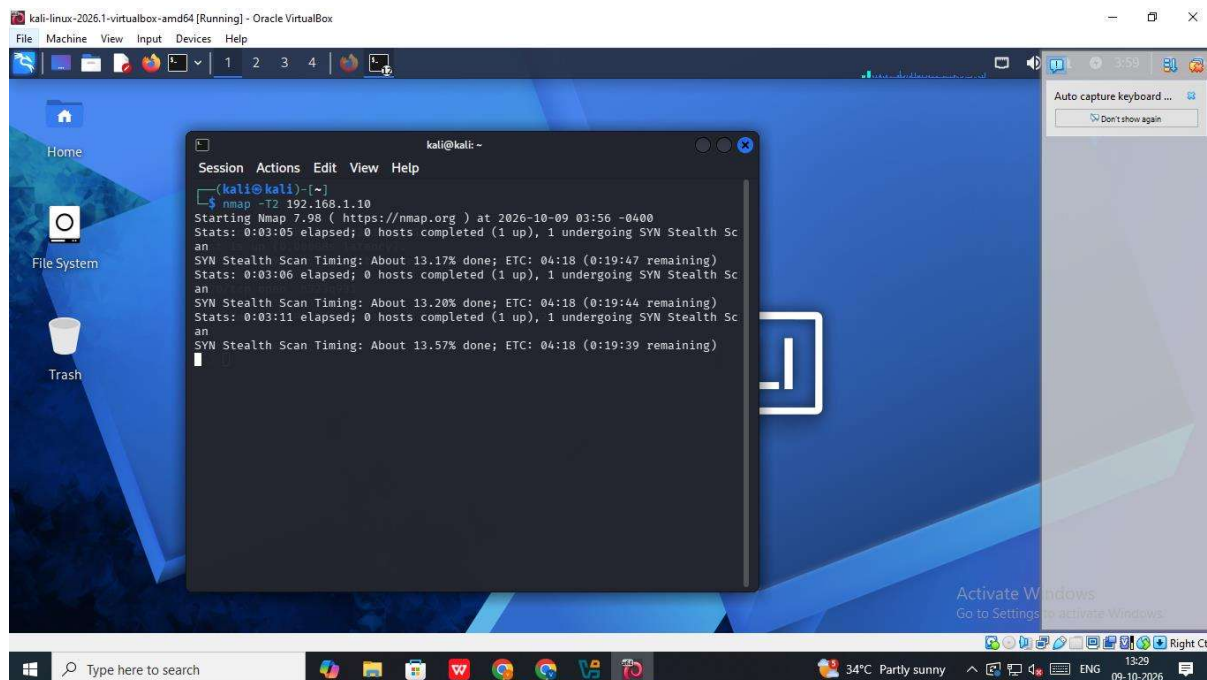


(ii) Normal scan

Sample Input:

```
nmap -T3 192.168.1.10
```

Sample Output (illustrative):

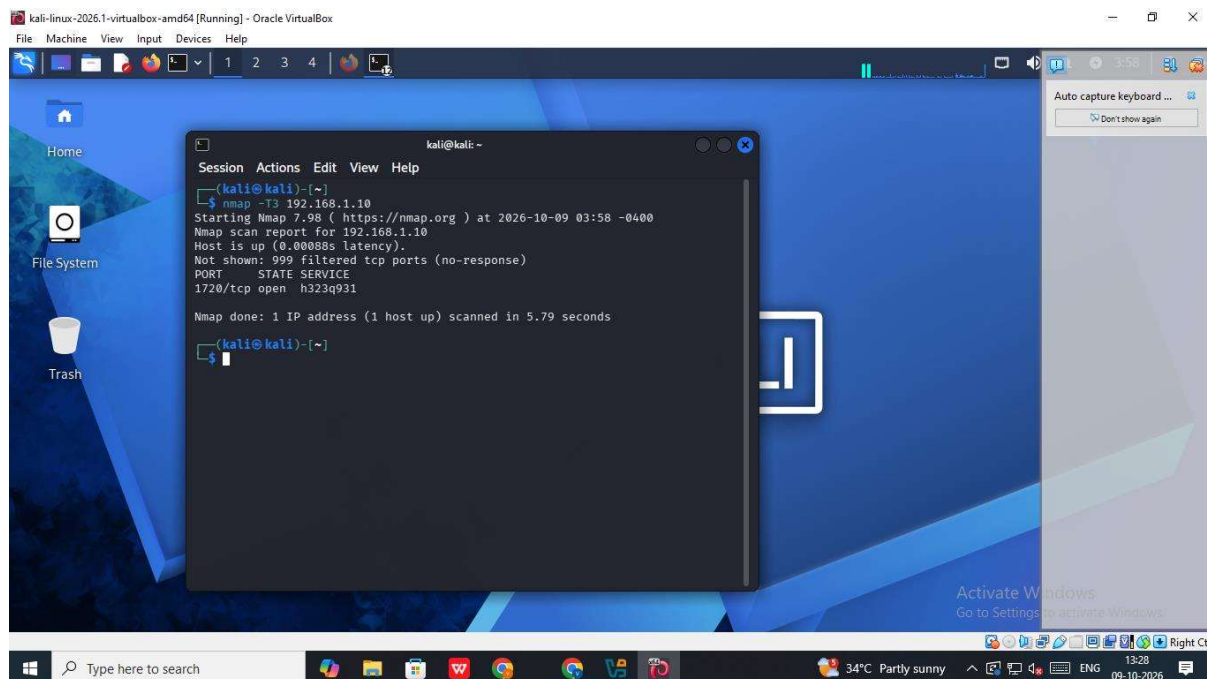

Result

Nmap polite and normal timing scans were demonstrated using -T2 and -T3. The polite scan uses slower timing to reduce network impact, while the normal scan uses the default-style timing behavior.