

Experiment 11: Nmap Timing and Performance Commands in Kali Linux

Aim

To execute Nmap aggressive-speed and insane-speed scans in Kali Linux and observe their scanning performance.

Procedure

1. Open the Kali Linux terminal.
2. Check Nmap installation using `nmap --version`.
3. Choose a target IP address that you own or are authorized to scan.
4. Execute the aggressive-speed and insane-speed commands.
5. Observe and record the output.


Commands / Code

(i) Aggressive speed scan

Sample Input:

```
nmap -T4 192.168.1.10
```

Sample Output (illustrative):

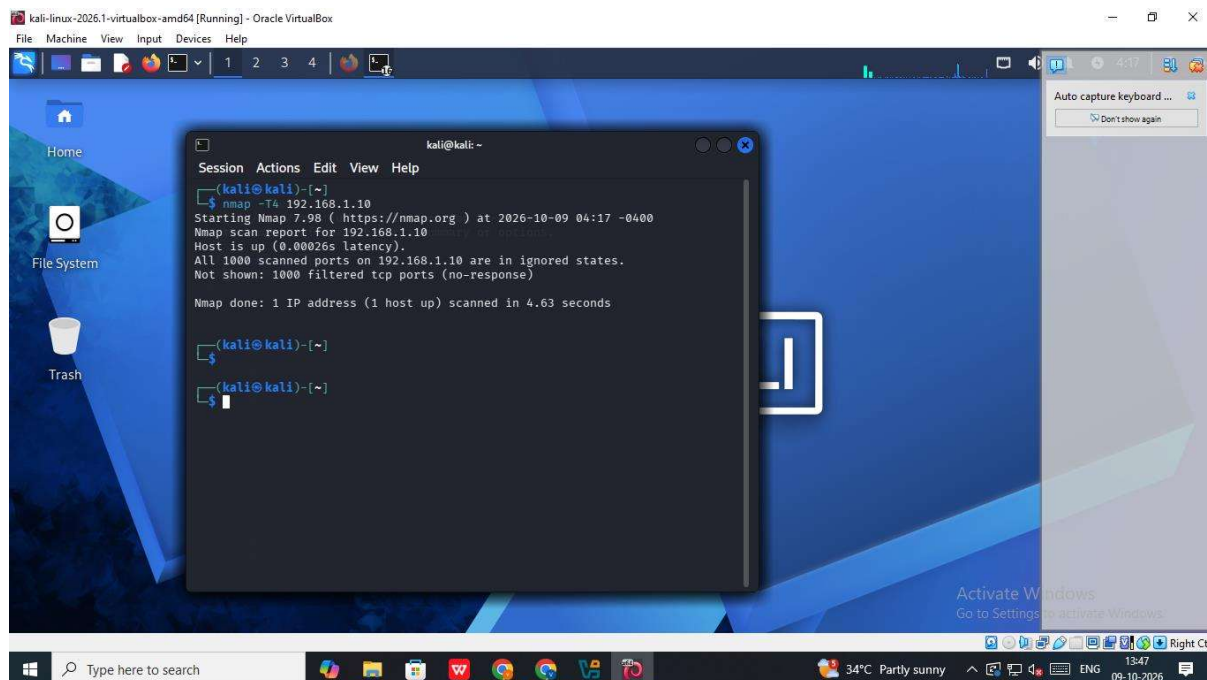


(ii) Insane speed scan

Sample Input:

```
nmap -T5 192.168.1.10
```

Sample Output (illustrative):

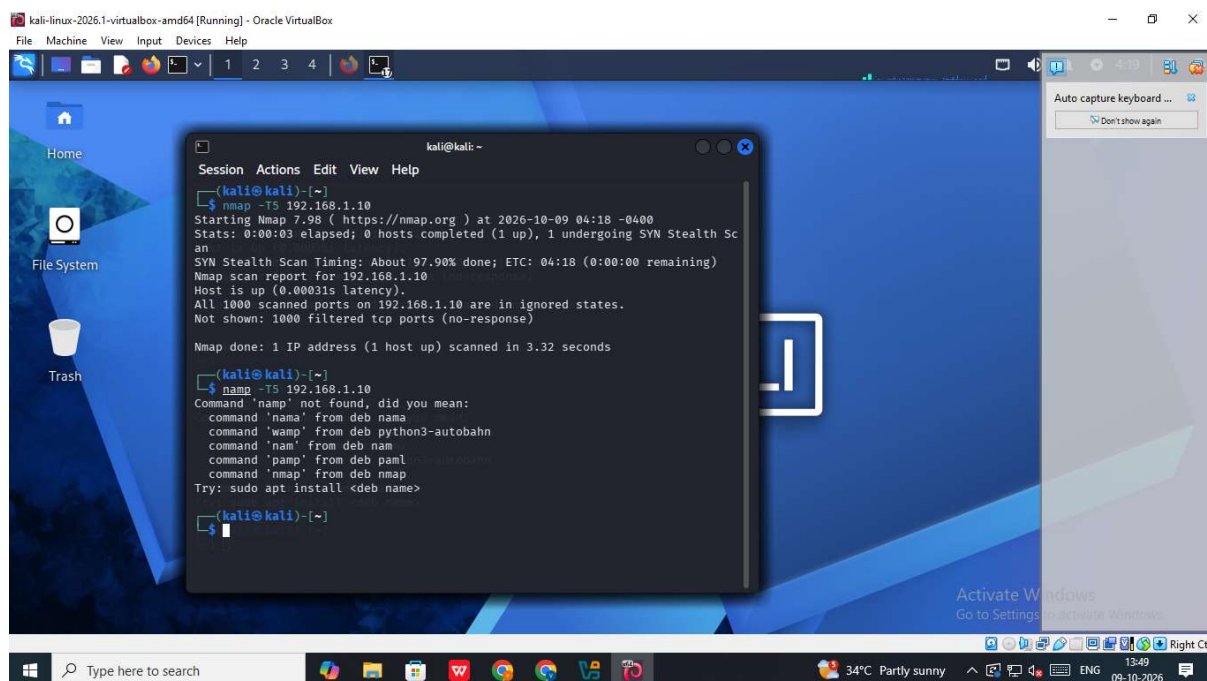

Result

The Nmap timing commands were demonstrated:

- -T4 performs an aggressive-speed scan.
- -T5 performs an insane-speed scan.

These options control scan timing and performance; they do not guarantee that every open port will be detected.