

	Feature Guide – Interfaces
Product Version	DocuTrack 6.6.SP4
Document Summary	This guide contains minimal reference information to configure and troubleshoot our interfaces. Where applicable, the details include: ▪ Version History (when interface was added or changed) ▪ Configuration instructions ▪ Design highlights (how it works) ▪ Usage highlights ▪ Troubleshooting notes ▪ Notables (where helpful)
Audience	Client Services (primarily FEs)
Key	Highlighted text = Reflects document content updated for this release.

Contents

Feature Guide – Interfaces	1
General Information	3
Direct ID	3
DeliveryTrack	3
Document Transmission Interfaces.....	4
General – All document transmission providers.....	4
General – DIRECT and EtherFAX only	4
DIRECT (DSM) Settings.....	4
EasyLink Server Interface	5
EtherFax Interface	7
FaxCore Interface.....	9
FACSys Fax Server Interface.....	10
Generic Email Fax Server Interface	11
RightFax Server Interface.....	11
WeFax Server Interface.....	13
Logix Interface.....	14
Pharmacy Information Systems	15
Allcare Interface.....	15
Charisma Interface	15
CIPS Interface	16
Compounder Rx Interface	16
Computer-Rx WinRx Interface.....	18
CPR+ Interface	18
Diamond Interface	19
Digital Rx Interface	19
Direct Connect Interface.....	20
Document Number Insert Interface	20
FileReader Service	21
FrameworkLTC Interface.....	21
FRED Dispense and FRED Pak Interface.....	24

FSI Interface	24
HBS Interface	25
HCC Interface.....	27
Medicine on Time Interface	27
Nextra Interface	28
Oasis Interface	28
Payless / OnDocumentChange Interface	31
PDX Interface	31
PharMerica Interface	32
PPC Interface	32
Prodigy Interface	33
QS/1 Interface (PC)	33
QS/1 Interface (NRx)	41
RESCOT Interface.....	42
RNA Interface	43
RNA TRIAD Interface	44
RX30 and RX30 DOS Interfaces.....	44
Smart Pharmacy Interface.....	45
Standard Input Interface	45
TIMS Interface	46
WHS Interface	46
Non-Pharmacy Information System	46
eMAR Interface.....	46
Appendix A – Failed Fax Notification Examples	48
All fax providers except FaxCore and EtherFAX.....	48
EtherFAX Failed Fax Notification	48
FaxCore Failed Fax Notification	48
Appendix B – FACSys Settings Illustrations	49
Appendix C – Fax System Diagram	50
Appendix D - Form Fill In Fields (transmitted from Pharmacy Information System).....	51

General Information

Version History for Direct Connect

5.3.0 – See also the DocuTrack Direct Connect Interface Services.pdf for detailed Direct Connect 5.0.3 instructions.

5.5.0 – Added the ability to LoadDocumentList with an entity's alternate ID.

5.6.0 – Additional Association Macro buttons are supported.

When configuring an interface in DocuTrack Business Unit, workstations must logoff and back on to use the new settings.

Troubleshooting - For customers using dual (FrameworkLTC and QS/1 PIS), if their FWLTC RX barcodes are 8 characters in length and the pharmacy uses the Rx number for FWLTC barcodes (instead of the Patients Initials + Reorder # (JJ4213), barcode recognition may recognize the Rx barcode as QS/1 rather than FWLTC. Please contact Development for steps to configure priority of barcode recognition.

Screen Scraping Notes - It has been reported that the *Microsoft Visual C++ Redistributable Package* may be required for screen scraping. It can be downloaded from [\\twteety\dfs\Products\DocuTrack\X.X.X\Prerequisites\Microsoft Visual C++ 2008 Redistributable Package \(x86 and x64\)](http://twteety\dfs\Products\DocuTrack\X.X.X\Prerequisites\Microsoft Visual C++ 2008 Redistributable Package (x86 and x64))

Store Routing Rules - In 5.4.0, Store Routing Rules will be enabled for all store-aware interfaces. These interfaces are PharMerica, Prodigy, QS/1 and FrameworkLTC. Store routing allows for non-store-aware barcodes to be routed to the correct store-aware interface.

Direct ID

Version History

5.1.2 New Feature

5.3.0 Add logging to the history dialog for documents that were saved using this feature

Direct ID uses hardware identification devices, commonly referred to as badge readers, to automatically limit who can save changes to documents in DocuTrack. When enabled, an update-user must have their badge, in or near the badge reader on their workstation to save.

Configuration

- License the Direct ID Module in the System Maintenance (available to Global admins Only) selecting PcProx device
- Connect PcProx device to each workstation that will be used by update-users. The cards for this reader must always be right next to the badge reader to work.
- Log in as an administrator on each workstation with a badge reader.
- Navigate to the Users Workspace, select the user for the badge from the list of users and click ACQUIRE ID.
- Hold each user's badge next to the reader.
- Ensure an entry is inserted into the textbox.
- Save the user record and then give the badge to the user.

DeliveryTrack

Version History

5.0.0 Continued support.

6.4.0 Query Entity on Manifest for InsertDocument

Delivery Track product has implemented Direct Connect calls to communicate with DocuTrack. The Delivery Track Report service calls *InsertDocument* (DirectConnectExecute). DeliveryTrack can also call *QueryEntity* to get additional Prescription or Manifest data.

Notables

- No configuration required within DocuTrack. See DeliveryTrack documentation for information on Delivery Track application/server configuration.
- InsertDocument supports Query Entity of Manifests (previously only supported for prescriptions). The query entity request (which includes the DocumentID) will be sent to the Pharmacy Information System. When the Pharmacy Information System responds, DocuTrack will ignore all results (Prescriptions, Facilities, Patients, etc...). DocuTrack will only associate the Manifest value and any entity values that were sent with the DeliveryTrack InsertDocument Association xml.

Document Transmission Interfaces

General – All document transmission providers

Version History

6.6.2 NEW

- The fax service has been updated to no longer use the service host service and enhanced logging. Any configuration changes will require the fax service to be restarted. Clients will require re-login.
 - Restart the Fax Service with any configuration change.
 - Any client logged in will require logoff and login for configuration updates to be effective.
 - Restarting the Host Service is no longer required for configuration changes.

General – DIRECT and EtherFAX only

Version History

6.6.2 NEW

Notable

- DIRECT functions in a FARM environment using Fax Services on multiple Application Servers. For more information see 'Installation and Upgrade Guide > Multiple Server Installs'.

Registry setting

- EtherFAX and DIRECT both require updated TLS 1.1 and 1.2 support.
 - Run the below script from CMD Window as Administrator then reboot server:
 - reg add HKLM\SOFTWARE\Microsoft\.NETFramework\v4.0.30319 /v SchUseStrongCrypto /t REG_DWORD /d 1 /reg:32
 - reg add HKLM\SOFTWARE\Microsoft\.NETFramework\v4.0.30319 /v SchUseStrongCrypto /t REG_DWORD /d 1 /reg:64
 - This is required for all application servers if using a FARM environment

DIRECT (DSM) Settings

Version History

6.6.2 NEW – provider supported: SES Connect.

HL7 (Health Level 7) refers to a set of international standards for transfer of clinical and administrative data between software applications used by various healthcare providers. DIRECT provides healthcare professionals the ability to communicate securely with their colleagues and patients while maintaining HIPAA compliance when sending and receiving encrypted health information via email.

Notable

- More information pertaining to this new feature can be found in the "WHITE PAPER - SES Connect HL7 DIRECT.DOCX" located in the release folder documentation under 'Dev Docs (Internal Only)'
- The FROM address is used to verify status and is required to send a message

Configuration

How to install a Certificate on a server for Direct:

NOTE: A Certificate must be installed before it can be selected during the configuration of the DIRECT email address it is tied to.

1. Copy certificate locally
2. Start > Run > Type "mmc" to open the Console Root
3. File > Add/Remove Snap in > Select Certificates and Add
4. Snap-in will always manage certificate for "Computer Account" >Next > Finish > OK
5. The Console Root opens > Personal > Certificate
6. Right Click > All Tasks > Import > Click Next
7. Browse for the PFX file location it was copied to and select > Next
8. Enter the password > Next > Next > Finish

Setup DIRECT

1. Log into DocuTrack
2. Apply product license key that has enabled the DIRECT Interface (note – this is HL7 Direct Interface option).

3. Open System Maintenance and select the DIRECT Settings panel
4. Enter the Server address for the connection to SESConnect:
<https://messaging.directaddress.net/HISP/SecureIntegrationServicesImap.svc>
5. Add the DIRECT addresses to use and then select the Authentication Certificate that will manage that address. Repeat until all addresses are entered.
 - a. Validation of the DIRECT address will allow ANYTHING to be used as an email except two '@' signs in one email address.
 - b. The DIRECT panel in System Maintenance allows user to enter multiple email addresses per row but only single addresses per row will be used.
 - c. Save
6. Select address(s) for the Group and/or Business Unit(s) that will appear for the default address when a user is transmitting a document.
7. Addresses can also be added to sources for Contact Methods if known.
8. Review Fax Service Log for success or failures.

Send a DIRECT Document

1. To send a document
2. Open the Document Workspace
3. Select the document to transmit
4. Pop-up Notes are not displayed on sent documents. They will contain a small Notes Icon only.
5. Forms that have been sent out are not editable (outside of DocuTrack).
6. Select the Send Document Icon to open the dialog
7. FROM Address –
 - i. The 'From' address will display addresses that were selected in the Groups workspace as Primary and the BU workspace as Secondary.
 - ii. Selections will be displayed alpha per grouping.
 - iii. Duplicate addresses are not shown even if in they are from different workspaces
 - iv. Only one 'From' address can be selected but an address MUST appear or the message will fail.
8. If an address was added to the source for the selected document it will be displayed in the To textbox. The user may manually enter an address or select an address from the address finder using the search icon.
9. No cover page is attached but information may be entered in the Attn: Subj: and/or Message: textboxes for transmission with the selected document.
10. The "Fax cover page" drop down is never enabled for DIRECT. The Message text boxes will become enabled once a valid address is entered or retrieved in the "To:" text box.
11. When a document is sent that will likely be returned with clarification or additional information, user should add a routing barcode. Upon return the sent document will be stapled to the original document.
12. The whole document can be transmitted or specific pages.
13. Select the Send button.
14. For more information concerning the Send Document Dialog See the Send Document Dialog in the Core Feature Guide for this release.

FaxServerConfiguration Table:

- **HL7Direct.CheckFrequency** – 30 - The frequency, in seconds, to retrieve updates from the HL7 Direct secure exchange server.
- **HL7Direct.Enabled** – 1 - 1 - enabled (Will always be enabled. Must be licensed.)
- **HL7Direct.MissingMessageExpression** - no message for message uid - The DIRECT message received when a message is no longer available.
- **HL7Direct.RetryInterval** – 15 - The number of seconds to wait before retrying a send request when a communication error is received.
- **HL7Direct.ServerAddress** – (URL removed from here and placed in context above)- The HL7 Direct secure exchange server address.
- **HL7Direct.StatusPollingInterval** – 30 - The frequency, in seconds, to check message statuses from the HL7 Direct secure exchange server.
- **HL7Direct.StatusSuccessExpression** - ^sent\$|^accepted\$|^confirmed\$ - The DIRECT successful message status expression.

EasyLink Server Interface

Version History

- 5.1.2 Added ability to Fax with EasyLink
- 5.3.0 Changes to UI
- 5.3.1 Change to Error report – All detail is now available on error report

The EasyLink fax system uses SSL Web Service to move documents to and from DocuTrack. In essence, EasyLink and DocuTrack transfer inbound/outbound documents via internet and the external inbound/outbound fax functions are handled on the EasyLink side.

Notable

- In the event that a fax is unable to be delivered, EasyLink will send a report to the Error Reporting URL. This report is parsed and a fax error document is created then inserted into DocuTrack.
 - a. This will be auto-routed to the original documents business unit.
 - b. The parsed data is information that we set for the outgoing fax that is being returned to us from EasyLink in the form of an error report. The EasyLink API field mapping to DocuTrack data is dynamic as the user can now specify what to use as the billing code via our System Maintenance workspace.
- The start window date/time is specified in the FaxServerConfiguration database and for new installs will be populated the “UTC Now” the first time a user views the System Maintenance workspace. For conversions or upgrades from older versions of DocuTrack this value will be converted from the database server timezone to be UTC.
- Website and External Ports are for pushing only. Push meaning EasyLink pushing the faxes to us as opposed to us polling them.
- EML and PNG are not acceptable file types at the EasyLink website.
- Incoming Faxes and Outgoing faxes must be in a .tif or .mtif format.
- If more information is needed it can be found in the White Paper.
- If the Business Unit, department or User name contains more than 20 characters each the error report will display it truncated. This is a limitation from EasyLink.
- Warning may appear in the log when faxes are retrieved by Polling and the Fax Service hands off the fax but DocImport has not completed processing of it. The log entry clearly states that the fax “has not yet been fully processed into document import.” This warning will normally not be repeated and is strictly a timing issue meaning DocImport needed more time.

Configuration

The following information will be in the database but not exposed in DocuTrack's System Maintenance workspace. Default values are listed below.

- **Error Reporting URL** = The URL for error notifications
<https://%PremiereGlobal.PublicAddress%:%PremiereGlobal.PublicPort%/faxing/easylink>
- **EasyLink Maximum Retry Period**: 30 Seconds = The maximum retry time after which EasyLink will no longer attempt to send a failed fax.
- **Polling Window Start Time** = The polling window start time for the next polling interval. This value is updated continually by the system and must be in UTC time.
- **Receiver URL**: <https://localhost:%PremiereGlobal.ReceiverPort%/faxing/easylink> The end point address for the in-bound fax receiver.
- **Traversal Level**: 0 = This tells us at what mailbox level to start checking. This defaults to 0 and should probably never change however EasyLink was uncertain enough about what this value should be that we have made it configurable just in case.

The following is in the database and in DocuTrack's System Maintenance workspace under EasyLink.

- **ServerUrl**: <https://messaging.easylink.com/soap/sync> = EasyLink's server URL for outbound faxes. Use the above URL as the default.
- **Internal receiver port**: (Example: 8013) = This is DocuTrack's internal port to listen for faxes from EasyLink. NOTE: This port will have to be mapped by the customer's IT group. Be careful when selecting a port as other services are actively using ports in the 8001 – 8011 range.
- **Public address** (Example: office2.integratgroup.com) = The address for DocuTrack's external reporting URL. This URL must be accessible by EasyLink's fax servers. This is used as a token replacement for the Error Reporting URL.
- **Public port** (Example: 4414) = The port for DocuTrack's external reporting URL. This URL must be accessible by EasyLink's fax servers. This is used as a token replacement for the Error Reporting URL. Note: This port will have to be mapped by the customer's IT group.
- **Polling server** = This designates which server (if multiple DocuTrack servers are handling incoming faxes) will handle polling EasyLink for failed faxes. This must be the server name.

- **Polling interval:** 15 (default) The polling interval to check the fax server for new faxes. Polling for inbound faxes is considered a backup mechanism and therefore the minimum allowed polling interval is 10 minutes.
- **Inbound group ID** = The inbound group ID is used to retrieve faxes across multiple DNIS numbers when EasyLink was unable to push the received faxes to this interface.
- **Inbound user ID** = The user name for logging into the fax server to poll for orphaned faxes.
- **Inbound password** = The user password for logging into the fax server to poll for orphaned faxes.
- **Outbound user ID** = The user name for logging into the fax server to send outbound faxes.
- **Outbound password** = The user password for logging into the fax server to send outbound faxes.

Security

NOTE: By default the system will install with https but can be changed to HTTP by making the following changes.

To configure for use with HTTP:

1. Manually update the FaxServerConfiguration table to contain the following for EasyLink:
2. Set PremiereGlobal.ErrorReportingUrl to have a value of <http://%PremiereGlobal.PublicAddress%:%PremiereGlobal.PublicPort%/faxing/easylink>
3. Set PremiereGlobal.ReceiverUrl to have a value of <http://localhost:%PremiereGlobal.ReceiverPort%/faxing/easylink>
4. NOTE: Error Reporting will BREAK if either of these end in a /.
5. Manually edit IS.OMS.Faxing.FaxService.exe.config file Integra\DocuTrack\bin to comment out the security mode as shown below.

```
<binding name="inboundBinding" sendTimeout="00:10:00" maxBufferSize="2147483647"
maxBufferPoolSize="2147483647" maxReceivedMessageSize="2147483647">
  <readerQuotas maxStringLength="2147483647" maxArrayLength="2147483647" />
  <!-- <security mode="Transport" /> -->
</binding>
```

Error Reporting

- A 'Failed Fax Notification' is processed when an outbound fax fails to be sent. The error document will look something like Appendix A – Failed Fax Notification Example.
- When a fax fails to be sent out it is placed in a User Failed Faxes folder that can be monitored with alerts.
- The Fax Server Error notification will contain specific Business Unit Routing Information that allows it to bypass global routing rules. If there is no Business Unit ID, then all standard routing rules apply.

EtherFax Interface

Version History

- 5.5.0 Interface created
- 5.6.0 Audits updated to include final status
- 6.1.0 E.164 standards (international phone number formats) implemented
- 6.4.0 Retry default changed to 10 from 5
- 6.6.0 Updates to FaxServerConfiguration for NoChannelsAvailableRetryInterval
One-time cleanup script to remove any orphaned entries in DocumentFaxStatuses tables
- 6.6.2 Security change to TLS 1.1 and 1.2 as a requirement for etherFAX software.
EtherFAX REST 2.0 API
Status update added for 'Queued'. This status will be updated to 'Pending' faxing begins.
- 6.6.3 Patch 2 will add seed data to populate <https://na.connect.etherfax.net/rest/2.0/ap>

The EtherFax interface and fax system will support sending and receiving faxes through EtherFax's URL. DocuTrack will poll the EtherFAX Server for new faxes and import them through its document import process.

Notables

- EtherFAX will function in a FARM environment using Fax Services on multiple Application Servers. For more information see 'Installation and Upgrade Guide' or 'White Paper – EtherFAX.docx'.
 - EtherFAX REST 2.0 API implemented to support the new function 'getnext'. The polling process now downloads the next unread fax (if one is available). It no longer pulls a list of faxes. The batch size configuration setting has been removed. The implementation is designed for multi-process environments that attempt to receive a fax using the same account.
 - To resolve contention, only one peer may gain access to an unread fax at a time. If the peer fails to download the fax and mark it received within a 5-minute window, the automatic lock on the fax is released and another peer may download the unread fax.

- Once the interface for EtherFax is licensed a new folder called PendingFaxes is created under D:\DocuTrack\Documents\System\FaxProcessing\UserFaxes. This is not used for any other interface at this time and is not removed when EtherFax is unlicensed.
- EtherFax has requested we submit a CallerID on all outgoing faxes. Every fax's metadata that is sent out will contain a Caller ID of up to 10 digits. This number is setup in the FaxServerConfiguration table. It is not the default fax number located in AdminTab\BusinessUnit\FaxOptions.
- Due to restrictions from EtherFax please limit Business Unit name field to 32 characters.
- Routing of inbound documents can be accomplished using the CSID, DNIS or ANI numbers obtained from EtherFax meta-data when a fax is received by the faxing service. This data is mapped to the Document Import routing values.
- For sending document instructions through the UI, see "Send Document Dialog" in the Core Feature Guide.
- All outgoing faxes will be audited twice in the History Dialog
 - The user that created the fax generates an audit that will include the Document Fax Status ID for each fax, processed per phone number.
 - Example if fax is sent to 5 phone numbers there will be 5 outgoing audits.
 - When the fax is complete and a status is determined from the fax provider, a Status Audit is generated by EtherFax user that will include the Document Fax Status ID and the completed status of Failed, Success or Expired for each fax processed per phone number.
- When a fax fails to be sent out two things can happen:
 - The Failed fax is placed in a User Failed Faxes folder that can be monitored with alerts.
 - A 'Failed Fax Notification' is processed through Document Import; if the customer has it selected in the EtherFax interface.
 - The notification contains Business Unit ID allowing it to bypass global routing rules.
 - If there is no Business Unit ID, then all standard routing rules apply.
- NOTIFICATIONS: There is an option to receive Success and/or Failure notifications that are generated when a fax complete status is received from EtherFax.
 - All Notifications will show Client Time/Business Unit time not Server or UTC Time.
 - If the "Success Notification" is checked then a "Success source ID" must be created.
 - The notifications source ID can contain up to 255 characters and use a template that is located in: D:\DocuTrack\BusinessUnits\Global\Templates.
- DocuTrack Upgrades will replace the templates during upgrade. If a User/Customer alters this template it will need to be renamed before upgrade or replaced after upgrade. If Fax Forward is selected for a source and the EtherFax interface is set to use "Success" notification the source will receive a success notification for every Fax Forward sent out. This can in some situations cause faxes to be continuously sent out.

Configuration

Primary URL: If licensed in 6.6.1, 6.6.2 upgrade will update the old value to:	https://na.connect.etherfax.net/rest/2.0/api
Account:	Contact EtherFax
Fax Service Username:	Contact EtherFax
Fax Service User Password:	Contact EtherFax
Caller ID:	Customer choice
Success source ID:	Customer choice or Success
Failed source ID:	Customer choice or Failure

- **EnterpriseConfiguration** - The background task for removing aged faxes from the DocumentFaxStatuses table is found in the BackgroundTask table labeled: "Cleanup.DocumentFaxStatuses.Data". To configure this task use the EnterpriseConfiguration table entries listed below:
 - **BackgroundTask.DocumentFaxStatusCleanupLatency** 90(Default) Background Tasks will delete DocumentFaxStatuses rows that are older than this number of days.

- **BackgroundTask.DocumentFaxStatusExpirationLatency** 10(Default) Background Tasks will expire in-process DocumentFaxStatuses rows that are older than this number of days.
- **DocumentFaxStatuses** table can be reviewed for each fax sent but is cleared as soon as a the Fax Provider sends a status of Success, Failed or Expired.
- **FaxServerConfiguration** table contain several settings for etherFAX that are not in the Interface workspace.
 - **EtherFax.MaximumNumberOfFaxStatuses** – 25 (Default) - Limits the number of fax statuses returned at one time from the DocumentFaxStatuses table. This value is used by the FAXINGGetDocumentFaxesByStatus stored proc.
 - **EtherFax.SentFaxStatusRetryExpressions** - Retry expressions for fax statuses returned from EtherFax when EtherFax fails to process the fax. These can be changed at any time. Some are returned from EtherFax automatically and are set to retry to improve the message received:
 - **EtherFax.RetryCount** - 10
 - **EtherFax.RetryInterval** – 120 (Default) - Number of seconds to wait before attempting to retry a failed fax.
 - **EtherFax.CallerId** - BLANK - The caller id for the fax request.
 - **EtherFax.ThreadCount** – 3 - The number of threads used when attempting to check and retry sending faxes in the event of a fax failure..
 - **REMOVED - EtherFax.InboundFaxBatchSize** - 500 - The number of unread faxes returned by EtherFax and imported one at a time. 0 - unlimited.
 - **EtherFax.HTTPStatusRetryCodes** - 401,407,408,409,410,502,503,504 - Retry HTTP status codes for all web requests to EtherFax.
 - **EtherFax.CreateAuditAfterGettingDocumentFaxStatusId** - 1 - 1 - Audit will be created after we have received a unique document fax status id. 0 - audit will be created prior to receiving unique document fax status id.
 - **EtherFax.NoChannelsAvailableRetryInterval** - 60 The number of seconds to wait before retrying a fax request when a No Channels Available response is received.

FaxCore Interface

Version History

- 5.2.1 New
- 5.4.0 Enabled successful/failed fax notification
- 5.6.0 Audits updated to include final status
- 6.3.0 Added configurable timeout entry in DB
- 6.6.2 Status update added for 'Queued'. This status will be updated to 'Pending' faxing begins.

The FaxCore fax system uses SSL Web Service to move documents to and from DocuTrack. In essence, FaxCore and DocuTrack transfer inbound/outbound documents via internet and the external inbound/outbound fax functions are handled on the FaxCore side. (FaxCore Version 6.1.27.39480 as of 6/2017)

Configuration

The following information will be in DocuTrack's System Maintenance workspace.

- Server Name - FaxCore server name cannot be left blank.
- Server Port - FaxCore web services will be listening on this port.
- Connection Type – HTTP
- Inbound fax folder – The FaxCore User's Inbox where inbound faxes have been routed to; defaulting to "Inbox".
- Failed Fax Folder - FaxCore User's Inbox, where failed outbound faxes have been routed; defaulting to "Failed".
- Outbound billing code – Billing choices are Document's department name or the Business Unit (default)
- Inbound Polling interval - FaxCore polling interval is formatted between 1 and 1440 minutes
- User ID and Password - FaxCore user ID and password.

The below entries are found in the FaxServerConfiguration table, any change to this table requires a restart of the Fax Service.

- **FaxCore.MaximumRetryPeriod** 30 The maximum retry time after which the FaxCore interface will no longer attempt to send a failed fax.
- **FaxCore.CreateAuditAfterGettingDocumentFaxStatusId** 1 1 - Audit will be created after we have received a unique document fax status id. 0 - audit will be created prior to receiving unique document fax status id.
- **FaxCore.OutboundPollingInterval** 1 The polling interval (in minutes) used while checking the status of outbound faxes. Must be greater than or equal to 1.

- **FaxCore.MaximumNumberOfFaxStatuses** 25 Limits the number of fax statuses returned at one time from the DocumentFaxStatuses table. This value is used by the FAXINGGetDocumentFaxesByStatus stored proc.
- **FaxCore.TerminalMessageStatuses** ^Completed\$|^Failed\$|^Blocked\$|^Disapproved\$|^Cancelled\$|^Rendering Failed\$|^Partial Failed\$|^No Permission\$|^No Permission\$|^Forced To Stop By Agent\$|^Purged\$|^Deleted\$ FaxCore message statuses that FaxCore considers terminal in that they will no longer attempt to resend a fax once it has received one of these statuses.
- **FaxCore.RequestTimeout** 500 The number of seconds the web service request will wait before timing out. Must be greater than or equal to 100.

Notables

- For more information see “Send Document Dialog” in the Core Feature Guide.
- Routing of inbound documents can be accomplished using the CSID, DNIS or ANI numbers obtained from FaxCore meta-data when a fax is received by the faxing service. This data is mapped to the Document Import routing values.
- All outgoing faxes will be audited twice in the History Dialog
 - The user that created the fax generates an audit that will include the Document Fax Status ID for each fax, processed per phone number.
 - Example if fax is sent to 5 phone numbers there will be 5 outgoing audits.
 - When the fax is complete and a status is determined from the fax provider, a Status Audit is generated by FaxCore user that will include the Document Fax Status ID and the completed status of Failed, Success or Expired for each fax processed per phone number.
- Inbound faxes are searchable within DocuTrack by using the UniqueID or MessageID used by FaxCore. This number can be located in View Details section of FaxCore API. Example UniqueID: FaxCoreID208100015120
- When a fax fails to be sent out two things can happen:
 - The failed fax is placed in a User Failed Faxes folder that can be monitored with alerts.
 - When an out-bound fax fails to be delivered an error report will be imported into DocuTrack.
 - The error report will be created from the “FaxCoreFailedFaxNotification.pdf” form found in the data store under D:\DocuTrack\BusinessUnits\Global\Templates\
 - DocuTrack Upgrades will replace the templates during upgrade. If a User/Customer alters this template it will need to be renamed before upgrade or replaced after upgrade.
 - The Error Document Details section will contain the following information:
 - The fax message ID, the document number of the out-bound document, the department associated with the out-bound fax document, the user requesting that the document be faxed and some additional detail about why the faxed failed to be delivered.
 - The Error notification will contain specific Business Unit Routing Information that allows it to bypass global routing rules. If there is no Business Unit ID, then all standard routing rules apply.

FACSys Fax Server Interface

Version History

6.6.1 Rendering setting added to database

FACSys configuration can be found in System Maintenance.

Notable

- A setting has been added to allow outbound faxing to use the same rendering engine as the routing barcode to flatten the document. The setting is FaxServerConfiguration::Faxing.OutboundRenderType. This setting is off by default. A Fax Service restart is required when changing this setting.
- If the facility wants to be able to use checkboxes in their faxes the FACSys server will need Ghostscript loaded. This is the same as for 4.6. Review Appendix B – FACSys Settings Illustration.

Configuration

- The following is in DocuTrack’s System Maintenance workspace.
 - Server Name
 - User ID
 - Password
 - Error email address

- DocuTrack will not be able to use cover pages from FACSys server. All Cover Pages are placed in the Business Unit Folders. (See Core Feature Guide for information on Cover Pages)
- New installation of FACSys 5.1 requires Fxmsg32.dll to be registered. This will be needed if upgrading from 4.9.
- Fax Server Error Notification Email - FACSys provides four user variables that can be populated on an outbound fax. If an outbound fax fails, these user variables are added to the fax-error-notification sent back to DocuTrack, and can be used for routing purposes. Business Unit ID in-particular is needed by Doc Import so Global Routing rules can be based on it.

FACSys User defined settings:

- Field 1: Business Unit ID - Document Number
- Field 2: DocuTrack User Name
- Field 3: Document's Department name
- Field 4: Document ID (Global)

Error Reporting

- A 'Failed Fax Notification' is processed when an outbound fax fails to be sent.
- When a fax fails to be sent out it is placed in a User Failed Faxes folder that can be monitored with alerts.
- The Fax Server Error notification will contain specific Business Unit Routing Information that allows it to bypass global routing rules. If there is no Business Unit ID, then all standard routing rules apply.

Generic Email Fax Server Interface

Version History

- 5.4.0 Added new tokens
- 5.6.0 Department Name added as a replaceable token for email subject and body

Generic EmailFaxOut uses SMTP to fax out documents.

Configuration

- Supported replaceable parameters for email subject and body templates are:

%SITE_NAME%
 %SITE_ID%
 %USER_NAME%
 %USER_ID%
 %SYS_TIME%
 %DOC_ID%
 %SOURCE_NAME%
 %SOURCE_FAX_NUMBER%
 %DEPARTMENT_NAME%

- There is no validation for entries for "Email to address or domain" but it is a required field.
- Some facilities may have a designated email account used for Faxing.
 - This would be setup by entering the fully qualified account in the "Email to address or domain".
 - EX: UserName@IntegraGroup.com
 - Users fax to phone numbers, they select in the Send Document Dialog, that have been setup correctly for the exchange server to use as a email address.
 - The phone number or string of phone numbers is then placed in the 'To' line of the fax.
 - The exchange correctly forwards to each phone number.

Notables

- All documents will be rotated to portrait orientation.
- Forms will no longer be editable.
- Fax copies will contain a small Notes Icon only for any PopUp notes.

RightFax Server Interface

Version History

- 5.1.0 Support for RightFax v.10 added
- 5.1.8 Supports multiple fax numbers
- 5.3.0 Support for RightFax v.10.5 added (Tested on RightFax V 10.5, Feature Pack 1, Service Release 3).
- 5.4.0 Support added for DNIS (Tested on RightFax V 10.5, Feature Pack 1, Service Release 3).
- 5.4.3 Support now for RightFax V 10.6, Feature Pack 0, Service Release 2001

- 5.9.0 Support now for RightFax V 10.6, Feature Pack 1, Service Release 753
- 6.4.0 Support of multiple domains


Notable

- The Fax Service log includes the domain of the user attempting to fax out (for validation when multiple domains are used).
- RightFax offers the ability to process DNIS from the new Routing Code property. If it can't, or it is blank, it will try to get it from the DID Number property used in prior versions of DocuTrack.
- Users with FaxOut permission but without Active Directory credentials or users not setup in RightFax can hit send on the FaxOut Dialog in DocuTrack; however, an error will be logged in the fax service log that no corresponding account was found in RightFax. Fax will not be sent.

Setup

- Install RightFax Utility – An administrator from each site will have to provide this installer.
- License and configure Active Directory - The account with which the end user logs into DocuTrack MUST be an active directory user that is also setup in RightFax as an AD account. This is the “security” check in RightFax to ensure only authorized users are able to fax out.

User Edit screen in RightFax:

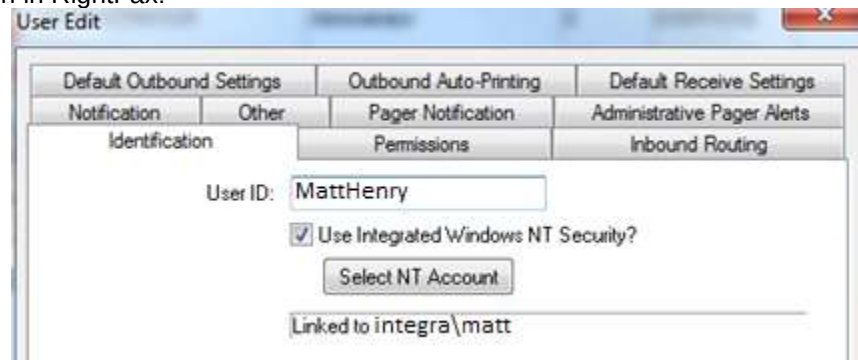

- License RightFax Interface
- Server Name = The name or IP address of the RightFax server
- User ID and password = The user name and password entered in the DocuTrack System Maintenance workspace is the “master” account used for opening a connection to the RightFax server. This user must have permissions within RightFax to emulate the other users and their permission settings. (Super User) This is usually a local administrator and therefore cannot be an Active Directory User. These credentials will also be used by Document Import for sending outbound fax notifications.
 - Error email address = An email address to which notifications of failed fax out attempts will be sent. Conversion will default this value to 'FaxError@DocuTrack'.
 - Check for new faxes to process every ## seconds = A configurable value that will check for new faxes more frequently with the current outbound fax status.
 - Update RightFax with document every ## seconds = A configurable value that will check/update RightFax less or more frequently with the current inbound fax status.
- For outbound faxing and PDF processing:
 - Make sure the PDF Module is licensed on the RightFax server by going to the Start Menu->All Programs->Open Text->Product Licensing Utility. Expand the Product Features section and look for Fax Server Connector PDF Module. This must be activated for PDFs to be faxed out.
 - Configure the work servers to do PostScript.
 - Open the RightFax Enterprise Fax manager.
 - Select the server name from the list on the left.
 - See a list of services in the lower right pane. Among these are the RightFax Work server 1 thru 3. Right click on each of these and select configure.
 - Select PostScript from the list of Services
- Mailboxes - INBOUND:
 - The mailboxes listed in this grid are used for inbound fax processing only.
 - This grid contains information on which RightFax Users Account and folder to query.
 - These fields cannot be left blank.
 - The check for new faxes may have a folder appended after the RightFax Users name as shown in the “Angie\Manifests” example. If no folder is specified, the default Main folder will be used.

- Angie, DocuTrackIncoming and DocuTrackComplete can be used as valid RightFax Users. This account does not need to have active directory setup.
- The mailbox to place received faxes should contain the name of a valid account in RightFax. All routed faxes will be placed in the default Main folder under this user account. This account does not need to have active directory setup.

RightFax mailbox setup:

Mailbox to check for new faxes	Mailbox to place received faxes
DocuTrackIncoming	DocuTrackComplete
Angie\Manifests	DocuTrackComplete
▶	
* <add new mailbox>	

Design

- Outbound faxes will be placed in the mailbox that corresponds to the logged on DocuTrack user who sent the fax. This link is made through their active directory credentials. This means the user MUST be logged into DocuTrack using active directory in order for the send to be successful. If the domain in DocuTrack is not spelled the same as the domain in RightFax will need to update it in the ActiveDirectoryDomains SQL table in the DocuTrack database to match. Outbound faxes will be placed in that users "Main" folder in RightFax.
- Once the new fax has been added to DocuTrack, RightFax is updated with the Source Name for that specific fax.

Error Reporting

- A 'Failed Fax Notification is processed when an outbound fax fails to be sent.
- When a fax fails to be sent out it is placed in a User Failed Faxes folder that can be monitored with alerts.
- The Fax Server Error notification will contain specific Business Unit Routing Information that allows it to bypass global routing rules. If there is no Business Unit ID, then all standard routing rules apply.

WeFax Server Interface

Version History

5.4.0 Support of WEFax Interface Added

The WeFax fax system uses FTP interface to move documents to and from DocuTrack. In essence, WeFax and DocuTrack transfer inbound/outbound documents via FTP and the external inbound/outbound fax functions are handled on the WEFAX side.

Notables

- Only one DocuTrack will be supported per configuration.
- Fax out uses a JavaScript and COM.dll which are pulled in by the application and will log events in the DocuTrack.DefaultApplication.log.
- Fax out retry count must be 2. Retry count value greater than 2 will result in automatic rejection of XML by WEFAX.

Setup

In the System Maintenance Workspace, enter the WEFAX Interface license.

- Application ID = <Usually the same as User ID>
- Server Name = <WEFAX server name>
- UserId = <WEFAX should supply this name>
- Password = <WEFAX should supply this password>
- Folder configurations = Incoming, Outgoing, Error and Failed
- Polling Interval = (60 to 9999) or leave at default which is 60
- CallerID = leave default (2096696648) – this cannot be blank

Design

- Fax Incoming = WEFAX to DocuTrack
 - WEFAX will receive an incoming fax and generate a corresponding TIF/XML file pair.
 - The XML and TIF pair will be placed in the **inbound** directory.
 - DocuTrack will poll this location via standard FTP at the interval configured in the WEFAX System Maintenance workspace and import the documents into the system.

- Only matching TIF/XML pairs will be transferred by FTP. Each page of the TIF will be imported as an individual document.
- Fax Outgoing = DocuTrack to WEFAX
 - When faxing out from DocuTrack, the user will select a document, a Fax To number and an optional cover page.
 - DocuTrack takes this information, appends the cover page to the document, saves it as a PDF and creates a paired XML document with fax out information.
 - This PDF/XML file pair will be sent via FTP to the **outbound** folder on the WEFAX server.
 - For each document WEFAX successfully receives from DocuTrack, WEFAX will generate a TIF to be placed in the **outboundstatus** directory.

Error Reporting

- A 'Failed Fax Notification is processed when an outbound fax fails to be sent. The error document will look something like Appendix A – Failed Fax Notification Example.
- When a fax fails to be sent out it is placed in a User Failed Faxes folder that can be monitored with alerts.
- The Fax Server Error notification will contain specific Business Unit Routing Information that allows it to bypass global routing rules. If there is no Business Unit ID, then all standard routing rules apply.

Troubleshooting

- Review logs, messages will usually identify the issue.
- The FTP file paths are case sensitive. If transfer files cannot be found, verify the case of FTP file paths in the License Configuration table in DocuTrack server match the case of the WEFAX FTP file paths. Also, since the WEFAX User Name is part of the FTP file path, this will also impact connectivity if it has mismatched case.
- If a corrupt and/or unreadable outbound PDF file is placed in the \outbound folder of the WEFAX server, there will be no failure notification returned to the DocuTrack server in the WEFAX Interface Service log. The PDF/XML pair will be deleted from the \outbound folder. This is a known limitation of WEFAX system.
- If the XML of an outbound PDF/XML file pair is invalid (e.g. has an incorrect Username/Password), it will be rejected by WEFAX and the XML will be placed in the outbound\failed directory. This XML will be read back into DocuTrack at the next polling interval and an error will be logged.
- If for some reason WEFAX cannot successfully fax the document to its destination (note: this is a WEFAX issue at this point), WEFAX will return a TIF file with an error code (See WEFAX Error Codes section below) to the outboundstatus directory. This TIF will be transferred to DocuTrack at the next polling interval and re-imported as a new document. Appropriate warnings are logged as well.
- These are not DocuTrack errors these are WEFAX logged with the Document ID in the WEFAX log.

0	No Error
100	Busy
200	No answer
300	Cannot reach destination
400	Cannot grab line
500	Remote side hang-up
600	No fax detected
700	Error in fax transmission
800	Fax resource error
900	Cancelled by user or administrator
1000	Cancelled by the system
1100	Document conversion error
1200	System error

Logix Interface

Version History

5.6.0	1.0 version of Logix Interface
5.9.0	Pending workflow documents table added
6.4.0	No Logix version supported
6.5.0	2.0 Logix version supported only
6.6.0	2.5 Logix version supported only
6.6.2	2.6 Logix version supported only

Notable

- See Logix Installation and Upgrade Guide for any configuration information needed.
- Old and unnecessary Entity Batch Detail records related to Framework will be removed during upgrade. This will allow more accurate Logix and Form Fill in activity.
- DocuTrack API SendFax method has been updated to accept a range of pages using the parameter 'Pages' in the request data object.
- Incoming documents that launch Logix processes, will wait till all pending associations are made before launching the related process.

Pharmacy Information Systems

Allcare Interface

Version History

4.6.4 – Support added

6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions: Unknown

Associations: Uses the Direct Connect Web Service. Unsure which entities supported.

Barcodes: Manifest and Rx
Barcode recognition will add an RX association, no Query Entity

Refill Submissions: No

Quick Load: No

Delivery Manifests: No FileReader, barcode recognition only.

Enterprise: No

Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Request that customer contact Allcare for Direct Connect webservice user name, password and URL information. Select Allcare in the Interface Options workspace.

- Enter the user name, password and URL data.

Charisma Interface

Version History

5.4.2 – Support added to 5.x product

6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions: Unknown

Associations: Uses the keyboard wedge

Barcodes: Rx
Barcode recognition will add an RX association, no Query Entity

Refill Submissions: No

Quick Load: No

Delivery Manifests: No

Enterprise: No

Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Select Charisma and the corresponding keyboard configuration in the Interface Options workspace.

If the customer will be using Prescription barcodes, select the "Prescriptions" barcode checkbox.

If association macro buttons will be used by the customer (Logix), configure these using the Document Association Macro Buttons dialog.

Troubleshooting

When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

Hot Keys

ALT + I	Brings up the interface information screen.
CTRL + F7	Creates an association in DocuTrack.
CTRL + Q	Lists all documents associated with the prescription in the Interface Search tab.

CIPS Interface

Version History

- 5.1.2 – Support added to 5.x product
- 5.1.4 – Additional barcode evaluation support added
- 5.1.6 – Support added for web interface in System Maintenance workspace
- 6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions:	Unknown
Associations:	Uses the keyboard wedge and WebDirectConnect Quick Add allows user to “Search” the CIPS Interface
Barcodes:	Rx Barcode recognition will Query Entity the Interface
Refill Submissions:	Supported in 5.1.6
Quick Load:	No
Delivery Manifests:	No
Enterprise:	No
Association Macro Buttons:	Yes (Logix)

DocuTrack Configuration

Request that customer contact CIPS for DirectConnect webservice user name, password and URL information. Select CIPS in the Interface Options workspace.

- If using DirectConnect only, select the “Do not use...”
- Complete the user name, password and URL fields.

Troubleshooting

When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

Hot Keys

CTRL + I	Brings up the interface information screen.
CTRL + A	Creates an association in DocuTrack.
CTRL + S	Lists all documents associated with the prescription in the Interface Search tab.

Compounder Rx Interface

Version History

- 5.5.1 – Added to 5.x product
- 5.5.1 (Patch) – Updated script to additionally scrape Prescription physician/prescriber data and Patient state.
- 6.0.0 – Added support for Association Macro Buttons (Logix)
- 6.5.0 (Patch) – Updated script to add patient address and phone number to custom Docutrack form.

Supported Features and Versions

PIS Versions:	Compounder Rx-PCCA-Client (4.10.8.5)
Associations:	RX and Patient associations using the keyboard wedge with UIPath
Barcodes:	No
Refill Submissions:	No
Quick Load:	No
Delivery Manifests:	No

Enterprise: Yes – Pharmacy Id must match the Pharmacy name prepended to the Compounder Window title.

Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Configure the Compounder Rx interface and select the “Default.uiwf” UIPath Workflow file from the drop down in the Interface Configuration dialog.

Troubleshooting

When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

For Single Business Unit with multiple Pharmacy ID's

- Configure a Compounder Rx interface for each pharmacy that has a unique name.
- Enter the unique pharmacy ID (Pharmacy Name) for each instance of Compounder Rx. (*Pharmacy Id must match the Pharmacy name prepended to the Compounder Window title.*)
- Choose only one instance to configure the workflow and select “Default.uiwf” file as the config file.
- Leave all other instances of the Compounder Rx workflows set to “Disable UIPath interface”.

For Multiple Business Units:

- Configure at least one instance of Compounder Rx interface for each Business Unit (for multi-Business Unit configurations, see above). Each business unit must configure a separate instance of Compounder Rx interface, with the Pharmacy Id that applies to each.
- Enter the unique pharmacy ID (Pharmacy Name) for each instance of Compounder Rx. (*Pharmacy Id must match the Pharmacy name prepended to the Compounder Window title.*)
- Choose only one instance to configure the workflow and select “Default.uiwf” file as the config file.
- Leave all other instances of the Compounder Rx workflows set to “Disable UIPath interface”.

Notables

- Windows 8+ Client OS is not supported for CompounderRx interface
- UIPath is disabled by default when first licensing “CompounderRx” interface in the Business Unit workspace.
- To view all associated fields in the association grid, add the Date Dispensed (displays State) and Physician ID (displays physician name) columns.
- Patient Associations may fail if the patient number is not displayed on the PK Software – Compounder RX screen. This may occur if the screen has been minimized resulting in the Patient Number (red number located in bottom right corner) being hidden.
- Rx Associations on the New Prescription screen will fail if the Patient First and Last name have not been entered. An error dialog alerting the user to fill in the blank patient name is displayed if the user attempts to make an association. Once the patient first/last names have been entered and a drug is selected on the “Prescribing” tab of the New Prescription screen, an association can be made.
- Rx Associations are possible from both the “Prescribing” and “Dispensing” tabs, however, Rx associations may fail on the Dispensing tab due to invalid Rx ID of “0000000”. The user must first select a drug on the Prescribing tab to populate a valid Rx ID before they can make an Rx association.
- Patient Associations will fail if the Patient full name is equal to any of the following:
 - patientFullName = "Birthdate", "Age", "S-Cap", "Patient", "Account #", "Credit card" or "Sex"
- Patient Associations on the Prescription Status screen might fail or contain incorrect information (eg., patient name could contain part of their phone number) if the patient name (first + middle + last) is particularly long, such as “MONTGOMERY WONDERGUST BETTINGHOUSE”.
 - Prescription Status screen is the only screen we scrape Patient name where the entire patient name is visible.
- The UIPath script “CompounderRx_Default.uiwf” now includes a patient address and phone number. When a form configured for the XML nodes ‘PatientInfo.Address’ and ‘PatientInfo.Phone’ is loaded in Docutrack, Patient Address and phone number will populate the form when associating from the New Rx, and Edit Rx, and patient phone will populate the form when associating from Edit Patient screen.

Hot Keys

CTRL + SHIFT + I	Brings up the interface information screen.
---------------------	---

CTRL + SHIFT + A	Creates a patient or RX association in DocuTrack. Screens supported for patient association: "Adding patient" and "Editing patient". Screens supported for RX association: "New Prescription" and "Prescription Status".
CTRL + SHIFT + S	Lists all documents in the Interface Search Tab that are associated to the RX Id or Patient Id. Screens supported for patient search: "Adding patient" and "Editing patient". Screens supported for RX search: "New Prescription" and "Prescription Status".

Computer-Rx WinRx Interface

Version History

4.4.5 – Added Computer-Rx license workspace and configuration file.

4.6.0 – Updated to "Computer-RX WinRx Interface". Added support for screen-scraping.

4.6.3 – Support added for manifest barcodes, file reader, and a different keystroke for associations (F12)

5.1.2 – Added to 5.x product

6.0.0 – Support for Association Macro Buttons (Logix) has been added

Supported Features and Versions

PIS Versions: Unknown

Associations: Uses the keyboard wedge

Delivery Manifests: File Reader processes Manifest files.
Quick Add of Delivery Manifest will associate Delivery Manifest and RX values included in the manifest file.

Barcodes: Manifest only – Barcode recognition will associate Delivery Manifest and RX values included in the manifest file.

Enterprise: No

Refill Submissions: No

Quick Load: No

Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Select Computer-RX WinRx and the corresponding keyboard configuration in the Interface Options workspace.

Troubleshooting

When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

Hot Keys

CTRL + I	Brings up the interface information screen.
F12	Creates an association in DocuTrack.
CTRL + S	Lists all documents associated with the prescription in the Interface Search tab.

CPR+ Interface

Version History

6.0.0 New

Supported Features and Versions

PIS Versions: 9.2b

Associations: RX and Patient using the keyboard wedge (UIPath)

Refill Submissions: No

Quick Load: No

Delivery Manifests: No

Enterprise: No

Barcodes: No

Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Select CPR+ and the corresponding keyboard configuration in the Interface Options workspace.

If the customer will be using Prescription barcodes, select the "Prescriptions" barcode checkbox.
If association macro buttons will be used by the customer, configure these using the Document Association Macro Buttons dialog.

Troubleshooting

When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

Hot Keys

CTRL + 9	Brings up the interface information screen.
CTRL + 1	Creates an association for Rx or Patient in DocuTrack.
CTRL + 2	Lists all documents associated with the Rx or Patient in the Interface Search tab.

Diamond Interface

Version History

5.6.0 NEW - Added support which includes manifest barcodes.
5.9.0 Added support for Rx re-order barcodes.
6.0.0 Added support for Association Macro Buttons (Logix)
6.1.0 RX barcodes will now return FWLTC data

Supported Features and Versions

PIS Versions: Unknown
Associations: No keyboard wedge
Barcodes: RXs – Query Entity (returning FWLTC data) then Query Local
Manifest – Query Entity then Query Local
Refill Submissions: No
Quick Load: No
Delivery Manifests: Query Entity
Enterprise: No
Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

If DocuTrack license allows DirectConnect Interface, add an interface and select Diamond from the drop down list. Direct Connect has been updated to allow a PIS RX barcode that calls Query Entity to redirect the associations to a different interface. This update was added for Diamond. In order for barcode evaluation to work, the Diamond interface (in the BusinessUnitDirectConnectInterfaces table) will need to be sequenced before the FrameworkLTC interface. Importing documents with FWLTC or Diamond barcodes will return association data. If site attempts to insert documents (using Direct Connect) with FWLTC barcodes on them, the barcodes will be recognized, but they will not get FWLTC associations. If the barcode pinout matches Diamond Rx's, then the document will receive associations.

Notables:

Diamond interface is not designed for enterprise configurations. Pharmacy ID field is disabled.
If Diamond and Framework LTC are both licensed, it is possible that a Diamond Rx re-order barcode could be read as Framework if the barcode has the same format as Diamond barcodes (9 digits). This can be resolved by changing the sequence of the interfaces in the BusinessUnitDirectConnectInterfaces table.

Digital Rx Interface

Version History

5.6.0 – NEW - Added support which includes Document Association Macro Button configuration ability.
6.0.0 – Added support for Association Macro Buttons (Logix)
6.1.0 – Added manifest barcode support

Supported Features and Versions

PIS Versions: Unknown
Associations: No keyboard wedge
Manifest Associations by barcode recognition only
Barcodes: Yes – Manifest only.
Refill Submissions: No

Quick Load: No
Delivery Manifests: Yes – by barcode recognition only.
Enterprise: No
Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Select Digital Rx in the Administration > Business Unit > Interface Options workspace.

Notables:

If association macro buttons will be used by the customer, configure these using the Document Association Macro Buttons dialog.

Digital Rx interface is not designed for enterprise configurations. Pharmacy ID field is disabled.

Direct Connect Interface

Version History

5.0.3 See the DocuTrack Direct Connect Interface Services.pdf for detailed Direct Connect 5.0.3 instructions.
5.5.0 Added the ability to LoadDocumentList with an entity's alternate ID.(RXID3)
5.6.0 A new search type, RX_ID_4, has been added to LoadDocumentList to search multiple Rx primary ID's. This will work on both the COM and web interfaces.

Troubleshooting

It has been noted, when a user has a document loaded that has associations present and in the PIS Web.AssociateEntities is called with XML that includes more than one entity type, with some invalid store IDs; the association grid may/may not display all of the prior associations. Refresh of the document will return all associations.

Document Number Insert Interface

Version History

5.1.2 – Added to 5.x product
6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions: Unknown
Associations: No
Refill Submissions: No
Quick Load: No
Delivery Manifests: No
Enterprise: No
Barcodes: No
Association Macro Buttons: No

Description

This interface is unique since DocuTrack does not receive data from the interface application to create associations; it only sends data into the application. The information sent to the application will be the currently displayed document number in DocuTrack.

Troubleshooting

When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

DocuTrack Configuration

Select Document Number Interface in the Interface Options workspace

Hot Keys

ALT + A	Insert Document Number
ALT + I	Brings up the interface information screen.
ALT + L	Load the selected documents

FileReader Service

The FileReader Service is an NT service used to read in manifest data files from a Pharmacy Information System. The service monitors a manifest import directory folder and every two minutes processes flat files found. By default, the FileReader Service is installed with "Log on as <Local System account>".

Version History

5.3.0 – Support for 7.5 MB file size

6.1.0 – Support for 25 MB file size

Notables

- We now support file reader manifest files up to approximately 25 MB in size. Previous size was 7.5MB.
- The service no longer creates raw files and cooked files. Therefore, the only security setting required is for the FileReader service Logon User, which must have Read\Write access to the source folder.
- Flat file processing enters data directly into the database.
- The database tables used by the file reader to write the processed flat files:
 - FileReaderTasks: The entire content of the flat file is placed into a single row in this table. Background tasks will execute a stored procedure every 10 minutes that will process this row into the FileReaderTaskLines table. Once processed, the row will be updated with accurate values for ErrorDescription, LinesInError and LinesIgnored.
 - FileReaderTaskLines: Each row in the manifest will populate a row in this table.
 - Enterprise Configuration table contains two configuration values for the File Reader:
 - FileReader.DataAgingPeriod | The time in days that data is kept in the FileReaderTasks and FileReaderTaskLines tables before it is flushed from the system. | Value = 30 days.
 - FileReader.MonitorInterval | The time interval in seconds between when the file reader service checks for new files. | Value = 30 seconds.
- FileService log will record only what the FileReader service is doing.
- FileReaderTask processing is not logged, but if an error occurs the FileReaderTask* table will contain error information.

FrameworkLTC Interface

Version History

4.6.4 – Addition of Patient Profile button as seed data (6/2011)

5.0.5 – Enterprise support added

5.1.8 – Added patient barcode support

5.4.0 – Store Routing Rules enabled. Store routing allows for non-store-aware barcodes to be routed to the correct store-aware interface.

5.6.0 -- RX barcode highlighting based on submission status implemented.

6.0.0 – Additional Association Macro buttons (Logix) are supported.

6.1.0 – Association Macro button seed data to Load eRx Triage manager.

Supported Features and Versions

PIS Versions: FrameworkLTC v.3.076 or higher

Associations: Direct Connect COM (FrameworkLTC Client and Docutrack client running on same workstation), the user can associate Manifest, prescription, ancillary, patient, doctor, and facility data.
Quick Add allows user to "Search" (QueryEntity) the FrameworkLTC Interface

Barcodes: Manifest, Patient and Rx
Barcode recognition will Query Entity FrameworkLTC and then Query Entity local.
(Supported via Direct Connect WEB service - An association UniqueID is sent to PIS and the PIS returns additional association data for the unique ID)

Refill Submissions: Supported via DirectConnect WEB service.

Quick Load: Supported Quick Load Screens (from DocuTrack to FrameworkLTC): RX Verification Screen, RX Batch screen and Patient record.

Delivery Manifests: Supported via Quick Add of Delivery Manifests or barcode recognition. No FileReader functionality.

Enterprise: Yes

Association Macro Buttons: Yes, Seed data includes three Prescription buttons, one Patient button and one Ancillary button.

FrameworkLTC Configuration

- Ensure the customer is running the correct version of FrameworkLTC.
- If recognized RX barcodes are to be submitted, the FrameworkLTC server should include the Framework Direct Connect module.

In-house Test Simulation

Follow the instructions in \\tweety\dfs\Groups\Documentation\DocuTrack\#.#.#\Testing Docs\Interfaces

DocuTrack Configuration

- License the FrameworkLTC interface in the Administration Business Unit Workspace.
 - Request from FrameworkLTC the User ID, Password & URL settings for the FrameworkLTC Direct Module. User ID and password are case sensitive.
- Association Macro Button Configuration:
 - Configuration Notable(s):
 - When Admin does not want the seed data macro buttons to display in the association grid, uncheck the “Load” checkbox (example: Audit Assist Load Rx macro button) or delete them.
 - The “Button Name” definition will be the tooltip displayed for the button.
 - When the “Verify” checkbox is checked, the launching of the macro button in the association grid will auto check the Verified checkbox (first column in the association grid).
 - To Load a record in FrameworkLTC from an associated DocuTrack document: complete the desired options in the “Document Association Macro Buttons” grid.
 - Seed data includes Prescription (Load in Edit Screen, Load in Review Screen), and Patient (Patient Profile) and Ancillary (Filter Patient in eRx Queue) buttons.
 - To Load a Patient record in FrameworkLTC eRx Manager Queue, review the prescription and ancillary macro button configuration.
 - Seed data includes Prescription (Filter Patient in eRx Queue) and Ancillary (Filter Patient in eRx Queue) buttons. Destination will be: “Delphi_NCPDPPatientFilter_v#.#.###”
 - The user must have the FrameworkLTC eRx Triage Manager open in order to use this script.
 - The script uses the patient first and last name from the first Ancillary association found on the document. It also uses the physician first and last name from the first Prescriber association found on the document. (These associations are created by the DocuTrack eRx plugin.) The data from these are used to set and apply the filter in the FrameworkLTC eRx Triage Manager.
 - When macro buttons are added/configured by Administrator, users will need to log out and back into DocuTrack in order to pick up the changes.
- Consider and select the checkbox if the customer will be using Manifest, Patient or Prescription barcodes.
- If association macro buttons (for Logix) will be used by the customer, configure these using the Document Association Macro Buttons Dialog.
- Install the DocuTrack Client on the same machine as the FrameworkLTC Client. FrameworkLTC has developed to our DirectConnect(COM) API. This communication requires both clients on same workstation.

Enterprise DocuTrack Configuration

- When the FrameworkLTC interface has been configured for Enterprise, DocuTrack should be configured for multiple Business Units with unique Pharmacy IDs for each.
- Contact Integra and request an updated license for additional Business Units.
- Contact FrameworkLTC (or customer) for the pharmacy IDs that have been defined for each pharmacy.
- In the DocuTrack Administration workspace, in each Business Unit Interface Options workspace
 - Enter the FrameworkLTC Direct Connect Settings.
 - Enter a unique Pharmacy ID for each Business Unit
- Verify the configuration by selecting an RX from pharmacy ID ## and attempt to associate it to a document that exists in the matching Business Unit.

Refill submission status barcode highlight colors:

	(Copied from SubmissionStatusBarcodeSettings Table – 3/15/15)		
--	---	--	--

Barcode Setting ID	RegEx	RegEx Evaluation	ColorValue
1	^Awaiting refill authorization	1	Gray
2	^Discontinued order	2	Yellow
3	^Dispensed quantity must be a multiple of minimum quantity for this drug	3	Orange
4	^Drug is on .* do not send list	4	Orange
5	^Inactive patient	5	Yellow
6	^Invalid reorder number	6	Purple
7	^Narcotic Drug	7	Orange
8	^No refills remaining	8	Yellow
9	^Ok	9	Aqua
10	^Order is already present	10	Orange
11	^Order not finalized	11	Yellow
12	^Order was previously partial filled.[]*Partial fills cannot be completed	12	Orange
13	^Orders for C-III and C-IV drugs cannot be reordered/refilled more than five times	13	Orange
14	^Patient is profile only	14	Yellow
15	^Pharmacy not licensed	15	Red
16	^Prescription has expired	16	Yellow
17	^Prescription on hold	17	Yellow
18	^Receipt of written prescription from physician is pending	18	Yellow
19	^Reorder Functionality has been Disabled.*	19	Red
20	^RTS.*	20	Blue
21	^Total quantity dispensed has reached the total quantity written	21	Blue
33	^Submitted.*	9997	Aqua
34	^Failed ^Failure.*	9998	Red
35	.*	9999	Black

FWLTC Refill Submission Status Codes

(5/15/14 – CS has confirmed these statuses)

- OK
- Order is already present
Invalid reorder number
Inactive Patient
- RFTS – Refill too soon

Notables

- Each of the FrameworkLTC screens with DocuTrack functionality has an “Integra” button. The button presents association options in context of the screen displayed in FrameworkLTC.
- When creating a document association, the FrameworkLTC system will be searched for a match, via the Direct Connect web calls when the user clicks the Search button.
- Interface Search tab: When “Load All Assoc. Documents” or “Query All Assoc. Documents” is selected in FrameworkLTC, the documents will be loaded in the Interface Search tab results pane.
- An Association Compare Dialog, which will display when a user has attempted to associate an entity that closely matches an existing entity in DocuTrack. The dialog will prompt the user to create new or update an existing entity. (See DocuTrack 5.0 Core Features guide for additional information related to this feature).
- Enterprise:
 - In the event FrameworkLTC is configured for enterprise and DocuTrack system is not, Rx barcodes may be highlighted in green but the document will not contain RX associations.
 - Store IDs will no longer display in association grid. The store ID is tied to the RX in the Database.

- When Quick Adding Manifests, DocuTrack will query FWLTC for all RX records included in that manifest and auto associate the records.
- When Quick Adding Prescriptions or patients, user may select the “Search” button to query FWLTC for additional data. FWLTC does not support queries for facilities, ancillaries or physicians.
- Association Macro button labeled “*Load in Edit Screen*” can be used in Audit Assist workspace by selecting the “Audit Assist” checkbox. With Audit Assist checkbox configured, when the user selects a document record in Audit Assist, the Load Entity will launch the FWLTC patients dialog and search for the prescription number. User must dismiss FWLTC Prescriptions dialog in order to search for next.

FRED Dispense and FRED Pak Interface

Version History

5.4.1 – Newly Added

5.4.3 – Updated to 2.0

6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions:	Unknown
Associations:	Rx, Patient and Facility associations using keyboard wedge (UIPath)
Refill Submissions:	No
Quick Load:	No
Delivery Manifests:	No
Enterprise:	No
Barcodes:	No
Association Macro Buttons:	Yes (Logix)

DocuTrack Configuration

Ensure system license includes at least one Pharmacy Information System licensed.

Select FRED in the Interface Options workspace.

Select the corresponding keyboard configuration in the Interface Options workspace.

Hot Keys - **Note:** Focus must be in FRED (not DocuTrack)

CTRL + 1	Associate Rx/Patient/Facility FRED Dispense (pops up dialog for Patient ID) / Patient/Facility FRED Pak <u>Notables</u> • User will <u>not</u> get a Patient association if the patient ID is not valid (i.e. blank or zero). • The facility association will <u>not</u> have a name until it is associated once from FRED Pak.
CTRL + ALT + 1	Associate Rx/Facility FRED Dispense (no dialogs pop up) / N/A FRED Pak
CTRL + 2	Search by Rx ID FRED Dispense / N/A FRED Pak
CTRL + 3	Search by Patient ID FRED Dispense (Rx Screen AND Patient Dialog) / Patient ID FRED Pak
CTRL + 9	About Dialog

FSI Interface

Version History

4.6.4 – Added license workspace and configuration file

5.1.2 – Added to 5.x product

6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions:	Unknown
Associations:	Rx associations using keyboard wedge with Anzio Lite emulator
Emulators:	Anzio Lite
Refill Submissions:	No
Quick Load:	No
Delivery Manifests:	No
Enterprise:	No

Barcodes: No
Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Select FSI in the Interface Options workspace.

Hot Keys - Note: Focus must be in the terminal emulator (not DocuTrack).

ALT + CTRL + I	Brings up the interface information screen.
ALT + CTRL + A	Creates an association in DocuTrack.
ALT + CTRL + S	Lists all documents associated with the prescription in the Interface Search tab.

Troubleshooting

It has been reported (although not confirmed in-house) that the C++ 2008 redistributable package may be required for associations to work.

When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

HBS Interface

Version History

2/10 – Instructions to disable query entity for barcode evaluation if needed

2/10 – Support of new format for manifest barcode recognition (00##### interleaved 2 of 5)

8/09 – Support of 7 or 8-digit Rx values

5.6.0 - RX barcode highlighting based on submission status implemented.

6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions: HBS version 8.5d or higher

Associations: RX, Patient, Facility, Physician, Ancillary and Manifest supported via Direct Connect web services.
Quick Add allows user to “Search” (QueryEntity) the HBS Interface

Barcodes: Manifest and Rx
Barcode recognition will Query Entity HBS and then Query Entity local. (Supported via Direct Connect WEB service - An association UniqueID is sent to PIS and the PIS returns additional association data for the unique ID).

Refill Submissions: Supported via Direct Connect WEB services.

Quick Load: Supported (see below)

Delivery Manifests: Supported. Barcode recognition & QuickAdd. No File Reader.

Enterprise: Supported, but no configuration needed (HBS Rx values include store ID's).

Association Macro Buttons: Yes

In-house Test Simulation

Follow the instructions:

<\\\\tweety\\dfs\\Groups\\Documentation\\DocuTrack 5.6.0\\Testing Docs\\Interfaces\\HBS Interface Testing Notes.doc>

DocuTrack Configuration

- **Dual Server NICs:** If the server has dual network cards, make sure they are running with the same IP address.
- **Ports:** Assign a port range in General Setup with enough ports for all DocuTrack clients.
 - Ensure the range is an unused range approved by the customer's IT.
 - Ensure the range will not be blocked by firewalls or other network devices.
 - Confirm that ports are being given out successfully by logging into DocuTrack via terminal services and verifying that the server log shows a port being taken, above the first port in the range.
 - If each DocuTrack Client will be running “locally” on the same workstation as the respective PIS client then the port range can be just one port (e.g. 7000 to 7000) because the two clients share the same IP and can successfully connect this way.

- For any DocuTrack Client that will be running “remotely” (i.e. sharing the same IP with other DocuTrack clients on the same server such as a Citrix server), add one port to the range. These clients need their own ports since they do not have unique IP’s.
- **User IDs:** If any DocuTrack clients will be running “remotely” (i.e. on a different IP address than the PIS Client or sharing the same IP with other DocuTrack clients on the same server such as a Citrix server), each DocuTrack user who will be using the PIS interface needs to log in with a DocuTrack account that has a UserID matching their UserID in HBS. Set up matching DocuTrack accounts.
- **Business Units Workspace:** Select HBS under Interface Options for the Business Unit. Request the User ID, Password and URL settings for the HBS server from HBS.
- The HBS manifest barcode regular expression will accept any incoming barcode. Therefore, if this interface is being used in parallel with another, prioritize this one lower so this interface does not intercept all barcodes intended for the other PIS’s. (Set this is in the PharmacySystemConfiguration table.)
- **QuickLoad:** HBS now supports two quick load buttons for prescriptions.
 - **Verification Queue:** Seed data includes macro button values of: Association type = “Prescription”, Button Name = “Load Prescription”, Extra Data = “VQ”.
 - **Problem Queue:** To configure, enter the macro button values of: Association type = “Prescription”, Button Name = “Load RX in Problem Queue”, Extra Data = “PQ”.

HBS Configuration

In HBS, configure the system for use with DocuTrack.

Menu item = M (System Maintenance)

Menu item = A (Store File Maintenance)

Menu item = D (Field Parameters)

Menu item = 8 (Optional Modules)

Menu item = 7 (Interfaces)

Menu item = 21 (DocuTrack)

Select Yes or No

Enter DCT server IP Address

Select 2Store-7Rx-2Fill (prior to 4.4 7/8 digit update)

2Store-8Rx-2Fill (all except customers except ChemRx post 7/8 digit update)

1Store-8Rx-2Fill (ChemRx post 7/8 digit update)

Refill submission status barcode highlight colors:

(Copied from SubmissionStatusBarcodeSettings Table – 3/15/15)			
Barcode Setting ID	RegEx	RegEx Evaluation	ColorValue
22	^Add to Queue Failed	1	Red
23	^Discontinued	2	Yellow
24	^No Refills Left	3	Yellow
25	^Refill Too Soon	4	Blue
26	^Rx Not Found	5	Red
27	^Success	6	Aqua
33	^Submitted.*	9997	Aqua
34	^Failed ^Failure.*	9998	Red
35	.*	9999	Black

Notables

The DocuTrack\Direct Connect will function with any of the following HBS menu items:

- Patient Inquiry
- Rx Inquiry
- New Rx
- Refill
- Patient Rx History
- Doctor Inquiry
- Nursing Home System

- When Quick Add is used for an Rx association, the entire value must be entered (Store # + RX # + Refill #) (01-00000000-01). If the user searches the Pharmacy Information System, and a match is found, an association will be created to the currently loaded document. The Rx format returned will match what was entered in the Quick Add screen.
- When Quick Add is used for a manifest association, the entire value must be entered (H#####).
- When the DCT option is selected from HBS, the Rx format returned will match what is set up in HBS (Store # + RX # + Refill #).
- HBS has implemented QueryEntity, but it has to be purchased separately, so not all customers will have this feature. The solution is to turn off QueryEntity for HBS in the BarcodeEvaluators table.
update dbo. BarcodeEvaluators
set QueryEntity = '0' where DirectConnectInterfaceID = 100

HCC Interface

This interface was added to DocuTrack, to support DeliveryTrack customer. This patch only added the RX barcode regular expression, to allow for DeliveryTrack to insert documents into DocuTrack with RX associations. We do not have any other PIS supported features.

Version History

5.0.0 – Patch - NEW

6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions:	Unknown
Associations:	No keyboard wedge
Refill Submissions:	No
Quick Load:	No
Delivery Manifests:	No
Enterprise:	No
Barcodes:	Rx (No Query Entity – all RXs inserted via DeliveryTrack)
Association Macro Buttons:	Yes (Logix)

DocuTrack Configuration

Enter a license in the Licenses workspace.

Medicine on Time Interface

Version History

5.1.4 – Added support to 5.x line

5.2.2 – R01933 Add MOT barcode support to 5.2.2

The File Reader service is able to process Medicine on Time (MOT) csv (comma delimited) files and import data into the DocuTrack system. It will process or import any *.csv file that exists in the source location.

Configuration

The Medicine On Time Interface (MOT) requires a license. It is configured in the Business Units workspace under Interface Options. The following PIS systems offer MOT support: FrameworkLTC, HBS, and QS/1. Note: we only support MOT for one interface per business unit.

Notables

- A source location should be configured for each PIS + PharmacyID setup in DocuTrack.
- Source locations **must be** unique for each PIS/PharmacyID (although they are not enforced).
- Do not use the same source location for QS/1 DeliveryManifest files as QS/1 MOT files.
- The source location will require specific access permissions. If the File Reader service does not detect a directory within a few minutes, restart the service.
 - MOT or Packaging System: File Create, File Write.
 - DeliveryTrack File Reader user: File Monitoring, File Reading and File Deleting
- MOT files with FrameworkLTC RX's - Processing will query the PIS system for the Unique ID (FACID|PatMRN#####|Refill###).
- MOT files with QS/1 - If any of our QS/1 customers use both DeliveryManifest file reader and MOT file reader, they should expect the following:
 - RX data (in association pane) will be updated to the data which was processed last (last in wins). The data typically should not be different. E.g. if the DM file was processed first, the MOT

- processed file data will update the patients table. This is current Direct Connect behavior that occurs with each association of that RX.
- If MOT strips the leading zeros on the RX #s, this will may cause DocuTrack to have duplicate RX#s (e.g. 06022548 received from PIS and 6022548 received from MOT).
- MOT File Reader configuration file is not enterprise aware. It will not parse out Pharmacy ID from RX or Manifest values; it will process out the whole value.

Nextra Interface

Version History

- 5.4.0 – Added the Nextra Pharmacy Information Configuration.
- 5.5.0 – Added support for prescription and manifest barcodes and enabled the Pharmacy ID field in the configuration section.
- 5.6.0 – Regular expressions modified
- 5.6.0 – Updated the Direct Connect Load Document List with a new search type, RX_ID_4.
- 6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions:	2.1
Associations:	No keyboard wedge
Refill Submissions:	No
Quick Load:	No
Delivery Manifests:	No, barcode recognition only. No FileReader.
Enterprise:	No
Barcodes:	Manifest and Rx (No QueryEntity)
Association Macro Buttons:	Yes (Logix)

DocuTrack Configuration

If DocuTrack license entered allows DirectConnect Interface, add an interface and select Nextra from the drop down list.

Notables:

Nextra interface requires a Pharmacy ID. Document Processing/Import will not recognize RX or manifest barcodes without a Pharmacy ID. Regular expressions have been modified to retain store ID in Rx and Manifest barcode values.

5.6.0 – Direct Connect Load Document List now supports new search type, RX_ID_4. This search type, allows Nextra to send multiple Rx primary ID's and all documents matching the IDs will be returned in results grid.

Oasis Interface

Version History

- 5.4.2 – Support added to 5.x product
- 6.0.0 – Support added for Association Macro Buttons (Logix)
- 6.1.0 – Support added for three new screens
 - OE362Y - Customer Orders by Product Desc
 - MS112Y - Prescriber Master
 - E0102Y - Electronic Order
- 6.4.0 – *Document_Info_Get* & *Document_Return_Send_To_User* Webservice calls
Document Type On Save and On Associate Event Handlers
- 6.4.0 – Patch: Updates for Oasis screen changes (OB001Y, OE362Y, OE363Y and ED108Y).
- 6.6.0 – Editing functions limited in DocuTrack when document loaded via Oasis

Supported Features and Versions

PIS Versions:	Unknown – Oasis configures
Associations:	RX and Patient, via the keyboard wedge
Emulators:	Unknown – Oasis configures
Barcodes:	Rx – barcode recognition, no query entity.
Refill Submissions:	No
Quick Load:	No
Delivery Manifests:	No
Enterprise:	No

Association Macro Buttons: Yes (see below)

DocuTrack Configuration

Select Oasis and the corresponding keyboard configuration in the Interface Options workspace. Consider and select the checkbox if the customer will be using Prescription barcodes.

Association Macro Button(s)

Supported by reverse screen scraping. The install provides a seed data macro button that will function as designed.

Design:

Oasis screen OE500Y—when user is on this screen and selects the association macro button, DocuTrack will use the prescription value that is associated to the button selected and will insert the prescription number into the RX# filter on the Oasis Screen. Then DocuTrack will put a number 1 into the first vertical Opt field and send <ENTER> key to the emulator.

Oasis screen Interactive Refill —when user is on this screen and selects the association macro button, DocuTrack will use the barcode value that is associated to the prescription button selected and will insert the whole barcode number into the RX# filter on the Oasis Screen. Then DocuTrack will send <ENTER> key to the emulator.

Troubleshooting

- Noted failures to associate while testing. Discovered that if the facility code has any non-alphanumeric characters, our script logs an error and fails to associate. Produce Management is aware and due to this script has functioned for HHS since 5.4.3, we will address in a later release.
- When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

Hot Keys

ALT + I	Brings up the interface information screen.
CTRL + F7	Creates an association in DocuTrack.
CTRL + Q	Lists all documents associated with the prescription in the Interface Search tab.

DocuTrack Configuration (for new Web Service calls)

The new WebService calls will be recognized by rest endpoints added to our Integra DocuTrack Workflow endpoints to mimic Heartland's ImageNow application.

(http://localhost:8008/imagenow/services/1.0/document_service).


1. Administration>>BusinessUnits>>Interface Options: OASIS has been added as an interface.
2. Integra DocuTrack Workflow Service started (Set to automatic)
3. Administration>>Users – Enter each users' Oasis login into the “*Linked application user ID*” field
4. Configure Document Data (DocumentType + doc data settings) that no user has permissions to.
5. Configure a Document Import rule that recognizes eRX messages and assigns them to the Document Data settings defined above.
6. Configure the above Document Data with OnSave and OnAssociate scripts (see [below](#))
7. To verify, loading an eRx message in Oasis, will AutoLoad the document into DocuTrack (despite, the user does not have permissions to this Department/DocType document). When user associates an RX, it will set the document data to new values and the document will now be accessible to any user with permissions to that doc data. See additional testing notes below.
8. When the document is loaded in DocuTrack, the user will be unable to staple, unstaple, copy, modify document data, delete existing associations, or add associations via Quick Add. These functions are disabled regardless of user permissions to the document's metadata. If the user does have permissions to the document, the document should be re-loaded by the user to gain full functionality.
9. All users regardless of permissions will have the ability to annotate and save the document, as well as print and send via fax or secure message.

Notes:

- Oasis when processing an eRX, will call “*Document_Info_Get*” with the eRX message ID. DocuTrack will query the database for the most recent documentID with an ancillary association value matching the eRX message ID.

- Then Oasis will call “*Document_Return_Send_To_User*” with the DocumentID. This will load the document into DocuTrack in update mode. The user will not be required to have Department/Document Type permissions matching values assigned to the document to load the document.
 - **Note:** If Heartland adds additional business units, the users that process eRX messages will be required to have at a minimum read only access to all business units.
- Errors will not display to the end user. All errors will be logged in the Workflow Service log.
- DocuTrack now contains the ability to validate that an RX has been associated on document save for certain document types. In place are scriptable hooks to document types that will allow them to select the script to execute during the following events:
 - On Association
 - On Save

Use of the Heartland/Oasis scripts for On Save and On Associate

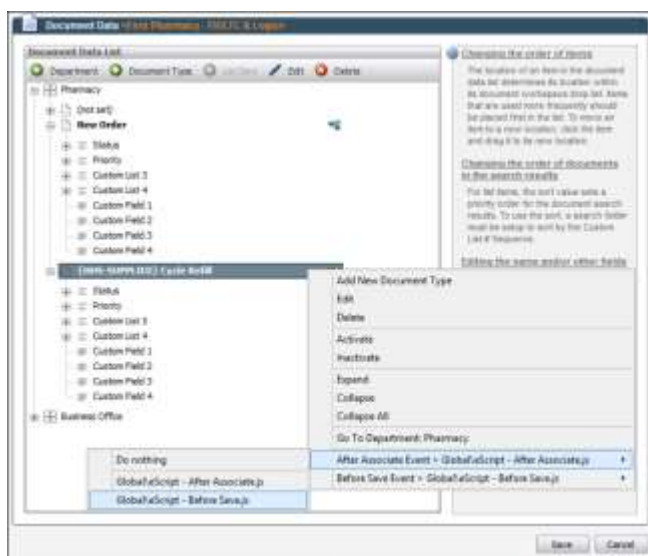

The installer places a template script by default in:

D:\DocuTrack\BusinessUnits\Global\Scripts\DocumentTypeEvents\Templates\Document Type Event Template.js

Presently there are 2 scripts that were created for HHS and can be found at:

<http://tweetydfs/Products/DocuTrack/6.4/Custom Specific/HHS/DocumentTypeEventScripts>

Copy these scripts to:

D:\DocuTrack\BusinessUnits\Global\Scripts\DocumentTypeEvents\

NOTE:

- First load of scripts will be slow.
- Can use other interfaces but scripts will only look for Oasis RX's.
- Script maybe marked ReadOnly so this will need to be unchecked before it can be altered.


To setup the scripts for use:

1. Open Admin Tab/Document Data Workspace for the appropriate BU
2. Right click on the Document Type the user wants to associate and select script(s) as needed
3. When complete an icon will appear only once, no matter how many scripts are selected for that DocType.
4. Select the next DocType and change the name to {HHS-SUPPLIED} (Listed in the OnAssociate script) or change the script to be what HHS requests.
5. Save the workspace
6. Log out, close client app down and log back in for all clients, scripts are cached.

To use the scripts:

1. Select document
2. Change DocData to the one with the OnSave script
3. Save
4. Dirty document

5. Save
6. User should receive a dialog like this:

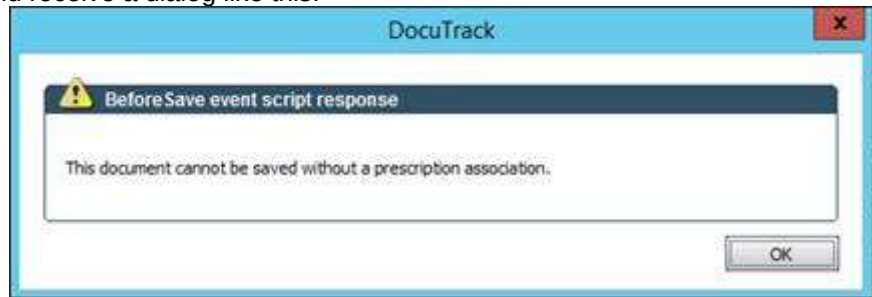

7. Add an Oasis prescription
8. Save
9. The DocType will or should be altered to the one that is listed in the On Associate script = {HHS-SUPPLIED}

Payless / OnDocumentChange Interface

Version History

5.4.0 – Added support to 5.x line.

6.0.0 – Added support for Association Macro Buttons (Logix)

The OnDocumentChange feature is an interface that is used by Payless (Integra customer). The OnDocumentChange interface writes .dat files to a folder when prescription associations or document data changes occur. Payless has developed a service that monitors this folder and uses the data in the .dat file to drive a workflow process. The Payless service cleans these .dat files up.

Supported Features and Versions

PIS Versions:	Unknown
Associations:	RXs (unsure of all entity types) via Direct Connect WEB service.
Barcodes:	Manifest -- Query Entity then Query Local
Refill Submissions:	Supported via Direct Connect WEB service.
Quick Load:	Supported via Direct Connect WEB service.
Delivery Manifests:	No FileReader, barcode recognition and Query Entity.
Enterprise:	No

Association Macro Buttons: Yes (Logix)

Configuration (Conversion will configure these values correctly)

Ensure that the EnterpriseConfiguration table has the following values:

App.OnDocumentChange.Active = 1

App.OnDocumentChange.LastCutOffUTCDate = <conversion timestamp>

App.OnDocumentChange.TargetFolder = %Path.DataRoot%\ChangedDocuments

Once configured, enable the SQL Agent *DocuTrack OnDocumentChange Export* job. This is scheduled to run every 2 minutes.

Notables

In 4.6.4 the entire document's history was written to the dat file (document data and associations). 5.4.0, the .dat file is just one row of data that represents the state of the document upon run time of the job.

PDX Interface

Supported Features and Versions

PIS Versions:	PDX 4.6 or higher
Associations:	Unknown
Refill Submissions:	No
Quick Load:	No
Delivery Manifests:	No
Enterprise:	No.

Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Ensure system license includes at least one Pharmacy Information System licensed.

PharMerica Interface

Version History

4.3.3 - Effectively return to DeliveryTrack (2.0.1 +) all RXs that match the DeliveryManifest number scanned.

4.4.0 – Quick Add or Barcode recognition of DeliveryManifest barcodes will return RX values from the DeliveryManifest table.

5.0.0 – Added support to 5.x line (email mapping not delivered yet)

5.3.0 – DNIS/Email mapping to pharmacy ID added.

6.0.0 – Added support for Association Macro Buttons (Logix)

PharMerica is using DCI InsertManifest to populate DeliveryManifest and patients table with data. PharMerica DeliveryManifest barcodes recognized by DocuImport will not get RX data from the DeliveryManifest table. QuickAdd of the DeliveryManifest barcode will not get RX data from the DeliveryManifest table. This is because DocuTrack did not implement “QueryLocal” until 4.4. PharMerica manifest barcodes

Supported Features and Versions

PIS Versions: Unknown

Associations: RXs (and possibly other entities) via Direct Connect WEB service.

Barcodes: Manifest and Rx (No Query entity)

Delivery Manifests: Supported with the use of Direct Connect InsertManifest call.

Refill Submissions: Supported via Direct Connect WEB service.

Quick Load: Supported via Direct Connect WEB service.

Enterprise: Supported.

Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

- Ensure system license includes at least one Pharmacy Information System licensed.
- Request from PharMerica the User ID, Password, & URL settings for the PharMerica server and place them in the System Maintenance Workspace
- Setup at least one DNIS/Email mapping Setting for the pharmacy. (e.g. DNIS with value = #####).

PPC Interface

Supported Features and Versions

PIS Versions: PPC ver. RxWin 06.1A

Associations: Uses the keyboard wedge

Refill Submissions: No

Quick Load: No

Delivery Manifests: No

Enterprise: No

Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Ensure system license includes at least one Pharmacy Information System licensed.

Select the corresponding keyboard configuration in the Interface Options workspace.

Troubleshooting

When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

Hot Keys

CTRL + I	Brings up the interface information screen.
CTRL + A	Creates an association in DocuTrack.

CTRL + S	Lists all documents associated with the prescription in the Interface Search tab.
----------	---

Prodigy Interface

Version History

- 4.0.0 – Added Prodigy to DocuTrack Pharmacy Information Systems
- 4.4.0 – Added a second Prodigy_InterfaceConfig2.xml file to accommodate a Prodigy Update
- 4.6.4 – (2011.11.08) Updated Prodigy_InterfaceConfig2.xml file to effectively capture 6 to 8 digit RXs.
- 4.6.4 – (2012.01.03) Updated Prodigy_InterfaceConfig2.xml file to work with Prodigy 12.30.2011 interface update.
- 5.1.2 -- Added to 5.x product
- 5.1.8 – To support Prodigy's DirectConnect com and web development, updated Prodigy interface to configure for outbound Direct Connect calls to a web service. Updated to QueryEntity manifest and prescription barcodes
- 5.4.0 – Store Routing Rules enabled. Store routing allows for non-store-aware barcodes to be routed to the correct store-aware interface.
- 6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions:	Not Applicable
Associations:	RX via the keyboard wedge Entity types all that Prodigy supports via Direct Connect COM
Emulators:	Anzio Lite
Barcodes:	Manifest and Rx (using Query Entity and then Query local)
Refill Submissions:	Supported via Direct Connect WEB Service
Quick Load:	Supported
Enterprise:	Supported
Association Macro Buttons:	Yes (Logix)

Notable: The DocuTrack document import log may show errors (“unable to call QueryEntity”) because Prodigy is still in the process of developing their web service.

DocuTrack Configuration

- Ensure system license includes at least one Pharmacy Information System licensed.
- For Screen Scraping, select the configuration file that matches the current Prodigy interface. (This may require a test of RX associations with each of the configuration files.)
- Select the checkbox if the customer will be using Manifest or Prescription barcodes.
- If association macro buttons will be used by the customer, configure these using the Document Association Macro Buttons dialog.

Troubleshooting

When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

Hot Keys - Note: Focus must be in the terminal emulator (not DocuTrack).

CTRL + I	Brings up the interface information screen.
F11	Creates an association in DocuTrack.
CTRL + S	Lists all documents associated with the prescription in the Interface Search tab.

Direct Connect Configuration

- Request from Prodigy the User ID, Password & URL settings for the Prodigy Direct Connect Module. User ID and password are case sensitive.
- Enter these values in the Interface's Direct Connect Settings.
- Barcodes currently supported: Prescriptions and Manifest.
- No Document Association Macro Buttons supported as of 5.1.8

QS/1 Interface (PC)

Version History

- 5.3.0 Enterprise issue resolved. If DocuTrack QS/1 configuration is non-enterprise, and QS/1 sends a Store ID (via DirectConnect) it will be ignored. (This applies to barcode recognition also.)

- 5.4.0 Store Routing Rules enabled. Store routing allows for non-store-aware barcodes to be routed to the correct store-aware interface.
- 5.6.0 RX barcode highlighting based on submission status implemented.
- 5.9.0 Added support for Patient barcodes.
- 5.9.0 Added support for QS/1 3 digit numeric submission statuses.
- 6.0.0 Added support for Association Macro Buttons (Logix),
- 6.1.0 Added seed data LoadRX macro button and UIPath script for loading an RX in QS/1 from Audit Assist workspace.
- 6.1.0 Added seed data Load eRX macro button and UIPath script for loading eRX data in QS/1's Tickler Scan.
- 6.2.0 Updated NCPDP Script to load eRx messages correctly
- 6.4.0 Checkbox added to QS/1 settings to set QS/1 facility group code as the source for incoming manifests. Duplicate RX associations will no longer occur with temporary RX numbers (example: 03000100). RX barcode with symbology Code 3of9 support added. Submission Statuses added: *(010-No Refills Remaining and 011-Class 2 Drug - Cannot Refill)*
- 6.6.0 DirectLoad macro options for RX, Patient and NCPDP messages.
- 6.6.2 Pre-existing eRX messages order type populated with upgrade(s)
OVR Refill response regular expression update (was causing workflow errors in QS/1).
Print into DocuTrack support.

Supported Features and Versions

PIS Versions:	QS/1 19.1.18 or higher
Associations:	RX, Patient, Ancillary, Physician, Facility, Ancillary and Manifest supported via Direct Connect COM (QS/1 client must be running on the same workstation as DocuTrack client). Quick Add of a Manifest will Query Local and associate RXs.
Barcodes:	Manifest, Rx, and Patient (No Query Entity)
Refill Submissions:	Supported via HL7 feed.
Delivery Manifests:	Supported via FileReader
Quick Load:	No
Enterprise:	Supported
Association Macro Buttons:	DirectLoad macro options for RX, Patient and NCPDP messages (Loading NCPDP eRX messages in QS/1)

QS/1 Configuration

Manifest Configuration: Before installing, ensure the customer has contacted QS/1 and inquired where the Manifest import directory (Delivery Manifests) location will be.

- If location is on the DocuTrack server no other configuration required.
- If location is on the QS/1 server, create a local user IntegraSvc with a password that matches the password for this user on the DocuTrack server. Ensure the IntegraSvc user has Modify or Full Control access to the source directory on the QS/1 server.

Refill (HL7) Configuration: Before installing, ensure the customer has contacted QS/1 and inquired for the following:

- QS/1 Server IP Address
- Port Configured for HL7 refill messages.

DocuTrack Configuration

- In Computer Management,
 - If Manifest import directory Location is on DocuTrack server, leave the default "Log on as" user (Local System).
 - If Manifest import directory Location is on QS/1 server, set the default "Log on as user" to Integrasvc.
 - Ensure the Integra DocuTrack File Reader service is set to start automatically and restart on recovery
- In DocuTrack, System Maintenance, General System Configuration
 - Set the client port range to 6000 to 7000 (these are defaults but could be configured differently if needed)
- In DocuTrack, Business Units, Interface Options for QS/1
 - Under File Reader Service Configuration for Manifest File Import, enter the manifest import directory.
 - If on DocuTrack server, share the new target directory so the QS/1 server can attach to it.

- Under Server Information, enter the QS/1 Server IP address and port number. Set the port value to value gathered from QS/1 configuration (above).
- Confirm the interface is working properly by submitting an RX.
- Restart the Integra DocuTrack File Reader Service so it picks up the new settings
- An optional checkbox in this workspace, labeled 'match source of manifest using group code' can be checked to set the source for incoming manifests to the facility group code. The group code is the first four characters in any manifest barcode value.
- Restart the Integra DocuTrack File Reader Service so it picks up the new settings.
- Check the "Automatically add DocuTrack document type on association" checkbox. (This is supported in QS/1 SP21)

Direct Connect Configuration

- ☒ Automatically add DocuTrack document type on association

- If QS/1 customer has updated to 6.5.0 and a version of QS/1 SP20, where the Document Descriptions are populated with DocuTrack Document Types, and they do not desire this behavior, please apply the DocuTrack client patch located @
\\tweety\dfs\Products\DocuTrack\6.5\Updates\Interface Specific\2016.12.14-B-11096 QS1SP20 DocumentType Client Patch.
- Process a manifest by placing one in the Manifest import directory. Ensure it disappears from the directory. If it does not, monitor the Integra DocuTrack File Reader Service log for errors.
 - Associate a few prescriptions and manifests with documents.
- If some Rx barcode sample images are available, import them and ensure the Rx's get associated with the imported images. If samples are not available, then manually associate some refill Rx's. Submit some refill requests from these documents. A submission status should be returned.
- QS/1 associates temporary Rx values to documents during data entry. When the RX is approved the Rx value changes to a permanent ID. Temporary IDs begin with 03. If a document already has an Rx associated that begins with 03 and a new association is made with the same ID, a new association will be made if the Patient ID and Patient name are different than in the first association. If the Patient Name and ID are the same as the first association but other information is different (such as a date), the first association will be updated with the new information and no additional association will be made.

Direct Load Association Macro Configuration (no UIPath scripts used)

- Configuration Notable(s):
 - QS/1 Configuration – Must be 19.1.20 +.
 - DocuTrack (accept Defaults):

Document Association Macro Buttons

Association Type	Button Name	Extra Data	Icon	Load	Verify	Destination	Audit Assist
Prescription	Load Rx			☐	☐	UIPath: LoadRx_v19.1.14j	☐
Prescription	Load NCPDP Message			☐	☐	UIPath: LoadNCPDPMess...	☐
Ancillary	Load NCPDP Message			☐	☐	UIPath: LoadNCPDPMess...	☐
Prescription	Load Rx			☒	☐	QS/1	☒
Patient	Load Patient			☒	☐	QS/1	☐
Ancillary	Load NCPDP Message			☒	☐	QS/1	☐
(add new)				☒	☒		

- When Admin does not want the seed data macro buttons to display in the association grid, uncheck the "Load" checkbox or delete them.
- The "Button Name" definition will be the tooltip displayed for the button.
- When the "Verify" checkbox is checked, the launching of the macro button in the association grid will auto check the Verified checkbox (first column in the association grid).

Prescription>Load Rx macro button will load the QS/1 Prescription workspace. Checking the "Audit Assist" checkbox, will enable the user to load the RX record in QS/1 for review when in the Audit Assist workspace.

Patient>Load Patient macro button will load the QS/1 Patient workspace.

Ancillary>Load NCPDP Message macro button will load the QS/1 workspace tied to the message type. How this works – eRX messages populate the DocuTrack Ancillaries table. The message type will populate the Order Type column. When the macro is launched, the Load message is sent to QS/1 with the OrderType value. This prompts QS/1 which record to load. Upon upgrade to 6.6.2 (patched in 6.6.1) pre-existing ancillary entity eRX messages, will have the order type set to enable this functionality.

Checking the "Audit Assist" checkbox, will enable the user to load the RX record in QS/1 for review when in the Audit Assist workspace.

Association Macro Configuration (UIPath)

- Configuration Notable(s):
 - When Admin does not want the seed data macro buttons to display in the association grid, uncheck the “Load” checkbox (example: Audit Assist Load Rx macro button) or delete them.
 - The “Button Name” definition will be the tooltip displayed for the button.
 - When the “Verify” checkbox is checked, the launching of the macro button in the association grid will auto check the Verified checkbox (first column in the association grid).
- In Administration > Business Units > Interface Options > QS/1
 - New installs/upgraded systems will have the following Macro buttons defined:

Document Association Macro Buttons

Association Type	Button Name	Extra Data	Icon	Load	Verify	Destination	Audit Assist
Prescription	Load Rx			☐	☐	UIPath: LoadRx_v19.1.14j	☐
Prescription	Load NCPDP message			☒	☐	UIPath: LoadNCPDPMess...	☐
Ancillary	Load NCPDP message			☒	☐	UIPath: LoadNCPDPMess...	☐

- Prescription>Load Rx macro button enables Audit Assist to load the RX record in QS/1 for review while the auditor reviews documents in DocuTrack. To set up this feature:
 - There are two configurable values for this script:
 - **KeepFocus**: By default, the loading of RXs in QS/1 will return focus to DocuTrack for auditor to select “Check & Next” or “Next”. If the auditor prefers QS/1 retain focus with each document viewed, the “Extra Data” field should contain the value “KeepFocus”.
 - When setting up the macro enter “KeepFocus” in the ExtraData textbox.
 - **Delay**: By default, the script has activities that time out after 1000 milliseconds (1 second). This can be altered. Note – our testing results recommend no less than 800 milliseconds be used for the delay.
 - When setting up the macro enter “DELAY_###” (### = milliseconds) in the ExtraData textbox.
 - These two configurable values can be used together, but separated with a pipe (example KeepFocus|Delay_800). Both features are not case sensitive and Users do not need to logoff to update if a change is made after original creation.
 - Select the destination of “UiPath: LoadRx_v###.###”.
 - By placing a check in the AuditAssist column, the search in QS1 will occur when the document is viewed in the Audit Assist Workspace.
- Prescription>NCPDP Message macro button - **Will not function by default with eRx 1.2.2 or higher - Please consider manually removing button. Note RX associations can be configured in eRx. See eRx documentation for details.**
- This macro button will launch keystrokes to navigate to the QS/1 eRx tickler scan and send the message ID + keystrokes that will navigate the user to the QS/1 process screen.
- This requires the QS/1 user to have a default eRx tickler scan defined with the message ID (“[E-RX Data QHD].Ctrl/Reference#”) as the first filter.
 - **KEYDELAY**: By default, the script has activities that time out after 300 milliseconds. This can be altered. Note – our testing results recommend no less than 300 milliseconds be used for the delay.
 - When setting up the macro enter “KEYDELAY_###” (### = milliseconds) in the ExtraData textbox.
- Ancillary>NCPDP Message macro button
- This macro button will launch keystrokes to navigate to the QS/1 eRx tickler scan and send the message ID + keystrokes that will navigate the user to the QS/1 process screen.
- This requires the QS/1 user to have a default eRx tickler scan defined with the message ID (“[E-RX Data QHD].Ctrl/Reference#”) as the first filter.
 - **KEYDELAY**: By default, the script has activities that time out after 300 milliseconds. This can be altered. Note – our testing results recommend no less than 300 milliseconds be used for the delay.
 - When setting up the macro enter “KEYDELAY_###” (### = milliseconds) in the ExtraData textbox.
- **NOTABLE**: If Message ID returns more than one message in QS/1, the script will halt; requiring user to select one of the returned records to process.
- When macro buttons are added/configured by Administrator, users will need to log out and back into DocuTrack in order to pick up the changes.

QS/1 Enterprise Configuration

- The enterprise version of QS/1 must be enabled.

- QS/1 must be configured with non-zero Store IDs. Customers can contact QS/1 for instructions.
- Customers that use Delivery Manifest barcodes must use label routine 524 (Symbology 128).

Refill submission status barcode highlight colors:

Copied from SubmissionStatusBarcodeSettings Table – 3/15/15	
RegEx	ColorValue
^ER\$ (	Blue
^ES\$	Red
^NR\$	Yellow
^NS\$	Purple
^RF\$	Aqua
^069-.*	Blue
^036-.*	Orange
^177-.*	Yellow
^073-.*	Yellow
^158-.*	Orange
^162-.*	Yellow
^153-.*	Purple
^137-.*	Yellow
^009-.* (Inactive Script)	Blue
^010-.* (No Refills Remaining)	Yellow
^024-.* (C-Acct Is Blank, May Not Charge)	Orange
^035-.* (Maximum Refills Exceeded)	Yellow
^082-.* (Drug Cost Older Than One Year - <date>)	Orange
^136-.* (Price Calculated <DrugCost>)	Orange
^192-.* (Patient Location is Blank)	Orange
^011-.* (Class 2 Drug - Cannot Refill)	Yellow
^045-.* (SP Field is blank)	Orange
^OVR-.* (Override Required)	Yellow
^Submitted.*	Aqua
^Failed ^Failure.*	Red
.*	Black
^\\d{3}\\-.*	Aqua

DocuTrack Enterprise Configuration

When the QS/1 interface has been configured for Enterprise, DocuTrack should be configured for multiple Business Units with unique Pharmacy IDs for each.

- Contact Integra and request an updated license for additional Business Units.
- Customer should contact QS/1 for the pharmacy IDs that have been defined for each pharmacy.
- DocuTrack Administration workspace, in each Business Unit Interface Options workspace
 - Add the QS/1 Interface.
 - Enter in a unique Pharmacy ID for each Business Unit.
 - Add an IP address for each (or the same IP address for all Pharmacy IDs if running against one QS/1 Server in enterprise mode)
 - A matching pharmacy ID must be entered into DocuTrack for each store ID in QS/1.
- Verify the configuration by selecting an RX from pharmacy ID ## and attempt to associate it to a document that exists in the matching Business Unit.
- Restart the Integra File Reader Service so it picks up the new settings.
- The customer must contact QS/1 on updating their labels to generate Rx barcodes with store IDs.

Refill Submission Status Codes

- (3/17/2014: CS confirmed these are active refill status codes):
 - RF** - Refill order request
 - NS** - No Rx Number Found
 - ES** - Expired Script
 - ER** - Early Refill
 - NR** - No Refills
- (QS/1 version TBD: QS/1 will or has updated submission HL7 response to include a 3 digit numeric value and a text string with actual submission value "Reason for refill rejection"):
 - 009 - Inactive Script
 - 010 - No Refills Remaining
 - 024 - C-Acct Is Blank, May Not Charge
 - 035 - Maximum Refills Exceeded
 - 082 - Drug Cost Older Than One Year-<date>
 - 136 - Price Calculated < Drug Cost>
 - 162 - Rx Has Already Been Refilled Today
 - 192 - Patient Location is Blank

We will update this list as we get statuses back from customers.


Troubleshooting: To view the HL7 messages sent to QS/1 and received from QS/1, view the DocuTrack.ServiceHostWindowsService.LOG.

Direct Print to DocuTrack Configuration


As of 6.6.2, QS/1 can print directly into DocuTrack via the Direct Print driver. To install the driver, see the instructions located in [DocuTrack 6.6.2 Utilities Guide.docx](#).

QS/1 Printing Notables:

- **Majority of the QS/1 reports can be printed into DocuTrack. QA has verified a number of the basic reports (Refill Requests, A/R>>Statements, Charge Accounts List, Reconciliation Report, Daily Audit Log, Monthly Audit Log, Patient Cycle RX Report, RX/Transaction Change Log, Compound IV Delivery Sheet, Delivery Sheets, Patient Mailing Label, Medical Expense Summary and QS/1 Screen print.)**
- Best practice (from testing) is to have QS/1 user login and select
 - 1) File>>Printer Options>>Change Printer, selecting the <DocuTrack Printer Driver>
 - 2) Select the Printer Driver option to "Use Windows Default"

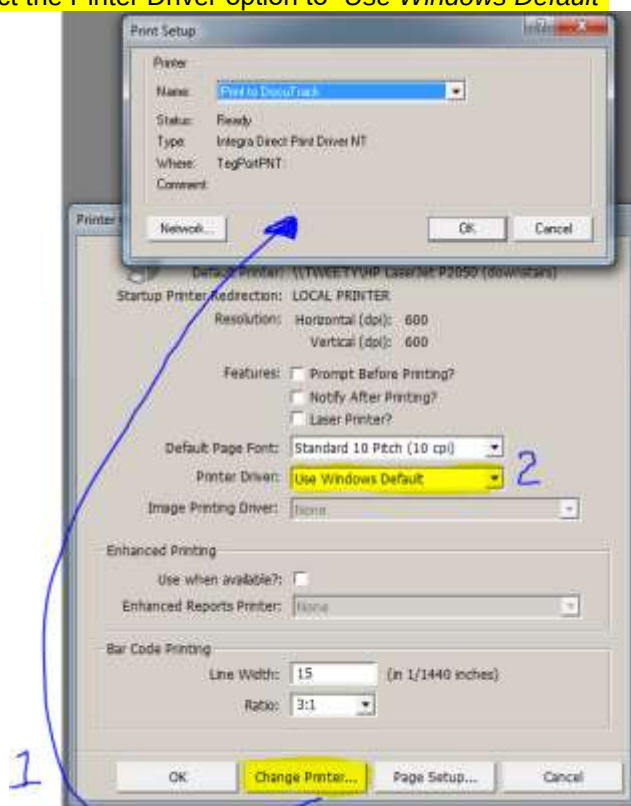

- Barcodes are not consistently printing on the documents. QS/1 and Integra are working together to determine the cause.
- To get wider (landscape) reports to be imported with portrait orientation (this is a known workaround for desktop printers), the user must select a different font size.

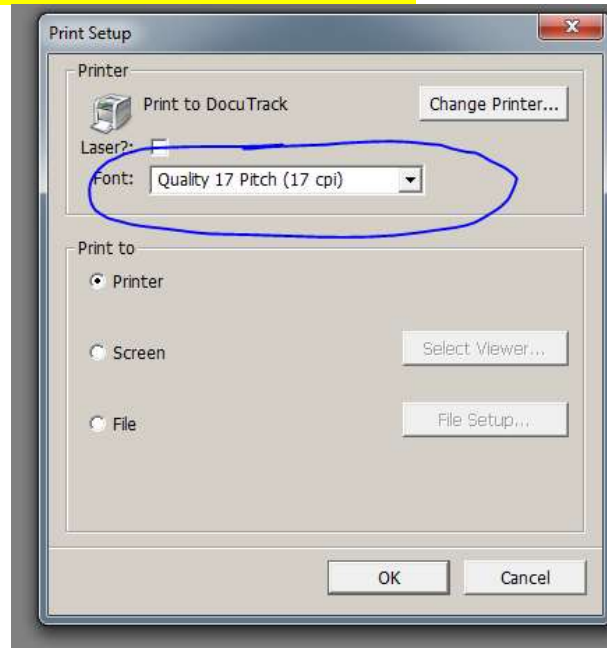

Tickler List

There are two dialogs in QS/1 PrimeCare or NRX that need to be configured when using the DocuTrack QS/1 eRx (NCPDP) script:

1) Tickler List: Saved Reports:

- The saved report that maps to **F3** needs to have its description updated.
- The description must contain '**Integra**' in the text (e.g. '**Integra**: DocuTrack eRx module')
 - If the description does not contain the word '**Integra**', the script will not be able to continue because downstream actions within the script rely on this saved report.

	Description	Default	Protect	Deleted
F3	Integra: DocuTrack eRx module	Yes	Yes	No
F4	ERIC WHITE TICKLER	No	No	No
F5	Test 1	No	No	No
F6	Test 2	No	No	No


2) Tickler List [Integra] (filter settings):

- The "[E-RX Data QHD].Ctrl/Reference#" needs to be selected and must be the **FIRST** item in the list.
 - If this field is not the *first* item in the list, the script will not be able to continue because this is what allows us to search for the eRx's Transaction Control Reference/eRx MessageID within QS/1.

Here is what the F3 Integra saved report should look like when configured:



Field to select:

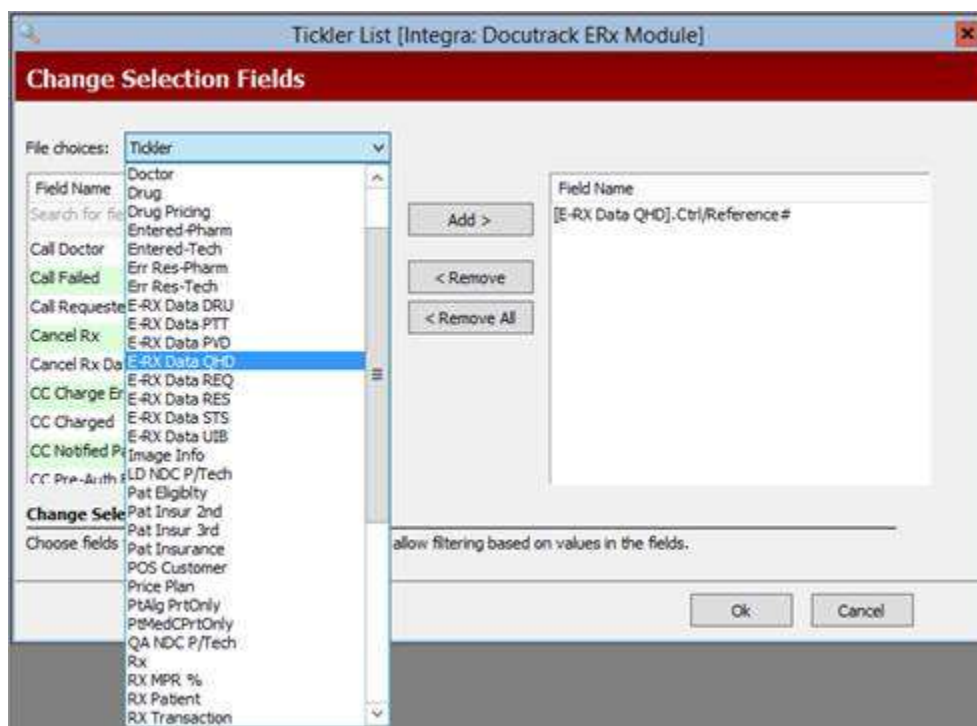

Troubleshooting

- Loading an eRx message in the Tickler scan may fail if the QS/1 application is full screen and the DocuTrack application is covering a portion of it. Please resize QS/1 application to be non-full screen. This is a known bug with the 3rd party toolkit.
- Patient barcodes will **not** contain store ID values. In the event the customer needs patient barcodes to be storeID specific, Client Services should configure store routing rules in the Business Unit/Interface Configuration workspace.
- QuickAdding an Ancillary by Primary ID and immediately attempting to launch the “Load NCPDP message” macro button, may result in a message dialog indicating “The association does not contain the NCPDP information required to complete the operation”. Save the document and reattempt.
- Workflow: stapling documents before prescriptions have been filled or verified may result in the following error: “The specified Document ID was not found in the system”.
- When customers use workflow, be aware that if the customer chooses to staple documents before the RX is filled, the temporary RX number will not be updated on the document. When QS/1 updates the RX number from a temporary number (03#####) to a permanent number (06##### or 07#####), QS/1 sends a direct connect call to unassociate the temporary RX number from the document ID and associate the new (permanent) RX number to the same document ID. In the event the document was stapled, the document will not be available the user will see the error above.
- See the table below for document description behaviors when QS/1 user clicks on the “Documents” button to associate an entity to a DocuTrack document.

QS/1 Service Pack	DocuTrack Client 6.5.0	DocuTrack Client 6.6.1
19.1.19	QS/1 prompts the user for document description.	“Automatically add DocuTrack document type on association” setting (Business Unit Interface Configuration section).

		-Checked or unchecked: QS/1 prompts the user for document description.
19.1.20 (?a-e) – unsure of letter (Note – check the 6.6.0/6.6.1 version to see if Brenda has gotten this info from QS/1)	Single click on “Documents button” -- QS/1 assigns the DocuTrack document type as the document description	“Automatically add DocuTrack document type on association” setting (Business Unit Interface Configuration section). - Unchecked: QS/1 prompts the user to select a QS/1 document description. - Checked: QS/1 assigns the DocuTrack document type as the document description.
19.1.20 (f-?) – unsure of letter (see note above)	QS/1 prompts the user for document description.	“Automatically add DocuTrack document type on association” setting (Business Unit Interface Configuration section). -Checked or unchecked: QS/1 prompts the user for document description.
19.1.21 (??) (See note above)	Single click on “Documents button” -- QS/1 assigns the DocuTrack document type as the document description	“Automatically add DocuTrack document type on association” setting (Business Unit Interface Configuration section). - Unchecked: QS/1 prompts the user to select a QS/1 document description. - Checked: QS/1 assigns the DocuTrack document type as the document description.

QS/1 Interface (NRx)

Version History

- 6.0.0 New
- 6.1.0 Added seed data LoadRX macro button and UIPath script for loading an RX in QS/1 from Audit Assist.
- 6.1.0 Added seed data Load eRX macro button and UIPath script for loading eRX data in QS/1's Tickler Scan.
- 6.4.0 Updated NCPDP Script to load eRX messages.
- 6.6.0 DirectLoad macro options for RX, Patient and NCPDP messages (See PC section above for details).

This interface is QS/1's retail or specialty version. (Does not support Delivery Manifests.)

Supported Features and Versions

PIS Versions: QS/1 19.1.18 or higher

Associations: RX, Patient, Ancillary, Physician, Facility, and Ancillary supported via Direct Connect COM (QS/1 client must be running on the same workstation as DocuTrack client).

Barcodes: Rx and Patient (No Query Entity)

Refill Submissions: Supported via HL7 feed.

Delivery Manifests: Supported via FileReader

Quick Load: No

Enterprise: Supported

Association Macro Buttons: Yes (See above for loading NCPDP eRX messages in QS/1)

QS/1 Configuration

See the QS/1 Configuration section above in QS/1 Primecare section. They are identical with the exception of Delivery Manifest configuration.

DocuTrack Configuration

See the DocuTrack Configuration section above in QS/1 Primecare section. They are identical with the exception of Delivery Manifest configuration.

QS/1 Enterprise Configuration

See the QS/1 Enterprise Configuration section above in QS/1 Primecare section. They are identical with the exception of Delivery Manifest configuration.

DocuTrack Enterprise Configuration

See the DocuTrack Enterprise Configuration section above in QS/1 Primecare section. They are identical with the exception of Delivery Manifest configuration.

Association Macro Configuration

See the Association Macro Configuration section above in QS/1 Primecare section. They are identical.

Refill Submission Status Codes

See the Refill Submission Status Codes section/table above in QS/1 Primecare section. They are identical.

Tickler List

See the Tickler List section above in QS/1 Primecare section. They are identical.

RESCOT Interface

Version History

5.1.2 – Added to 5.x product

6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions:	6.1.4 and higher
Associations:	Uses the keyboard wedge, not Direct Connect.
Barcodes:	Manifest and Rx (Query Local)
Refill Submissions:	Supported
Delivery Manifests:	Supported via File Reader
Quick Load:	No
Enterprise:	No
Notes:	Tote feature is not supported. Adjudication is supported.
Association Macro Buttons:	Yes (Logix)

Rescot Configuration

- Create the “Source Directory” or ensure the directory exists.
- Create a new “Target Directory” where DocuTrack will place refill submission files when users submit refills to Rescot.
- Share the new target directory so the DocuTrack server can attach to it.
- Create a local user DocMgmtApp with password that matches the password on DocuTrack server. Ensure the DocMgmtApp user has Modify or Full Control access to the source and target directories

DocuTrack Configuration

- Ensure system license includes at least one Pharmacy Information System licensed.
- Select the Keystroke Configuration File that matches the customer’s RX order screen.
 - Rescot systems that have the RX # located at the bottom of the screen will use the Keystroke configuration file labeled “Rescot keyboard interface configuration – New Rx from bottom of screen. (Tuscaloosa may use this file, please check with customer which screen a new RX# displays.)
 - Rescot systems that have the RX # displayed on the profile screen (navigate to next screen) will use the configuration file labeled “Rescot keyboard interface configuration – New RX from Profile screen”. (Forum may use this file, please check with customer which screen a new RX# displays.)
- Leave the User ID, Password, and URL fields as they are. These values are system-assigned.
- Set the Source Directory location to the UNC path to the Source share on the Rescot server.
- Set the Target Directory location to the UNC path to the Target share on the Rescot server.
- Ensure the Integra **File Reader** service is set to start automatically and restart on recovery
- In the DocuTrack Alerts Workspace, ensure the Delivery Manifest Error alert in the Alerts Workspace is active.

Troubleshooting

When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

RESCOT Refill Submission Status Codes

(5/15/14 – CS has confirmed these statuses)

Successful

Failed

Confirm the interface is working properly

- Restart the Integra File Reader service so it picks up the new settings.

- Process a manifest by placing one in the source directory. Ensure it disappears from the directory. Ensure that a “raw” and “cooked” file show up in the D:\DocMgmt\FreaderInterface directory with the data that was in the original source file.
- Associate a few prescriptions and manifests with documents.
- If some Rx barcode sample images are available, import them and ensure the Rx’s get associated with the imported images. If samples are not available, then manually associate some refill Rx’s. Submit some refill requests from these documents. Ensure that a submission file is created in the target directory on the Rescot server.

Hot Keys

CTRL + I	Show the interface information box.
CTRL + L	Label, File and Associate to current document.
CTRL + A	Associate Discontinued order to current document.
CTRL + F	File and Associate to current document.
CTRL + S	Lists all documents associated with the prescription in the Interface Search tab.
CTRL + O	Open associated document.

RNA Interface

Version History

5.1.2 - Added to 5.x product

6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions: 6.45 or higher

Associations: Uses the keyboard wedge, not Direct Connect.

Barcodes: Manifest and Rx (Query Local)

Refill Submissions: Supported.

Delivery Manifests: Supported via File Reader.

Quick Load: No

Enterprise: Supported

Association Macro Buttons: Yes (Logix)

RNA Configuration

- Create the “Source Directory” or ensure the directory exists.
- Create a new “Target Directory” where DocuTrack will place refill submission files when users submit refills to RNA. (N:\DocuTrackIN was suggested by RNA)
- Share the new target directory so the DocuTrack server can attach to it.
- Create a local user DocMgmtApp with password that matches the password on DocuTrack server. Set the user properties to “Password Never Expires”. Ensure the DocMgmtApp user has Modify or Full Control access to the source and target directories

DocuTrack Configuration

- Ensure system license includes at least one Pharmacy Information System licensed.
- Select the corresponding keyboard configuration in the Interface Options workspace.
- Leave the User ID, Password, and URL fields as they are. These values are system-assigned.
- Set the Source Directory location to the UNC path to the Source share on the RNA server.
- Set the Target Directory location to the UNC path to the Target share on the RNA server.
- Ensure the Integra **File Reader** service is set to start automatically and restart on recovery.
- In the DocuTrack Alerts Workspace, ensure the *Delivery Manifest Error* alert in the Alerts Workspace is active.

Troubleshooting

When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

RNA & RESCOT Refill Submission Status Codes

(5/15/14 – CS has confirmed these statuses)

Successful
Failed

Confirm the interface is working properly

- Restart the Integra File Reader service so it picks up the new settings.
- Process a manifest by placing one in the source directory. Ensure it disappears from the directory. Ensure that a “raw” and “cooked” file show up in the D:\DocMgmt\FreaderInterface directory with the data that was in the original source file.
- Associate a few prescriptions and manifests with documents.
- If some Rx barcode sample images are available, import them and ensure the Rx’s get associated with the imported images. If samples are not available, then manually associate some refill Rx’s. Submit some refill requests from these documents. Ensure that a submission file is created in the target directory on the RNA server.
- RNA will check the TargetFolder (DocuTrackIN) every 5 minutes for any existing *.txt files. They will process the file and then will move the file to N:TargetFolder\Processed folder with a *.DON extension. RNA will also create a report file in TargetFolder\Reports folder for each file request *.txt file. This report will have more information like the patient name and drug name for each RX request.

Hot Keys

CTRL + I	Brings up the interface information screen.
CTRL + A	Creates an association in DocuTrack.

RNA TRIAD Interface

Supported Features and Versions

PIS Versions: RNA TRIAD ver. 4.1
Associations: Uses the keyboard wedge
Refill Submissions: No
Quick Load: No
Delivery Manifests: No
Enterprise: No
Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Ensure system license includes at least one Pharmacy Information System licensed.
Select the corresponding keyboard configuration in the Interface Options workspace.

Troubleshooting

When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

RX30 and RX30 DOS Interfaces

Version History

5.1.2 – Interface added
5.1.7 – Interface tested (Non DOS version tested only)
5.4.0 – Interface tested for new non DOS version - RX30_InterfaceConfig2.xml
6.0.0 – Added support for Association Macro Buttons
6.6.1 – RX30_InterfaceConfig2.xml updated

Supported Features and Versions

PIS Versions: Unknown
Associations: Via Direct Connect COM (unsure of entity types)
RX associations via ScreenScraping (uses keyboard wedge)
Emulators: AnzioLite only
Barcodes: Rx Only
Refill Submissions: No
Delivery Manifests: No

Quick Load: No

Enterprise: Supported
Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

- Ensure system license includes at least one Pharmacy Information System licensed.
- Select the Rx30 version and corresponding keyboard configuration in the Interface Options workspace
- Choose 'Rx30DOS keyboard interface configuration' if client is connecting to Rx30 directly through a command prompt/shortcut to a shared executable on the Rx30 server
- Choose 'Rx30 keyboard interface configuration' if the client is connecting to Rx30 through a shell such as Anzio

Troubleshooting

When changes are made to the interface configuration store IDs or the interface screen scraping configuration.xml file, users must always log out of DocuTrack and back in when testing the associations. This will ensure the client is using the updated configurations.

Hot Keys - Note: Focus must be in the terminal emulator (not DocuTrack).

CTRL + I	Brings up the interface information screen.
CTRL + A	Creates an association in DocuTrack.
CTRL + S	Lists all documents associated with the prescription in the Interface Search tab.

Smart Pharmacy Interface

Version History

4.3.0 – Support for Direct Connect COM

6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions: Unknown
Associations: Rx via Direct Connect COM
Barcodes: Rx Only

Refill Submissions: No
Delivery Manifests: No

Quick Load: No
Enterprise: No
Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Enter a license in the Licenses workspace.

Standard Input Interface

Version History

5.1.4 – support added to 5.x line

6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions: Unknown
Associations: Supported via Direct Connect WEB services.
Quick Add allows “search” (Query Entity)

Barcodes: No
Delivery Manifests: No
Refill Submissions: No
Quick Load: No
Enterprise: No
Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Enter Standard Input in the Interface Options workspace

TIMS Interface

Version History

5.2.2 – support added for the 5.2.2 line

5.9.0 – support added for patient and manifest barcodes with Query Entity.

6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions: Unknown

Associations: Rx, Patients & Manifests via Direct Connect WEB Service

Barcodes: Patients & Manifests

Delivery Manifests: Insert Manifest via Direct Connect WEB services

Refill Submissions: No

Quick Load: Yes via Direct Connect WEB Service.

Enterprise: No

Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Select the TIMS Interface in the Interface Options workspace

WHS Interface

Version History

6.0.0 – Added support for Association Macro Buttons (Logix)

Supported Features and Versions

PIS Versions: Unknown

Associations: Rx, Patients & Manifests via Direct Connect WEB Service

Barcodes: Rx Only (Query Entity then Query Local)

Refill Submissions: Supported via Direct Connect WEB Service

Delivery Manifests: Unknown

Quick Load: Supported via via Direct Connect WEB Service

Enterprise: No

Association Macro Buttons: Yes (Logix)

DocuTrack Configuration

Enter a license in the Licenses workspace. Enter the *User ID*, *Password* and *URL* of the WHS system.

Notables

Originally labeled WHS for Woodhaven Healthcare Systems, the company has since been renamed to 'Remedi'.

Non-Pharmacy Information System

eMAR Interface

Version History

5.1.2 New

5.3.0 eMAR inserted documents source will resolve to EMAR system

5.4.0 Support added for Eldermark interface

The eMAR Interface allows an eMAR (Electronic Medication Administration Record) to be sent from an eMAR vendor to DocuTrack via DirectConnect. The eMAR data sent to DocuTrack is XML which populates a DocuTrack template that then becomes a new document. Note that a pharmacy information system must be configured in order to make this feature function.

Notables

- In 5.X, the eMAR interface can exist in more than one business unit in DocuTrack. The BusinessUnitCode attribute can be used to specify which eMAR interface to use. The business unit code is set in the business unit workspace in DocuTrack.
- EMAR inserted documents source will resolve to eMAR system (e.g. Accu-flo) when FacilityID and FacilityName in XML are blank.

Configuration

- License eMAR and an associate Pharmacy Information System – supported eMAR applications are configured inside the eMAR settings dialog.
- eMAR applications can be added, deleted or customized.
- For each eMAR application, the following can be turned on/off: RX, Patient and Facility associations as well as barcode evaluation.

Appendix A – Failed Fax Notification Examples

All fax providers except FaxCore and EtherFAX

FAX TRANSMISSION ERROR
We have received an incomplete transmission with the following information:
Fax was sent to:
Number of pages received:
Fax was received on:
<u>Please resend this fax.</u>

EtherFAX Failed Fax Notification


Fax Failure
Document number:
Department:
Faxed to:
Faxed at:
Faxed by:
Failure reason:

FaxCore Failed Fax Notification


FAILED FAX NOTIFICATION
A problem was encountered that prevented an outbound fax to be sent.
Note: Outbound faxes can fail for a number of reasons, e.g. the receiving fax line was busy. Please review the details to determine the appropriate course of action.
<u>Problem Details</u>

Appendix B – FACSys Settings Illustrations

The following illustration highlights the settings typically made within FACSys in order to work with DocuTrack.

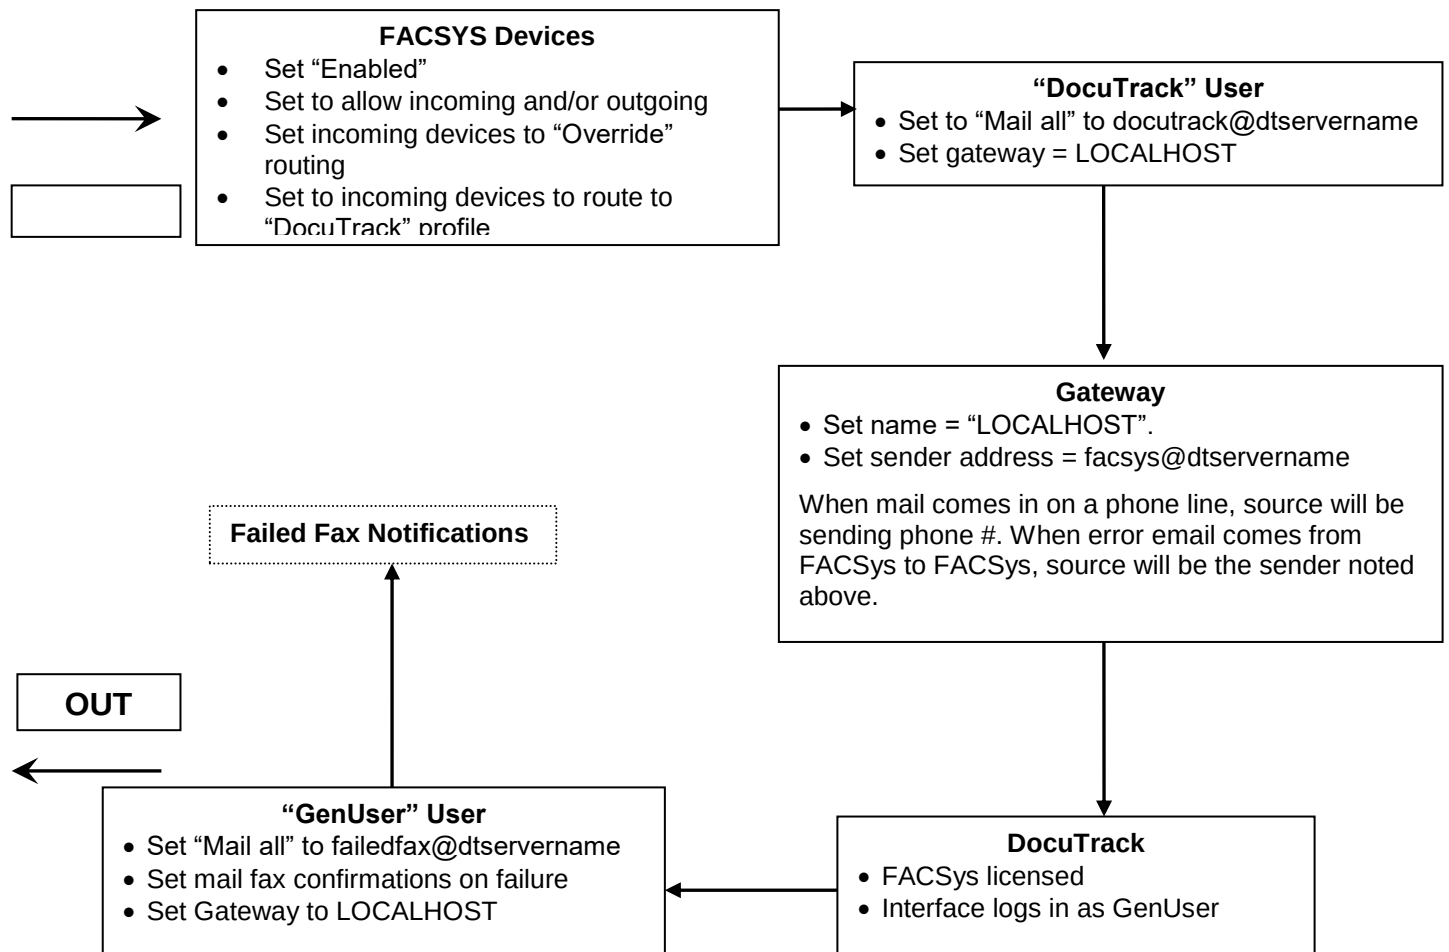

Appendix C – Fax System Diagram

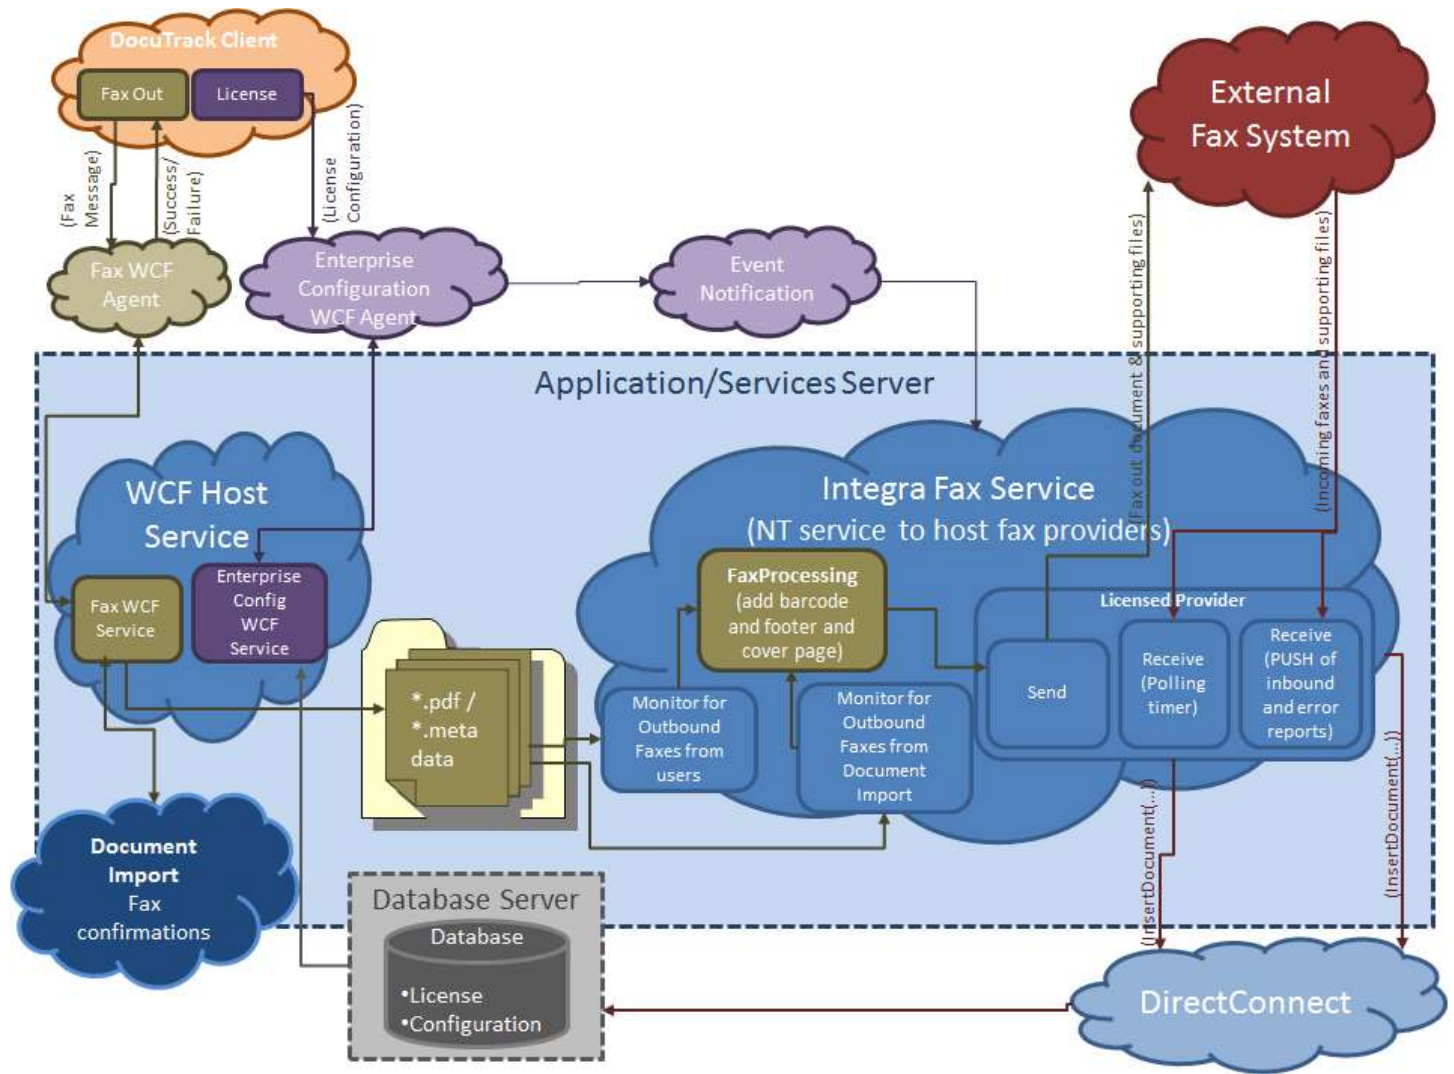

Appendix D - Form Fill In Fields (transmitted from Pharmacy Information System)

DocuTrack.UserId (logon name)	Manifest.UniqueID	AdditionalInfo.FacilityFax	RX.UniqueID
DocuTrack.UserFullName	Manifest.SecondaryID	AdditionalInfo.NsID	RX.SecondaryID
DocuTrack.SystemDate	Manifest.DeliveryDateTime	AdditionalInfo.NsName	RX.MedicationName
DocuTrack.SystemTime	Manifest.SignedByFirstName	AdditionalInfo.Room	RX.DateWritten
DocuTrack.SystemDateTime	Manifest.SignedByLastName	AdditionalInfo.Bed	RX.DateDispensed
Document.BusinessUnitName		AdditionalInfo.DispenseFor	RX.Status
Document.BusinessUnitCode	Patient.UniqueID	AdditionalInfo.CutoffDt	RX.Notes
Document.BusinessUnitAddress1	Patient.SecondaryID	AdditionalInfo.QtyWritten	RX.PatientUniqueID
Document.BusinessUnitAddress2	Patient.FirstName	AdditionalInfo.Sig	RX.FirstName
Document.BusinessUnitCity	Patient.LastName	AdditionalInfo.PSID	RX.LastName
Document.BusinessUnitState	Patient.Location	AdditionalInfo.QtyDispensed	RX.FacilityUniqueID
Document.BusinessUnitPostalCode	Patient.DOB	AdditionalInfo.PackSize	RX.PhysicianUniqueID
Document.BusinessUnitPhoneNumber	Patient.FacilityUniqueID	AdditionalInfo.PackSUM	RX.Quantity
Document.UniqueID (BU doc #)	Patient.DrugAllergy	AdditionalInfo.DosageForm	RX.RefillStatus
Document.DocumentNumber	Patient.OtherAllergy	AdditionalInfo.PackQty	RX.DoctorName
Document.GlobalDocumentID	Patient.Street1	AdditionalInfo.TotalPackageQty	RX.DoctorPhone
Document.Created	Patient.Street2	AdditionalInfo.DeaClass	RX.DoctorFax
Document.CustomValue1	Patient.City	AdditionalInfo.OrgDt	RX.DoctorAddressLine1
Document.CustomValue2	Patient.State	AdditionalInfo.AdminTimes	RX.DoctorAddressLine2
Document.CustomValue3	Patient.Zip	AdditionalInfo.DateWritten	RX.DoctorCity
Document.CustomValue4	Patient.Phone	AdditionalInfo.HoldDate	RX.DoctorState
Document.Department		AdditionalInfo.StartDate	RX.DoctorZip
Document.DocumentType	Physician.UniqueID	AdditionalInfo.TimesPerDay	RX.DoctorDEA
Document.Status	Physician.SecondaryID	AdditionalInfo.CCID	RX.DoctorNPI
Document.Priority	Physician.FirstName	AdditionalInfo.MOP	RX.PatientBirthDay
Document.CustomList3	Physician.LastName	AdditionalInfo.PriceCd	RX.PatientSSN
Document.CustomList4	Physician.Street1	AdditionalInfo.DaysSupply	RX.PatientRoom
	Physician.Street2	AdditionalInfo.PackType	RX.PatientAddressLine1
Ancillary.UniqueID	Physician.City	AdditionalInfo.DAW	RX.PatientAddressLine2
Ancillary.SecondaryID	Physician.State	AdditionalInfo.MCID	RX.PatientCity
Ancillary.AncillaryName	Physician.Zip	AdditionalInfo.NDC	RX.PatientState
Ancillary.DateWritten	Physician.LicenseNo	AdditionalInfo.MCName	RX.PatientZip
Ancillary.OrderType	Physician.Type	AdditionalInfo.TotalPrice	RX.FacilityName
Ancillary.Notes	Physician.Phone	AdditionalInfo.PharmName	RX.FacilityPhone
Ancillary.PatientUniqueID	Physician.PhoneExtension	AdditionalInfo.PharmStreet1	RX.FacilityFax
Ancillary.FirstName	Physician.AltPhone	AdditionalInfo.PharmStreet2	RX.FacilityAddressLine1
Ancillary.LastName	Physician.AltPhoneExtension	AdditionalInfo.PharmCity	RX.FacilityAddressLine2
Ancillary.FacilityUniqueID	Physician.Email	AdditionalInfo.PharmState	RX.FacilityCity
Ancillary.PhysicianUniqueID	Physician.Fax	AdditionalInfo.PharmZip	RX.FacilityState
Ancillary.Quantity	Physician.UserIDQual	AdditionalInfo.PharmPhone	RX.FacilityZip
Ancillary.RefillStatus	Physician.UserID1	AdditionalInfo.PharmFax	RX.RxOriginalQuantity
	Physician.UserID2Qual	AdditionalInfo.AltPharmPhone	RX.RxAuthorizationNumber
Facility.UniqueID	Physician.UserID2	AdditionalInfo.PharmAltFax	RX.Sig
Facility.SecondaryID	Physician.Status		RX.AdminTimes
Facility.Name	Physician.DEASuffix	RX.Price Plan 1 Name	RX.CCID
Facility.Street1	Physician.AllowC2	RX.Price Plan 1 Phone	RX.DaysSupply
Facility.Street2	Physician.AllowC3toC5	RX.Price Plan 1 Policy ID	RX.DAW
Facility.City		RX.Price Plan 2 Name	RX.HoldDate
Facility.Zip		RX.Price Plan 2 Phone	RX.MCID
Facility.State	RX.PackType	RX.Price Plan 2 Policy ID	RX.MOP
	RX.PriceCD	RX.Price Plan 3 Name	
	RX.NDC	RX.Price Plan 3 Phone	
	RX.StartDate	RX.Price Plan 3 Policy ID	
	RX.TimesPerDay		