

ROADEF / EURO Challenge 2018

- Final Submission-

Marc-Antoine Augé (Team J5)

January 23th, 2019

Abstract TODO

Our solution is simply a greedy-constructive algorithm, preceded by a thorough analysis of the problem in order to reduce the solution set. We modeled the solution set as a subset of :

$$\mathcal{S}_0^N := ([0, N] \times \{0, 1\} \times [0, K - 1] \times [0, H - 1] \times [0, W - 1])^N$$

Where N is the number of items, $\{0, 1\}$ refers to the orientation of each item, K is the number of bins available (100) and H and W are the dimensions of each bin (6000×3210).

Each $s \in S_0$ is called a *location* and is basically, an item, an orientation, a bin and a position for the lower-left corner on this bin. A solution is a vector of S_0^N .

Definition 1 (Notations)

1 Introduction

The optimization algorithm described rests on two algorithms: one generates the order of items wanted at the output and the other builds a cutting pattern corresponding to this sequence. The first algorithm is simply a localsearch on this sequence. As the second algorithm is called at every sequence generated, it has to be both as fast as possible and as good as possible. It's a greedy-constructive algorithm based on complex structures with lot of engineering.

2 The LocalSearch

As the goal of this algorithm is to browse only possible sequences, the sequences set is modeled as follow.

Definition 2 (Notations) *Let H the height of a plate and W its width. Let K the number of stacks. Let N the number of items.*

Definition 3 (A Sequence) *Let n_k , $k \in [0, K - 1]$ the number of items in the stack k . A sequence is defined as a permutation of the sequence:*

$$0, \dots, 0 \text{ (} n_0 \text{ times)}, \dots, k, \dots, k \text{ (} n_k \text{ times)}, \dots, K, \dots, k \text{ (} n_K \text{ times)}$$

It corresponds to the sequence of stacks called. For example if the instance has three stacks $s_0 = 0, 1, 2$ (stack 0 contains three elements, 0 then 1 then 2), $s_1 = 3$ and $s_2 = 4, 5$, then:

- *The sequence 0, 0, 1, 2, 0, 2 means item 0, item 1, item 3, item 4, item 2, item 5.*
- *The sequence 0, 1, 2, 2, 0, 0 means item 0, item 3, item 4, item 5, item 1, item 2*

With this notation, every sequence is feasible (if there are enough plates available, we can put one item per plate).

2.1 Moves

The moves used in this LocalSearch are basic: swap (change two random elements in the sequence), K-Successive Permutation (permutute K elements who are successive) and K permutation.

If a move changes the same stacks (for example, if there is only one stack), it is not tested.

2.2 Objectives

The LocalSearch main objective is the surface occupation but LocalSearch also have lexicographic objectives: the surface occupation of every plate. These objectives are prioritized from the first plate to the last one. It means that if two solutions have the same score, the better is the solution with the highest occupation ratio for the first plate, and if equals, for the second plate etc. Two solutions are equals if and only if the score and the surface occupations are the same. A move is accepted if it improve the solution.

3 The Constructive Algorithm

3.1 The problem

This algorithm takes as input the output sequence of item. His goal is to build the better solution possible which respects this sequence.

Let N the number of items and (i_0, \dots, i_N) the input sequence¹. A cutting pattern is modeled as a sequence of *Locations* where a *Location* is simply an item, coordinates (x, y) and a bin index) and a boolean meaning if the item is rotated or not.

Definition 4 (Location) Let L a location, we denote (L_x, L_y) the coordinates of the lower-left corner, (L_{xw}, L_{yh}) the coordinates of the top-right corner.

Problem 1 (Constructive Algorithm Problem) Given an input items sequence (i_0, \dots, i_N) , find the locations sequence (L_0, \dots, L_n) minimizing the surface occupation and respecting all the constraints.

To obtain this locations sequence, the algorithm is constructive and finds locations one after another. It builds the locations from the first bin to the last one and only need infos on the locations in the current bin.

Problem 2 Let $0 \leq k < N - 1$, let (L_0, \dots, L_k) a locations sequence who respects all the constraints (except cutting all items).

Find L_{k+1} a location such as (L_0, \dots, L_{k+1}) is feasible (and as good as possible).

3.2 Theory

Let $0 \leq k < N - 1$, let (L_0, \dots, L_k) a locations sequence who respects all the constraints (except cutting all items). Without loss of generality, suppose that all locations are on the same bin.

In the two next sections (about The Green Star and The Red Monster), defects are ignored.


3.2.1 The Green Star

The Green Star is a complex structure introduced to translate into the problem the idea that between two locations at the same y , the one with the lower x is better (same by permutating x and y) than the other. This idea is wrong in the whole problem if we consider the constraints on the cutting pattern but remains a good heuristic.


Definition 5 (The Green Star) The Green Star of (L_0, \dots, L_k) is defined by $(x, y) \in [0, W] \times [0, H]$ such as there exists $i, j \leq k$ such that $x \leq s_{xw}^i$ and $y \leq s_{yh}^j$.

Conjecture 1 (The Green Star Condition) Every L_{k+1} must be out of the Green Star of (L_0, \dots, L_k) to be feasible.

¹Even if the LocalSearch works on *stacks sequence*, it gives to the Constructive Algorithm an *items sequence*.

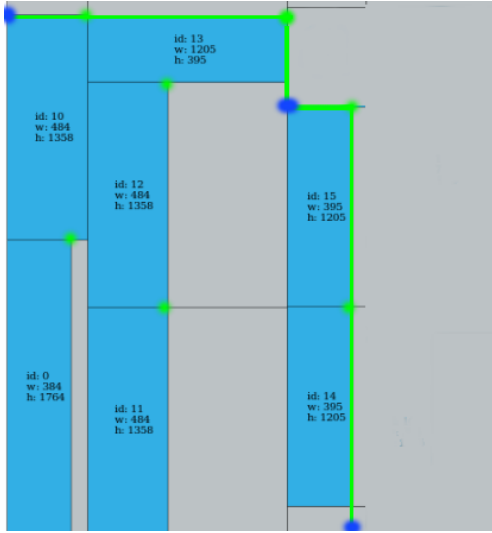

(a) The Green Star defines the few possible locations (blue points) which cannot be easily improved.

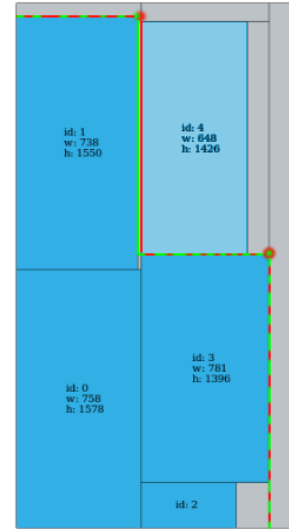

(b) The Green Star VS the Red Monster : the Green Star tries a location more in the left that the Red Monster and therefore ignores the optima.

Figure 1: Structures discovered and used

The best locations according to the Green Star are the blue points in Figure ?? : each one is feasible (expecting constraints about the trees like the depth, the trimming, the minwaste...) and every other location is less good.

The implementation of Green Star only need the list of points who are in its border, other points can be forgot. The implementation give, if p is the number of points at its border (in practice $p < 5$).

- Add a new point can be is at worst in $O(p)$ (it's possible to sort the points by x to be more efficient).
- Find all solutions possible in $O(p)$.

The Green Star, with the defects management and the tree checker/builder and with a little greedy algorithm can find feasible solutions with a surface occupation ratio of 72%. It was the algorithm used for the sprint phase.

3.2.2 The Red Monster

As the *Green Star Algorithm* does not find the optimum of instance *A1*, the Red Monster is the correction of the Green Star to keep optima locations. It is much more complex than the Green Star, since the Red Monster memorizes when each item must be cut, in order to remove unfeasible locations due to the cutting order. The figure 1.b shows the differences between both structures and how the Red Monster is able to accept the optima of *A1*, unlike the Green Star.

3.2.3 Defects Management

The idea to manage defects is to find a Location without look at defects (with the Red Monster Algorithm) and then see if it contains defects. If not, the location is correct. If they are defects, the Defects Mananager Algorithm move the location (increase x and y) in order to find all feasible locations. It keeps only *best locations* in the way that if two locations have the same x , the location with the lower y is better.

3.2.4 Cutting Pattern Checker and Builder

Because the Red Monster Algorithm is not able to find locations which are respecting all the constraints, another algorithm try to build a correct tree cutting pattern from (L_0, \dots, L_{k+1}) . The location L_{k+1} is feasible if and only if a tree cutting pattern can be build.

To build this cutting pattern, the idea is to look at all the cuts which may be possible, they are the extremities of each item. Then the algorithm determines for each if it's really possible (is this cut through another item? is this cut breaking the output sequence asked?) and made the cuts. This algorithm is called recursively on each node.

Many improvements have been made on this algorithm because it's the slowest algorithm in this software. For example, as the algorithm is mainly needed to check if the last location is feasible, it works better if the cuts are made from right to left (if it fails, it fails sooner).

3.3 Practice

3.3.1 DeepScore algorithm

The Constructive Algorithm have to find a way to find the best location among all of them given by the Red Monster Algorithm. To do this, the idea is to have a greedy algorithm with a backtracking. It means that to find the better location, it tests all the locations possible and all their descendants for many generations (3 to 4 generations in practice).

3.3.2 Improvements

Don't compute useless unmodified bins As the items sequence in input does not change a lot, many bins are unmodified. For example all the bins before the bin which contains the first item position modified. They are not computed another time.

There are no detections of unmodified bins at the end yet.

Pruning less good solutions If a location abscissa is after the best abscissa found (total surface occupation), it's less good so the location is automatically refused.

Storing the search tree The search tree is computed many times because it's computed on 4 generations to find the best location for first item, then to find the best location for second item... Therefore, the tree can be saved. Now, he only has to be a little bit improved to find the second best location etc.

Use our algorithm as bound The search tree can be really big if you evaluate every solution. As the Red Monster algorithm is really fast, it can build this tree fast but it's slow to build the tree. Therefore the idea is to build the tree once without using the Tree Checker and after that read this tree, look first to the good locations without tree checking and stop once a correct location is find. By doing this, much less locations are checked than before.

4 Results

Our results were obtained on a computer with **Intel(R) Core(TM) i7-3537U CPU @ 2.00GHz** (4 Cores) and 8Go Ram but our algorithm is mono-thread.