




# Linux Kernel and Driver Development Training

## Linux Kernel and Driver Development Training

### Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Latest update: July 23, 2014.  
Document updates and sources:  
<http://free-electrons.com/doc/training/linux-kernel>  
Corrections, suggestions, contributions and translations are welcome!

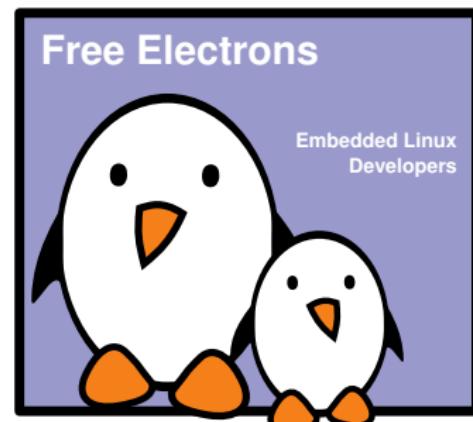



# Rights to copy

© Copyright 2004-2014, Free Electrons

**License: Creative Commons Attribution - Share Alike 3.0**

<http://creativecommons.org/licenses/by-sa/3.0/legalcode>

You are free:

- ▶ to copy, distribute, display, and perform the work
- ▶ to make derivative works
- ▶ to make commercial use of the work

Under the following conditions:

- ▶ **Attribution.** You must give the original author credit.
- ▶ **Share Alike.** If you alter, transform, or build upon this work, you may distribute the resulting work only under a license identical to this one.
- ▶ For any reuse or distribution, you must make clear to others the license terms of this work.
- ▶ Any of these conditions can be waived if you get permission from the copyright holder.

Your fair use and other rights are in no way affected by the above.



## Electronic copies of these documents

- ▶ Electronic copies of your particular version of the materials are available on:  
<http://free-electrons.com/doc/training/linux-kernel>
- ▶ Open the corresponding documents and use them throughout the course to look for explanations given earlier by the instructor.
- ▶ You will need these electronic versions because we neither print any index nor any table of contents (quite high environmental cost for little added value)
- ▶ For future reference, see the first slide to see where document updates will be available.



# Hyperlinks in the document

There are many hyperlinks in the document

- ▶ Regular hyperlinks:

`http://kernel.org/`

- ▶ Kernel documentation links:

`Documentation/kmemcheck.txt`

- ▶ Links to kernel source files and directories:

`drivers/input`

`include/linux/fb.h`

- ▶ Links to the declarations, definitions and instances of kernel symbols (functions, types, data, structures):

`platform_get_irq()`

`GFP_KERNEL`

`struct file_operations`



# Free Electrons at a glance

- ▶ Engineering company created in 2004  
(not a training company!)
- ▶ Locations: Orange, Toulouse, Saint Etienne / Lyon (France)
- ▶ Serving customers all around the world  
See <http://free-electrons.com/company/customers/>
- ▶ Head count: 9  
Only Free Software enthusiasts!
- ▶ Focus: Embedded Linux, Linux kernel, Android Free Software / Open Source for embedded and real-time systems.
- ▶ Activities: development, training, consulting, technical support.
- ▶ Added value: get the best of the user and development community and the resources it offers.



# Free Electrons on-line resources

- ▶ All our training materials:  
<http://free-electrons.com/docs/>
- ▶ Technical blog:  
<http://free-electrons.com/blog/>
- ▶ Quarterly newsletter:  
<http://lists.free-electrons.com/mailman/listinfo/newsletter>
- ▶ News and discussions (Google +):  
<https://plus.google.com/+FreeElectronsDevelopers>
- ▶ News and discussions (LinkedIn):  
<http://linkedin.com/groups/Free-Electrons-4501089>
- ▶ Quick news (Twitter):  
[http://twitter.com/free\\_electrons](http://twitter.com/free_electrons)
- ▶ Linux Cross Reference - browse Linux kernel sources on-line:  
<http://lxr.free-electrons.com>



## Mailing lists for session participants

If you participated to a course taught by Free Electrons, you can subscribe to our mailing lists dedicated to our training customers:

- ▶ To ask questions about the topics covered by the courses, and to get a first level of technical support for issues that your are facing in real life or with your own hardware.
- ▶ To share your experience with other people having taken the same course and done the same practical labs.
- ▶ To share further comments and suggestions about course contents.
- ▶ To get news about important updates to the course materials.

See <http://free-electrons.com/training/mailing-lists>  
A simple way to register: fill the form on <http://j.mp/1r1HhkZ>




# Generic course information

# Generic course information

## Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

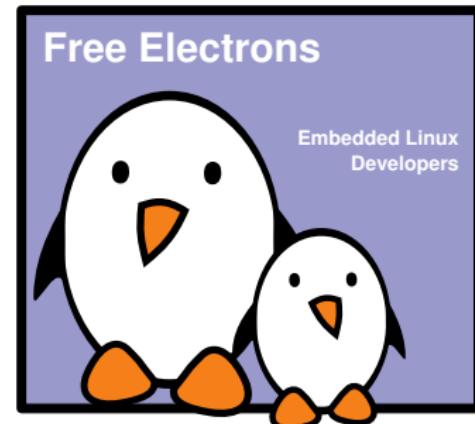




# Hardware used in this training session

## BeagleBone Black, from CircuitCo

- ▶ Texas Instruments AM335x (ARM Cortex-A8)
- ▶ Powerful CPU, with 3D acceleration, additional processors (PRUs) and lots of peripherals.
- ▶ 512 MB of RAM
- ▶ 2 GB of on-board eMMC storage (4 GB in Rev C)
- ▶ USB host and USB device ports
- ▶ microSD slot
- ▶ HDMI port
- ▶ 2 x 46 pins headers, with access to many expansion buses (I2C, SPI, UART and more)
- ▶ A huge number of expansion boards, called *capes*. See <http://beagleboardtoys.com/>.

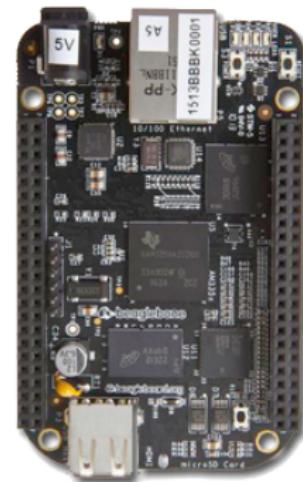



# Shopping list: hardware for this course

- ▶ BeagleBone Black - Multiple distributors:  
See <http://beagleboard.org/Products/>
- ▶ Nintendo Nunchuck with UEXT connector:  
Olimex: <http://j.mp/1dTYLfs>
- ▶ USB Serial Cable - Male ends:  
Olimex: <http://j.mp/1eUuY2K>
- ▶ USB Serial Cable - Female ends:  
Olimex: <http://j.mp/18Hk8yF>
- ▶ Breadboard jumper wires - Male ends:  
Olimex: <http://j.mp/IUaBsr>





# Participate!

During the lectures...

- ▶ Don't hesitate to ask questions. Other people in the audience may have similar questions too.
- ▶ This helps the trainer to detect any explanation that wasn't clear or detailed enough.
- ▶ Don't hesitate to share your experience, for example to compare Linux / Android with other operating systems used in your company.
- ▶ Your point of view is most valuable, because it can be similar to your colleagues' and different from the trainer's.
- ▶ Your participation can make our session more interactive and make the topics easier to learn.



# Practical lab guidelines

During practical labs...

- ▶ We cannot support more than 8 workstations at once (each with its board and equipment). Having more would make the whole class progress slower, compromising the coverage of the whole training agenda (exception for public sessions: up to 10 people).
- ▶ So, if you are more than 8 participants, please form up to 8 working groups.
- ▶ Open the electronic copy of your lecture materials, and use it throughout the practical labs to find the slides you need again.
- ▶ Don't copy and paste from the PDF slides.  
The slides contain UTF-8 characters that look the same as ASCII ones, but won't be understood by shells or compilers.



# Cooperate!

As in the Free Software and Open Source community, cooperation during practical labs is valuable in this training session:

- ▶ If you complete your labs before other people, don't hesitate to help other people and investigate the issues they face. The faster we progress as a group, the more time we have to explore extra topics.
- ▶ Explain what you understood to other participants when needed. It also helps to consolidate your knowledge.
- ▶ Don't hesitate to report potential bugs to your instructor.
- ▶ Don't hesitate to look for solutions on the Internet as well.



# Command memento sheet

- ▶ This memento sheet gives command examples for the most typical needs (looking for files, extracting a tar archive...)
- ▶ It saves us 1 day of UNIX / Linux command line training.
- ▶ Our best tip: in the command line shell, always hit the Tab key to complete command names and file paths. This avoids 95% of typing mistakes.
- ▶ Get an electronic copy on [http://free-electrons.com/doc/training/embedded-linux/command\\_memento.pdf](http://free-electrons.com/doc/training/embedded-linux/command_memento.pdf)





# vi basic commands

- ▶ The vi editor is very useful to make quick changes to files in an embedded target.
- ▶ Though not very user friendly at first, vi is very powerful and its main 15 commands are easy to learn and are sufficient for 99% of everyone's needs!
- ▶ Get an electronic copy on [http://free-electrons.com/doc/training/embedded-linux/vi\\_memento.pdf](http://free-electrons.com/doc/training/embedded-linux/vi_memento.pdf)
- ▶ You can also take the quick tutorial by running vimtutor. This is a worthy investment!

**vi basic commands**  
Summary of basic vi/vim commands  
Source: http://www.tldp.org/LDP/abs/html/vi.html

**Entering command mode**  
(ctrl) Esc exiting mode. Keyboard keys are interpreted as commands.

**Moving characters**  
1. **left**: move left one character left.  
2. **right**: move right one character right.  
3. **up**: move several lines up the current screen.  
**ctrl-U**: move several lines down the current screen.  
**ctrl-K**: delete the current or previous page backward.  
4. **down**: move down one character.  
5. **end**: move to the end of the current line.  
**Home**: move to the beginning of the current line.  
**End**: move to the end of the current line and the cursor position is B.

**Entering editing mode**  
1. **i**: insert mode. Insert characters after the cursor.  
2. **a**: append mode. Append characters after the cursor.  
3. **c**: change mode. Change characters after the cursor.  
4. **o**: open mode. Insert a new line before the cursor.  
5. **ctrl-O**: write the current file and exit the editor.

**Replacing characters, words and lines**  
All deletion characters, words and lines are copied to the clipboard buffer.  
1. **d**: delete the current character.  
2. **D**: delete the current line.  
3. **dd**: delete the current word.  
4. **ctrl-D**: delete the remainder of the line after the cursor.

**Copying and pasting**  
1. **y**: copy the current character to the clipboard buffer.  
2. **yy**: copy the current line to the clipboard buffer.  
3. **ctrl-Y**: paste the clipboard buffer after the current line.  
4. **p**: paste the clipboard buffer before the current line.  
5. **ctrl-P**: paste the clipboard buffer above the current line.

**Deleting characters, words and lines**  
All deletion characters, words and lines are copied to the clipboard buffer.  
1. **d**: delete the current character.  
2. **D**: delete the current line.  
3. **dd**: delete the current word.  
4. **ctrl-D**: delete the remainder of the line after the cursor.

**Replacing characters**  
Replace the remainder of the line after the cursor.  
1. **ctrl-H**: delete the current character.

**Replacing lines**  
Replace the current line or several lines after the cursor.  
1. **ctrl-R**: replace the first occurrence of search after the cursor.  
2. **ctrl-W**: replace the last occurrence of search before the cursor.  
3. **ctrl-U**: replace all occurrences of search in the line before the cursor.

**Replacing strings**  
Can also be done with **ctrl-R** (replace) and replacing lines, and then using a regular expression. (replace)

**Right and left**: Between line numbers n and m, substitute all \$p with \$q and \$q with \$r.

**ctrl-W**: In the whole file (i.e. for lines), substitute all \$p with \$q.

**ctrl-U**: Undo the last command.

**Applying a command several times - Examples**  
1. **ctrl-U**: Apply a command T times.  
2. **ctrl-U**: Apply a command T times.  
3. **ctrl-U**: Apply a command T times.  
4. **ctrl-U**: Apply a command T times.

**Ctrl**: Undo the screen.

**Exiting and saving**  
1. **q**: save current file and exit.  
2. **q! file**: save current file to the file file.  
3. **file**: write file buffer to the file file.

**Getting further**  
1. **man vi**: read the man page about vi.  
2. **info vi**: read the info page about vi.  
3. **vimtutor**: run the quick tutorial.  
4. **vimtutor**: run the quick tutorial.  
5. **man vimtutor**: read the man page about vimtutor.  
6. **info vimtutor**: read the info page about vimtutor.



Free Electrons. Embedded Linux, kernel, drivers and Android development, consulting, training and support. <http://free-electrons.com>



# Practical lab - Training Setup



## Prepare your lab environment

- ▶ Download the lab archive
- ▶ Enforce correct permissions



# Linux Kernel Introduction


# Linux Kernel Introduction

## Free Electrons

© Copyright 2004-2014, Free Electrons.

Creative Commons BY-SA 3.0 license.

Corrections, suggestions, contributions and translations are welcome!

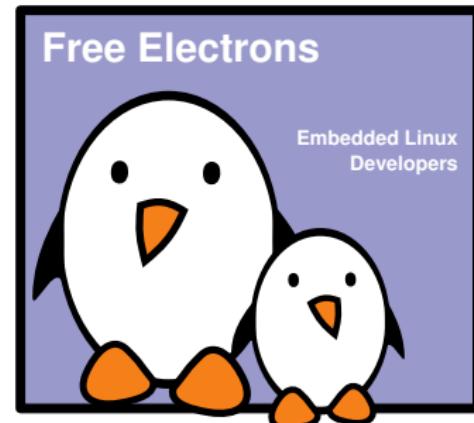



# Linux Kernel Introduction

## Linux features



# History

- ▶ The Linux kernel is one component of a system, which also requires libraries and applications to provide features to end users.
- ▶ The Linux kernel was created as a hobby in 1991 by a Finnish student, Linus Torvalds.
  - ▶ Linux quickly started to be used as the kernel for free software operating systems
- ▶ Linus Torvalds has been able to create a large and dynamic developer and user community around Linux.
- ▶ Nowadays, more than one thousand people contribute to each kernel release, individuals or companies big and small.




# Linux kernel key features

- ▶ Portability and hardware support. Runs on most architectures.
- ▶ Scalability. Can run on super computers as well as on tiny devices (4 MB of RAM is enough).
- ▶ Compliance to standards and interoperability.
- ▶ Exhaustive networking support.
- ▶ Security. It can't hide its flaws. Its code is reviewed by many experts.
- ▶ Stability and reliability.
- ▶ Modularity. Can include only what a system needs even at run time.
- ▶ Easy to program. You can learn from existing code. Many useful resources on the net.



# Linux kernel in the system

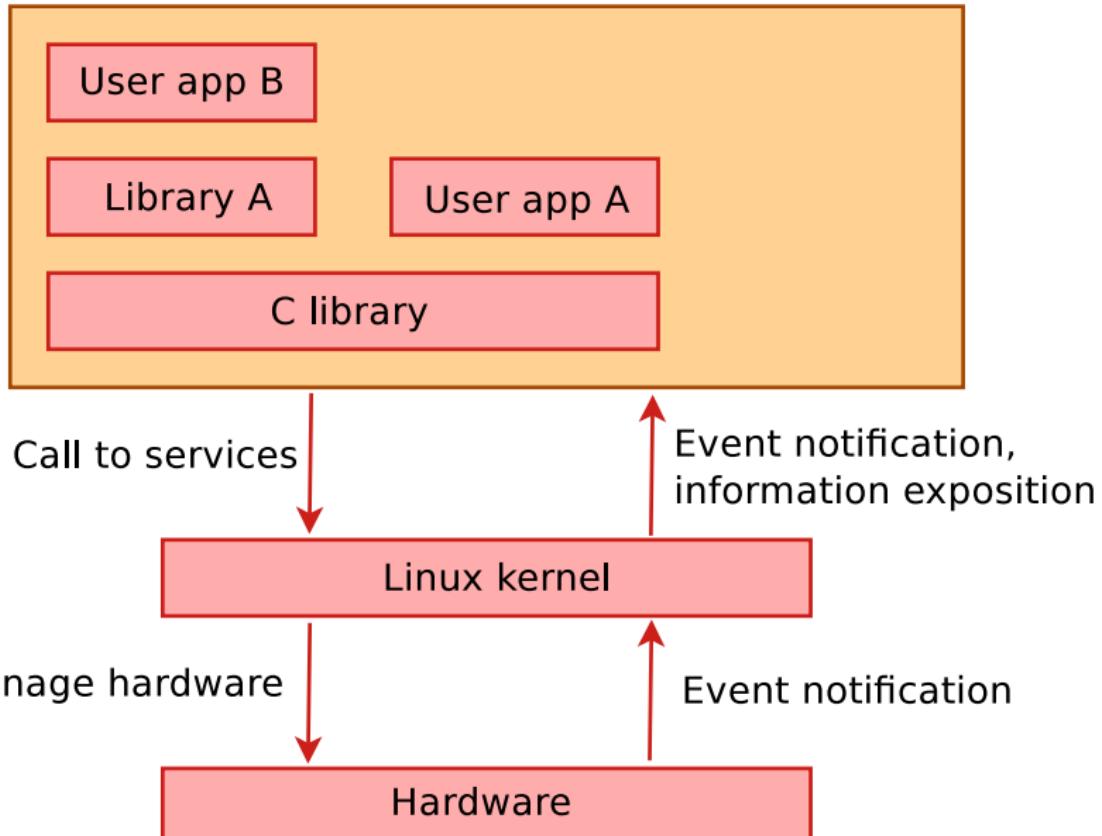



# Linux kernel main roles

- ▶ **Manage all the hardware resources:** CPU, memory, I/O.
- ▶ **Provide a set of portable, architecture and hardware independent APIs** to allow user space applications and libraries to use the hardware resources.
- ▶ **Handle concurrent accesses and usage** of hardware resources from different applications.
  - ▶ Example: a single network interface is used by multiple user space applications through various network connections. The kernel is responsible to “multiplex” the hardware resource.



# System calls

- ▶ The main interface between the kernel and user space is the set of system calls
- ▶ About 300 system calls that provide the main kernel services
  - ▶ File and device operations, networking operations, inter-process communication, process management, memory mapping, timers, threads, synchronization primitives, etc.
- ▶ This interface is stable over time: only new system calls can be added by the kernel developers
- ▶ This system call interface is wrapped by the C library, and user space applications usually never make a system call directly but rather use the corresponding C library function





# Pseudo filesystems

- ▶ Linux makes system and kernel information available in user space through **pseudo filesystems**, sometimes also called **virtual filesystems**
- ▶ Pseudo filesystems allow applications to see directories and files that do not exist on any real storage: they are created and updated on the fly by the kernel
- ▶ The two most important pseudo filesystems are
  - ▶ `proc`, usually mounted on `/proc`:  
Operating system related information (processes, memory management parameters...)
  - ▶ `sysfs`, usually mounted on `/sys`:  
Representation of the system as a set of devices and buses.  
Information about these devices.



# Inside the Linux kernel

## Linux Kernel

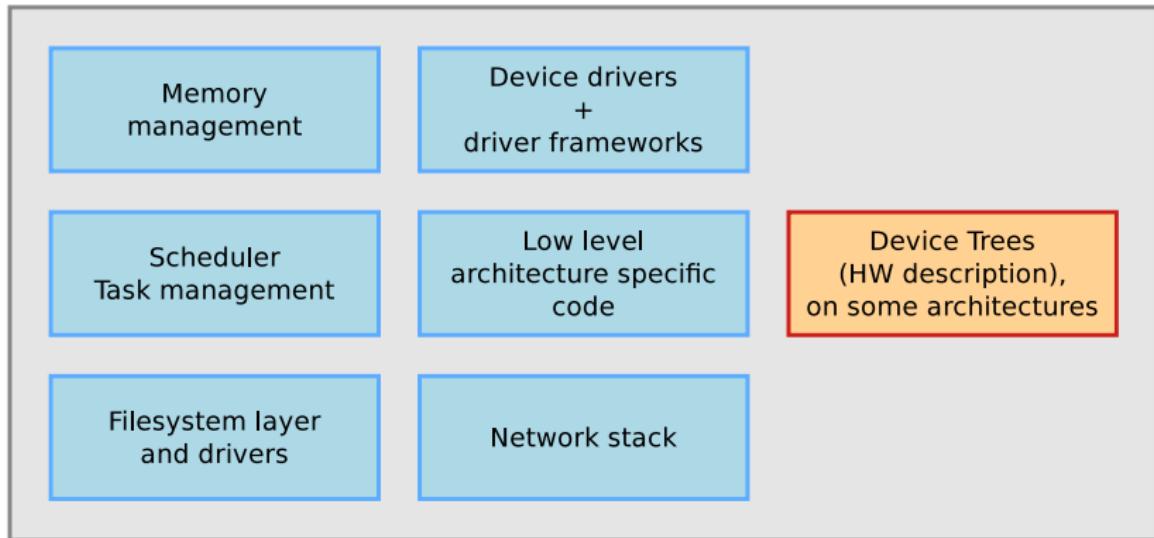

Implemented mainly in C,  
a little bit of assembly.



Written in a Device Tree  
specific language.



# Supported hardware architectures

- ▶ See the `arch/` directory in the kernel sources
- ▶ Minimum: 32 bit processors, with or without MMU, and `gcc` support
- ▶ 32 bit architectures (`arch/` subdirectories)  
Examples: `arm`, `avr32`, `blackfin`, `c6x`, `m68k`, `microblaze`,  
`mips`, `score`, `sparc`, `um`
- ▶ 64 bit architectures:  
Examples: `alpha`, `arm64`, `ia64`, `tile`
- ▶ 32/64 bit architectures  
Examples: `powerpc`, `x86`, `sh`, `sparc`
- ▶ Find details in kernel sources: `arch/<arch>/Kconfig`,  
`arch/<arch>/README`, or `Documentation/<arch>/`




# Embedded Linux Kernel Usage

## Embedded Linux Kernel Usage

### Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

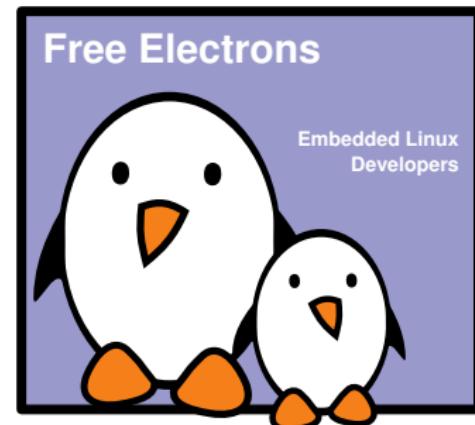



## Linux kernel sources



# Location of kernel sources

- ▶ The official versions of the Linux kernel, as released by Linus Torvalds, are available at <http://www.kernel.org>
  - ▶ These versions follow the development model of the kernel
  - ▶ However, they may not contain the latest development from a specific area yet. Some features in development might not be ready for mainline inclusion yet.
- ▶ Many chip vendors supply their own kernel sources
  - ▶ Focusing on hardware support first
  - ▶ Can have a very important delta with mainline Linux
  - ▶ Useful only when mainline hasn't caught up yet.
- ▶ Many kernel sub-communities maintain their own kernel, with usually newer but less stable features
  - ▶ Architecture communities (ARM, MIPS, PowerPC, etc.), device drivers communities (I2C, SPI, USB, PCI, network, etc.), other communities (real-time, etc.)
  - ▶ No official releases, only development trees are available.



# Getting Linux sources

- ▶ The kernel sources are available from  
<http://kernel.org/pub/linux/kernel> as **full tarballs** (complete kernel sources) and **patches** (differences between two kernel versions).
- ▶ However, more and more people use the `git` version control system. Absolutely needed for kernel development!
  - ▶ Fetch the entire kernel sources and history  
`git clone git://git.kernel.org/pub/scm/linux/kernel/git/torvalds/linux.git`
  - ▶ Create a branch that starts at a specific stable version  
`git checkout -b <name-of-branch> v3.11`
  - ▶ Web interface available at <http://git.kernel.org/cgit/linux/kernel/git/torvalds/linux.git/tree/>.
  - ▶ Read more about Git at <http://git-scm.com/>



# Linux kernel size (1)

- ▶ Linux 3.10 sources:
  - Raw size: 573 MB (43,000 files, approx 15,800,000 lines)
  - `gzip` compressed tar archive: 105 MB
  - `bzip2` compressed tar archive: 83 MB (better)
  - `xz` compressed tar archive: 69 MB (best)
- ▶ Minimum Linux 2.6.29 compiled kernel size with `CONFIG_EMBEDDED`, for a kernel that boots a QEMU PC (IDE hard drive, ext2 filesystem, ELF executable support):
  - 532 KB (compressed), 1325 KB (raw)
- ▶ Why are these sources so big?

Because they include thousands of device drivers, many network protocols, support many architectures and filesystems...
- ▶ The Linux core (scheduler, memory management...) is pretty small!



## Linux kernel size (2)

As of kernel version 3.10.

- ▶ drivers/: 49.4%
- ▶ arch/: 21.9%
- ▶ fs/: 6.0%
- ▶ include/: 4.7%
- ▶ sound/: 4.4%
- ▶ Documentation/: 4.0%
- ▶ net/: 3.9%
- ▶ firmware/: 1.0%
- ▶ kernel/: 1.0%
- ▶ tools/: 0.9%
- ▶ scripts/: 0.5%
- ▶ mm/: 0.5%
- ▶ crypto/: 0.4%
- ▶ security/: 0.4%
- ▶ lib/: 0.4%
- ▶ block/: 0.2%
- ▶ ...

# Practical lab - Get Linux Kernel Source Code



- ▶ Clone the mainline Linux source tree with git




# Kernel Source Code

# Kernel Source Code

## Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

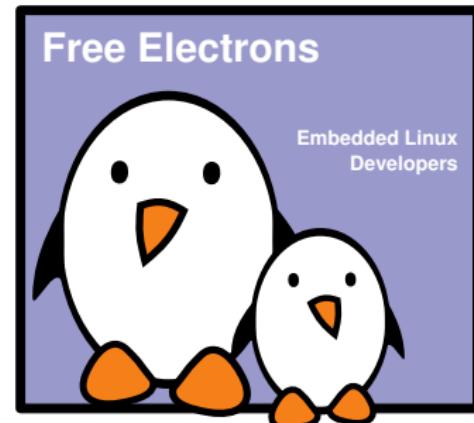



## Linux Code and Device Drivers



# Programming language

- ▶ Implemented in C like all Unix systems. (C was created to implement the first Unix systems)
- ▶ A little Assembly is used too:
  - ▶ CPU and machine initialization, exceptions
  - ▶ Critical library routines.
- ▶ No C++ used, see <http://www.tux.org/lkml/#s15-3>
- ▶ All the code compiled with gcc
  - ▶ Many gcc specific extensions used in the kernel code, any ANSI C compiler will not compile the kernel
  - ▶ A few alternate compilers are supported (Intel and Marvell)
  - ▶ See <http://gcc.gnu.org/onlinedocs/gcc-4.9.0/gcc/C-Extensions.html>



# No C library

- ▶ The kernel has to be standalone and can't use user space code.
- ▶ User space is implemented on top of kernel services, not the opposite.
- ▶ Kernel code has to supply its own library implementations (string utilities, cryptography, uncompression ...)
- ▶ So, you can't use standard C library functions in kernel code. (`printf()`, `memset()`, `malloc()`, ...).
- ▶ Fortunately, the kernel provides similar C functions for your convenience, like `printk()`, `memset()`, `kmalloc()`, ...



# Portability

- ▶ The Linux kernel code is designed to be portable
- ▶ All code outside `arch/` should be portable
- ▶ To this aim, the kernel provides macros and functions to abstract the architecture specific details
  - ▶ Endianness
    - ▶ `cpu_to_be32()`
    - ▶ `cpu_to_le32()`
    - ▶ `be32_to_cpu()`
    - ▶ `le32_to_cpu()`
  - ▶ I/O memory access
  - ▶ Memory barriers to provide ordering guarantees if needed
  - ▶ DMA API to flush and invalidate caches if needed



# No floating point computation

- ▶ Never use floating point numbers in kernel code. Your code may be run on a processor without a floating point unit (like on certain ARM CPUs).
- ▶ Don't be confused with floating point related configuration options
  - ▶ They are related to the emulation of floating point operation performed by the user space applications, triggering an exception into the kernel.
  - ▶ Using soft-float, i.e. emulation in user space, is however recommended for performance reasons.



## No stable Linux internal API

- ▶ The internal kernel API to implement kernel code can undergo changes between two releases.
- ▶ In-tree drivers are updated by the developer proposing the API change: works great for mainline code.
- ▶ An out-of-tree driver compiled for a given version may no longer compile or work on a more recent one.
- ▶ See `Documentation/stable_api_nonsense.txt` in kernel sources for reasons why.
- ▶ Of course, the kernel to userspace API does not change (system calls, `/proc`, `/sys`), as it would break existing programs.



## Kernel memory constraints

- ▶ No memory protection
- ▶ Accessing illegal memory locations result in (often fatal) kernel oopses.
- ▶ Fixed size stack (8 or 4 KB). Unlike in user space, there's no way to make it grow.
- ▶ Kernel memory can't be swapped out (for the same reasons).



# Linux kernel licensing constraints

- ▶ The Linux kernel is licensed under the GNU General Public License version 2
  - ▶ This license gives you the right to use, study, modify and share the software freely
- ▶ However, when the software is redistributed, either modified or unmodified, the GPL requires that you redistribute the software under the same license, with the source code
  - ▶ If modifications are made to the Linux kernel (for example to adapt it to your hardware), it is a derivative work of the kernel, and therefore must be released under GPLv2
  - ▶ The validity of the GPL on this point has already been verified in courts
- ▶ However, you're only required to do so
  - ▶ At the time the device starts to be distributed
  - ▶ To your customers, not to the entire world



# Proprietary code and the kernel

- ▶ It is illegal to distribute a binary kernel that includes statically compiled proprietary drivers
- ▶ The kernel modules are a gray area: are they derived works of the kernel or not?
  - ▶ The general opinion of the kernel community is that proprietary drivers are bad: <http://j.mp/fbyuuH>
  - ▶ From a legal point of view, each driver is probably a different case
  - ▶ Is it really useful to keep your drivers secret?
- ▶ There are some examples of proprietary drivers, like the Nvidia graphics drivers
  - ▶ They use a wrapper between the driver and the kernel
  - ▶ Unclear whether it makes it legal or not



## Advantages of GPL drivers

- ▶ You don't have to write your driver from scratch. You can reuse code from similar free software drivers.
- ▶ You could get free community contributions, support, code review and testing, though this generally only happens with code submitted for the mainline kernel.
- ▶ Your drivers can be freely and easily shipped by others (for example by Linux distributions or embedded Linux build systems).
- ▶ Pre-compiled drivers work with only one kernel version and one specific configuration, making life difficult for users who want to change the kernel version.
- ▶ Legal certainty, you are sure that a GPL driver is fine from a legal point of view.



## Advantages of in-tree kernel drivers

- ▶ Once your sources are accepted in the mainline tree, they are maintained by people making changes.
- ▶ Near cost-free maintenance, security fixes and improvements.
- ▶ Easy access to your sources by users.
- ▶ Many more people reviewing your code.



# User space device drivers 1/3

- ▶ In some cases, it is possible to implement device drivers in user space!
- ▶ Can be used when
  - ▶ The kernel provides a mechanism that allows userspace applications to directly access the hardware.
  - ▶ There is no need to leverage an existing kernel subsystem such as the networking stack or filesystems.
  - ▶ There is no need for the kernel to act as a “multiplexer” for the device: only one application accesses the device.



# User space device drivers 2/3

- ▶ Possibilities for userspace device drivers:
  - ▶ USB with *libusb*, <http://www.libusb.org/>
  - ▶ SPI with *spidev*, Documentation/spi/spidev
  - ▶ I2C with *i2cdev*, Documentation/i2c/dev-interface
  - ▶ Memory-mapped devices with *UIO*, including interrupt handling, Documentation/DocBook/uio-howto/
- ▶ Certain classes of devices (printers, scanners, 2D/3D graphics acceleration) are typically handled partly in kernel space, partly in user space.



# User space device drivers 3/3

- ▶ Advantages
  - ▶ No need for kernel coding skills. Easier to reuse code between devices.
  - ▶ Drivers can be written in any language, even Perl!
  - ▶ Drivers can be kept proprietary.
  - ▶ Driver code can be killed and debugged. Cannot crash the kernel.
  - ▶ Can be swapped out (kernel code cannot be).
  - ▶ Can use floating-point computation.
  - ▶ Less in-kernel complexity.
  - ▶ Potentially higher performances, especially for memory-mapped devices, thanks to the avoidance of system calls.
- ▶ Drawbacks
  - ▶ Less straightforward to handle interrupts.
  - ▶ Increased interrupt latency vs. kernel code.



## Linux sources



# Linux sources structure 1/5

- ▶ arch/<ARCH>
  - ▶ Architecture specific code
  - ▶ arch/<ARCH>/mach-<machine>, machine/board specific code
  - ▶ arch/<ARCH>/include/asm, architecture-specific headers
  - ▶ arch/<ARCH>/boot/dts, Device Tree source files, for some architectures
- ▶ block/
  - ▶ Block layer core
- ▶ COPYING
  - ▶ Linux copying conditions (GNU GPL)
- ▶ CREDITS
  - ▶ Linux main contributors
- ▶ crypto/
  - ▶ Cryptographic libraries



# Linux sources structure 2/5

- ▶ Documentation/
  - ▶ Kernel documentation. Don't miss it!
- ▶ drivers/
  - ▶ All device drivers except sound ones (usb, pci...)
- ▶ firmware/
  - ▶ Legacy: firmware images extracted from old drivers
- ▶ fs/
  - ▶ Filesystems (fs/ext3/, etc.)
- ▶ include/
  - ▶ Kernel headers
- ▶ include/linux/
  - ▶ Linux kernel core headers
- ▶ include/uapi/
  - ▶ User space API headers
- ▶ init/
  - ▶ Linux initialization (including `main.c`)
- ▶ ipc/
  - ▶ Code used for process communication



# Linux sources structure 3/5

- ▶ Kbuild
  - ▶ Part of the kernel build system
- ▶ Kconfig
  - ▶ Top level description file for configuration parameters
- ▶ kernel/
  - ▶ Linux kernel core (very small!)
- ▶ lib/
  - ▶ Misc library routines (zlib, crc32...)
- ▶ MAINTAINERS
  - ▶ Maintainers of each kernel part. Very useful!
- ▶ Makefile
  - ▶ Top Linux Makefile (sets arch and version)
- ▶ mm/
  - ▶ Memory management code (small too!)



# Linux sources structure 4/5

- ▶ net/
  - ▶ Network support code (not drivers)
- ▶ README
  - ▶ Overview and building instructions
- ▶ REPORTING-BUGS
  - ▶ Bug report instructions
- ▶ samples/
  - ▶ Sample code (markers, kprobes, kobjects...)
- ▶ scripts/
  - ▶ Scripts for internal or external use
- ▶ security/
  - ▶ Security model implementations (SELinux...)
- ▶ sound/
  - ▶ Sound support code and drivers
- ▶ tools/
  - ▶ Code for various user space tools (mostly C)



## Linux sources structure 5/5

- ▶ usr/
  - ▶ Code to generate an initramfs cpio archive
- ▶ virt/
  - ▶ Virtualization support (KVM)



## Kernel source management tools



# Cscope

- ▶ Tool to browse source code (mainly C, but also C++ or Java)
- ▶ Supports huge projects like the Linux kernel. Typically takes less than 1 min. to index the whole Linux sources.
- ▶ In Linux kernel sources, two ways of running it:
  - ▶ `cscope -Rk`  
All files for all architectures at once
  - ▶ `make cscope`  
`cscope -d scope.out`  
Only files for your current architecture
- ▶ Allows searching for a symbol, a definition, functions, strings, files, etc.
- ▶ Integration with editors like `vim` and `emacs`.
- ▶ Dedicated graphical front-end: `KScope`
- ▶ <http://cscope.sourceforge.net/>



# Cscope screenshot

```
X xterm
C symbol: request_irq

File           Function          Line
0 omap_udc.c   omap_udc_probe    2821 status = request_irq(pdev->resource[1].start, omap_udc_irq,
1 omap_udc.c   omap_udc_probe    2830 status = request_irq(pdev->resource[2].start, omap_udc_pio_irq,
2 omap_udc.c   omap_udc_probe    2838 status = request_irq(pdev->resource[3].start, omap_udc_iso_irq,
3 pxa2xx_udc.c  pxa2xx_udc_probe  2517 retval = request_irq(IRQ_USB, pxa2xx_udc_irq,
4 pxa2xx_udc.c  pxa2xx_udc_probe  2528 retval = request_irq(LUBBOCK_USB_DISC_IRQ,
5 pxa2xx_udc.c  pxa2xx_udc_probe  2539 retval = request_irq(LUBBOCK_USB_IRQ,
6 hc_crisv10.c  etrax_usb_hc_init 4423 if (request_irq(ETRAX_USB_HC_IRQ, etrax_usb_hc_interrupt_top_half,
0,
7 hc_crisv10.c  etrax_usb_hc_init 4431 if (request_irq(ETRAX_USB_RX_IRQ, etrax_usb_rx_interrupt, 0,
8 hc_crisv10.c  etrax_usb_hc_init 4439 if (request_irq(ETRAX_USB_TX_IRQ, etrax_usb_tx_interrupt, 0,
9 amifb.c       amifb_init      2431 if (request_irq(IRQ_AMIGA_COPPER, amifb_interrupt, 0,
a arcfb.c      arcfb_probe     564 if (request_irq(par->irq, &arcfb_interrupt, SA_SHIRQ,
b atafb.c       atafb_init      2720 request_irq(IRQ_AUTO_4, falcon_vbl_switcher, IRQ_TYPE_PRIO,
c atyfb_base.c  aty_enable_irq  1562 if (request_irq(par->irq, aty_irq, SA_SHIRQ, "atyfb", par)) {

* 155 more lines - press the space bar to display more *
Find this C symbol:
Find this global definition:
Find functions called by this function:
Find functions calling this function:
Find this text string:
Change this text string:
Find this egrep pattern:
Find this file:
Find files #including this file:
```

[Tab]: move the cursor between search results and commands  
[Ctrl] [D]: exit cscope



# LXR: Linux Cross Reference

- ▶ Generic source indexing tool and code browser
- ▶ Web server based, very easy and fast to use
- ▶ Very easy to find the declaration, implementation or usage of symbols
- ▶ Supports C and C++
- ▶ Supports huge code projects such as the Linux kernel (431 MB of source code in version 3.0).
- ▶ Takes a little time and patience to setup (configuration, indexing, web server configuration)
- ▶ You don't need to set up LXR by yourself. Use our <http://lxr.free-electrons.com> server!
- ▶ <http://sourceforge.net/projects/lxr>



# LXR screenshot

## Linux Cross Reference

Free Electrons  
Embedded Linux Experts

[Source Navigation](#) • [Diff Markup](#) • [Identifier Search](#) • [Freetext Search](#) •

Version: 2.6.32 2.6.33 2.6.34 2.6.35 2.6.36 2.6.37 2.6.38 2.6.39 3.0 3.1 3.2 3.3 3.4 3.5 3.6 3.7 3.8 3.9 3.10 3.11 3.12  
Architecture: `x86` `arm` `avr32` `blackfin` `m68k` `m68knommu` `microblaze` `mips` `powerpc` `sh`

### Linux/kernel/user.c

```
1 /*  
2 * The "user cache".  
3 *  
4 * (C) Copyright 1991-2000 Linus Torvalds  
5 *  
6 * We have a per-user structure to keep track of how many  
7 * processes, files etc the user has claimed, in order to be  
8 * able to have per-user limits for system resources.  
9 */  
10  
11 #include <linux/init.h>  
12 #include <linux/sched.h>  
13 #include <linux/slab.h>  
14 #include <linux/bitsops.h>  
15 #include <linux/key.h>  
16 #include <linux/interrupt.h>  
17 #include <linux/export.h>  
18 #include <linux/user_namespace.h>  
19 #include <linux/proc_ns.h>  
20  
21 /*  
22 * userns count is 1 for root user, 1 for init_uts_ns,  
23 * and 1 for... ?  
24 */  
25 struct user_namespace init_user_ns = {  
26     .uid_map = {  
27         .nr_extents = 1,  
28         .extent[0] = {  
29             .first = 0,  
30             .lower_first = 0,  
31             .count = 4294967295U,
```

# Practical lab - Kernel Source Code - Exploring



- ▶ Explore kernel sources manually
- ▶ Use automated tools to explore the source code



## Kernel configuration



# Kernel configuration and build system

- ▶ The kernel configuration and build system is based on multiple Makefiles
- ▶ One only interacts with the main `Makefile`, present at the **top directory** of the kernel source tree
- ▶ Interaction takes place
  - ▶ using the `make` tool, which parses the `Makefile`
  - ▶ through various **targets**, defining which action should be done (configuration, compilation, installation, etc.). Run `make help` to see all available targets.
- ▶ Example
  - ▶ `cd linux-3.6.x/`
  - ▶ `make <target>`



# Kernel configuration (1)

- ▶ The kernel contains thousands of device drivers, filesystem drivers, network protocols and other configurable items
- ▶ Thousands of options are available, that are used to selectively compile parts of the kernel source code
- ▶ The kernel configuration is the process of defining the set of options with which you want your kernel to be compiled
- ▶ The set of options depends
  - ▶ On your hardware (for device drivers, etc.)
  - ▶ On the capabilities you would like to give to your kernel (network capabilities, filesystems, real-time, etc.)



## Kernel configuration (2)

- ▶ The configuration is stored in the `.config` file at the root of kernel sources
  - ▶ Simple text file, `key=value` style
- ▶ As options have dependencies, typically never edited by hand, but through graphical or text interfaces:
  - ▶ `make xconfig`, `make gconfig` (graphical)
  - ▶ `make menuconfig`, `make nconfig` (text)
  - ▶ You can switch from one to another, they all load/save the same `.config` file, and show the same set of options
- ▶ To modify a kernel in a GNU/Linux distribution: the configuration files are usually released in `/boot/`, together with kernel images: `/boot/config-3.2.0-31-generic`



# Kernel or module?

- ▶ The **kernel image** is a **single file**, resulting from the linking of all object files that correspond to features enabled in the configuration
  - ▶ This is the file that gets loaded in memory by the bootloader
  - ▶ All included features are therefore available as soon as the kernel starts, at a time where no filesystem exists
- ▶ Some features (device drivers, filesystems, etc.) can however be compiled as **modules**
  - ▶ Those are *plugins* that can be loaded/unloaded dynamically to add/remove features to the kernel
  - ▶ Each **module is stored as a separate file in the filesystem**, and therefore access to a filesystem is mandatory to use modules
  - ▶ This is not possible in the early boot procedure of the kernel, because no filesystem is available



# Kernel option types

- ▶ There are different types of options
  - ▶ `bool` options, they are either
    - ▶ *true* (to include the feature in the kernel) or
    - ▶ *false* (to exclude the feature from the kernel)
  - ▶ `tristate` options, they are either
    - ▶ *true* (to include the feature in the kernel image) or
    - ▶ *module* (to include the feature as a kernel module) or
    - ▶ *false* (to exclude the feature)
- ▶ `int` options, to specify integer values
- ▶ `hex` options, to specify hexadecimal values
- ▶ `string` options, to specify string values



# Kernel option dependencies

- ▶ There are dependencies between kernel options
- ▶ For example, enabling a network driver requires the network stack to be enabled
- ▶ Two types of dependencies
  - ▶ `depends on` dependencies. In this case, option A that depends on option B is not visible until option B is enabled
  - ▶ `select` dependencies. In this case, with option A depending on option B, when option A is enabled, option B is automatically enabled
  - ▶ `make xconfig` allows to see all options, even those that cannot be selected because of missing dependencies. In this case, they are displayed in gray



## make xconfig

make xconfig

- ▶ The most common graphical interface to configure the kernel.
- ▶ Make sure you read  
`help -> introduction: useful options!`
- ▶ File browser: easier to load configuration files
- ▶ Search interface to look for parameters
- ▶ Required Debian / Ubuntu packages: `libqt4-dev g++`  
(`libqt3-mt-dev` for older kernel releases)



# make xconfig screenshot

The screenshot shows the 'Linux/arm 3.4.0 Kernel Configuration' window. The left pane displays a tree view of kernel options under the 'Option' menu. The right pane shows detailed information for the selected option, which is 'TI OMAP2/3/4' under the 'OMAP System Type' category.

**Left Pane (Option Menu):**

- General setup
  - IRQ subsystem
  - RCU Subsystem
  - Control Group support
  - Namespaces support
  - Configure standard kernel features (expert users)
  - Kernel Performance Events And Counters
  - GCOV-based kernel profiling
  - Enable loadable module support
  - Enable the block layer
    - Partition Types
    - IO Schedulers
  - System Type
    - TI OMAP2/3/4 Specific Features
  - Bus support
    - PCCard (PCMCIA/CardBus) support
  - Kernel Features
  - Boot options
  - CPU Power Management
    - CPU Frequency scaling
  - Floating point emulation
  - Userspace binary formats
  - Power management options
  - Networking support
    - Networking options

**Right Pane (Selected Option):**

**TI OMAP2/3/4 (ARCH\_OMAP2PLUS)**

CONFIG\_ARCH\_OMAP2PLUS:

"Systems based on OMAP2, OMAP3 or OMAP4"

Symbol: ARCH\_OMAP2PLUS [=y]  
Type : boolean  
Prompt: TI OMAP2/3/4  
Defined at arch/arm/plat-omap/Kconfig:24  
Depends on: <choice>  
Location:  
-> System Type  
-> TI OMAP Common Features  
-> OMAP System Type (<choice> [=y])



# make xconfig search interface

Looks for a keyword in the parameter name. Allows to select or unselect found parameters.

Search Config

Find: mtd

Search

Option

- ... (0) Physical address of DiskOnChip
- ... NAND Flash support for Samsung S3C SoCs
- Support software BCH ECC
- ... ST Nomadik 8815 NAND support
- ... CFI Flash device mapped on AMD NetSc520
- M-Systems Disk-On-Chip Millennium-only alternative driver (DEPRECATED)
- ARM Firmware Suite partition parsing (NEW)
- PMC551 Debugging
- ... Command line partition table parsing

**Physical address of DiskOnChip (MTD\_DOCPROBE\_ADDRESS)**

CONFIG\_MTD\_DOCPROBE\_ADDRESS:

By default, the probe for DiskOnChip devices will look for a DiskOnChip at every multiple of 0x2000 between 0xC8000 and 0xEE000. This option allows you to specify a single address at which to probe for the device, which is useful if you have other devices in that range which get upset when they are probed.



# Kernel configuration options

Compiled as a module (separate file)

`CONFIG_IS09660_FS=m`


Driver options

`CONFIG_JOLIET=y`

`CONFIG_ZISOFS=y`

Compiled statically into the kernel

`CONFIG_UDF_FS=y`

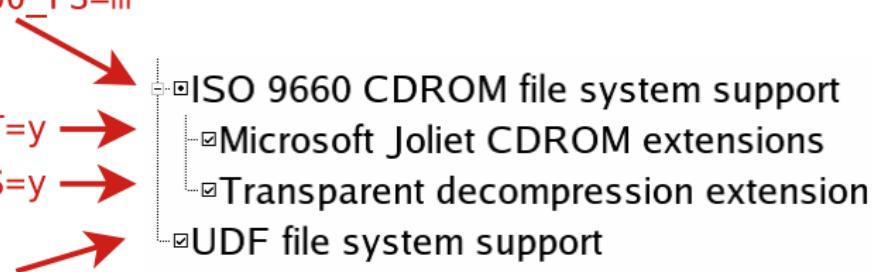



## Corresponding .config file excerpt

Options are grouped by sections and are prefixed with CONFIG\_.


```
#  
# CD-ROM/DVD Filesystems  
#  
CONFIG_ISO9660_FS=m  
CONFIG_JOLIET=y  
CONFIG_ZISOFS=y  
CONFIG_UDF_FS=y  
CONFIG_UDF_NLS=y  
  
#  
# DOS/FAT/NT Filesystems  
#  
# CONFIG_MSDOS_FS is not set  
# CONFIG_VFAT_FS is not set  
CONFIG_NTFS_FS=m  
# CONFIG_NTFS_DEBUG is not set  
CONFIG_NTFS_RW=y
```



# make gconfig

## make gconfig

- ▶ *GTK* based graphical configuration interface.  
Functionality similar to that of `make xconfig`.
- ▶ Just lacking a search functionality.
- ▶ Required Debian packages:  
`libglade2-dev`

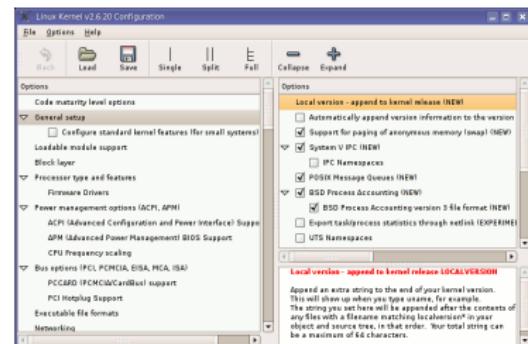




# make menuconfig

## make menuconfig

- ▶ Useful when no graphics are available. Pretty convenient too!
- ▶ Same interface found in other tools: BusyBox, Buildroot...
- ▶ Required Debian packages:  
`libncurses-dev`

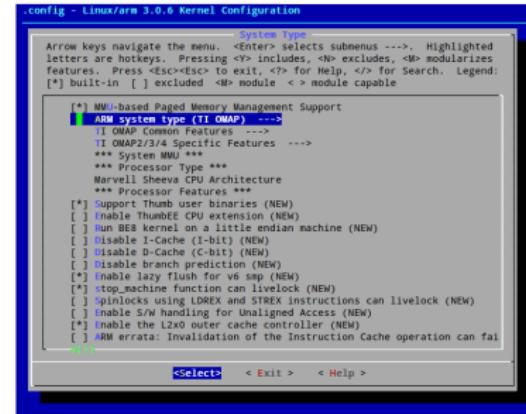

The screenshot shows the 'ARM system type (TI OMAP)' submenu of the kernel configuration. The menu lists various options for the OMAP processor family, such as memory management support, specific features for OMAP2/3/4, and processor types like Marvell Sheeva and Processor Features. Most options are marked with a blue asterisk (\*) indicating they are built-in. The bottom of the window has navigation buttons: <Select>, <Exit>, <Help>, and <Search>.

```
.config - Linux/arm 3.0.6 Kernel Configuration
...
Arrow keys navigate the menu. <Enter> selects submenus --->. Highlighted letters are hotkeys. Pressing <F2> includes, <F3> excludes, <F4> modularizes features. Press <Esc><Esc> to exit, <F1> for Help, <F5> for Search. Legend:
[*] built-in [ ] excluded <M> module < > module capable

[*] MMU-based Paged Memory Management Support
  [*] ARM system type (TI OMAP) --->
    [*] OMAP2/3/4 Specific Features --->
      *** System MMU ***
      *** Processor Type ***
      Marvell Sheeva CPU Architecture
      *** Processor Features ***
[*] Support thumb user binaries (NEW)
[*] Add support for OMAP3 CPU (NEW)
[*] Run BEB Kernel on a little endian machine (NEW)
[*] Disable I-Cache (I-bit) (NEW)
[*] Disable D-Cache (C-bit) (NEW)
[*] Disable branch prediction (NEW)
[*] Enable lazy flush for v6 smp (NEW)
[*] stop_machine function can livelock (NEW)
[*] Spinlocks using LDREX and STREX instructions can livelock (NEW)
[*] Enable S/W handling for Unaligned Access (NEW)
[*] Enable the L2x0 outer cache controller (NEW)
[*] ARM errata: Invalidation of the Instruction Cache operation can fail
  
```



# make nconfig

## make nconfig

- ▶ A newer, similar text interface
- ▶ More user friendly (for example, easier to access help information).
- ▶ Required Debian packages:  
`libncurses-dev`



The screenshot shows the 'make nconfig' interface for a Linux kernel configuration. The title bar reads 'make nconfig - Linux/x86\_64 3.0.0 Kernel Configuration'. Below it is the 'Linux/x86\_64 3.0.0 Kernel Configuration' menu. The menu items include:

- General setup ...>
- [ ] Enable Loadable module support ...>
- \* Enable the block layer ...>
- Processor type and features ...>
- Power management and ACPI options ...>
- Bus options (PCI etc.) ...>
- Executable file formats / Emulations ...>
- [ ] Networking support ...>
- Device Drivers ...>
- Firmware Drivers ...>
- File systems ...>
- Kernel hacking ...>
- Security options ...>
- [ ] Cryptographic API ...>
- [ ] Virtualization ...>
- Library routines ...>

At the bottom of the interface, there is a row of keyboard shortcut keys: F1 Help, F2 Sym Info, F3 Insts, F4 Config, F5 Back, F6 Save, F7 Load, F8 Sym Search, F9 Exit.



## make oldconfig

`make oldconfig`

- ▶ Needed very often!
- ▶ Useful to upgrade a `.config` file from an earlier kernel release
- ▶ Issues warnings for configuration parameters that no longer exist in the new kernel.
- ▶ Asks for values for new parameters

If you edit a `.config` file by hand, it's strongly recommended to run `make oldconfig` afterwards!



# Undoing configuration changes

A frequent problem:

- ▶ After changing several kernel configuration settings, your kernel no longer works.
- ▶ If you don't remember all the changes you made, you can get back to your previous configuration:  
`$ cp .config.old .config`
- ▶ All the configuration interfaces of the kernel (xconfig, menuconfig, oldconfig...) keep this `.config.old` backup copy.



# Configuration per architecture

- ▶ The set of configuration options is architecture dependent
  - ▶ Some configuration options are very architecture-specific
  - ▶ Most of the configuration options (global kernel options, network subsystem, filesystems, most of the device drivers) are visible in all architectures.
- ▶ By default, the kernel build system assumes that the kernel is being built for the host architecture, i.e. native compilation
- ▶ The architecture is not defined inside the configuration, but at a higher level
- ▶ We will see later how to override this behaviour, to allow the configuration of kernels for a different architecture



## Compiling and installing the kernel for the host system



# Kernel compilation

- ▶ make
  - ▶ in the main kernel source directory
  - ▶ Remember to run multiple jobs in parallel if you have multiple CPU cores. Example: `make -j 4`
  - ▶ No need to run as root!
- ▶ Generates
  - ▶ `vmlinux`, the raw uncompressed kernel image, at the ELF format, useful for debugging purposes, but cannot be booted
  - ▶ `arch/<arch>/boot/*Image`, the final, usually compressed, kernel image that can be booted
    - ▶ `bzImage` for x86, `zImage` for ARM, `vmImage.gz` for Blackfin, etc.
  - ▶ `arch/<arch>/boot/dts/*.dtb`, compiled Device Tree files (on some architectures)
  - ▶ All kernel modules, spread over the kernel source tree, as `.ko` files.



# Kernel installation

- ▶ `make install`
  - ▶ Does the installation for the host system by default, so needs to be run as root. Generally not used when compiling for an embedded system, and it installs files on the development workstation.
- ▶ Installs
  - ▶ `/boot/vmlinuz-<version>`  
Compressed kernel image. Same as the one in  
`arch/<arch>/boot`
  - ▶ `/boot/System.map-<version>`  
Stores kernel symbol addresses
  - ▶ `/boot/config-<version>`  
Kernel configuration for this version
- ▶ Typically re-runs the bootloader configuration utility to take the new kernel into account.



# Module installation

- ▶ `make modules_install`
  - ▶ Does the installation for the host system by default, so needs to be run as root
- ▶ Installs all modules in `/lib/modules/<version>/kernel/`
  - Module .ko (Kernel Object) files, in the same directory structure as in the sources.
- ▶ `modules.alias`
  - Module aliases for module loading utilities. Example line:  
`alias sound-service-?-0 snd_mixer_oss`
- ▶ `modules.dep`
  - Module dependencies
- ▶ `modules.symbols`
  - Tells which module a given symbol belongs to.



## Kernel cleanup targets

- ▶ Clean-up generated files (to force re-compilation):  
`make clean`
- ▶ Remove all generated files. Needed when switching from one architecture to another.  
Caution: it also removes your `.config` file!  
`make mrproper`
- ▶ Also remove editor backup and patch reject files (mainly to generate patches):  
`make distclean`





## Cross-compiling the kernel



# Cross-compiling the kernel

When you compile a Linux kernel for another CPU architecture

- ▶ Much faster than compiling natively, when the target system is much slower than your GNU/Linux workstation.
- ▶ Much easier as development tools for your GNU/Linux workstation are much easier to find.
- ▶ To make the difference with a native compiler, cross-compiler executables are prefixed by the name of the target system, architecture and sometimes library. Examples:

`mips-linux-gcc`, the prefix is `mips-linux-`

`arm-linux-gnueabi-gcc`, the prefix is `arm-linux-gnueabi-`



# Specifying cross-compilation (1)

The CPU architecture and cross-compiler prefix are defined through the `ARCH` and `CROSS_COMPILE` variables in the toplevel Makefile.

- ▶ `ARCH` is the name of the architecture. It is defined by the name of the subdirectory in `arch/` in the kernel sources
  - ▶ Example: `arm` if you want to compile a kernel for the `arm` architecture.
- ▶ `CROSS_COMPILE` is the prefix of the cross compilation tools
  - ▶ Example: `arm-linux-` if your compiler is `arm-linux-gcc`



## Specifying cross-compilation (2)

Two solutions to define `ARCH` and `CROSS_COMPILE`:

- ▶ Pass `ARCH` and `CROSS_COMPILE` on the `make` command line:

```
make ARCH=arm CROSS_COMPILE=arm-linux-
```

Drawback: it is easy to forget to pass these variables when you run any `make` command, causing your build and configuration to be screwed up.

- ▶ Define `ARCH` and `CROSS_COMPILE` as environment variables:

```
export ARCH=arm
```

```
export CROSS_COMPILE=arm-linux-
```

Drawback: it only works inside the current shell or terminal.

You could put these settings in a file that you source every time you start working on the project. If you only work on a single architecture with always the same toolchain, you could even put these settings in your `~/.bashrc` file to make them permanent and visible from any terminal.



# Predefined configuration files

- ▶ Default configuration files available, per board or per-CPU family
  - ▶ They are stored in `arch/<arch>/configs/`, and are just minimal `.config` files
  - ▶ This is the most common way of configuring a kernel for embedded platforms
- ▶ Run `make help` to find if one is available for your platform
- ▶ To load a default configuration file, just run  
`make acme_defconfig`
  - ▶ This will overwrite your existing `.config` file!
- ▶ To create your own default configuration file
  - ▶ `make savedefconfig`, to create a minimal configuration file
  - ▶ `mv defconfig arch/<arch>/configs/myown_defconfig`



# Configuring the kernel

- ▶ After loading a default configuration file, you can adjust the configuration to your needs with the normal `xconfig`, `gconfig` or `menuconfig` interfaces
- ▶ You can also start the configuration from scratch without loading a default configuration file
- ▶ As the architecture is different from your host architecture
  - ▶ Some options will be different from the native configuration (processor and architecture specific options, specific drivers, etc.)
  - ▶ Many options will be identical (filesystems, network protocols, architecture-independent drivers, etc.)
- ▶ Make sure you have the support for the right CPU, the right board and the right device drivers.



# Device Tree

- ▶ Many embedded architectures have a lot of non-discoverable hardware.
- ▶ Depending on the architecture, such hardware is either described using C code directly within the kernel, or using a special hardware description language in a *Device Tree*.
- ▶ ARM, PowerPC, OpenRISC, ARC, Microblaze are examples of architectures using the Device Tree.
- ▶ A *Device Tree Source*, written by kernel developers, is compiled into a binary *Device Tree Blob*, passed at boot time to the kernel.
  - ▶ There is one different Device Tree for each board/platform supported by the kernel, available in  
`arch/arm/boot/dts/<board>.dtb`.
  - ▶ The bootloader must load both the kernel image and the Device Tree Blob in memory before starting the kernel.



# Building and installing the kernel

- ▶ Run `make`
- ▶ Copy the final kernel image to the target storage
  - ▶ can be `uImage`, `zImage`, `vmlinux`, `bzImage` in `arch/<arch>/boot`
  - ▶ copying the Device Tree Blob might be necessary as well, they are available in `arch/<arch>/boot/dts`
- ▶ `make install` is rarely used in embedded development, as the kernel image is a single file, easy to handle
  - ▶ It is however possible to customize the `make install` behaviour in `arch/<arch>/boot/install.sh`
- ▶ `make modules_install` is used even in embedded development, as it installs many modules and description files
  - ▶ `make INSTALL_MOD_PATH=<dir>/ modules_install`
  - ▶ The `INSTALL_MOD_PATH` variable is needed to install the modules in the target root filesystem instead of your host root filesystem.



# Booting with U-Boot

- ▶ Recent versions of U-Boot can boot the `zImage` binary.
- ▶ Older versions require a special kernel image format: `uImage`
  - ▶ `uImage` is generated from `zImage` using the `mkimage` tool. It is done automatically by the kernel `make uImage` target.
  - ▶ On some ARM platforms, `make uImage` requires passing a `LOADADDR` environment variable, which indicates at which physical memory address the kernel will be executed.
- ▶ In addition to the kernel image, U-Boot can also pass a *Device Tree Blob* to the kernel.
- ▶ The typical boot process is therefore:
  1. Load `zImage` or `uImage` at address X in memory
  2. Load `<board>.dtb` at address Y in memory
  3. Start the kernel with `bootz X - Y` or `bootm X - Y`

The `-` in the middle indicates no *initramfs*



# Kernel command line

- ▶ In addition to the compile time configuration, the kernel behaviour can be adjusted with no recompilation using the **kernel command line**
- ▶ The kernel command line is a string that defines various arguments to the kernel
  - ▶ It is very important for system configuration
  - ▶ `root=` for the root filesystem (covered later)
  - ▶ `console=` for the destination of kernel messages
  - ▶ Many more exist. The most important ones are documented in `Documentation/kernel-parameters.txt` in kernel sources.
- ▶ This kernel command line is either
  - ▶ Passed by the bootloader. In U-Boot, the contents of the `bootargs` environment variable is automatically passed to the kernel
  - ▶ Built into the kernel, using the `CONFIG_CMDLINE` option.



# Practical lab - Kernel compiling and booting



1st lab: board and bootloader setup:

- ▶ Prepare the board and access its serial port
- ▶ Configure its bootloader to use TFTP

2nd lab: kernel compiling and booting:

- ▶ Set up a cross-compiling environment
- ▶ Cross-compile a kernel for an ARM target platform
- ▶ Boot this kernel from a directory on your workstation, accessed by the board through NFS



## Using kernel modules



# Advantages of modules

- ▶ Modules make it easy to develop drivers without rebooting: load, test, unload, rebuild, load...
- ▶ Useful to keep the kernel image size to the minimum (essential in GNU/Linux distributions for PCs).
- ▶ Also useful to reduce boot time: you don't spend time initializing devices and kernel features that you only need later.
- ▶ Caution: once loaded, have full control and privileges in the system. No particular protection. That's why only the `root` user can load and unload modules.



## Module dependencies

- ▶ Some kernel modules can depend on other modules, which need to be loaded first.
- ▶ Example: the `usb-storage` module depends on the `scsi_mod`, `libusual` and `usbcore` modules.
- ▶ Dependencies are described in  
`/lib/modules/<kernel-version>/modules.dep`  
This file is generated when you run `make modules_install`.



## Kernel log

When a new module is loaded, related information is available in the kernel log.

- ▶ The kernel keeps its messages in a circular buffer (so that it doesn't consume more memory with many messages)
- ▶ Kernel log messages are available through the `dmesg` command (**diagnostic message**)
- ▶ Kernel log messages are also displayed in the system console (console messages can be filtered by level using the `loglevel` kernel parameter, or completely disabled with the `quiet` parameter).
- ▶ Note that you can write to the kernel log from user space too:  
`echo "<n>Debug info" > /dev/kmsg`



# Module utilities (1)

- ▶ `modinfo <module_name>`

`modinfo <module_path>.ko`

Gets information about a module: parameters, license, description and dependencies.

Very useful before deciding to load a module or not.

- ▶ `sudo insmod <module_path>.ko`

Tries to load the given module. The full path to the module object file must be given.



# Understanding module loading issues

- ▶ When loading a module fails, `insmod` often doesn't give you enough details!
- ▶ Details are often available in the kernel log.
- ▶ Example:

```
$ sudo insmod ./intr_monitor.ko
insmod: error inserting './intr_monitor.ko': -1 Device or resource busy
$ dmesg
[17549774.552000] Failed to register handler for irq channel 2
```



## Module utilities (2)

- ▶ `sudo modprobe <module_name>`

Most common usage of `modprobe`: tries to load all the modules the given module depends on, and then this module. Lots of other options are available. `modprobe` automatically looks in `/lib/modules/<version>/` for the object file corresponding to the given module name.

- ▶ `lsmod`

Displays the list of loaded modules

Compare its output with the contents of `/proc/modules`!



## Module utilities (3)

- ▶ `sudo rmmod <module_name>`  
Tries to remove the given module.  
Will only be allowed if the module is no longer in use (for example, no more processes opening a device file)
- ▶ `sudo modprobe -r <module_name>`  
Tries to remove the given module and all dependent modules (which are no longer needed after removing the module)



# Passing parameters to modules

- ▶ Find available parameters:

```
modinfo snd-intel8x0m
```

- ▶ Through insmod:

```
sudo insmod ./snd-intel8x0m.ko index=-2
```

- ▶ Through modprobe:

Set parameters in /etc/modprobe.conf or in any file in  
/etc/modprobe.d/:

```
options snd-intel8x0m index=-2
```

- ▶ Through the kernel command line, when the driver is built  
statically into the kernel:

```
snd-intel8x0m.index=-2
```

- ▶ `snd-intel8x0m` is the *driver name*
- ▶ `index` is the *driver parameter name*
- ▶ `-2` is the *driver parameter value*



## Check module parameter values

How to find the current values for the parameters of a loaded module?


- ▶ Check `/sys/module/<name>/parameters`.
- ▶ There is one file per parameter, containing the parameter value.



# Useful reading

## Linux Kernel in a Nutshell, Dec 2006

- ▶ By Greg Kroah-Hartman, O'Reilly  
<http://www.kroah.com/lkn/>
- ▶ A good reference book and guide on configuring, compiling and managing the Linux kernel sources.
- ▶ Freely available on-line!  
Great companion to the printed book for easy electronic searches!  
Available as single PDF file on  
[http://free-electrons.com/  
community/kernel/lkn/](http://free-electrons.com/community/kernel/lkn/)
- ▶ Our rating: 2 stars

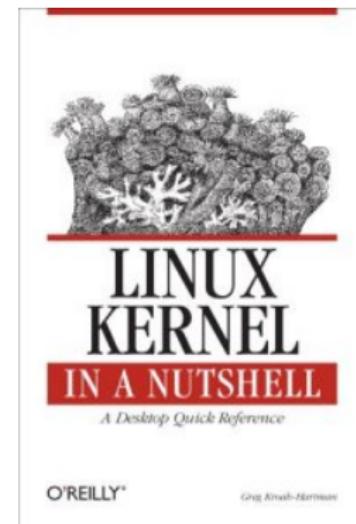




# Developing Kernel Modules

# Developing Kernel Modules

**Free Electrons**

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

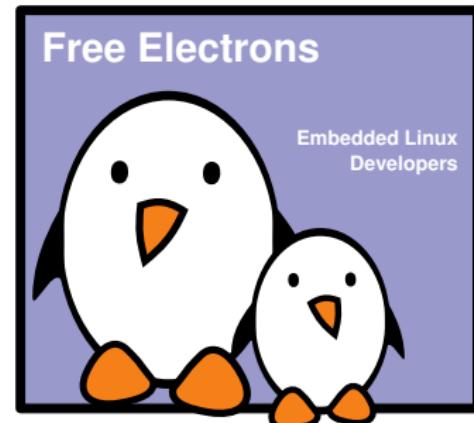



# Hello Module 1/2

```
/* hello.c */
#include <linux/init.h>
#include <linux/module.h>
#include <linux/kernel.h>

static int __init hello_init(void)
{
    pr_alert("Good Morrow to this fair assembly.\n");
    return 0;
}

static void __exit hello_exit(void)
{
    pr_alert("Alas, poor world, what treasure hast thou lost!\n");
}

module_init(hello_init);
module_exit(hello_exit);
MODULE_LICENSE("GPL");
MODULE_DESCRIPTION("Greeting module");
MODULE_AUTHOR("William Shakespeare");
```



## Hello Module 2/2

- ▶ `__init`
  - ▶ removed after initialization (static kernel or module.)
- ▶ `__exit`
  - ▶ discarded when module compiled statically into the kernel, or when module unloading support is not enabled.
- ▶ Example available on  
<http://git.free-electrons.com/training-materials/plain/code/hello/hello.c>



# Hello Module Explanations

- ▶ Headers specific to the Linux kernel: `linux/xxx.h`
  - ▶ No access to the usual C library, we're doing kernel programming
- ▶ An initialization function
  - ▶ Called when the module is loaded, returns an error code (`0` on success, negative value on failure)
  - ▶ Declared by the `module_init()` macro: the name of the function doesn't matter, even though `<modulename>_init()` is a convention.
- ▶ A cleanup function
  - ▶ Called when the module is unloaded
  - ▶ Declared by the `module_exit()` macro.
- ▶ Metadata information declared using `MODULE_LICENSE()`, `MODULE_DESCRIPTION()` and `MODULE_AUTHOR()`




## Symbols Exported to Modules 1/2

- ▶ From a kernel module, only a limited number of kernel functions can be called
- ▶ Functions and variables have to be explicitly exported by the kernel to be visible to a kernel module
- ▶ Two macros are used in the kernel to export functions and variables:
  - ▶ `EXPORT_SYMBOL(symbolname)`, which exports a function or variable to all modules
  - ▶ `EXPORT_SYMBOL_GPL(symbolname)`, which exports a function or variable only to GPL modules
- ▶ A normal driver should not need any non-exported function.



# Symbols exported to modules 2/2

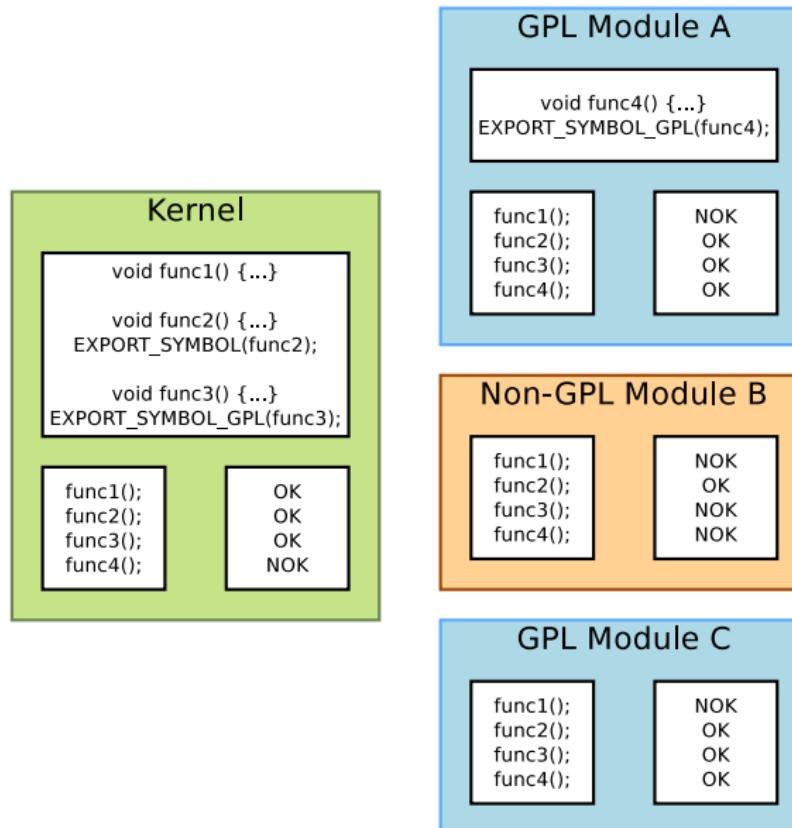



# Module License

- ▶ Several usages
  - ▶ Used to restrict the kernel functions that the module can use if it isn't a GPL licensed module
    - ▶ Difference between `EXPORT_SYMBOL()` and `EXPORT_SYMBOL_GPL()`
  - ▶ Used by kernel developers to identify issues coming from proprietary drivers, which they can't do anything about ("Tainted" kernel notice in kernel crashes and oopses).
  - ▶ Useful for users to check that their system is 100% free (check `/proc/sys/kernel/tainted`)
- ▶ Values
  - ▶ **GPL compatible** (see `include/linux/license.h`: GPL, GPL v2, GPL and additional rights, Dual MIT/GPL, Dual BSD/GPL, Dual MPL/GPL)
  - ▶ Proprietary



# Compiling a Module

- ▶ Two solutions
  - ▶ *Out of tree*
    - ▶ When the code is outside of the kernel source tree, in a different directory
    - ▶ Advantage: Might be easier to handle than modifications to the kernel itself
    - ▶ Drawbacks: Not integrated to the kernel configuration/compilation process, needs to be built separately, the driver cannot be built statically
  - ▶ Inside the kernel tree
    - ▶ Well integrated into the kernel configuration/compilation process
    - ▶ Driver can be built statically if needed



# Compiling an out-of-tree Module 1/2

- ▶ The below Makefile should be reusable for any single-file out-of-tree Linux module
- ▶ The source file is `hello.c`
- ▶ Just run `make` to build the `hello.ko` file


```
ifneq ($(KERNELRELEASE),)
obj-m := hello.o
else
KDIR := /path/to/kernel/sources

all:
<tab>$ (MAKE) -C $(KDIR) M=$$PWD
endif
```

- ▶ For `KDIR`, you can either set:
  - ▶ full kernel source directory  
(configured + `make modules_prepare`)
  - ▶ or just kernel headers directory (`make headers_install`)



## Compiling an out-of-tree Module 2/2

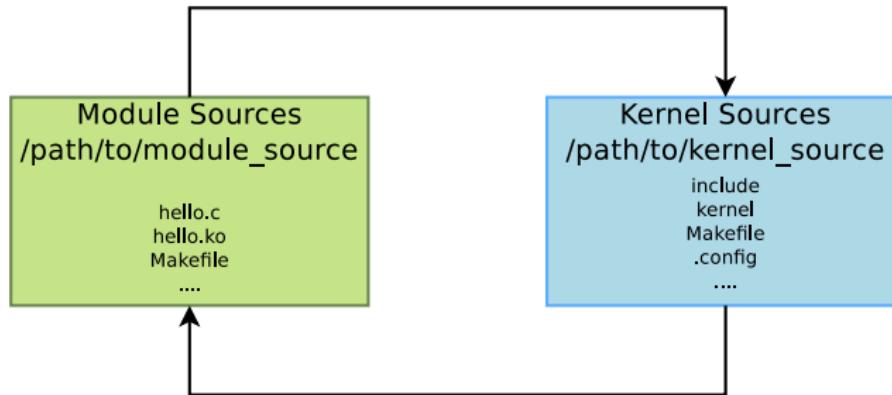

- ▶ The module Makefile is interpreted with `KERNELRELEASE` undefined, so it calls the kernel Makefile, passing the module directory in the `M` variable
- ▶ The kernel Makefile knows how to compile a module, and thanks to the `M` variable, knows where the Makefile for our module is. The module Makefile is interpreted with `KERNELRELEASE` defined, so the kernel sees the `obj-m` definition.



# Modules and Kernel Version

- ▶ To be compiled, a kernel module needs access to the kernel headers, containing the definitions of functions, types and constants.
- ▶ Two solutions
  - ▶ Full kernel sources
  - ▶ Only kernel headers (`linux-headers-*` packages in Debian/Ubuntu distributions)
- ▶ The sources or headers must be configured
  - ▶ Many macros or functions depend on the configuration
- ▶ A kernel module compiled against version X of kernel headers will not load in kernel version Y
  - ▶ `modprobe` / `insmod` will say Invalid module format



# New Driver in Kernel Sources 1/2

- ▶ To add a new driver to the kernel sources:
  - ▶ Add your new source file to the appropriate source directory.  
Example: `drivers/usb/serial/navman.c`
  - ▶ Single file drivers in the common case, even if the file is several thousand lines of code big. Only really big drivers are split in several files or have their own directory.
  - ▶ Describe the configuration interface for your new driver by adding the following lines to the `Kconfig` file in this directory:

```
config USB_SERIAL_NAVMAN
    tristate "USB Navman GPS device"
    depends on USB_SERIAL
    help
        To compile this driver as a module, choose M
        here: the module will be called navman.
```



## New Driver in Kernel Sources 2/2

- ▶ Add a line in the `Makefile` file based on the `Kconfig` setting:  
`obj-$(CONFIG_USB_SERIAL_NAVMAN) += navman.o`
- ▶ It tells the kernel build system to build `navman.c` when the `USB_SERIAL_NAVMAN` option is enabled. It works both if compiled statically or as a module.
  - ▶ Run `make xconfig` and see your new options!
  - ▶ Run `make` and your new files are compiled!
  - ▶ See `Documentation/kbuild/` for details and more elaborate examples like drivers with several source files, or drivers in their own subdirectory, etc.



## Hello Module with Parameters 1/2

```
/* hello_param.c */
#include <linux/init.h>
#include <linux/module.h>

MODULE_LICENSE("GPL");

/* A couple of parameters that can be passed in: how many
   times we say hello, and to whom */

static char *whom = "world";
module_param(whom, charp, 0);

static int howmany = 1;
module_param(howmany, int, 0);
```



## Hello Module with Parameters 2/2

```
static int __init hello_init(void)
{
    int i;
    for (i = 0; i < howmany; i++)
        pr_alert("(%d) Hello, %s\n", i, whom);
    return 0;
}

static void __exit hello_exit(void)
{
    pr_alert("Goodbye, cruel %s\n", whom);
}

module_init(hello_init);
module_exit(hello_exit);
```

Thanks to Jonathan Corbet for the example!

Source code available on:

[http://git.free-electrons.com/training-materials/plain/code/hello-param/hello\\_param.c](http://git.free-electrons.com/training-materials/plain/code/hello-param/hello_param.c)



# Declaring a module parameter

```
module_param(  
    name, /* name of an already defined variable */  
    type, /* either byte, short, ushort, int, uint, long, ulong,  
            charp, bool or invbool. (checked at run time!) */  
    perm /* for /sys/module/<module_name>/parameters/<param>,  
          0: no such module parameter value file */  
) ;  
  
/* Example */  
static int irq=5;  
module_param(irq, int, S_IRUGO);
```

Modules parameter arrays are also possible with  
module\_param\_array().



# Practical lab - Writing Modules



- ▶ Create, compile and load your first module
- ▶ Add module parameters
- ▶ Access kernel internals from your module




# Useful general-purpose kernel APIs

# Useful general-purpose kernel APIs

**Free Electrons**

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

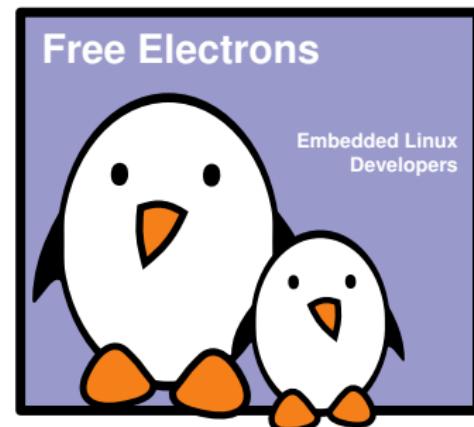



# Memory/string utilities

- ▶ In `linux/string.h`
  - ▶ Memory-related: `memset()`, `memcpy()`, `memmove()`,  
`memscan()`, `memcmp()`, `memchr()`
  - ▶ String-related: `strcpy()`, `strcat()`, `strcmp()`, `strchr()`,  
`strrchr()`, `strlen()` and variants
  - ▶ Allocate and copy a string: `kstrdup()`, `kstrndup()`
  - ▶ Allocate and copy a memory area: `kmemdup()`
- ▶ In `linux/kernel.h`
  - ▶ String to int conversion: `simple_strtoul()`,  
`simple strtol()`, `simple strtoull()`,  
`simple strtoll()`
  - ▶ Other string functions: `sprintf()`, `sscanf()`



# Linked lists

- ▶ Convenient linked-list facility in `linux/list.h`
  - ▶ Used in thousands of places in the kernel
- ▶ Add a `struct list_head` member to the structure whose instances will be part of the linked list. It is usually named `node` when each instance needs to only be part of a single list.
- ▶ Define the list with the `LIST_HEAD()` macro for a global list, or define a `struct list_head` element and initialize it with `INIT_LIST_HEAD()` for lists embedded in a structure.
- ▶ Then use the `list_*`() API to manipulate the list
  - ▶ Add elements: `list_add()`, `list_add_tail()`
  - ▶ Remove, move or replace elements: `list_del()`,  
`list_move()`, `list_move_tail()`, `list_replace()`
  - ▶ Test the list: `list_empty()`
  - ▶ Iterate over the list: `list_for_each_*`() family of macros



# Linked Lists Examples (1)

- ▶ From `include/linux/atmel_tc.h`

```
/*
 * Definition of a list element, with a
 * struct list_head member
 */
struct atmel_tc
{
    /* some members */
    struct list_head node;
};
```



## Linked Lists Examples (2)

- ▶ From drivers/misc/atmel\_tclib.c

```
/* Define the global list */
static LIST_HEAD(tc_list);

static int __init tc_probe(struct platform_device *pdev) {
    struct atmel_tc *tc;
    tc = kzalloc(sizeof(struct atmel_tc), GFP_KERNEL);
    /* Add an element to the list */
    list_add_tail(&tc->node, &tc_list);
}

struct atmel_tc *atmel_tc_alloc(unsigned block, const char *name)
{
    struct atmel_tc *tc;
    /* Iterate over the list elements */
    list_for_each_entry(tc, &tc_list, node) {
        /* Do something with tc */
    }
    [...]
}
```




# Linux device and driver model

# Linux device and driver model

## Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

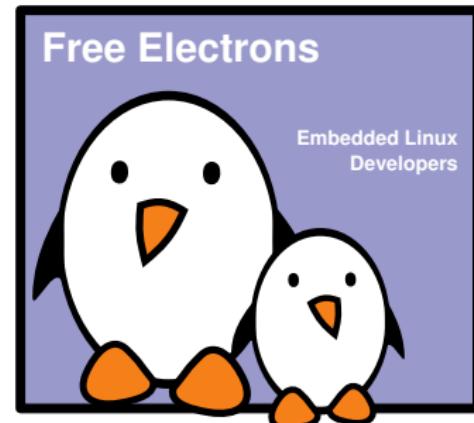



## Introduction



# The need for a device model?

- ▶ The Linux kernel runs on a wide range of architectures and hardware platforms, and therefore needs to **maximize the reusability** of code between platforms.
- ▶ For example, we want the same *USB device driver* to be usable on a x86 PC, or an ARM platform, even though the USB controllers used on those platforms are different.
- ▶ This requires a clean organization of the code, with the *device drivers* separated from the *controller drivers*, the hardware description separated from the drivers themselves, etc.
- ▶ This is what the Linux kernel **Device Model** allows, in addition to other advantages covered in this section.




# Kernel and Device Drivers

In Linux, a driver is always interfacing with:

- ▶ a **framework** that allows the driver to expose the hardware features in a generic way.
- ▶ a **bus infrastructure**, part of the device model, to detect/communicate with the hardware.

This section focuses on the *device model*, while *kernel frameworks* are covered later in this training.

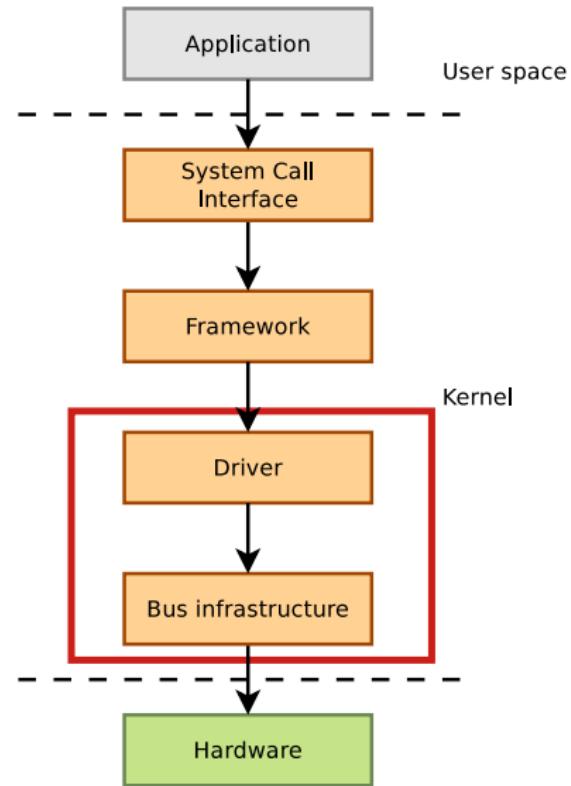



# Device Model data structures

- ▶ The *device model* is organized around three main data structures:
  - ▶ The `struct bus_type` structure, which represent one type of bus (USB, PCI, I2C, etc.)
  - ▶ The `struct device_driver` structure, which represents one driver capable of handling certain devices on a certain bus.
  - ▶ The `struct device` structure, which represents one device connected to a bus
- ▶ The kernel uses inheritance to create more specialized versions of `struct device_driver` and `struct device` for each bus subsystem.
- ▶ In order to explore the device model, we will
  - ▶ First look at a popular bus that offers dynamic enumeration, the *USB bus*
  - ▶ Continue by studying how buses that do not offer dynamic enumerations are handled.



# Bus Drivers


- ▶ The first component of the device model is the bus driver
  - ▶ One bus driver for each type of bus: USB, PCI, SPI, MMC, I2C, etc.
- ▶ It is responsible for
  - ▶ Registering the bus type (`struct bus_type`)
  - ▶ Allowing the registration of adapter drivers (USB controllers, I2C adapters, etc.), able to detect the connected devices, and providing a communication mechanism with the devices
  - ▶ Allowing the registration of device drivers (USB devices, I2C devices, PCI devices, etc.), managing the devices
  - ▶ Matching the device drivers against the devices detected by the adapter drivers.
  - ▶ Provides an API to both adapter drivers and device drivers
  - ▶ Defining driver and device specific structures, mainly `struct usb_driver` and `struct usb_interface`



## Example of the USB bus



# Example: USB Bus 1/2

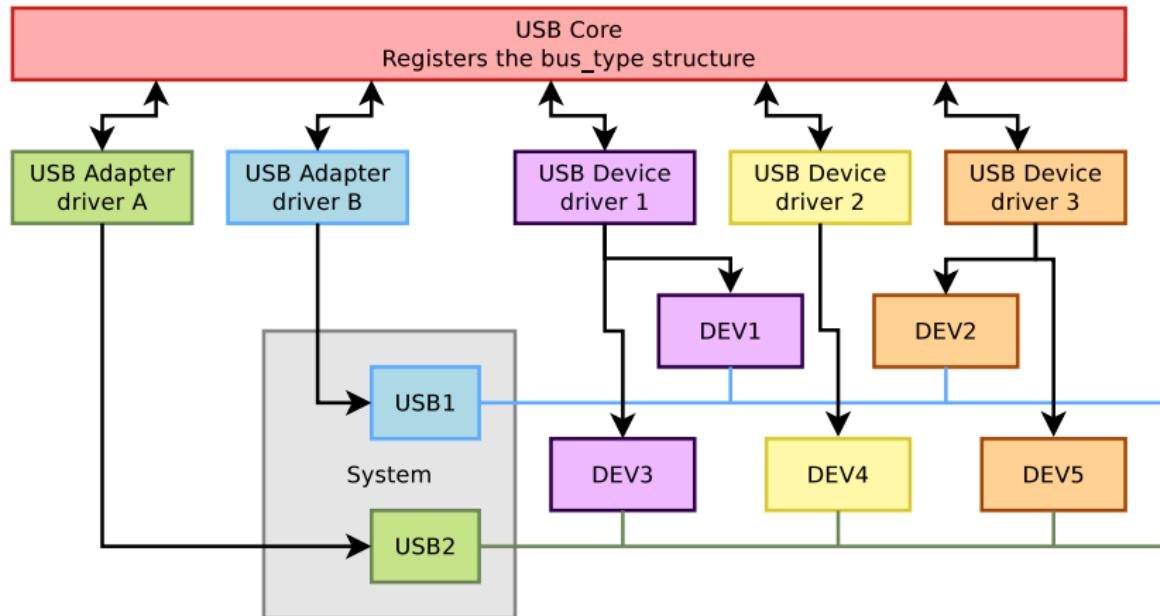



## Example: USB Bus 2/2

- ▶ Core infrastructure (bus driver)
  - ▶ `drivers/usb/core`
  - ▶ `struct bus_type` is defined in  
`drivers/usb/core/driver.c` and registered in  
`drivers/usb/core/usb.c`
- ▶ Adapter drivers
  - ▶ `drivers/usb/host`
  - ▶ For EHCI, UHCI, OHCI, XHCI, and their implementations on various systems (Atmel, IXP, Xilinx, OMAP, Samsung, PXA, etc.)
- ▶ Device drivers
  - ▶ Everywhere in the kernel tree, classified by their type



## Example of Device Driver

- ▶ To illustrate how drivers are implemented to work with the device model, we will study the source code of a driver for a USB network card
  - ▶ It is USB device, so it has to be a USB device driver
  - ▶ It is a network device, so it has to be a network device
  - ▶ Most drivers rely on a bus infrastructure (here, USB) and register themselves in a framework (here, network)
- ▶ We will only look at the device driver side, and not the adapter driver side
- ▶ The driver we will look at is `drivers/net/usb/rtl8150.c`



# Device Identifiers

- ▶ Defines the set of devices that this driver can manage, so that the USB core knows for which devices this driver should be used
- ▶ The `MODULE_DEVICE_TABLE()` macro allows `depmod` to extract at compile time the relation between device identifiers and drivers, so that drivers can be loaded automatically by `udev`. See

```
/lib/modules/$(uname -r)/modules.{alias,usbmap}
```

```
static struct usb_device_id rtl8150_table[] = {
    { USB_DEVICE(VENDOR_ID_REALTEK, PRODUCT_ID_RTL8150) },
    { USB_DEVICE(VENDOR_ID_MELCO, PRODUCT_ID_LUAKTX) },
    { USB_DEVICE(VENDOR_ID_MICRONET, PRODUCT_ID_SP128AR) },
    { USB_DEVICE(VENDOR_ID_LONGSHINE, PRODUCT_ID_LCS8138TX) },
    [...]
}
};

MODULE_DEVICE_TABLE(usb, rtl8150_table);
```



## Instantiation of usb\_driver

- ▶ `struct usb_driver` is a structure defined by the USB core. Each USB device driver must instantiate it, and register itself to the USB core using this structure
- ▶ This structure inherits from `struct device_driver`, which is defined by the device model.

```
static struct usb_driver rtl8150_driver = {  
    .name = "rtl8150",  
    .probe = rtl8150_probe,  
    .disconnect = rtl8150_disconnect,  
    .id_table = rtl8150_table,  
    .suspend = rtl8150_suspend,  
    .resume = rtl8150_resume  
};
```



# Driver (Un)Registration

- ▶ When the driver is loaded or unloaded, it must register or unregister itself from the USB core
- ▶ Done using `usb_register()` and `usb_deregister()`, provided by the USB core.

```
static int __init usb rtl8150_init(void)
{
    return usb_register(&rtl8150_driver);
}

static void __exit usb rtl8150_exit(void)
{
    usb_deregister(&rtl8150_driver);
}


module_init(usb rtl8150_init);
module_exit(usb rtl8150_exit);
```

- ▶ Note: this code has now been replaced by a shorter `module_usb_driver()` macro call.



## At Initialization


- ▶ The USB adapter driver that corresponds to the USB controller of the system registers itself to the USB core
- ▶ The `rtl8150` USB device driver registers itself to the USB core

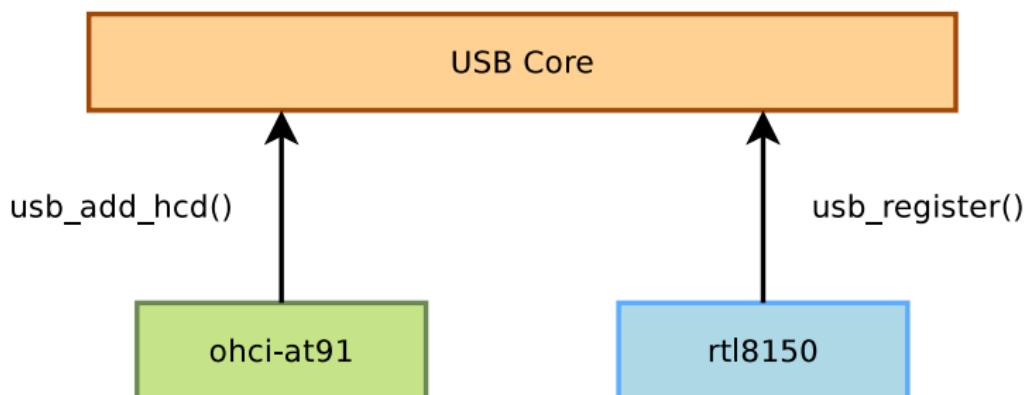

- ▶ The USB core now knows the association between the vendor/product IDs of `rtl8150` and the `struct usb_driver` structure of this driver



# When a Device is Detected

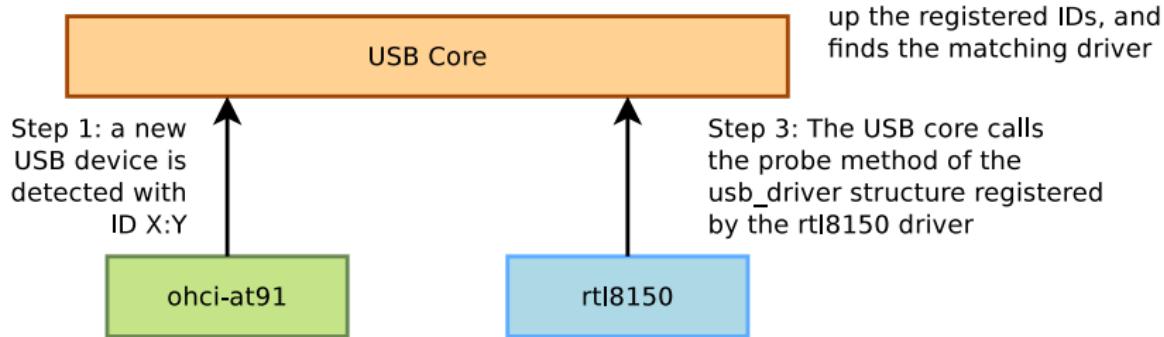



# Probe Method

- ▶ The `probe()` method receives as argument a structure describing the device, usually specialized by the bus infrastructure (`struct pci_dev`, `struct usb_interface`, etc.)
- ▶ This function is responsible for
  - ▶ Initializing the device, mapping I/O memory, registering the interrupt handlers. The bus infrastructure provides methods to get the addresses, interrupt numbers and other device-specific information.
  - ▶ Registering the device to the proper kernel framework, for example the network infrastructure.



# Probe Method Example


```
static int rtl8150_probe(struct usb_interface *intf,
    const struct usb_device_id *id)
{
    rtl8150_t *dev;
    struct net_device *netdev;

    netdev = alloc_etherdev(sizeof(rtl8150_t));
    [...]
    dev = netdev_priv(netdev);
    tasklet_init(&dev->tl, rx_fixup, (unsigned long)dev);
    spin_lock_init(&dev->rx_pool_lock);
    [...]
    netdev->netdev_ops = &rtl8150_netdev_ops;
    alloc_all_urbs(dev);
    [...]
    usb_set_intfdata(intf, dev);
    SET_NETDEV_DEV(netdev, &intf->dev);
    register_netdev(netdev);

    return 0;
}
```



# The Model is Recursive

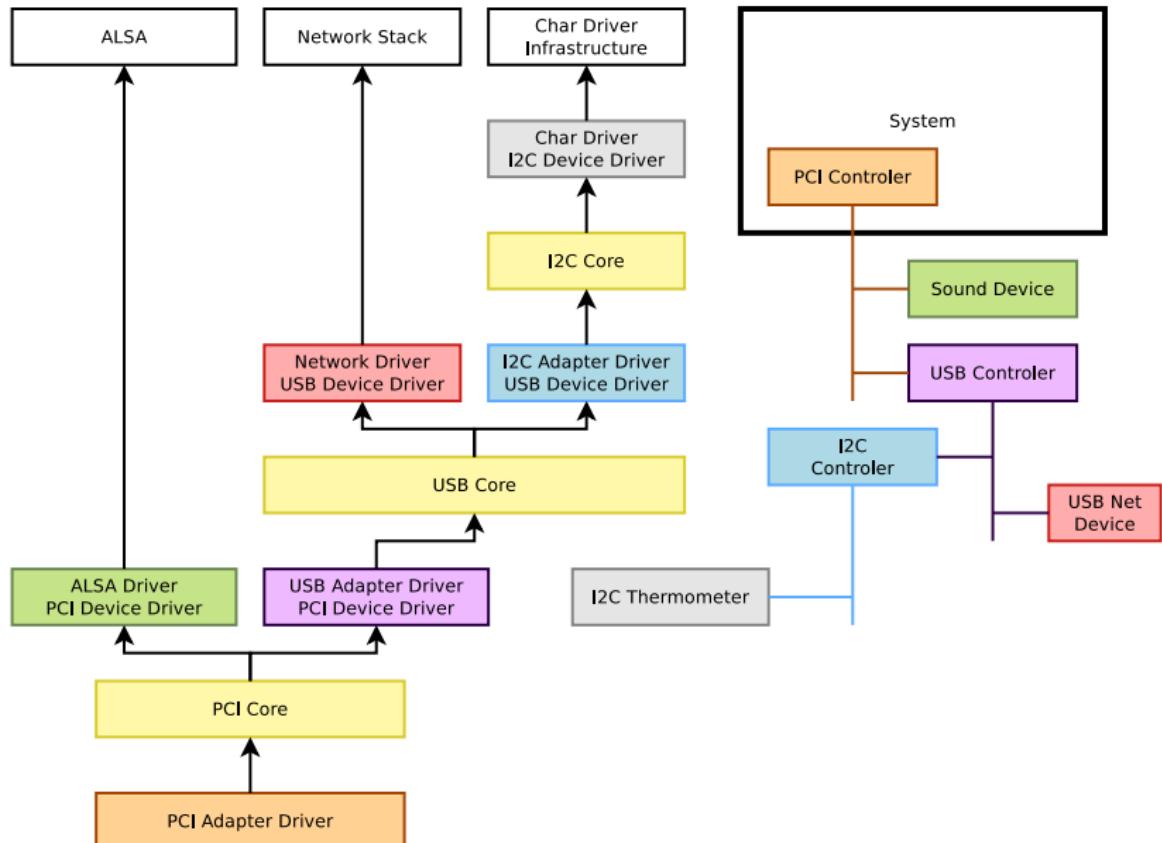



## Platform drivers



# Non-discoverable buses

- ▶ On embedded systems, devices are often not connected through a bus allowing enumeration, hotplugging, and providing unique identifiers for devices.
- ▶ For example, the devices on I2C buses or SPI buses, or the devices directly part of the system-on-chip.
- ▶ However, we still want all of those devices to be part of the device model.
- ▶ Such devices, instead of being dynamically detected, must be statically described in either:
  - ▶ The kernel source code
  - ▶ The *Device Tree*, a hardware description file used on some architectures.



## Platform devices

- ▶ Amongst the non-discoverable devices, a huge family are the devices that are directly part of a system-on-chip: UART controllers, Ethernet controllers, SPI or I2C controllers, graphic or audio devices, etc.
- ▶ In the Linux kernel, a special bus, called the **platform bus** has been created to handle such devices.
- ▶ It supports **platform drivers** that handle **platform devices**.
- ▶ It works like any other bus (USB, PCI), except that devices are enumerated statically instead of being discovered dynamically.



# Implementation of a Platform Driver

- ▶ The driver implements a `struct platform_driver` structure (example taken from `drivers/serial/imx.c`)

```
static struct platform_driver serial_imx_driver = {  
    .probe = serial_imx_probe,  
    .remove = serial_imx_remove,  
    .driver = {  
        .name = "imx-uart",  
        .owner = THIS_MODULE,  
    },  
};
```

- ▶ And registers its driver to the platform driver infrastructure

```
static int __init imx_serial_init(void) {  
    ret = platform_driver_register(&serial_imx_driver);  
}  
  
static void __exit imx_serial_cleanup(void) {  
    platform_driver_unregister(&serial_imx_driver);  
}
```



## Platform Device Instantiation: old style (1/2)

- ▶ As platform devices cannot be detected dynamically, they are defined statically
  - ▶ By direct instantiation of `struct platform_device` structures, as done on some ARM platforms. Definition done in the board-specific or SoC specific code.
  - ▶ By using a *device tree*, as done on Power PC (and on some ARM platforms) from which `struct platform_device` structures are created
- ▶ Example on ARM, where the instantiation is done in `arch/arm/mach-imx/mx1ads.c`

```
static struct platform_device imx_uart1_device = {
    .name = "imx-uart",
    .id = 0,
    .num_resources = ARRAY_SIZE(imx_uart1_resources),
    .resource = imx_uart1_resources,
    .dev = {
        .platform_data = &uart_pdata,
    }
};
```



## Platform device instantiation: old style (2/2)

- ▶ The device is part of a list

```
static struct platform_device *devices[] __initdata = {  
    &cs89x0_device,  
    &imx_uart1_device,  
    &imx_uart2_device,  
};
```

- ▶ And the list of devices is added to the system during board initialization

```
static void __init mx1ads_init(void)  
{  
    [...]  
    platform_add_devices(devices, ARRAY_SIZE(devices));  
}  
  
MACHINE_START(MX1ADS, "Freescale MX1ADS")  
    [...]  
    .init_machine = mx1ads_init,  
MACHINE_END
```



# The Resource Mechanism

- ▶ Each device managed by a particular driver typically uses different hardware resources: addresses for the I/O registers, DMA channels, IRQ lines, etc.
- ▶ Such information can be represented using `struct resource`, and an array of `struct resource` is associated to a `struct platform_device`
- ▶ Allows a driver to be instantiated for multiple devices functioning similarly, but with different addresses, IRQs, etc.



# Declaring resources

```
static struct resource imx_uart1_resources[] = {
[0] = {
    .start = 0x00206000,
    .end = 0x002060FF,
    .flags = IORESOURCE_MEM,
},
[1] = {
    .start = (UART1_MINT_RX),
    .end = (UART1_MINT_RX),
    .flags = IORESOURCE_IRQ,
},
};
```



# Using Resources

- ▶ When a `struct platform_device` is added to the system using `platform_add_device()`, the `probe()` method of the platform driver gets called
- ▶ This method is responsible for initializing the hardware, registering the device to the proper framework (in our case, the serial driver framework)
- ▶ The platform driver has access to the I/O resources:

```
res = platform_get_resource(pdev, IORESOURCE_MEM, 0);
base = ioremap(res->start, PAGE_SIZE);
sport->rxirq = platform_get_irq(pdev, 0);
```



## platform\_data Mechanism

- ▶ In addition to the well-defined resources, many drivers require driver-specific information for each platform device
- ▶ Such information can be passed using the `struct platform_data` field of `struct device` (from which `struct platform_device` inherits)
- ▶ As it is a `void *` pointer, it can be used to pass any type of information.
  - ▶ Typically, each driver defines a structure to pass information through `struct platform_data`



## platform\_data example 1/2

- ▶ The i.MX serial port driver defines the following structure to be passed through `struct platform_data`

```
struct imxuart_platform_data {  
    int (*init)(struct platform_device *pdev);  
    void (*exit)(struct platform_device *pdev);  
    unsigned int flags;  
    void (*irda_enable)(int enable);  
    unsigned int irda_inv_rx:1;  
    unsigned int irda_inv_tx:1;  
    unsigned short transceiver_delay;  
};
```

- ▶ The MX1ADS board code instantiates such a structure

```
static struct imxuart_platform_data uart1_pdata = {  
    .flags = IMXUART_HAVE_RTSCTS,  
};
```



## platform\_data Example 2/2

- ▶ The `uart_pdata` structure is associated to the `struct platform_device` structure in the `MX1ADS` board file (the real code is slightly more complicated)

```
struct platform_device mx1ads_uart1 = {  
    .name = "imx-uart",  
    .dev {  
        .platform_data = &uart1_pdata,  
    },  
    .resource = imx_uart1_resources,  
    [...]  
};
```

- ▶ The driver can access the platform data:

```
static int serial_imx_probe(struct platform_device *pdev)  
{  
    struct imxuart_platform_data *pdata;  
    pdata = pdev->dev.platform_data;  
    if (pdata && (pdata->flags & IMXUART_HAVE_RTSCTS))  
        sport->have_rtscts = 1;  
    [...]
```



# Device Tree

- ▶ On many embedded architectures, manual instantiation of platform devices was considered to be too verbose and not easily maintainable.
- ▶ Such architectures are moving, or have moved, to use the *Device Tree*.
- ▶ It is a **tree of nodes** that models the hierarchy of devices in the system, from the devices inside the processor to the devices on the board.
- ▶ Each node can have a number of **properties** describing various properties of the devices: addresses, interrupts, clocks, etc.
- ▶ At boot time, the kernel is given a compiled version, the **Device Tree Blob**, which is parsed to instantiate all the devices described in the DT.
- ▶ On ARM, they are located in `arch/arm/boot/dts`.



# Device Tree example

```
uart0: serial@44e09000 {  
    compatible = "ti,omap3-uart";  
    ti,hwmods = "uart1";  
    clock-frequency = <48000000>;  
    reg = <0x44e09000 0x2000>;  
    interrupts = <72>;  
    status = "disabled";  
};
```

- ▶ `serial@44e09000` is the **node name**
- ▶ `uart0` is an **alias**, that can be referred to in other parts of the DT as `&uart0`
- ▶ other lines are **properties**. Their values are usually strings, list of integers, or references to other nodes.



## Device Tree inheritance (1/2)

- ▶ Each particular hardware platform has its own *device tree*.
- ▶ However, several hardware platforms use the same processor, and often various processors in the same family share a number of similarities.
- ▶ To allow this, a *device tree* file can include another one. The trees described by the including file overlays the tree described by the included file. This can be done:
  - ▶ Either by using the `/include/` statement provided by the Device Tree language.
  - ▶ Either by using the `#include` statement, which requires calling the C preprocessor before parsing the Device Tree.

Linux currently uses either one technique or the other, (different from one ARM subarchitecture to another, for example).



# Device Tree inheritance (2/2)

## Definition of the AM33xx SoC

```
/ {  
    compatible = "ti,am33xx";  
    [...]  
    ocp {  
        uart0: serial@44e09000 {  
            compatible = "ti,omap3-uart";  
            reg = <0x44e09000 0x2000>;  
            interrupts = <72>;  
            status = "disabled";  
        };  
    };  
};  
am33xx.dtsi
```



## Definition of the BeagleBone board

```
#include "am33xx.dtsi"  
  
/ {  
    compatible = "ti,am335x-bone", "ti,am33xx";  
    [...]  
    ocp {  
        uart0: serial@44e09000 {  
            pinctrl-names = "default";  
            pinctrl-0 = <&uart0_pins>;  
            status = "okay";  
        };  
    };  
};  
am335x-bone.dts
```



## Compiled DTB

```
/ {  
    compatible = "ti,am335x-bone", "ti,am33xx";  
    [...]  
    ocp {  
        uart0: serial@44e09000 {  
            compatible = "ti,omap3-uart";  
            reg = <0x44e09000 0x2000>;  
            interrupts = <72>;  
            pinctrl-names = "default";  
            pinctrl-0 = <&uart0_pins>;  
            status = "okay";  
        };  
    };  
};  
am335x-bone.dtb
```

Note: the real DTB is in binary format.  
Here we show the text equivalent of the DTB contents;



# Device Tree: compatible string

- ▶ With the *device tree*, a *device* is bound with the corresponding *driver* using the **compatible** string.
- ▶ The `of_match_table` field of `struct device_driver` lists the compatible strings supported by the driver.

```
#if defined(CONFIG_OF)
static const struct of_device_id omap_serial_of_match[] = {
    { .compatible = "ti,omap2-uart" },
    { .compatible = "ti,omap3-uart" },
    { .compatible = "ti,omap4-uart" },
    {},
};

MODULE_DEVICE_TABLE(of, omap_serial_of_match);
#endif
static struct platform_driver serial_omap_driver = {
    .probe        = serial_omap_probe,
    .remove       = serial_omap_remove,
    .driver       = {
        .name    = DRIVER_NAME,
        .pm      = &serial_omap_dev_pm_ops,
        .of_match_table = of_match_ptr(omap_serial_of_match),
    },
};
```



# Device Tree Resources

- ▶ The drivers will use the same mechanism that we saw previously to retrieve basic information: interrupts numbers, physical addresses, etc.
- ▶ The available resources list will be built up by the kernel at boot time from the device tree, so that you don't need to make any unnecessary lookups to the DT when loading your driver.
- ▶ Any additional information will be specific to a driver or the class it belongs to, defining the *bindings*



# Device Tree bindings

- ▶ The compatible string and the associated properties define what is called a *device tree binding*.
- ▶ *Device tree bindings* are all documented in Documentation/devicetree/bindings .
- ▶ Since the Device Tree is normally part of the kernel ABI, the *bindings* must remain compatible over-time.
  - ▶ A new kernel must be capable of using an old Device Tree.
  - ▶ This requires a very careful design of the bindings. They are all reviewed on the devicetree@vger.kernel.org mailing list.
- ▶ A Device Tree binding should contain only a *description of the hardware* and not *configuration*.
  - ▶ An interrupt number can be part of the Device Tree as it describes the hardware.
  - ▶ But not whether DMA should be used for a device or not, as it is a configuration choice.



- ▶ The bus, device, drivers, etc. structures are internal to the kernel
- ▶ The `sysfs` virtual filesystem offers a mechanism to export such information to user space
- ▶ Used for example by `udev` to provide automatic module loading, firmware loading, device file creation, etc.
- ▶ `sysfs` is usually mounted in `/sys`
  - ▶ `/sys/bus/` contains the list of buses
  - ▶ `/sys/devices/` contains the list of devices
  - ▶ `/sys/class` enumerates devices by class (`net`, `input`, `block`...), whatever the bus they are connected to. Very useful!
- ▶ Take your time to explore `/sys` on your workstation.



# References

- ▶ Device Tree for Dummies, Thomas Petazzoni (Apr. 2014):  
<http://j.mp/1jQU6NR>
- ▶ Kernel documentation
  - ▶ Documentation/driver-model/
  - ▶ Documentation/devicetree/
  - ▶ Documentation/filesystems/sysfs.txt
- ▶ The kernel source code
  - ▶ Full of examples of other drivers!




# Introduction to the I2C subsystem

# Introduction to the I2C subsystem

**Free Electrons**

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

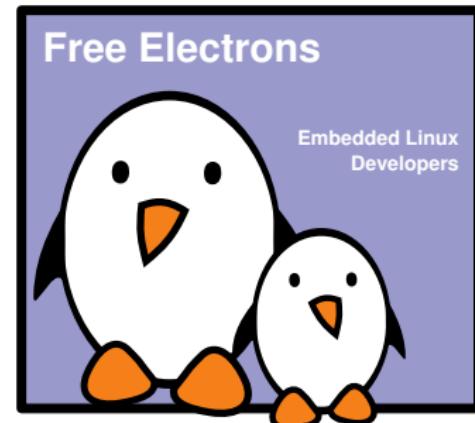




# What is I2C?

- ▶ A very commonly used low-speed bus to connect on-board devices to the processor.
- ▶ Uses only two wires: SDA for the data, SCL for the clock.
- ▶ It is a master/slave bus: only the master can initiate transactions, and slaves can only reply to transactions initiated by masters.
- ▶ In a Linux system, the I2C controller embedded in the processor is typically the master, controlling the bus.
- ▶ Each slave device is identified by a unique I2C address. Each transaction initiated by the master contains this address, which allows the relevant slave to recognize that it should reply to this particular transaction.



# An I2C bus example

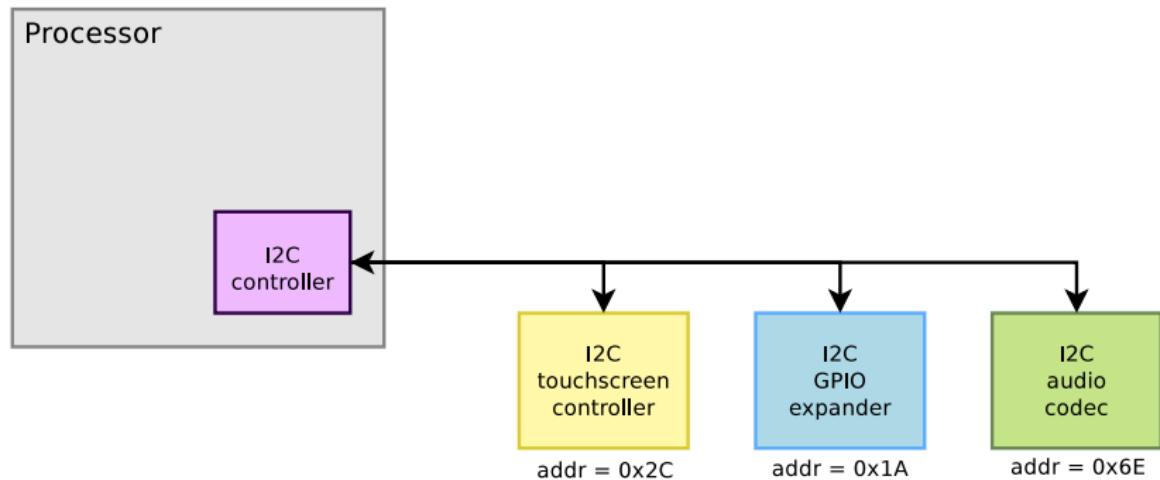



# The I2C subsystem

- ▶ Like all bus subsystems, the I2C subsystem is responsible for:
  - ▶ Providing an API to implement I2C controller drivers
  - ▶ Providing an API to implement I2C device drivers, in kernel space
  - ▶ Providing an API to implement I2C device drivers, in user space
- ▶ The core of the I2C subsystem is located in `drivers/i2c`.
- ▶ The I2C controller drivers are located in `drivers/i2c/busses`.
- ▶ The I2C device drivers are located throughout `drivers/`, depending on the type of device (ex: `drivers/input` for input devices).



# Registering an I2C device driver

- ▶ Like all bus subsystems, the I2C subsystem defines a `struct i2c_driver` that inherits from `struct device_driver`, and which must be instantiated and registered by each I2C device driver.
  - ▶ As usual, this structure points to the `->probe()` and `->remove()` functions.
  - ▶ It also contains an `id_table` field that must point to a list of *device IDs* (which is a list of tuples containing a string and some private driver data). It is used for non-DT based probing of I2C devices.
- ▶ The `i2c_add_driver()` and `i2c_del_driver()` functions are used to register/unregister the driver.
- ▶ If the driver doesn't do anything else in its `init()`/`exit()` functions, it is advised to use the `module_i2c_driver()` macro instead.



# Registering an I2C device driver: example

```
static const struct i2c_device_id <driver>_id[] = {
    { "<device-name>", 0 },
    { }
};

MODULE_DEVICE_TABLE(i2c, <driver>_id);

#ifndef CONFIG_OF
static const struct of_device_id <driver>_dt_ids[] = {
    { .compatible = "<vendor>,<device-name>", },
    { }
};
MODULE_DEVICE_TABLE(of, <driver>_dt_ids);
#endif

static struct i2c_driver <driver>_driver = {
    .probe          = <driver>_probe,
    .remove         = <driver>_remove,
    .id_table       = <driver>_id,
    .driver = {
        .name    = "<driver-name>",
        .owner   = THIS_MODULE,
        .of_match_table = of_match_ptr(<driver>_dt_ids),
    },
};

module_i2c_driver(<driver>_driver);
```



## Registering an I2C device: non-DT

- ▶ On non-DT platforms, the `struct i2c_board_info` structure allows to describe how an I2C device is connected to a board.
- ▶ Such structures are normally defined with the `I2C_BOARD_INFO()` helper macro.
  - ▶ Takes as argument the device name and the slave address of the device on the bus.
- ▶ An array of such structures is registered on a per-bus basis using `i2c_register_board_info()`, when the platform is initialized.



# Registering an I2C device, non-DT example

```
static struct i2c_board_info <board>_i2c_devices[] __initdata = {
{
    I2C_BOARD_INFO("cs42l51", 0x4a),
},
};

void board_init(void)
{
    /*
     * Here should be the registration of all devices, including
     * the I2C controller device.
     */

    i2c_register_board_info(0, <board>_i2c_devices,
                           ARRAY_SIZE(<board>_i2c_devices));

    /* More devices registered here */
}
```



# Registering an I2C device, in the DT

- ▶ In the Device Tree, the I2C controller device is typically defined in the `.dtsi` file that describes the processor.
  - ▶ Normally defined with `status = "disabled"`.
- ▶ At the board/platform level:
  - ▶ the I2C controller device is enabled (`status = "okay"`)
  - ▶ the I2C bus frequency is defined, using the `clock-frequency` property.
  - ▶ the I2C devices on the bus are described as children of the I2C controller node, where the `reg` property gives the I2C slave address on the bus.



# Registering an I2C device, DT example (1/2)

## Definition of the I2C controller, .dtsi file

```
i2c@7000c000 {
    compatible = "nvidia,tegra20-i2c";
    reg = <0x7000c000 0x100>;
    interrupts = <GIC_SPI 38 IRQ_TYPE_LEVEL_HIGH>;
    #address-cells = <1>;
    #size-cells = <0>;
    clocks = <&tegra_car TEGRA20_CLK_I2C1>,
              <&tegra_car TEGRA20_CLK_PLL_P_OUT3>;
    clock-names = "div-clk", "fast-clk";
    status = "disabled";
};
```



## Registering an I2C device, DT example (2/2)

### Definition of the I2C device, .dts file

```
i2c@7000c000 {
    status = "okay";
    clock-frequency = <400000>

    alc5632: alc5632@1e {
        compatible = "realtek,alc5632";
        reg = <0x1e>;
        gpio-controller;
        #gpio-cells = <2>;
    };
};
```



## probe() and remove()

- ▶ The `->probe()` function is responsible for initializing the device and registering it in the appropriate kernel framework. It receives as argument:
  - ▶ A `struct i2c_client` pointer, which represents the I2C device itself. This structure inherits from `struct device`.
  - ▶ A `struct i2c_device_id` pointer, which points to the I2C device ID entry that matched the device that is being probed.
- ▶ The `->remove()` function is responsible for unregistering the device from the kernel framework and shut it down. It receives as argument:
  - ▶ The same `struct i2c_client` pointer that was passed as argument to `->probe()`



## Probe/remove example

```
static int <driver>_probe(struct i2c_client *client,
                           const struct i2c_device_id *id)
{
    /* initialize device */
    /* register to a kernel framework */

    i2c_set_clientdata(client, <private data>);
    return 0;
}

static int <driver>_remove(struct i2c_client *client)
{
    <private data> = i2c_get_clientdata(client);
    /* unregister device from kernel framework */
    /* shut down the device */
    return 0;
}
```



# Practical lab - Linux device model for an I2C driver



- ▶ Modify the Device Tree to instantiate an I2C device.
- ▶ Implement a driver that registers as an I2C driver.
- ▶ Make sure that the probe/remove functions are called when there is a device/driver match.
- ▶ Explore the `sysfs` entries related to your driver and device.



## Communicating with the I2C device: raw API

The most **basic API** to communicate with the I2C device provides functions to either send or receive data:

- ▶ `int i2c_master_send(struct i2c_client *client,  
const char *buf, int count);`  
Sends the contents of buf to the client.
- ▶ `int i2c_master_recv(struct i2c_client *client,  
char *buf, int count);`  
Receives count bytes from the client, and store them into buf.



## Communicating with the I2C device: message transfer

The message transfer API allows to describe **transfers** that consists of several **messages**, with each message being a transaction in one direction:

- ▶ `int i2c_transfer(struct i2c_adapter *adap, struct i2c_msg *msg, int num);`
- ▶ The `struct i2c_adapter` pointer can be found by using `client->adapter`
- ▶ The `struct i2c_msg` structure defines the length, location, and direction of the message.



## I2C: message transfer example

```
struct i2c_msg msg[2];
int error;
u8 start_reg;
u8 buf[10];

msg[0].addr = client->addr;
msg[0].flags = 0;
msg[0].len = 1;
msg[0].buf = &start_reg;
start_reg = 0x10;

msg[1].addr = client->addr;
msg[1].flags = I2C_M_RD;
msg[1].len = sizeof(buf);
msg[1].buf = buf;

error = i2c_transfer(client->adapter, msg, 2);
```



## SMBus calls

- ▶ SMBus is a subset of the I2C protocol.
- ▶ It defines a standard set of transactions, for example to read or write a register into a device.
- ▶ Linux provides SMBus functions that *should be used* when possible instead of the raw API, if the I2C device uses this standard type of transactions.
- ▶ Example: the `i2c_smbus_read_byte_data()` function allows to read one byte of data from a device register.
  - ▶ It does the following operations:  
S Addr Wr [A] Comm [A] S Addr Rd [A] [Data] NA P
  - ▶ Which means it first writes a one byte data command (*Comm*), and then reads back one byte of data ([*Data*]).
- ▶ See `Documentation/i2c/smbus-protocol` for details.



# List of SMBus functions

- ▶ Read/write one byte
  - ▶ `s32 i2c_smbus_read_byte(const struct i2c_client *client);`
  - ▶ `s32 i2c_smbus_write_byte(const struct i2c_client *client, u8 value);`
- ▶ Write a command byte, and read or write one byte
  - ▶ `s32 i2c_smbus_read_byte_data(const struct i2c_client *client, u8 command);`
  - ▶ `s32 i2c_smbus_write_byte_data(const struct i2c_client *client, u8 command, u8 value);`
- ▶ Write a command byte, and read or write one word
  - ▶ `s32 i2c_smbus_read_word_data(const struct i2c_client *client, u8 command);`
  - ▶ `s32 i2c_smbus_write_word_data(const struct i2c_client *client, u8 command, u16 value);`
- ▶ Write a command byte, and read or write a block of data (max 32 bytes)
  - ▶ `s32 i2c_smbus_read_block_data(const struct i2c_client *client, u8 command, u8 *values);`
  - ▶ `s32 i2c_smbus_write_block_data(const struct i2c_client *client, u8 command, u8 length, const u8 *values);`
- ▶ Write a command byte, and read or write a block of data (no limit)
  - ▶ `s32 i2c_smbus_read_i2c_block_data(const struct i2c_client *client, u8 command, u8 length, u8 *values);`
  - ▶ `s32 i2c_smbus_write_i2c_block_data(const struct i2c_client *client, u8 command, u8 length, const u8 *values);`



## I2C functionality

- ▶ Not all I2C controllers support all functionalities.
- ▶ The I2C controller drivers therefore tell the I2C core which functionalities they support.
- ▶ An I2C device driver must check that the functionalities they need are provided by the I2C controller in use on the system.
- ▶ The `i2c_check_functionality()` function allows to make such a check.
- ▶ Examples of functionalities: `I2C_FUNC_I2C` to be able to use the raw I2C functions, `I2C_FUNC_SMBUS_BYTE_DATA` to be able to use SMBus commands to write a command and read/write one byte of data.
- ▶ See `include/uapi/linux/i2c.h` for the full list of existing functionalities.



## References

- ▶ <http://en.wikipedia.org/wiki/I2C>, general presentation of the I2C protocol
- ▶ Documentation/i2c/ , details about the Linux support for I2C
  - ▶ writing-clients, how to write I2C device drivers
  - ▶ instantiating-devices, how to instantiate devices
  - ▶ smbus-protocol, details on the SMBus functions
  - ▶ functionality, how the functionality mechanism works
  - ▶ and many more documentation files
- ▶ <http://free-electrons.com/pub/video/2012/elce/elce-2012-anders-board-bringup-i2c.webm>, excellent talk: *You, me and I2C* from David Anders at ELCE 2012.




# Introduction to pin muxing

# Introduction to pin muxing

**Free Electrons**

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

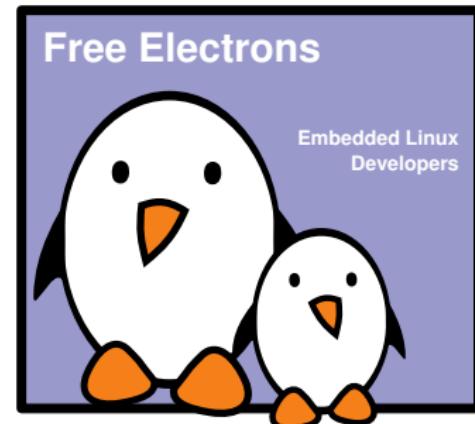




# What is pin muxing?

- ▶ Modern SoCs (System on Chip) include more and more hardware blocks, many of which need to interface with the outside world using *pins*.
- ▶ However, the physical size of the chips remains small, and therefore the number of available pins is limited.
- ▶ For this reason, not all of the internal hardware block features can be exposed on the pins simultaneously.
- ▶ The pins are **multiplexed**: they expose either the functionality of hardware block A **or** the functionality of hardware block B.
- ▶ This *multiplexing* is usually software configurable.



# Pin muxing diagram

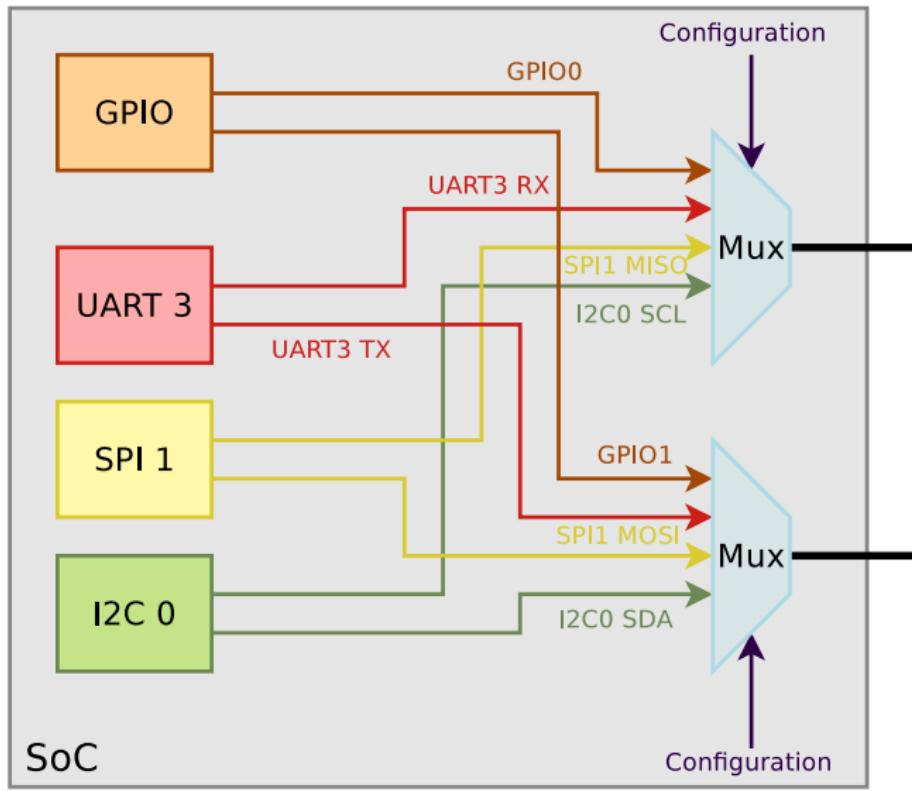




## Pin muxing in the Linux kernel

- ▶ Since Linux 3.2, a `pinctrl` subsystem has been added.
- ▶ This subsystem, located in `drivers/pinctrl` provides a generic subsystem to handle pin muxing. It offers:
  - ▶ A pin muxing consumer interface, for device drivers.
  - ▶ A pin muxing driver interface, to implement the system-on-chip specific drivers that configure the muxing.
- ▶ Most `pinctrl` drivers provide a Device Tree binding, and the pin muxing must be described in the Device Tree.
  - ▶ The exact Device Tree binding depends on each driver. Each binding is documented in  
`Documentation/devicetree/bindings/pinctrl` .



# pinctrl subsystem diagram

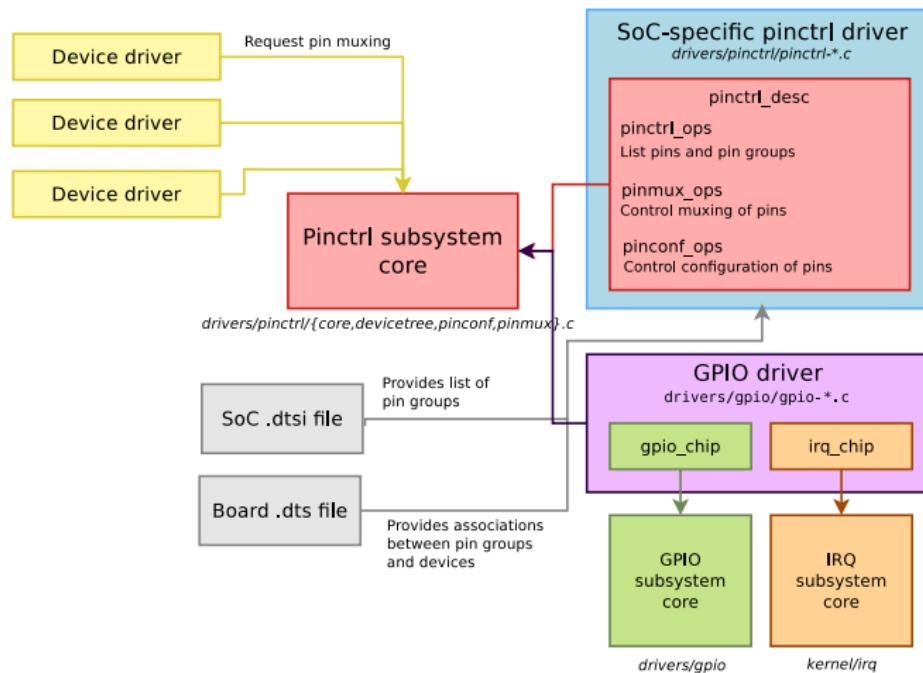



# Device Tree binding for consumer devices

- ▶ The devices that require certain pins to be muxed will use the `pinctrl-<x>` and `pinctrl-names` Device Tree properties.
- ▶ The `pinctrl-0`, `pinctrl-1`, `pinctrl-<x>` properties link to a pin configuration for a given state of the device.
- ▶ The `pinctrl-names` property associates a name to each state. The name `default` is special, and is automatically selected by a device driver, without having to make an explicit `pinctrl` function call.
- ▶ In most cases, the following is sufficient:

```
i2c@11000 {
    pinctrl-0 = <&pmx_twsi0>;
    pinctrl-names = "default";
    ...
};
```

- ▶ See `Documentation/devicetree/bindings/pinctrl/pinctrl-bindings.txt` for details.



# Defining pinctrl configurations

- ▶ The different *pinctrl configurations* must be defined as child nodes of the main *pinctrl device* (which controls the muxing of pins).
- ▶ The configurations may be defined at:
  - ▶ the SoC level (`.dtsi` file), for pin configurations that are often shared between multiple boards
  - ▶ at the board level (`.dts` file) for configurations that are board specific.
- ▶ The `pinctrl-<x>` property of the consumer device points to the pin configuration it needs through a DT *phandle*.
- ▶ The description of the configurations is specific to each *pinctrl driver*. See  
`Documentation/devicetree/bindings/pinctrl` for the DT bindings documentation.



# Example on OMAP/AM33xx

- ▶ On OMAP/AM33xx, the `pinctrl-single` driver is used. It is common between multiple SoCs and simply allows to configure pins by writing a value to a register.
  - ▶ In each pin configuration, a `pinctrl-single,pins` value gives a list of (*register, value*) pairs needed to configure the pins.
- ▶ To know the correct values, one must use the SoC and board datasheets.

```
am33xx_pinmux: pinmux@44e10800 {
    i2c0_pins: pinmux_i2c0_pins {
        pinctrl-single,pins = <
            /* i2c0_sda.i2c0_sda */  

            0x188 (PIN_INPUT_PULLUP | MUX_MODE0)  

            /* i2c0_scl.i2c0_scl */  

            0x18c (PIN_INPUT_PULLUP | MUX_MODE0)
        >;
    };
};

i2c0: i2c@44e0b000 {
    pinctrl-names = "default";
    pinctrl-0 = <&i2c0_pins>;

    status = "okay";
    clock-frequency = <400000>

    tps: tps@2d {
        reg = <0x2d>;
    };
};
```



# Example on Allwinner SoC

## SoC level

```
arch/arm/boot/dts/sun7i-a20.dtsi
/ {
    soc@01c00000 {
        pio: pinctrl@01c20800 {
            compatible = "allwinner,sun7i-a20-pinctrl";
            reg = <0x01c20800 0x400>;
            interrupts = <0 28 1>

            UART0
            pin mux
            config
                uart0_pins_a: uart0@0 {
                    allwinner,pins = "PB22", "PB23";
                    allwinner,function = "uart0";
                    allwinner,drive = <0>;
                    allwinner,pull = <0>;
                };
            ...
        };
    };
}
```



## Board level

```
arch/arm/boot/dts/sun7i-a20-olinuxino-micro.dts
/ {
    soc@01c00000 {
        pio: pinctrl@01c20800 {
            led_pins_olinuxino: led_pins@0 {
                LED
                pin mux
                config
                    allwinner,pins = "PH2";
                    allwinner,function = "gpio_out";
                    allwinner,drive = <1>;
                    allwinner,pull = <0>;
            };
        };

        uart0: serial@01c28000 {
            pinctrl-names = "default";
            pinctrl-0 = <&uart0_pins_a>;
            status = "okay";
        };

        leds {
            Declare LED
            device and
            associate
            pin mux
            config
                compatible = "gpio-leds";
                pinctrl-names = "default";
                pinctrl-0 = <&led_pins_olinuxino>;
        };

        green {
            label = "a20-olinuxino-micro:green:usr";
            gpios = <&pio 7 2 0>;
            default-state = "on";
        };
    };
}
```



Enable UART0  
and associate  
pin mux  
config

Declare LED  
device and  
associate  
pin mux  
config

green {  
label = "a20-olinuxino-micro:green:usr";  
gpios = <&pio 7 2 0>;  
default-state = "on";  
};  
};



# Practical lab - Communicate with the Nunchuk



- ▶ Configure the pinmuxing for the I2C bus used to communicate with the Nunchuk
- ▶ Validate that the I2C communication works with user space tools.
- ▶ Extend the I2C driver started in the previous lab to communicate with the Nunchuk.




# Kernel frameworks for device drivers

# Kernel frameworks for device drivers

## Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

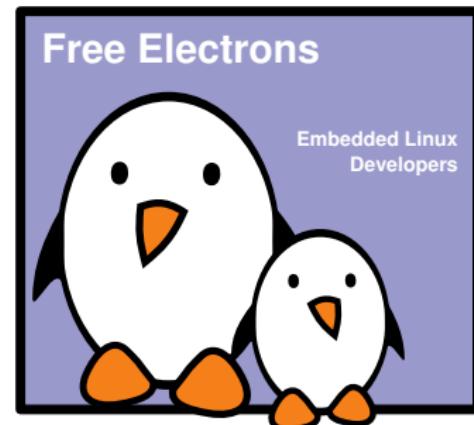




# Kernel and Device Drivers

In Linux, a driver is always interfacing with:

- ▶ a **framework** that allows the driver to expose the hardware features to user space applications.
- ▶ a **bus infrastructure**, part of the device model, to detect/communicate with the hardware.

This section focuses on the *kernel frameworks*, while the *device model* was covered earlier in this training.

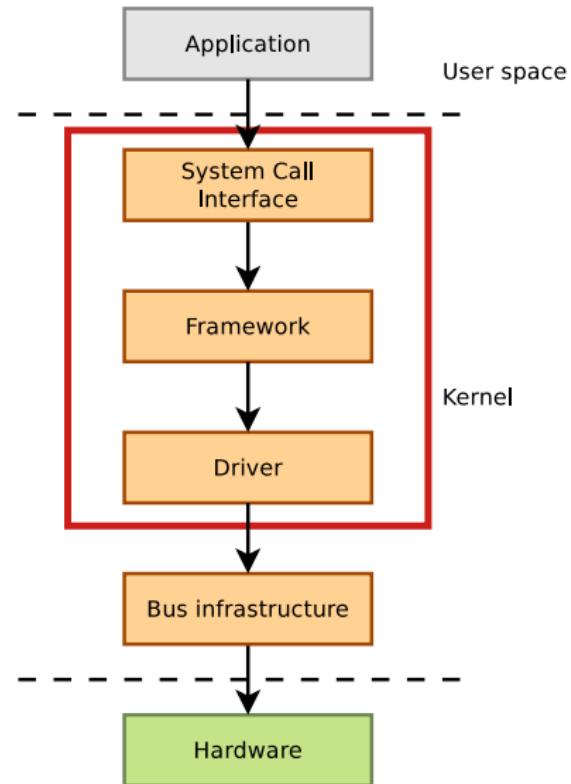



## User space vision of devices



# Types of devices

Under Linux, there are essentially three types of devices:

- ▶ **Network devices.** They are represented as network interfaces, visible in user space using `ifconfig`.
  - ▶ **Block devices.** They are used to provide user space applications access to raw storage devices (hard disks, USB keys). They are visible to the applications as *device files* in `/dev`.
  - ▶ **Character devices.** They are used to provide user space applications access to all other types of devices (input, sound, graphics, serial, etc.). They are also visible to the applications as *device files* in `/dev`.
- Most devices are *character devices*, so we will study those in more details.



## Major and minor numbers

- ▶ Within the kernel, all block and character devices are identified using a *major* and a *minor* number.
- ▶ The *major number* typically indicates the family of the device.
- ▶ The *minor number* typically indicates the number of the device (when they are for example several serial ports)
- ▶ Most major and minor numbers are statically allocated, and identical across all Linux systems.
- ▶ They are defined in `Documentation/devices.txt` .



## Devices: everything is a file

- ▶ A very important Unix design decision was to represent most of the “system objects” as files
- ▶ It allows applications to manipulate all “system objects” with the normal file API (`open`, `read`, `write`, `close`, etc.)
- ▶ So, devices had to be represented as files to the applications
- ▶ This is done through a special artifact called a **device file**
- ▶ It is a special type of file, that associates a file name visible to user space applications to the triplet (*type*, *major*, *minor*) that the kernel understands
- ▶ All *device files* are by convention stored in the `/dev` directory



# Device files examples

Example of device files in a Linux system

```
$ ls -l /dev/ttyS0 /dev/tty1 /dev/sda1 /dev/sda2 /dev/zero  
brw-rw---- 1 root disk      8,  1 2011-05-27 08:56 /dev/sda1  
brw-rw---- 1 root disk      8,  2 2011-05-27 08:56 /dev/sda2  
crw----- 1 root root       4,  1 2011-05-27 08:57 /dev/tty1  
crw-rw---- 1 root dialout   4, 64 2011-05-27 08:56 /dev/ttyS0  
crw-rw-rw- 1 root root       1,  5 2011-05-27 08:56 /dev/zero
```

Example C code that uses the usual file API to write data to a serial port

```
int fd;  
fd = open("/dev/ttyS0", O_RDWR);  
write(fd, "Hello", 5);  
close(fd);
```



# Creating device files

- ▶ On a basic Linux system, the device files have to be created manually using the `mknod` command
  - ▶ `mknod /dev/<device> [c|b] major minor`
  - ▶ Needs root privileges
  - ▶ Coherency between device files and devices handled by the kernel is left to the system developer
- ▶ On more elaborate Linux systems, mechanisms can be added to create/remove them automatically when devices appear and disappear
  - ▶ `devtmpfs` virtual filesystem
  - ▶ `udev` daemon, solution used by desktop and server Linux systems
  - ▶ `mdev` program, a lighter solution than `udev`



## Character drivers




## A character driver in the kernel

- ▶ From the point of view of an application, a *character device* is essentially a **file**.
- ▶ The driver of a character device must therefore implement **operations** that let applications think the device is a file: `open`, `close`, `read`, `write`, etc.
- ▶ In order to achieve this, a character driver must implement the operations described in the `struct file_operations` structure and register them.
- ▶ The Linux filesystem layer will ensure that the driver's operations are called when a user space application makes the corresponding system call.



# From user space to the kernel: character devices

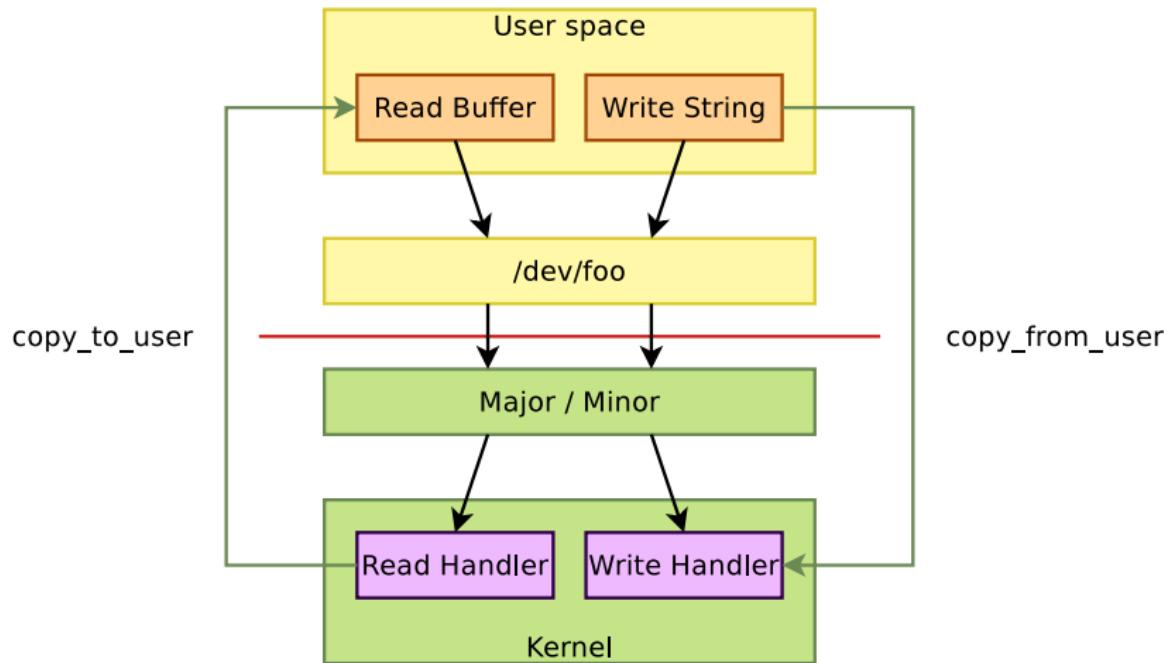



# File operations

- ▶ Here are the most important operations for a character driver.  
All of them are optional.

```
#include <linux/fs.h>

struct file_operations {
    ssize_t (*read) (struct file *, char __user *,
                    size_t, loff_t *);
    ssize_t (*write) (struct file *, const char __user *,
                     size_t, loff_t *);
    long (*unlocked_ioctl) (struct file *, unsigned int,
                           unsigned long);
    int (*mmap) (struct file *, struct vm_area_struct *);
    int (*open) (struct inode *, struct file *);
    int (*release) (struct inode *, struct file *);
};
```



# open() and release()

- ▶ `int foo_open(struct inode *i, struct file *f)`
  - ▶ Called when user space opens the device file.
  - ▶ `struct inode` is a structure that uniquely represents a file in the system (be it a regular file, a directory, a symbolic link, a character or block device)
  - ▶ `struct file` is a structure created every time a file is opened. Several file structures can point to the same `inode` structure.
    - ▶ Contains information like the current position, the opening mode, etc.
    - ▶ Has a `void *private_data` pointer that one can freely use.
    - ▶ A pointer to the file structure is passed to all other operations
- ▶ `int foo_release(struct inode *i, struct file *f)`
  - ▶ Called when user space closes the file.



## read()

- ▶ `ssize_t foo_read(struct file *f, char __user *buf, size_t sz, loff_t *off)`
  - ▶ Called when user space uses the `read()` system call on the device.
  - ▶ Must read data from the device, write at most `sz` bytes in the user space buffer `buf`, and update the current position in the file `off`. `f` is a pointer to the same file structure that was passed in the `open()` operation
  - ▶ Must return the number of bytes read.
  - ▶ On UNIX, `read()` operations typically block when there isn't enough data to read from the device



## write()

- ▶ 

```
ssize_t foo_write(struct file *f,
                  const char __user *buf, size_t sz, loff_t *off)
```

  - ▶ Called when user space uses the `write()` system call on the device
  - ▶ The opposite of `read`, must read at most `sz` bytes from `buf`, write it to the device, update `off` and return the number of bytes written.



# Exchanging data with user space 1/3

- ▶ Kernel code isn't allowed to directly access user space memory, using `memcpy()` or direct pointer dereferencing
  - ▶ Doing so does not work on some architectures
  - ▶ If the address passed by the application was invalid, the application would segfault.
- ▶ To keep the kernel code portable and have proper error handling, your driver must use special kernel functions to exchange data with user space.



# Exchanging data with user space 2/3

- ▶ A single value

- ▶ `get_user(v, p);`
  - ▶ The kernel variable `v` gets the value pointed by the user space pointer `p`
- ▶ `put_user(v, p);`
  - ▶ The value pointed by the user space pointer `p` is set to the contents of the kernel variable `v`.


- ▶ A buffer

- ▶ `unsigned long copy_to_user(void __user *to,`  
`const void *from, unsigned long n);`
- ▶ `unsigned long copy_from_user(void *to,`  
`const void __user *from, unsigned long n);`

- ▶ The return value must be checked. Zero on success, non-zero on failure. If non-zero, the convention is to return `-EFAULT`.



## Exchanging data with user space 3/3

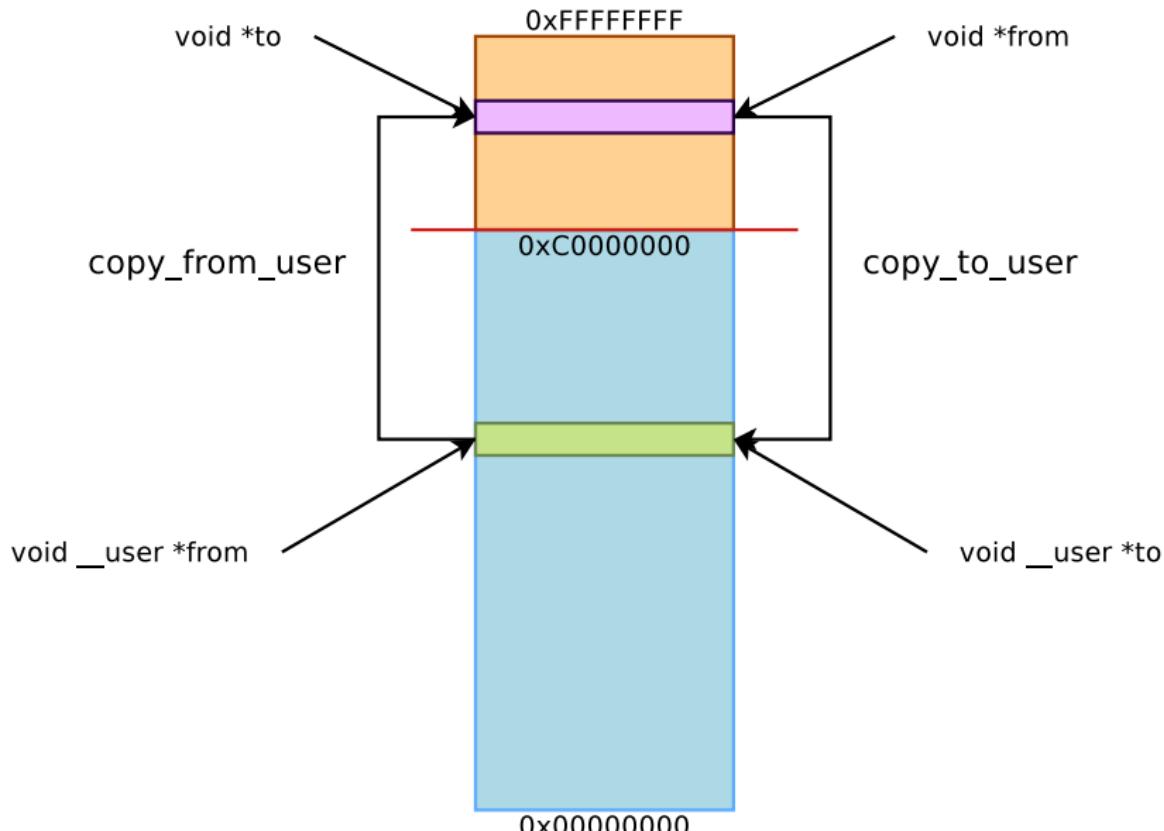



## Zero copy access to user memory

- ▶ Having to copy data to or from an intermediate kernel buffer can become expensive when the amount of data to transfer is large (video).
- ▶ *Zero copy options are possible:*
  - ▶ `mmap()` system call to allow user space to directly access memory mapped I/O space. See our `mmap()` chapter.
  - ▶ `get_user_pages()` to get a mapping to user pages without having to copy them. See <http://j.mp/oPW6Fb> (Kernel API doc). This API is more complex to use though.



## unlocked\_ioctl()

- ▶ 

```
long unlocked_ioctl(struct file *f,
                     unsigned int cmd, unsigned long arg)
```

  - ▶ Associated to the ioctl() system call.
  - ▶ Called *unlocked* because it didn't hold the Big Kernel Lock (gone now).
  - ▶ Allows to extend the driver capabilities beyond the limited read/write API.
  - ▶ For example: changing the speed of a serial port, setting video output format, querying a device serial number...
  - ▶ cmd is a number identifying the operation to perform
  - ▶ arg is the optional argument passed as third argument of the ioctl() system call. Can be an integer, an address, etc.
  - ▶ The semantic of cmd and arg is driver-specific.



# ioctl() example: kernel side

```
static long phantom_ioctl(struct file *file, unsigned int cmd,
                          unsigned long arg)
{
    struct phm_reg r;
    void __user *argp = (void __user *)arg;

    switch (cmd) {
    case PHN_SET_REG:
        if (copy_from_user(&r, argp, sizeof(r)))
            return -EFAULT;
        /* Do something */
        break;
    case PHN_GET_REG:
        if (copy_to_user(argp, &r, sizeof(r)))
            return -EFAULT;
        /* Do something */
        break;
    default:
        return -ENOTTY;
    }

    return 0; }
```

Selected excerpt from drivers/misc/phantom.c



## ioctl() Example: Application Side

```
int main(void)
{
    int fd, ret;
    struct phm_reg reg;

    fd = open("/dev/phantom");
    assert(fd > 0);

    reg.field1 = 42;
    reg.field2 = 67;

    ret = ioctl(fd, PHN_SET_REG, & reg);
    assert(ret == 0);

    return 0;
}
```



## The concept of kernel frameworks




## Beyond character drivers: kernel frameworks

- ▶ Many device drivers are not implemented directly as character drivers
- ▶ They are implemented under a *framework*, specific to a given device type (framebuffer, V4L, serial, etc.)
  - ▶ The framework allows to factorize the common parts of drivers for the same type of devices
  - ▶ From user space, they are still seen as character devices by the applications
  - ▶ The framework allows to provide a coherent user space interface (`ioctl`, etc.) for every type of device, regardless of the driver



# Kernel Frameworks

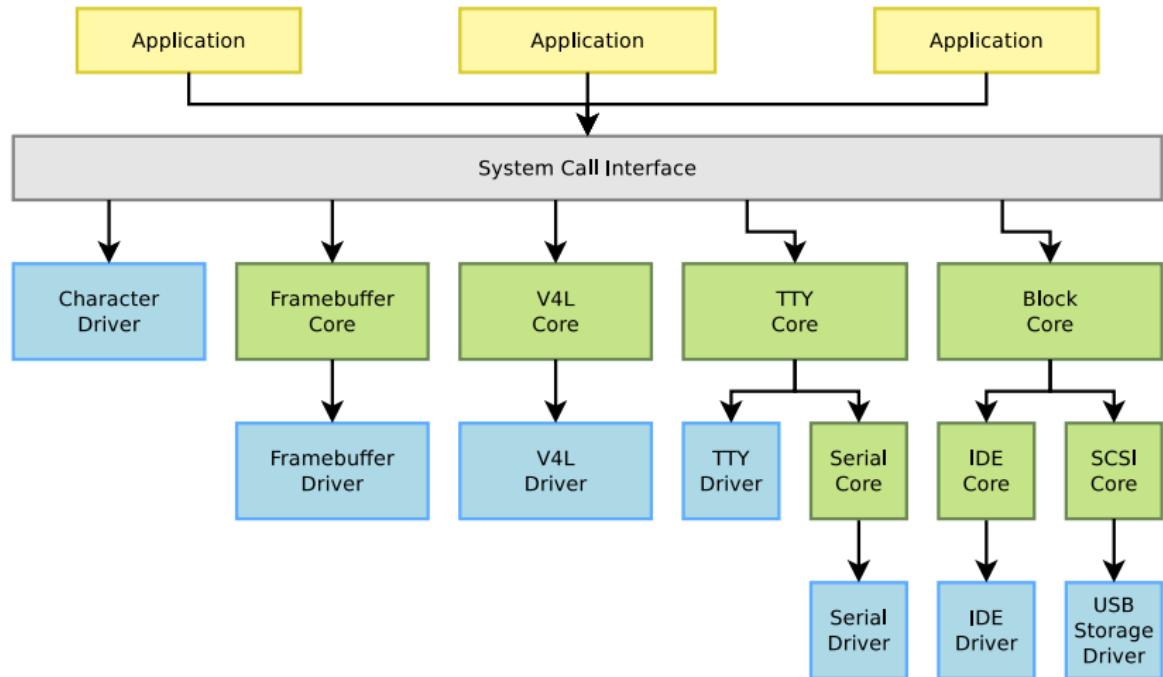



## Example of the framebuffer framework



## Example: Framebuffer Framework

- ▶ Kernel option `CONFIG_FB`
  - ▶ `menuconfig FB`
    - ▶ tristate "Support for frame buffer devices"
- ▶ Implemented in `drivers/video/`
  - ▶ `fb.c, fbmem.c, fbmon.c, fbcmap.c, fbsysfs.c, modedb.c, fbcvt.c`
- ▶ Implements a single character driver and defines the user/kernel API
  - ▶ First part of `include/linux/fb.h`
- ▶ Defines the set of operations a framebuffer driver must implement and helper functions for the drivers
  - ▶ `struct fb_ops`
  - ▶ Second part of `include/linux/fb.h` (`in ifdef __KERNEL__`)



# Framebuffer Driver Skeleton

- ▶ Skeleton driver in `drivers/video/skeletonfb.c`
- ▶ Implements the set of framebuffer specific operations defined by the `struct fb_ops` structure
  
- ▶ `xxxfb_open()`
- ▶ `xxxfb_read()`
- ▶ `xxxfb_write()`
- ▶ `xxxfb_release()`
- ▶ `xxxfb_checkvar()`
- ▶ `xxxfb_setpar()`
- ▶ `xxxfb_setcolreg()`
- ▶ `xxxfb_blank()`
- ▶ `xxxfb_pan_display()`
- ▶ `xxxfb_fillrect()`
- ▶ `xxxfb_copyarea()`
- ▶ `xxxfb_imageblit()`
- ▶ `xxxfb_cursor()`
- ▶ `xxxfb_rotate()`
- ▶ `xxxfb_sync()`
- ▶ `xxxfb_ioctl()`
- ▶ `xxxfb_mmap()`



# Framebuffer Driver Skeleton

- ▶ After the implementation of the operations, definition of a

```
struct fb_ops structure
```

```
static struct fb_ops xxxfb_ops = {  
    .owner = THIS_MODULE,  
    .fb_open = xxxfb_open,  
    .fb_read = xxxfb_read,  
    .fb_write = xxxfb_write,  
    .fb_release = xxxfb_release,  
    .fb_check_var = xxxfb_check_var,  
    .fb_set_par = xxxfb_set_par,  
    .fb_setcolreg = xxxfb_setcolreg,  
    .fb_blank = xxxfb_blank,  
    .fb_pan_display = xxxfb_pan_display,  
    .fb_fillrect = xxxfb_fillrect, /* Needed !!! */  
    .fb_copyarea = xxxfb_copyarea, /* Needed !!! */  
    .fb_imageblit = xxxfb_imageblit, /* Needed !!! */  
    .fb_cursor = xxxfb_cursor, /* Optional !!! */  
    .fb_rotate = xxxfb_rotate,  
    .fb_sync = xxxfb_sync,  
    .fb_ioctl = xxxfb_ioctl,  
    .fb_mmap = xxxfb_mmap,  
};
```



# Framebuffer Driver Skeleton

- ▶ In the `probe()` function, registration of the framebuffer device and operations

```
static int xxxfb_probe (struct pci_dev *dev,
                       const struct pci_device_id *ent)
{
    struct fb_info *info;
    [...]
    info = framebuffer_alloc(sizeof(struct xxx_par), device);
    [...]
    info->fbops = &xxxfb_ops;
    [...]
    if (register_framebuffer(info) > 0)
        return -EINVAL;
    [...]
}
```

- ▶ `register_framebuffer()` will create the character device that can be used by user space applications with the generic framebuffer API.



# Driver-specific Data Structure

- ▶ Each *framework* defines a structure that a device driver must register to be recognized as a device in this framework
  - ▶ `struct uart_port` for serial port, `struct netdev` for network devices, `struct fb_info` for framebuffers, etc.
- ▶ In addition to this structure, the driver usually needs to store additional information about its device
- ▶ This is typically done
  - ▶ By subclassing the appropriate framework structure
  - ▶ By storing a reference to the appropriate framework structure
  - ▶ Or by including your information in the framework structure



# Driver-specific Data Structure Examples 1/2

- ▶ i.MX serial driver: struct imx\_port is a subclass of struct uart\_port

```
struct imx_port {  
    struct uart_port port;  
    struct timer_list timer;  
    unsigned int old_status;  
    int txirq, rxirq, rtsirq;  
    unsigned int have_rtscts:1;  
    [...]  
};
```
- ▶ ds1305 RTC driver: struct ds1305 has a reference to struct rtc\_device

```
struct ds1305 {  
    struct spi_device      *spi;  
    struct rtc_device      *rtc;  
    [...]  
};
```



## Driver-specific Data Structure Examples 2/2

- ▶ rtl8150 network driver: `struct rtl8150` has a reference to `struct net_device` and is allocated within that framework structure.

```
struct rtl8150 {  
    unsigned long flags;  
    struct usb_device *udev;  
    struct tasklet_struct tl;  
    struct net_device *netdev;  
    [...]  
};
```



## Link Between Structures 1/4


- ▶ The framework typically contains a `struct device *` pointer that the driver must point to the corresponding `struct device`
  - ▶ It's the relation between the logical device (for example a network interface) and the physical device (for example the USB network adapter)
- ▶ The device structure also contains a `void *` pointer that the driver can freely use.
  - ▶ It's often used to link back the device to the higher-level structure from the framework.
  - ▶ It allows, for example, from the `struct platform_device` structure, to find the structure describing the logical device



# Link Between Structures 2/4

```
static int serial_imx_probe(struct platform_device *pdev)
{
    struct imx_port *sport;
    [...]
    /* setup the link between uart_port and the struct
     * device inside the platform_device */
    sport->port.dev = &pdev->dev;
    [...]
    /* setup the link between the struct device inside
     * the platform device to the imx_port structure */
    platform_set_drvdata(pdev, &sport->port);
    [...]
    uart_add_one_port(&imx_reg, &sport->port);
}

static int serial_imx_remove(struct platform_device *pdev)
{
    /* retrieve the imx_port from the platform_device */
    struct imx_port *sport = platform_get_drvdata(pdev);
    [...]
    uart_remove_one_port(&imx_reg, &sport->port);
    [...]
}
```

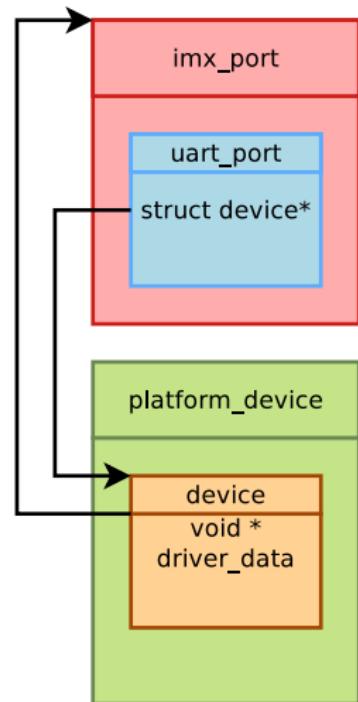




# Link Between Structures 3/4

```
static int ds1305_probe(struct spi_device *spi)
{
    struct ds1305             *ds1305;
    [...]
    /* set up driver data */
    ds1305 = devm_kzalloc(&spi->dev, sizeof(*ds1305), GFP_KERNEL);
    if (!ds1305)
        return -ENOMEM;
    ds1305->spi = spi;
    spi_set_drvdata(spi, ds1305);
    [...]
    /* register RTC ... from here on, ds1305->ctrl needs locking */
    ds1305->rtc = devm_rtc_device_register(&spi->dev, "ds1305",
                                           &ds1305_ops, THIS_MODULE);
    [...]
}

static int ds1305_remove(struct spi_device *spi)
{
    struct ds1305 *ds1305 = spi_get_drvdata(spi);
    [...]
}
```

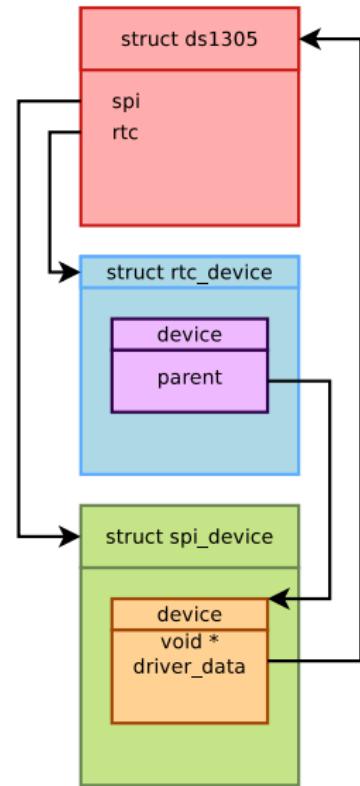



# Link Between Structures 4/4

```
static int rtl8150_probe(struct usb_interface *intf,
    const struct usb_device_id *id)
{
    struct usb_device *udev = interface_to_usbdev(intf);
    rtl8150_t *dev;
    struct net_device *netdev;

    netdev = alloc_etherdev(sizeof(rtl8150_t));
    dev = netdev_priv(netdev);

    [...]

    dev->udev = udev;
    dev->netdev = netdev;


    [...]

    usb_set_intfdata(intf, dev);
    SET_NETDEV_DEV(netdev, &intf->dev);

    [...]
}

static void rtl8150_disconnect(struct usb_interface *intf)
{
    rtl8150_t *dev = usb_get_intfdata(intf);

    [...]
}
```

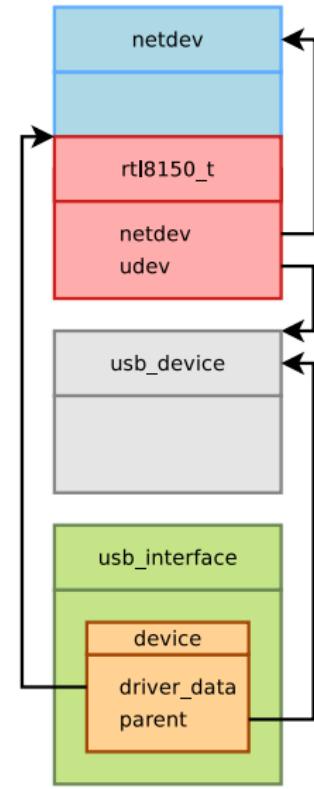




# The input subsystem

# The input subsystem

**Free Electrons**

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

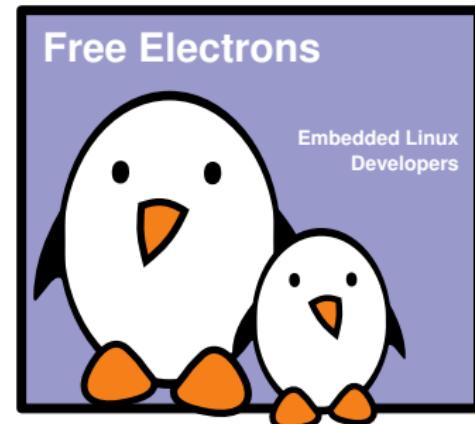




# What is input subsystem?

- ▶ The input subsystem takes care of all the input events coming from the human user.
- ▶ Initially written to support the USB *HID* (Human Interface Device) devices, it quickly grew up to handle all kind of inputs (using USB or not): keyboard, mice, joystick, touchscreen, etc.
- ▶ The input subsystem is split in two parts:
  - ▶ **Device drivers:** they talk to the hardware (for example via USB), and provide events (keystrokes, mouse movements, touchscreen coordinates) to the input core
  - ▶ **Event handlers:** they get events from drivers and pass them where needed via various interfaces (most of the time through `evdev`)
- ▶ In user space it is usually used by the graphic stack such as *X.Org*, *Wayland* or *Android's InputManager*.



# Input subsystem diagram

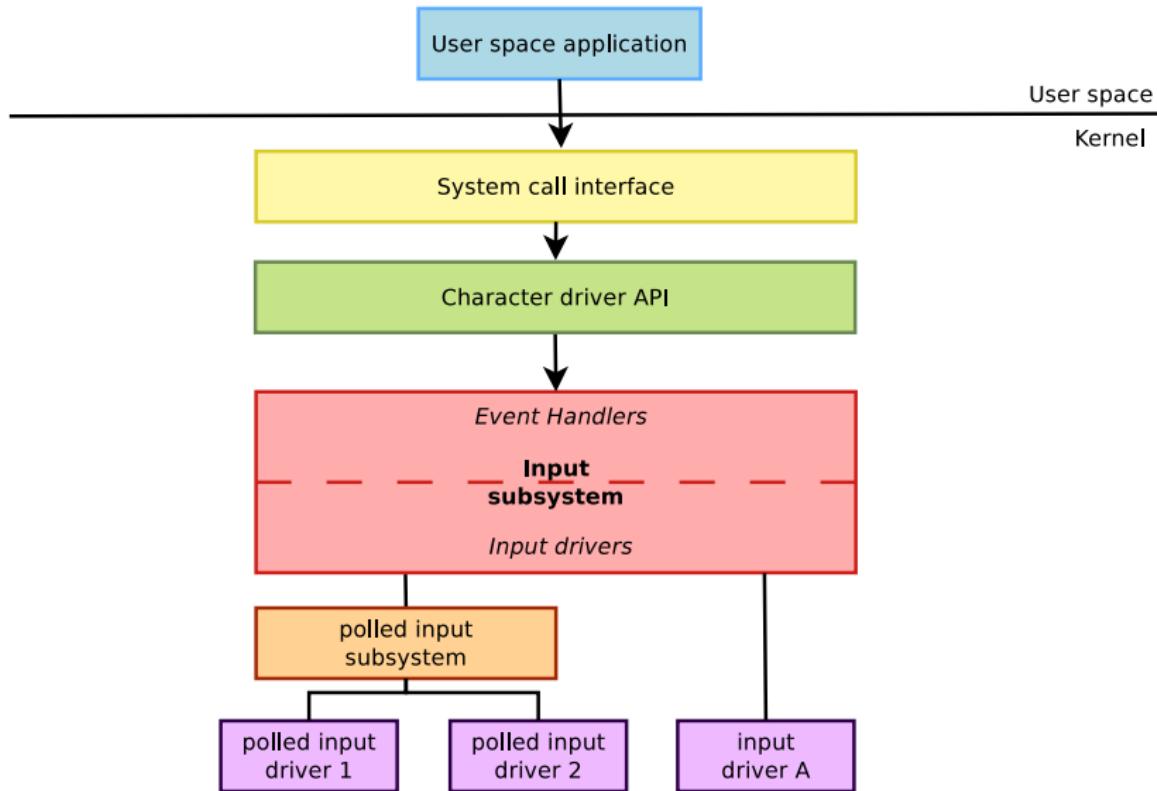



# Input subsystem overview

- ▶ Kernel option `CONFIG_INPUT`
  - ▶ `menuconfig INPUT`
    - ▶ tristate "Generic input layer (needed for keyboard, mouse, ...)"
- ▶ Implemented in `drivers/input/`
  - ▶ `input.c`, `input-polldev.c`, `evbug.c`
- ▶ Implements a single character driver and defines the user/kernel API
  - ▶ `include/uapi/linux/input.h`
- ▶ Defines the set of operations a input driver must implement and helper functions for the drivers
  - ▶ `struct input_dev` for the device driver part
  - ▶ `struct input_handler` for the event handler part
  - ▶ `include/linux/input.h`



# Input subsystem API 1/3

- ▶ An *input device* is described by a very long `struct input_dev` structure, an excerpt is:

```
struct input_dev {  
    const char *name;  
    [...]  
    unsigned long evbit[BITS_TO_LONGS(EV_CNT)];  
    unsigned long keybit[BITS_TO_LONGS(KEY_CNT)];  
    [...]  
    int (*getkeycode)(struct input_dev *dev,  
                      struct input_keymap_entry *ke);  
    [...]  
    int (*open)(struct input_dev *dev);  
    [...]  
    int (*event)(struct input_dev *dev, unsigned int type,  
                 unsigned int code, int value);  
    [...]  
};
```

- ▶ Before being used this struct must be allocated and initialized:  
`struct input_dev *input_allocate_device(void);`
- ▶ After unregistering `struct input_dev`, it must be freed:  
`void input_free_device(struct input_dev *dev);`



## Input subsystem API 2/3

- ▶ Depending on the type of event that will be generated, the input bit fields `evbit` and `keybit` must be configured: For example, for a button we only generate `EV_KEY` type events, and from those only `BTN_0` events code:

```
set_bit(EV_KEY, myinput_dev.evbit);
set_bit(BTN_0, myinput_dev.keybit);
```

- ▶ `set_bit()` is an atomic operation allowing to set a particular bit to 1 (explained later).
- ▶ Once the *input device* is allocated and filled, the function to register it is:

```
int input_register_device(struct input_dev *);
```

- ▶ When the driver will be unloaded, the *input device* is unregistered using:

```
void input_unregister_device(struct input_dev *);
```



## Input subsystem API 3/3

- ▶ The events are sent by the driver to the event handler using  
`input_event(struct input_dev *dev, unsigned int type, unsigned int code, int value);`
  - ▶ The event types are documented in  
`Documentation/input/event-codes.txt`
  - ▶ An event is composed by one or several input data changes  
(packet of input data changes) such as the button state, the relative or absolute position along an axis, etc..
  - ▶ After submitting potentially multiple events, the *input* core must be notified by calling:  
`void input_sync(struct input_dev *dev);`
  - ▶ The input subsystem provides other wrappers such as  
`input_report_key()`, `input_report_abs()`, ...



## Polled input subclass

- ▶ The input subsystem provides a subclass supporting simple input devices that *do not raise interrupts* but have to be *periodically scanned or polled* to detect changes in their state.
- ▶ A *polled input device* is described by a `struct input_polled_dev` structure:

```
struct input_polled_dev {  
    void *private;  
    void (*open)(struct input_polled_dev *dev);  
    void (*close)(struct input_polled_dev *dev);  
    void (*poll)(struct input_polled_dev *dev);  
    unsigned int poll_interval; /* msec */  
    unsigned int poll_interval_max; /* msec */  
    unsigned int poll_interval_min; /* msec */  
    struct input_dev *input;  
/* private: */  
    struct delayed_work work;  
}
```



## Polled input subsystem API

- ▶ Allocating/freeing the `struct input_polled_dev` structure is done using
  - ▶ `input_allocate_polled_device()`
  - ▶ `input_free_polled_device()`
- ▶ Among the handlers of the `struct input_polled_dev` only the `poll()` method is mandatory, this function polls the device and posts input events.
- ▶ The fields `id`, `name`, `phys`, `bits` of `struct input` must be initialized too.
- ▶ If none of the `poll_interval` fields are filled then the default poll interval is 500ms.
- ▶ The device registration/unregistration is done with:
  - ▶ `input_register_polled_device(struct input_polled_dev *dev)`.
  - ▶ `input_unregister_polled_device(struct input_polled_dev *dev)`




# evdev user space interface

- ▶ The main user space interface to *input devices* is the **event interface**
- ▶ Each *input device* is represented as a `/dev/input/event<X>` character device
- ▶ A user space application can use blocking and non-blocking reads, but also `select()` (to get notified of events) after opening this device.
- ▶ Each read will return `struct input_event` structures of the following format:

```
struct input_event {  
    struct timeval time;  
    unsigned short type;  
    unsigned short code;  
    unsigned int value;  
};
```

- ▶ A very useful application for *input device* testing is `evtest`, from <http://cgit.freedesktop.org/evtest/>



# Practical lab - Expose the Nunchuk to user space



- ▶ Extend the Nunchuk driver to expose the Nunchuk features to user space applications, as an *input* device.
- ▶ Test the operation of the Nunchuk using sample user space applications.




# Memory Management

# Memory Management


## Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

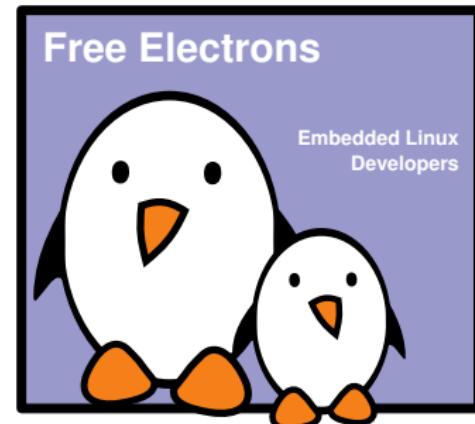




# Physical and Virtual Memory

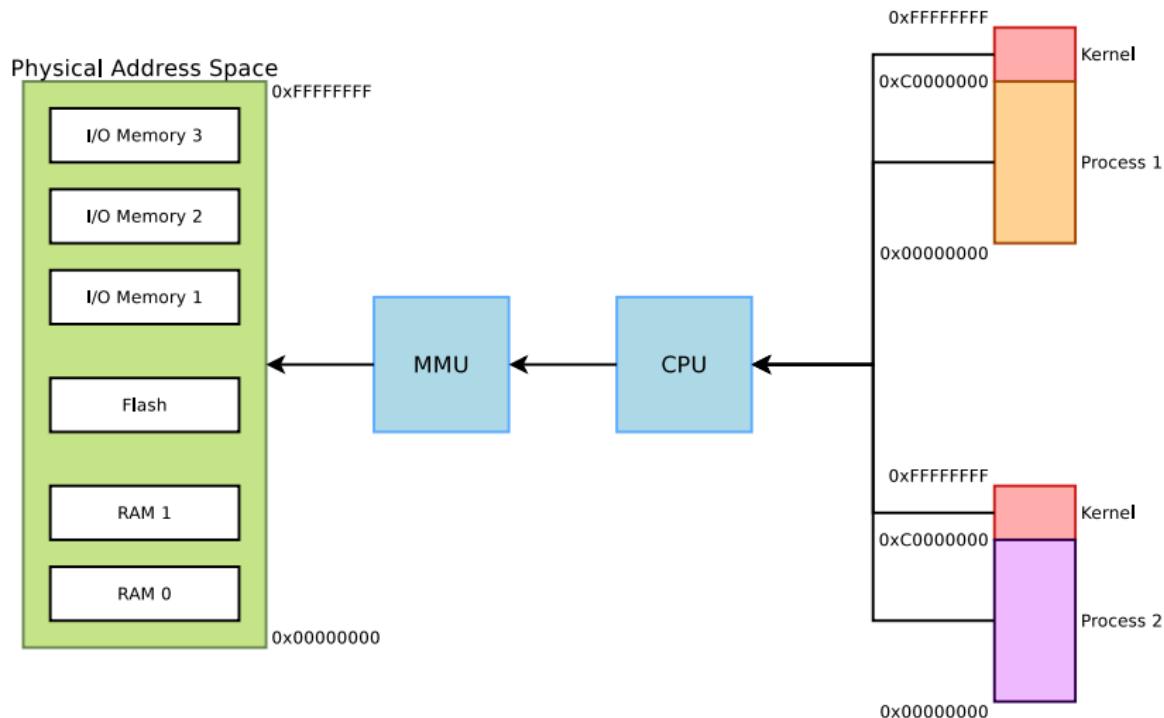




# Virtual Memory Organization

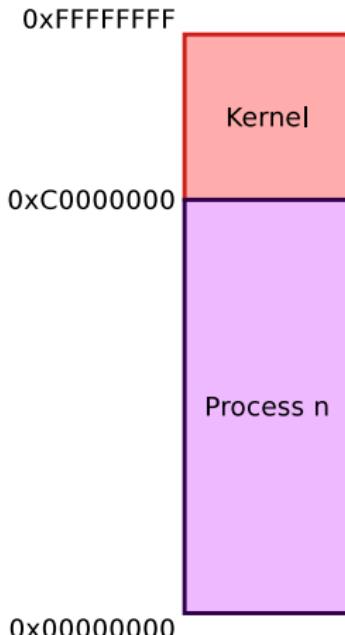

- ▶ 1GB reserved for kernel-space
  - ▶ Contains kernel code and core data structures, identical in all address spaces
  - ▶ Most memory can be a direct mapping of physical memory at a fixed offset
- ▶ Complete 3GB exclusive mapping available for each user space process
  - ▶ Process code and data (program, stack, ...)
  - ▶ Memory-mapped files
  - ▶ Not necessarily mapped to physical memory (demand fault paging used for dynamic mapping to physical memory pages)
  - ▶ Differs from one address space to another



# Physical / virtual memory mapping

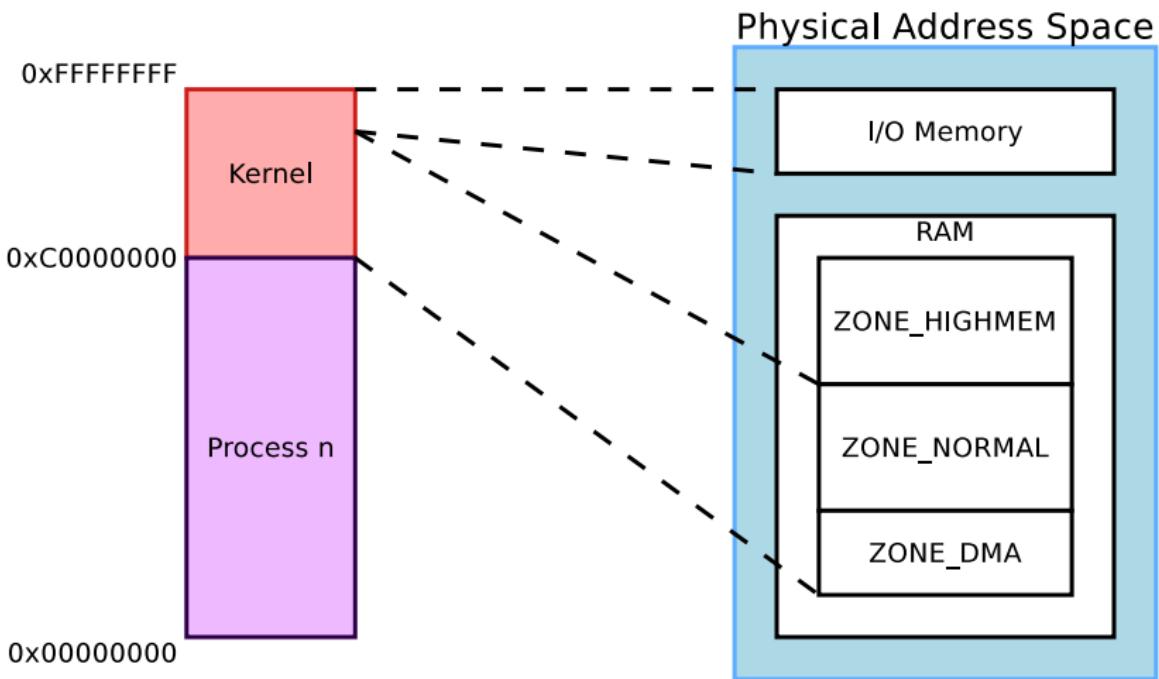



# Accessing more physical memory

- ▶ Only less than 1GB memory addressable directly through kernel virtual address space
- ▶ If more physical memory is present on the platform, part of the memory will not be accessible by kernel space, but can be used by user space
- ▶ To allow the kernel to access more physical memory:
  - ▶ Change 1GB/3GB memory split (2GB/2GB)  
`(CONFIG_VMSPLIT_3G)` ⇒ reduces total memory available for each process
  - ▶ Change for a 64 bit architecture ;-)  
See  
`Documentation/x86/x86_64/mm.txt` for an example.
  - ▶ Activate *highmem* support if available for your architecture:
    - ▶ Allows kernel to map parts of its non-directly accessible memory
    - ▶ Mapping must be requested explicitly
    - ▶ Limited addresses ranges reserved for this usage
- ▶ See <http://lwn.net/Articles/75174/> for useful explanations



## Accessing even more physical memory!

- ▶ If your 32 bit platform hosts more than 4GB, they just cannot be mapped
- ▶ PAE (Physical Address Expansion) may be supported by your architecture
- ▶ Adds some address extension bits used to index memory areas
- ▶ Allows accessing up to 64 GB of physical memory on x86
- ▶ Note that each user space process is still limited to a 3 GB memory space



## Notes on user space memory

- ▶ New user space memory is allocated either from the already allocated process memory, or using the `mmap` system call
- ▶ Note that memory allocated may not be physically allocated:
  - ▶ Kernel uses demand fault paging to allocate the physical page (the physical page is allocated when access to the virtual address generates a page fault)
  - ▶ ... or may have been swapped out, which also induces a page fault
- ▶ User space memory allocation is allowed to over-commit memory (more than available physical memory) ⇒ can lead to out of memory
- ▶ OOM killer kicks in and selects a process to kill to retrieve some memory. That's better than letting the system freeze.




## Back to kernel memory

- ▶ Kernel memory allocators (see following slides) allocate physical pages, and kernel allocated memory cannot be swapped out, so no fault handling required for kernel memory.
- ▶ Most kernel memory allocation functions also return a kernel virtual address to be used within the kernel space.
- ▶ Kernel memory low-level allocator manages pages. This is the finest granularity (usually 4 KB, architecture dependent).
- ▶ However, the kernel memory management handles smaller memory allocations through its allocator (see *SLAB allocators* – used by `kmalloc()`).



# Allocators in the Kernel

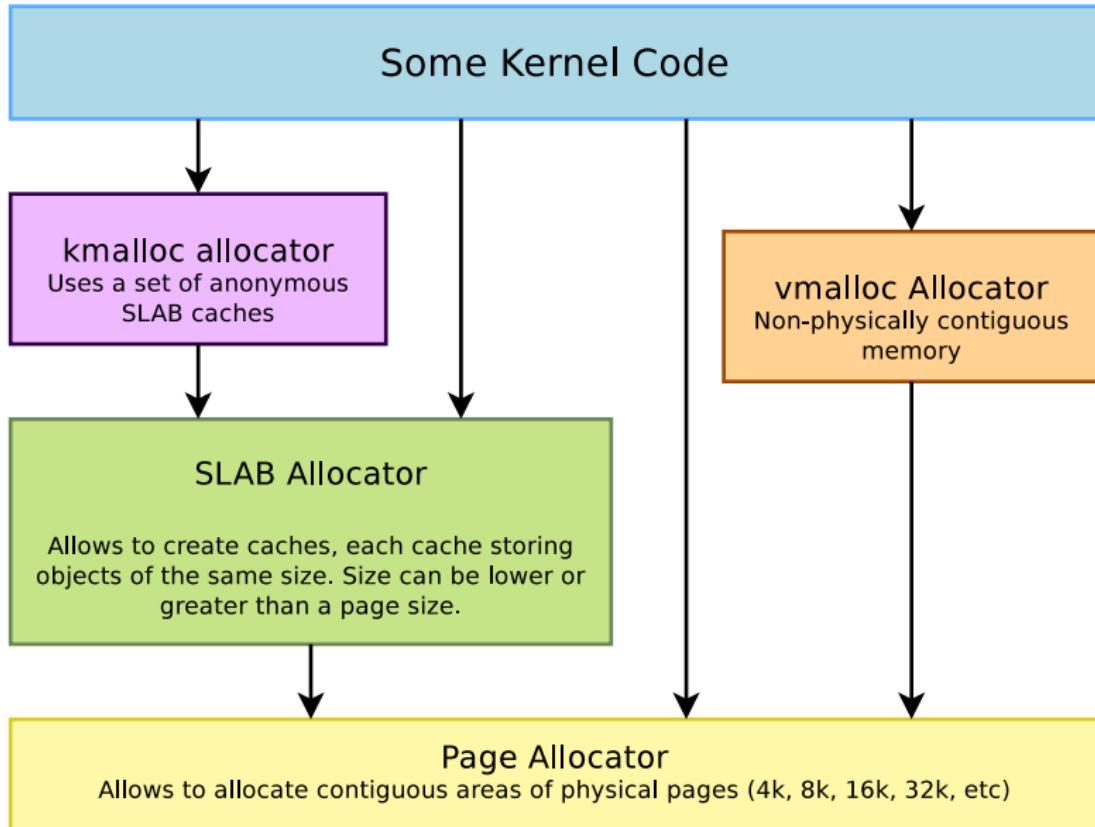



# Page Allocator

- ▶ Appropriate for medium-size allocations
- ▶ A page is usually 4K, but can be made greater in some architectures (sh, mips: 4, 8, 16 or 64 KB, but not configurable in x86 or arm).
- ▶ Buddy allocator strategy, so only allocations of power of two number of pages are possible: 1 page, 2 pages, 4 pages, 8 pages, 16 pages, etc.
- ▶ Typical maximum size is 8192 KB, but it might depend on the kernel configuration.
- ▶ The allocated area is virtually contiguous (of course), but also physically contiguous. It is allocated in the identity-mapped part of the kernel memory space.
  - ▶ This means that large areas may not be available or hard to retrieve due to physical memory fragmentation.



# Page Allocator API: Get free pages

- ▶ `unsigned long get_zeroed_page(int flags)`
  - ▶ Returns the virtual address of a free page, initialized to zero
  - ▶ `flags`: see the next pages for details.
- ▶ `unsigned long __get_free_page(int flags)`
  - ▶ Same, but doesn't initialize the contents
- ▶ `unsigned long __get_free_pages(int flags, unsigned int order)`
  - ▶ Returns the starting virtual address of an area of several contiguous pages in physical RAM, with `order` being  $\log_2(\text{number\_of\_pages})$ . Can be computed from the size with the `get_order()` function.



## Page Allocator API: Free Pages

- ▶ `void free_page(unsigned long addr)`
  - ▶ Releases one page.
- ▶ `void free_pages(unsigned long addr,`  
`unsigned int order)`
  - ▶ Releases multiple pages. Need to use the same order as in allocation.



# Page Allocator Flags

- ▶ The most common ones are:
  - ▶ GFP\_KERNEL
    - ▶ Standard kernel memory allocation. The allocation may block in order to find enough available memory. Fine for most needs, except in interrupt handler context.
  - ▶ GFP\_ATOMIC
    - ▶ RAM allocated from code which is not allowed to block (interrupt handlers or critical sections). Never blocks, allows to access emergency pools, but can fail if no free memory is readily available.
  - ▶ GFP\_DMA
    - ▶ Allocates memory in an area of the physical memory usable for DMA transfers. See our DMA chapter.
  - ▶ Others are defined in `include/linux/gfp.h`




# SLAB Allocator 1/2

- ▶ The SLAB allocator allows to create caches, which contains a set of objects of the same size
- ▶ The object size can be smaller or greater than the page size
- ▶ The SLAB allocator takes care of growing or reducing the size of the cache as needed, depending on the number of allocated objects. It uses the page allocator to allocate and free pages.
- ▶ SLAB caches are used for data structures that are present in many many instances in the kernel: directory entries, file objects, network packet descriptors, process descriptors, etc.
  - ▶ See `/proc/slabinfo`
- ▶ They are rarely used for individual drivers.
- ▶ See `include/linux/slab.h` for the API



# SLAB Allocator 2/2

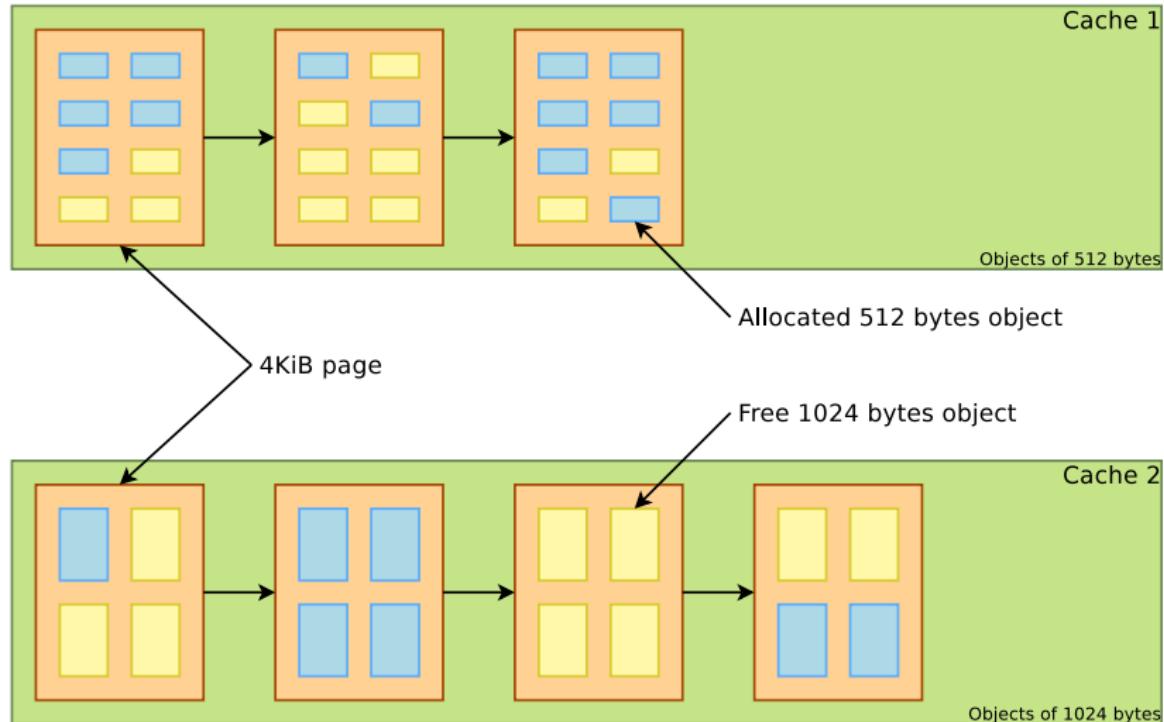



# Different SLAB Allocators

- ▶ There are three different, but API compatible, implementations of a SLAB allocator in the Linux kernel. A particular implementation is chosen at configuration time.
  - ▶ SLAB: legacy, well proven allocator.  
Still the default in most ARM `defconfig` files.
  - ▶ SLOB: much simpler. More space efficient but doesn't scale well. Saves a few hundreds of KB in small systems (depends on `CONFIG_EXPERT`)  
Linux 3.13 on ARM: used in 5 `defconfig` files
  - ▶ SLUB: more recent and simpler than SLAB, scaling much better (in particular for huge systems) and creating less fragmentation.  
Linux 3.13 on ARM: used in 0 `defconfig` files

## ⊖ Choose SLAB allocator (NEW)

- SLAB      SLAB
- SLUB (Unqueued Allocator) (NEW)      SLUB
- SLOB (Simple Allocator)      SLOB



## kmalloc Allocator

- ▶ The kmalloc allocator is the general purpose memory allocator in the Linux kernel
- ▶ For small sizes, it relies on generic SLAB caches, named `kmalloc-XXX` in `/proc/slabinfo`
- ▶ For larger sizes, it relies on the page allocator
- ▶ The allocated area is guaranteed to be physically contiguous
- ▶ The allocated area size is rounded up to the size of the smallest SLAB cache in which it can fit (while using the SLAB allocator directly allows to have more flexibility)
- ▶ It uses the same flags as the page allocator (`GFP_KERNEL`, `GFP_ATOMIC`, `GFP_DMA`, etc.) with the same semantics.
- ▶ Maximum sizes, on `x86` and `arm` (see <http://j.mp/YIGq6W>):
  - Per allocation: 4 MB
  - Total allocations: 128 MB
- ▶ Should be used as the primary allocator unless there is a strong reason to use another one.



## kmalloc API 1/2

- ▶ `#include <linux/slab.h>`
- ▶ `void *kmalloc(size_t size, int flags);`
  - ▶ Allocate `size` bytes, and return a pointer to the area (virtual address)
  - ▶ `size`: number of bytes to allocate
  - ▶ `flags`: same flags as the page allocator
- ▶ `void kfree(const void *objp);`
  - ▶ Free an allocated area
- ▶ Example: (`drivers/infiniband/core/cache.c`)  
`struct ib_update_work *work;`  
`work = kmalloc(sizeof *work, GFP_ATOMIC);`  
`...`  
`kfree(work);`



## kmalloc API 2/2

- ▶ `void *kzalloc(size_t size, gfp_t flags);`
  - ▶ Allocates a zero-initialized buffer
- ▶ `void *kcalloc(size_t n, size_t size, gfp_t flags);`
  - ▶ Allocates memory for an array of `n` elements of `size` `size`, and zeroes its contents.
- ▶ `void *krealloc(const void *p, size_t new_size, gfp_t flags);`
  - ▶ Changes the size of the buffer pointed by `p` to `new_size`, by reallocating a new buffer and copying the data, unless `new_size` fits within the alignment of the existing buffer.



## devm\_kmalloc functions

- ▶ Automatically free the allocated buffers when the corresponding device or module is unprobed.
- ▶ Need to have a reference to a `struct device`.
- ▶ `void *devm_kmalloc(struct device *dev, size_t size, int flags);`
- ▶ `void *devm_kzalloc(struct device *dev, size_t size, int flags);`
- ▶ `void *devm_kcalloc(struct device *dev, size_t n, size_t size, gfp_t flags)`
- ▶ `void *devm_kfree(struct device *dev, void *p);`
  - ▶ Useful to immediately free an allocated buffer

See Documentation/driver-model/devres.txt for details about managed device resources.



## vmalloc Allocator

- ▶ The `vmalloc()` allocator can be used to obtain virtually contiguous memory zones, but not physically contiguous. The requested memory size is rounded up to the next page.
- ▶ The allocated area is in the kernel space part of the address space, but outside of the identically-mapped area
- ▶ Allocations of fairly large areas is possible (almost as big as total available memory, see <http://j.mp/YIGq6W> again), since physical memory fragmentation is not an issue, but areas cannot be used for DMA, as DMA usually requires physically contiguous buffers.
- ▶ API in `include/linux/vmalloc.h`
  - ▶ `void *vmalloc(unsigned long size);`
    - ▶ Returns a virtual address
  - ▶ `vfree(void *addr);`



# Kernel memory debugging

- ▶ Kmemcheck
  - ▶ Dynamic checker for access to uninitialized memory.
  - ▶ Only available on `x86` so far (Linux 3.10-rc5 status), but will help to improve architecture independent code anyway.
  - ▶ See `Documentation/kmemcheck.txt` for details.
- ▶ Kmemleak
  - ▶ Dynamic checker for memory leaks
  - ▶ This feature is available for all architectures.
  - ▶ See `Documentation/kmemleak.txt` for details.

Both have a significant overhead. Only use them in development!




# I/O Memory and Ports

# I/O Memory and Ports

## Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

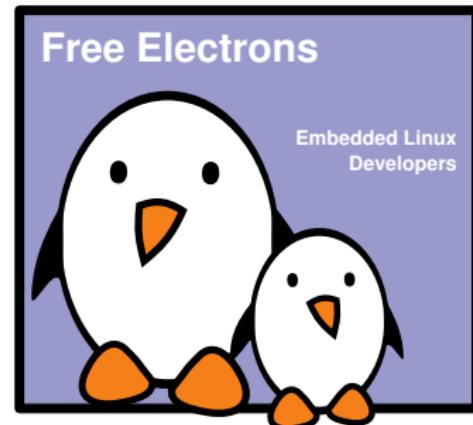




# Port I/O vs. Memory-Mapped I/O

- ▶ MMIO
  - ▶ Same address bus to address memory and I/O devices
  - ▶ Access to the I/O devices using regular instructions
  - ▶ Most widely used I/O method across the different architectures supported by Linux
- ▶ PIO
  - ▶ Different address spaces for memory and I/O devices
  - ▶ Uses a special class of CPU instructions to access I/O devices
  - ▶ Example on x86: IN and OUT instructions



# MMIO vs PIO

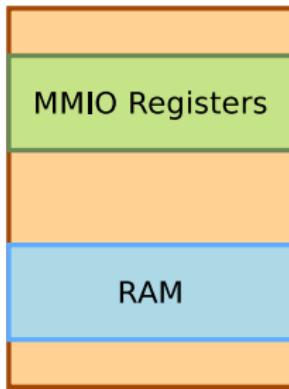

Physical Memory  
address space, accessed with  
normal load/store instructions



Separate I/O address space,  
accessed with specific instructions



## Requesting I/O ports

- ▶ Tells the kernel which driver is using which I/O ports
- ▶ Allows to prevent other drivers from using the same I/O ports, but is purely voluntary.
- ▶ 

```
struct resource *request_region(
    unsigned long start,
    unsigned long len,
    char *name);
```
- ▶ Tries to reserve the given region and returns NULL if unsuccessful.
- ▶ 

```
request_region(0x0170, 8, "ide1");
```
- ▶ 

```
void release_region(
    unsigned long start,
    unsigned long len);
```



## /proc/ioports example (x86)

```
0000-001f : dma1
0020-0021 : pic1
0040-0043 : timer0
0050-0053 : timer1
0070-0077 : rtc
0080-008f : dma page reg
00a0-00a1 : pic2
00c0-00df : dma2
00f0-00ff : fpu
0170-0177 : ide1
01f0-01f7 : ide0
0376-0376 : ide1
03f6-03f6 : ide0
03f8-03ff : serial
0800-087f : 0000:00:1f.0
...
```



# Accessing I/O ports

- ▶ Functions to read/write bytes (b), word (w) and longs (l) to I/O ports:
  - ▶ `unsigned in[bwl](unsigned long port)`
  - ▶ `void out[bwl](value, unsigned long port)`
- ▶ And the strings variants: often more efficient than the corresponding C loop, if the processor supports such operations!
  - ▶ `void ins[bwl](unsigned port, void *addr, unsigned long count)`
  - ▶ `void outs[bwl](unsigned port, void *addr, unsigned long count)`
- ▶ Examples
  - ▶ read 8 bits
    - ▶ `oldlcr = inb(baseio + UART_LCR)`
  - ▶ write 8 bits
    - ▶ `outb(MOXA_MUST_ENTER_ENCHANCE, baseio + UART_LCR)`



## Requesting I/O memory

- ▶ Functions equivalent to `request_region()` and `release_region()`, but for I/O memory.
- ▶ 

```
struct resource *request_mem_region(
    unsigned long start,
    unsigned long len,
    char *name);
```
- ▶ 

```
void release_mem_region(
    unsigned long start,
    unsigned long len);
```



## /proc/iomem example

```
00000000-0009efff : System RAM
0009f000-0009ffff : reserved
000a0000-000bffff : Video RAM area
000c0000-000cffff : Video ROM
000f0000-000fffff : System ROM
00100000-3ffadfff : System RAM
00100000-0030afff : Kernel code
0030b000-003b4bff : Kernel data
3ffae000-3fffffff : reserved
40000000-400003ff : 0000:00:1f.1
40001000-40001fff : 0000:02:01.0
40400000-407fffff : PCI CardBus #03
40800000-40bfffff : PCI CardBus #03
a0000000-a0000fff : pcmcia_socket0
e8000000-efffffff : PCI Bus #01
...
...
```



# Mapping I/O memory in virtual memory

- ▶ Load/store instructions work with virtual addresses
- ▶ To access I/O memory, drivers need to have a virtual address that the processor can handle, because I/O memory is not mapped by default in virtual memory.
- ▶ The `ioremap` function satisfies this need:


```
#include <asm/io.h>
```

```
void __iomem *ioremap(phys_addr_t phys_addr,  
                      unsigned long size);  
void iounmap(void __iomem *addr);
```

- ▶ Caution: check that `ioremap()` doesn't return a NULL address!



# ioremap()

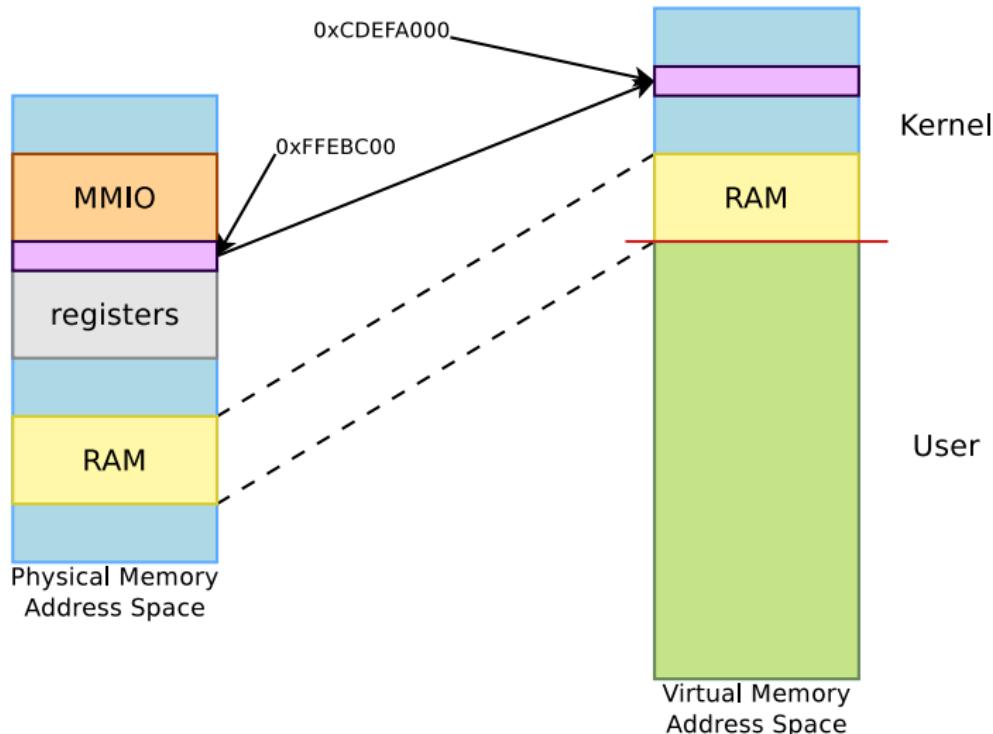

`ioremap(0xFFEB00, 4096) = 0xCDEFA000`



# Managed API

Using `request_mem_region()` and `ioremap()` in device drivers is now deprecated. You should use the below "managed" functions instead, which simplify driver coding and error handling:

- ▶ `devm_ioremap()`
- ▶ `devm_iounmap()`
- ▶ `devm_request_and_ioremap()`
  - ▶ Takes care of both the request and remapping operations!



# Accessing MMIO devices

- ▶ Directly reading from or writing to addresses returned by `ioremap()` (*pointer dereferencing*) may not work on some architectures.
- ▶ To do PCI-style, little-endian accesses, conversion being done automatically

```
unsigned read[bwl](void *addr);  
void write[bwl](unsigned val, void *addr);
```

- ▶ To do raw access, without endianness conversion

```
unsigned __raw_read[bwl](void *addr);  
void __raw_write[bwl](unsigned val, void *addr);
```

- ▶ Example

- ▶ 32 bits write

```
__raw_writel(1 << KS8695_IRQ_UART_TX,  
            membase + KS8695_INTST);
```



# New API for mixed accesses

- ▶ A new API allows to write drivers that can work on either devices accessed over PIO or MMIO. A few drivers use it, but there doesn't seem to be a consensus in the kernel community around it.
- ▶ Mapping
  - ▶ For PIO: `ioport_map()` and `ioport_unmap()`. They don't really map, but they return a special iomem cookie.
  - ▶ For MMIO: `ioremap()` and `iounmap()`. As usual.
- ▶ Access, works both on addresses or cookies returned by `ioport_map()` and `ioremap()`
  - ▶ `ioread[8/16/32]()` and `iowrite[8/16/32]` for single access
  - ▶ `ioread[8/16/32]_rep()` and `iowrite[8/16/32]_rep()` for repeated accesses



# Avoiding I/O access issues

- ▶ Caching on I/O ports or memory already disabled
- ▶ Use the macros, they do the right thing for your architecture
- ▶ The compiler and/or CPU can reorder memory accesses, which might cause troubles for your devices if they expect one register to be read/written before another one.
  - ▶ Memory barriers are available to prevent this reordering
  - ▶ `rmb()` is a read memory barrier, prevents reads to cross the barrier
  - ▶ `wmb()` is a write memory barrier
  - ▶ `mb()` is a read-write memory barrier
- ▶ Starts to be a problem with CPUs that reorder instructions and SMP.
- ▶ See `Documentation/memory-barriers.txt` for details



## /dev/mem

- ▶ Used to provide user space applications with direct access to physical addresses.
- ▶ Usage: open `/dev/mem` and read or write at given offset. What you read or write is the value at the corresponding physical address.
- ▶ Used by applications such as the X server to write directly to device memory.
- ▶ On x86, arm, arm64, tile, powerpc, unicore32, s390: `CONFIG_STRICT_DEVMEM` option to restrict `/dev/mem` non-RAM addresses, for security reasons (Linux 3.10 status).



# Practical lab - I/O Memory and Ports



- ▶ Add UART devices to the board device tree
- ▶ Access I/O registers to control the device and send first characters to it.




# The misc subsystem

# The misc subsystem

## Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

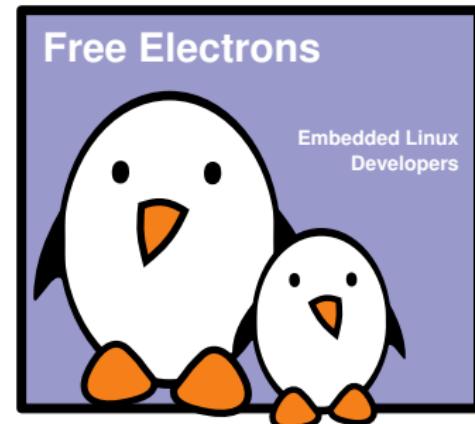




# Why a *misc* subsystem?

- ▶ The kernel offers a large number of **frameworks** covering a wide range of device types: input, network, video, audio, etc.
  - ▶ Those frameworks allow to factorize common functionality between drivers and offer a consistent API to user space applications.
- ▶ However, there are some devices that **really do not fit in any of the existing frameworks**.
  - ▶ Highly customized devices implemented in a FPGA, or other weird devices for which implementing a complete framework is not useful.
- ▶ The drivers for such devices could be implemented directly as raw *character drivers*.
- ▶ But there is a subsystem that makes this work a little bit easier: the **misc subsystem**.
  - ▶ It is really only a **thin layer** above the *character driver API*.



# Misc subsystem diagram

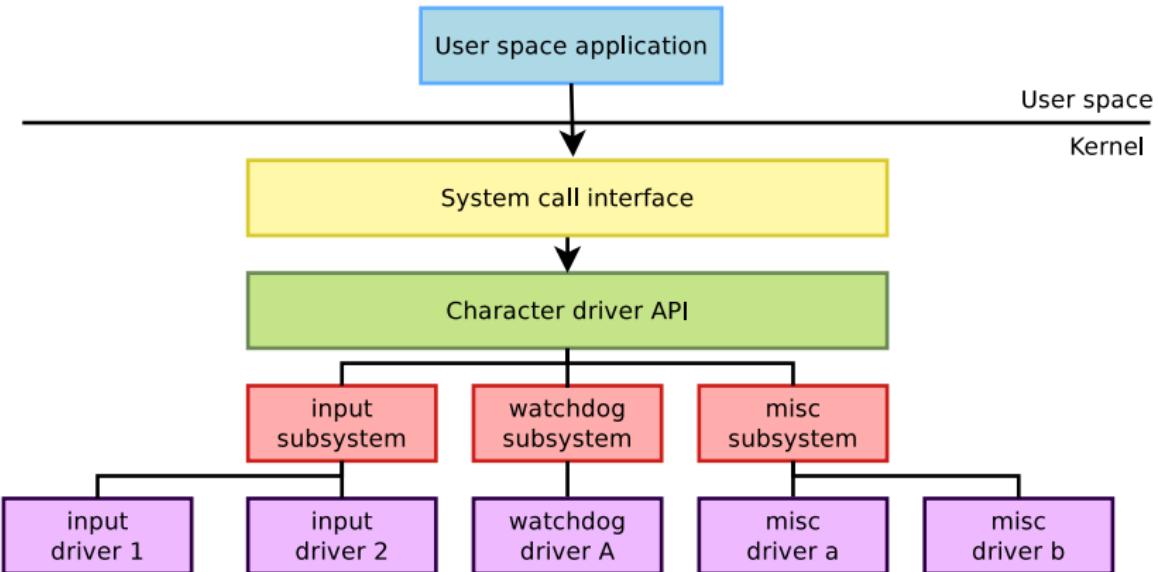



## Misc subsystem API (1/2)

- ▶ The misc subsystem API mainly provides two functions, to register and unregister a **single** *misc device*:
  - ▶ `int misc_register(struct miscdevice * misc);`
  - ▶ `int misc_deregister(struct miscdevice *misc);`
- ▶ A *misc device* is described by a `struct miscdevice` structure:

```
struct miscdevice {  
    int minor;  
    const char *name;  
    const struct file_operations *fops;  
    struct list_head list;  
    struct device *parent;  
    struct device *this_device;  
    const char *nodename;  
    umode_t mode;  
};
```



## Misc subsystem API (2/2)

The main fields to be filled in `struct miscdevice` are:

- ▶ `minor`, the minor number for the device, or `MISC_DYNAMIC_MINOR` to get a minor number automatically assigned.
- ▶ `name`, name of the device, which will be used to create the device node if `devtmpfs` is used.
- ▶ `fops`, pointer to a `struct file_operations` structure, that describes which functions implement the *read*, *write*, *ioctl*, etc. operations.
- ▶ `parent`, the `struct device` that represents the hardware device exposed by this driver.



# User space API for misc devices

- ▶ *misc devices* are regular character devices
- ▶ The operations they support in user space depends on the operations the kernel driver implements:
  - ▶ The `open()` and `close()` system calls to open/close the device.
  - ▶ The `read()` and `write()` system calls to read/write to/from the device.
  - ▶ The `ioctl()` system call to call some driver-specific operations.



# Practical lab - Output-only serial port driver



- ▶ Extend the driver started in the previous lab by registering it into the *misc* subsystem.
- ▶ Implement serial output functionality through the *misc* subsystem.
- ▶ Test serial output using user space applications.




# Processes, scheduling and interrupts

# Processes, scheduling and interrupts

**Free Electrons**

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

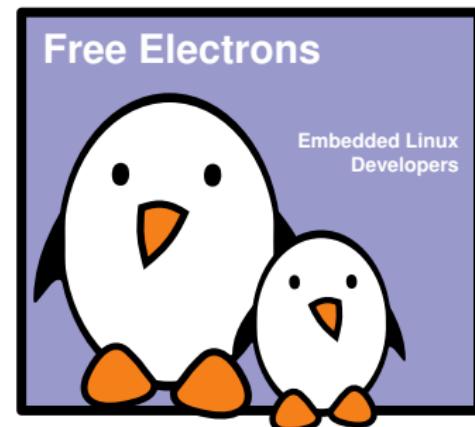



# Processes, scheduling and interrupts

## Processes and scheduling




# Process, thread?

- ▶ Confusion about the terms *process*, *thread* and *task*
- ▶ In Unix, a process is created using `fork()` and is composed of
  - ▶ An address space, which contains the program code, data, stack, shared libraries, etc.
  - ▶ One thread, that starts executing the `main()` function.
  - ▶ Upon creation, a process contains one thread
- ▶ Additional threads can be created inside an existing process, using `pthread_create()`
  - ▶ They run in the same address space as the initial thread of the process
  - ▶ They start executing a function passed as argument to `pthread_create()`




# Process, thread: kernel point of view

- ▶ The kernel represents each thread running in the system by a structure of type `struct task_struct`
- ▶ From a scheduling point of view, it makes no difference between the initial thread of a process and all additional threads created dynamically using `pthread_create()`

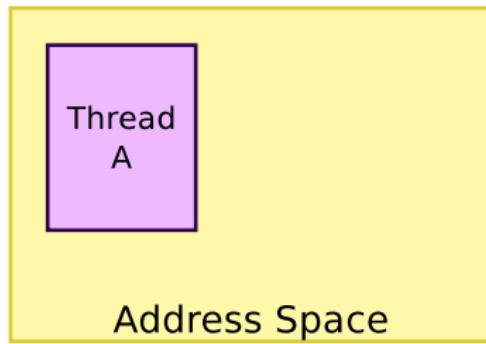


Address Space  
Process after `fork()`

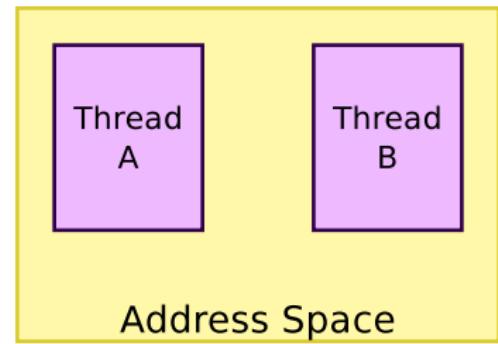

Address Space  
Same process after  
`pthread_create()`




# A thread life

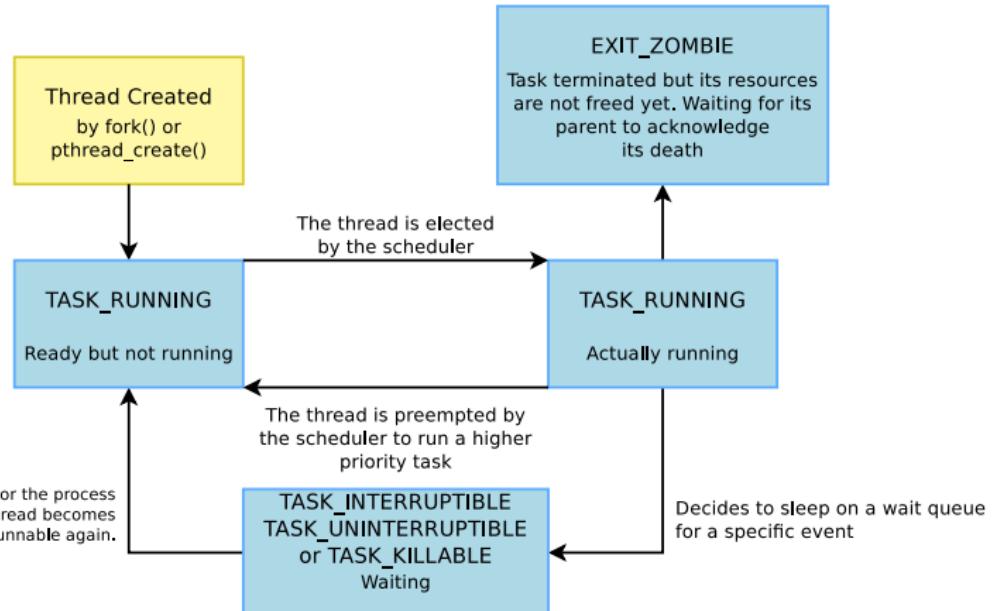



# Execution of system calls

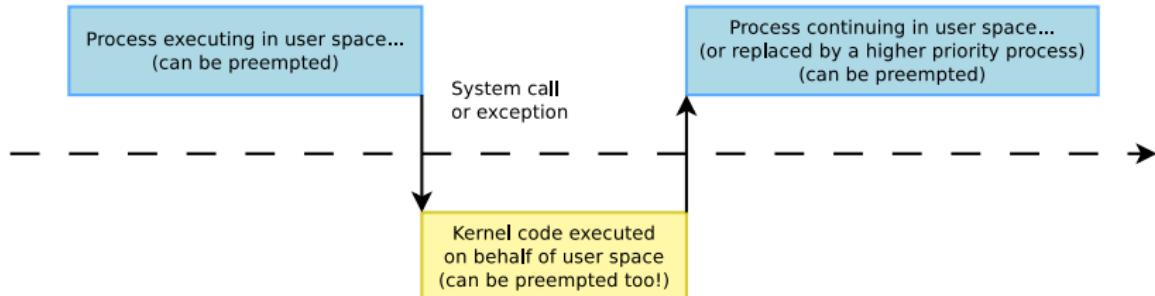

The execution of system calls takes place in the context of the thread requesting them.




# Processes, scheduling and interrupts

## Sleeping



# Sleeping

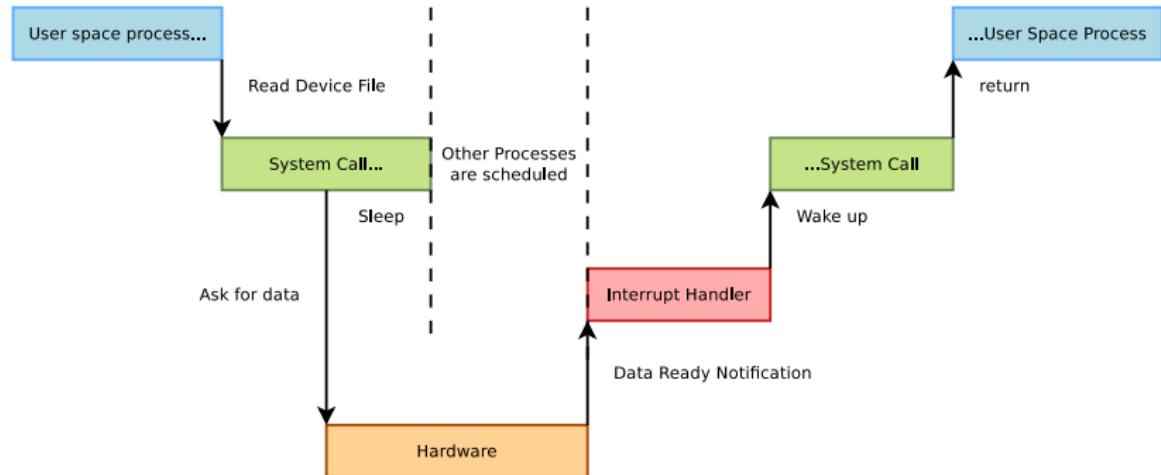

Sleeping is needed when a process (user space or kernel space) is waiting for data.



# How to sleep 1/3

- ▶ Must declare a wait queue
- ▶ A wait queue will be used to store the list of threads waiting for an event
  - ▶ Static queue declaration
    - ▶ useful to declare as a global variable
    - ▶ `DECLARE_WAIT_QUEUE_HEAD(module_queue);`
  - ▶ Or dynamic queue declaration
    - ▶ Useful to embed the wait queue inside another data structure

```
wait_queue_head_t queue;  
init_waitqueue_head(&queue);
```



## How to sleep 2/3

- ▶ Several ways to make a kernel process sleep
  - ▶ `void wait_event(queue, condition);`
    - ▶ Sleeps until the task is woken up and the given C expression is true. Caution: can't be interrupted (can't kill the user space process!)
  - ▶ `int wait_event_killable(queue, condition);`
    - ▶ Can be interrupted, but only by a *fatal* signal (`SIGKILL`). Returns `-ERESTARTSYS` if interrupted.
  - ▶ `int wait_event_interruptible(queue, condition);`
    - ▶ Can be interrupted by any signal. Returns `-ERESTARTSYS` if interrupted.



## How to sleep 3/3

- ▶ `int wait_event_timeout(queue, condition, timeout);`
- ▶ Also stops sleeping when the task is woken up and the timeout expired. Returns `0` if the timeout elapsed, non-zero if the condition was met.
- ▶ `int wait_event_interruptible_timeout(queue, condition, timeout);`
- ▶ Same as above, interruptible. Returns `0` if the timeout elapsed, `-ERESTARTSYS` if interrupted, positive value if the condition was met.



## How to Sleep - Example

```
ret = wait_event_interruptible
    (sonypi_device.fifo_proc_list,
     kfifo_len(sonypi_device.fifo) != 0);

if (ret)
    return ret;
```



# Waking up!

- ▶ Typically done by interrupt handlers when data sleeping processes are waiting for become available.
  - ▶ `wake_up(&queue);`
    - ▶ Wakes up all processes in the wait queue
  - ▶ `wake_up_interruptible(&queue);`
    - ▶ Wakes up all processes waiting in an interruptible sleep on the given queue




# Exclusive vs. non-exclusive

- ▶ `wait_event_interruptible()` puts a task in a non-exclusive wait.
  - ▶ All non-exclusive tasks are woken up by `wake_up()` / `wake_up_interruptible()`
- ▶ `wait_event_interruptible_exclusive()` puts a task in an exclusive wait.
  - ▶ `wake_up()` / `wake_up_interruptible()` wakes up all non-exclusive tasks and only one exclusive task
  - ▶ `wake_up_all()` / `wake_up_interruptible_all()` wakes up all non-exclusive and all exclusive tasks
- ▶ Exclusive sleeps are useful to avoid waking up multiple tasks when only one will be able to “consume” the event.
- ▶ Non-exclusive sleeps are useful when the event can “benefit” to multiple tasks.



# Sleeping and waking up - Implementation 1/2

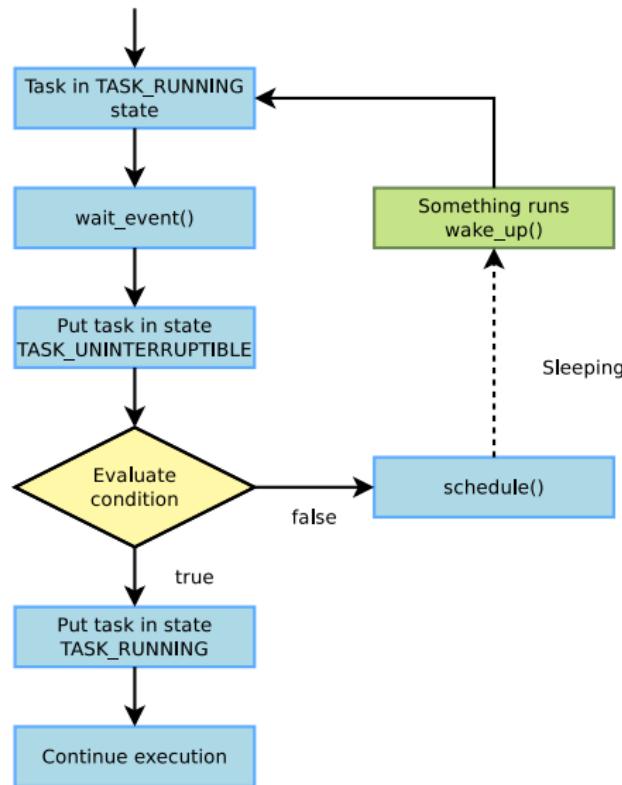



## Sleeping and waking up - Implementation 2/2

The scheduler doesn't keep evaluating the sleeping condition!

- ▶ `wait_event(queue, condition);`
  - ▶ The process is put in the `TASK_UNINTERRUPTIBLE` state.
- ▶ `wake_up(&queue);`
  - ▶ All processes waiting in `queue` are woken up, so they get scheduled later and have the opportunity to evaluate the condition again and go back to sleep if it is not met.

See `include/linux/wait.h` for implementation details.



# Processes, scheduling and interrupts

## Interrupt Management



# Registering an interrupt handler 1/2

The "managed" API is recommended:

```
int devm_request_irq(struct device *dev,  
                      unsigned int irq,  
                      irq_handler_t handler,  
                      unsigned long irq_flags,  
                      const char *devname,  
                      void *dev_id);
```

- ▶ Register an interrupt handler.
- ▶ device for automatic freeing at device or module release time.
- ▶ irq is the requested IRQ channel. For platform devices, use platform\_get\_irq() to retrieve the interrupt number.
- ▶ handler is a pointer to the IRQ handler
- ▶ irq\_flags are option masks (see next slide)
- ▶ devname is the registered name
- ▶ dev\_id is a pointer to some data. It cannot be NULL as it is used as an identifier for free\_irq() when using shared IRQs.



## Releasing an interrupt handler

```
void devm_free_irq(struct device *dev,  
                   unsigned int irq, void *dev_id);
```

- ▶ Explicitly release an interrupt handler. Done automatically in normal situations.

Defined in `include/linux/interrupt.h`



## Registering an interrupt handler 2/2

- ▶ Main `irq_flags` bit values (can be combined, 0 when no flags are needed)
  - ▶ `IRQF_SHARED`
    - ▶ The interrupt channel can be shared by several devices. Requires a hardware status register telling whether an IRQ was raised or not.



# Interrupt handler constraints

- ▶ No guarantee in which address space the system will be in when the interrupt occurs: can't transfer data to and from user space.
- ▶ Interrupt handler execution is managed by the CPU, not by the scheduler. Handlers can't run actions that may sleep, because there is nothing to resume their execution. In particular, need to allocate memory with `GFP_ATOMIC`.
- ▶ Interrupt handlers are run with all interrupts disabled on the local CPU (see <http://lwn.net/Articles/380931>). Therefore, they have to complete their job quickly enough, to avoid blocking interrupts for too long.



# /proc/interrupts on a Panda board

	CPU0	CPU1		
39:	4	0	GIC	TWL6030-PIH
41:	0	0	GIC	13-dbg-irq
42:	0	0	GIC	13-app-irq
43:	0	0	GIC	prcm
44:	20294	0	GIC	DMA
52:	0	0	GIC	gpmc
...				
IPIO0:	0	0		Timer broadcast interrupts
IPIO1:	23095	25663		Rescheduling interrupts
IPIO2:	0	0		Function call interrupts
IPIO3:	231	173		Single function call interrupts
IPIO4:	0	0		CPU stop interrupts
LOC:	196407	136995		Local timer interrupts
Err:	0			

Note: interrupt numbers shown on the left-most column are virtual numbers when the Device Tree is used. The real physical interrupt numbers are either shown as an additional column, or can be seen in  
`/sys/kernel/debug/irq_domain_mapping`.



# Interrupt handler prototype

- ▶ `irqreturn_t foo_interrupt(int irq, void *dev_id)`
  - ▶ `irq`, the IRQ number
  - ▶ `dev_id`, the opaque pointer that was passed to `devm_request_irq()`
- ▶ Return value
  - ▶ `IRQ_HANDLED`: recognized and handled interrupt
  - ▶ `IRQ_NONE`: not on a device managed by the module. Useful to share interrupt channels and/or report spurious interrupts to the kernel.



## Typical interrupt handler's job

- ▶ Acknowledge the interrupt to the device (otherwise no more interrupts will be generated, or the interrupt will keep firing over and over again)
  - ▶ Read/write data from/to the device
  - ▶ Wake up any waiting process waiting for the completion of an operation, typically using wait queues
- ```
wake_up_interruptible(&module_queue);
```



## Threaded interrupts

In 2.6.30, support for threaded interrupts has been added to the Linux kernel

- ▶ The interrupt handler is executed inside a thread.
- ▶ Allows to block during the interrupt handler, which is often needed for I2C/SPI devices as the interrupt handler needs to communicate with them.
- ▶ Allows to set a priority for the interrupt handler execution, which is useful for real-time usage of Linux

```
int devm_request_threaded_irq(  
    struct device *dev,  
    unsigned int irq,  
    irq_handler_t handler, irq_handler_t thread_fn  
    unsigned long flags, const char *name, void *dev);
```

- ▶ handler, “hard IRQ” handler
- ▶ thread\_fn, executed in a thread




# Top half and bottom half processing

- ▶ Splitting the execution of interrupt handlers in 2 parts
  - ▶ Top half
    - ▶ This is the real interrupt handler, which should complete as quickly as possible since all interrupts are disabled. If possible, take the data out of the device and schedule a bottom half to handle it.
  - ▶ Bottom half
    - ▶ Is the general Linux name for various mechanisms which allow to postpone the handling of interrupt-related work.  
Implemented in Linux as softirqs, tasklets or workqueues.



# Top half and bottom half diagram

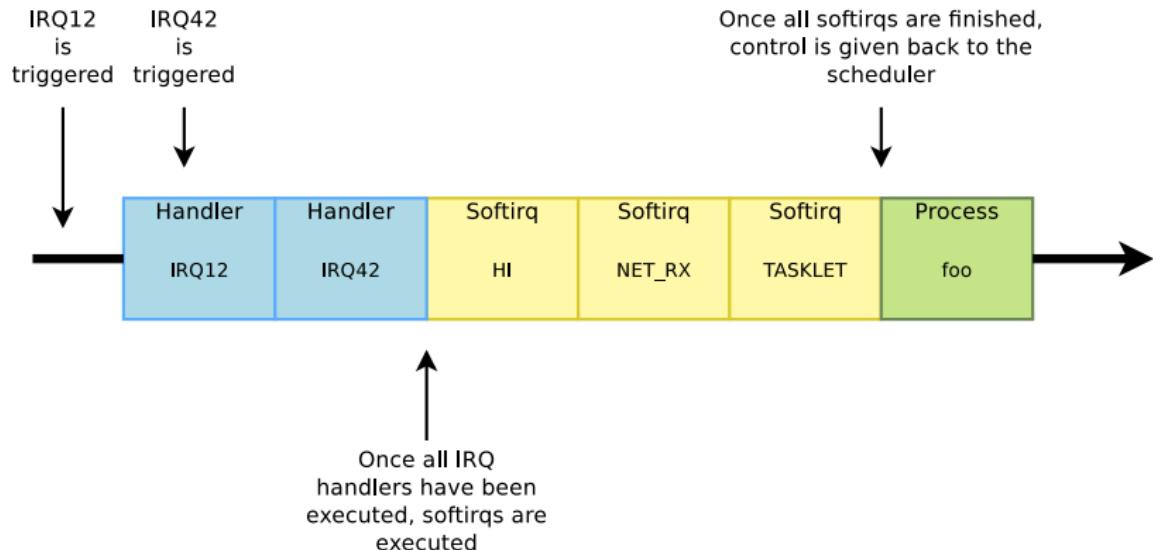

- ▶ Softirqs are a form of bottom half processing
- ▶ The softirqs handlers are executed with all interrupts enabled, and a given softirq handler can run simultaneously on multiple CPUs
- ▶ They are executed once all interrupt handlers have completed, before the kernel resumes scheduling processes, so sleeping is not allowed.
- ▶ The number of softirqs is fixed in the system, so softirqs are not directly used by drivers, but by complete kernel subsystems (network, etc.)
- ▶ The list of softirqs is defined in  
`include/linux/interrupt.h`: HI, TIMER, NET\_TX, NET\_RX, BLOCK, BLOCK\_IOPOLL, TASKLET, SCHED, HRTIMER, RCU
- ▶ The HI and TASKLET softirqs are used to execute tasklets



# Tasklets

- ▶ Tasklets are executed within the HI and TASKLET softirqs. They are executed with all interrupts enabled, but a given tasklet is guaranteed to execute on a single CPU at a time.
- ▶ A tasklet can be declared statically with the `DECLARE_TASKLET()` macro or dynamically with the `tasklet_init()` function. A tasklet is simply implemented as a function. Tasklets can easily be used by individual device drivers, as opposed to softirqs.
- ▶ The interrupt handler can schedule the execution of a tasklet with
  - ▶ `tasklet_schedule()` to get it executed in the TASKLET softirq
  - ▶ `tasklet_hi_schedule()` to get it executed in the HI softirq (higher priority)



## Tasklet Example: simplified atmel\_serial.c 1/2

```
/* The tasklet function */
static void atmel_tasklet_func(unsigned long data) {
    struct uart_port *port = (struct uart_port *)data;
    [...]
}

/* Registering the tasklet */
init function(...) {
    [...]
    tasklet_init(&atmel_port->tasklet,
                atmel_tasklet_func, (unsigned long)port);
    [...]
}
```



## Tasklet Example: simplified atmel\_serial.c 2/2

```
/* Removing the tasklet */
cleanup function(...) {
    [...]
    tasklet_kill(&atmel_port->tasklet);
    [...]
}

/* Triggering execution of the tasklet */
somewhere function(...) {
    tasklet_schedule(&atmel_port->tasklet);
}
```



# Workqueues

- ▶ Workqueues are a general mechanism for deferring work. It is not limited in usage to handling interrupts.
- ▶ The function registered as workqueue is executed in a thread, which means:
  - ▶ All interrupts are enabled
  - ▶ Sleeping is allowed
- ▶ A workqueue is registered with `INIT_WORK()` and typically triggered with `queue_work()`
- ▶ The complete API, in `include/linux/workqueue.h` provides many other possibilities (creating its own workqueue threads, etc.)



# Interrupt management summary

- ▶ Device driver
  - ▶ When the device file is first opened, register an interrupt handler for the device's interrupt channel.
- ▶ Interrupt handler
  - ▶ Called when an interrupt is raised.
  - ▶ Acknowledge the interrupt
  - ▶ If needed, schedule a tasklet taking care of handling data.  
Otherwise, wake up processes waiting for the data.
- ▶ Tasklet
  - ▶ Process the data
  - ▶ Wake up processes waiting for the data
- ▶ Device driver
  - ▶ When the device is no longer opened by any process,  
unregister the interrupt handler.



# Practical lab - Interrupts



- ▶ Adding read capability to the character driver developed earlier.
- ▶ Register an interrupt handler.
- ▶ Waiting for data to be available in the read file operation.
- ▶ Waking up the code when data are available from the device.




# Concurrent Access to Resources: Locking

## Concurrent Access to Resources: Locking

**Free Electrons**

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

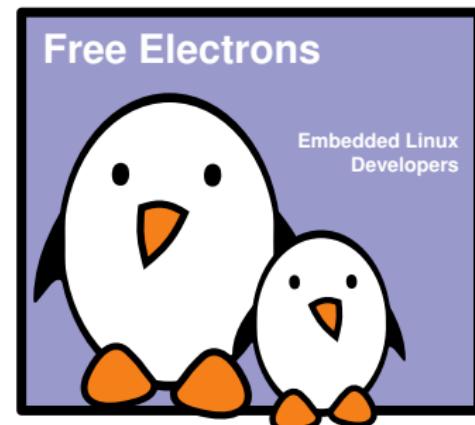




# Sources of concurrency issues

- ▶ In terms of concurrency, the kernel has the same constraint as a multi-threaded program: its state is global and visible in all executions contexts
- ▶ Concurrency arises because of
  - ▶ *Interrupts*, which interrupts the current thread to execute an interrupt handler. They may be using shared resources.
  - ▶ *Kernel preemption*, if enabled, causes the kernel to switch from the execution of one system call to another. They may be using shared resources.
  - ▶ *Multiprocessing*, in which case code is really executed in parallel on different processors, and they may be using shared resources as well.
- ▶ The solution is to keep as much local state as possible and for the shared resources, use locking.



# Concurrency protection with locks

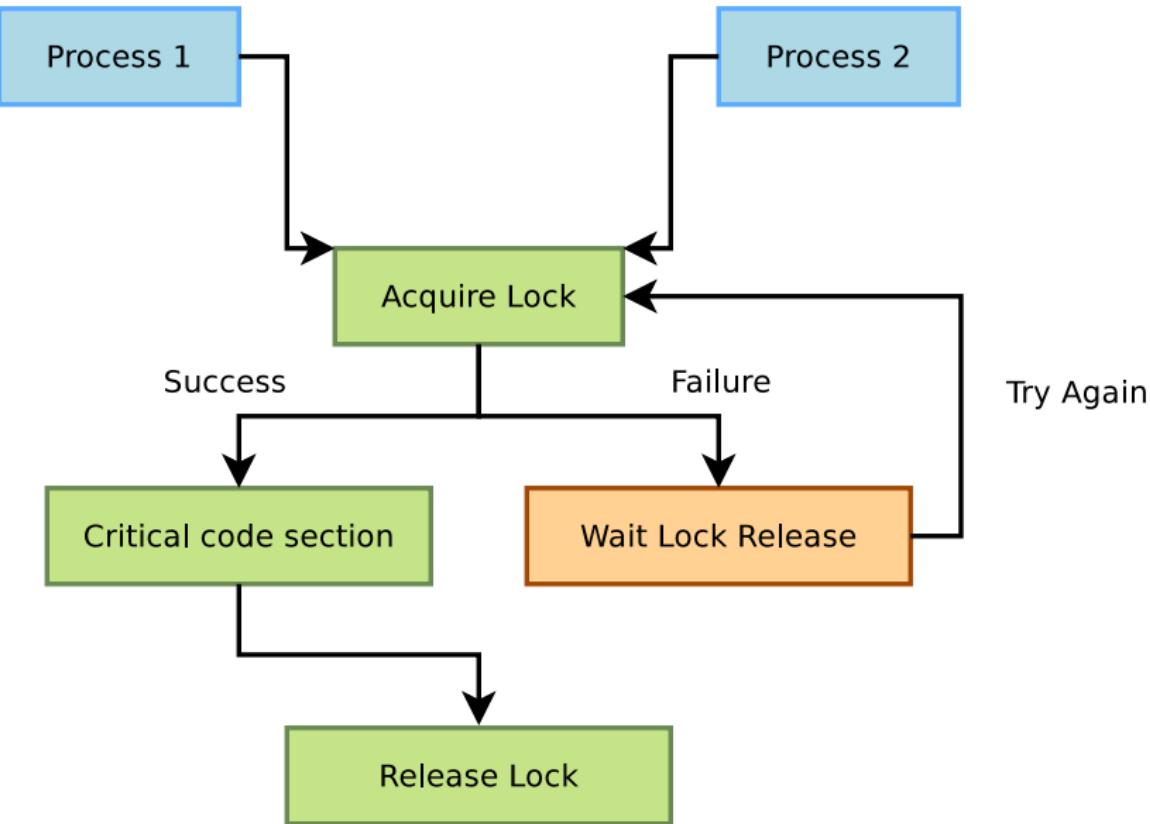



# Linux mutexes

- ▶ The kernel's main locking primitive
- ▶ The process requesting the lock blocks when the lock is already held. Mutexes can therefore only be used in contexts where sleeping is allowed.
- ▶ Mutex definition:
  - ▶ `#include <linux/mutex.h>`
- ▶ Initializing a mutex statically:
  - ▶ `DEFINE_MUTEX(name);`
- ▶ Or initializing a mutex dynamically:
  - ▶ `void mutex_init(struct mutex *lock);`



# Locking and Unlocking Mutexes 1/2

- ▶ `void mutex_lock(struct mutex *lock);`
  - ▶ Tries to lock the mutex, sleeps otherwise.
  - ▶ Caution: can't be interrupted, resulting in processes you cannot kill!
- ▶ `int mutex_lock_killable(struct mutex *lock);`
  - ▶ Same, but can be interrupted by a fatal (`SIGKILL`) signal. If interrupted, returns a non zero value and doesn't hold the lock. Test the return value!!!
- ▶ `int mutex_lock_interruptible(struct mutex *lock);`
  - ▶ Same, but can be interrupted by any signal.




## Locking and Unlocking Mutexes 2/2

- ▶ `int mutex_trylock(struct mutex *lock);`
  - ▶ Never waits. Returns a non zero value if the mutex is not available.
- ▶ `int mutex_is_locked(struct mutex *lock);`
  - ▶ Just tells whether the mutex is locked or not.
- ▶ `void mutex_unlock(struct mutex *lock);`
  - ▶ Releases the lock. Do it as soon as you leave the critical section.



# Spinlocks

- ▶ Locks to be used for code that is not allowed to sleep (interrupt handlers), or that doesn't want to sleep (critical sections). Be very careful not to call functions which can sleep!
- ▶ Originally intended for multiprocessor systems
- ▶ Spinlocks never sleep and keep spinning in a loop until the lock is available.
- ▶ Spinlocks cause kernel preemption to be disabled on the CPU executing them.
- ▶ The critical section protected by a spinlock is not allowed to sleep.

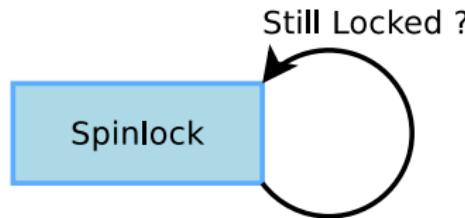



# Initializing Spinlocks

- ▶ Statically
  - ▶ `DEFINE_SPINLOCK(my_lock);`
- ▶ Dynamically
  - ▶ `void spin_lock_init(spinlock_t *lock);`



# Using Spinlocks 1/2

- ▶ Several variants, depending on where the spinlock is called:
  - ▶ `void spin_lock(spinlock_t *lock);`
  - ▶ `void spin_unlock(spinlock_t *lock);`
    - ▶ Doesn't disable interrupts. Used for locking in process context (critical sections in which you do not want to sleep).
  - ▶ `void spin_lock_irqsave(spinlock_t *lock,  
unsigned long flags);`
  - ▶ `void spin_unlock_irqrestore(spinlock_t *lock,  
unsigned long flags);`
    - ▶ Disables / restores IRQs on the local CPU.
    - ▶ Typically used when the lock can be accessed in both process and interrupt context, to prevent preemption by interrupts.



## Using Spinlocks 2/2

- ▶ `void spin_lock_bh(spinlock_t *lock);`
- ▶ `void spin_unlock_bh(spinlock_t *lock);`
  - ▶ Disables software interrupts, but not hardware ones.
  - ▶ Useful to protect shared data accessed in process context and in a soft interrupt (*bottom half*).
  - ▶ No need to disable hardware interrupts in this case.
- ▶ Note that reader / writer spinlocks also exist.



## Spinlock example

- ▶ Spinlock structure embedded into struct uart\_port

```
struct uart_port {  
    spinlock_t lock;  
    /* Other fields */  
};
```


- ▶ Spinlock taken/released with protection against interrupts

```
static unsigned int ulite_tx_empty  
(struct uart_port *port) {  
    unsigned long flags;  
  
    spin_lock_irqsave(&port->lock, flags);  
    /* Do something */  
    spin_unlock_irqrestore(&port->lock, flags);  
}
```



# Deadlock Situations

- ▶ They can lock up your system. Make sure they never happen!
- ▶ Don't call a function that can try to get access to the same lock

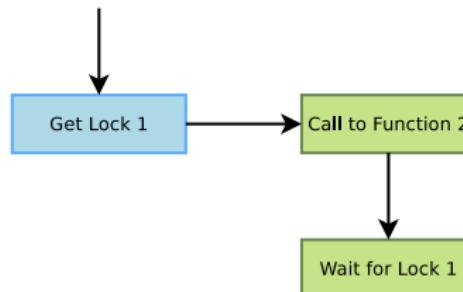

- ▶ Holding multiple locks is risky!





## Kernel lock validator

- ▶ From Ingo Molnar and Arjan van de Ven
  - ▶ Adds instrumentation to kernel locking code
  - ▶ Detect violations of locking rules during system life, such as:
    - ▶ Locks acquired in different order (keeps track of locking sequences and compares them).
    - ▶ Spinlocks acquired in interrupt handlers and also in process context when interrupts are enabled.
  - ▶ Not suitable for production systems but acceptable overhead in development.
- ▶ See `Documentation/lockdep-design.txt` for details



# Alternatives to Locking

- ▶ As we have just seen, locking can have a strong negative impact on system performance. In some situations, you could do without it.
  - ▶ By using lock-free algorithms like *Read Copy Update* (RCU).
  - ▶ RCU API available in the kernel (See <http://en.wikipedia.org/wiki/RCU>).
  - ▶ When available, use atomic operations.



# Atomic Variables 1/2

- ▶ Useful when the shared resource is an integer value
- ▶ Even an instruction like `n++` is not guaranteed to be atomic on all processors!
- ▶ Atomic operations definitions
  - ▶ `#include <asm/atomic.h>`
- ▶ `atomic_t`
  - ▶ Contains a signed integer (at least 24 bits)
- ▶ Atomic operations (main ones)
  - ▶ Set or read the counter:
    - ▶ `void atomic_set(atomic_t *v, int i);`
    - ▶ `int atomic_read(atomic_t *v);`
  - ▶ Operations without return value:
    - ▶ `void atomic_inc(atomic_t *v);`
    - ▶ `void atomic_dec(atomic_t *v);`
    - ▶ `void atomic_add(int i, atomic_t *v);`
    - ▶ `void atomic_sub(int i, atomic_t *v);`



## Atomic Variables 2/2

- ▶ Similar functions testing the result:
  - ▶ `int atomic_inc_and_test(...);`
  - ▶ `int atomic_dec_and_test(...);`
  - ▶ `int atomic_sub_and_test(...);`
- ▶ Functions returning the new value:
  - ▶ `int atomic_inc_return(...);`
  - ▶ `int atomic_dec_return(...);`
  - ▶ `int atomic_add_return(...);`
  - ▶ `int atomic_sub_return(...);`



# Atomic Bit Operations

- ▶ Supply very fast, atomic operations
- ▶ On most platforms, apply to an unsigned long type.
- ▶ Apply to a void type on a few others.
- ▶ Set, clear, toggle a given bit:
  - ▶ `void set_bit(int nr, unsigned long *addr);`
  - ▶ `void clear_bit(int nr, unsigned long *addr);`
  - ▶ `void change_bit(int nr, unsigned long *addr);`
- ▶ Test bit value:
  - ▶ `int test_bit(int nr, unsigned long *addr);`
- ▶ Test and modify (return the previous value):
  - ▶ `int test_and_set_bit(...);`
  - ▶ `int test_and_clear_bit(...);`
  - ▶ `int test_and_change_bit(...);`



# Practical lab - Locking



- ▶ Add locking to the driver to prevent concurrent accesses to shared resources




# Kernel Debugging

# Kernel Debugging

## Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

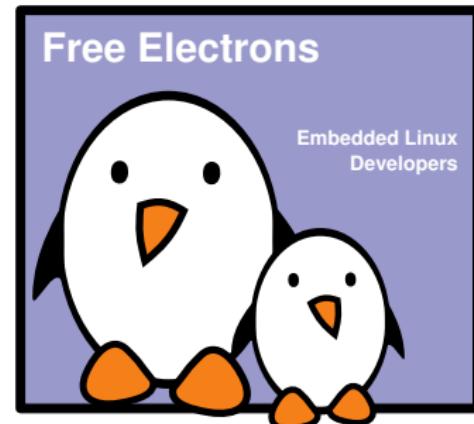



# Debugging Using Messages

- ▶ Three APIs are available
  - ▶ The old `printk()`, no longer recommended for new debugging messages
  - ▶ The `pr_*`() family of functions: `pr_emerg()`, `pr_alert()`, `pr_crit()`, `pr_err()`, `pr_warning()`, `pr_notice()`, `pr_info()`, `pr_cont()` and the special `pr_debug()` (see next page)
    - ▶ They take a classic format string with arguments
    - ▶ Defined in `include/linux/printk.h`
  - ▶ The `dev_*`() family of functions: `dev_emerg()`, `dev_alert()`, `dev_crit()`, `dev_err()`, `dev_warning()`, `dev_notice()`, `dev_info()` and the special `dev_dbg()` (see next page)
    - ▶ They take a pointer to `struct device` as first argument, and then a format string with arguments
    - ▶ Defined in `include/linux/device.h`
    - ▶ To be used in drivers integrated with the Linux device model



## pr\_debug() and dev\_dbg()

- ▶ When the driver is compiled with `DEBUG` defined, all those messages are compiled and printed at the debug level. `DEBUG` can be defined by `#define DEBUG` at the beginning of the driver, or using `ccflags-$(CONFIG_DRIVER) += -DDEBUG` in the `Makefile`
- ▶ When the kernel is compiled with `CONFIG_DYNAMIC_DEBUG`, then those messages can dynamically be enabled on a per-file, per-module or per-message basis
  - ▶ See `Documentation/dynamic-debug-howto.txt` for details
  - ▶ Very powerful feature to only get the debug messages you're interested in.
- ▶ When `DEBUG` is not defined and `CONFIG_DYNAMIC_DEBUG` is not enabled, those messages are not compiled in.



# Configuring The Priority

- ▶ Each message is associated to a priority, ranging from 0 for emergency to 7 for debug.
- ▶ All the messages, regardless of their priority, are stored in the kernel log ring buffer
  - ▶ Typically accessed using the `dmesg` command
- ▶ Some of the messages may appear on the console, depending on their priority and the configuration of
  - ▶ The `loglevel` kernel parameter, which defines the priority above which messages are displayed on the console. See `Documentation/kernel-parameters.txt` for details.
  - ▶ The value of `/proc/sys/kernel/printk`, which allows to change at runtime the priority above which messages are displayed on the console. See `Documentation/sysctl/kernel.txt` for details.



# DebugFS

- ▶ A virtual filesystem to export debugging information to user space.
  - ▶ Kernel configuration: DEBUG\_FS
    - ▶ Kernel hacking -> Debug Filesystem
  - ▶ The debugging interface disappears when Debugfs is configured out.
  - ▶ You can mount it as follows:
    - ▶ `sudo mount -t debugfs none /sys/kernel/debug`
  - ▶ First described on <http://lwn.net/Articles/115405/>
  - ▶ API documented in the Linux Kernel Filesystem API:
    - ▶ [Documentation/DocBook/filesystems/](#)



# DebugFS API

- ▶ Create a sub-directory for your driver:
  - ▶ `struct dentry *debugfs_create_dir(const char *name, struct dentry *parent);`
- ▶ Expose an integer as a file in DebugFS:
  - ▶ `struct dentry *debugfs_create_{u,x}{8,16,32}(const char *name, mode_t mode, struct dentry *parent, u8 *value);`
    - ▶ `u` for decimal representation
    - ▶ `x` for hexadecimal representation
- ▶ Expose a binary blob as a file in DebugFS:
  - ▶ `struct dentry *debugfs_create_blob(const char *name, mode_t mode, struct dentry *parent, struct debugfs_blob_wrapper *blob);`
- ▶ Also possible to support writable DebugFS files or customize the output using the more generic `debugfs_create_file()` function.



# Deprecated Debugging Mechanisms

- ▶ Some additional debugging mechanisms, whose usage is now considered deprecated
  - ▶ Adding special `ioctl()` commands for debugging purposes. `DebugFS` is preferred.
  - ▶ Adding special entries in the `proc` filesystem. `DebugFS` is preferred.
  - ▶ Adding special entries in the `sysfs` filesystem. `DebugFS` is preferred.
  - ▶ Using `printf()`. The `pr_*`() and `dev_*`() functions are preferred.



# Using Magic SysRq

- ▶ Allows to run multiple debug / rescue commands even when the kernel seems to be in deep trouble
  - ▶ On PC: [Alt] + [SysRq] + <character>
  - ▶ On embedded: break character on the serial line + <character>
- ▶ Example commands:
  - ▶ n: makes RT processes nice-able.
  - ▶ w: shows the kernel stack of all sleeping processes
  - ▶ t: shows the kernel stack of all running processes
  - ▶ b: reboot the system
  - ▶ You can even register your own!
- ▶ Detailed in Documentation/sysrq.txt



# kgdb - A Kernel Debugger

- ▶ The execution of the kernel is fully controlled by `gdb` from another machine, connected through a serial line.
- ▶ Can do almost everything, including inserting breakpoints in interrupt handlers.
- ▶ Feature supported for the most popular CPU architectures



## Using kgdb 1/2

- ▶ Details available in the kernel documentation:  
`Documentation/DocBook/kgdb/`
- ▶ Recommended to turn on `CONFIG_FRAME_POINTER` to aid in producing more reliable stack backtraces in `gdb`.
- ▶ You must include a kgdb I/O driver. One of them is kgdb over serial console (`kgdboc`: kgdb over console, enabled by `CONFIG_KGDB_SERIAL_CONSOLE`)
- ▶ Configure `kgdboc` at boot time by passing to the kernel:
  - ▶ `kgdboc=<tty-device>, <bauds>`.
  - ▶ For example: `kgdboc=ttyS0, 115200`




## Using kgdb 2/2

- ▶ Then also pass `kgdbwait` to the kernel: it makes `kgdb` wait for a debugger connection.
- ▶ Boot your kernel, and when the console is initialized, interrupt the kernel with `Alt + SysRq + g`.
- ▶ On your workstation, start `gdb` as follows:
  - ▶ `gdb ./vmlinux`
  - ▶ `(gdb) set remotebaud 115200`
  - ▶ `(gdb) target remote /dev/ttyS0`
- ▶ Once connected, you can debug a kernel the way you would debug an application program.



# Debugging with a JTAG Interface

- ▶ Two types of JTAG dongles
  - ▶ Those offering a `gdb` compatible interface, over a serial port or an Ethernet connection. `gdb` can directly connect to them.
  - ▶ Those not offering a `gdb` compatible interface are generally supported by OpenOCD (Open On Chip Debugger):  
<http://openocd.sourceforge.net/>
    - ▶ OpenOCD is the bridge between the `gdb` debugging language and the JTAG interface of the target CPU.
    - ▶ See the very complete documentation: <http://openocd.sourceforge.net/documentation/online-docs/>
    - ▶ For each board, you'll need an OpenOCD configuration file (ask your supplier)

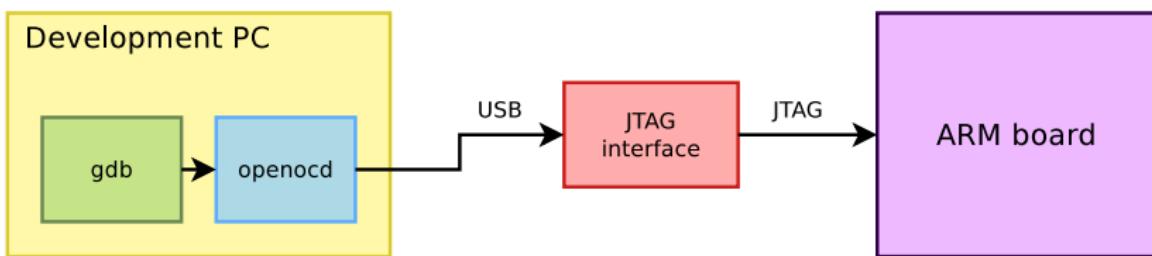




# More Kernel Debugging Tips

- ▶ Enable `CONFIG_KALLSYMS_ALL`
  - ▶ General Setup -
    - > Configure standard kernel features
  - ▶ To get oops messages with symbol names instead of raw addresses
  - ▶ This obsoletes the `ksymoops` tool
- ▶ On ARM, if your kernel doesn't boot or hangs without any message, you can activate early debugging options (`CONFIG_DEBUG_LL` and `CONFIG_EARLYPRINTK`), and add `earlyprintk` to the kernel command line.
- ▶ Techniques to locate the C instruction which caused an oops:  
<http://j.mp/18oMRHx>



# Kernel Crash Analysis with kexec/kdump

- ▶ `kexec` system call: makes it possible to call a new kernel, without rebooting and going through the BIOS / firmware.
- ▶ Idea: after a kernel panic, make the kernel automatically execute a new, clean kernel from a reserved location in RAM, to perform post-mortem analysis of the memory of the crashed kernel.
- ▶ See Documentation/kdump/`kdump.txt` in the kernel sources for details.

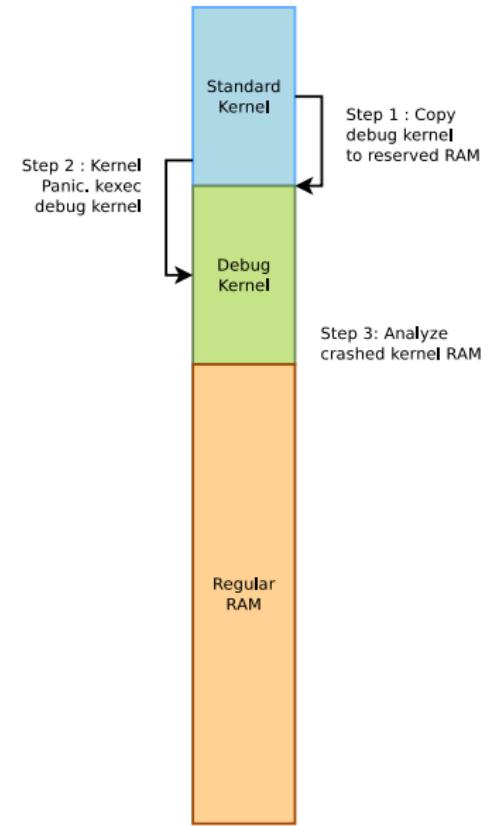



# Practical lab - Kernel debugging



- ▶ Use the dynamic printk feature.
- ▶ Add debugfs entries
- ▶ Load a broken driver and see it crash
- ▶ Analyze the error information dumped by the kernel.
- ▶ Disassemble the code and locate the exact C instruction which caused the failure.




# Porting the Linux Kernel to an ARM Board

# Porting the Linux Kernel to an ARM Board

**Free Electrons**

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

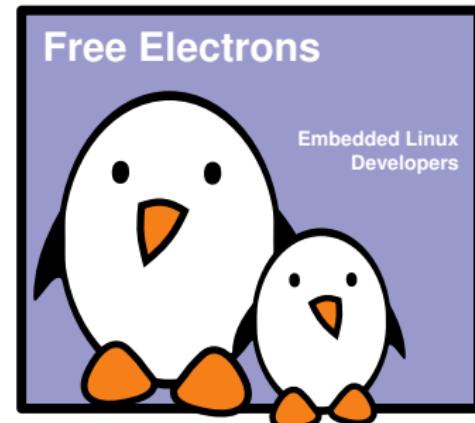



# Porting the Linux kernel

- ▶ The Linux kernel supports a lot of different CPU architectures
- ▶ Each of them is maintained by a different group of contributors
  - ▶ See the `MAINTAINERS` file for details
- ▶ The organization of the source code and the methods to port the Linux kernel to a new board are therefore very architecture-dependent
  - ▶ For example, some architectures use the Device Tree, some do not.
- ▶ This presentation is focused on the ARM architecture only



# Architecture, CPU and Machine

- ▶ In the source tree, each architecture has its own directory
  - ▶ arch/arm for the ARM architecture
- ▶ This directory contains generic ARM code
  - ▶ boot, common, configs, kernel, lib, mm, nwfpe, vfp, oprofile, tools
- ▶ And many directories for different SoC families
  - ▶ mach-\* directories: mach-pxa for PXA CPUs, mach-imx for Freescale iMX CPUs, etc.
    - ▶ Before the ARM cleanup, those directories contained support for the SoC family (GPIO, clocks, pinmux, power management, interrupt controller, etc.) and for the various boards.
    - ▶ Nowadays, they contain a lot less code, essentially a small SoC description file, power management and SMP code.
- ▶ Some CPU types share some code, in directories named plat-\*
- ▶ Device Tree source files in arch/arm/boot/dts.



## Before the Device Tree and ARM cleanup

- ▶ Until 2011, the ARM architecture wasn't using the Device Tree, and a large portion of the SoC support was located in `arch/arm/mach-<foo>`.
- ▶ Each board supported by the kernel was associated to an unique *machine ID*.
- ▶ The entire list of *machine ID* can be downloaded at <http://www.arm.linux.org.uk/developer/machines/download.php> and one could freely register an additional one.
- ▶ The Linux kernel was defining a *machine structure* for each board, which associates the *machine ID* with a set of information and callbacks.
- ▶ The bootloader had to pass the *machine ID* to the kernel in a specific ARM register.



# The Device Tree and the ARM cleanup

- ▶ As the ARM architecture gained significantly in popularity, some major refactoring was needed.
- ▶ First, the Device Tree was introduced on ARM: instead of using C code to describe SoCs and boards, a specialized language is used.
- ▶ Second, many driver infrastructures were created to replace custom code in `arch/arm/mach-<foo>`:
  - ▶ The common clock framework in `drivers/clk`
  - ▶ The pinctrl subsystem in `drivers/pinctrl`
  - ▶ The irqchip subsystem in `drivers/irqchip`
  - ▶ The clocksource subsystem in `drivers/clocksource`
- ▶ The amount of code in `mach-<foo>` has now significantly reduced.



# Adding the support for a new ARM board

Provided the SoC used on your board is supported by the Linux kernel:

1. Create a *Device Tree* file in `arch/arm/boot/dts`, generally named `<soc-name>-<board-name>.dts`, and make it include the relevant SoC `.dtsi` file.
  - ▶ Your Device Tree will describe all the SoC peripherals that are enabled, the pin muxing, as well as all the devices on the board.
2. Modify `arch/arm/boot/dts/Makefile` to make sure your Device Tree gets built as a *DTB* during the kernel build.
3. If needed, develop the missing device drivers for the devices that are on your board outside the SoC.



## Example of the Freescale iMX28 SoCs

- ▶ The hardware platform used in this training is based on the AM335x processor from Texas Instruments.
- ▶ This platform inherits from the OMAP family of TI, for which kernel support has been around for a long time.
- ▶ Due to this, and the complexity of the platform, the AM335x and OMAP support in the kernel hasn't fully migrated yet to all the infrastructures created during the *ARM cleanup*.
- ▶ Therefore, to illustrate this section, we will take the example of the Freescale iMX28 platform, on which Free Electrons has worked specifically.



# Studying the Crystalfontz CFA-10036 platform

- ▶ Crystalfontz CFA-10036
- ▶ Uses the Freescale iMX28 SoC, from the MXS family.
- ▶ 128MB of RAM
- ▶ 1 serial port, 1 LED
- ▶ 1 I2C bus, equipped with an OLED display
- ▶ 1 SD-Card slot





# Crystalfontz CFA-10036 Device Tree, header

- ▶ Mandatory Device Tree language definition

```
/dts-v1/
```

- ▶ Include the .dtsi file describing the SoC

```
#include "im28.dtsi"
```

- ▶ Start the root of the tree

```
/ {
```

- ▶ A human-readable string to describe the machine

```
model = "Crystalfontz CFA-10036 Board";
```

- ▶ A list of *compatible* strings, from the most specific one to the most general one. Can be used by kernel code to do a SoC or board-specific check.

```
compatible = "crystalfontz,cfa10036", "fsl,imx28";
```



# Crystalfontz CFA-10036 Device Tree, chosen/memory

- ▶ Definition of the default *kernel command line*. Some additional operating-system specific entries can be added in chosen:

```
chosen {  
    bootargs = "console=ttyS0,115200 earlyprintk";  
};
```

- ▶ Definition of the size and location of the RAM:

```
memory {  
    device_type = "memory";  
    reg = <0x40000000 0x8000000>; /* 128 MB */  
};
```



# Crystalfontz CFA-10036, bus/UART

- ▶ Start of the internal SoC peripherals.

```
apb@80000000 {  
    apbh@80000000 {  
        apbx@80040000 {
```

- ▶ The CFA-10036 has one debug UART, so the corresponding controller is enabled:

```
duart: serial@80074000 {  
    pinctrl-names = "default";  
    pinctrl-0 = <&duart_pins_b>;  
    status = "okay";  
};
```



# Crystalfontz CFA-10036 Device Tree, Muxing

- ▶ Definition of a few pins that will be muxed as GPIO, for LEDs and reset.

```
pinctrl@800018000 {
    ssd1306_cfa10036: ssd1306-10036@00 {
        reg = <0>;
        fsl,pinmux-ids = <
            0x2073 /* MX28_PAD_SSP0_D7__GPIO_2_7 */
        >;
        fsl,drive-strength = <0>;
        fsl,voltage = <1>;
        fsl,pull-up = <0>;
    };

    led_pins_cfa10036: leds-10036@00 {
        reg = <0>;
        fsl,pinmux-ids = <
            0x3043 /* MX28_PAD_AUART1_RX__GPIO_3_4 */
        >;
        fsl,drive-strength = <0>;
        fsl,voltage = <1>;
        fsl,pull-up = <0>;
    };
};
```



# Crystalfontz CFA-10036 Device Tree, LED

- ▶ One LED is connected to this platform. Note the reference to the `led_pins_cfa10036` muxing configuration.

```
leds {
    compatible = "gpio-leds";
    pinctrl-names = "default";
    pinctrl-0 = <&led_pins_cfa10036>

    power {
        gpios = <&gpio3 4 1>;
        default-state = "on";
    };
};
```



# Crystalfontz CFA-10036 Device Tree, SD Card/USB

- ▶ The platform also has a USB port

```
usb0: usb@80080000 {  
    pinctrl-names = "default";  
    pinctrl-0 = <&usb0_otg_cfa10036>;  
    status = "okay";  
};
```

- ▶ and an SD Card slot:

```
ssp0: ssp@80010000 {  
    compatible = "fsl,imx28-mmc";  
    pinctrl-names = "default";  
    pinctrl-0 = <&mmc0_4bit_pins_a  
                &mmc0_cd_cfg &mmc0_sck_cfg>;  
    bus-width = <4>;  
    status = "okay";  
};
```



# Crystalfontz CFA-10036 Device Tree, I2C bus

- ▶ An I2C bus, with a Solomon SSD1306 OLED display connected on it:

```
i2c0: i2c@80058000 {
    pinctrl-names = "default";
    pinctrl-0 = <&i2c0_pins_b>;
    clock-frequency = <400000>;
    status = "okay";

    ssd1306: oled@3c {
        compatible = "solomon,ssd1306fb-i2c";
        pinctrl-names = "default";
        pinctrl-0 = <&ssd1306_cfa10036>;
        reg = <0x3c>;
        reset-gpios = <&gpio2 7 0>;
        solomon,height = <32>;
        solomon,width = <128>;
        solomon,page-offset = <0>;
    };
};
```



# Crystalfontz CFA-10036 Device Tree, Breakout Boards

- ▶ The CFA-10036 can be plugged in other breakout boards, and the device tree also allows us to describe this, using includes. For example, the CFA-10057:

```
#include "imx28-cfa10036.dts"
```

- ▶ This allows to have a layered description. This can also be done for boards that have a lot in common, like the BeagleBone and the BeagleBone Black, or the AT91 SAMA5D3-based boards.



# Crystalfontz CFA-10036: build the DTB

- ▶ To ensure that the Device Tree Blob gets built for this board Device Tree Source, one need to ensure it is listed in arch/arm/boot/dts/Makefile:

```
dtb-$ $(CONFIG_ARCH_MXS) += imx28-cfa10036.dtb \
    imx28-cfa10037.dtb \
    imx28-cfa10049.dtb \
    imx28-cfa10055.dtb \
    imx28-cfa10056.dtb \
    imx28-cfa10057.dtb \
    imx28-cfa10058.dtb \
    imx28-evk.dtb
```



# Understanding the SoC support

- ▶ Let's consider another ARM platform here, the Marvell Armada 370/XP.
- ▶ For this platform, the core of the SoC support is located in `arch/arm/mach-mvebu`
- ▶ The `armada-370-xp.c` (see code on the next slide) contains the "*entry point*" of the SoC definition, the `DT_MACHINE_START .. MACHINE_END` definition:
  - ▶ Defines the list of platform compatible strings that will match this platform, in this case `marvell,armada-370-xp`. This allows the kernel to know which `DT_MACHINE` structure to use depending on the DTB that is passed at boot time.
  - ▶ Defines various callbacks for the platform initialization, the most important one being the `.init_machine` callback, which calls `of_platform_populate()`. This function travels through the Device Tree and instantiates all the devices.



## arch/arm/mach-mvebu/armada-370-xp.c

```
static void __init armada_370_xp_dt_init(void)
{
    of_platform_populate(NULL, of_default_bus_match_table, NULL, NULL);
}

static const char * const armada_370_xp_dt_compat[] = {
    "marvell,armada-370-xp",
    NULL,
};

DT_MACHINE_START(ARMADA_XP_DT, "Marvell Armada 370/XP (Device Tree)")
    .smp          = smp_ops(armada_xp_smp_ops),
    .init_machine = armada_370_xp_dt_init,
    .map_io       = armada_370_xp_map_io,
    .init_time    = armada_370_xp_timer_and_clk_init,
    .restart      = mvebu_restart,
    .dt_compat    = armada_370_xp_dt_compat,
MACHINE_END
```



# Components of the minimal SoC support

The minimal SoC support consists in

- ▶ An SoC *entry point* file, `arch/arm/mach-mvebu/armada-370-xp.c`
- ▶ At least one SoC `.dtsi` DT and one board `.dts` DT, in `arch/arm/boot/dts`
- ▶ A interrupt controller driver, `drivers/irqchip/irq-armada-370-xp.c`
- ▶ A timer driver, `drivers/clocksource/time-armada-370-xp.c`
- ▶ An `earlyprintk` implementation to get early messages from the console, `arch/arm/Kconfig.debug` and `arch/arm/include/debug`
- ▶ A serial port driver in `drivers/tty/serial`. For Armada 370/XP, the 8250 driver `drivers/tty/serial/8250` is used.

This allows to boot a minimal system up to user space, using a root filesystem in *initramfs*.



# Extending the minimal SoC support

Once the minimal SoC support is in place, the following core components should be added:

- ▶ Support for the clocks. Usually requires some clock drivers, as well as DT representations of the clocks. See `drivers/clk/mvebu` for Armada 370/XP clock drivers.
- ▶ Support for pin muxing, through the *pinctrl* subsystem. See `drivers/pinctrl/mvebu` for the Armada 370/XP drivers.
- ▶ Support for GPIOs, through the *GPIO* subsystem. See `drivers/gpio/gpio-mvebu.c` for the Armada 370/XP GPIO driver.
- ▶ Support for SMP, through `struct smp_operations`. See `arch/arm/mach-mvebu/platsmp.c`.



## Adding device drivers

Once the core pieces of the SoC support have been implemented, the remaining part is to add drivers for the different hardware blocks:


- ▶ Ethernet driver, in `drivers/net/ethernet/mvneta.c`
- ▶ SATA driver, in `drivers/ata/sata_mv.c`
- ▶ I2C driver, in `drivers/i2c/busses/i2c-mv64xxx.c`
- ▶ SPI driver, in `drivers/spi/spi-orion.c`
- ▶ PCIe driver, in `drivers/pci/host/pci-mvebu.c`
- ▶ USB driver, in `drivers/usb/host/ehci-orion.c`
- ▶ etc.



# Marvell EBU mainlining

## Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

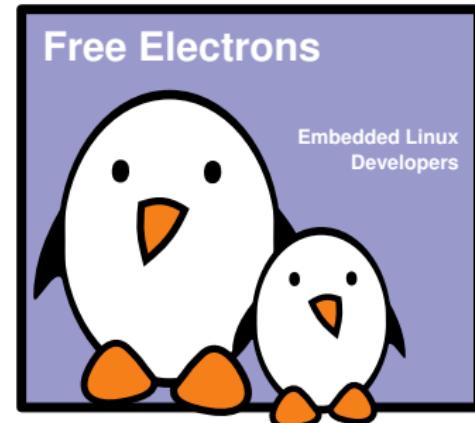




# Marvell EBU mainlining

- ▶ Collaboration between Marvell and Free Electrons
- ▶ Goal is to integrate in the upstream Linux kernel the support for Marvell EBU processors
- ▶ Started in April 2012, with the Armada 370/XP
- ▶ Extended to cover Armada 375/38x in the second half of 2013
- ▶ On-going project
- ▶ On Free Electrons side:
  - ▶ Grégory Clement
  - ▶ Ezequiel Garcia
  - ▶ Thomas Petazzoni




# Process

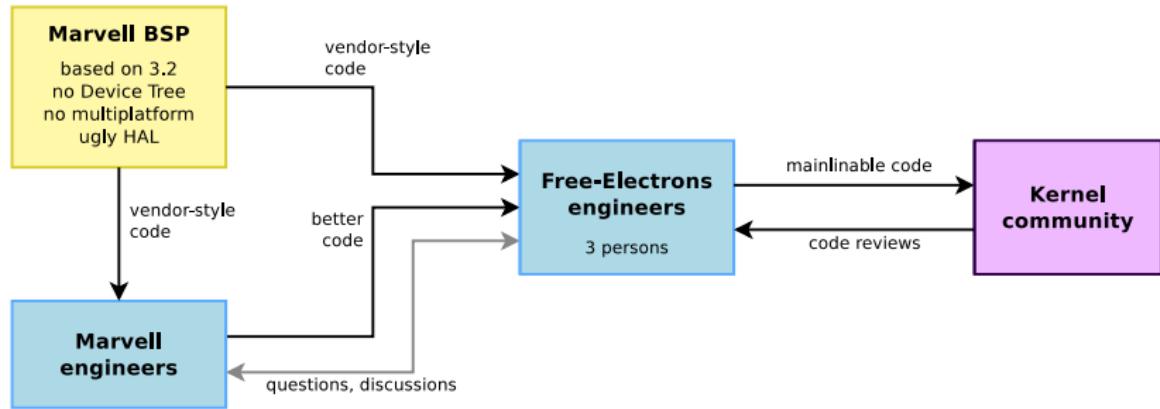




# Submission

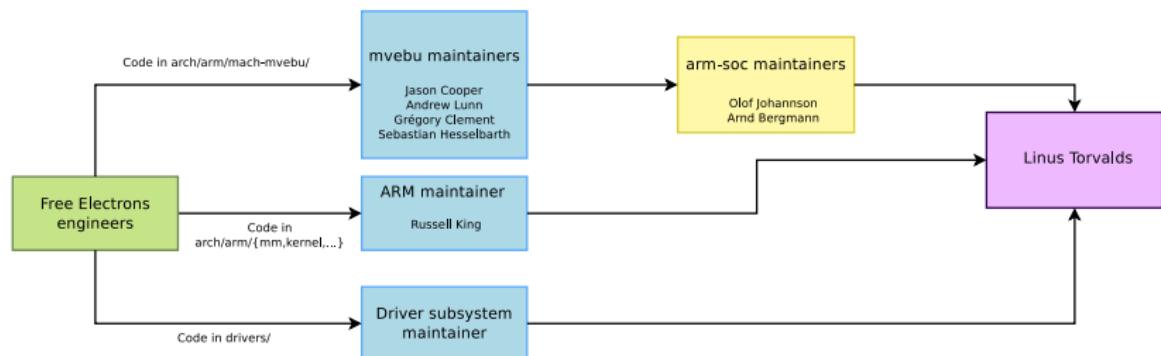




# Timeline (1)

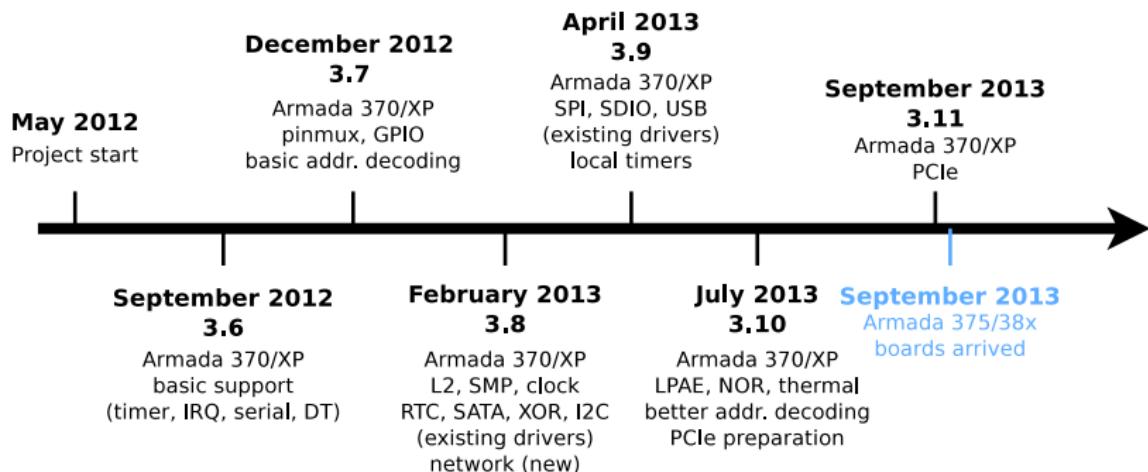



# Timeline (2)

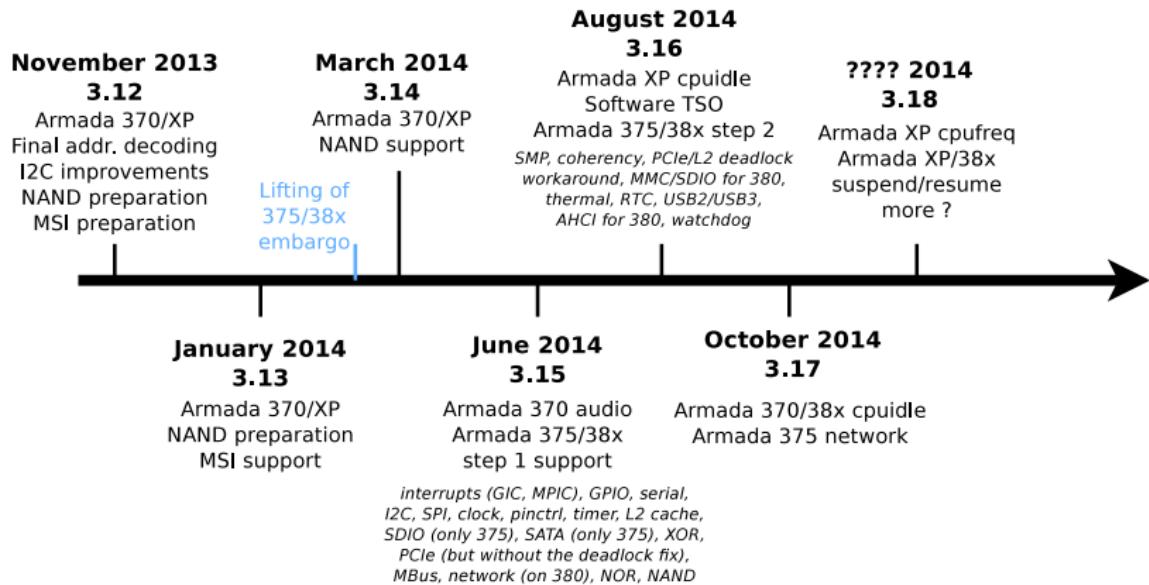



# Using the result

- ▶ make mvebu\_defconfig (to support just mvebu platforms)  
or make multi\_v7\_defconfig (for the ARMv7  
multiplatform kernel)
- ▶ make
  - ▶ Kernel image: arch/arm/boot/zImage
  - ▶ Device Tree blobs: arch/arm/boot/dts/armada-\* .dtb
- ▶ From U-Boot
  - ▶ If DT capable: bootz <kerneladdr> - <dtbaddr>
  - ▶ If not DT capable
    - ▶ Kernel must have CONFIG\_ARM\_APPENDED\_DTB=y, and  
optionally CONFIG\_ARM\_ATAG\_DTB\_COMPAT=y.
    - ▶ cat zImage <dtb> > zImage.<foo>
    - ▶ mkimage -A arm -O linux -C none -a <loadaddr> -  
e <entrypoint> -d zImage.<foo> uImage.<foo>
    - ▶ bootm <kerneladdr>



## Where is the code: platform code (1)

- ▶ One single directory for all Marvell EBU platforms:  
`arch/arm/mach-mvebu/`
- ▶ Currently has Armada 370, XP, 375, 38x, but also Dove and Kirkwood.
- ▶ Will ultimately also have Orion5x support, and possibly MV78xx0.
- ▶ Goal is to remove `mach-dove`, `mach-orion5x`,  
`mach-mv78xx0` and `plat-orion`
- ▶ Platform code should be as minimal as possible: most of the code should go in drivers.



# Where is the code: platform code (2)

- ▶ **board-v7.c** Core file for v7 platforms, includes the DT\_MACHINE\_START definition.
- ▶ **coherency.c** Coherency fabric code (for CPU coherency on A370/XP and I/O coherency 370, XP, 375 and 38x)
- ▶ **cpu-reset.c** Minimal driver to handle the CPU reset register, used for SMP boot.
- ▶ **dove.c** Core file for Dove platforms. Should be merged with board-v7.c in the future.
- ▶ **kirkwood.c** Core file for Kirkwood platforms. Should be renamed board-v5.c in the future.
- ▶ **kirkwood-pm.c** Suspend/resume support for Kirkwood
- ▶ **mvebu-soc-id.c** SoC identification for 370, XP, 375, 38x
- ▶ **netxbig.c** Remaining board support for Kirkwood. Should be removed at some point.
- ▶ **platsmp.c, platsmp-a9.c, headsmp.S, headsmp-a9.S** SMP support for Armada 370/XP and Armada 375/38x
- ▶ **pmsu.c** Power Management Service Unit of Armada 370, XP, 38x (used for SMP, cpuidle, cpufreq, etc.)
- ▶ **system-controller.c** Used for platform reset, SMP boot on some platforms.



# Where is the code: Device Tree

In `arch/arm/boot/dts`

- ▶ `armada-370.dtsi`
- ▶ `armada-370-xp.dtsi`
- ▶ `armada-375.dtsi`
- ▶ `armada-380.dtsi`
- ▶ `armada-385.dtsi`
- ▶ `armada-38x.dtsi`
- ▶ `armada-xp.dtsi`
- ▶ `armada-xp-mv78230.dtsi`
- ▶ `armada-xp-mv78260.dtsi`
- ▶ `armada-xp-mv78460.dtsi`
- ▶ `armada-370-db.dts`
- ▶ `armada-370-mirabox.dts`
- ▶ `armada-370-netgear-rn102.dts`
- ▶ `armada-370-netgear-rn104.dts`
- ▶ `armada-370-rd.dts`
- ▶ `armada-375-db.dts`
- ▶ `armada-385-db.dts`
- ▶ `armada-385-rd.dts`
- ▶ `armada-xp-axpwifiap.dts`
- ▶ `armada-xp-db.dts`
- ▶ `armada-xp-gp.dts`
- ▶ `armada-xp-matrix.dts`
- ▶ `armada-xp-netgear-rn2120.dts`
- ▶ `armada-xp-openblocks-ax3-4.dts`



# Where is the code: drivers (1)

- ▶ Clock drivers: `drivers/clk/mvebu`
- ▶ L2 cache: `arch/arm/mm/cache-l2x0.c` (for both Aurora and PL310)
- ▶ MPIC: `drivers/irqchip/irq-armada-370-xp.c`, includes MSI and IPI support
- ▶ GIC: `drivers/irqchip/irq-gic.c`
- ▶ Marvell timer:  
`drivers/clocksource/time-armada-370-xp.c`
- ▶ ARM timer: `arch/arm/kernel/smp_twd.c`
- ▶ Pin-muxing drivers (MPPs): `drivers/pinctrl/mvebu`
- ▶ GPIO driver: `drivers/gpio/gpio-mvebu.c`
- ▶ Watchdog: `drivers/watchdog/orion_wdt.c`



## Where is the code: drivers (2)

- ▶ MBus: `drivers/bus/mvebu-mbus.c`, configuration of CPU to device windows, provide an API for drivers to query SDRAM windows
- ▶ Device Bus: `drivers/memory/mvebu-devbus.c`, for NOR support mainly
- ▶ PCIe: `drivers/pci/host/pci-mvebu.c`. Includes a PCI-to-PCI bridge emulation for dynamic MBus window allocation.
- ▶ Network 370/XP/38x:  
`drivers/net/ethernet/marvell/mvneta.c`
- ▶ Network 375: `drivers/net/ethernet/marvell/mvpp2.c`



## Where is the code: drivers (3)

- ▶ SATA 370/XP/375: `drivers/ata/sata_mv.c` (existing driver, shared with Kirkwood, etc.)
- ▶ SATA 38x: `drivers/ata/ahci_mvebu.c`
- ▶ RTC, `drivers/rtc/rtc-mv.c` (existing driver, used on Kirkwood)
- ▶ SPI, `drivers/spi/spi-orion.c` (existing driver, used on Kirkwood)
- ▶ I2C, `drivers/i2c/busses/i2c-mv64xxx.c` (existing driver, extended to support the transaction generator)
- ▶ Serial, `drivers/tty/serial/8250/`



## Where is the code: drivers (4)

- ▶ USB, `drivers/usb/host/ehci-orion.c` (existing driver, used on Kirkwood), `drivers/usb/host/xhci-plat.c` (for XHCI)
- ▶ NAND, `drivers/mtd/nand/pxa3xx_nand.c` (existing driver, but significantly extended to support large pages)
- ▶ SDIO, `drivers/mmc/host/mvsdio.c` (existing driver, used on Kirkwood)
- ▶ Thermal, `drivers/thermal/armada_thermal.c`, new driver
- ▶ XOR, `drivers/dma/mv_xor.c` (existing driver, used on Kirkwood)



# MBus binding, SoC level (1)

```
#define MBUS_ID(target,attributes) (((target) << 24) | ((attributes) << 16))

/ {
    soc {
        compatible = "marvell,armada375-mbus", "marvell,armada370-mbus", "simple-bus";
        #address-cells = <2>;
        #size-cells = <1>;
        pcie-mem-aperture = <0xe0000000 0x8000000>;
        pcie-io-aperture = <0xe8000000 0x100000>;

        bootrom {
            compatible = "marvell,bootrom";
            reg = <MBUS_ID(0x01, 0x1d) 0 0x100000>;
        };

        devbus-bootcs {
            compatible = "marvell,mvebu-devbus";
            reg = <MBUS_ID(0xf0, 0x01) 0x10400 0x8>;
            ranges = <0 MBUS_ID(0x01, 0x2f) 0 0xffffffff>;
            ...
        };

        internal-reg {
            compatible = "simple-bus";
            #address-cells = <1>;
            #size-cells = <1>;
            ranges = <0 MBUS_ID(0xf0, 0x01) 0 0x100000>

            scu@c000 {
                compatible = "arm,cortex-a9-scu";
                reg = <0xc000 0x58>;
            };
        };
    };
}
```



# MBus binding, SoC level (2)

```
pcie-controller {
    compatible = "marvell,armada-370-pcie";
    device_type = "pci";
    #address-cells = <3>;
    #size-cells = <2>;
    msi-parent = <&mpic>;
    bus-range = <0x00 0xff>;

    ranges =
        <0x82000000 0 0x40000 MBUS_ID(0xf0, 0x01) 0x40000 0 0x00002000
        0x82000000 0 0x44000 MBUS_ID(0xf0, 0x01) 0x44000 0 0x00002000
        0x82000000 0x1 0      MBUS_ID(0x04, 0xe8) 0 1 0 /* Port 0 MEM */
        0x81000000 0x1 0      MBUS_ID(0x04, 0xe0) 0 1 0 /* Port 0 IO */
        0x82000000 0x2 0      MBUS_ID(0x04, 0xd8) 0 1 0 /* Port 1 MEM */
        0x81000000 0x2 0      MBUS_ID(0x04, 0xd0) 0 1 0 /* Port 1 IO */;

    pcie@1,0 {
        device_type = "pci";
        assigned-addresses = <0x82000800 0 0x40000 0 0x2000>;
        reg = <0x0800 0 0 0 0>;
        #address-cells = <3>;
        #size-cells = <2>;
        #interrupt-cells = <1>;
        ranges = <0x82000000 0 0 0x82000000 0x1 0 1 0
                  0x81000000 0 0 0x81000000 0x1 0 1 0>;
        interrupt-map-mask = <0 0 0 0>;
        interrupt-map = <0 0 0 0 &gic GIC_SPI 29 IRQ_TYPE_LEVEL_HIGH>;
        ...
    };
};

};
```



# MBus binding, board level

## Armada 375 DB

```
/ {
    soc {
        ranges = <MBUS_ID(0xf0, 0x01) 0 0xf1000000 0x100000
                  MBUS_ID(0x01, 0x1d) 0 0xffff00000 0x100000>;
    };
};
```

## Armada XP GP

```
/ {
    soc {
        ranges = <MBUS_ID(0xf0, 0x01) 0 0 0xf1000000 0x100000
                  MBUS_ID(0x01, 0x1d) 0 0 0xffff00000 0x100000
                  MBUS_ID(0x01, 0x2f) 0 0 0xf0000000 0x1000000>;
    };
};
```



# Programming practices

- ▶ Device Tree
  - ▶ Problem of stability: once accepted, a Device Tree binding cannot be changed.
  - ▶ Need to identify *hardware blocks*. For some core SoC features, lack of good separation between hardware blocks, difficult to create nodes in the Device Tree.
- ▶ Multiplatform
  - ▶ One single kernel image for all v6/v7 platforms
  - ▶ Everything must be runtime detected (from the Device Tree or by looking at the hardware)
  - ▶ **No more compile time conditionals!**




# Power Management

# Power Management

## Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

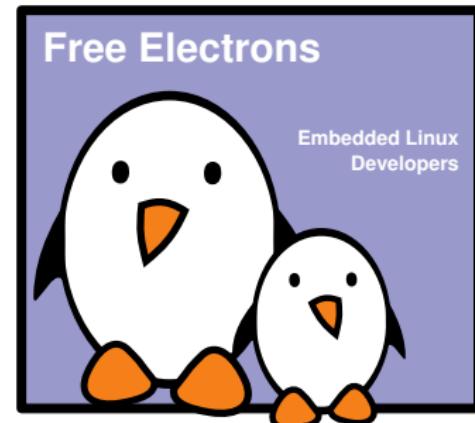



# PM Building Blocks

- ▶ Several power management *building blocks*
  - ▶ Suspend and resume
  - ▶ CPUidle
  - ▶ Runtime power management
  - ▶ Frequency and voltage scaling
  - ▶ Applications
- ▶ Independent *building blocks* that can be improved gradually during development



# Clock Framework (1)


- ▶ Generic framework to manage clocks used by devices in the system
- ▶ Allows to reference count clock users and to shutdown the unused clocks to save power
- ▶ Simple API described in  
Documentation/DocBook/kernel-api/clk.html .
  - ▶ `clk_get()` to get a reference to a clock
  - ▶ `clk_enable()` to start the clock
  - ▶ `clk_disable()` to stop the clock
  - ▶ `clk_put()` to free the clock source
  - ▶ `clk_get_rate()` to get the current rate



## Clock Framework (2)

- ▶ The common clock framework
  - ▶ Allows to declare the available clocks and their association to devices in the Device Tree (preferred) or statically in the source code (old method)
  - ▶ Provides a *debugfs* representation of the clock tree
  - ▶ Is implemented in `drivers/clk`

# Diagram overview of the common clock framework

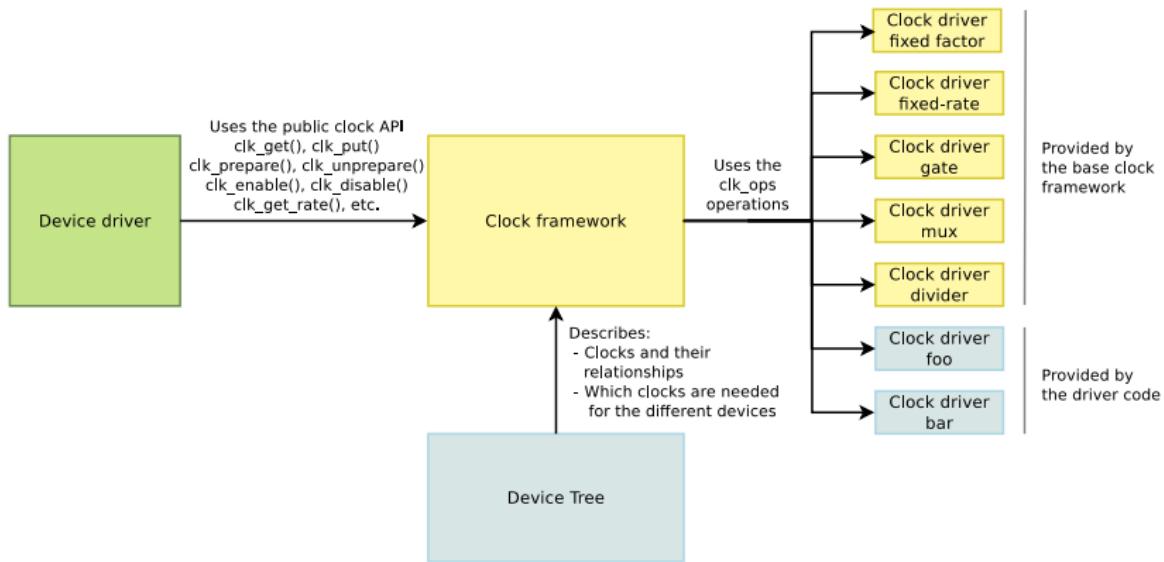



## Clock Framework (3)

The interface of the CCF divided into two halves:

- ▶ Common Clock Framework core
  - ▶ Common definition of `struct clk`
  - ▶ Common implementation of the `clk.h` API (defined in `drivers/clk/clk.c`)
  - ▶ `struct clk_ops`: operations invoked by the `clk` API implementation
  - ▶ Not supposed to be modified when adding a new driver
- ▶ Hardware-specific
  - ▶ Callbacks registered with `struct clk_ops` and the corresponding hardware-specific structures
  - ▶ Has to be written for each new hardware clock



## Clock Framework (4)

- ▶ Hardware clock operations: device tree
  - ▶ The **device tree** is the **mandatory way** to declare a clock and to get its resources, as for any other driver using DT we have to:
    - ▶ Parse the device tree to **setup** the clock: the resources but also the properties are retrieved.
    - ▶ Declare the **compatible** clocks and associate it with an **initialization** function using `CLK_OF_DECLARE`



# Suspend and Resume

- ▶ Infrastructure in the kernel to support suspend and resume
- ▶ Platform hooks
  - ▶ `prepare()`, `enter()`, `finish()`, `valid()` in a `struct platform_suspend_ops` structure
  - ▶ Registered using the `suspend_set_ops()` function
  - ▶ See `arch/arm/mach-at91/pm.c`
- ▶ Device drivers
  - ▶ `suspend()` and `resume()` hooks in the `*_driver` structures (`struct platform_driver`, `struct usb_driver`, etc.)
  - ▶ See `drivers/net/macb.c`



## Board-specific Power Management

- ▶ Typically takes care of battery and charging management.
- ▶ Also defines presuspend and postsuspend handlers.
- ▶ Example: arch/arm/mach-pxa/spitz\_pm.c



- ▶ Assembly code implementing CPU specific suspend and resume code.
- ▶ Note: only found on arm, just 3 other occurrences in other architectures, with other paths.
- ▶ First scenario: only a suspend function. The code goes in sleep state (after enabling DRAM self-refresh), and continues with resume code.
- ▶ Second scenario: suspend and resume functions. Resume functions called by the bootloader.
- ▶ Examples to look at:
  - ▶ arch/arm/mach-omap2/sleep24xx.S (1st case)
  - ▶ arch/arm/mach-pxa/sleep.S (2nd case)



# Triggering Suspend

- ▶ Whatever the power management implementation, CPU specific `struct suspend_ops` functions are called by the `enter_state()` function.
- ▶ `enter_state()` also takes care of executing the suspend and resume functions for your devices.
- ▶ The execution of this function can be triggered from user space. To suspend to RAM:
  - ▶ `echo mem > /sys/power/state`
- ▶ Can also use the `s2ram` program from <http://suspend.sourceforge.net/>
- ▶ Read `kernel/power/suspend.c`



# Runtime Power Management

- ▶ According to the kernel configuration interface: *Enable functionality allowing I/O devices to be put into energy-saving (low power) states at run time (or autosuspended) after a specified period of inactivity and woken up in response to a hardware-generated wake-up event or a driver's request.*
- ▶ New hooks must be added to the drivers:  
`runtime_suspend()`, `runtime_resume()`, `runtime_idle()`
- ▶ API and details on Documentation/power/runtime\_pm.txt
- ▶ See also Kevin Hilman's presentation at ELC Europe 2010:  
<http://elinux.org/images/c/cd/ELC-2010-khilman-Runtime-PM.odp>



# Saving Power in the Idle Loop

- ▶ The idle loop is what you run when there's nothing left to run in the system.
- ▶ Implemented in all architectures in  
`arch/<arch>/kernel/process.c`
- ▶ Example to read: look for `cpu_idle` in  
`arch/arm/kernel/process.c`
- ▶ Each ARM cpu defines its own `arch_idle` function.
- ▶ The CPU can run power saving HLT instructions, enter NAP mode, and even disable the timers (tickless systems).
- ▶ See also [http://en.wikipedia.org/wiki/Idle\\_loop](http://en.wikipedia.org/wiki/Idle_loop)



# Managing Idle

- ▶ Adding support for multiple idle levels
  - ▶ Modern CPUs have several sleep states offering different power savings with associated wake up latencies
  - ▶ Since 2.6.21, the dynamic tick feature allows to remove the periodic tick to save power, and to know when the next event is scheduled, for smarter sleeps.
  - ▶ CPUidle infrastructure to change sleep states
    - ▶ Platform-specific driver defining sleep states and transition operations
    - ▶ Platform-independent governors (ladder and menu)
    - ▶ Available for x86/ACPI, not supported yet by all ARM cpus.  
(look for `cpuidle*` files under `arch/arm/`)
    - ▶ See `Documentation/cpuidle/` in kernel sources.



- ▶ <https://01.org/powertop/>
  - ▶ With dynamic ticks, allows to fix parts of kernel code and applications that wake up the system too often.
  - ▶ PowerTOP allows to track the worst offenders
  - ▶ Now available on ARM cpus implementing CPUidle
  - ▶ Also gives you useful hints for reducing power.



# Frequency and Voltage Scaling (1)

- ▶ Frequency and voltage scaling possible through the `cpufreq` kernel infrastructure.
  - ▶ Generic infrastructure: `drivers/cpufreq/cpufreq.c` and `include/linux/cpufreq.h`
  - ▶ Generic governors, responsible for deciding frequency and voltage transitions
    - ▶ `performance`: maximum frequency
    - ▶ `powersave`: minimum frequency
    - ▶ `ondemand`: measures CPU consumption to adjust frequency
    - ▶ `conservative`: often better than `ondemand`. Only increases frequency gradually when the CPU gets loaded.
    - ▶ `userspace`: leaves the decision to a user space daemon.
  - ▶ This infrastructure can be controlled from  
`/sys/devices/system/cpu/cpu<n>/cpufreq/`



## Frequency and Voltage Scaling (2)

- ▶ CPU support code in architecture dependent files. Example to read: `arch/arm/plat-omap/cpu-omap.c`
- ▶ Must implement the operations of the `cpufreq_driver` structure and register them using `cpufreq_register_driver()`
  - ▶ `init()` for initialization
  - ▶ `exit()` for cleanup
  - ▶ `verify()` to verify the user-chosen policy
  - ▶ `setpolicy()` or `target()` to actually perform the frequency change
- ▶ See `Documentation/cpu-freq/` for useful explanations



# PM Quality Of Service interface

- ▶ Kernel and user mode interface for registering performance expectations by drivers, subsystems and user space applications.
- ▶ Two different PM QoS frameworks are available:
  - ▶ PM QoS classes for CPU DMA latency, network latency and network throughput.
  - ▶ The per-device PM QoS framework API to manage per-device latency.
- ▶ According to these requirements, PM QoS allows kernel drivers to adjust their power management
- ▶ See `Documentation/power/pm_qos_interface.txt`
- ▶ Still in very early deployment (only used in about 15 drivers in 3.12).



# Regulator Framework

- ▶ Modern embedded hardware have hardware responsible for voltage and current regulation
- ▶ The regulator framework allows to take advantage of this hardware to save power when parts of the system are unused
  - ▶ A consumer interface for device drivers (i.e users)
  - ▶ Regulator driver interface for regulator drivers
  - ▶ Machine interface for board configuration
  - ▶ sysfs interface for user space
- ▶ Merged in Linux 2.6.27.
- ▶ See Documentation/power/regulator/ in kernel sources.
- ▶ See Liam Girdwood's presentation at ELC 2008  
<http://free-electrons.com/blog/elc-2008-report#girdwood>



# BSP Work for a New Board

- ▶ In case you just need to create a BSP for your board, and your CPU already has full PM support, you should just need to:
  - ▶ Create clock definitions and bind your devices to them.
  - ▶ Implement PM handlers (suspend, resume) in the drivers for your board specific devices.
  - ▶ Implement runtime PM handlers in your drivers.
  - ▶ Implement board specific power management if needed (mainly battery management)
  - ▶ Implement regulator framework hooks for your board if needed.
  - ▶ All other parts of the PM infrastructure should be already there: suspend / resume, cpuidle, cpu frequency and voltage scaling.



# Useful Resources

- ▶ Documentation/power/ in the Linux kernel sources.
  - ▶ Will give you many useful details.
- ▶ <http://wiki.linaro.org/WorkingGroups/PowerManagement/>
  - ▶ Ongoing developments on the ARM platform.
- ▶ Tips and ideas for prolonging battery life
  - ▶ <http://j.mp/fVdxKh>




# The kernel development and contribution process

# The kernel development and contribution process

**Free Electrons**

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

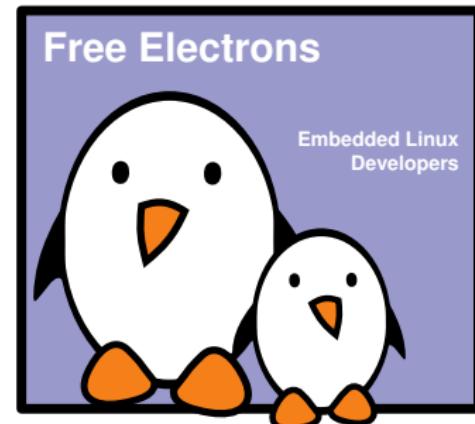



# The kernel development and contribution process

## Linux versioning scheme and development process




## Until 2.6 (1)

- ▶ One stable major branch every 2 or 3 years
  - ▶ Identified by an even middle number
  - ▶ Examples: 1.0.x, 2.0.x, 2.2.x, 2.4.x
- ▶ One development branch to integrate new functionalities and major changes
  - ▶ Identified by an odd middle number
  - ▶ Examples: 2.1.x, 2.3.x, 2.5.x
  - ▶ After some time, a development version becomes the new base version for the stable branch
- ▶ Minor releases once in while: 2.2.23, 2.5.12, etc.



## Until 2.6 (2)

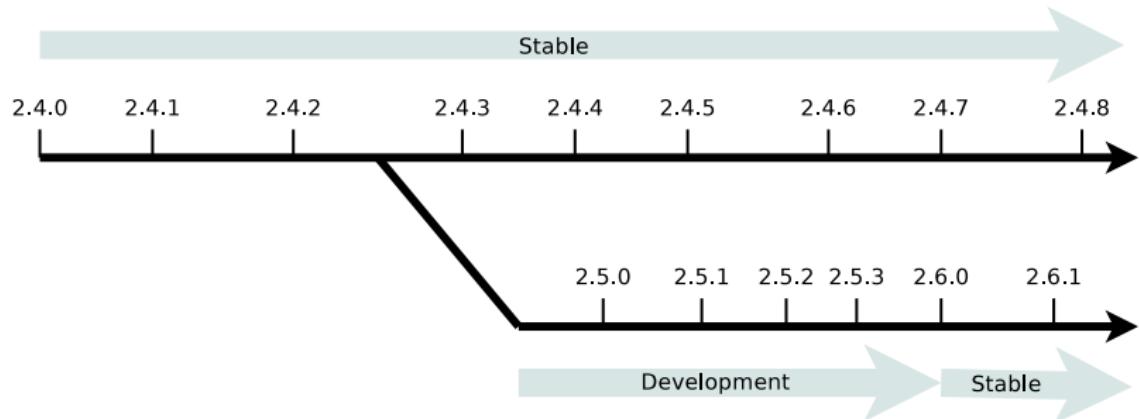



## Changes since Linux 2.6

- ▶ Since 2.6.0, kernel developers have been able to introduce lots of new features one by one on a steady pace, without having to make disruptive changes to existing subsystems.
- ▶ Since then, there has been no need to create a new development branch massively breaking compatibility with the stable branch.
- ▶ Thanks to this, **more features are released to users at a faster pace.**




## 3.x stable branch

- ▶ From 2003 to 2011, the official kernel versions were named 2.6.x.
- ▶ Linux 3.0 was released in July 2011
- ▶ This is only a change to the numbering scheme
  - ▶ Official kernel versions are now named 3.x (3.0, 3.1, 3.2, etc.)
  - ▶ Stabilized versions are named 3.x.y (3.0.2, 3.4.3, etc.)
  - ▶ It effectively only removes a digit compared to the previous numbering scheme



# New development model

## Using merge and bug fixing windows

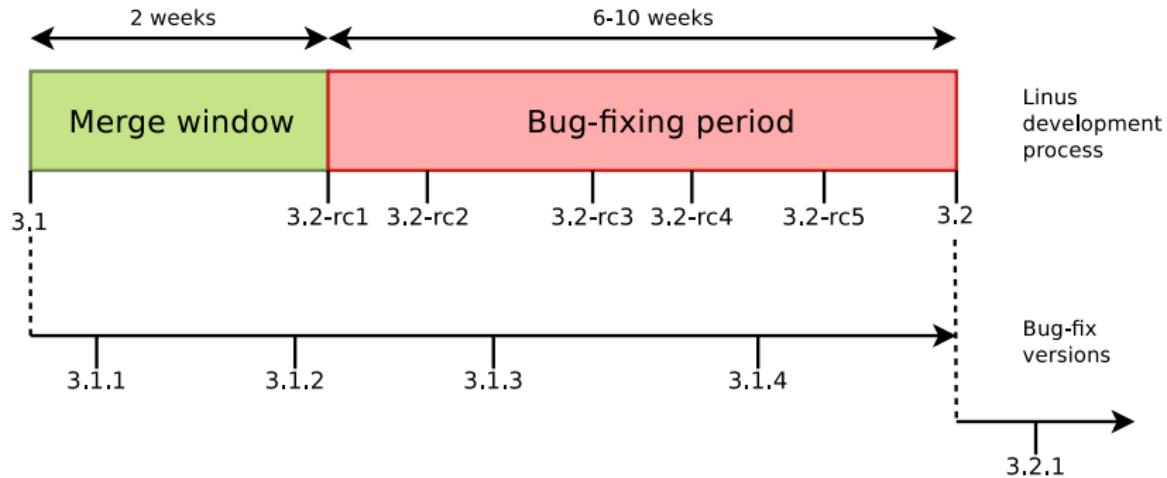



## New development model - Details

- ▶ After the release of a 3.x version (for example), a two-weeks merge window opens, during which major additions are merged.
- ▶ The merge window is closed by the release of test version 3.(x+1)-rc1
- ▶ The bug fixing period opens, for 6 to 10 weeks.
- ▶ At regular intervals during the bug fixing period, 3.(x+1)-rcY test versions are released.
- ▶ When considered sufficiently stable, kernel 3.(x+1) is released, and the process starts again.



# More stability for the kernel source tree

- ▶ Issue: bug and security fixes only released for most recent stable kernel versions.
- ▶ Some people need to have a recent kernel, but with long term support for security updates.
- ▶ You could get long term support from a commercial embedded Linux provider.
- ▶ You could reuse sources for the kernel used in Ubuntu Long Term Support releases (5 years of free security updates).
- ▶ The <http://kernel.org> front page shows which versions will be supported for some time (up to 2 or 3 years), and which ones won't be supported any more ("EOL: End Of Life")

|             |                        |            |
|-------------|------------------------|------------|
| mainline:   | <b>3.14-rc8</b>        | 2014-03-25 |
| stable:     | <b>3.13.7</b>          | 2014-03-24 |
| stable:     | <b>3.11.10 [EOL]</b>   | 2013-11-29 |
| longterm:   | <b>3.12.15</b>         | 2014-03-26 |
| longterm:   | <b>3.10.34</b>         | 2014-03-24 |
| longterm:   | <b>3.4.84</b>          | 2014-03-24 |
| longterm:   | <b>3.2.55</b>          | 2014-02-15 |
| longterm:   | <b>2.6.34.15 [EOL]</b> | 2014-02-10 |
| longterm:   | <b>2.6.32.61</b>       | 2013-06-10 |
| linux-next: | <b>next-20140327</b>   | 2014-03-27 |



# What's new in each Linux release?

- ▶ The official list of changes for each Linux release is just a huge list of individual patches!

```
commit aa6e52a35d388e730f4df0ec2ec48294590cc459
Author: Thomas Petazzoni <thomas.petazzoni@free-electrons.com>
Date:   Wed Jul 13 11:29:17 2011 +0200
```

at91: at91-ohci: support overcurrent notification

Several USB power switches (AIC1526 or MIC2026) have a digital output that is used to notify that an overcurrent situation is taking place. This digital outputs are typically connected to GPIO inputs of the processor and can be used to be notified of those overcurrent situations.

Therefore, we add a new `overcurrent_pin[]` array in the `at91_usbh_data` structure so that boards can tell the AT91 OHCI driver which pins are used for the overcurrent notification, and an `overcurrent_supported` boolean to tell the driver whether overcurrent is supported or not.

The code has been largely borrowed from `ohci-da8xx.c` and `ohci-s3c2410.c`.

```
Signed-off-by: Thomas Petazzoni <thomas.petazzoni@free-electrons.com>
Signed-off-by: Nicolas Ferre <nicolas.ferre@atmel.com>
```

- ▶ Very difficult to find out the key changes and to get the global picture out of individual changes.
- ▶ Fortunately, there are some useful resources available
  - ▶ <http://wiki.kernelnewbies.org/LinuxChanges>
  - ▶ <http://lwn.net>
  - ▶ <http://linuxfr.org>, for French readers



# The kernel development and contribution process

## Contributing to the Linux kernel



# Solving Issues

- ▶ If you face an issue, and it doesn't look specific to your work but rather to the tools you are using, it is very likely that someone else already faced it.
- ▶ Search the Internet for similar error reports.
- ▶ You have great chances of finding a solution or workaround, or at least an explanation for your issue.
- ▶ Otherwise, reporting the issue is up to you!



# Getting Help

- ▶ If you have a support contract, ask your vendor.
- ▶ Otherwise, don't hesitate to share your questions and issues
  - ▶ Either contact the Linux mailing list for your architecture (like linux-arm-kernel or linuxsh-dev...).
  - ▶ Or contact the mailing list for the subsystem you're dealing with (linux-usb-devel, linux-mtd...). Don't ask the maintainer directly!
  - ▶ Most mailing lists come with a FAQ page. Make sure you read it before contacting the mailing list.
  - ▶ Useful IRC resources are available too (for example on <http://kernelnewbies.org>).
  - ▶ Refrain from contacting the Linux Kernel mailing list, unless you're an experienced developer and need advice.



# Reporting Linux Bugs

- ▶ First make sure you're using the latest version
- ▶ Make sure you investigate the issue as much as you can: see Documentation/BUG-HUNTING
- ▶ Check for previous bugs reports. Use web search engines, accessing public mailing list archives.
- ▶ If the subsystem you report a bug on has a mailing list, use it. Otherwise, contact the official maintainer (see the MAINTAINERS file). Always give as many useful details as possible.



# How to Become a Kernel Developer?

- ▶ Recommended resources

- ▶ See Documentation/SubmittingPatches for guidelines and <http://kernelnewbies.org/UpstreamMerge> for very helpful advice to have your changes merged upstream (by Rik van Riel).
- ▶ Watch the *Write and Submit your first Linux kernel Patch* talk by Greg. K.H:  
<http://www.youtube.com/watch?v=LLBrBBImJt4>
- ▶ How to Participate in the Linux Community (by Jonathan Corbet) A Guide To The Kernel Development Process  
<http://j.mp/tX2Ld6>



# Contribute to the Linux Kernel (1)

- ▶ Clone Linus Torvalds' tree:
  - ▶ `git clone git://git.kernel.org/pub/scm/linux/kernel/git/torvalds/linux.git`
- ▶ Keep your tree up to date
  - ▶ `git pull`
- ▶ Look at the master branch and check whether your issue / change hasn't been solved / implemented yet. Also check the maintainer's git tree and mailing list (see the `MAINTAINERS` file). You may miss submissions that are not in mainline yet.
- ▶ If the maintainer has its own git tree, create a remote branch tracking this tree. This is much better than creating another clone (doesn't duplicate common stuff):
  - ▶ `git remote add linux-omap git://git.kernel.org/pub/scm/linux/kernel/git/tmlind/linux-omap.git`
  - ▶ `git fetch linux-omap`



## Contribute to the Linux Kernel (2)

- ▶ Either create a new branch starting from the current commit in the master branch:
  - ▶ `git checkout -b feature`
- ▶ Or, if more appropriate, create a new branch starting from the maintainer's master branch:
  - ▶ `git checkout -b feature linux-omap/master` (**remote tree / remote branch**)
- ▶ In your new branch, implement your changes.
- ▶ Test your changes (must at least compile them).
- ▶ Run `git add` to add any new files to the index.
- ▶ Check that each file you modified is ready for submission:
  - ▶ `scripts/checkpatch.pl --strict --file <file>`
- ▶ If needed, fix indenting rule violations:
  - ▶ `indent -linux <file>`



# Configure git send-email

- ▶ Make sure you already have configured your name and e-mail address (should be done before the first commit).
  - ▶ `git config --global user.name 'My Name'`
  - ▶ `git config --global user.email me@mydomain.net`
- ▶ Configure your SMTP settings. Example for a Google Mail account:
  - ▶ `git config --global sendemail.smtpserver smtp.googlemail.com`
  - ▶ `git config --global sendemail.smtpserverport 587`
  - ▶ `git config --global sendemail.smtpencryption tls`
  - ▶ `git config --global sendemail.smtpuser jdoe@gmail.com`
  - ▶ `git config --global sendemail.smtppass xxx`



## Contribute to the Linux Kernel (3)

- ▶ Group your changes by sets of logical changes, corresponding to the set of patches that you wish to submit.
- ▶ Commit and sign these groups of changes (signing required by Linux developers).
  - ▶ `git commit -s`
  - ▶ Make sure your first description line is a useful summary and starts with the name of the modified subsystem. This first description line will appear in your e-mails
- ▶ The easiest way is to look at previous commit summaries on the main file you modify
  - ▶ `git log --pretty=oneline <path-to-file>`
- ▶ Examples subject lines ([PATCH] omitted):
  - Documentation: prctl/seccomp\_filter
  - PCI: release busn when removing bus
  - ARM: add support for xz kernel decompression



## Contribute to the Linux Kernel (4)

- ▶ Remove previously generated patches
  - ▶ `rm 00*.patch`
- ▶ Have git generate patches corresponding to your branch
  - ▶ If your branch is based on mainline
    - ▶ `git format-patch master..<your branch>`
  - ▶ If your branch is based on a remote branch
    - ▶ `git format-patch <remote>/<branch>..<your branch>`
- ▶ You can run a last check on all your patches (easy)
  - ▶ `scripts/checkpatch.pl --strict 00*.patch`
- ▶ Now, send your patches to yourself
  - ▶ `git send-email --compose --`  
`to me@mydomain.com 00*.patch`
- ▶ If you have just one patch, or a trivial patch, you can remove the empty line after `In-Reply-To:`. This way, you won't add a summary e-mail introducing your changes (recommended otherwise).



## Contribute to the Linux Kernel (5)

- ▶ Check that you received your e-mail properly, and that it looks good.
- ▶ Now, find the maintainers for your patches

```
scripts/get_maintainer.pl ~/patches/00*.patch
Russell King <linux@arm.linux.org.uk> (maintainer:ARM PORT)
Nicolas Pitre <nicolas.pitre@linaro.org>
(commit_signer:1/1=100%)
linux-arm-kernel@lists.infradead.org (open list:ARM PORT)
linux-kernel@vger.kernel.org (open list)
```

- ▶ Now, send your patches to each of these people and lists
  - ▶ `git send-email --compose --to linux@arm.linux.org.uk --to nicolas.pitre@linaro.org --to linux-arm-kernel@lists.infradead.org --to linux-kernel@vger.kernel.org 00*.patch`
- ▶ Wait for replies about your changes, take the comments into account, and resubmit if needed, until your changes are eventually accepted.



## Contribute to the Linux Kernel (6)

- ▶ If you use `git format-patch` to produce your patches, you will need to update your branch and may need to group your changes in a different way (one patch per commit).
- ▶ Here's what we recommend
  - ▶ Update your master branch
    - ▶ `git checkout master; git pull`
  - ▶ Back to your branch, implement the changes taking community feedback into account. Commit these changes.
  - ▶ Still in your branch: reorganize your commits and commit messages
    - ▶ `git rebase --interactive origin/master`
    - ▶ `git rebase` allows to rebase (replay) your changes starting from the latest commits in master. In interactive mode, it also allows you to merge, edit and even reorder commits, in an interactive way.
  - ▶ Third, generate the new patches with `git format-patch`.




# Kernel Resources

# Kernel Resources

## Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

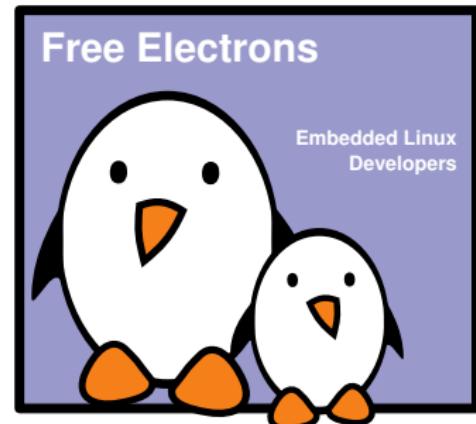



## Linux Weekly News


- ▶ <http://lwn.net/>
- ▶ The weekly digest off all Linux and free software information sources
- ▶ In depth technical discussions about the kernel
- ▶ Subscribe to finance the editors (\$7 / month)
- ▶ Articles available for non subscribers after 1 week.



# Useful Reading (1)

## Essential Linux Device Drivers, April 2008

- ▶ <http://elinuxdd.com/>
- ▶ By Sreekrishnan Venkateswaran, an embedded IBM engineer with more than 10 years of experience
- ▶ Covers a wide range of topics not covered by LDD: serial drivers, input drivers, I2C, PCMCIA and Compact Flash, PCI, USB, video drivers, audio drivers, block drivers, network drivers, Bluetooth, IrDA, MTD, drivers in user space, kernel debugging, etc.
- ▶ *Probably the most wide ranging and complete Linux device driver book I've read – Alan Cox*

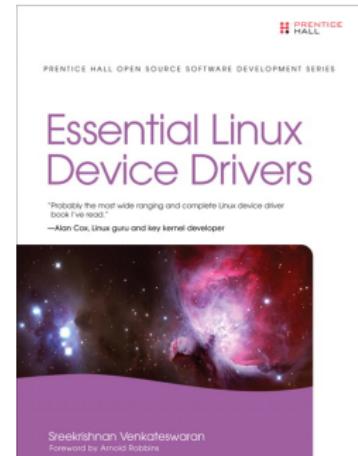




## Useful Reading (2)

### Writing Linux Device drivers, September 2009

- ▶ <http://www.coopj.com/>
- ▶ Self published by Jerry Cooperstein
- ▶ Available like any other book (Amazon and others)
- ▶ Though not as thorough as the previous book on specific drivers, still a good complement on multiple aspects of kernel and device driver development.
- ▶ Based on Linux 2.6.31
- ▶ Multiple exercises. Updated solutions for 2.6.36.

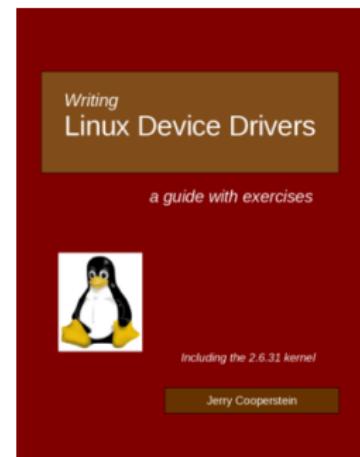




## Useful Reading (3)

Linux Device Drivers, 4th edition, February 2015 (estimated)


- ▶ <http://shop.oreilly.com/product/0636920030867.do>
- ▶ By Jonathan Corbet, Alessandro Rubini, Greg Kroah-Hartman, Jessica McKellar, O'Reilly
- ▶ Expected to be a great book, if as good as the previous edition (Free PDF: <http://free-electrons.com/community/kernel/ldd3/>), which is now out of date.

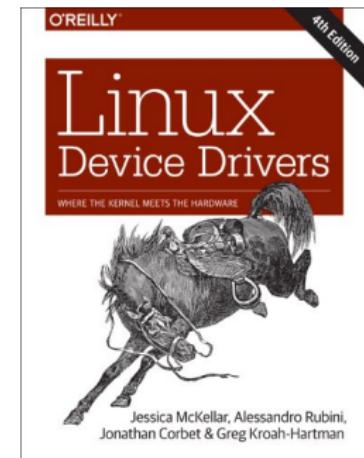



# Useful Reading (4)

- ▶ Linux Kernel Development, 3rd Edition, Jun 2010
  - ▶ Robert Love, Novell Press
  - ▶ <http://free-electrons.com/redir/lkd3-book.html>
  - ▶ A very synthetic and pleasant way to learn about kernel subsystems (beyond the needs of device driver writers)
- ▶ The Linux Programming Interface, Oct 2010
  - ▶ Michael Kerrisk, No Starch Press
  - ▶ <http://man7.org/tlpi/>
  - ▶ A gold mine about the kernel interface and how to use it

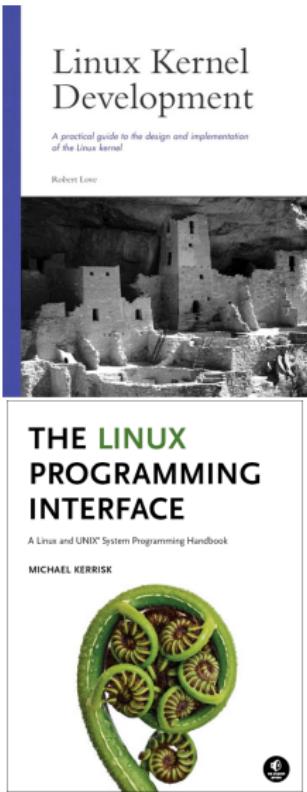



# Useful Online Resources

- ▶ Kernel documentation ([Documentation/](#) in kernel sources)
  - ▶ Available on line:  
<http://free-electrons.com/kerneldoc/> (with HTML documentation extracted from source code)
- ▶ Linux kernel mailing list FAQ
  - ▶ <http://www.tux.org/lkml/>
  - ▶ Complete Linux kernel FAQ
  - ▶ Read this before asking a question to the mailing list
- ▶ Kernel Newbies
  - ▶ <http://kernelnewbies.org/>
  - ▶ Glossary, articles, presentations, HOWTOs, recommended reading, useful tools for people getting familiar with Linux kernel or driver development.
- ▶ Kernel glossary
  - ▶ <http://kernelnewbies.org/KernelGlossary>



# International Conferences

- ▶ Embedded Linux Conference:  
<http://embeddedlinuxconference.com/>
  - ▶ Organized by the CE Linux Forum:
  - ▶ in California (San Francisco, April)
  - ▶ in Europe (October-November)
  - ▶ Very interesting kernel and user space topics for embedded systems developers.
  - ▶ Presentation slides freely available
- ▶ Linux Plumbers: <http://linuxplumbersconf.org>
  - ▶ Conference on the low-level plumbing of Linux: kernel, audio, power management, device management, multimedia, etc.
- ▶ linux.conf.au: <http://linux.org.au/conf/>
  - ▶ In Australia / New Zealand
  - ▶ Features a few presentations by key kernel hackers.
- ▶ Don't miss our free conference videos on <http://free-electrons.com/community/videos/conferences/>



# ARM resources

- ▶ ARM Linux project: <http://www.arm.linux.org.uk/>
  - ▶ Developer documentation:  
<http://www.arm.linux.org.uk/developer/>
  - ▶ linux-arm-kernel mailing list:  
<http://lists.infradead.org/mailman/listinfo/linux-arm-kernel>
  - ▶ FAQ:  
<http://www.arm.linux.org.uk/armlinux/mlfaq.php>
- ▶ Linaro: <http://linaro.org>
  - ▶ Many optimizations and resources for recent ARM CPUs (toolchains, kernels, debugging utilities...).
- ▶ ARM Limited: <http://www.linux-arm.com/>
  - ▶ Wiki with links to useful developer resources
- ▶ See our Embedded Linux course for details about toolchains:  
<http://free-electrons.com/training/embedded-linux/>




# Last slides

# Last slides

## Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

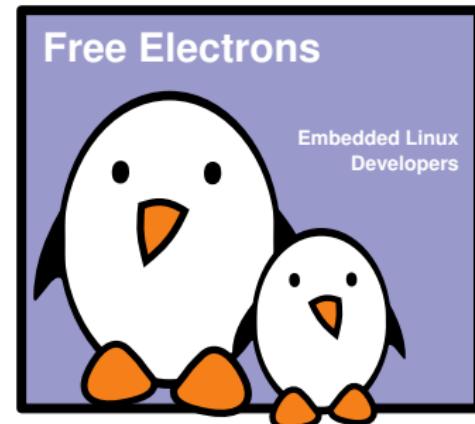



## Practical lab - Archive your lab directory



- ▶ Clean up files that are easy to retrieve, remove downloads.
- ▶ Generate an archive of your lab directory.



# Evaluation form

Please take a few minutes to rate this training session, by answering our on-line survey:

<http://free-electrons.com/doc/training/linux-kernel/survey.html>



Thank you!

And may the Source be with you




# Backup slides

# Backup slides

## Free Electrons

© Copyright 2004-2014, Free Electrons.  
Creative Commons BY-SA 3.0 license.  
Corrections, suggestions, contributions and translations are welcome!

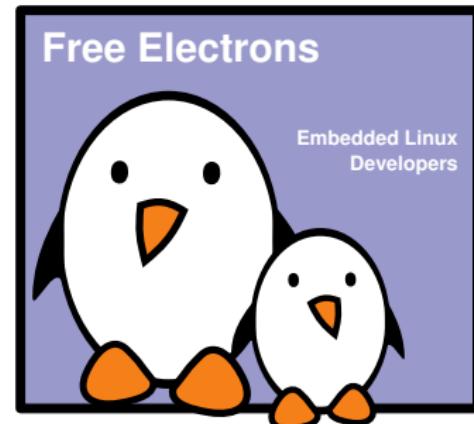




# Backup slides

# DMA



# DMA Integration

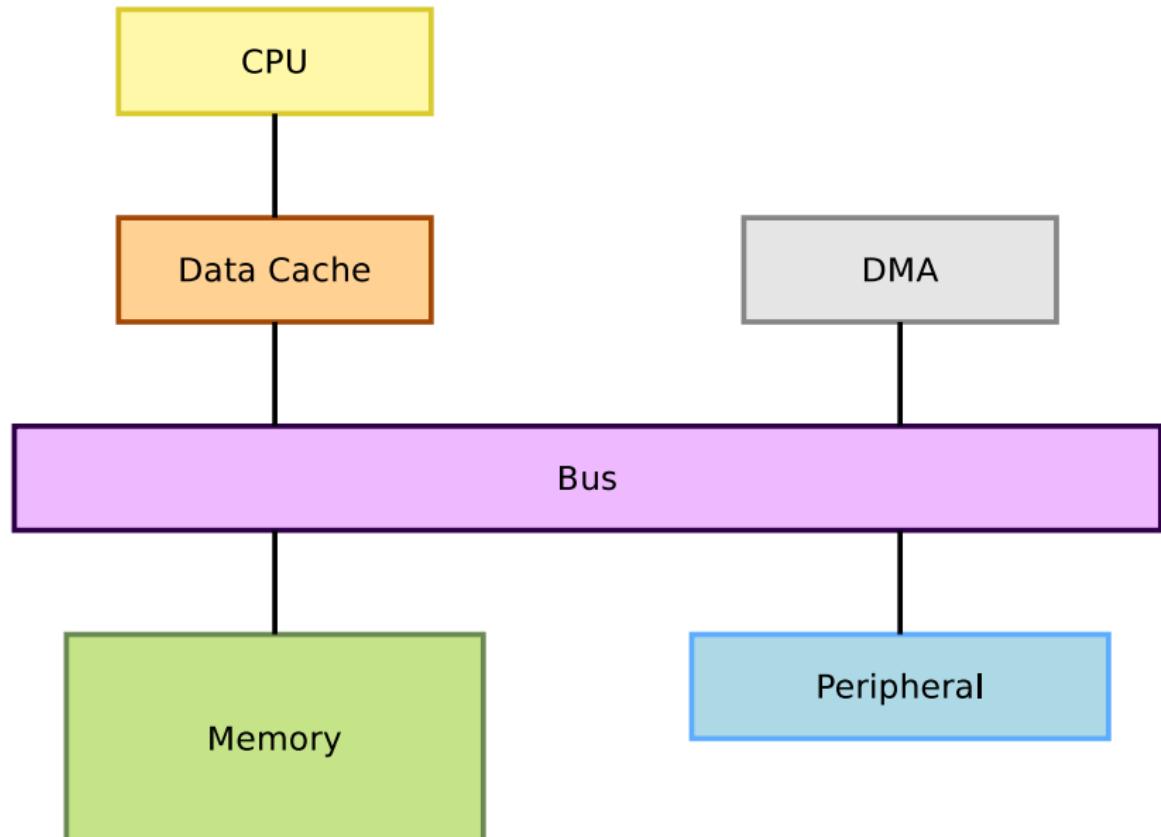



# Constraints with a DMA

- ▶ A DMA deals with physical addresses, so:
  - ▶ Programming a DMA requires retrieving a physical address at some point (virtual addresses are usually used)
  - ▶ The memory accessed by the DMA shall be physically contiguous
- ▶ The CPU can access memory through a data cache
  - ▶ Using the cache can be more efficient (faster accesses to the cache than the bus)
  - ▶ But the DMA does not access to the CPU cache, so one need to take care of cache coherency (cache content vs memory content)
  - ▶ Either flush or invalidate the cache lines corresponding to the buffer accessed by DMA and processor at strategic times



# DMA Memory Constraints

- ▶ Need to use contiguous memory in physical space.
- ▶ Can use any memory allocated by `kmalloc()` (up to 128 KB) or `__get_free_pages()` (up to 8MB).
- ▶ Can use block I/O and networking buffers, designed to support DMA.
- ▶ Can not use `vmalloc()` memory (would have to setup DMA on each individual physical page).



# Memory Synchronization Issues

- ▶ Memory caching could interfere with DMA
  - ▶ Before DMA to device
    - ▶ Need to make sure that all writes to DMA buffer are committed.
  - ▶ After DMA from device
    - ▶ Before drivers read from DMA buffer, need to make sure that memory caches are flushed.
  - ▶ Bidirectional DMA
    - ▶ Need to flush caches before and after the DMA transfer.



# Linux DMA API

- ▶ The kernel DMA utilities can take care of:
  - ▶ Either allocating a buffer in a cache coherent area,
  - ▶ Or making sure caches are flushed when required,
  - ▶ Managing the DMA mappings and IOMMU (if any).
  - ▶ See `Documentation/DMA-API.txt` for details about the Linux DMA generic API.
  - ▶ Most subsystems (such as PCI or USB) supply their own DMA API, derived from the generic one. May be sufficient for most needs.



# Coherent or Streaming DMA Mappings

- ▶ Coherent mappings
  - ▶ The kernel allocates a suitable buffer and sets the mapping for the driver.
  - ▶ Can simultaneously be accessed by the CPU and device.
  - ▶ So, has to be in a cache coherent memory area.
  - ▶ Usually allocated for the whole time the module is loaded.
  - ▶ Can be expensive to setup and use on some platforms.
- ▶ Streaming mappings
  - ▶ The kernel just sets the mapping for a buffer provided by the driver.
  - ▶ Use a buffer already allocated by the driver.
  - ▶ Mapping set up for each transfer. Keeps DMA registers free on the hardware.
  - ▶ The recommended solution.



# Allocating Coherent Mappings

- ▶ The kernel takes care of both buffer allocation and mapping

```
#include <asm/dma-mapping.h>

void *dma_alloc_coherent( /* Output: buffer address */
    struct device *dev, /* device structure */
    size_t size,        /* Needed buffer size in bytes */
    dma_addr_t *handle, /* Output: DMA bus address */
    gfp_t gfp           /* Standard GFP flags */
);

void dma_free_coherent(struct device *dev,
    size_t size, void *cpu_addr, dma_addr_t handle);
```



# Setting up streaming mappings

- ▶ Works on buffers already allocated by the driver

```
#include <linux/dmapool.h>

dma_addr_t dma_map_single(
    struct device *,           /* device structure */
    void *,                   /* input: buffer to use */
    size_t,                  /* buffer size */
    enum dma_data_direction /* Either DMA_BIDIRECTIONAL,
                           * DMA_TO_DEVICE or
                           * DMA_FROM_DEVICE */
);
void dma_unmap_single(struct device *dev, dma_addr_t handle,
                      size_t size, enum dma_data_direction dir);
```



# DMA Streaming Mapping Notes

- ▶ When the mapping is active: only the device should access the buffer (potential cache issues otherwise).
- ▶ The CPU can access the buffer only after unmapping!
- ▶ Another reason: if required, this API can create an intermediate bounce buffer (used if the given buffer is not usable for DMA).
- ▶ The Linux API also supports scatter / gather DMA streaming mappings.



# Backup slides

mmap



## mmap

- ▶ Possibility to have parts of the virtual address space of a program mapped to the contents of a file
- ▶ Particularly useful when the file is a device file
- ▶ Allows to access device I/O memory and ports without having to go through (expensive) read, write or ioctl calls
- ▶ One can access to current mapped files by two means:
  - ▶ `/proc/<pid>/maps`
  - ▶ `pmap <pid>`




# /proc/<pid>/maps

```
start-end          perm offset major:minor inode mapped file name
...
7f4516d04000-7f4516d06000 rw-s 1152a2000 00:05 8406 /dev/dri/card0
7f4516d07000-7f4516d0b000 rw-s 120f9e000 00:05 8406 /dev/dri/card0
...
7f4518728000-7f451874f000 r-xp 00000000 08:01 268909 /lib/x86_64-linux-gnu/libexpat.so.1.5.2
7f451874f000-7f451894f000 ---p 00027000 08:01 268909 /lib/x86_64-linux-gnu/libexpat.so.1.5.2
7f451894f000-7f4518951000 r--p 00027000 08:01 268909 /lib/x86_64-linux-gnu/libexpat.so.1.5.2
7f4518951000-7f4518952000 rw-p 00029000 08:01 268909 /lib/x86_64-linux-gnu/libexpat.so.1.5.2
...
7f451da4f000-7f451dc3f000 r-xp 00000000 08:01 1549 /usr/bin/Xorg
7f451de3e000-7f451de41000 r--p 001ef000 08:01 1549 /usr/bin/Xorg
7f451de41000-7f451de4c000 rw-p 001f2000 08:01 1549 /usr/bin/Xorg
...
```



# mmap Overview

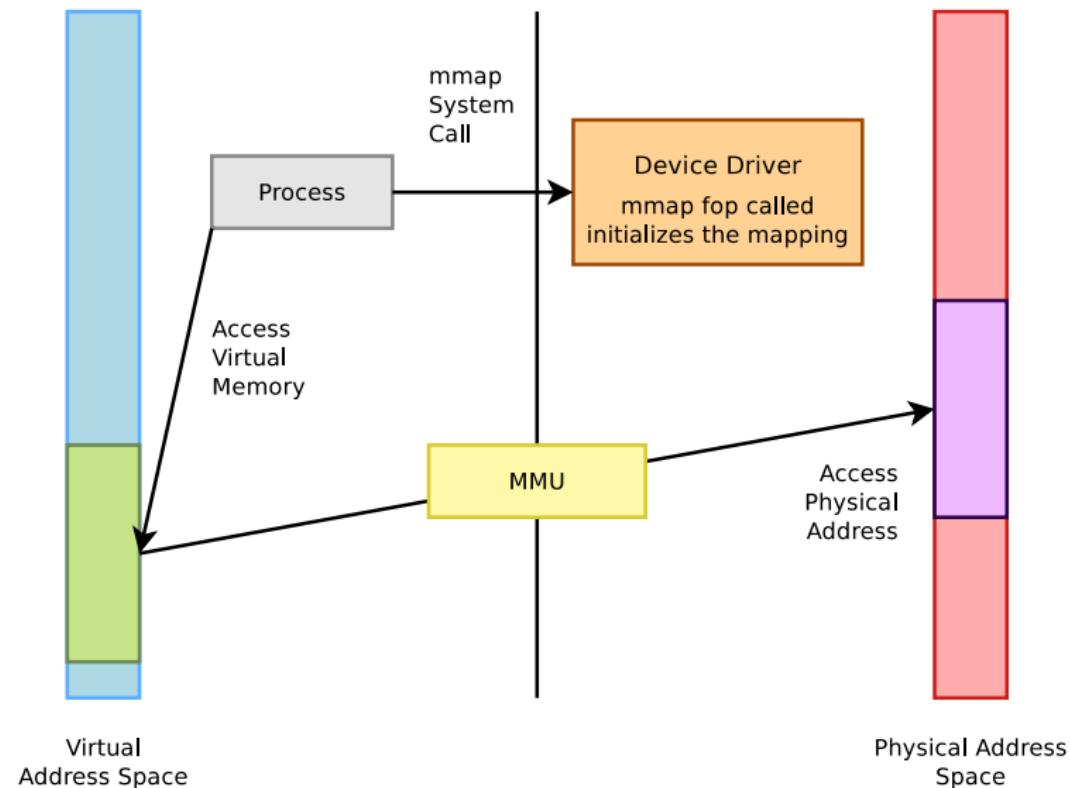



# How to Implement mmap - User Space

- ▶ Open the device file
- ▶ Call the `mmap` system call (see `man mmap` for details):

```
void * mmap(  
    void *start,      /* Often 0, preferred starting address */  
    size_t length,   /* Length of the mapped area */  
    int prot,        /* Permissions: read, write, execute */  
    int flags,       /* Options: shared mapping, private copy... */  
    int fd,          /* Open file descriptor */  
    off_t offset     /* Offset in the file */  
);
```

- ▶ You get a virtual address you can write to or read from.



# How to Implement mmap - Kernel Space

- ▶ Character driver: implement an `mmap` file operation and add it to the driver file operations:

```
int (*mmap) (
    struct file *,          /* Open file structure */
    struct vm_area_struct * /* Kernel VMA structure */
);
```

- ▶ Initialize the mapping.
  - ▶ Can be done in most cases with the `remap_pfn_range()` function, which takes care of most of the job.



## remap\_pfn\_range()

- ▶ *pfn*: page frame number
- ▶ The most significant bits of the page address (without the bits corresponding to the page size).

```
#include <linux/mm.h>

int remap_pfn_range(
    struct vm_area_struct *, /* VMA struct */
    unsigned long virt_addr, /* Starting user
                                * virtual address */
    unsigned long pfn,        /* pfn of the starting
                                * physical address */
    unsigned long size,       /* Mapping size */
    pgprot_t prot            /* Page permissions */
);
```



# Simple mmap Implementation

```
static int acme_mmap
    (struct file * file, struct vm_area_struct *vma)
{
    size = vma->vm_end - vma->vm_start;

    if (size > ACME_SIZE)
        return -EINVAL;

    if (remap_pfn_range(vma,
                        vma->vm_start,
                        ACME_PHYS >> PAGE_SHIFT,
                        size,
                        vma->vm_page_prot))
        return -EAGAIN;

    return 0;
}
```



## devmem2

- ▶ <http://free-electrons.com/pub/mirror/devmem2.c>, by Jan-Derk Bakker
- ▶ Very useful tool to directly peek (read) or poke (write) I/O addresses mapped in physical address space from a shell command line!
  - ▶ Very useful for early interaction experiments with a device, without having to code and compile a driver.
  - ▶ Uses `mmap` to `/dev/mem`.
  - ▶ Examples (`b`: byte, `h`: half, `w`: word)
    - ▶ `devmem2 0x000c0004 h` (reading)
    - ▶ `devmem2 0x000c0008 w 0xffffffff` (writing)
  - ▶ `devmem` is now available in BusyBox, making it even easier to use.



## mmap Summary

- ▶ The device driver is loaded. It defines an `mmap` file operation.
- ▶ A user space process calls the `mmap` system call.
- ▶ The `mmap` file operation is called.
- ▶ It initializes the mapping using the device physical address.
- ▶ The process gets a starting address to read from and write to (depending on permissions).
- ▶ The MMU automatically takes care of converting the process virtual addresses into physical ones.
- ▶ Direct access to the hardware without any expensive `read` or `write` system calls



## Introduction to Git



# What is Git?

- ▶ A version control system, like CVS, SVN, Perforce or ClearCase
- ▶ Originally developed for the Linux kernel development, now used by a large number of projects, including U-Boot, GNOME, Buildroot, uClibc and many more
- ▶ Contrary to CVS or SVN, Git is a distributed version control system
  - ▶ No central repository
  - ▶ Everybody has a local repository
  - ▶ Local branches are possible, and very important
  - ▶ Easy exchange of code between developers
  - ▶ Well-suited to the collaborative development model used in open-source projects



# Install and Setup

- ▶ Git is available as a package in your distribution
  - ▶ `sudo apt-get install git`
- ▶ Everything is available through the git command
  - ▶ git has many commands, called using `git <command>`, where `<command>` can be `clone`, `checkout`, `branch`, etc.
  - ▶ Help can be found for a given command using  
`git help <command>`
- ▶ Setup your name and e-mail address
  - ▶ They will be referenced in each of your commits
  - ▶ `git config --global user.name 'My Name'`
  - ▶ `git config --global user.email me@mydomain.net`



# Clone a Repository

- ▶ To start working on a project, you use Git's clone operation.
- ▶ With CVS or SVN, you would have used the checkout operation, to get a working copy of the project (latest version)
- ▶ With Git, you get a full copy of the repository, including the history, which allows to perform most of the operations offline.
- ▶ Cloning Linus Torvalds' Linux kernel repository  

```
git clone git://git.kernel.org/pub/scm/linux/  
kernel/git/torvalds/linux.git
```
- ▶ `git://` is a special Git protocol. Most repositories can also be accessed using `http://`, but this is slower.
- ▶ After cloning, in `linux/`, you have the repository and a working copy of the master branch.



# Explore the History

- ▶ `git log` will list all the commits. The latest commit is the first.

```
commit 4371ee353c3fc41aad9458b8e8e627eb508bc9a3
```

```
Author: Florian Fainelli <florian@openwrt.org>
```

```
Date: Mon Jun 1 02:43:17 2009 -0700
```

```
MAINTAINERS: take maintainership of the cpmac Ethernet driver
```

This patch adds me as the maintainer of the CPMAC (AR7) Ethernet driver.

```
Signed-off-by: Florian Fainelli <florian@openwrt.org>
```

```
Signed-off-by: David S. Miller <davem@davemloft.net>
```

- ▶ `git log -p` will list the commits with the corresponding diff
- ▶ The history in Git is not linear like in CVS or SVN, but it is a graph of commits
  - ▶ Makes it a little bit more complicated to understand at the beginning
  - ▶ But this is what allows the powerful features of Git (distributed, branching, merging)



# Visualize the History: gitk

- ▶ `gitk` is a graphical tool that represents the history of the current Git repository
- ▶ Can be installed from the `gitk` package

The screenshot shows the gitk graphical interface displaying a commit history for the Linux kernel. The main window shows a timeline of commits with a blue line indicating the current commit being viewed. The commit list includes:

- Merge git://git.kernel.org/pub/scm/linux/kernel/git/davem/net-2.6
- MAINTAINERS: take maintenance of the cpmac Ethernet driver
- Merge branch 'fixes' of git://git.kernel.org/pub/scm/linux/kernel/git/djbw/asy
- fskma: update mailing list address in MAINTAINERS
- Merge master kernel.org/home/mk/linux-2.6-arm
- MAINTAINER: Add F: entries for Gemini and FA526
- MAINTAINERS: change email address for Thomas Dahlmann
- MAINTAINERS: pair EDAC-E752X P; and M: entries
- MAINTAINERS: drop (subscribers-only) markings on Blackfin lists
- MAINTAINERS: update Blackfin items
- Merge git://git.kernel.org/pub/scm/linux/kernel/git/jeb/scsi-rc-fixes-2.6 [SCSI] Inc: Add new Cisco PCI-Express FCoE HBA
- hugh: update email address
- Merge branch 'merge' of git://git.kernel.org/pub/scm/linux/kernel/git/benh/pow

The commit details for the last entry show:

SHA1 ID: 4371ee353c3fc41aad9458b8e8e27eb508bc9a3

Author: Florian Fainelli <florian@openwrt.org> 2009-06-01 11:43:17  
Committer: David S. Miller <davem@davemloft.net> 2009-06-01 11:43:17  
Parent: 32b066d8d1edc9b04dea9eba299db7ad781d6b (Merge branch 'merge' of git://git.kernel.org/pub/scm/linux/kernel/git/benh/pow)  
Child: 6e429101849416551150dad451f7e8625317ae09 (Merge git://git.kernel.org/pub/scm/linux/kernel/git/davem/net-2.6)

Branches: master, remotes/origin/master  
Follows: v2.6.30-rc6  
Precedes: v2.6.30-rc8

MAINTAINERS: take maintenance of the cpmac Ethernet driver  
This patch adds me as the maintainer of the CPMAC (AR7) Ethernet driver.

Signed-off-by: Florian Fainelli <florian@openwrt.org>  
Signed-off-by: David S. Miller <davem@davemloft.net>



# Visualize the History: cgit

- ▶ Another great tool is cgit, a web interface to Git. For the kernel, it is available at <http://git.kernel.org/>

The screenshot shows a web browser displaying the cgit interface for the Linux kernel source tree. The URL is https://git.kernel.org/cgit/linux/kernel/git/torvalds/linux.git/commit/?id=776f265e27974e3f327cc3e7eb378046311373. The page title is "index : kernel/git/torvalds/linux.git". On the left, there's a logo of two penguins and the text "Linux kernel source tree". On the right, there are buttons for "master" and "switch" and the name "Linus Torvalds". Below the title, there are links for "summary", "refs", "log", "tree", "commit" (which is selected), "diff", and "stats". A search bar and a "search" button are also present. The main content area shows a commit message:  
**mtd: nand: pxa3xx: Add bad block handling**  
Add support for flash-based bad block table using Marvell's custom in-flash bad block table layout. The support is enabled a 'flash\_bbt' platform data or device tree parameter.  
Signed-off-by: Ezequiel Garcia <ezequiel.garcia@free-electrons.com>  
Tested-by: Daniel Mack <zonque@gmail.com>  
Signed-off-by: Brian Norris <computersforpeace@gmail.com>  
**diffstat**  
rw-r--r-- Documentation/devicetree/bindings/mtd/pxa3xx-nand.txt 2  
rw-r--r-- drivers/mtd/nand/pxa3xx\_nand.c 37  
rw-r--r-- include/linux/platform\_data/mtd-nand-pxa3xx.h 3  
3 files changed, 42 insertions, 0 deletions  
**diff**  
diff --git a/Documentation/devicetree/bindings/mtd/pxa3xx-nand.txt b/Documentation/devicetree/bindings/mtd/pxa3xx-nand.txt  
index bed5390..86e0a56 100644  
+++ a/Documentation/devicetree/bindings/mtd/pxa3xx-nand.txt  
+++ b/Documentation/devicetree/bindings/mtd/pxa3xx-nand.txt  
@@ -15,6 +15,8 @@ Optional properties:  
- marvell,nand-keep-config: Set to keep the NAND controller config as set  
 by the bootloader  
- num-cs: Number of chipselect lines to use  
+ - nand-on-flash-bbt: boolean to enable on flash bbt option if  
+ not present false

A "diff options" sidebar on the right allows setting context (3), space (include), and mode (unified).



# Update your Repository

- ▶ The repository that has been cloned at the beginning will change over time
- ▶ Updating your local repository to reflect the changes of the remote repository will be necessary from time to time
- ▶ `git pull`
- ▶ Internally, does two things
  - ▶ Fetch the new changes from the remote repository (`git fetch`)
  - ▶ Merge them in the current branch (`git merge`)



# Tags

- ▶ The list of existing tags can be found using
  - ▶ `git tag -l`
- ▶ To check out a working copy of the repository at a given tag
  - ▶ `git checkout <tagname>`
- ▶ To get the list of changes between a given tag and the latest available version
  - ▶ `git log v2.6.30..master`
- ▶ List of changes with diff on a given file between two tags
  - ▶ `git log -p v2.6.29..v2.6.30 MAINTAINERS`
- ▶ With gitk
  - ▶ `gitk v2.6.30..master`



# Branches

- ▶ To start working on something, the best is to make a branch
  - ▶ It is local-only, nobody except you sees the branch
  - ▶ It is fast
  - ▶ It allows to split your work on different topics, try something and throw it away
  - ▶ It is cheap, so even if you think you're doing something small and quick, do a branch
- ▶ Unlike other version control systems, Git encourages the use of branches. Don't hesitate to use them.



# Branches

- ▶ Create a branch
  - ▶ `git branch <branchname>`
- ▶ Move to this branch
  - ▶ `git checkout <branchname>`
- ▶ Both at once (create and switch to branch)
  - ▶ `git checkout -b <branchname>`
- ▶ List of local branches
  - ▶ `git branch`
- ▶ List of all branches, including remote branches
  - ▶ `git branch -a`



# Making Changes

- ▶ Edit a file with your favorite text editor
- ▶ Get the status of your working copy
  - ▶ `git status`
- ▶ Git has a feature called the index, which allows you to stage your commits before committing them. It allows to commit only part of your modifications, by file or even by chunk.
- ▶ On each modified file
  - ▶ `git add <filename>`
- ▶ Then commit. No need to be on-line or connected to commit
  - ▶ Linux requires the `-s` option to sign your changes
  - ▶ `git commit -s`
- ▶ If all modified files should be part of the commit
  - ▶ `git commit -as`



## Sharing Changes: E-mail

- ▶ The simplest way of sharing a few changes is to send patches by e-mail
- ▶ The first step is to generate the patches
  - ▶ `git format-patch -n master..<yourbranch>`
  - ▶ Will generate one patch for each of the commits done on `<yourbranch>`
  - ▶ The patch files will be `0001-....`, `0002-....`, etc.
- ▶ The second step is to send these patches by e-mail
  - ▶ `git send-email --compose --`  
`to email@domain.com 00*.patch`
  - ▶ Required Ubuntu package: `git-email`
  - ▶ In a later slide, we will see how to use `git config` to set the SMTP server, port, user and password.



# Sharing Changes: Your Own Repository

- ▶ If you do a lot of changes and want to ease collaboration with others, the best is to have your own public repository
- ▶ Use a git hosting service on the Internet:
  - ▶ Gitorious (<https://gitorious.org/>)
    - ▶ Open Source server. Easiest. For public repositories.
  - ▶ GitHub (<https://github.com/>)
    - ▶ For public repositories. Have to pay for private repositories.
- ▶ Publish on your own web server
  - ▶ Easy to implement.
  - ▶ Just needs git software on the server and ssh access.
  - ▶ Drawback: only supports http cloning (less efficient)
- ▶ Set up your own git server
  - ▶ Most flexible solution.
  - ▶ Today's best solutions are `gitolite` (<https://github.com/sitaramc/gitolite>) for the server and `cgit` for the web interface (<http://git.zx2c4.com/cgit/about/>).



# Sharing changes: HTTP Hosting

- ▶ Create a bare version of your repository
  - ▶ `cd /tmp`
  - ▶ `git clone --bare ~/project project.git`
  - ▶ `touch project.git/git-daemon-export-ok`
- ▶ Transfer the contents of `project.git` to a publicly-visible place (reachable read-only by HTTP for everybody, and read-write by you through SSH)
- ▶ Tell people to clone  
`http://yourhost.com/path/to/project.git`
- ▶ Push your changes using
  - ▶ `git push ssh://yourhost.com/path/to/project.git`  
`srcbranch:destbranch`



# Tracking Remote Trees

- ▶ In addition to the official Linus Torvalds tree, you might want to use other development or experimental trees
  - ▶ The OMAP tree at `git://git.kernel.org/pub/scm/linux/kernel/git/tmlind/linux-omap.git`
  - ▶ The stable realtime tree at `git://git.kernel.org/pub/scm/linux/kernel/git/rt/linux-stable-rt.git`
- ▶ The `git remote` command allows to manage remote trees
  - ▶ `git remote add rt git://git.kernel.org/pub/scm/linux/kernel/git/rt/linux-stable-rt.git`
- ▶ Get the contents of the tree
  - ▶ `git fetch rt`
- ▶ Switch to one of the branches
  - ▶ `git checkout rt/master`



# About Git

- ▶ We have just seen the very basic features of Git.
- ▶ A lot more interesting features are available (rebasing, bisection, merging and more)
- ▶ References
  - ▶ Git Manual
    - ▶ <http://schacon.github.com/git/user-manual.html>
  - ▶ Git Book
    - ▶ <http://git-scm.com/book>
  - ▶ Git official website
    - ▶ <http://git-scm.com/>
- ▶ Video: James Bottomley's tutorial on using Git
  - ▶ <http://free-electrons.com/pub/video/2008/ols/ols2008-james-bottomley-git.ogg>



## Practical lab - Going further: git



- ▶ Get familiar with git by contributing to a real project: the Linux kernel
- ▶ Send your patches to the maintainers and mailing lists.