



# TROUBLESHOOTING: Reflashing Edison (PC)

1

This document is intended to help solve **problems with hooking-up** and getting your Handibot/FabMo running.

It is an extreme solution involving totally reflashing the Edison Single Board Computer on your tool.

2

## Re-Flash the onboard Intel-Edison SBC with full OS and Software Image

- This procedure re-installs **all software** on FabMo's Single Board Computer, including OS and FabMo. It is a **last-resort option** for FabMo units that are locked, bricked, or in-accessible. All configuration and history data will be lost and settings restored to default values. You will need a Windows PC, standard USB A (male) to micro-USB B (male) cable. This is the type cable typically used for phone charging.
- You will need to download a very large file (+200M) for the install before you start. Note though, that the re-flashing does not require the FabMo unit to have an AP mode or Network mode connection. An internet connection for your device is only needed to download the large installation file.


3

First let's prep the Edison SBC on your Handibot

**Download and follow these instructions to remove (and later re-install) your FabMo Control Card:**


[http://docs.handibot.com/doc-output/Handibot2\\_Replacing\\_FabMo\\_Control\\_Card.pdf](http://docs.handibot.com/doc-output/Handibot2_Replacing_FabMo_Control_Card.pdf)

(On the docs.Handibot.com site: "Replacing your Control Card")

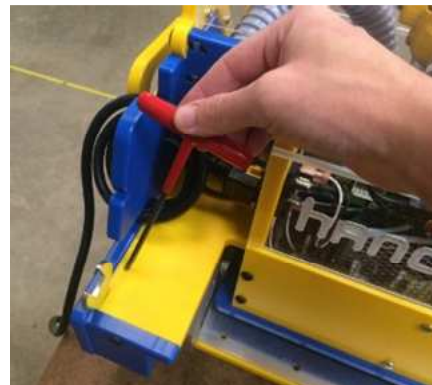


4

Disconnect BOTH USB cables from Edison.

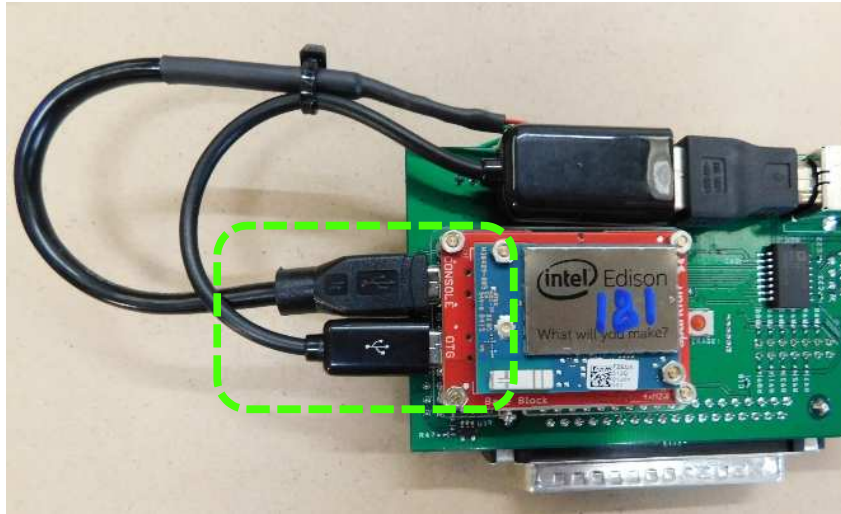

5

Plug USB micro connector on your cable into Edison at “OTG” location. Do not plug the other end in yet.

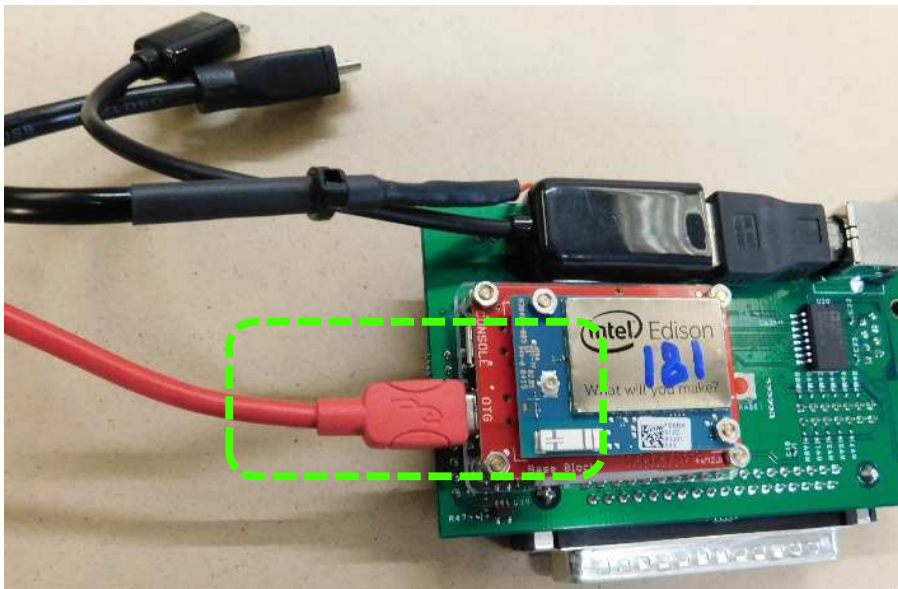

6


From your PC's Browser:

- Go to the link below
- Download the file to a convenient location

<https://drive.google.com/open?id=0B5S7sMQs5whAbVZaQIRKUTdITTg>

7

Click Download Anyway to start the download ...

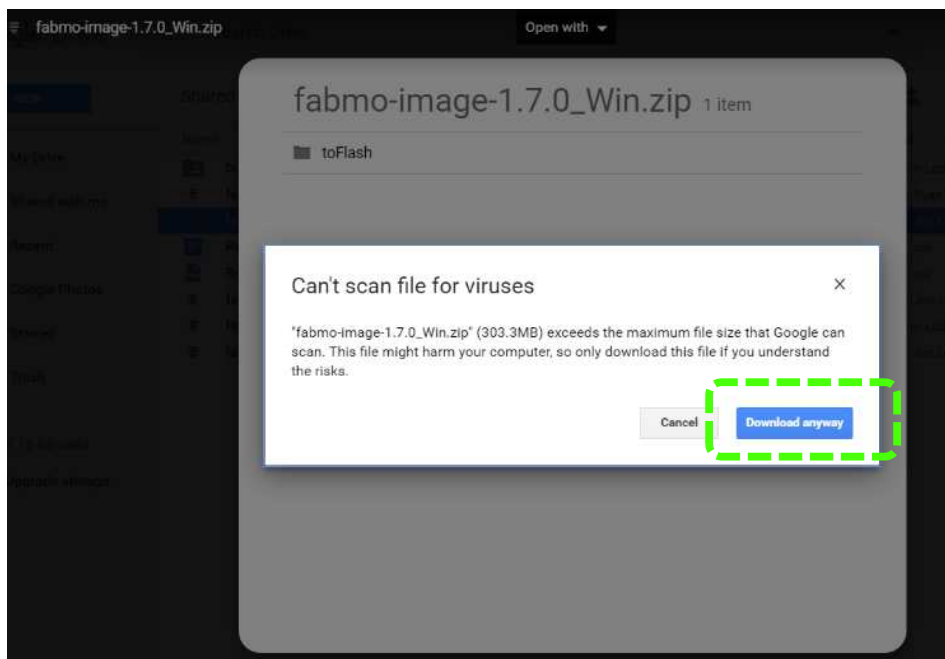

8

Extract the compressed files (Unzip)


Open the Folder labeled: *fabmo-image-1.7.0*

Then open the Folder labeled: *toFlash*

Double click (in order to run): *flash.bat*

9

You should see a console screen that looks something like this.

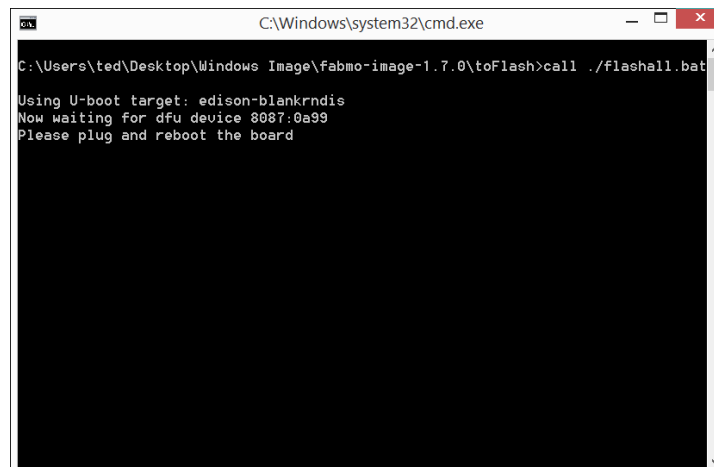

```
C:\Windows\system32\cmd.exe
C:\Users\ted\Desktop\Windows Image\Fabmo-image-1.7.0\toFlash>call ./flashall.bat
Using U-boot target: edison-blankrndis
Now waiting for dfu device 8087:0a99
Please plug and reboot the board
```

Now, PLUG-IN the other end of the USB cable to a USB 2.0 slot on your computer to start download.

10

- the blue LED on the Edison should come on
- you should hear a couple beeps
- (there might be a “dfu” error message ... ignore if things seem to continue)
- then the screen will show several download messages before one that says up to “5 minutes”

```

C:\Windows\system32\cmd.exe
Using U-boot target: edison-blankrndis
Now waiting for dfu device 8087:0a99
Please plug and reboot the board
Dfu device found
Flashing IFWI
Download [=====] 100% 4194304 bytes
Download done.
Download [=====] 100% 4194304 bytes
Download done.
Flashing U-Boot
Download [=====] 100% 237568 bytes
Download done.
Flashing U-Boot Environment
Download [=====] 100% 65536 bytes
Download done.
Flashing U-Boot Environment Backup
Download [=====] 100% 65536 bytes
Download done.
Rebooting to apply partiton changes
Dfu device found
Flashing boot partition (kernel)
Download [=====] 100% 14925824 bytes
Download done.
Flashing rootfs, (it can take up to 5 minutes... Please be patient)
Download [===] 12% 13421728 bytes

```

11

Eventually, the primary download will complete.

```

C:\Windows\system32\cmd.exe
Download [=====] 100% 4194304 bytes
Download done.
Flashing U-Boot
Download [=====] 100% 237568 bytes
Download done.
Flashing U-Boot Environment
Download [=====] 100% 65536 bytes
Download done.
Flashing U-Boot Environment Backup
Download [=====] 100% 65536 bytes
Download done.
Rebooting to apply partiton changes
Dfu device found
Flashing boot partition (kernel)
Download [=====] 100% 14925824 bytes
Download done.
Flashing rootfs, (it can take up to 5 minutes... Please be patient)
Download [=====] 100% 1036036096 bytes
Download done.
Rebooting
U-boot & Kernel System Flash Success...
Your board needs to reboot to complete the flashing procedure, please do not unplug it for 2 minutes.
Exit Code = 0
Press any key to continue . . .

```

After the primary download completes, wait 2 full minutes for all processes to update.

12

### **The Flash is Complete!**

\*Re-install the Control Card and you should be ready to run your Handibot again.

13

### Possible Issues:

- download may not work on USB3.0 or USB port designated high power (“+” or lightening symbol) ... try another USB port
- download may require installing the dfu-utility for Windows ... get it here:

<https://drive.google.com/open?id=0B5S7sMQs5whARXJhZ2VYUEM0RIU>

**Give us a call if you have  
problems with this procedure!**

919.680.4800