

Machine Learning-Lecture 15

P1.py

```
C:\ml\L15>python p1.py
```

```
INSTANCES  A  B
```

```
0    P1  2  2
```

```
1    P2  1 14
```

```
2    P3 10  7
```

```
3    P4  1 11
```

```
4    P5  3  4
```

```
5    P6 11  8
```

```
6    P7  4  3
```

```
7    P8 12  9
```

```
INSTANCES  A  B  res
```

```
0    P1  2  2  0
```

```
1    P2  1 14  2
```

```
2    P3 10  7  1
```

```
3    P4  1 11  2
```

```
4    P5  3  4  0
```

```
5    P6 11  8  1
```

```
6    P7  4  3  0
```


```
7    P8 12  9  1
```

```
enter a 2
```


```
enter b 2
```

```
[0]
```


P2.py

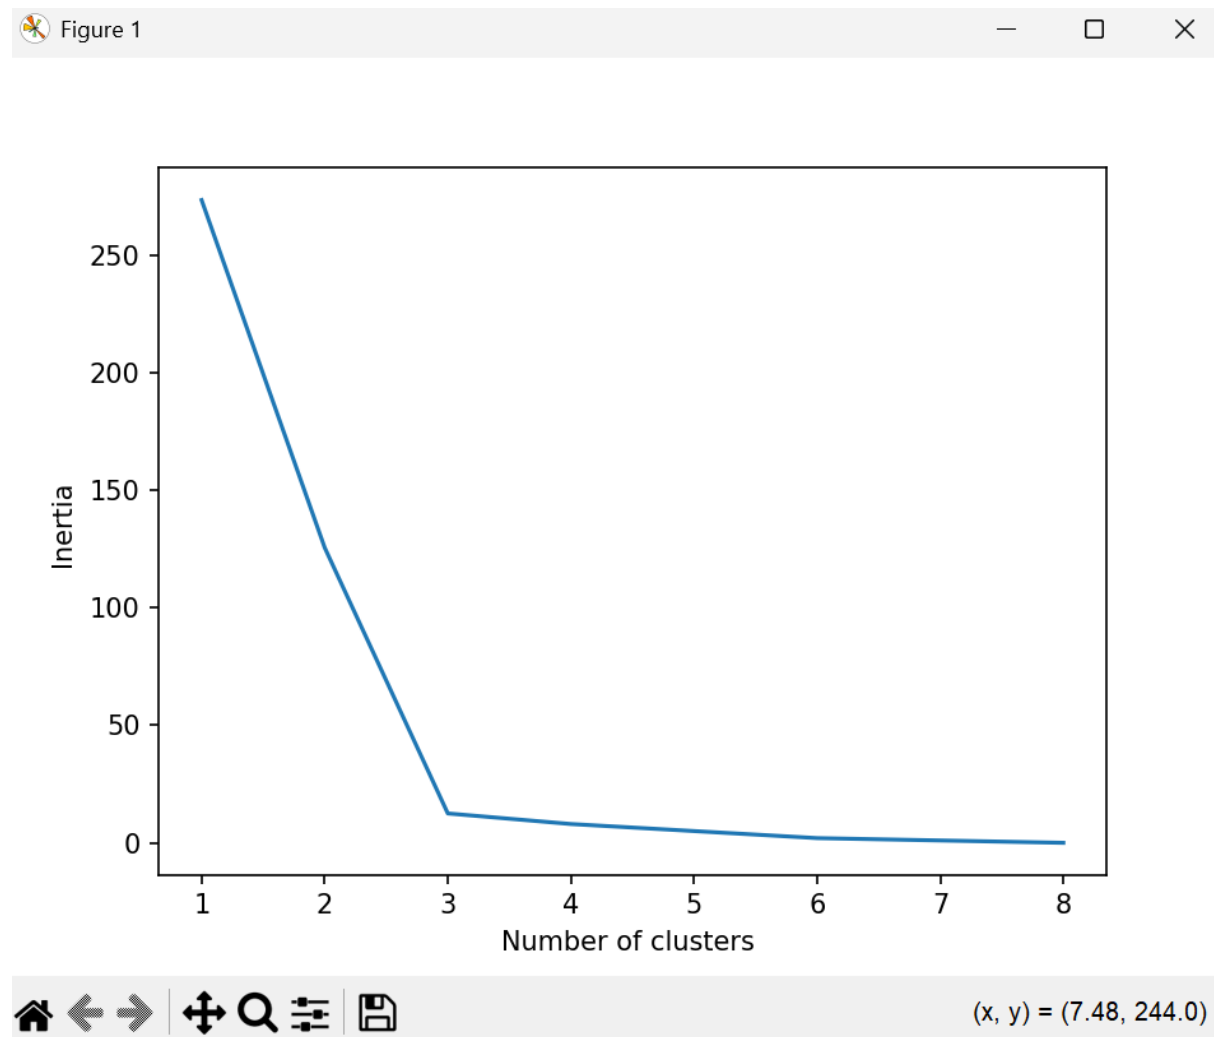


P3.py

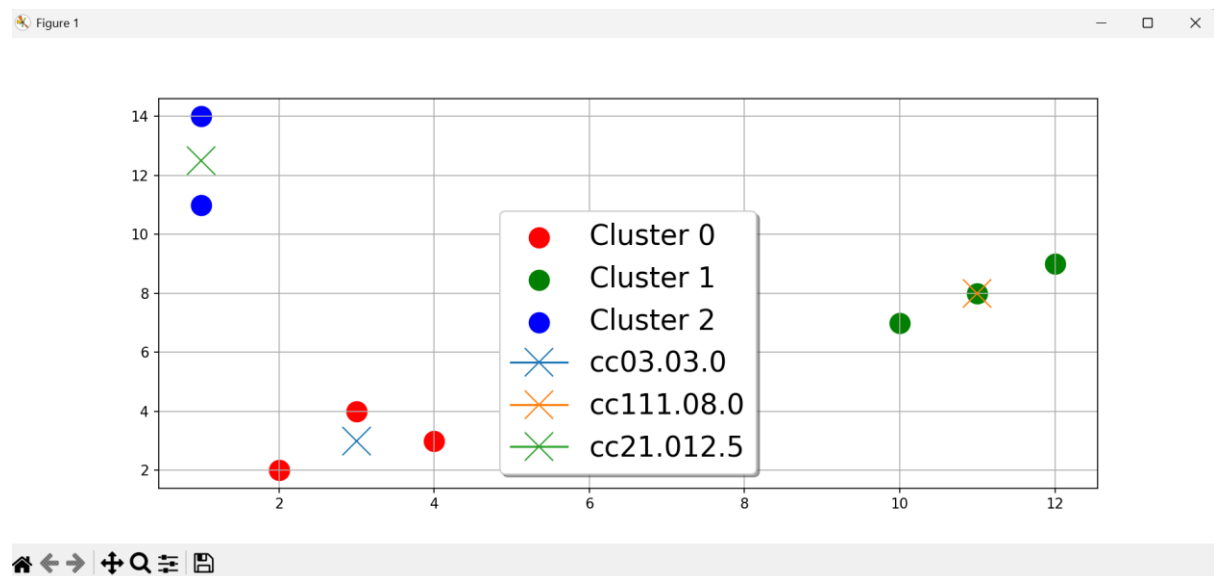

P4.py

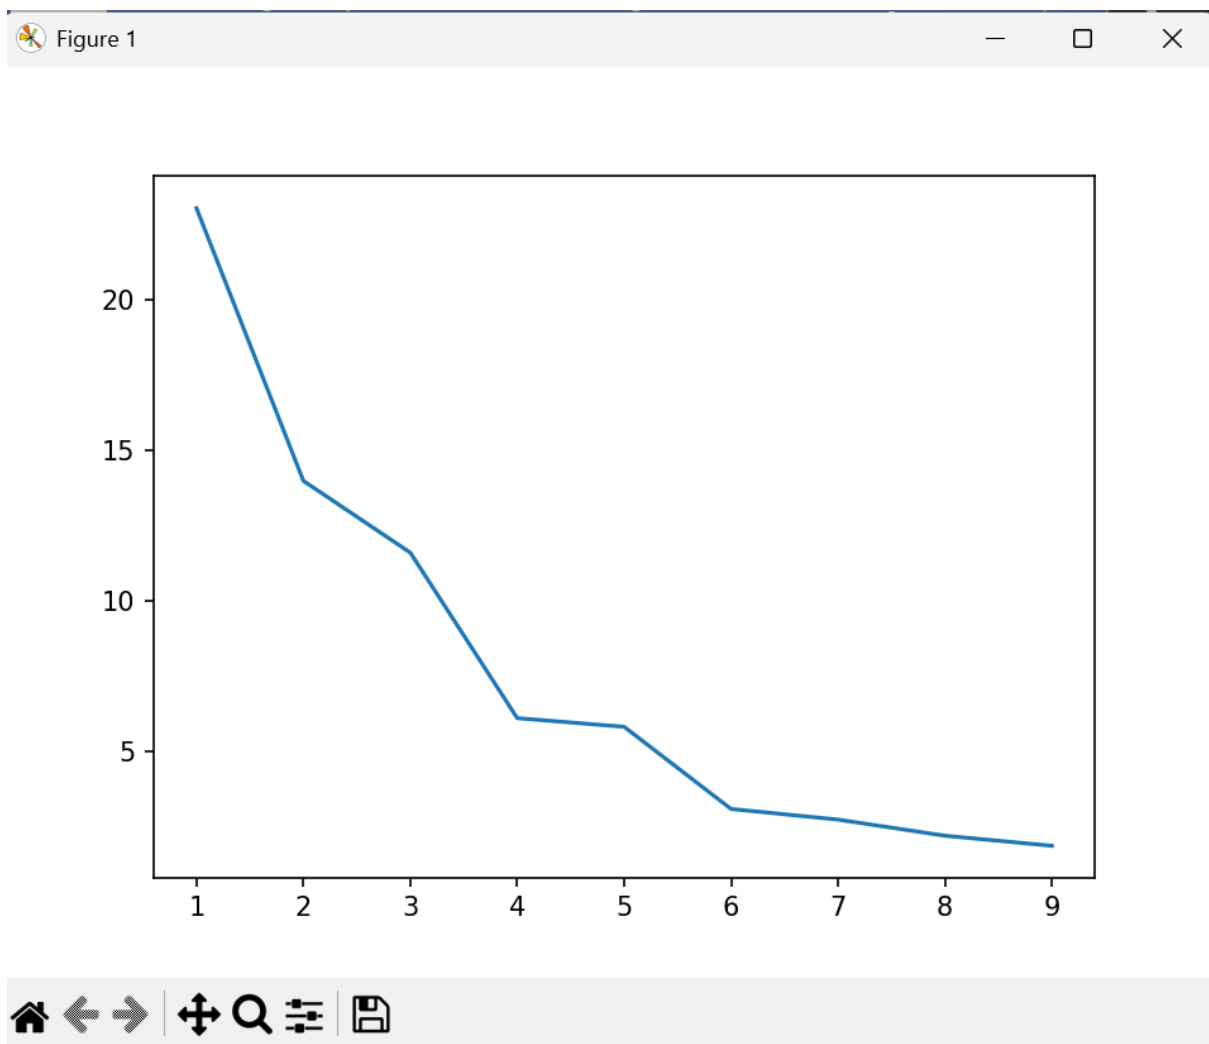

P5.py

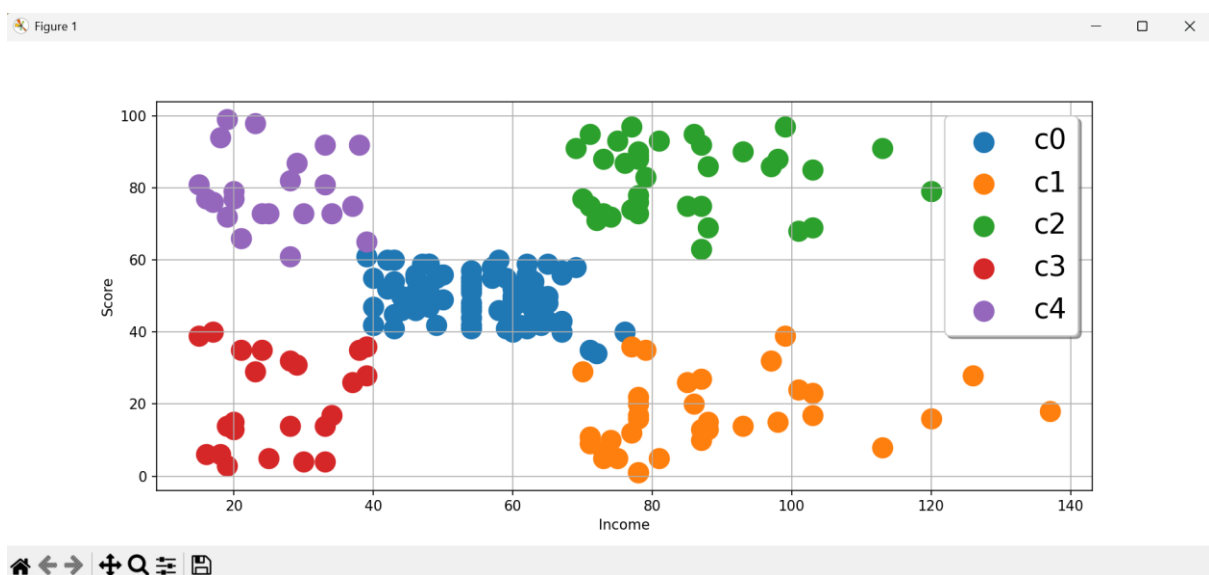

P6.py

```
C:\ml\L15>python p6.py
```

```
CustomerID Gender Age Annual_Income Spending_Score
0      1  Male  19      15      39
1      2  Male  21      15      81
2      3  Female 20      16       6
3      4  Female 23      16      77
4      5  Female 31      17      40
..      ...  ...  ...      ...
195    196  Female 35     120      79
196    197  Female 45     126      28
197    198  Male  32     126      74
198    199  Male  32     137      18
199    200  Male  30     137      83
```

```
[200 rows x 5 columns]
```

```
CustomerID Gender ... Spending_Score res
0      1  Male ...      39  3
1      2  Male ...      81  4
2      3  Female ...       6  3
3      4  Female ...      77  4
4      5  Female ...      40  3
..      ...  ...  ...      ...
195    196  Female ...      79  2
196    197  Female ...      28  1
197    198  Male ...      74  2
198    199  Male ...      18  1
199    200  Male ...      83  2
```

```
[200 rows x 6 columns]
```

```
enter annual income 15
```

```
enter Spending Score 39
```

```
li ls 0.72    432
```