




```
drop database if exists kamalclasses;
create database if not exists kamalclasses;
use kamalclasses;
```

```
create table if not exists courses
(
    cid int unsigned primary key,
    cname varchar(100) not null,
    cfees decimal(10, 2) unsigned
);
desc courses;
```

```
insert into courses values(1, 'java', 12000);
insert into courses values(2, 'android', 12000);
insert into courses values(3, 'springboot', 12000);
select * from courses;
```

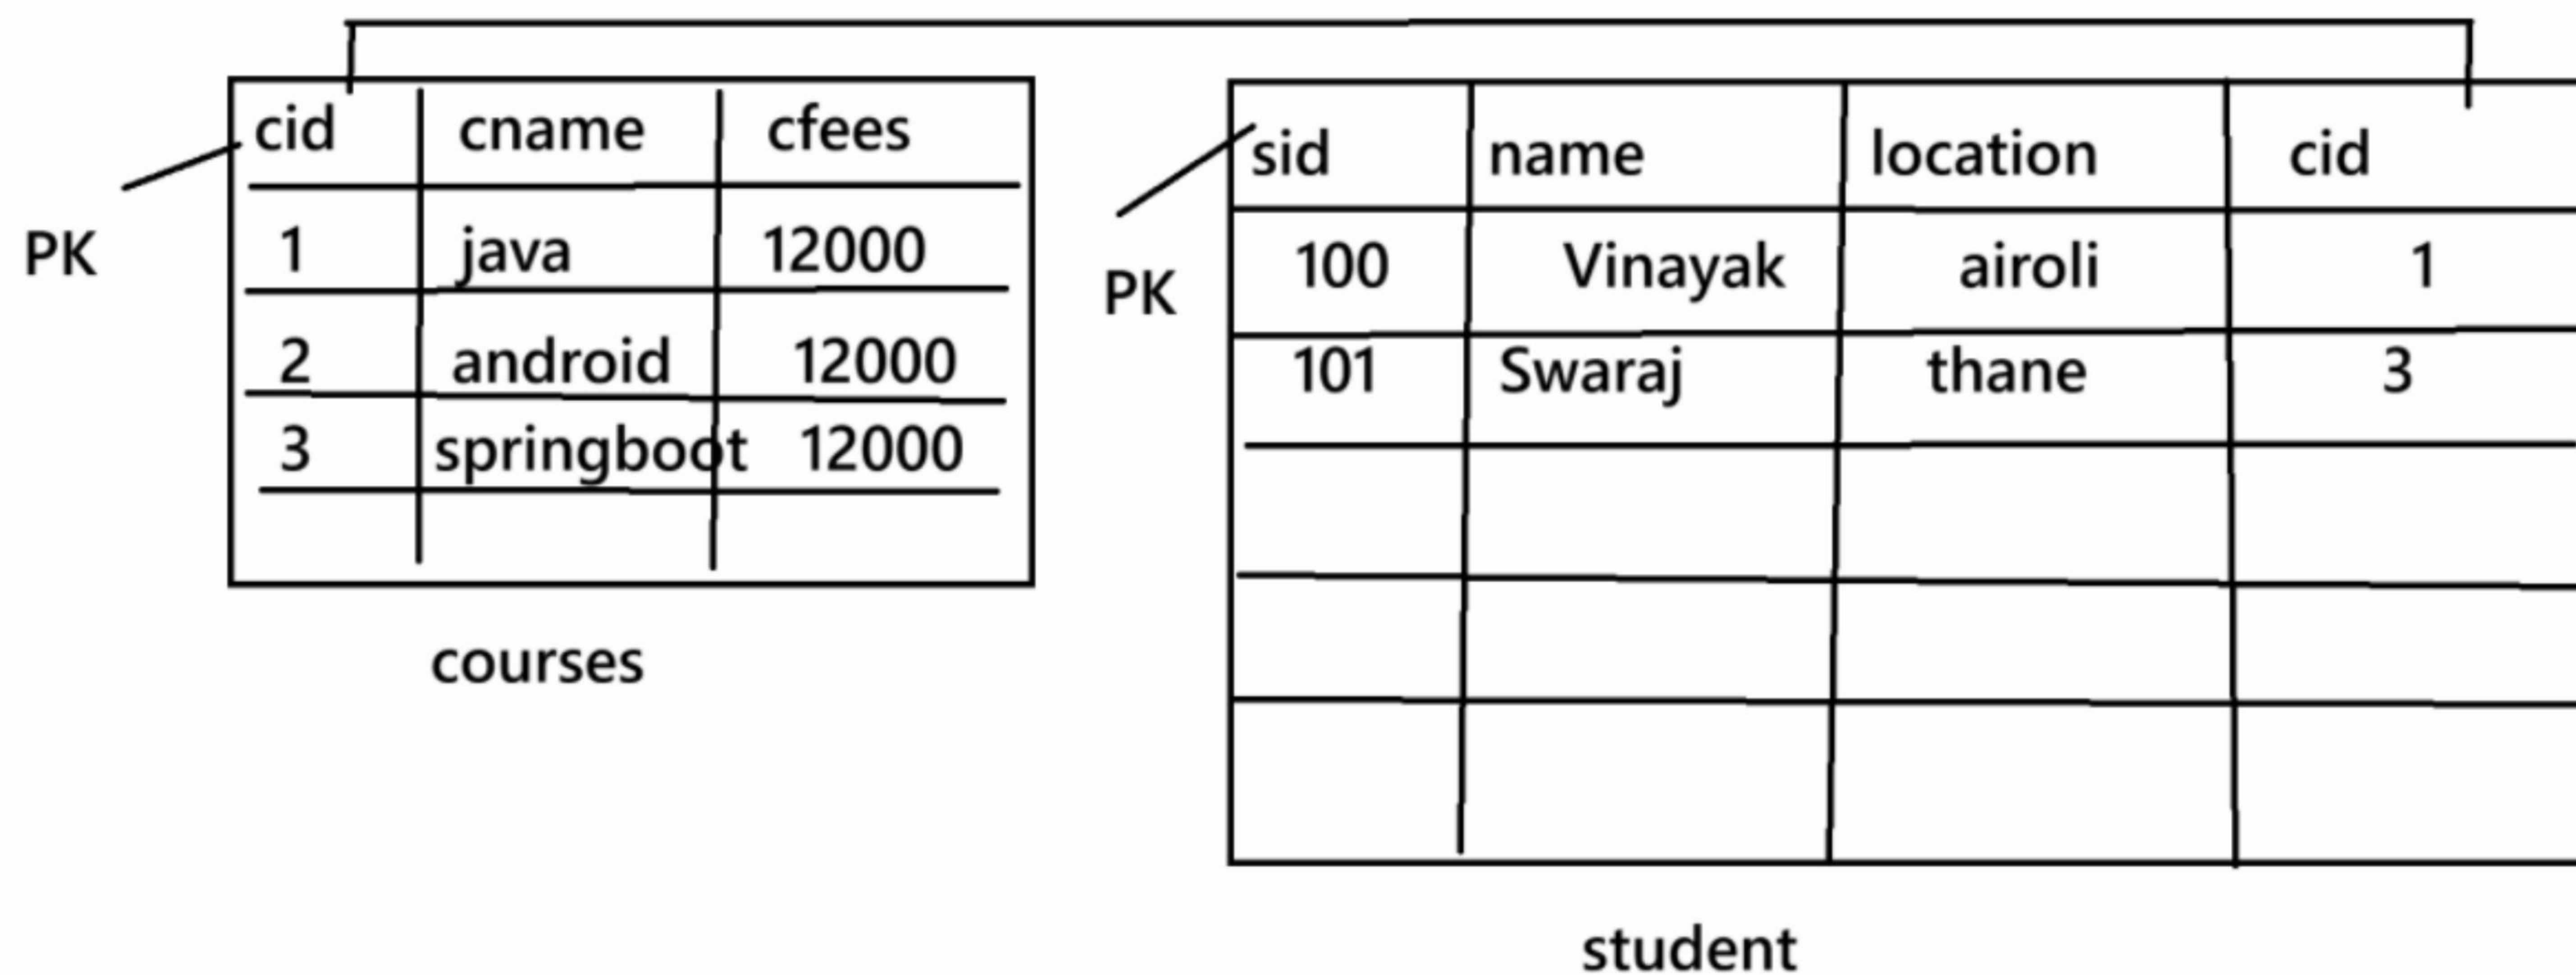

```
create table if not exists student
(
    sid int unsigned primary key,
    name varchar(100) not null,
    location varchar(100) not null,
    cid int unsigned,
    foreign key(cid) references courses(cid)
    on delete cascade
    on update cascade
);
desc student;

insert into student values(100, 'vinayak', 'airoli', 1);
insert into student values(101, 'swaraj', 'thane',3);
insert into student values(102, 'raju', 'kalyan',20);

select * from student;

delete from courses where cid = 3;
select * from student;

update courses set cid = 10 where cid = 1;
select * from student;
```