+43 is represented in memory as follows:

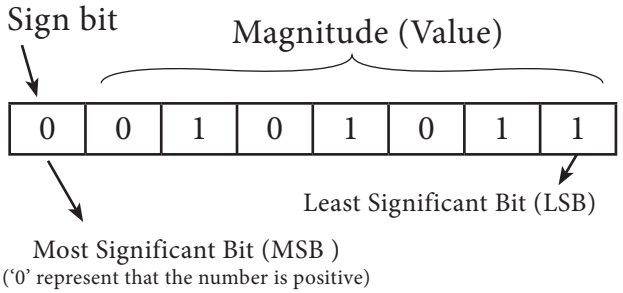

-43 can be represented in memory as follows.

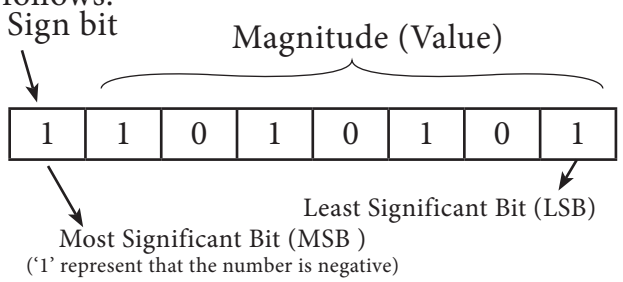

2.5.2 1's Complement representation

This is an easier approach to represent signed numbers. This is for negative numbers only i.e. the number whose MSB is 1.

The steps to be followed to find 1's complement of a number:

Step 1: Convert given Decimal number into Binary

Step 2: Check if the binary number contains 8 bits , if less add 0 at the left most bit, to make it as 8 bits.

Step 3: Invert all bits (i.e. Change 1 as 0 and 0 as 1)

Example

Find 1's complement for $(-24)_{10}$

Given Number	Binary Number	1's Compliment
$(-24)_{10}$	00011000	11100111

2.5.3 2's Complement representation

The 2's-complement method for negative number is as follows:

a. Invert all the bits in the binary sequence (i.e., change every 0 to1 and every 1 to 0 ie.,1's complement)

b. Add 1 to the result to the Least Significant Bit (LSB).

Example

2's Complement represent of $(-24)_{10}$

Binary equivalent of +24:	11000
8bit format:	00011000
1's complement:	11100111
Add 1 to LSB:	+1
2's complement of -24:	**11101000**

Workshop

7. Write the 1's complement number and 2's complement number for the following decimal numbers:
(A) 22 (B) -13 (C) -65 (D) -46

2.6 Binary Arithmetic

As decimal numbers, the binary numbers also permit computations like addition, subtraction, multiplication and division. The following session deals only with binary addition and subtraction.

2.6.1 Binary Addition

The following table is useful when adding two binary numbers.

A	B	SUM (A + B)	Carry
0	0	0	-
0	1	1	-
1	0	1	-
1	1	0	1

In 1 + 1 = 10, is considered as sum 0 and the 1 as carry bit. This carry bit is added with the previous position of the bit pattern.