


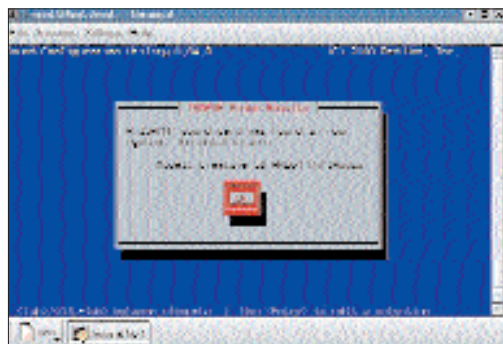

sndconfig usually sets up the soundcard for you

The result of this command will be something like this: **eth0:*******. If you can't see details like I/O address, media type, hardware address, IRQ, etc, then it means that the driver for the card hasn't been loaded yet.

Take a look at **/lib/modules/2.4.10/kernel/drivers/net** (the path may be different on your system depending on your kernel).

HOT Tip If you have Palm OS 4.0, ColdSync is the only tool at present to connect with Palm. Download it from: www.ooblick.com/software/coldsync/ Need solutions for USB device problems with Linux? Subscribe to <http://www.linux-usb.org/mailling.html> #users

This will help you find out if you have the required module for your network card. Log in as root and use the **modprobe** or **insmod** commands to load the driver if it is compiled as a module. For example, type **insmod <module.o>**, where **<module.o>** is the

specific module you need to add.

There's a possibility that you still face problems. If so, compile a new kernel with the required modules. That ought to do the trick.

Using the **ifconfig** command will help you find out whether the drivers have been installed properly or not.

Modem mystification

If you have one of those external modems, it ought to work fine since most of these are supported by

Linux. Even if you have some problems with these, you can easily get the drivers from the Net and get it to work. The problems surface when you have one of those software controlled internal modems known as Winmodems. You fell for the


low price, didn't you? It is easier to buy a new modem than get one of these to work with Linux.

If your problem is "How do I recognise a Winmodem?" then check the modem's manual or packaging. In case it says Softmodem or Winmodem, then you have a problem. Some of the other common names are HSP, HSE, HCF, host-based, etc. Another tell-tale sign of softmodems is the 'Only for Windows' marking.

If you have a Linmodem (Linux modem), support for Linux won't be a

HOT Tip Search for Linmodem drivers at: www.idir.net/~gromitkc/winmodem.html or <http://linmodems.technion.ac.il/resources.html>

Preliminaries of clearing the video blues

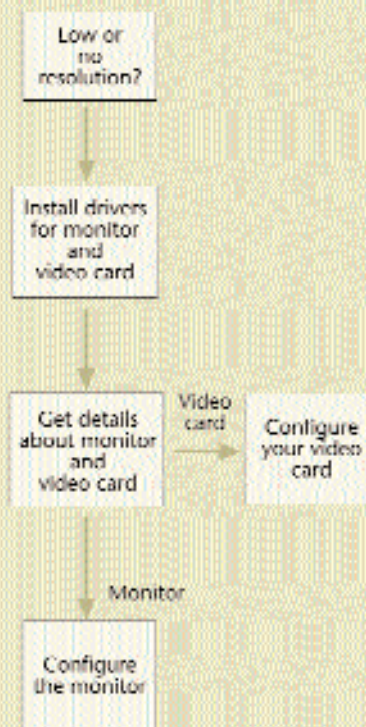

problem. Once you've found the drivers, take some time to read the documentation. This will help you a lot in getting that modem up and running.

Printer pauses

Communication problems could cause your printer to generate printouts with jumbled characters. This might also cause the printer to print non-stop. In order to rectify this, take out the paper from the inkjet printer or open the paper trays in the case of a laser printer. Now use the **lpq** command to find the queue which is printing. Remove the print job using the **lrm** command.

However, this command might not clear the print job from the queue. Use the command **fuser -k /dev/lp0** if you have a parallel printer or **fuser -k /dev/usb/lp0** for USB printers.

Scanner blues

SANE (Scanner Access Now Easy) is the best way to get your scanner to work with Linux. SANE will get you around most commonly faced scanner problems.

The First thing to do is to check the list of scanners supported by SANE at <http://panda.mostang.com/sane/>. Most

Up with USB

USB devices are known to cause a lot of problems with Linux. Kernels after 2.2.7 come with a built-in USB support. Hence, a recompiling the kernel will get your USB device up and running.

When compiling the kernel, select Support for USB in the USB support option. Then select the motherboard support option depending on your PC's motherboard or USB adapter. Check your motherboard manual for this.

Now its time to select the USB device you want to add. Selecting the USB Human Interface Device (HID) support adds support for input devices such as keyboards, mice, joysticks, etc. Other options such as

USB Scanner support, USB Audio support, USB Modem support, etc can be added depending on your USB device.

When you are through with rebuilding, install the new kernel with the new modules and reboot.

Some necessary modules to be loaded are **usbcore.o**, **usb-uhci.o**, **uhci.o** or **usb-ohci.o**, in addition to modules like **scanner.o** depending on the type of device you're installing.

The site www.linux-usb.org has a list of working USB devices for Linux which will help you find out if your USB device is supported in Linux. This site also has a lot of tools and APIs.