


Servers go offline

EA takes down many of its online gaming servers

Facebook IM

Facebook adds support for XMPP which allows popular instant messengers to access Facebook chat

Developer corner

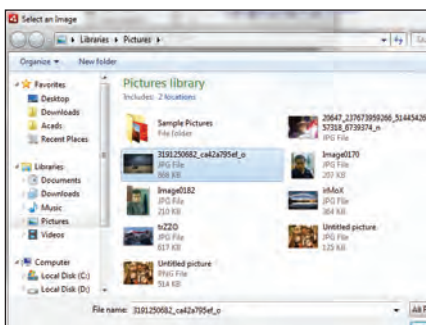

Navigate to an image and click on Ok

our application. To do this, drag an `ApplicationControlBar` control from the Layout folder onto your application. In the Properties pane, select `Dock` to be `True`. Next add a button control on the `ApplicationControlBar` by dragging it onto the stage.

Finally, we want to be able to browse to an image file in our file system using the browse button you just created. To do this, we will add some Action script code to the MXML source:

```
<mx:Script>
    <![CDATA[
        pri-
```

```
vate var file:File;

        private function
click(evt:MouseEvent):void {
            file
= new File();


            file.
addEventListener(Event.
SELECT, file_select);

            file.
browseForOpen("Select an Image");
        }
    }
}
```

```
        private function
file_select(evt:Event):void {
            img.
source = File(evt.cur-
rentTarget).nativePath;
        }
    ]]>
</mx:Script>
```

Deploying your application

Once you have created your Air application, you have to package your application into an AIR file. You can do this by going to `Project > Export Release Build`. You have to choose the project and then

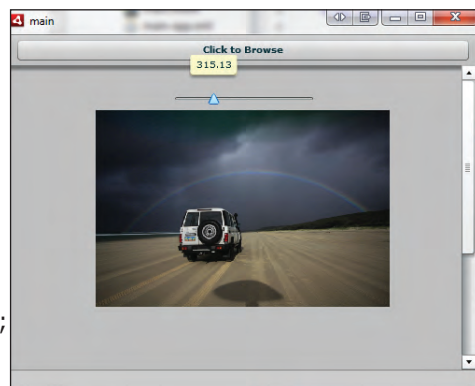

Now as you move the slider from left to right, you will notice that the image size will change alongside our action. Because we have enabled live dragging, the image size changes dynamically

the main application file. You can choose to include or exclude your source files if you want. You have to then sign the Air application before it can be exported. You can either create your own certificate or get it from companies such as Verisign.

Next click on the `Finish` button to output the AIR file at a location you chose. You can then install and run your application by double-clicking on the AIR file. **d**

Born to be tough

Superior Series
SH93

DRAM Module

DDR3 1333X to 2000X
DDR2 667 to 1200

USB Flash Drive

C906 4GB to 32GB
C903 2GB to 32GB
C905 4GB to 32GB
S805 2GB to 16GB

Memory Card

SDHC 2GB to 32GB
microSDHC 1GB to 16GB
NH92 320GB/500GB/840GB

HDD

CH94 320GB/500GB/840GB

ADATA

www.adata-group.com