


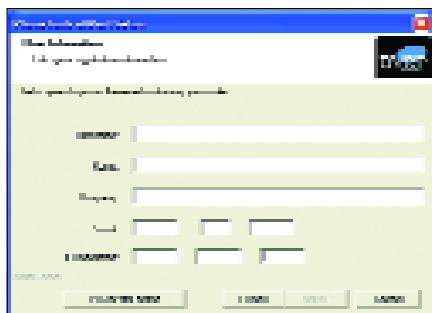


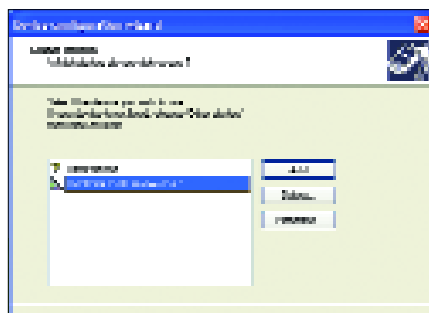

Enter licensing information here

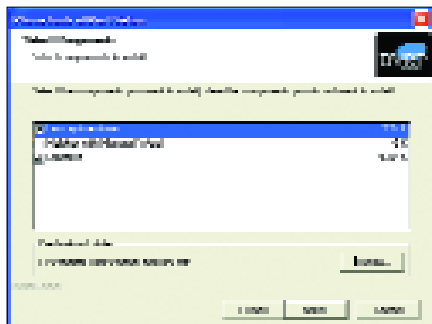


Select the modem to be used

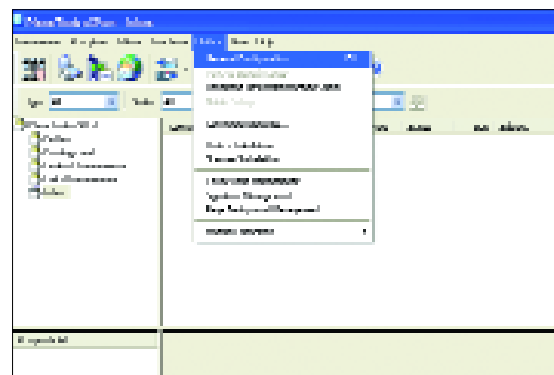

Select the Callserve component, which is disabled by default



The default is auto-detection of drivers, but advances users can use the manual method

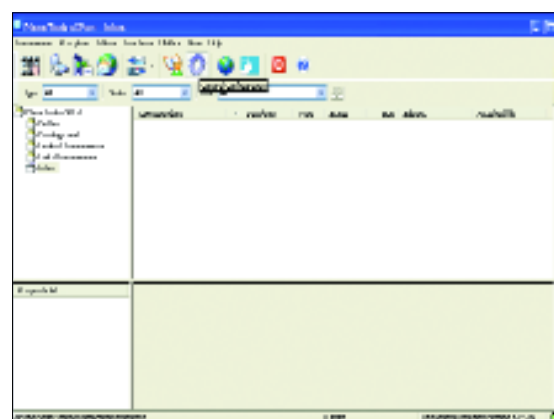

To start the configuration window, press F6 or the wheel icon on the toolbar

code. The last important step is selecting 'Callserve' on the 'Select Components' window. Apart from these three steps, continue pressing 'Next' for the remaining steps. Remember to keep 'Phone-Book Selection' as 'Use an existing phonebook in the list above?' After the installation is complete, a new setup


the 'Next' button on the opening window. Now, select the appropriate modem and press 'Next' to proceed.

This wizard will install its own drivers depending upon the modem that it detects. Once the device detection system completes, click 'Next' to

However, you can change these default settings by clicking on the General Configuration icon or by pressing [F6] or by following the menu commands in *Utilities > General Configuration*.

Ring count before auto pick up


If you wish to change the default ring count before pick up, click on the 'Communication' tab. Choose any value from the drop-down box. The number of rings range from two to nine.

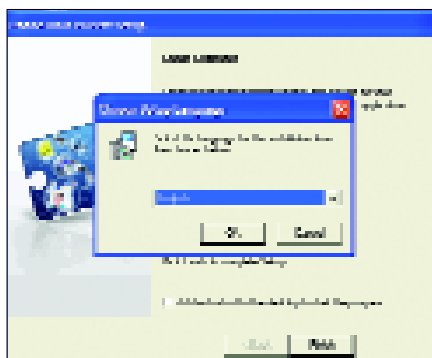

Click cancel to stop installation of this unwanted application that comes bundled



The software auto-detects the modem and installs its own drivers

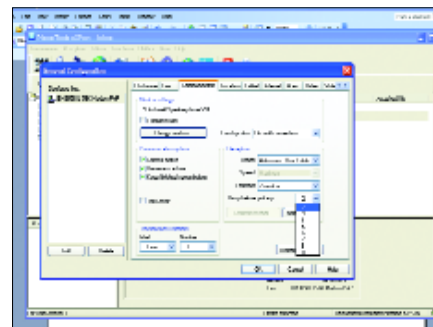

Allowable ring count values are 2 through 9 rings before the phone is attended by the answering machine software

shows up for BVRP Internet, with the first step as 'Choose Setup Language'. Click 'Cancel' to avoid this setup.

The application will automatically start unless you have un-ticked the 'Run Application after installation' option in the final step. When the application starts for the first time, it will start the modem configuration wizard. Click on

continue the setup. Finally, click 'Finish' to complete the installation.

When the software starts now, it works in Answering Machine mode. At this point of time, the software receives the phone call after the second ring. The software now plays the default greeting and saves the message in the Inbox. During all this, the maximum recording time for any session would not exceed 60 seconds.