




Tasmota Templates

Use these copy paste templates on your device, for which you will have to install Tasmota first.
<https://digit.in/may20-01>



Tasmota 8.2 Elliot

Open source firmware for ESP8266 devices, with web based controls and more.
<https://digit.in/may20-02>

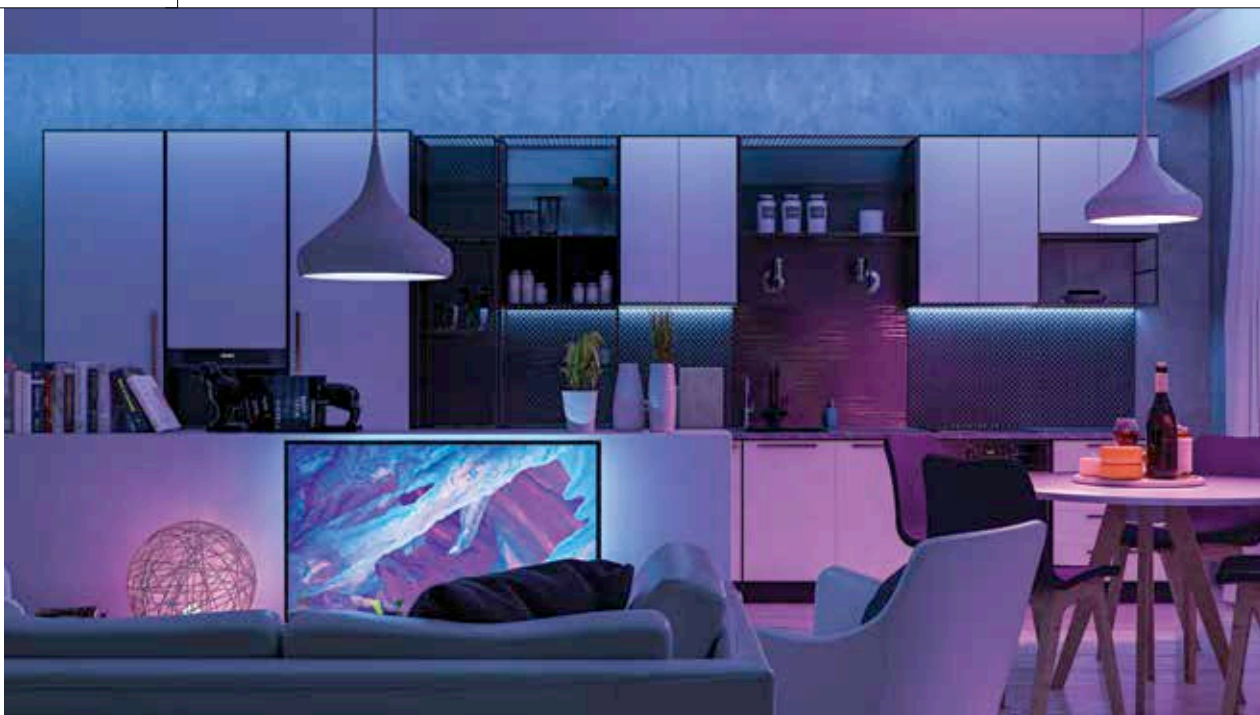

SMART LIGHT AUTOMATION

Make a personal, and private home automation system, with full control over your smart bulb's hardware. No proprietary black box spying here!

Aaruni Kaushik | feedback@digit.in

A

trademark feature of all futuristic high tech homes is smart appliances, and central control hubs.

As examples take the lights that change colour depending on the time, weather, or when you come home or leave. Also, apps on your PC that control the automated system and your smart-phone that can run a manual overrides whenever required! However, such convenience often comes at the cost of your own privacy. To get advertised

functionality, all big companies have to transfer your data to their computers for operations. What if there was a way to get the best of both worlds? If that got your attention, continue reading, and by the end of this article, you'll have your own private smart infrastructure!

QUICK OVERVIEW

The process, in broad strokes, is simple. Your goal is to get automation functionality from a smart bulb, with all of your data never leaving the LAN. To do this, you need to set up your own command and control server with Home-Assistant (HASS), a free and open source

home automation solution. You also flash the firmware of the bulb with Tasmota, a free and open source firmware for ESP8266-based Wi-Fi devices. And finally, you will have to configure an MQTT broker so that HASS and the bulb can talk to each other, and you can control the bulb using a shiny UI. The entire process takes about 20 minutes if you know what you are doing, and a couple hours if you're a beginner.

The flashing procedure is not officially supported, and will likely void the hardware warranty of your bulb. Note that, we have flashed 6 bulbs, and nothing has gone wrong, but your mileage may vary. You have been warned! Additionally, we won't be discussing best practices for setting up HASS. That's an entire article in its own right. You don't need HASS, you can control the bulb from Tasmota's webUI, or just