
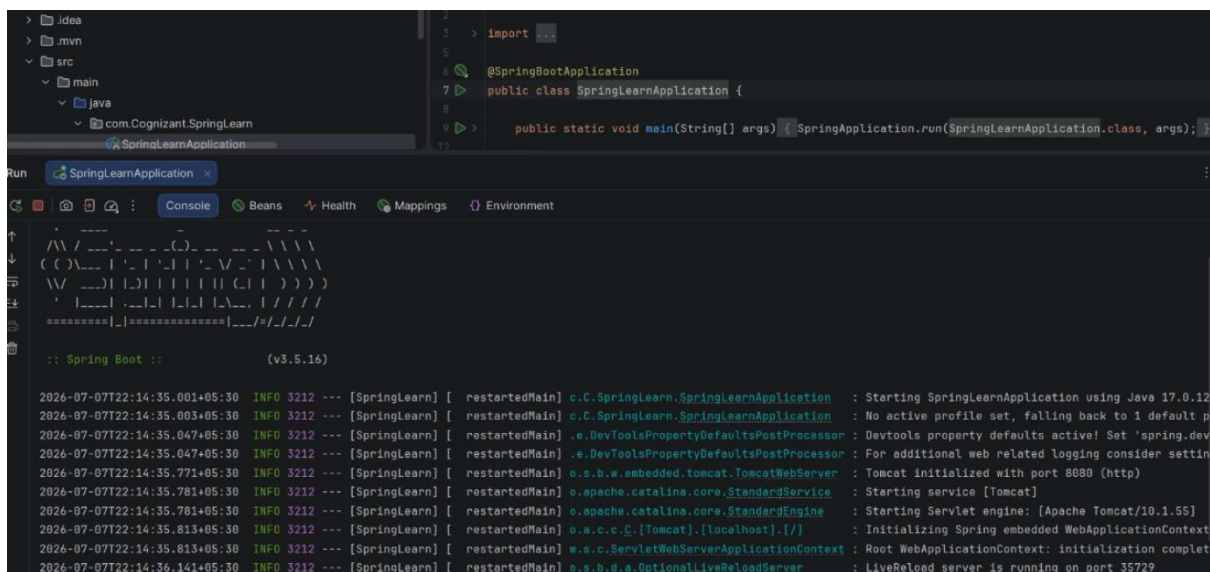


Hands on:

Create a Spring Web Project using Maven

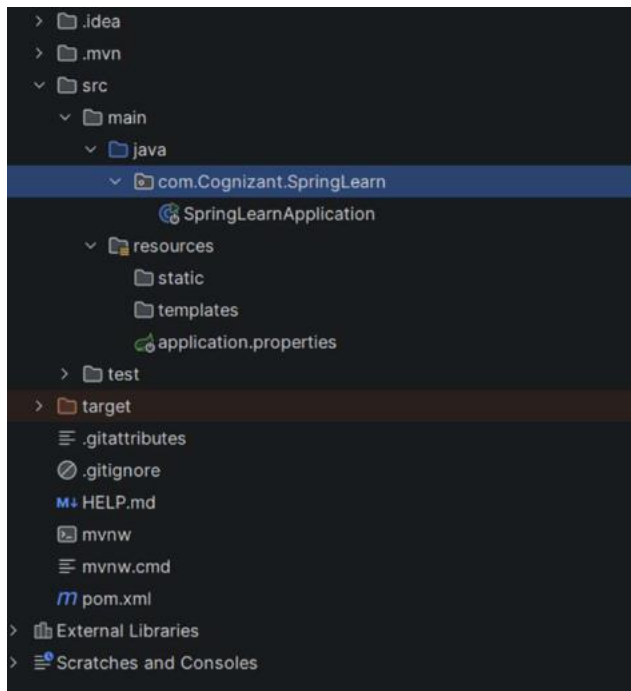

Spring Core - Load Country from Spring Configuration XML

```
package com.Cognizant.SpringLearn;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

class Country {

    private static final Logger LOGGER =
        LoggerFactory.getLogger(Country.class);

    private String code;
    private String name;

    public Country() {
        LOGGER.debug("Inside Country Constructor.");
    }

    public String getCode() {
        LOGGER.debug("Inside getCode()");
        return code;
    }

    public void setCode(String code) {
        LOGGER.debug("Inside setCode()");
        this.code = code;
    }

    public String getName() {
        LOGGER.debug("Inside getName()");
        return name;
    }


    public void setName(String name) {
        LOGGER.debug("Inside setName()");
        this.name = name;
    }

    @Override
    public String toString() {
        return "Country [code=" + code + ", name=" + name + "]";
    }
}
```

OUTPUT:

```
gs  {} Environment
Processor : Devtools property defaults active! Set 'spring.devtools.add-properties' to 'false' to disable
Processor : For additional web related logging consider setting the 'logging.level.web' property to 'DEBUG'
Server    : Tomcat initialized with port 8080 (http)
Service   : Starting service [Tomcat]
Engine    : Starting Servlet engine: [Apache Tomcat/10.1.55]
          : Initializing Spring embedded WebApplicationContext
Context   : Root WebApplicationContext: initialization completed in 879 ms
          : LiveReload server is running on port 35729
Server    : Tomcat started on port 8080 (http) with context path '/'
Application : Started SpringLearnApplication in 1.676 seconds (process running for 2.225)
          : Inside Country Constructor.
          : Inside setCode()
          : Inside setName()
Application : Country : Country [code=IN, name=India]
```

Hello World RESTful Web Service

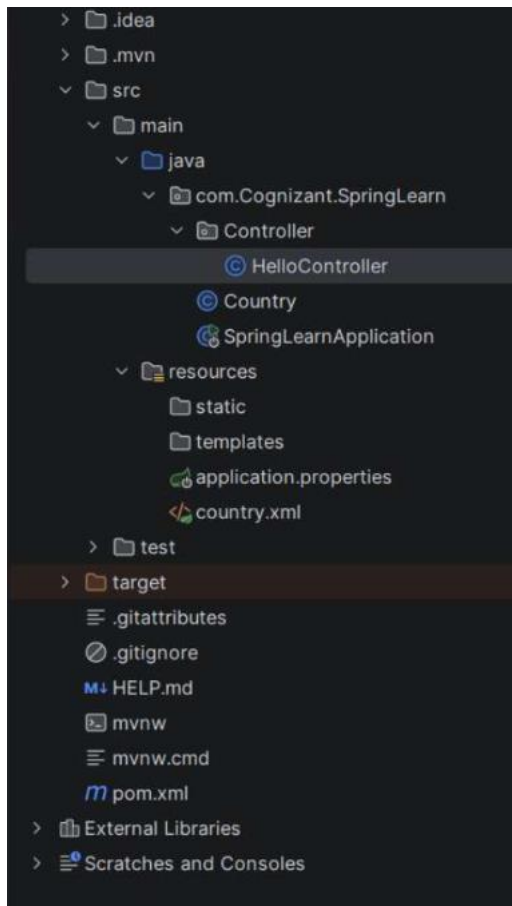

```
package com.Cognizant.SpringLearn;

import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;

import org.springframework.context.ApplicationContext;
import org.springframework.context.support.ClassPathXmlApplicationContext;

@SpringBootApplication
public class SpringLearnApplication {

    private static final Logger LOGGER =
        LoggerFactory.getLogger(SpringLearnApplication.class);

    public static void main(String[] args) {

        SpringApplication.run(SpringLearnApplication.class, args);

        displayCountry();

    }

    public static void displayCountry() {

        ApplicationContext context =
            new ClassPathXmlApplicationContext("country.xml");

        Country country =
            context.getBean("country", Country.class);

        LOGGER.debug("Country : {}", country);

    }

}
```

REST - Country Web Service

```
package com.Cognizant.SpringLearn;

public class Country {

    private String code;
    private String name;

    public Country() {
    }

    public String getCode() {
        return code;
    }

    public void setCode(String code) {
        this.code = code;
    }

    public String getName() {
        return name;
    }

    public void setName(String name) {
        this.name = name;
    }

}
```

```
package com.Cognizant.SpringLearn.Controller;

import com.Cognizant.SpringLearn.Country;
import org.slf4j.Logger;
import org.slf4j.LoggerFactory;

import org.springframework.context.ApplicationContext;
import org.springframework.context.support.ClassPathXmlApplicationContext;

import org.springframework.web.bind.annotation.RequestMapping;
import org.springframework.web.bind.annotation.RestController;

@RestController
public class CountryController {

    private static final Logger LOGGER =
        LoggerFactory.getLogger(CountryController.class);

    @RequestMapping("/country")
    public Country getCountryIndia() {

        LOGGER.info("START");

        ApplicationContext context =
            new ClassPathXmlApplicationContext("country.xml");

        Country country =
```

REST - Get country based on country code

```
package com.Cognizant.SpringLearn.service;

import com.Cognizant.SpringLearn.Country;
import org.springframework.context.ApplicationContext;
import org.springframework.context.support.ClassPathXmlApplicationContext;
import org.springframework.stereotype.Service;

import java.util.List;

@Service
public class CountryService {

    public Country getCountry(String code) {

        ApplicationContext context =
            new ClassPathXmlApplicationContext("country.xml");

        List<Country> countries =
            context.getBean("countryList", List.class);

        for (Country country : countries) {

            if (country.getCode().equalsIgnoreCase(code)) {
                return country;
            }

        }

        return null;
    }
}
```

Country.java:

```
package com.Cognizant.SpringLearn.Controller;

import com.Cognizant.SpringLearn.Country;
import com.Cognizant.SpringLearn.service.CountryService;

import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.web.bind.annotation.GetMapping;
import org.springframework.web.bind.annotation.PathVariable;
import org.springframework.web.bind.annotation.RestController;

@RestController
public class CountryController {

    @Autowired
    private CountryService countryService;

    @GetMapping("/countries/{code}")
    public Country getCountry(@PathVariable String code){

        return countryService.getCountry(code);
    }

}
```