Detection and Forgetting under Asymmetric Data Availability in Class-Incremental Network Intrusion Detection

Wu Liqiang

Research manuscript — earlier generated evidence: 2026-10-20 12:58 MYT
New-seed lead-reported supplement: 2026-10-21 08:15 MYT

Abstract

Class-incremental network intrusion detection must retain old attacks while learning new ones. We study a refreshed benign–attack gate and an attack-only family classifier under explicit asymmetric data availability. Default decisions supply the main accuracy, F1, ACC, BWT and forgetting comparison; strict false-alarm calibration is a separate deployment analysis. Existing replay, distillation, weight alignment and calibration are not claimed as novel. The evidence supports a retention–plasticity trade-off, not a universal accuracy winner. Earlier KD+WA and CSE18 final-accuracy comparisons remain negative. A complete 48-configuration design-space screen followed by evaluation of three selected configurations on five fresh seeds confirms none: all fail K1 on both datasets. At the 1% calibration target the leading candidate's final balanced accuracy is 51.2% on UNSW and 90.0% on CIC, below ER-Bal-TabT's 56.3% and 92.7%; its lower forgetting is dataset-dependent. Non-significant harm is not equivalence or non-inferiority. These prediction/retention results neither establish explanation stability or non-suppressive governance efficacy nor close the substantive-innovation requirement. In the five-seed default-decision comparison, AR exceeds ER-Bal-TabT on UNSW by 1.6 points in accuracy and 2.7 in macro-F1, but trails on CIC by 3.4 and 14.8 points. Under the low-FPR protocol AR trails ER on both datasets; there is no overall winner. These exploratory differences do not override the two-sided exact sign-flip sensitivity result ($p \geq 0.0625$ with five pairs). **Keywords:** continual learning; intrusion detection; benign data availability; false-positive calibration; replay memory.

1 Introduction

Intrusion detection models must recognize newly observed attack families without discarding knowledge of older ones. In class-incremental learning, historical attack records are represented by a limited replay memory, and inference must choose among all observed classes without a task identifier. This constraint is operationally meaningful when previous attack captures cannot be retained indefinitely or reacquired. It does not necessarily imply that benign traffic has the same availability: a monitored network may continue to provide benign examples.

The asymmetry is useful only under an explicit assumption. The learner must have access to a sufficiently clean, representative benign source, distinct from its test data. This paper does not assume that arbitrary production traffic is correctly labeled benign. Nor do we assume that a training-domain benign hold-out guarantees the same false-positive rate (FPR) after a distribution change. Both qualifications matter in our results.

Replay-based NIDS research includes class balancing, frequency-aware replacement, representative selection, and other memory designs [1–4]. Some multiclass formulations place Normal and attack classes in a common classifier and replay budget. However, this is not a universal description of the literature: binary and novelty-detection methods use different protocols, and prior domain-adaptation work has already used new benign data outside an old attack memory [5]. The question is therefore not whether benign data have ever been treated differently. It is whether a continuously refreshed, independently calibrated detector provides useful retention and detection behavior in a multistage class-incremental experiment.

We study availability-asymmetric class-incremental learning (AA-CIL). A binary gate G is updated using newly sampled benign data, current attacks, and stored old attacks. A separate classifier F predicts attack families. A benign-only calibration pool sets G's operating threshold without test labels. Memory allocation to attack families is evaluated as a secondary component rather than presented as the principal mechanism.

The contribution is an evidence-bounded experimental study:

- An explicit separation of persistent attack replay, refreshed benign training data, and permanent benign calibration data, with each storage and training cost disclosed.
- A modular gate/family design and matched-protocol comparisons that distinguish restricted benign refresh from attack-memory reallocation.
- A low-false-alarm evaluation reporting actual test FPR, binary attack detection, family-level performance, and negative registered outcomes rather than relying on aggregate accuracy alone.
- A separately identified post-hoc control, Replay-BS, demonstrating a dataset-dependent difference

under matched benign exposure while retaining the limitation of unmatched total computation.

- A negative same-dataset AR follow-up: lower forgetting does not establish final-accuracy superiority over Replay-BS, and reduced mean incremental BAcc exposes a plasticity cost. This is a comparative RQ2 finding rather than a new-component or causal-mechanism claim; the lead-reported final summary and its provenance are explicitly distinguished from independently generated earlier results.

The study follows the original superiority protocol, the validation-selected retention protocol, and the fixed-KD reassessment, followed by a fixed-capacity retention extension. Their criteria and chronology are given in Appendix C; each retains its own outcome.

2 Literature Review

2.1 Continual and class-incremental NIDS

Table 1 separates learning settings, benign-data roles, and reporting evidence among the verified papers we reviewed. The six-paper reporting sample includes binary domain-incremental learning and unsupervised novelty detection as well as multiclass Class-IL; it is neither a homogeneous benchmark nor an exhaustive survey.

CBRS-NIDS distinguishes balancing benign versus pooled attacks from balancing original classes [1]. ECBRS uses frequency-driven replacement and minority protection, whereas SSF selects and removes samples according to distributional relevance [2, 3]. These are predefined *rules*, not numerically fixed class quotas. SPIDER retains previous-task unlabeled samples and uses gradient-projection memory; CND-IDS instead regularizes latent representations and retains a clean Normal reference set [6, 7]. ACIL evaluates multiple replay strategies and explicitly reports forgetting [4]. ROC-AUC, benign PR-AUC, and Normal-class accuracy must not be substituted for a separately specified benign-FPR operating point.

The closest availability precedents prevent a universal memory-competition claim. Cerasuolo et al.'s Computer Networks model retains old benign and attack exemplars, with 25 exemplars per class rather than a demonstrated constant total budget [8]. Their EAAI study also receives target-domain benign data [9]. Most importantly, their RTSI adaptation adds benign data outside an old attack-only memory [5]. That experiment already establishes this broad availability pattern; it does not establish repeated benign refresh in an independently trained and calibrated gate over multiple attack increments. TS-mem here is a controlled restricted-refresh ablation, not a faithful reproduction of those systems.

Wang and Cao describe anti-forgetting learning followed by unbiased prediction [10]. Only the official abstract and publication record were available: benign availability, replay contents, and a gate/family interpretation remain unverified. This paper is excluded from the reporting count, and missing full text is not novelty evidence.

Ariffin et al. [11] retain benign examples throughout replay, sharing our concern for continued benign exposure. Their single TabTransformer uses a shared buffer, without a separate gate or fixed-FPR calibration. They report accuracy, macro-F1, forgetting and intransigence on eight CICIDS2017 classes with seed 42, but no FPR. Their Section 5.7 reports replay final overall accuracy of 0.964/0.966/0.948 for MLP/CNN/FT-Transformer under a separate preprocessing pipeline; these are not balanced accuracies or matched comparisons with ours. Our registered backbone/capacity checks remain pending; no comparative advantage is established. This additional context does not change the six-paper sample below.

G1: Joint operating-point and retention reporting. Five of the six papers in the targeted reporting sample do not separately report fixed-operating-point benign FPR in their inspected main results; ACIL has partial or indirect benign reporting. The review record does not establish a joint forgetting-and-fixed-FPR detection evaluation in this sample. This bounded finding is not a claim that no prior paper reports such evidence, nor that unverified forgetting fields mean absence.

G2: Conditional competition for benign replay. Shared benign/attack memory in CBRS, ECBRS, SSF, ACIL, and the Computer Networks study motivates examining limited replay allocation. Competition under a fixed total budget is a setting-dependent constraint, not a universal property or an identified cause of forgetting. RTSI and CND-IDS are explicit counterexamples to a universal shared-buffer description. The unresolved empirical question is the incremental value of repeated benign refresh and separate family learning under disclosed storage and exposure costs.

2.2 Bias correction in Class-IL

BiC learns a post-training correction [12]; weight alignment adjusts classifier scale [13]; separated softmax and taskwise distillation address cross-task interference [14]; end-to-end incremental learning includes balanced fine-tuning [15]. Logit adjustment uses class-prior information to alter scores and is a long-tail classification approach, not by itself a Class-IL algorithm [16]. These are relevant controls for shared-classifier imbalance, but their distinct training, calibration, and inference operations must not be conflated.

G3: From class bias to benign-alert control. These reviewed formulations do not themselves specify the refreshed benign source, independent benign–attack gate, and benign-only FPR calibration studied here. Correcting old/new-class bias therefore does not establish control of benign-to-attack false alarms or preservation of attack-family recall. This is a protocol

Table 1: Targeted NIDS literature comparison. The first six rows form the reporting sample. "Not separate" refers only to the inspected main results; "unverified" means the retained source record does not settle that field, not that the paper omits it. The last four rows supply availability context and are excluded from the six-paper count.

Work	Setting	Benign handling	Fixed-point benign FPR in main results	Forgetting evidence
CBRS-NIDS [1]	Binary output; sequential attacks	Shared replay; pooled-attack or original-class balancing	Not separate	Unverified
ECBRS/PAPA [2]	Binary domain-IL	Shared replay; frequency-driven replacement	Not separate	Unverified
SPIDER [6]	Semi-supervised binary domain-IL	Previous-task unlabeled samples; benign quota unverified	Not separate	Unverified
SSF [3]	Binary continual / drift	Shared fixed buffer; representative selection	Not separate	Unverified
CND-IDS [7]	Unsupervised binary novelty	Clean Normal reference set; no old-attack replay	Not separate	BWT reported; explicit forgetting unverified
ACIL [4]	Binary and multi-class	Shared replay; several strategies	Partial / indirect Normal reporting	Forgetting and BWT reported
Cerasuolo, ComNet [8]	Multiclass Class-IL	Normal in old-class replay; 25 exemplars per class	Unverified	Unverified
Cerasuolo, RTSI [5]	Multiclass; benign adaptation	New benign outside old attack-only memory; one adaptation	Unverified	Unverified
Cerasuolo, EAAI [9]	Cross-domain class adaptation	New-domain benign plus source-class memory	Unverified	Unverified
Wang and Cao [10]	Class-IL; details unverified	Abstract only, not verified	Unverified	Unverified

and endpoint distinction, not a proof that the original methods cannot be adapted, or that a binary gate is novel. Negative results for our tabular adaptations do not reject the original algorithms in general.

2.3 Replay and distillation

iCaRL combines exemplar retention and incremental representation learning [17]; Dark Experience Replay and DER++ retain historical responses alongside supervised rehearsal [18]. They supply replay and retention references, not ready-made evidence for decoupled NIDS. Their mechanisms and buffering schemes must not be treated as interchangeable. Image-domain results and original buffer policies are not automatically reproduced by tabular adaptations.

Our fixed-capacity KD+WA candidate reuses distillation, DER-style replay, and weight alignment; none of these components is claimed as new. *The remaining G3 evaluation gap* is whether their combination in separate detection and family learners preserves old attacks while learning new ones at a disclosed false-alarm operating point. That claim requires matched controls and joint accuracy/forgetting reporting, not simply the presence of KD or WA. The failed CSE confirmation reported below limits this candidate's claim rather than changing the literature gap. G1–G3 organize this bounded prediction/retention study under the broader RQ2; they do not replace the unanswered explanation-drift RQ1 or governance RQ3.

3 Problem Analysis

3.1 A corrected experimental basis

The motivating experiments use a taskwise minimum-update schedule rather than only a small fixed number of epochs. This prevents late, rare attack tasks from receiving arbitrarily few optimizer updates. Old attack classes are accessible only through stored training and validation rows after their introduction. Frozen preparation and duplicate/conflict handling are retained across methods; "deduplicated UNSW-NB15" does not imply that every benchmark is free of feature collisions or label conflicts. Historical experiments that revisited complete old attack pools are not used as evidence for the present access-constrained protocol. That old-pool resampling was a bug in this project's earlier implementation. The undertraining and data-quality issues identified in that development history are not attributed to published methods without source-specific evidence.

3.2 False alarms are important, but not a universal root cause

An earlier decomposition of the historical S2000 DER++ final confusion matrices showed substantial Normal-origin false positives in CIC-IDS-2017 attack-family columns, including families with high recall but low precision. These DER++ proportions must not be assigned to every method. UNSW-NB15 also exhibited attack-to-attack confusions and lost attack re-

call. These observations justify measuring benign FPR and attack detection separately, but do not identify inadequate benign coverage or Normal–attack memory competition as a universal causal explanation. The decomposition is arithmetic, not an intervention proving a mechanism.

Under the registered correction sweep, the best tested correction/base combinations closed only 4.92% and 19.23% of the positive Joint-minus-incremental Macro-F1 gaps on UNSW-NB15 and CIC-IDS-2017, respectively. This rejects the sufficiency of those specific adaptations and candidate ranges, not bias correction in general. Joint is an offline reference rather than a guaranteed numerical upper bound.

3.3 Why change the learning organization?

The preceding FARQ experiments adjusted shared replay allocation using measured validation false alarms. Their registered main criterion failed, and descriptive operating curves did not establish a universally superior false-alarm/detection frontier. Replay+LA and Replay share the same attainable predictions when the total adjustment is recalibrated; this does not make all allocation methods threshold-equivalent. WACB and Freq change the learned model and improve detection relative to Replay at evaluated matched-FPR points on UNSW-NB15 and CIC-IDS-2017. Memory reallocation can therefore improve the measured trade-off, although it does not close every offline-reference gap. These finite operating-point comparisons are not a global frontier theorem. AA-CIL tests a different learning organization, not a premise that every shared-classifier method merely moves along one common curve.

4 Method: AA-CIL

4.1 Data roles and access assumption

At update t, let $\mathcal{A}_t$ be the observed attack families and $\mathcal{N}_t$ the newly introduced attack families. The learner receives their current training data D_t^A, retained old attack training memory $R_{t-1}^{A,\mathrm{tr}}$, and a benign training source B^{tr}. A permanent benign calibration pool B^{cal} is disjoint from every optimizer input. We assume continued access to B^{tr} but not to the original pools of old attacks.

The benchmark simulates benign availability by drawing a task-dependent sample $B_t \subseteq B^{\mathrm{tr}}$ of up to 50000 rows. Samples may overlap across tasks; this is repeated access to a fixed prepared training source, not evidence from a newly collected live stream. The permanent split prevents a calibration row from later becoming a training row.

4.2 Independent detector and family learner

The gate is a binary MLP trained on

$$D_t^G = B_t \cup D_t^A \cup R_{t-1}^{A,\mathrm{tr}}. \tag{1}$$

Its labels are benign versus attack. The family MLP is trained on

$$D_t^F = D_t^A \cup R_{t-1}^{A,\mathrm{tr}}, \tag{2}$$

using attack-family labels only. Both use the existing class-balanced cross-entropy implementation and retain learned parameters between updates. Their optimizers and costs are separate. Neither model receives calibration data as optimization input.

For exact implementation fidelity, the family network is initialized with the benchmark's full attack-label output dimension. Training follows the shared replay cross-entropy implementation, while inference restricts the argmax to observed attack families. Thus this experiment assumes a known finite benchmark label universe; it is not a claim about an unbounded, dynamically expanding unknown-label vocabulary.

4.3 Attack replay allocation

Let $K_t = |\mathcal{A}_t| + 1$, including Normal, and let m be the common per-observed-class budget. The shared capacity is

$$M_t = mK_t, \qquad m = 200. \tag{3}$$

AA-CIL divides M_t among observed attacks: $q_{t,c} = \lfloor M_t/|\mathcal{A}_t| \rfloor$ plus one for the first remainder classes in ascending class-ID order. This is a capacity ceiling, not a promise of equal actual occupancy. Each class allocation contains separate training and validation slots; validation rows do not enter optimization. When a class is new, examples can be selected from its prepared training and validation partitions. Once it is old, the corresponding retained arrays are the only permissible source, even if a later quota exceeds available rows. Unused slots remain unused; old pools are never revisited to fill them.

This allocation transfers the nominal Normal share to attacks. It does not make benign data free in a physical-storage sense: both benign training samples and the permanent calibration pool are disclosed outside M_t. The no-transfer ablation tests whether this allocation adds value beyond benign refresh.

4.4 Calibration and inference

Let $s_G(x) = z_A(x) - z_B(x)$ be the gate's attack-minus-benign logit margin. For $n = |B^{\mathrm{cal}}|$, sort its margins as $s_{(1)} \le \cdots \le s_{(n)}$ and set

$$k_\alpha = \lfloor \alpha n \rfloor, \qquad q_{t,\alpha} = s_{(n-k_\alpha)}. \tag{4}$$

The strict decision $s_G(x) > q_{t,\alpha}$ bounds the empirical calibration false-alarm count by k_α, including ties. No randomized tie breaking is used. Prediction is

$$\hat{y}(x) = \begin{cases} \text{Normal}, & s_G(x) \le q_{t,\alpha}, \\ \arg\max_{c \in \mathcal{A}_t} F_c(x), & s_G(x) > q_{t,\alpha}. \end{cases} \tag{5}$$

This is an empirical training-holdout operating point, not a distribution-free guarantee on test or deployment FPR. Gate false negatives cannot be recovered by the downstream family classifier.

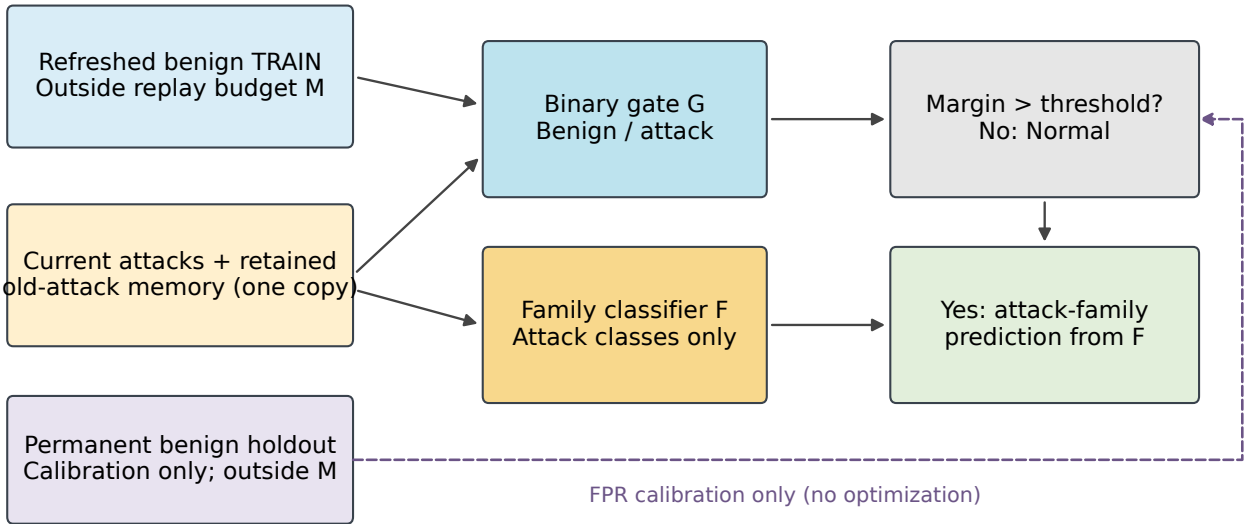


Figure 1: AA-CIL separates detection from family classification. The calibration pool never enters training. A single retained attack memory supplies both learners and is counted once; two networks and both training schedules are counted in cost.

Algorithm 1 One AA-CIL update

Require: Current attacks D_t^A; retained attack memory R_{t-1}^A; benign pools $B^{\text{tr}}, B^{\text{cal}}$

1: Sample B_t from B^{tr} only.
2: Train G on $B_t \cup D_t^A \cup R_{t-1}^{A,\text{tr}}$.
3: Train F on $D_t^A \cup R_{t-1}^{A,\text{tr}}$.
4: Allocate attack capacities $q_{t,c}$ within M_t.
5: **for** each observed attack c **do**
6: Select new-class rows, or subsample retained old rows; keep training and validation disjoint.
7: **end for**
8: Calibrate $q_{t,\alpha}$ on B^{cal}; do not update weights.
9: Save models, retained memory, allocation, costs, and operating-point confusion matrices.

4.5 Post-hoc retention extension: AA-CIL-KD

The original AA-CIL gate relies on attack replay without an explicit response-retention loss, and its family learner uses ordinary replay. AA-CIL-KD is a post-hoc extension to that study, with its protocol and success criteria registered before observing any KD results. It adds a gate loss

$$\mathcal{L}_G = \mathcal{L}_{\text{CE},G} + \lambda_G \mathcal{L}_{\text{MSE},G}. \tag{6}$$

For retained old attack training rows, the gate targets are the stored two-logit responses recorded when those rows entered memory. For the current benign sample, targets come from the frozen preceding-task gate. New attack rows have no old-class distillation target, and the first task has no preceding-task gate. Neither calibration rows nor attack validation rows become optimizer inputs.

The attack-only family learner uses a task-boundary DER++-objective adaptation: supervised learning is supplemented by replay cross-entropy and MSE against stored family logits. This is not a claim to reproduce the original DER++ online storage schedule. Gate and family logits are auxiliary records for the same attack rows, not two separately allocated sample memories; their storage and the two training costs must be disclosed. The update budgets, benign refresh, permanent holdout and threshold policy remain those of AA-CIL.

An initial development search used mean stagewise validation balanced accuracy and varied three distillation coefficients. It was superseded before formal KD results by the retention-constrained selection below. Its completed runs remain part of the development cost, but do not enter the new selection. The previously planned noGKD ablation is not one of the five family-model candidates in this revised experiment.

4.6 Post-hoc parameter isolation: AA-CIL-ISO

AA-CIL-ISO changes only the family learner relative to AA-CIL-KD: the gate, G-KD objective, benign refresh and calibration remain the same. It uses the existing MLP feature encoder. On the first task containing attacks, the encoder and that task's new family heads train jointly within one family-model update budget. The encoder is then frozen. Each new family c receives its own rank-8 residual adapter and two-logit binary head,

$$h_c = h + U_c V_c h, \qquad p_c(x) = \text{softmax}(H_c h_c)_1. \tag{7}$$

The head learns that family versus the other attacks available in the current task and legal old-attack replay. Multiple new families provide negatives for one another. Normal rows are not used as family-head negatives. After the task, its adapters and heads are frozen permanently; old attack pools are never reopened.

All heads introduced in one task share a single training loop: their class-balanced binary cross-entropies are averaged before each optimizer step. Each new head participates in the task's common max(8 epochs, 2000 steps) schedule, rather than receiving an additional serial budget per head. The first encoder training has no separate pretraining budget. Joint family-loop time and shared steps are recorded once; exclusive per-head time is not inferred from that total. If the first task contains only one attack family, there are no other-attack negatives: this limitation is recorded explicitly, without invented negatives or benign substitution.

After the gate declares an attack, prediction is $\arg\max_{c \in \mathcal{A}_t} p_c(x)$ over independently normalized positive probabilities. This is head-only inference with no router and no cross-head softmax calibration. It adapts OFRA-style parameter isolation to the present backbone and is evaluated under the validation-selected retention protocol, with descriptive paired comparisons against KD.

4.7 Retention alternatives and validation-only selection

The revised experiment compares five family learners under the same G-KD gate: KD, ISO, weight alignment (WA), class-balanced fine-tuning (CBF), and nearest-class-mean prediction (NCM). WA rescales newly introduced classifier weights by the mean old-to-new weight-norm ratio after task training [13]. CBF adds small-learning-rate updates on balanced retained attack training memory [15]. NCM computes class prototypes from retained attack training rows encoded by the current family encoder and predicts by feature-space distance [17]. These are adaptations of established mechanisms, not claims of novel versions of the cited algorithms. Their additional time, steps, prototype storage and model storage are reported separately.

Only UNSW-NB15 development seeds $\{5, 6\}$ select hyperparameters and the main version. Each candidate uses $\lambda_G \in \{0.5, 1, 2\}$; KD fixes both family DER coefficients to one. CBF uses 0.1 times the base learning rate and either one or five fine-tuning epochs. A stratified permanent 10% attack holdout supplies fixed validation cohorts across stages; it is never optimized, is accessible only for this development evaluation, and its storage is disclosed outside the replay budget. The permanent Normal holdout supplies the gate threshold at $\alpha = 2\%$ and the Normal validation cohort. This development-only access exception does not reopen old attack training pools or change formal replay access.

For each version, eligible configurations have final validation balanced accuracy at least the original AA-CIL development mean minus three percentage points. The configuration with lowest mean validation forgetting is retained, and the lowest-forgetting eligible version is selected as the candidate main method. All choices are frozen across datasets before evaluation seeds $\{1, 2, 3, 4, 42\}$ are used. Every version is reported, not only the selected one. If no configuration is eligible, there is no eligible main method; any configuration retained for descriptive formal reporting is explicitly a fallback, not an eligibility success. Test labels never select the gate threshold, hyperparameters, or main version.

4.8 Fixed-capacity retention candidates

A subsequent extension constrains the family learner to a fixed parameter count across tasks, no more than twice the full original family model, at most one extra component, and a single inference model. KD-weak reduces the family DER coefficients; KD+WA and KD+CBF apply alignment or balanced fine-tuning after KD. EMA-KD maintains one slow family copy (decay 0.999), uses replay-logit MSE with weight one, and predicts only with that copy. DUAL uses two fixed encoders and a joint concatenation head: the stable encoder has the frozen KD coefficient, while the plastic encoder has no distillation loss. The all-attack output capacity is allocated initially; unseen classes remain masked until introduction. There is no taskwise branch expansion.

The fixed-capacity retention protocol uses both UNSW-NB15 and NSL-KDD development seeds $\{5, 6\}$ with the fixed attack validation cohorts and permanent Normal holdout. It requires each dataset's validation forgetting to be at most its lowest external-five value plus one percentage point before comparing mean validation final BAcc. Within one point of BAcc, the simpler candidate is preferred. Gate coefficients are $\lambda_G \in \{0.25, 0.5\}$; KD-weak searches each DER coefficient in $\{0.25, 0.5\}$, and the other KD configurations retain coefficients of one. CBF uses one epoch at 0.1 times the base learning rate. If no candidate meets both forgetting constraints, the lowest-mean-forgetting version is frozen only as an explicitly ineligible descriptive fallback. All five candidates are reported on formal seeds, with UNSW and NSL still designated development datasets.

5 Experimental Setup

5.1 Benchmarks and task protocol

We use the prepared NSL-KDD, deduplicated UNSW-NB15, and CIC-IDS-2017 benchmarks [19–21]. Normal and an initial attack family appear in the first task, followed by the fixed attack-family sequence. The data manifest and generated protocol table specify label mappings, task groupings, split sizes, and feature dimensions. Test rows from unobserved classes are excluded at intermediate checkpoints; final metrics use the complete prepared test set. No test row is selected for training, memory construction, or primary calibration. The additional withheld CSE-CIC-IDS2018 assessment uses the bound full cache with 12,882,081 training rows, 3,255,102 test rows and 78 features. Its four tasks are: Normal, DoS; DDoS, Bruteforce; WebAttack, Infiltration; Botnet. The same full-cache rows, task order, update rule and calibration policy

Table 2: Dataset/task and final-budget summary. Calibration bytes include float32 features and int64 row indices, exclude model state and dense labels. The pool is shared by all methods, excluded from optimization, and outside M.

Dataset	Classes	Tasks	M ceiling	Calib rows	Calib bytes
NSL-KDD	5	4	1000	6735	3178920
UNSW-NB15	10	5	2000	6825	1911000
CIC-IDS-2017	8	4	1600	181176	57251616

Table 3: Prepared split sizes, feature counts and fixed task groupings (class IDs). These are the exact prepared benchmark arrays, not an assertion of temporal deployment validity.

Dataset	TRAIN rows	TEST rows	Features	Task IDs (semicolon separates tasks)
NSL-KDD	125973	22544	116	0,1; 2; 3; 4
UNSW-NB15	120991	30248	68	0,1; 2,3; 4,5; 6,7; 8,9
CIC-IDS-2017	2262203	565673	77	0,1; 2,3; 4,5; 6,7

NSL-KDD: 0=Normal, 1=DoS, 2=Probe, 3=R2L, 4=U2R. UNSW-NB15: 0=Normal, 1=Generic, 2=Exploits, 3=Fuzzers, 4=DoS, 5=Reconnaissance, 6=Analysis, 7=Backdoor, 8=Shellcode, 9=Worms. CIC-IDS-2017: 0=Normal, 1=DoS, 2=DDoS, 3=Bruteforce, 4=PortScan, 5=WebAttack, 6=Botnet, 7=Infiltration.

are bound across methods. The permanent Normal calibration holdout contains 1,070,273 rows (342,487,360 feature/index bytes), outside replay memory and never optimized. These fields are taken from the released execution identities, not inferred from the dataset name.

Training uses MLPs with two hidden layers of width 128, Adam with learning rate 0.001, and batch size 256. Each model/update receives

$$S_t = \max(2000, 8\,\lceil |D_t|/256 \rceil) \tag{8}$$

optimizer steps. Consequently, matching this schedule does not imply identical realized steps when data exposure differs. Gate and family schedules are recorded separately. The registered seed set contains 5 seeds; tables report actual completed n where the cutoff prevents a complete group. Partial groups are not silently replaced with selected favorable seeds.

The observed local GPU is an NVIDIA GeForce RTX 4060 Ti with 8 GiB memory; the HPC execution environment uses NVIDIA A100 GPUs. HPC results are included only after completed execution, not merely submission or allocation. Heterogeneous hardware and shared local GPU use mean that reported runtimes are not a controlled hardware benchmark.

5.2 Comparators and ablations

The external comparison set is Replay, DER++, WACB, Freq, and Replay+LA. Replay uses the common tabular architecture. DER++ is the recorded tabular adaptation with classwise memory management, not an exact replication of the original vision protocol. WACB adapts benign-versus-combined-attack balancing to this multiclass setting. Freq is a simplified frequency-proportional allocation control, not an exact ECBRS reproduction. Replay+LA is a saved-model logit-adjustment evaluation; it is not an additional independently trained network. All primary operating thresholds are determined from the same permanent benign calibration pool.

TS-mem retains the same gate/family organization but restricts each task's benign refresh to the training portion of the ordinary Normal allocation, while sharing replay capacity between Normal and attacks. It therefore measures a restricted benign exposure policy, not the effect of a frozen benign subset alone. AA-noAttMem retains refreshed benign training and the independent gate but does not transfer the Normal allocation to attacks. Its name does not mean that attacks have no replay memory.

Joint trains with the offline data available under its recorded protocol and is reported as a reference. It is not a guaranteed upper bound, a matched-storage online learner, or a member of the strongest-baseline selection. FARQ is supplementary. The registered selection includes the external methods *and* TS-mem and AA-noAttMem; excluding those ablations after inspecting results would change the registered question.

5.3 Metrics and registered inference

For confusion counts C_{ij} with Normal index b, we report

$$\mathrm{FPR} = \frac{\sum_{j \neq b} C_{bj}}{\sum_j C_{bj}}, \tag{9}$$

$$\mathrm{ADR} = \frac{\sum_{i \neq b} \sum_{j \neq b} C_{ij}}{\sum_{i \neq b} \sum_j C_{ij}}. \tag{10}$$

ADR is binary attack detection, not correct-family recall. Macro-F1 and attack-family macro recall supplement it. The registered family-recall guard includes attack classes meeting the specified minimum test support; excluded rare classes remain visible in per-class evidence. Precision is undefined for a class with no predictions in a seed and is never changed to zero. Its group mean and sample standard deviation use only defined seed values, with the actual n_{defined} (`defined_n`) reported separately from the total seed count. If none are defined, the mean remains undefined; with fewer than two defined values, the sample standard deviation is undefined. Such a seed is not dropped from recall, forgetting, or other defined endpoints.

The primary calibration target is $\alpha = 2\%$. Actual test FPR is reported alongside it because equal cal-

ibration targets need not yield equal test FPR. The original superiority protocol requires a one-sided paired test against the highest-mean registered comparator in at least two datasets. The comparator is chosen once per dataset and endpoint from whole-seed means, not separately per seed. Other criteria concern Macro-F1 harm, attack-family recall, the CIC gate-refresh ablation, and descriptive cost/Joint reporting. Paired differences, sample standard deviations and effect sizes accompany complete five-seed comparisons. Appendix C defines all three protocols and their distinct comparator sets.

6 Main results: default decisions

The main comparison uses uncalibrated decisions: argmax over seen classes for single classifiers, and a strict gate probability $P(\text{attack}) > 0.5$ followed by the seen-family argmax for two-stage methods. No calibration data or FPR threshold search enters this view. Tables 4–6 report final accuracy, macro-F1 and weighted-F1, mean stage accuracy (ACC), old-class recall BWT, and signed forgetting. BWT compares final recall with recall at class introduction; forgetting compares it with the best preceding recall. Both include Normal and weight old classes equally. These are different estimands from stage balanced accuracy and from calibrated retention below.

The tables retain every requested comparator by name and show unavailable default-view seed blocks explicitly. The fresh seed block is 10–14; historical seeds are not mixed into it to fill missing cells. ER default exports are now complete on both datasets. No calibrated confusion matrix is relabelled as a default decision. Earlier results and their actual seed counts remain reported in the subsequent analysis and appendices.

At default decisions, AR exceeds ER-Bal-TabT on UNSW by 1.63 percentage points in final accuracy and 2.74 points in macro-F1, whereas on CIC it trails by 3.36 and 14.77 points, respectively. These are dataset-dependent descriptive differences, distinct from calibrated balanced accuracy. The two-sided paired t tests and exact sign-flip tests are shown together, without multiplicity adjustment; with five pairs the smallest two-sided exact sign-flip p is 0.0625. Thus a small paired-t value alone is not treated as robust confirmation across tests. These exploratory comparisons do not revise K1 or any historical decision.

6.1 Comparison with literature conventions

The default view supplies conventional multiclass metrics under this study's prepared data, task order and benign-access assumption. The separate supervisor-group protocol check uses CICIDS2017's eight classes, four experiences, 60/20/20 split, CI and CII settings, 10% memory, and seeds 42, 1, 2, 3, 4. Its different protocol must not be pooled with these default-view tables or described as completed parity evidence without its own results. Under our low-FPR protocol, ER-Bal-TabT remains more accurate than AR on both UNSW and CIC; this is not a claim about all deployments or a faithful replication of every supervisor-group setting.

7 Deployment under strict false-alarm budgets

Low-FPR analysis is a separate deployment question, not the main default-decision ranking. Thresholds at 1%, 2% and 5% are selected using only the permanent Normal training holdout; actual test FPR is not guaranteed. The lead-reported developmental gate-versus-same-data-single-classifier final-BAcc gains at 1% are 17.0 points on UNSW and 24.8 on CIC (five seeds each, both reported $p < 0.01$). These results do not establish default-view superiority or isolate total computation. The original failed decisions are preserved; their detailed rules and chronology are in Appendix C.

7.1 Retention and plasticity under calibrated decisions

The historical checkpoint-calibrated analysis and CSE decision rounds are retained in Appendix A. AR does not significantly improve final accuracy over Replay-BS on CSE18: lower signed forgetting accompanies approximately 4–5 points lower mean incremental balanced accuracy. These negative findings remain unchanged by the default-view presentation or the later design-space study.

7.2 Primary calibration-set operating points

Table 8 preserves the original operating-point snapshot at the common calibration target, including its then-available seed counts. It predates the supplemental Replay-BS seed 42; current five-seed CIC retention results are in Table 24. Historical operating-point tests and tables below are retained without recomputation.

On UNSW-NB15, AA-CIL obtains ADR 69.09%, Macro-F1 41.18%, and test FPR 1.92%. Relative to the strongest *external* ADR baseline, the gain is 18.67 percentage points. This comparison is descriptive with an associated paired test, distinct from the registered strongest-comparator conclusion.

AA-CIL's UNSW-NB15 Worms recall is 63.75%, with precision 3.52%; Fuzzers recall is 9.67%. The appendix reports the corresponding difficult-family metrics.

On NSL-KDD, AA-CIL reaches ADR 62.84%, compared with 69.67% for Freq. Its Macro-F1 is 55.66%, compared with 57.03% for WACB. Its test FPR, 6.15%, is substantially different from the calibration target. The method therefore neither wins across benchmarks nor delivers the nominal low-FPR operating point on this shifted test distribution.

At $\alpha = 2\%$, CIC-IDS-2017 AA-CIL has all five seeds: actual test benign FPR $1.93 \pm 0.02\%$, attack

Table 4: UNSW-NB15: literature-comparable view (default decision, no FPR calibration). Seeds 10–14, mean ± sample SD; percentages or percentage points. ACC is mean stage micro accuracy; BWT is mean old-class recall change since introduction; forgetting is signed best pre-final minus final old-class recall, including Normal. NA denotes no published default view in this seed block, not a zero or an omitted failed seed.

Method	$n/5$	Accuracy	Macro-F1	Weighted-F1	ACC	BWT	Forgetting
Replay	0	NA	NA	NA	NA	NA	NA
DER++	0	NA	NA	NA	NA	NA	NA
WACB	5	68.9 ± 0.9	40.3 ± 1.0	72.0 ± 0.9	77.4 ± 0.5	-29.6 ± 0.9	29.6 ± 0.9
Freq	5	71.2 ± 0.8	41.7 ± 0.9	73.9 ± 0.6	78.4 ± 0.3	-35.9 ± 1.3	35.9 ± 1.3
Replay-BS	5	69.7 ± 1.4	43.0 ± 0.9	73.9 ± 0.8	78.6 ± 0.3	-22.3 ± 2.1	22.4 ± 2.1
AA-CIL	0	NA	NA	NA	NA	NA	NA
KD+WA	0	NA	NA	NA	NA	NA	NA
AKD	0	NA	NA	NA	NA	NA	NA
Joint (offline)	0	NA	NA	NA	NA	NA	NA
AR	5	74.6 ± 0.7	45.3 ± 0.7	75.2 ± 0.3	82.6 ± 0.2	-10.9 ± 1.8	13.1 ± 1.3
AR-Joint	5	68.5 ± 1.5	36.6 ± 1.6	70.2 ± 0.9	78.4 ± 1.3	-36.7 ± 3.3	36.7 ± 3.3
ER-Bal-TabT	5	73.0 ± 0.3	42.6 ± 0.1	69.4 ± 0.4	81.2 ± 0.1	-27.1 ± 2.4	27.1 ± 2.4

Table 5: UNSW-NB15: exploratory paired default-decision comparisons, AR minus comparator, seeds 10–14. Two-sided paired t and exact sign-flip p values (all 32 assignments), unadjusted for multiple comparisons. Only complete paired blocks are tested; these tests do not replace historical decisions. Positive accuracy/F1/ACC/BWT differences favor AR; negative forgetting differences favor AR.

Comparator	Endpoint	Mean difference (pp)	p_t	p_{flip}
WACB	Accuracy	5.70	0.000352	0.0625
WACB	Macro-F1	4.97	0.000529	0.0625
WACB	Weighted-F1	3.17	0.00263	0.0625
WACB	ACC	5.22	2.92e-06	0.0625
WACB	BWT	18.65	1.08e-05	0.0625
WACB	Forgetting	-16.48	9.36e-06	0.0625
Freq	Accuracy	3.44	0.00132	0.0625
Freq	Macro-F1	3.62	0.00162	0.0625
Freq	Weighted-F1	1.29	0.0276	0.0625
Freq	ACC	4.23	2.9e-06	0.0625
Freq	BWT	25.00	2.02e-05	0.0625
Freq	Forgetting	-22.83	8.4e-06	0.0625
Replay-BS	Accuracy	4.88	0.00391	0.0625
Replay-BS	Macro-F1	2.28	0.0203	0.1250
Replay-BS	Weighted-F1	1.35	0.0571	0.1250
Replay-BS	ACC	4.00	1.09e-05	0.0625
Replay-BS	BWT	11.35	0.00174	0.0625
Replay-BS	Forgetting	-9.26	0.00178	0.0625
AR-Joint	Accuracy	6.14	0.00236	0.0625
AR-Joint	Macro-F1	8.72	0.00111	0.0625
AR-Joint	Weighted-F1	5.05	0.000459	0.0625
AR-Joint	ACC	4.19	0.00289	0.0625
AR-Joint	BWT	25.72	0.000106	0.0625
AR-Joint	Forgetting	-23.55	0.000152	0.0625
ER-Bal-TabT	Accuracy	1.63	0.00246	0.0625
ER-Bal-TabT	Macro-F1	2.74	0.00149	0.0625
ER-Bal-TabT	Weighted-F1	5.82	1.41e-06	0.0625
ER-Bal-TabT	ACC	1.38	4.95e-05	0.0625
ER-Bal-TabT	BWT	16.21	0.000268	0.0625
ER-Bal-TabT	Forgetting	-14.03	0.000564	0.0625

detection 83.66±2.83%, and Macro-F1 63.15±1.14% (mean ± sample SD). Against DER++ from the registered seven-comparator set, AA-CIL minus comparator ADR is -5.63±4.15 pp (one-sided $p = 0.98070$), which does not meet the dataset-level positive-difference and one-sided $p < 0.05$ condition. Against DER++ from the external-only comparator set, AA-CIL minus comparator ADR is -5.63±4.15 pp (one-sided $p = 0.98070$), which does not meet the dataset-level positive-difference and one-sided $p < 0.05$ condition.

7.3 Historical negative outcome

On UNSW-NB15, the strongest registered ADR comparator is AA-noAttMem, not Freq. AA-CIL's paired mean advantage is 1.15 percentage points, with one-sided $p = 0.0748$. It does not pass the registered significance criterion. NSL-KDD also fails the superiority requirement. Even a favorable CIC-IDS-2017 result cannot then provide superiority in the required majority of datasets. The primary registered criterion and conjunction are therefore negative; remaining individual criteria retain their actual complete or incomplete states. The criterion-by-criterion record is retained in Appendix C.1.

The separately reported external-baseline comparison does not alter this protocol's strongest-comparator definition or negative outcome.

7.4 What the ablations identify

On UNSW-NB15, TS-mem achieves ADR 24.79%, compared with 67.94% for AA-noAttMem. The latter uses greater benign refresh while retaining ordinary attack allocations.

The AA-CIL–AA-noAttMem contrast measures

Table 6: CIC-IDS-2017: literature-comparable view (default decision, no FPR calibration). Seeds 10–14, mean ± sample SD; percentages or percentage points. ACC is mean stage micro accuracy; BWT is mean old-class recall change since introduction; forgetting is signed best pre-final minus final old-class recall, including Normal. NA denotes no published default view in this seed block, not a zero or an omitted failed seed.

Method	$n/5$	Accuracy	Macro-F1	Weighted-F1	ACC	BWT	Forgetting
Replay	0	NA	NA	NA	NA	NA	NA
DER++	0	NA	NA	NA	NA	NA	NA
WACB	5	91.8 ± 1.2	55.3 ± 1.6	93.7 ± 0.9	93.9 ± 0.6	-3.5 ± 0.8	3.5 ± 0.8
Freq	5	92.4 ± 1.1	56.7 ± 1.1	94.0 ± 0.9	94.4 ± 0.7	-6.3 ± 1.0	6.3 ± 1.0
Replay-BS	5	91.8 ± 1.1	57.3 ± 1.5	93.7 ± 0.7	95.9 ± 0.3	-3.4 ± 1.2	3.4 ± 1.2
AA-CIL	0	NA	NA	NA	NA	NA	NA
KD+WA	0	NA	NA	NA	NA	NA	NA
AKD	0	NA	NA	NA	NA	NA	NA
Joint (offline)	0	NA	NA	NA	NA	NA	NA
AR	5	95.2 ± 0.4	62.8 ± 0.6	96.1 ± 0.3	96.9 ± 0.3	-4.2 ± 1.5	4.4 ± 1.4
AR-Joint	5	95.3 ± 0.2	63.4 ± 0.6	96.1 ± 0.2	97.0 ± 0.2	-5.0 ± 0.8	5.2 ± 0.8
ER-Bal-TabT	5	98.6 ± 0.2	77.6 ± 5.2	98.6 ± 0.2	98.9 ± 0.1	-8.3 ± 7.8	8.3 ± 7.8

Table 7: CIC-IDS-2017: exploratory paired default-decision comparisons, AR minus comparator, seeds 10–14. Two-sided paired t and exact sign-flip p values (all 32 assignments), unadjusted for multiple comparisons. Only complete paired blocks are tested; these tests do not replace historical decisions. Positive accuracy/F1/ACC/BWT differences favor AR; negative forgetting differences favor AR.

Comparator	Endpoint	Mean difference (pp)	p_t	p_{flip}
WACB	Accuracy	3.42	0.000899	0.0625
WACB	Macro-F1	7.56	0.000522	0.0625
WACB	Weighted-F1	2.46	0.00189	0.0625
WACB	ACC	3.06	8.58e-05	0.0625
WACB	BWT	-0.78	0.429	0.3750
WACB	Forgetting	0.90	0.347	0.3750
Freq	Accuracy	2.79	0.0017	0.0625
Freq	Macro-F1	6.13	7.31e-05	0.0625
Freq	Weighted-F1	2.12	0.00474	0.0625
Freq	ACC	2.53	0.000489	0.0625
Freq	BWT	2.03	0.0393	0.0625
Freq	Forgetting	-1.89	0.0439	0.0625
Replay-BS	Accuracy	3.47	0.0042	0.0625
Replay-BS	Macro-F1	5.49	0.001	0.0625
Replay-BS	Weighted-F1	2.39	0.00206	0.0625
Replay-BS	ACC	1.04	0.009	0.0625
Replay-BS	BWT	-0.85	0.373	0.3750
Replay-BS	Forgetting	0.98	0.302	0.3125
AR-Joint	Accuracy	-0.03	0.906	0.9375
AR-Joint	Macro-F1	-0.61	0.258	0.3125
AR-Joint	Weighted-F1	0.02	0.922	0.9375
AR-Joint	ACC	-0.08	0.444	0.5625
AR-Joint	BWT	0.71	0.129	0.1875
AR-Joint	Forgetting	-0.78	0.102	0.1250
ER-Bal-TabT	Accuracy	-3.36	9.71e-05	0.0625
ER-Bal-TabT	Macro-F1	-14.77	0.00264	0.0625
ER-Bal-TabT	Weighted-F1	-2.48	0.000128	0.0625
ER-Bal-TabT	ACC	-2.01	0.000143	0.0625
ER-Bal-TabT	BWT	4.01	0.241	0.4375
ER-Bal-TabT	Forgetting	-3.93	0.252	0.4375

attack-memory transfer. Its UNSW-NB15 detection difference is small relative to the external-baseline gap and is not significant in the registered one-sided test.

7.5 Post-hoc exposure-matched and shift analyses

Replay-BS was added after the initial results as an exposure-matched control. Its single multiclass replay model uses the same refreshed benign samples, attack-only memory capacity, current attacks and calibration policy as AA-CIL.

On UNSW-NB15, AA-CIL improves attack detection over Replay-BS by 2.95 percentage points in the post-hoc paired test ($p = 0.0029$; Table 9). On NSL-KDD, the difference is 0.35 points ($p = 0.4052$), with higher test FPR and lower Macro-F1 than Replay-BS. The exposure-matched detection result therefore differs across datasets.

The diagnostic NSL sensitivity analysis contrasts training-domain benign-holdout thresholds with thresholds estimated using test-domain Normal labels. Test-Normal calibration brings the measured false-alarm rate to the target by construction but reduces attack detection and Macro-F1 for the evaluated gate variants (Table 11).

The post-hoc operating curves in Figs. 2–4 show the sampled false-alarm–detection and Macro-F1 trade-offs. Finite-grid points without a bracket remain unavailable; no extrapolation is applied.

7.6 Cost and storage

We charge the gate and family model separately and report their sum. Selection, calibration, evaluation and additional benign sample storage are separate quanti-

Table 8: Final-task test performance at a benign-holdout calibration target of $\alpha = 2\%$. Rates are percentages; mean ± sample SD. Actual test FPR is not fixed at 2%.

Data	Method	n	Test FPR	Attack detection	Macro-F1	BAcc	Attack guard
NSL	Replay	5	4.08±2.16	65.39±5.30	46.83±4.93	47.05±4.52	34.83±5.78
NSL	DER++	5	2.51±0.45	65.28±2.73	50.46±3.15	50.11±2.97	38.27±3.77
NSL	WACB	5	3.62±0.87	66.83±3.77	57.03±3.91	56.69±5.22	46.77±6.49
NSL	Freq	5	4.93±2.42	69.67±2.53	56.84±4.32	61.82±2.44	53.50±3.50
NSL	Replay+LA	5	4.08±2.16	65.39±5.30	46.83±4.93	47.05±4.52	34.83±5.78
NSL	TS-mem	5	4.41±2.12	63.19±4.66	51.44±2.16	55.62±1.58	45.62±1.92
NSL	AA-noAttMem	5	4.32±1.82	60.29±3.16	56.67±3.34	56.97±2.69	47.29±3.05
NSL	AA-CIL	5	6.15±1.79	62.84±3.46	55.66±3.36	58.26±1.85	49.36±1.98
NSL	Replay-BS (post hoc)	5	3.65±2.16	62.48±4.64	57.05±3.33	59.32±2.85	50.07±3.92
NSL	Joint (offline)	5	6.79±1.00	66.63±1.80	59.37±2.90	58.65±2.20	50.01±2.75
UNSW	Replay	5	1.78±0.20	38.52±3.77	26.27±0.85	25.15±0.89	17.04±0.98
UNSW	DER++	5	1.98±0.27	18.48±4.12	14.47±1.44	14.43±1.03	5.15±1.16
UNSW	WACB	5	1.93±0.24	48.97±4.14	32.81±1.18	29.96±1.30	22.39±1.46
UNSW	Freq	5	2.01±0.26	50.42±2.93	31.22±1.73	28.93±1.40	21.25±1.54
UNSW	Replay+LA	5	1.78±0.20	38.52±3.77	26.27±0.85	25.15±0.89	17.04±0.98
UNSW	TS-mem	5	1.98±0.12	24.79±14.93	23.47±6.33	24.97±7.34	16.85±8.15
UNSW	AA-noAttMem	5	1.94±0.19	67.94±1.58	40.43±0.51	53.98±1.02	49.09±1.12
UNSW	AA-CIL	5	1.92±0.15	69.09±0.93	41.18±0.28	55.05±1.06	50.27±1.18
UNSW	Replay-BS (post hoc)	5	2.13±0.17	66.14±0.74	39.99±1.57	38.01±1.19	31.36±1.31
UNSW	Joint (offline)	5	1.93±0.15	67.11±1.45	37.22±1.00	35.38±0.67	28.42±0.76
CIC17	Replay	5	1.95±0.06	78.89±5.63	51.52±4.02	52.32±4.55	47.87±6.55
CIC17	DER++	5	1.92±0.07	89.29±3.01	48.85±3.19	48.44±2.90	47.68±3.63
CIC17	WACB	5	1.92±0.06	88.91±2.30	57.84±1.13	63.02±1.31	59.90±0.67
CIC17	Freq	5	1.93±0.02	88.55±2.32	57.97±4.33	64.03±2.62	61.81±5.97
CIC17	Replay+LA	5	1.95±0.06	78.89±5.63	51.52±4.02	52.32±4.55	47.87±6.55
CIC17	TS-mem	5	1.89±0.06	49.51±3.90	34.63±2.25	40.34±2.01	26.88±2.99
CIC17	AA-noAttMem	5	1.94±0.03	83.13±1.48	63.60±0.78	87.50±0.35	89.21±0.46
CIC17	AA-CIL	5	1.93±0.02	83.66±2.83	63.15±1.14	87.54±0.85	89.27±1.13
CIC17	Replay-BS (post hoc)	4	1.94±0.03	92.62±1.24	69.03±1.05	79.39±4.16	82.56±5.86
CIC17	Joint (offline)	5	1.93±0.04	98.19±1.94	68.43±1.30	78.68±3.54	78.56±3.58

Replay+LA and Replay share the same calibrated total logit adjustment and weights. Joint has offline old-training access. Replay-BS is post hoc. A dash means unavailable; $n < 5$ is descriptive only. The guard alone excludes attack classes with test support below 20.
CIC-IDS-2017 AA-family coverage: 15/15 cells across AA-CIL ($n = 5/5$), TS-mem ($n = 5/5$), and AA-noAttMem ($n = 5/5$); Replay-BS is reported separately. AA-CIL and AA-noAttMem refresh benign training rows outside replay memory; ordinary replay controls use quota-limited Normal training memory. Replay-BS matches the added benign exposure and attack allocation. Computational and causal limitations are discussed in Section 8.

ties. Realized replay occupancy is reported alongside capacity because rare old classes may leave slots unused.

The permanent benign pool and the extra benign training inputs of AA-CIL, AA-noAttMem and Replay-BS are outside the replay ceiling but inside the disclosed total data footprint. TS-mem instead uses its retained Normal training rows within the ceiling. Normal validation rows already counted within TS-mem's replay allocation are not counted again as additional unique calibration rows. Successful optimization time excludes loading and serialization unless explicitly stated. Local GPU sharing and heterogeneous execution devices preclude interpreting raw runtime differences as an exclusive hardware benchmark. Failed, duplicate, or superseded executions are not scientific replicates and are accounted for separately from selected successful-cell costs.

8 Discussion and Limitations

8.1 Design-space study and negative variants

The complete 48-configuration screen used seeds 1–2, with three selected configurations evaluated on seeds 10–14. None met K1 on either dataset; no configuration was confirmed, and no further method round follows. Tables 31–32 preserve every screening configuration and the confirmation-stage comparators. T1/T2 were registered but not run (time), before scoring; they are not failed model results.

At the 1% calibration target, the leading selected configuration reaches final BAcc 51.2% on UNSW and 90.0% on CIC, versus ER-Bal-TabT's 56.3% and 92.7%. Its signed forgetting is 8.8 versus 25.0 points on UNSW, but 2.9 versus 2.7 on CIC: the forgetting advantage is not universal. AR-Joint is also retained as a negative variant (45.7% and 79.3% final BAcc). K2 passing means failure to detect significant worsening under its original rule, not demonstrated non-inferiority or equivalence. Among the selected UNSW configurations, forgetting ranges from about 8.1 to 11.6 points, so their similarity in final accuracy must not be generalized to every endpoint.

The candidate mechanism is asymmetric retention: refresh the separate benign–attack gate without retention regularization, while retaining old-attack knowledge in an attack-only family learner. DER-style replay, weight alignment and calibration are existing methods. The negative confirmation outcome neither establishes substantive novelty nor changes the locked research questions.

8.2 A useful result without a universal winner

The strongest supported observation is dataset dependent: independently calibrated benign-refresh models substantially improve the selected external-baseline

Table 9: Ablations at $\alpha = 2\%$. Paired changes are AA-CIL minus the named ablation. Tests involving Replay-BS are post hoc; small groups do not amend registered decisions.

Data	Method	n	Detection (%)	MF1 (%)	Δ detection (pp)	$p_>$
NSL	AA-CIL	5	62.84±3.46	55.66±3.36	–	–
NSL	TS-mem	5	63.19±4.66	51.44±2.16	-0.35±4.01	0.5733
NSL	AA-noAttMem	5	60.29±3.16	56.67±3.34	2.54±3.42	0.0860
NSL	Replay-BS (post hoc)	5	62.48±4.64	57.05±3.33	0.35±3.09	0.4052
UNSW	AA-CIL	5	69.09±0.93	41.18±0.28	–	–
UNSW	TS-mem	5	24.79±14.93	23.47±6.33	44.30±15.74	0.0016
UNSW	AA-noAttMem	5	67.94±1.58	40.43±0.51	1.15±1.45	0.0748
UNSW	Replay-BS (post hoc)	5	66.14±0.74	39.99±1.57	2.95±1.23	0.0029
CIC17	AA-CIL	5	83.66±2.83	63.15±1.14	–	–
CIC17	TS-mem	5	49.51±3.90	34.63±2.25	34.14±5.78	0.0001
CIC17	AA-noAttMem	5	83.13±1.48	63.60±0.78	0.53±4.02	0.3908
CIC17	Replay-BS (post hoc)	4	92.62±1.24	69.03±1.05	-8.46±2.92	0.9949

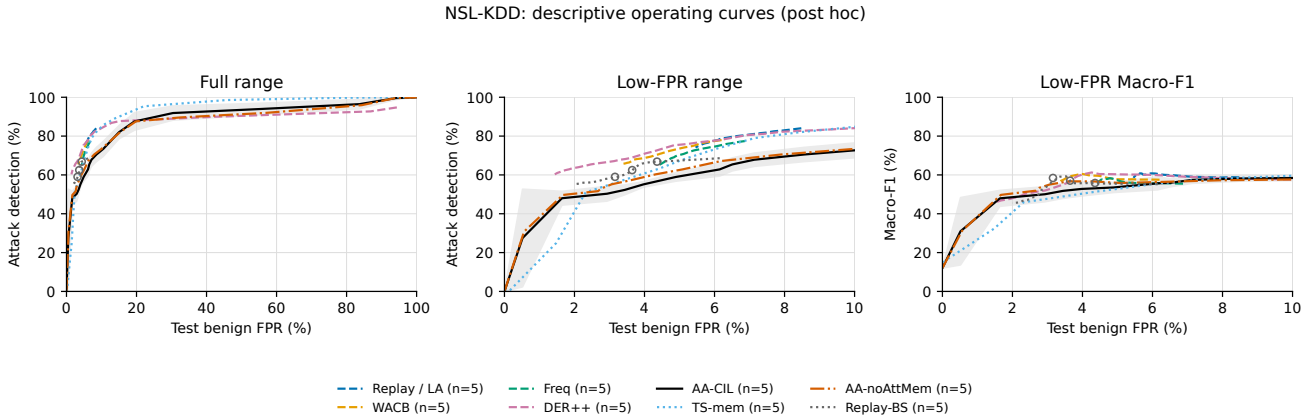


Figure 2: NSL-KDD operating curves (post hoc). Threshold-sweep summaries are descriptive, not calibration-set operating points or the registered test. Missing methods or seeds are identified in the generated panel.

Table 10: Post-hoc Replay-BS: single multiclass model with the AA-CIL benign exposure and attack replay allocation. This control was added after the original primary result.

Data	n	Test FPR	Detection	MF1
NSL	5	3.65±2.16	62.48±4.64	57.05±3.33
UNSW	5	2.13±0.17	66.14±0.74	39.99±1.57
CIC17	4	1.94±0.03	92.62±1.24	69.03±1.05

comparison on UNSW-NB15, whereas NSL-KDD does not improve the relevant registered endpoints. The evidence does not support a blanket superiority claim. In particular, favorable binary ADR can coexist with poor family discrimination: detected attacks assigned to the wrong family count as detected in ADR but not as correct in the multiclass metrics.

The work also separates a design hypothesis from its identification. TS-mem shows the outcome of restricting benign refresh within a two-model architecture. The completed Replay-BS comparison strengthens the UNSW-NB15 evidence beyond an explanation based solely on additional benign exposure. Its NSL-KDD result does not support the same benefit, and its single network still receives less total model training than the gate-plus-family configuration. The supported claim is therefore an exposure-matched, dataset-dependent configuration benefit, not a compute-isolated causal estimate of decomposition.

The TS-mem–AA-noAttMem contrast changes benign exposure, realized gate updates and temporary storage together. The attack-memory contrast isolates a different allocation decision within that design, but its nonsignificant detection difference does not establish zero benefit or dispensability. Similarly, the gate/family decomposition partitions observed errors; it cannot by itself attribute forgetting to weight interference, because the operating threshold also changes between checkpoints.

In the retained original operating-point snapshot: The TS-mem comparison gives paired AA-CIL minus comparator differences of 34.14±5.78 pp in ADR and 28.52±1.74 pp in Macro-F1; the registered one-sided Macro-F1 test has $p = 1.67\times10^{-6}$. The AA-noAttMem comparison gives paired AA-CIL minus comparator differences of 0.53±4.02 pp in ADR and -0.45±1.76 pp in Macro-F1 (one-sided ADR $p = 0.39082$). The post-hoc Replay-BS comparison is incomplete (AA-CIL $n = 5/5$, Replay-BS (post hoc) $n = 4/5$); no complete-group inference is made. Regardless of this additional comparison, the failed original superiority requirement is unchanged. A CIC-only gain would not establish a universal advantage, and a post-hoc curve or Replay-BS contrast would remain distinct from that registered decision.

Table 11: Post-hoc NSL-KDD calibration-distribution sensitivity at $\alpha = 2\%$. Test metrics are mean ± sample standard deviation in percent.

Method	Threshold calibration pool	n	Test FPR	ADR	MF1
AA-CIL	TRAIN Normal holdout	5	6.15±1.79	62.84±3.46	55.66±3.36
AA-CIL	TEST Normal (post hoc)	5	2.00±0.00	50.95±4.16	50.26±6.71
TS-mem	TRAIN Normal holdout	5	4.41±2.12	63.19±4.66	51.44±2.16
TS-mem	TEST Normal (post hoc)	5	2.00±0.00	53.55±3.31	47.81±1.00
AA-noAttMem	TRAIN Normal holdout	5	4.32±1.82	60.29±3.16	56.67±3.34
AA-noAttMem	TEST Normal (post hoc)	5	2.00±0.00	50.48±2.42	50.85±3.00

Each method uses the same paired seeds in both rows. TEST-Normal thresholds use test Normal labels and are evaluated on the same test population: this is a test-label-conditioned, non-deployable sensitivity analysis. The original superiority decision is unchanged; incomplete seed groups remain descriptive.

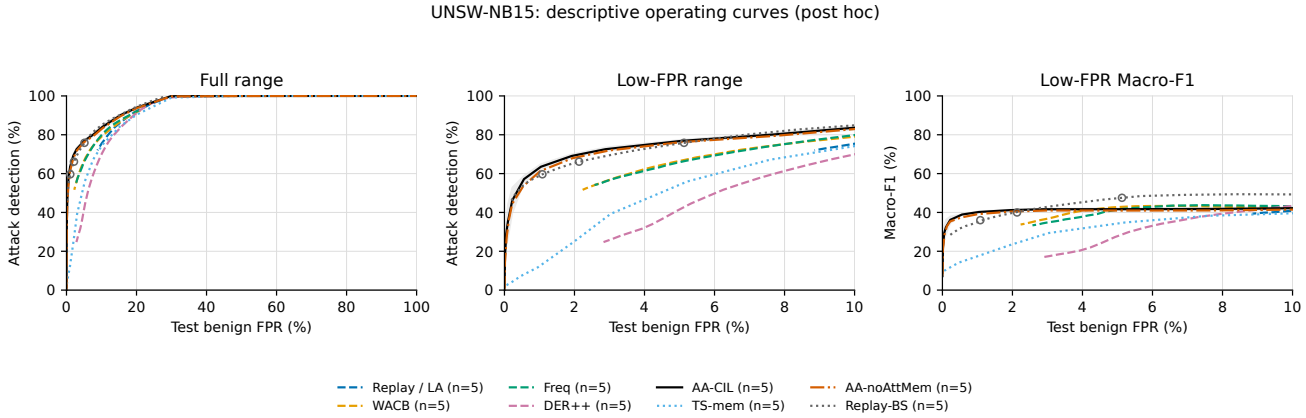


Figure 3: UNSW-NB15 operating curves (post hoc). Threshold-sweep summaries are descriptive, not calibration-set operating points or the registered test. Missing methods or seeds are identified in the generated panel.

8.3 Calibration and deployment assumptions

Clean labeled benign data are a substantial resource. They may be contaminated, costly to curate, or distributionally unrepresentative of future traffic. Refresh from a fixed training pool is only a benchmark surrogate for continuous benign availability. It does not validate resilience to poisoned benign pools, temporal drift, network migration, or delayed labels. NSL-KDD's calibration-to-test shift illustrates why a nominal calibration target must not be equated with realized deployment FPR.

The test-Normal sensitivity analysis deliberately uses test labels and is not a deployable calibration rule or a replacement for the primary result. Threshold tightening exchanges false alarms for missed attacks, and same-population calibration does not establish out-of-sample reliability. Post-hoc mean curves at a common threshold and averages of per-seed interpolated ADR at a fixed FPR are different summaries; neither changes the holdout-calibrated protocol decisions.

8.4 Scope of statistical and architectural claims

The benchmark uses few paired seeds, fixed task orders, a finite known label universe, prepared tabular features, and a shared training implementation. These choices support controlled within-protocol comparisons but do not cover arbitrary task order, unseen network environments, or open-world label discovery. A matched schedule is not matched total computation or exposure. The fixed-capacity extension uses both UNSW and NSL for validation selection, so even its later five-seed results on these datasets are developmental, not blind confirmation. CSE-CIC-IDS2018 was withheld from this selection and assessed only after complete guarded release; it fails the registered conjunction. Heterogeneous local/HPC execution limits cost comparison, and withholding results does not establish independent replication. Joint remains an offline reference whose available information differs from incremental methods.

All reported paired tests are unadjusted. Selection of a comparator from the highest or lowest observed whole-group mean and the small seed count limit inferential strength. A nonsignificant harm test is not an equivalence or noninferiority result. KD was not selected as the primary version by validation: its UNSW-NB15 reassessment is exploratory, and its NSL-KDD outcomes were already available before direct authorization. The first two NSL seeds also predate the reassessment document. We therefore do not describe NSL as blind confirmation or infer whether those available results had been inspected.

The initial manuscript window left the CIC-IDS-2017 KD group incomplete. A supplemental retention job reached the scheduler's `DEADLINE` state without allocation or execution; that job produced no scientific outcome. The subsequent deadline-free continuation completed all five KD and all five original AA-CIL trajectories. The later supplemental Replay-BS seed 42 closes its four-seed gap. Only the affected fixed-KD final-BAcc paired comparison was updated; other his-

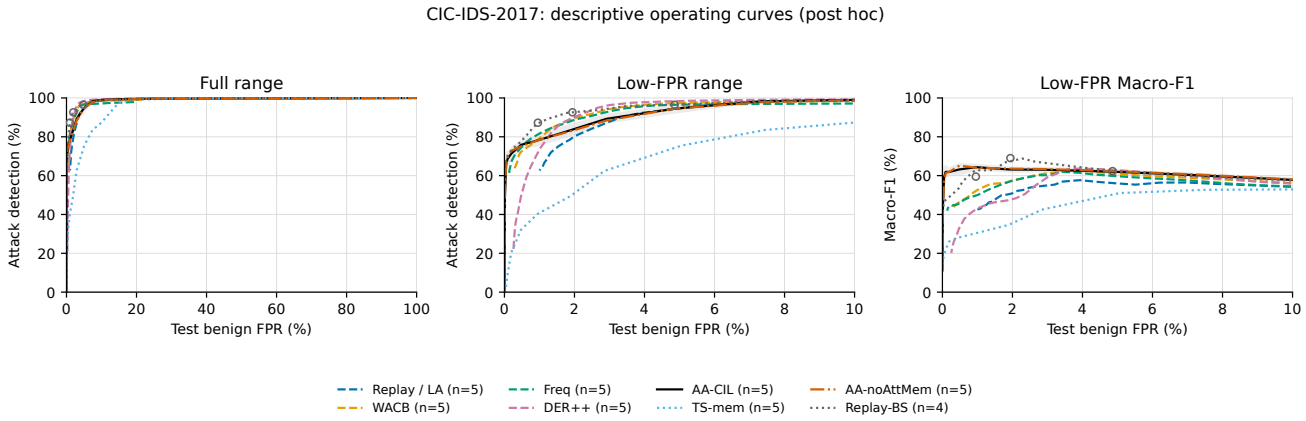


Figure 4: CIC-IDS-2017 operating curves (post hoc). Threshold-sweep summaries are descriptive, not calibration-set operating points or the registered test. Missing methods or seeds are identified in the generated panel.

Table 12: Descriptive final-task differences from the offline Joint reference at $\alpha = 2\%$. Values are AA-CIL minus Joint in percentage points; mean ± sample SD across paired completed seeds.

Dataset	Paired n	Δ FPR	Δ detection	Δ MF1
NSL	5	-0.641±1.101	-3.795±4.125	-3.706±5.262
UNSW	5	-0.006±0.118	1.981±1.719	3.959±0.990
CIC17	5	0.002±0.052	-14.531±2.836	-5.278±1.264

Joint uses offline old-training access and is neither a matched deployment baseline nor a guaranteed empirical upper bound. These gaps have no success threshold.

torical tests remain unchanged. Earlier operating-point tables and their associated interpretation retain their original four-seed Replay-BS snapshot, not a current missingness claim. Missing trajectories were missing evidence rather than negative model results.

The targeted literature review does not establish first-of-its-kind status. In particular, external benign data and attack-only old memory already appear in neighboring adaptation work. Our restricted-refresh ablation is not an implementation of that literature. Full-text unavailability for Wang and Cao further limits its precise differentiation. A novel substantive contribution would require verified distinction and an identifiable benefit beyond combining a gate, replay, and threshold calibration; neither architecture naming nor an external-baseline gain alone meets that standard.

8.5 Relation to the broader research questions

This manuscript addresses predictive retention, class-wise safety, and cost under class-incremental updates. It does not measure silent explanation drift across checkpoints, and it does not evaluate non-suppressive explanation governance. Those explanatory and governance questions remain unanswered by these experiments. Predictive gains alone cannot establish stable explanations or the safety of an explanation-governance mechanism.

9 Conclusion

The current prediction–retention comparison has a split outcome: AR is ahead of ER-Bal-TabT in default accuracy and macro-F1 on UNSW, behind on CIC, and behind in low-FPR final balanced accuracy on both. The default comparisons are exploratory and unadjusted; five-pair exact sign-flip tests cannot attain a two-sided $p < 0.05$. This is not an overall-winner or robust-superiority claim and does not close RQ1, RQ3 or the substantive-innovation requirement. Class-incremental NIDS must balance false alarms, attack detection and retention as new families arrive. The completed comparisons support a trade-off study rather than selection of an accuracy winner. The refreshed benign-stream gate is useful under the disclosed data-availability and calibration assumptions, but retention components can reduce forgetting while impairing learning of new classes. Benign-stream training with an independently calibrated gate supports strong attack detection in the studied setting, but the original decoupled model exhibits 20.04 and 11.12 pp forgetting on UNSW-NB15 and NSL-KDD. The validation-selected CBF variant failed the retention criterion; KD reduced forgetting to 2.31 and 0.98 pp with attack-detection rates of 70.53 and 71.67% at nominal $\alpha = 2\%$. Nevertheless, its final balanced-accuracy advantage over the matched-exposure Replay-BS control on NSL-KDD was not significant ($p = 0.1329$), while the NSL test FPR of 7.94% exposes calibration shift. These results support a trade-off study, not a fully resolved false-alarm–forgetting–accuracy solution. KD was not the validation-selected main version; UNSW is exploratory and NSL is not blind confirmation.

On the previously withheld CSE-CIC-IDS2018 assessment, the fixed KD+WA candidate reaches 72.69% final balanced accuracy, 5.27 pp signed forgetting and 95.44% attack detection at 1.95% test FPR. Its final

Table 13: Per-seed total training seconds across tasks and final memory occupancy. G and F are separately trained models; single-classifier methods have no G/F split. Timing excludes data loading/saving and is not an exclusive-GPU benchmark.

Data	Method	n	G (s)	F (s)	Total (s)	Used rows	G/BS benign MiB
NSL	Replay	5	–	–	31.0±0.4	852±0	–
NSL	DER++	5	–	–	70.0±1.0	986±0	–
NSL	WACB	5	–	–	30.4±0.2	927±0	–
NSL	Freq	5	–	–	31.3±1.0	784±0	–
NSL	AA-CIL	5	35.2±1.4	32.0±1.4	67.1±2.7	802±0	22.51±0.00
NSL	TS-mem	5	31.7±1.0	31.3±1.3	63.0±2.0	852±0	0.08±0.00
NSL	AA-noAttMem	5	34.7±0.8	30.6±1.1	65.3±1.8	652±0	22.51±0.00
NSL	Replay-BS (post hoc)	5	–	–	31.5±3.0	802±0	22.51±0.00
NSL	Joint (offline)	5	–	–	45.7±0.8	86±0	–
UNSW	Replay	5	–	–	34.7±0.4	1927±0	–
UNSW	DER++	5	–	–	80.0±1.6	1993±0	–
UNSW	WACB	5	–	–	34.2±1.1	2000±0	–
UNSW	Freq	5	–	–	33.6±0.7	1589±0	–
UNSW	AA-CIL	5	41.0±1.1	37.8±1.0	78.8±1.9	1905±0	13.35±0.00
UNSW	TS-mem	5	39.5±1.1	39.5±1.3	78.9±2.2	1927±0	0.05±0.00
UNSW	AA-noAttMem	5	40.5±0.6	37.9±0.4	78.4±0.9	1727±0	13.35±0.00
UNSW	Replay-BS (post hoc)	5	–	–	40.4±1.4	1905±0	13.35±0.00
UNSW	Joint (offline)	5	–	–	52.5±0.6	193±0	–
CIC17	Replay	5	–	–	219.8±6.0	1430±0	–
CIC17	DER++	5	–	–	553.9±13.2	1585±0	–
CIC17	WACB	5	–	–	223.0±3.8	1516±0	–
CIC17	Freq	5	–	–	221.2±3.5	1452±0	–
CIC17	AA-CIL	5	82.2±6.4	60.1±0.1	142.3±6.3	1402±0	15.07±0.00
CIC17	TS-mem	5	54.0±4.2	53.3±3.5	107.4±7.7	1430±0	0.05±0.00
CIC17	AA-noAttMem	5	70.9±2.8	53.0±1.9	123.9±4.3	1230±0	15.07±0.00
CIC17	Replay-BS (post hoc)	4	–	–	69.4±4.2	1402±0	15.07±0.00
CIC17	Joint (offline)	5	–	–	899.9±21.2	145±0	–

G/BS benign MiB reports final-task benign input feature-plus-index array bytes, not additional persistent storage. AA-CIL, AA-noAttMem and the single-model Replay-BS use up to 50,000 refreshed benign inputs outside M. TS-mem uses its retained training portion (normally 180 of 200 Normal slots) inside M; these bytes must not be added again to replay storage. Missing baseline byte records are shown as –, not zero. Dense-label materialization, permanent calibration features/indices, model weights and other transient copies are separate and excluded from this column; see the setup table. Joint is not a matched compute/storage baseline.

accuracy is 7.06 pp below the exposure-matched single classifier and 5.85 pp below original AA-CIL. The accuracy-superiority and two-point accuracy-cost conditions fail, while the forgetting and attack-detection harm tests do not detect significant harm. This is not equivalence or proof that retention is solved. No test result changes the selected configuration.

The later AR round does not reverse that negative history. In the lead-reported seeds 5–9 summary, AR's final BAcc is descriptively close to Replay-BS at 2%, without demonstrated superiority or equivalence. At 1%, the 1.9pp advantage is not significant: H-low's external-comparator half passes for AR, while its Replay-BS half fails. The roughly 4–5pp mean incremental BAcc cost and lower signed forgetting must be reported together. The lowest-forgetting statement is limited to the five available decision methods, not all variants; the complete nine-method descriptive extension is reported separately in Table 28 without changing the decision. No further candidate search or criterion revision follows this last round.

The resulting contribution is a reproducible study of this unresolved trade-off under an explicit benign-data availability assumption. Clean benign access, calibration shift, unmatched total computation and the CIC-IDS-2017 accuracy cost of retention limit generalization. Silent explanation drift and non-suppressive explanation governance remain separate, unanswered research questions.

Reproducibility and evidence availability

Earlier tables and numerical prose are generated from repository result files. The explicitly labelled new-seed follow-up tables and associated abstract/conclusion statements instead transcribe the lead's rounded recomputation in work-order Sections 71–72, except the 2% ADR and test-FPR columns averaged from the five saved final values per method in the published seed releases. The developmental strict-FPR gate gains in the abstract are attributed to the lead's report in Section 73.1; this editorial update does not rerun their tests. The companion code retains training configurations, seeds, taskwise confusion matrices, sample-access policies, and separate gate/family costs. Model payloads and datasets are not embedded in the manuscript. Evidence cutoffs and actual group sizes apply to their respective rounds; unfinished results are not inferred from a running process or an anticipated completion time.

A Historical checkpoint-calibrated retention

A.1 Class-incremental retention and forgetting

Class-incremental performance is evaluated before the false-alarm–detection comparison. For every saved checkpoint $t = 1, \ldots, T$, the operating threshold is de-

termined anew from the same permanent Normal calibration pool at $\alpha = 2\%$, using that checkpoint's scores. The final threshold is not retrospectively applied to earlier models. For a seen class c, let $r_{c,t}$ denote its recall under this operating point and let $\mathcal{C}_t$ be the seen-class set. We report

$$B_t = \frac{1}{|\mathcal{C}_t|} \sum_{c \in \mathcal{C}_t} r_{c,t}, \qquad \overline{B}_{\text{inc}} = \frac{1}{T} \sum_{t=1}^{T} B_t, \tag{11}$$

together with final balanced accuracy B_T. Mean incremental balanced accuracy weights stages equally, rather than pooling their examples or reporting micro accuracy.

Let τ_c be the introduction stage of class c and $\mathcal{O} = \{c : \tau_c < T\}$. Signed final forgetting is

$$\mathcal{F} = \frac{1}{|\mathcal{O}|} \sum_{c \in \mathcal{O}} \left(\max_{\tau_c \le t < T} r_{c,t} - r_{c,T} \right). \tag{12}$$

The historical maximum excludes the final stage; negative values therefore retain final improvement and are not clipped to zero. The primary definition includes Normal whenever it belongs to $\mathcal{O}$; an attack-only version excludes Normal from this same set. Classes introduced in the final task have no subsequent update and are not assigned a forgetting value. No rare-class support filter is applied to these Class-IL summaries: the support filter belongs only to the separate attack-family safety guard. We report per-seed values and their mean and sample standard deviation, with forgetting in percentage points. Low forgetting alone is not a ranking of useful retention: a class that was never learned well has little recall to lose. It must be read together with final and mean incremental balanced accuracy for every method. Incomplete trajectories or seed groups remain explicitly incomplete.

The completed original-AA trajectories show why detection and retention must be separated. On UNSW-NB15, mean incremental BAcc is 69.65%, final BAcc is 55.05%, and signed forgetting is 20.04±1.16 percentage points. On NSL-KDD, the corresponding values are 74.24%, 58.26%, and 11.12±2.70 points. A higher trajectory average therefore coexists with substantial old-class recall loss; the new KD and ISO variants target that unresolved endpoint rather than converting the earlier detection gain into a retention claim.

For each old attack class, the confusion matrix partitions its error into a gate miss (prediction Normal) and a wrong attack-family prediction. At the same class-specific pre-final peak used above, the recall loss equals the increase in these two error rates. Both components use the same class support and peak checkpoint.

The validation-selected retention protocol makes retention mandatory on both UNSW-NB15 and NSL-KDD. Its selected version must satisfy the forgetting, final-BAcc and ADR conditions in Appendix C.2. CIC-IDS-2017 is supplementary to this protocol. Mean incremental BAcc, Macro-F1 and actual test FPR accompany all five variants.

UNSW training-validation seeds 5/6 locked AA-CIL-CBF ($\lambda_G = 2$, 1 CBF epoch(s), learning-rate multiplier 0.1) as the eligible main version. AA-CIL-KD, AA-CIL-ISO, AA-CIL-NCM are reported as development-ineligible fallback configurations. Complete formal five-seed groups: UNSW 5/5 versions, NSL 5/5 versions. On UNSW-NB15, AA-CIL-ISO recorded signed forgetting of 0.018±0.032 pp alongside final balanced accuracy of 19.67±0.02%. ISO minus KD differences were -2.29±1.03 pp for forgetting ($p_< = 0.00385$) and -18.86±1.10 pp for mean incremental balanced accuracy ($p_< = 1.37 \times 10^{-6}$), using five paired seeds and unadjusted one-sided tests. The validation-selected retention protocol fails a necessary condition; the false-alarm–forgetting–accuracy trade-off remains unresolved.

Separately scoped KD reassessment. The fixed-KD reassessment uses $\lambda_G = .5$ and DER $\alpha = \beta = 1$. On NSL-KDD, the final BAcc difference from Replay-BS is 1.49±2.58 pp ($p_> = 0.1329$); the required superiority condition is not met. A necessary numerical condition fails; the trade-off remains unresolved. Across all five CIC17 KD seeds, mean incremental BAcc is 87.59±1.07%, final BAcc is 79.20±4.08%, and signed forgetting is -10.54±9.15 pp. At the nominal 2% calibration target, test FPR, ADR, and Macro-F1 are 1.93±0.04%, 92.10±2.84%, and 65.94±2.49%, respectively.The CIC-IDS-2017 KD group is complete (5/5 seeds).

Fixed-capacity retention extension. The fixed-capacity retention protocol completed validation-only selection at 2026-10-20 03:17:14.796356+08:00. None of the five candidates satisfies the forgetting constraint on both development datasets. KD+WA is retained only as an ineligible descriptive fallback with the lowest average signed validation forgetting, with $\lambda_G = 0.5$ and family DER coefficients $\alpha = 1$, $\beta = 1$. This selection did not meet the retention requirement and does not resolve the trade-off. 10 of ten UNSW/NSL five-seed candidate/dataset groups are complete. The additional CIC17 KD+WA five-seed group is descriptive, not part of validation selection. UNSW, NSL and CIC17 remain development datasets. The separately released CSE-CIC-IDS2018 assessment is reported below; it does not change the frozen selection.

Figure 5 separates predictions of Normal from wrong attack-family predictions at the final task. It does not measure forgetting without the preceding checkpoints and does not change the failed CSE assessment.

CIC-IDS-2017 development accuracy cost. On CIC-IDS-2017 the retention components remove forgetting but cost 8.3 pp final BAcc and give no gain over the same-data single classifier. Here "remove forgetting" refers to the negative group-average signed forgetting endpoint, not zero loss for every class or proof of a causal retention mechanism. The 8.3 pp cost is relative to original AA-CIL; the same-data single classifier is Replay-BS, which matches exposure but not total computation. This descriptive comparison neither

Table 14: NSL: checkpoint-calibrated Class-IL performance at $\alpha = 2\%$.

Method	n	Mean inc. BAcc	Final BAcc	Forget (all old)	Forget (old att.)	Final ADR	Final MF1
Replay	5	70.12±2.82	47.05±4.52	9.73±4.30	12.53±5.85	65.39±5.30	46.83±4.93
Replay+LA	5	70.12±2.82	47.05±4.52	9.73±4.30	12.53±5.85	65.39±5.30	46.83±4.93
DER++	5	68.13±2.81	50.11±2.97	0.91±5.03	1.04±6.67	65.28±2.73	50.46±3.15
WACB	5	73.98±2.05	56.69±5.22	4.16±2.86	5.43±3.67	66.83±3.77	57.03±3.91
Freq	5	74.82±2.70	61.82±2.44	5.25±2.76	6.35±3.65	69.67±2.53	56.84±4.32
AA-CIL	5	74.24±1.29	58.26±1.85	11.12±2.70	14.75±3.70	62.84±3.46	55.66±3.36
TS-mem	5	72.65±2.03	55.62±1.58	10.53±3.63	13.73±4.66	63.19±4.66	51.44±2.16
AA-noAttMem	5	74.31±1.46	56.97±2.69	13.78±3.47	18.82±4.61	60.29±3.16	56.67±3.34
Replay-BS (post hoc)	5	75.05±1.01	59.32±2.85	11.44±2.53	15.15±3.51	62.48±4.64	57.05±3.33
AA-CIL-KD	5	76.39±0.26	60.82±0.73	0.98±0.76	1.27±1.17	71.67±0.66	61.43±2.25
AA-CIL-ISO	5	58.29±0.60	36.50±0.58	0.06±0.14	-0.06±0.05	72.41±0.24	31.77±1.09
AA-CIL-WA	5	76.17±0.67	59.33±1.09	2.37±0.59	3.02±0.66	72.41±0.24	59.85±1.87
AA-CIL-CBF	5	76.01±0.62	59.00±1.27	2.34±0.50	2.98±0.81	72.41±0.24	59.78±2.59
AA-CIL-NCM	5	76.16±0.27	59.98±0.68	2.35±1.00	3.09±1.33	71.67±0.66	60.05±1.81
FARQ (supp.)	5	74.57±2.57	58.22±4.10	4.70±5.00	5.99±6.40	67.45±2.77	58.86±5.79
FARQ-all (supp.)	5	73.21±3.72	54.47±12.14	14.21±10.57	18.86±14.08	63.08±2.48	49.57±11.97
Joint (offline)	5	74.62±0.69	58.65±2.20	3.45±0.81	4.51±0.93	66.63±1.80	59.37±2.90

Mean±sample SD across the available seeds; accuracies are percentages and forgetting is in percentage points. Mean incremental BAcc averages all seen-class stage BAcc values. Signed forgetting compares each old class's best pre-final recall with its final recall; the primary scope includes Normal. Smaller forgetting alone is not superiority: inspect final and incremental BAcc together. Groups with $n < 5$ are incomplete, descriptive only. Joint is offline; FARQ is supplementary; Replay+LA shares Replay's calibrated total τ and incurs no separate inference. The validation-selected retention protocol reports all five F variants; the main variant is fixed by development seeds 5/6, not by this test table. These post-hoc stagewise summaries do not change the original superiority protocol decision.

Table 15: UNSW: checkpoint-calibrated Class-IL performance at $\alpha = 2\%$.

Method	n	Mean inc. BAcc	Final BAcc	Forget (all old)	Forget (old att.)	Final ADR	Final MF1
Replay	5	52.29±0.55	25.15±0.89	5.09±1.02	5.82±1.17	38.52±3.77	26.27±0.85
Replay+LA	5	52.29±0.55	25.15±0.89	5.09±1.02	5.82±1.17	38.52±3.77	26.27±0.85
DER++	5	38.73±1.38	14.43±1.03	16.16±1.80	18.44±2.04	18.48±4.12	14.47±1.44
WACB	5	55.12±1.53	29.96±1.30	3.48±2.45	3.97±2.81	48.97±4.14	32.81±1.18
Freq	5	55.83±1.60	28.93±1.40	5.50±1.25	6.27±1.43	50.42±2.93	31.22±1.73
AA-CIL	5	69.65±0.49	55.05±1.06	20.04±1.16	22.92±1.32	69.09±0.93	41.18±0.28
TS-mem	5	48.14±3.67	24.97±7.34	9.73±5.85	11.11±6.69	24.79±14.93	23.47±6.33
AA-noAttMem	5	69.28±0.39	53.98±1.02	22.02±0.87	25.16±0.99	67.94±1.58	40.43±0.51
Replay-BS (post hoc)	5	62.16±0.24	38.01±1.19	4.87±2.44	5.54±2.78	66.14±0.74	39.99±1.57
AA-CIL-KD	5	63.75±1.11	41.80±1.93	2.31±1.07	2.62±1.20	70.53±0.50	42.08±1.93
AA-CIL-ISO	5	44.89±0.03	19.67±0.02	0.02±0.03	0.01±0.02	71.01±1.16	11.47±0.01
AA-CIL-WA	5	68.25±0.47	54.24±0.79	16.21±1.09	18.51±1.25	71.01±1.16	41.35±0.32
AA-CIL-CBF	5	68.73±0.49	54.69±0.70	15.32±0.56	17.49±0.64	71.01±1.16	40.86±0.38
AA-CIL-NCM	5	68.18±0.16	51.32±1.10	18.12±2.76	20.69±3.15	70.53±0.50	38.22±1.08
FARQ (supp.)	5	54.99±1.32	27.90±1.46	6.43±2.31	7.35±2.63	45.10±4.20	30.25±1.68
FARQ-all (supp.)	5	50.90±2.38	23.24±3.19	8.41±3.96	9.58±4.51	34.56±10.80	24.30±3.56
Joint (offline)	5	62.06±0.52	35.38±0.67	5.35±1.10	6.10±1.26	67.11±1.45	37.22±1.00

Mean±sample SD across the available seeds; accuracies are percentages and forgetting is in percentage points. Mean incremental BAcc averages all seen-class stage BAcc values. Signed forgetting compares each old class's best pre-final recall with its final recall; the primary scope includes Normal. Smaller forgetting alone is not superiority: inspect final and incremental BAcc together. Groups with $n < 5$ are incomplete, descriptive only. Joint is offline; FARQ is supplementary; Replay+LA shares Replay's calibrated total τ and incurs no separate inference. The validation-selected retention protocol reports all five F variants; the main variant is fixed by development seeds 5/6, not by this test table. These post-hoc stagewise summaries do not change the original superiority protocol decision.

reselects the fixed candidate nor changes the failed historical protocols.

A.2 Withheld CSE-CIC-IDS2018 assessment

On the previously withheld CSE-CIC-IDS2018 assessment, the fixed KD+WA candidate reaches 72.69% final balanced accuracy, 5.27 pp signed forgetting and 95.44% attack detection at 1.95% test FPR. Its final accuracy is 7.06 pp below the exposure-matched single classifier and 5.85 pp below original AA-CIL. All 35 physical reference cells and five selected-candidate cells completed before the guarded releases. The four saved decisions are pass, fail, fail, pass. Criterion 1 uses Freq, the lowest-mean forgetting member of the fixed external five. Paired one-sided t-tests determine the registered significance conditions; exact sign-flip values enumerate all 32 assignments as sensitivity checks. Criterion 3 uses only the mean difference, not a significance test. Reference seeds 2/42 and selected seed 42 ran locally; the other cells ran on HPC A100. Costs retain this hardware distinction. The proposed new-attack mask is already present in the executed KD+WA code: current new attacks receive binary CE only, and gate KD applies to benign and replayed old attacks. The proposed duplicate variant was therefore not trained; any additional intervention requires a genuinely distinct specification. This source check does not establish a causal explanation of the accuracy loss.The released means also place original AA-CIL below Replay-BS in final BAcc; this descriptive comparison does not establish significance. These are the earlier fixed-KD+WA results, whose failure is retained. The subsequent AR intervention removes gate distillation while retaining the family learner's DER-style replay and weight alignment; it is not the previously proposed redundant mask.

Table 16: CIC17: checkpoint-calibrated Class-IL performance at $\alpha = 2\%$.

Method	n	Mean inc. BAcc	Final BAcc	Forget (all old)	Forget (old att.)	Final ADR	Final MF1
Replay	5	74.30±1.20	52.32±4.55	6.99±7.30	8.38±8.76	78.89±5.63	51.52±4.02
Replay+LA	5	74.30±1.20	52.32±4.55	6.99±7.30	8.38±8.76	78.89±5.63	51.52±4.02
DER++	5	76.85±0.97	48.44±2.90	17.52±6.03	21.02±7.23	89.29±3.01	48.85±3.19
WACB	5	77.43±1.19	63.02±1.31	1.97±3.48	2.36±4.17	88.91±2.30	57.84±1.13
Freq	5	76.38±1.80	64.03±2.62	4.71±9.31	5.63±11.16	88.55±2.32	57.97±4.33
AA-CIL	5	93.95±0.46	87.54±0.85	8.99±1.57	10.77±1.88	83.66±2.83	63.15±1.14
TS-mem	5	66.04±1.55	40.34±2.01	26.70±3.69	32.03±4.42	49.51±3.90	34.63±2.25
AA-noAttMem	5	93.00±0.39	87.50±0.35	9.49±0.90	11.38±1.07	83.13±1.48	63.60±0.78
Replay-BS (post hoc)	5	90.82±1.83	79.26±3.61	3.58±10.18	4.29±12.22	92.45±1.15	69.10±0.92
AA-CIL-KD	5	87.59±1.07	79.20±4.08	-10.54±9.15	-12.66±10.99	92.10±2.84	65.94±2.49
FARQ (supp.)	5	75.72±1.79	57.54±5.40	1.20±7.71	1.43±9.25	85.40±5.48	55.13±2.26
FARQ-all (supp.)	5	71.58±3.86	50.30±9.58	8.28±15.62	9.93±18.73	74.49±10.03	48.47±6.84
Joint (offline)	5	93.83±0.80	78.68±3.54	13.14±2.71	15.75±3.26	98.19±1.94	68.43±1.30

Mean±sample SD across the available seeds; accuracies are percentages and forgetting is in percentage points. Mean incremental BAcc averages all seen-class stage BAcc values. Signed forgetting compares each old class's best pre-final recall with its final recall; the primary scope includes Normal. Smaller forgetting alone is not superiority: inspect final and incremental BAcc together. Groups with $n < 5$ are incomplete, descriptive only. Joint is offline; FARQ is supplementary; Replay+LA shares Replay's calibrated total τ and incurs no separate inference. The validation-selected retention protocol reports all five F variants; the main variant is fixed by development seeds 5/6, not by this test table. These post-hoc stagewise summaries do not change the original superiority protocol decision.

Table 17: NSL: AA-CIL old-attack recall-loss decomposition at $\alpha = 2\%$.

Old attack	n	Recall loss (pp)	Δ G miss (pp)	Δ F wrong (pp)
DoS	5	14.71±3.92	13.96±4.01	0.75±0.34
Probe	5	25.06±5.05	25.40±5.60	-0.34±1.31
R2L	5	4.49±9.23	-5.77±13.47	10.27±5.49

For each seed and class, the reference is its earliest highest-recall stage before the final task. Normal-miss and wrong-attack-family rates use all true-class rows as denominator; their signed changes add to recall loss. Means add, while component SDs do not. This observed confusion-matrix decomposition does not infer F behavior on G-rejected rows.

A.3 New-seed AR retention–plasticity follow-up

Tables 29–30 present the lead's final five-seed follow-up summary. AR does not meet final-accuracy superiority over Replay-BS at either operating point. Its lower forgetting is accompanied by a mean incremental BAcc cost of about 4–5 percentage points. This is a bounded RQ2 trade-off finding, not confirmation of an accuracy-improving method, causal proof of a gate mechanism, or closure of RQ1/RQ3 and the substantive-innovation requirement. Table 28 completes all 45 cells as a descriptive extension, not in the registered decision.

B Complete design-space tables

C Decision protocols and documented chronology

This appendix makes the decision rules self-contained. Times below are the repository's document-recording timestamps, not claims of external preregistration or evidence that a reader had inspected results. Unless stated otherwise, times are UTC+08:00 on 19 October 2026. Formal comparisons use the fixed paired seeds $\{1, 2, 3, 4, 42\}$, one-sided paired t tests at $p < 0.05$, and thresholds set only from the common permanent Normal training holdout at $\alpha = 2\%$. A partial group supplies descriptive means at its actual n, not a five-seed significance conclusion. A known necessary-condition failure remains a failure when another comparison is incomplete.

C.1 Original superiority protocol

The revised original criteria were recorded at 14:31:21 (revision `aa16079`); the common holdout-calibration and separate gate/family update-budget clarification was recorded at 14:34:56 (`fe42938`). The comparator set contains Replay, DER++, WACB, Freq, Replay+LA, TS-mem and AA-noAttMem. The strongest comparator is chosen once per dataset and endpoint from the highest complete five-seed mean, never independently for individual seeds. The conjunction requires:

1. ADR significantly greater than the strongest comparator in at least two of NSL-KDD, UNSW-NB15 and CIC-IDS-2017.
2. Macro-F1 not significantly lower than its strongest comparator on any dataset; a one-sided lower-tail $p < 0.05$ identifies harm.
3. Attack-family macro recall not significantly lower than Replay, using attack classes with at least 20 test examples. All other per-class results remain reported.
4. On CIC-IDS-2017, AA-CIL Macro-F1 significantly greater than TS-mem Macro-F1.
5. Descriptive reporting of the offline Joint gap and training cost, without a numerical success threshold.

This protocol's superiority condition failed and is not replaced by the later external-only or retention comparisons.

Table 18: UNSW: AA-CIL old-attack recall-loss decomposition at $\alpha = 2\%$.

Old attack	n	Recall loss (pp)	Δ G miss (pp)	Δ F wrong (pp)
Generic	5	14.34±0.84	0.89±0.97	13.45±1.49
Exploits	5	43.78±3.40	4.31±1.91	39.46±5.06
Fuzzers	5	21.64±1.42	15.61±1.27	6.03±1.10
DoS	5	28.83±4.10	3.92±4.01	24.91±2.80
Reconnaissance	5	24.57±9.16	6.19±2.98	18.38±7.19
Analysis	5	25.56±8.35	26.67±7.93	-1.11±1.11
Backdoor	5	1.71±8.17	-8.29±6.88	10.00±3.64

For each seed and class, the reference is its earliest highest-recall stage before the final task. Normal-miss and wrong-attack-family rates use all true-class rows as denominator; their signed changes add to recall loss. Means add, while component SDs do not. This observed confusion-matrix decomposition does not infer F behavior on G-rejected rows.

Table 19: CIC17: AA-CIL old-attack recall-loss decomposition at $\alpha = 2\%$.

Old attack	n	Recall loss (pp)	Δ G miss (pp)	Δ F wrong (pp)
DoS	5	19.22±0.63	18.31±0.98	0.91±0.57
DDoS	5	3.70±1.33	3.56±1.36	0.14±0.18
Bruteforce	5	3.34±2.80	3.09±2.79	0.24±0.24
PortScan	5	25.30±8.44	25.10±8.37	0.21±0.15
WebAttack	5	2.30±2.94	0.22±0.16	2.08±2.92

For each seed and class, the reference is its earliest highest-recall stage before the final task. Normal-miss and wrong-attack-family rates use all true-class rows as denominator; their signed changes add to recall loss. Means add, while component SDs do not. This observed confusion-matrix decomposition does not infer F behavior on G-rejected rows.

C.2 Validation-selected retention protocol

The retention-constrained candidate-selection and decision rule was recorded at 18:42:22 (`e494c64`). Development uses only UNSW-NB15 seeds $\{5, 6\}$, permanent attack validation rows and the Normal calibration pool. Among configurations with final validation BAcc at least the original-AA development mean minus 3 percentage points, selection minimizes mean signed forgetting; this selects CBF. KD, ISO, WA, CBF and NCM are all reported on the formal seeds, including versions retained only as descriptive fallbacks after failing eligibility. The selected version must satisfy all three conditions on *both* UNSW-NB15 and NSL-KDD:

1. Signed all-old-class forgetting not significantly higher than the lowest-forgetting member of the external five: Replay, DER++, WACB, Freq and Replay+LA. The comparator minimizes the complete five-seed mean; an upper-tail $p < 0.05$ identifies harm.

2. Final BAcc significantly higher than exposure-matched Replay-BS (upper-tail $p < 0.05$).

3. ADR at the common calibration target not significantly lower than original AA-CIL (lower-tail $p < 0.05$ identifies harm).

Mean incremental BAcc, Macro-F1 and actual test FPR are mandatory descriptive outcomes. CIC-IDS-2017 is supplementary and cannot replace either required dataset. Failure of any necessary condition leaves the trade-off unresolved. The validation-selected CBF failure remains the outcome of this protocol.

C.3 Fixed-KD reassessment

The fixed-KD reassessment was recorded at 20:47:57 (`88d6355`), after the UNSW-NB15 formal outcomes had motivated reconsidering KD. It retains the frozen $\lambda_G = 0.5$ and family DER coefficients $\alpha = \beta = 1$, with no further tuning. It applies the same three forgetting, final-BAcc and ADR conditions immediately above, but requires *both NSL-KDD and CIC-IDS-2017*; UNSW-NB15 remains exploratory. Each comparison still requires its complete five-seed candidate and reference groups. Neither this reassessment nor any favorable descriptive KD outcome changes the validation-selected CBF decision.

NSL-KDD seeds 1 and 2 had completed before the reassessment document was recorded, and all five had completed before direct execution authorization at approximately 21:29. Result availability does not establish that the results were inspected, but it rules out describing this NSL evidence as blind confirmation. The reassessment's NSL final-BAcc superiority condition failed. The remaining CIC-IDS-2017 comparison is reported at its actual completeness and cannot reverse that necessary-condition failure. The original manuscript cutoff was later removed for completion of the remaining experiments; it does not redefine the criteria or turn partial trajectories into complete results.

C.4 Fixed-capacity retention protocol

The fixed-capacity extension was specified on 20 October 2026 before its development results. It preserves the earlier failed decisions and freezes each candidate using only UNSW/NSL validation seeds $\{5, 6\}$. Each candidate first requires signed validation forgetting no greater than the external-five minimum plus one percentage point on both datasets; among eligible configurations, mean validation final BAcc selects the configuration and main version. A BAcc tie within one point favors KD-weak/KD+WA/KD+CBF, then EMA-KD, then DUAL. An ineligible fallback is identified explicitly rather than recast as a successful selection.

The external CSE-CIC-IDS2018 assessment is separate from the development-dataset reports. Its frozen candidate must satisfy all four conditions: forgetting

Table 20: Validation-selected retention protocol: frozen development configurations.

Version	λ_G	CBF epochs	CBF LR multiplier	Development role
AA-CIL-KD	0.5	–	–	ineligible fallback
AA-CIL-ISO	2	–	–	ineligible fallback
AA-CIL-WA	2	–	–	eligible alternative
AA-CIL-CBF	2	1	0.1	eligible main
AA-CIL-NCM	0.5	–	–	ineligible fallback

Selection uses UNSW training-validation seeds 5/6 only. DER weights are fixed at one. Ineligible versions are still reported on the five formal seeds, without converting fallback selection into eligibility.

Table 21: Retention variants at stagewise Normal-holdout calibration target $\alpha = 2\%$.

Data	Version	n	Mean inc. BAcc	Final BAcc	Forget (pp)	ADR	MF1	FPR
UNSW	AA-CIL-KD	5	63.75±1.11	41.80±1.93	2.31±1.07	70.53±0.50	42.08±1.93	2.10±0.18
UNSW	AA-CIL-ISO	5	44.89±0.03	19.67±0.02	0.02±0.03	71.01±1.16	11.47±0.01	2.04±0.08
UNSW	AA-CIL-WA	5	68.25±0.47	54.24±0.79	16.21±1.09	71.01±1.16	41.35±0.32	2.04±0.08
UNSW	AA-CIL-CBF	5	68.73±0.49	54.69±0.70	15.32±0.56	71.01±1.16	40.86±0.38	2.04±0.08
UNSW	AA-CIL-NCM	5	68.18±0.16	51.32±1.10	18.12±2.76	70.53±0.50	38.22±1.08	2.10±0.18
NSL	AA-CIL-KD	5	76.39±0.26	60.82±0.73	0.98±0.76	71.67±0.66	61.43±2.25	7.94±0.45
NSL	AA-CIL-ISO	5	58.29±0.60	36.50±0.58	0.06±0.14	72.41±0.24	31.77±1.09	8.40±0.37
NSL	AA-CIL-WA	5	76.17±0.67	59.33±1.09	2.37±0.59	72.41±0.24	59.85±1.87	8.40±0.37
NSL	AA-CIL-CBF	5	76.01±0.62	59.00±1.27	2.34±0.50	72.41±0.24	59.78±2.59	8.40±0.37
NSL	AA-CIL-NCM	5	76.16±0.27	59.98±0.68	2.35±1.00	71.67±0.66	60.05±1.81	7.94±0.45

Only complete seeds 1/2/3/4/42 receive means and sample SD; incomplete groups show n and dashes. All outcomes come from formal test trajectories, never development selection metrics. Signed forgetting includes old Normal; rates/accuracies are percentages. Eligibility is a development property, not formal success.

not significantly higher than the external-five minimum; final BAcc significantly higher than Replay-BS; mean final BAcc no more than two percentage points below original AA-CIL; and ADR not significantly below original AA-CIL. The two-point BAcc condition is a fixed mean-difference rule, not a significance or non-inferiority test. All 35 physical reference cells and five fixed-candidate cells completed before guarded release on 20 October 2026. The candidate and thresholds were not changed after release. Exact sign-flip tests enumerate all 32 paired-sign assignments as sensitivity checks; they do not replace the recorded paired-t decision rules. The resulting failure does not erase the earlier CBF or fixed-KD failures.

D Retention-extension paired comparisons

E Fixed-KD reassessment

F Fixed-capacity family counts

G Additional calibration targets

These results reuse the permanently held-out calibration source. They are sensitivity results, not a search over test thresholds. Actual test FPR accompanies each target, and an undefined per-class quantity remains undefined.

H Difficult-family performance

These selected families illustrate errors that binary attack detection alone cannot reveal. They are descriptive diagnostics, not a replacement endpoint or a selection rule for the main result; incomplete groups retain their actual seed counts.

I Registered safety contrasts and timing components

The timing components retain the measurement boundaries of their source records. In particular, a CPU analysis attempt and its nested inference or threshold-search components must not be summed twice.

Table 22: Fixed-capacity protocol: validation-only choices, not formal test results.

Candidate	λ_G	DER α/β	Mean val. BAcc	Mean val. forget	UNSW	NSL
KD-weak	0.5	0.25/0.5	73.82	5.79	no	no
KD+WA	0.5	1/1	73.18	2.09	yes	no
KD+CBF	0.5	1/1	73.40	6.40	no	no
EMA-KD	0.5	1/1	71.11	4.71	no	no
DUAL	0.5	1/1	73.26	7.81	no	no

Seeds 5/6 only. BAcc is in percent and signed forgetting in percentage points; means average the two development datasets. The last two columns indicate each dataset's forgetting constraint. Ceilings are 4.68 pp (UNSW) and -17.73 pp (NSL), each equal to its lowest external-five validation forgetting plus 1 pp. Negative values are not clipped. Rows with no eligible configuration are fixed descriptive fallbacks.

Table 23: Fixed-capacity candidates on development datasets at stagewise $\alpha = 2\%$.

Data	Candidate	n	Mean inc. BAcc	Final BAcc	Forget (pp)	ADR	MF1	FPR
UNSW	KD-weak	5	70.08±0.49	56.73±1.57	11.75±1.22	70.53±0.50	43.39±0.69	2.10±0.18
UNSW	KD+WA	5	68.63±0.70	55.17±1.26	5.70±0.97	70.53±0.50	44.77±0.34	2.10±0.18
UNSW	KD+CBF	5	70.15±0.45	56.66±1.51	11.68±1.73	70.53±0.50	43.53±0.71	2.10±0.18
UNSW	EMA-KD	5	69.80±0.51	56.50±1.00	8.51±1.22	70.53±0.50	43.74±0.71	2.10±0.18
UNSW	DUAL	5	69.93±0.38	56.63±1.04	14.77±2.35	70.53±0.50	42.29±0.33	2.10±0.18
NSL	KD-weak	5	76.81±0.49	61.36±0.96	1.52±0.63	71.67±0.66	61.38±1.61	7.94±0.45
NSL	KD+WA	5	76.77±0.41	61.19±0.59	1.53±0.85	71.67±0.66	61.58±1.21	7.94±0.45
NSL	KD+CBF	5	76.83±0.30	61.30±1.35	1.65±1.11	71.67±0.66	60.62±1.60	7.94±0.45
NSL	EMA-KD	5	76.15±0.55	59.97±0.63	2.88±1.15	71.67±0.66	57.01±1.25	7.94±0.45
NSL	DUAL	5	76.01±0.42	58.44±1.91	4.23±2.03	71.67±0.66	59.04±2.20	7.94±0.45
CIC17	KD+WA	5	87.58±1.08	79.26±4.12	-10.54±9.16	92.10±2.84	65.23±1.89	1.93±0.04

Mean±sample SD over complete seeds 1/2/3/4/42. UNSW, NSL and CIC17 were used for development; these five-seed results are not blind confirmation. CIC17 was not used in the frozen UNSW/NSL validation-only selection; only its selected candidate was added. Only complete groups are displayed. No test outcome changes the fixed selection or fallback eligibility.

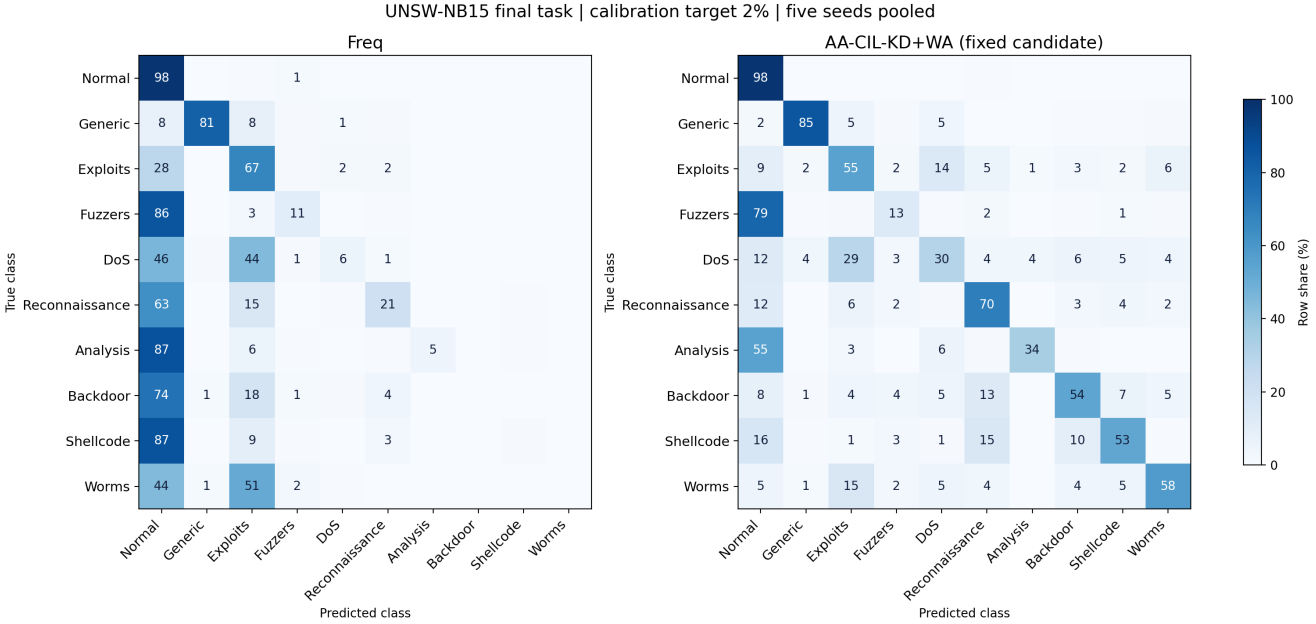


Figure 5: UNSW-NB15 final-task confusion at the $\alpha = 2\%$ calibration target: Freq and the fixed AA-CIL-KD+WA candidate. Saved confusion counts for seeds 1, 2, 3, 4 and 42 are summed before row normalization; each seed evaluates the same 30,248 test rows, so pooling does not create independent observations. Cells show percentages rounded to integers when at least 1%; blank labels are below 1%, not necessarily zero. The target concerns calibration, not an exact 2% test FPR. This is descriptive development evidence, not a causal ablation or confirmation of a final method.

Table 24: CIC-IDS-2017 development results at saved stagewise $\alpha = 2\%$: five-seed means.

Method	AIA	Final BAcc	Signed forget.	ADR	Macro-F1
AA-CIL-KD+WA	87.6	79.3	-10.5	92.1	65.2
AA-CIL-KD	87.6	79.2	-10.5	92.1	65.9
AA-CIL	93.9	87.5	9.0	83.7	63.1
Replay-BS	90.8	79.3	3.6	92.4	69.1
WACB	77.4	63.0	2.0	88.9	57.8

Rates are percentages; signed forgetting is in percentage points and is not clipped. Seeds are 1, 2, 3, 4, 42. AA-CIL-KD+WA is the fixed validation-selected candidate; CIC17 was not used for frozen validation selection. These are descriptive development results, not CSE18 confirmation. Sample SDs and per-seed values remain in the accompanying result artifacts.

Table 25: CSE18: compact retention at stagewise $\alpha = 2\%$.

Method	n	Mean inc. BAcc	Final BAcc	Forget (pp)	ADR	MF1	FPR
KD+WA*	5	82.64±1.38	72.69±1.96	5.27±0.98	95.44±0.11	66.76±0.20	1.95±0.06
Replay	5	53.50±8.74	26.31±14.28	30.85±14.76	12.90±25.90	22.68±17.21	2.04±0.04
DER++	5	48.81±7.30	14.98±0.44	34.55±13.23	1.50±0.94	14.27±0.83	2.04±0.01
WACB	5	60.51±6.30	51.24±20.54	12.58±29.74	54.16±33.69	48.66±22.33	2.01±0.04
Freq	5	71.93±0.54	72.35±2.46	5.79±2.54	92.17±3.19	64.24±2.84	2.00±0.04
Replay-BS	5	86.58±0.96	79.74±2.03	5.86±1.56	95.04±0.31	66.63±0.32	1.98±0.05
AA-CIL	5	85.14±0.48	78.53±1.87	3.86±2.80	94.84±0.48	65.93±0.68	1.98±0.02
AA-CIL-KD	5	84.31±0.71	73.97±1.37	0.58±1.16	95.48±0.10	71.17±0.23	1.95±0.06
Replay+LA	5	53.50±8.74	26.31±14.28	30.85±14.76	12.90±25.90	22.68±17.21	2.04±0.04

Mean±sample SD over all five fixed formal seeds; signed forgetting is in percentage points. $\star$ identifies the validation-selected main, never a test-selected winner. External data are released only after all 35 reference cells finish. Replay+LA aliases calibrated Replay and adds no training.

Table 26: Compact family parameter and component counts.

Data	Method	Training-resident	Optimizer	Inference	Extra components
CSE18	KD+WA	27398	27398	27398	0

F only; the common G is separate. Counts are fixed across stages. EMA training-resident count includes its frozen teacher; inference uses only EMA. DUAL is one F with two fixed encoders and a joint head. Sample, calibration and transient storage and separate gate/family costs remain in the generated JSON.

Table 27: External-dataset necessary tests for the fixed validation-selected main.

Criterion	Reference	n	Δ (pp)	t p	Sign-flip p	Decision
1	Freq	5	-0.52±2.12	0.693	0.7188	pass
2	Replay-BS	5	-7.06±1.87	0.9995	1	fail
3	AA-CIL	5	-5.85±2.25	not used	not used	fail
4	AA-CIL	5	0.60±0.42	0.9838	1	pass

1: forgetting harm is $p_> < .05$ against the lowest-mean external-five member. 2: final BAcc superiority over Replay-BS requires $p_> < .05$. 3: mean final-BAcc difference from original AA must be at least -2pp; no p-test is used. 4: ADR harm is $p_< < .05$ against original AA. No detected harm is not equivalence. Exact sign-flip p-values enumerate all 32 assignments as a sensitivity check. Overall numerical decision: fail.

Table 28: All 45 CSE18 cells: nine methods, seeds 5–9, calibration target 2%. Descriptive extension: not in the registered decision.

Method	Mean inc. BAcc	Final BAcc	Forget (pp)	ADR	Test FPR
AR	81.67 ± 4.35	77.44 ± 2.89	-0.24 ± 6.32	95.04 ± 0.18	1.97 ± 0.07
AA-CIL	84.73 ± 0.56	77.36 ± 2.52	4.08 ± 3.96	95.04 ± 0.18	1.97 ± 0.07
Replay-BS	86.21 ± 0.48	77.52 ± 3.84	8.26 ± 5.50	94.26 ± 1.63	1.99 ± 0.06
Freq	69.86 ± 6.07	61.46 ± 17.08	14.25 ± 10.11	75.81 ± 25.60	2.00 ± 0.03
WACB	65.54 ± 11.16	50.12 ± 26.27	19.93 ± 16.55	50.75 ± 44.77	2.03 ± 0.04
KD+WA	78.94 ± 4.62	70.44 ± 2.33	3.31 ± 4.25	95.23 ± 0.41	1.95 ± 0.06
Replay	55.94 ± 3.44	21.37 ± 5.40	40.88 ± 5.21	7.06 ± 10.95	2.04 ± 0.03
DER++	53.21 ± 5.35	19.70 ± 10.62	36.36 ± 19.41	13.37 ± 26.88	2.05 ± 0.03
AKD	72.53 ± 9.67	56.73 ± 23.43	10.02 ± 19.15	74.99 ± 35.32	2.00 ± 0.03

Final BAcc by seed (percent; all five values, no selected seeds)

Method	Seed 5	Seed 6	Seed 7	Seed 8	Seed 9
AR	76.27	80.88	78.81	78.05	73.19
AA-CIL	76.58	74.35	78.99	80.75	76.14
Replay-BS	71.49	81.94	79.16	77.97	77.03
Freq	31.89	61.72	73.32	70.45	69.92
WACB	21.35	21.81	64.33	74.00	69.10
KD+WA	71.82	72.67	71.49	66.89	69.35
Replay	15.13	21.23	21.41	29.92	19.16
DER++	14.86	15.08	38.69	15.61	14.29
AKD	65.71	17.86	75.06	52.47	72.57

Upper panel: equal-weight means ± sample SD across five seeds, not confidence intervals. Values are percentages except signed forgetting in percentage points, including Normal; negative values are not clipped. The 2% target is a calibration setting, not a guaranteed test FPR. Source: published Section 64 single-seed releases (AR, AA-CIL, Replay-BS, Freq, WACB), Section 74 descriptive releases (KD+WA, Replay, DER++), and Section 82 descriptive releases (AKD). Aggregation uses saved scalar metrics only; AKD ADR/FPR aliases are checked against the saved final operating point. No training, inference, confusion-matrix recomputation, or new significance test is involved. The 40 original cells and five separately appended AKD cells are counted once; Replay-LA is not an additional physical method. This nine-method extension is not in the registered decision: the original five-method decision and its failures remain unchanged, and the four additional methods are descriptive only. These are new seeds on the same exposed CSE dataset, not independent-dataset confirmation. Complete-seed interim releases do not authorize tuning, early stopping, or reselection.

Table 29: CSE18, paired seeds 5–9 ($n = 5$): retention–plasticity trade-off. Blind seeds 5–9; externals evaluated from saved checkpoints, no retraining (1% panel).

Target	Method	Mean inc. BAcc	Final BAcc	Forget (pp)	ADR	Test FPR
2%	AR	81.7	77.4	−0.2	95.0	1.97
	AA-CIL	84.7	77.4	4.1	95.0	1.97
	Replay-BS	86.2	77.5	8.3	94.3	1.99
	Freq	69.9	61.5	14.2	75.8	2.00
	WACB	65.5	50.1	19.9	50.7	2.03
1%	AR	80.9	76.3	−0.8	94.5	1.00
	AA-CIL	83.7	76.2	3.8	94.5	1.00
	Replay-BS	84.7	74.4	8.2	93.3	1.01
	Freq	63.9	58.3	11.4	68.2	1.00
	WACB	50.2	28.7	15.8	18.8	1.03

Values are percentages except signed forgetting in percentage points; negative forgetting is retained, not clipped. Rounded means are transcribed from the lead's recomputation recorded in work-order Sections 71–72, except the completed 2% ADR and test-FPR columns, which are arithmetic means of the five saved final values per method in the published Section 64 seed releases. No confusion matrices or statistical tests were recomputed for this completion. The 2% panel derives from the 25 published decision cells; the 1% panel combines saved AR/AA/BS operating points with Freq/WACB checkpoint evaluation. No model was retrained for the 1% panel. "Blind seeds" describes the initially withheld seed results, not an independent dataset: the design followed unsealing of the earlier CSE round, uses the same exposed dataset, and complete single-seed interim releases preceded this final summary. No early stopping, tuning, or criterion changes followed those releases.

Table 30: CSE18 lead-reported paired tests at 1% ($n = 5$). Differences are AR minus reference, in percentage points.

Reference	Endpoint (alternative)	Difference	One-sided t p	Exact sign-flip p
Freq	Final BAcc (>)	18.0	.045	.031
Freq	Mean inc. BAcc (>)	17.0	.005	.031
WACB	Final BAcc (>)	47.6	.001	.031
WACB	Mean inc. BAcc (>)	30.7	.003	.031
Replay-BS	Final BAcc (>)	1.9	.059	.062

Rounded values from work-order Sections 71–72; paired t has four degrees of freedom, and sign-flip enumerates all 32 sign assignments. These are reported tests, not new tests executed during typesetting. At 1%, the lead reports AR forgetting differences of −12.1pp versus Freq and −16.5pp versus WACB; harm is not significant against the lowest-forgetting external (Freq). Thus the external half of H-low passes for AR, but the Replay-BS superiority half fails, so the conjunction is not confirmed. This is not an equivalence finding. At 2%, the registered final-BAcc superiority criterion also fails (AR minus BS -0.08 ± 3.11pp; reported one-sided $p \geq .52$), while the other three criteria pass. No new round or selection is implied. AR has the lowest mean forgetting among these five available decision methods, not among unreported variants.

Table 31: Design-space study; no configuration met the pre-registered K1. Screening seeds 1–2 only. Values are percentages (forgetting in percentage points). Score averages both final decision views over both datasets and seeds. D: default final balanced accuracy; L: final balanced accuracy at a 1% calibration FPR target; F: signed old-class forgetting in the latter view, including Normal. * denotes selected configurations; R denotes the reference. These screening means are not confirmation evidence.

Configuration	Score	UNSW D	UNSW L	UNSW F	CIC D	CIC L	CIC F
a2b2c1d3e1*	75.13	62.92	53.34	8.46	94.39	89.87	3.17
a2b2c1d1e1*	74.55	61.80	52.24	9.93	94.34	89.82	3.25
a2b2c1d1e2	74.53	61.73	52.47	17.98	94.20	89.71	3.39
a2b2c1d2e1*	74.40	61.34	51.97	6.90	94.40	89.88	3.18
a2b2c2d1e2	74.39	61.34	52.62	19.79	93.87	89.74	2.98
a2b1c2d1e2	74.39	61.87	51.58	20.98	94.25	89.85	2.88
a2b1c2d1e1	74.38	62.14	51.03	12.40	94.38	89.99	2.65
a2b1c1d1e2	74.32	63.46	52.84	18.36	94.25	86.75	7.58
a2b2c2d3e1	74.09	60.58	51.92	7.76	94.01	89.83	2.93
a2b2c2d2e1	74.04	60.32	52.02	6.95	93.99	89.83	2.94
a2b2c2d1e1	74.01	60.48	51.79	11.03	93.97	89.79	2.94
a2b1c1d3e1	73.75	62.40	51.41	7.38	94.35	86.83	7.46
a2b1c2d3e1	73.74	60.53	49.93	6.76	94.45	90.05	2.57
a2b1c1d2e1	73.74	62.34	51.41	5.93	94.36	86.84	7.45
a2b1c2d2e1	73.71	60.34	49.99	6.24	94.45	90.04	2.57
a2b1c1d1e1	73.68	62.37	51.27	10.03	94.29	86.79	7.52
a1b2c2d2e1	73.07	60.82	52.94	7.39	92.05	86.47	-5.54
a1b2c2d3e1	72.85	60.38	52.62	8.39	91.99	86.42	-5.48
a1b1c1d3e1	72.58	62.91	52.83	7.73	91.49	83.10	-3.46
a1b2c2d1e1	72.58	59.75	52.05	11.74	92.05	86.47	-5.51
a1b2c1d3e1	72.50	62.50	52.28	8.56	91.54	83.67	-3.68
a1b1c2d2e1	72.45	62.80	52.22	8.57	91.66	83.11	-3.34
a1b1c1d1e2	72.33	62.47	52.07	19.40	91.59	83.20	-3.58
a1b1c1d1e1	72.31	62.25	52.34	10.08	91.51	83.13	-3.48
a1b2c1d1e2	72.22	61.97	51.58	18.96	91.61	83.74	-3.69
a1b1c1d2e1 R	72.22	61.93	52.30	7.02	91.52	83.13	-3.48
a1b1c2d3e1	72.21	62.34	51.84	9.21	91.60	83.06	-3.27
a1b2c1d1e1	72.19	61.80	51.72	10.43	91.57	83.69	-3.63
a1b2c2d1e2	72.19	58.66	51.09	19.26	92.30	86.71	-5.83
a1b2c1d2e1	72.17	61.60	51.83	7.65	91.57	83.68	-3.70
a1b1c2d1e1	71.98	61.81	51.33	12.56	91.67	83.11	-3.31
a1b1c2d1e2	71.69	60.77	50.70	19.68	91.93	83.36	-3.66
a2b2c2d3e2	71.46	54.87	47.38	6.20	93.86	89.75	3.02
a2b1c2d3e2	71.33	55.27	45.85	6.45	94.30	89.89	2.81
a2b2c1d2e2	71.20	54.40	46.37	5.30	94.27	89.77	3.31
a2b2c1d3e2	70.99	53.99	45.97	6.47	94.25	89.76	3.31
a2b2c2d2e2	70.53	52.79	45.62	6.02	93.92	89.76	2.98
a2b1c2d2e2	70.35	52.95	44.62	6.00	94.10	89.72	3.02
a2b1c1d3e2	70.30	54.63	45.49	4.58	94.29	86.78	7.48
a1b2c2d3e2	70.20	54.72	47.68	6.65	92.00	86.41	-5.48
a2b1c1d2e2	69.84	53.80	44.58	4.54	94.24	86.73	7.55
a1b1c2d3e2	69.63	56.58	47.20	6.35	91.63	83.10	-3.31
a1b2c2d2e2	69.31	52.91	45.89	6.72	92.01	86.43	-5.49
a1b2c1d3e2	68.89	54.85	45.70	4.44	91.40	83.59	-3.69
a1b1c1d3e2	68.88	55.05	46.07	3.91	91.38	83.00	-3.55
a1b1c2d2e2	68.72	54.58	45.57	7.17	91.63	83.10	-3.30
a1b2c1d2e2	68.22	52.95	44.68	4.73	91.55	83.70	-3.70
a1b1c1d2e2	68.19	53.11	45.03	4.50	91.51	83.12	-3.56

Table 32: Confirmation-stage descriptive results, seeds 10–14, mean ± sample standard deviation. All columns use the 1% calibration FPR target, not default decisions or guaranteed test FPR. All three selected configurations failed K1 on both datasets. K2 passing means no significant worsening under the original test; it does not establish equivalence or non-inferiority. K3 passed under the original criterion. No configuration was confirmed.

Dataset	Configuration	Mean incremental BAcc	Final BAcc	Signed forgetting
UNSW	a2b2c1d3e1	66.2 ± 0.7	51.2 ± 1.5	8.8 ± 1.2
UNSW	a2b2c1d1e1	66.9 ± 0.4	51.2 ± 1.2	11.6 ± 1.4
UNSW	a2b2c1d2e1	66.1 ± 0.7	50.8 ± 1.0	8.1 ± 1.0
UNSW	ar	66.3 ± 0.8	51.0 ± 1.6	9.5 ± 1.3
UNSW	ar_joint	63.6 ± 0.6	45.7 ± 1.3	24.0 ± 2.9
UNSW	replay_bs	59.3 ± 0.7	33.2 ± 1.9	5.0 ± 1.8
UNSW	freq	52.5 ± 1.6	27.5 ± 1.2	2.4 ± 1.7
UNSW	wacb	50.5 ± 3.0	27.2 ± 2.4	1.4 ± 2.5
UNSW	er_bal_tabt	69.8 ± 0.5	56.3 ± 1.6	25.0 ± 1.0
CIC	a2b2c1d3e1	96.9 ± 0.2	90.0 ± 0.4	2.9 ± 0.4
CIC	a2b2c1d1e1	96.9 ± 0.3	89.9 ± 0.5	2.9 ± 0.5
CIC	a2b2c1d2e1	96.9 ± 0.2	90.0 ± 0.5	2.9 ± 0.4
CIC	ar	86.3 ± 1.1	81.6 ± 3.0	-3.1 ± 1.5
CIC	ar_joint	85.8 ± 0.6	79.3 ± 4.4	0.4 ± 7.2
CIC	replay_bs	80.3 ± 2.4	57.4 ± 6.0	11.4 ± 5.1
CIC	freq	69.3 ± 3.1	48.1 ± 4.7	8.5 ± 5.6
CIC	wacb	68.4 ± 1.5	45.9 ± 2.2	5.1 ± 4.3
CIC	er_bal_tabt	96.7 ± 0.6	92.7 ± 2.0	2.7 ± 0.3

Table 33: Original registered superiority test and separately identified external-only comparison. The latter does not replace the former.

Data	Comparison set	Fixed mean winner	Δ ADR (pp)	$p_>$	d_z	Dataset test
NSL	registered	Freq	-6.829±3.350	0.99482	-2.039	Fail
NSL	external	Freq	-6.829±3.350	0.99482	-2.039	Fail
UNSW	registered	AA-noAttMem	1.154±1.450	0.07480	0.796	Fail
UNSW	external	Freq	18.671±3.277	0.00011	5.697	Pass
CIC17	registered	DER++	-5.632±4.149	0.98070	-1.357	Fail
CIC17	external	DER++	-5.632±4.149	0.98070	-1.357	Fail

Original superiority protocol, criteria 1–5: 1: FAIL, 2: PASS, 3: PASS, 4: PASS, 5: PASS. Overall decision: FAIL, because NSL and UNSW cannot contribute the required two significant wins. The comparator set includes TS-mem and AA-noAttMem.

Table 34: Necessary comparisons under the validation-selected retention protocol.

Data	Criterion	Reference	n	Δ (pp)	One-sided p	Decision
UNSW	1	WACB	5	11.84±2.91	0.00041	fail
UNSW	2	Replay-BS (post hoc)	5	16.67±1.26	3.868×10^{-6}	pass
UNSW	3	AA-CIL	5	1.92±1.29	0.98539	pass
NSL	1	DER++	5	1.42±5.29	0.28991	pass
NSL	2	Replay-BS (post hoc)	5	-0.33±2.73	0.59933	fail
NSL	3	AA-CIL	5	9.57±3.63	0.99794	pass

Candidate minus reference; exact five paired formal seeds. 1: all-old forgetting, $p_> < .05$ means harm/failure against the lowest-forgetting external baseline. 2: final BAcc, $p_> < .05$ is required against Replay-BS. 3: ADR, $p_< < .05$ means harm/failure against original AA-CIL. Only useful complete comparisons are shown; absent comparisons remain pending and are not passed. Both UNSW and NSL are required. No detected harm is not equivalence. Unadjusted tests.

Table 35: Completed descriptive AA-CIL-ISO minus AA-CIL-KD comparisons.

Data	Metric	n	Δ (pp)	$p_<$	$p_>$	p_{2s}
UNSW	Forget (all)	5	-2.29±1.03	0.00385	0.99615	0.00770
UNSW	Mean inc. BAcc	5	-18.86±1.10	1.365×10^{-6}	$1 - 1.365 \times 10^{-6}$	2.731×10^{-6}
NSL	Forget (all)	5	-0.93±0.89	0.03981	0.96019	0.07963
NSL	Mean inc. BAcc	5	-18.10±0.55	1.052×10^{-7}	$1 - 1.052 \times 10^{-7}$	2.104×10^{-7}

Exact five paired formal seeds; mean±sample SD of differences in percentage points. These unadjusted comparisons neither select the main version nor add a success requirement. Undefined tests remain –; no seed is discarded. The original superiority and earlier retention decisions are unchanged.

Table 36: Fixed-KD reassessment at stagewise Normal-holdout calibration target $\alpha = 2\%$.

Data	n	Mean inc. BAcc	Final BAcc	Forget (pp)	ADR	MF1	FPR
UNSW	5	63.75±1.11	41.80±1.93	2.31±1.07	70.53±0.50	42.08±1.93	2.10±0.18
NSL	5	76.39±0.26	60.82±0.73	0.98±0.76	71.67±0.66	61.43±2.25	7.94±0.45
CIC17	5	87.59±1.07	79.20±4.08	-10.54±9.15	92.10±2.84	65.94±2.49	1.93±0.04

Mean±sample SD over completed trajectories at the stated n; $n = 1$ has undefined SD (–). Incomplete groups are descriptive only; significance requires all five formal seeds. UNSW is exploratory. NSL results were available before direct authorization, so NSL is not blind confirmation. KD uses fixed $\lambda_G = .5$ and DER $\alpha = \beta = 1$. The validation-selected CBF and original superiority decisions remain failed.

Table 37: Fixed-KD reassessment: candidate minus reference.

Data	Criterion	Reference	n	Δ (pp)	One-sided p	Decision
UNSW	1	WACB	5	-1.17±3.41	0.7563	pass
UNSW	2	Replay-BS (post hoc)	5	3.78±1.43	0.002032	pass
UNSW	3	AA-CIL	5	1.44±0.85	0.9905	pass
NSL	1	DER++	5	0.07±4.87	0.4876	pass
NSL	2	Replay-BS (post hoc)	5	1.49±2.58	0.1329	fail
NSL	3	AA-CIL	5	8.84±2.94	0.9987	pass
CIC17	1	WACB	5	-12.51±10.48	0.9721	pass
CIC17	2	Replay-BS (post hoc)	5	-0.07±5.80	0.5095	fail
CIC17	3	AA-CIL	5	8.44±2.61	0.999	pass

1: forgetting harm, $p_> < .05$ means failure against the lowest-forgetting external-five member. 2: final BAcc superiority over Replay-BS requires $p_> < .05$. 3: ADR harm relative to original AA means $p_< < .05$. NSL and CIC17 are both required; UNSW does not replace either. Unadjusted tests; no detected harm is not equivalence. Required numerical verdict: fail.

Table 38: Fixed family-model capacity of the selected per-candidate configurations.

Data	Candidate	Training-resident	Optimizer	Inference	Extra components
UNSW	KD-weak	26505	26505	26505	0
NSL	KD-weak	32004	32004	32004	0
UNSW	KD+WA	26505	26505	26505	0
NSL	KD+WA	32004	32004	32004	0
UNSW	KD+CBF	26505	26505	26505	0
NSL	KD+CBF	32004	32004	32004	0
UNSW	EMA-KD	53010	26505	26505	1
NSL	EMA-KD	64008	32004	32004	1
UNSW	DUAL	53001	53001	53001	1
NSL	DUAL	64004	64004	64004	1
CIC17	KD+WA	27399	27399	27399	0

F only; the common G and transient previous-task gate teacher are separate. Counts come from saved development architectures and remain fixed across tasks. EMA training-resident count includes its slow copy; only EMA is used at inference. DUAL uses two fixed encoders and one joint head within a single F.

Table 39: Additional calibration targets: NSL-KDD. Rates in percent; mean ± sample SD.

Method	α	n	Test FPR	Detection	MF1
Replay	1	5	2.60±1.82	56.54±8.96	36.14±8.07
Replay	5	5	5.92±2.76	76.73±3.63	59.43±3.60
DER++	1	5	1.45±0.35	58.01±6.83	42.04±7.13
DER++	5	5	4.44±0.74	73.86±3.16	60.62±2.98
WACB	1	5	2.74±0.25	61.74±4.42	48.34±5.05
WACB	5	5	5.31±2.02	75.34±4.53	57.78±1.61
Freq	1	5	4.54±2.44	66.24±3.69	57.79±3.89
Freq	5	5	6.34±2.74	75.94±4.01	55.34±2.40
Replay+LA	1	5	2.60±1.82	56.54±8.96	36.14±8.07
Replay+LA	5	5	5.92±2.76	76.73±3.63	59.43±3.60
TS-mem	1	5	2.32±1.85	51.03±6.90	45.92±4.77
TS-mem	5	5	6.10±2.69	73.74±4.61	55.52±2.29
AA-noAttMem	1	5	3.59±1.57	57.20±1.49	56.68±3.42
AA-noAttMem	5	5	6.18±2.36	67.14±2.65	56.35±2.93
AA-CIL	1	5	4.89±1.91	58.93±2.19	53.54±2.62
AA-CIL	5	5	7.14±1.75	67.83±3.44	57.44±1.81
Replay-BS (post hoc)	1	5	3.16±1.58	59.01±4.04	58.43±2.41
Replay-BS (post hoc)	5	5	4.36±2.25	66.84±4.27	55.84±2.69
Joint (offline)	1	5	6.30±1.23	64.23±1.29	57.26±2.41
Joint (offline)	5	5	7.61±0.85	71.12±2.70	57.37±1.03

Table 40: Additional calibration targets: UNSW-NB15. Rates in percent; mean ± sample SD.

Method	α	n	Test FPR	Detection	MF1
Replay	1	5	0.86±0.18	28.97±4.87	23.40±0.90
Replay	5	5	4.80±0.19	56.73±2.53	32.85±1.80
DER++	1	5	0.99±0.14	9.69±5.65	11.23±2.31
DER++	5	5	4.87±0.42	40.57±6.65	26.89±5.22
WACB	1	5	0.95±0.05	39.02±5.88	27.80±2.02
WACB	5	5	4.90±0.35	65.89±1.88	42.17±0.72
Freq	1	5	0.98±0.17	41.24±3.41	26.95±2.00
Freq	5	5	5.00±0.33	65.64±1.99	41.21±1.82
Replay+LA	1	5	0.86±0.18	28.97±4.87	23.40±0.90
Replay+LA	5	5	4.80±0.19	56.73±2.53	32.85±1.80
TS-mem	1	5	0.96±0.09	11.78±10.64	17.15±6.58
TS-mem	5	5	5.22±0.35	55.95±5.94	34.85±1.90
AA-noAttMem	1	5	1.02±0.12	61.27±3.58	39.15±0.80
AA-noAttMem	5	5	5.07±0.30	76.24±0.75	40.96±0.34
AA-CIL	1	5	1.04±0.09	63.51±1.40	40.22±0.39
AA-CIL	5	5	5.05±0.17	76.83±0.62	41.67±0.50
Replay-BS (post hoc)	1	5	1.08±0.12	59.65±0.93	36.02±1.56
Replay-BS (post hoc)	5	5	5.13±0.29	75.85±1.11	47.54±1.61
Joint (offline)	1	5	1.00±0.10	61.09±1.83	33.36±0.46
Joint (offline)	5	5	5.08±0.33	77.39±1.51	41.60±0.74

Table 41: Additional calibration targets: CIC-IDS-2017. Rates in percent; mean ± sample SD.

Method	α	n	Test FPR	Detection	MF1
Replay	1	5	0.98±0.04	67.05±8.32	44.49±6.18
Replay	5	5	4.87±0.06	94.85±1.90	57.05±1.92
DER++	1	5	0.96±0.03	72.99±7.31	42.92±2.54
DER++	5	5	4.86±0.03	98.28±0.27	62.87±0.65
WACB	1	5	0.95±0.04	79.18±2.75	50.23±4.04
WACB	5	5	4.85±0.02	97.21±0.60	61.05±0.98
Freq	1	5	0.97±0.04	81.16±2.48	50.00±4.07
Freq	5	5	4.83±0.03	96.46±0.76	59.82±1.49
Replay+LA	1	5	0.98±0.04	67.05±8.32	44.49±6.18
Replay+LA	5	5	4.87±0.06	94.85±1.90	57.05±1.92
TS-mem	1	5	0.94±0.01	40.22±6.08	30.28±1.91
TS-mem	5	5	5.07±0.45	75.51±6.27	51.01±3.59
AA-noAttMem	1	5	0.98±0.01	78.32±1.40	64.10±1.21
AA-noAttMem	5	5	4.88±0.03	94.57±2.17	62.32±1.02
AA-CIL	1	5	0.96±0.01	78.23±2.71	64.35±1.36
AA-CIL	5	5	4.89±0.03	94.52±2.06	62.02±0.97
Replay-BS (post hoc)	1	4	0.95±0.03	87.25±1.74	59.51±6.41
Replay-BS (post hoc)	5	4	4.86±0.03	96.50±1.67	62.32±1.35
Joint (offline)	1	5	0.94±0.05	94.24±2.98	63.48±5.19
Joint (offline)	5	5	4.85±0.02	99.87±0.12	63.96±1.39

Table 42: Selected low-support or weak-family results at $\alpha = 2\%$, to expose failure modes hidden by binary detection. All classes remain in Macro-F1 and BAcc; only the attack guard excludes support below 20.

Data	Method	Class	n	Support	n_P	Precision	Recall	F1
NSL	AA-CIL	R2L	5	2885	5	79.21±20.34	19.34±5.56	30.98±8.50
NSL	AA-CIL	U2R	5	67	5	14.36±15.83	46.27±2.36	19.07±14.54
NSL	TS-mem	R2L	5	2885	5	49.71±22.71	9.74±4.42	16.03±6.95
NSL	TS-mem	U2R	5	67	5	6.68±2.86	40.30±8.31	11.24±4.03
NSL	AA-noAttMem	R2L	5	2885	5	79.36±13.06	15.45±4.49	25.71±6.83
NSL	AA-noAttMem	U2R	5	67	5	26.25±18.85	43.28±6.76	29.57±17.65
NSL	Replay-BS (post hoc)	R2L	5	2885	5	95.22±2.37	13.72±4.07	23.82±6.15
NSL	Replay-BS (post hoc)	U2R	5	67	5	25.86±22.55	47.76±8.24	27.30±16.01
UNSW	AA-CIL	Fuzzers	5	3750	5	69.58±4.05	9.67±1.14	16.94±1.67
UNSW	AA-CIL	Worms	5	32	5	3.52±0.45	63.75±6.09	6.68±0.83
UNSW	TS-mem	Fuzzers	5	3750	5	47.54±14.46	3.39±2.15	6.28±3.88
UNSW	TS-mem	Worms	5	32	5	7.62±3.64	21.88±15.78	9.00±1.30
UNSW	AA-noAttMem	Fuzzers	5	3750	5	67.67±4.11	9.11±0.37	16.06±0.67
UNSW	AA-noAttMem	Worms	5	32	5	3.73±0.57	64.38±8.44	7.06±1.06
UNSW	Replay-BS (post hoc)	Fuzzers	5	3750	5	68.07±5.79	12.20±3.50	20.45±4.99
UNSW	Replay-BS (post hoc)	Worms	5	32	1	100.00	0.62±1.40	1.21±2.71
CIC17	AA-CIL	Botnet	5	370	5	6.75±0.96	95.41±1.74	12.59±1.66
CIC17	AA-CIL	Infiltration	5	6	5	2.17±1.25	66.67±0.00	4.16±2.34
CIC17	TS-mem	Botnet	5	370	5	0.72±0.29	5.73±2.00	1.25±0.48
CIC17	TS-mem	Infiltration	5	6	5	0.22±0.08	63.33±7.45	0.44±0.15
CIC17	AA-noAttMem	Botnet	5	370	5	6.50±1.01	96.05±2.38	12.15±1.74
CIC17	AA-noAttMem	Infiltration	5	6	5	3.36±2.00	66.67±0.00	6.31±3.53
CIC17	Replay-BS (post hoc)	Botnet	4	370	4	30.35±7.48	60.68±0.84	40.03±6.60
CIC17	Replay-BS (post hoc)	Infiltration	4	6	4	9.21±6.83	41.67±9.62	14.17±9.42

Precision uses defined seeds only; n_P is defined_n and n is the full completed seed count. Original null precision values remain null in the generated JSON. With no defined value the mean is –; with fewer than two the sample SD is undefined. No seed is removed from other defined endpoints. Complete per-class confusion matrices accompany the saved result JSON.

Table 43: Remaining registered contrasts. Differences are AA-CIL minus the named comparator. The harm tests use the less-than alternative; the CIC gate-refresh ablation uses the greater-than alternative.

Data	Endpoint	Comparator	Δ (pp)	p	Outcome
NSL	MF1 vs strongest	WACB	-1.365±5.922	0.31675	No detected harm
NSL	Guard vs Replay	Replay	14.534±7.440	0.99401	No detected harm
UNSW	MF1 vs strongest	AA-noAttMem	0.746±0.638	0.97037	No detected harm
UNSW	Guard vs Replay	Replay	33.232±0.851	1.00000	No detected harm
CIC17	MF1 vs strongest	AA-noAttMem	-0.455±1.756	0.29686	No detected harm
CIC17	Guard vs Replay	Replay	41.399±6.098	0.99995	No detected harm
CIC17	MF1 gate-refresh ablation	TS-mem	28.522±1.744	0.00000	PASS

Only complete five-seed groups determine these outcomes. No detected harm does not establish equivalence or noninferiority. Criterion 5 is descriptive completion of Joint-gap and cost reporting, not superiority over Joint.

Table 44: Per-seed recorded overhead across tasks (seconds, mean ± sample standard deviation). Separate post-training CPU analyses are shown without adding their nested subcomponents.

Data	Method	n	Selection	In-run calib.	In-run eval.	CPU curves	CPU ext. calib.
NSL	Replay	5	0.022±0.013	–	0.113±0.011	0.112±0.014	0.132±0.008
NSL	DER++	5	0.024±0.002	–	0.068±0.005	0.136±0.011	0.135±0.008
NSL	WACB	5	0.016±0.001	–	0.058±0.004	0.119±0.010	0.143±0.007
NSL	Freq	5	0.017±0.001	–	0.064±0.006	0.128±0.007	0.146±0.005
NSL	AA-CIL	5	0.082±0.003	0.025±0.010	0.081±0.013	0.058±0.004	–
NSL	TS-mem	5	0.027±0.001	0.020±0.003	0.079±0.006	0.063±0.017	–
NSL	AA-noAttMem	5	0.081±0.001	0.020±0.002	0.080±0.002	0.058±0.005	–
NSL	Replay-BS (post hoc)	5	0.083±0.004	0.325±0.016	0.058±0.004	0.110±0.028	–
NSL	Joint (offline)	5	0.012±0.001	–	0.059±0.003	0.149±0.019	0.154±0.007
UNSW	Replay	5	0.029±0.002	–	0.172±0.004	0.158±0.018	0.217±0.020
UNSW	DER++	5	0.036±0.003	–	0.085±0.008	0.197±0.017	0.236±0.022
UNSW	WACB	5	0.029±0.002	–	0.085±0.005	0.196±0.010	0.210±0.016
UNSW	Freq	5	0.027±0.001	–	0.080±0.004	0.184±0.009	0.197±0.015
UNSW	AA-CIL	5	0.074±0.006	0.022±0.001	0.118±0.007	0.061±0.004	–
UNSW	TS-mem	5	0.024±0.003	0.027±0.006	0.124±0.006	0.066±0.014	–
UNSW	AA-noAttMem	5	0.077±0.009	0.023±0.002	0.117±0.008	0.072±0.027	–
UNSW	Replay-BS (post hoc)	5	0.070±0.005	0.540±0.040	0.100±0.008	0.190±0.032	–
UNSW	Joint (offline)	5	0.022±0.002	–	0.087±0.003	0.228±0.006	0.213±0.019
CIC17	Replay	5	0.151±0.012	–	2.233±0.063	3.239±0.269	3.038±0.153
CIC17	DER++	5	0.187±0.021	–	1.246±0.099	3.674±0.131	3.257±0.176
CIC17	WACB	5	0.147±0.010	–	1.203±0.093	3.470±0.180	3.135±0.094
CIC17	Freq	5	0.149±0.006	–	1.204±0.068	3.623±0.061	3.170±0.173
CIC17	AA-CIL	5	0.291±0.018	0.374±0.126	1.919±0.061	1.216±0.081	–
CIC17	TS-mem	5	0.248±0.027	0.346±0.034	1.648±0.155	1.022±0.076	–
CIC17	AA-noAttMem	5	0.286±0.022	0.324±0.020	1.649±0.096	1.169±0.099	–
CIC17	Replay-BS (post hoc)	4	0.268±0.018	5.444±0.280	1.579±0.079	2.274±0.032	–
CIC17	Joint (offline)	5	0.032±0.001	–	1.198±0.023	3.672±0.124	3.216±0.149

Selection, in-run calibration and in-run evaluation use the recorded buffer-selection, calibration and evaluation totals respectively. A missing key is –, never an assumed zero. AA-family and Replay-BS CPU curves use the source-matched recorded cell-total seconds from the independent post-hoc curve ledger when available; missing or mismatched cell records remain –. For older baselines the separate CPU curve-analysis and extended-calibration elapsed totals are not embedded in the in-run columns; nested holdout/search/inference sub-timings must not be added again. Shared resume/render-attempt overhead remains in the independent curve ledger and is excluded here. These columns are not a single end-to-end walltime total and do not duplicate Replay+LA, which shares Replay weights and calibration.

References

[1] Suresh Kumar Amalapuram, Akash Tadwai, Reethu Vinta, et al. On handling class imbalance in continual learning based network intrusion detection systems. In *International Conference on AI-ML Systems*, 2021. doi: 10.1145/3486001.3486231. URL https://newslab.iith.ac.in/publications/on-handling-class-imbalance-in-continual-learning-based-network-intrusion-detection-systems/.

[2] Suresh Kumar Amalapuram, Bheemarjuna Reddy Tamma, and Sumohana S. Channappayya. Augmented memory replay-based continual learning approaches for network intrusion detection. In *Advances in Neural Information Processing Systems*, 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/3755a02b1035fbadd5f93a022170e46f-Paper-Conference.pdf.

[3] Xinchen Zhang, Running Zhao, Zhihan Jiang, Handi Chen, Yulong Ding, Edith C. H. Ngai, and Shuang-Hua Yang. Continual learning with strategic selection and forgetting for network intrusion detection. In *IEEE INFOCOM*, 2025. URL https://arxiv.org/abs/2412.16264.

[4] Anomaly-aware class-incremental learning (ACIL) framework for network intrusion detection systems. *International Journal of Machine Learning and Cybernetics*, 17:104, 2026. doi: 10.1007/s13042-025-02840-5. URL https://link.springer.com/article/10.1007/s13042-025-02840-5.

[5] Cerasuolo et al. Class incremental learning for network-agnostic intrusion detection systems. In *IEEE International Forum on Research and Technologies for Society and Industry*, pages 17–22, 2025. doi: 10.1109/RTSI64020.2025.11212335.

[6] Suresh Kumar Amalapuram, Bheemarjuna Reddy Tamma, and Sumohana S. Channappayya. SPIDER: A semi-supervised continual learning-based network intrusion detection system. In *IEEE INFOCOM*, 2024. doi: 10.1109/INFOCOM52122.2024.10621428. URL https://newslab.iith.ac.in/media/publications/pdfs/SPIDER-Suresh.pdf.

[7] Sean Fuhrman, Onat Gungor, and Tajana Rosing. CND-IDS: Continual novelty detection for intrusion detection systems. In *ACM/IEEE Design Automation Conference*, 2025. URL https://arxiv.org/abs/2502.14094.

[8] Cerasuolo, Bovenzi, Ciuonzo, and Pescapè. Attack-adaptive network intrusion detection systems for IoT networks through class incremental learning. *Computer Networks*, 263:111228, 2025. doi: 10.1016/j.comnet.2025.111228.

[9] Cerasuolo, Bovenzi, Ciuonzo, and Pescapè. Adaptable, incremental, and explainable network intrusion detection systems for internet of things. *Engineering Applications of Artificial Intelligence*, 144:110143, 2025. doi: 10.1016/j.engappai.2025.110143.

[10] Wang and Cao. A two-stage class incremental learning approach for network intrusion detection. In *IEEE Global Communications Conference*, pages 2353–2358, 2024. doi: 10.1109/GLOBECOM52923.2024.10901809. Official abstract and author publication record consulted; full text unavailable.

[11] Azizi Ariffin, Afif Haris, Faiz Zaki, Hazim Hanif, and Nor Badrul Anuar. Adaptive intrusion detection system using transformer-based neural networks and continual learning approach with adversarial investigation. *arXiv preprint arXiv:2608.04602*, 2026. URL https://arxiv.org/abs/2608.04602.

[12] Wu et al. Large scale incremental learning, 2019. URL https://arxiv.org/abs/1905.13260.

[13] Zhao et al. Maintaining discrimination and fairness in class incremental learning, 2020. URL https://arxiv.org/abs/1911.07053.

[14] Ahn et al. SS-IL: Separated softmax for incremental learning, 2021. URL https://arxiv.org/abs/2003.13947.

[15] Castro et al. End-to-end incremental learning, 2018. URL https://arxiv.org/abs/1807.09536.

[16] Menon et al. Long-tail learning via logit adjustment, 2021. URL https://arxiv.org/abs/2007.07314.

[17] Sylvestre-Alvise Rebuffi, Alexander Kolesnikov, Georg Sperl, and Christoph H. Lampert. iCaRL: Incremental classifier and representation learning. In *IEEE Conference on Computer Vision and Pattern Recognition*, pages 2001–2010, 2017.

[18] Pietro Buzzega, Matteo Boschini, Angelo Porrello, Davide Abati, and Simone Calderara. Dark experience for general continual learning: A strong, simple baseline. In *Advances in Neural Information Processing Systems*, volume 33, pages 15920–15930, 2020.

[19] Mahbod Tavallaee, Ebrahim Bagheri, Wei Lu, and Ali A. Ghorbani. A detailed analysis of the KDD CUP 99 data set. In *IEEE Symposium on Computational Intelligence for Security and Defense Applications*, pages 1–6, 2009.

[20] Nour Moustafa and Jill Slay. UNSW-NB15: A comprehensive data set for network intrusion detection systems. In *Military Communications and Information Systems Conference*, pages 1–6, 2015.

[21] Iman Sharafaldin, Arash Habibi Lashkari, and Ali A. Ghorbani. Toward generating a new intrusion detection dataset and intrusion traffic characterization. In *International Conference on Information Systems Security and Privacy*, pages 108–116, 2018.