Recorded token use by task type

Synthetic computational pilot | 4 case families

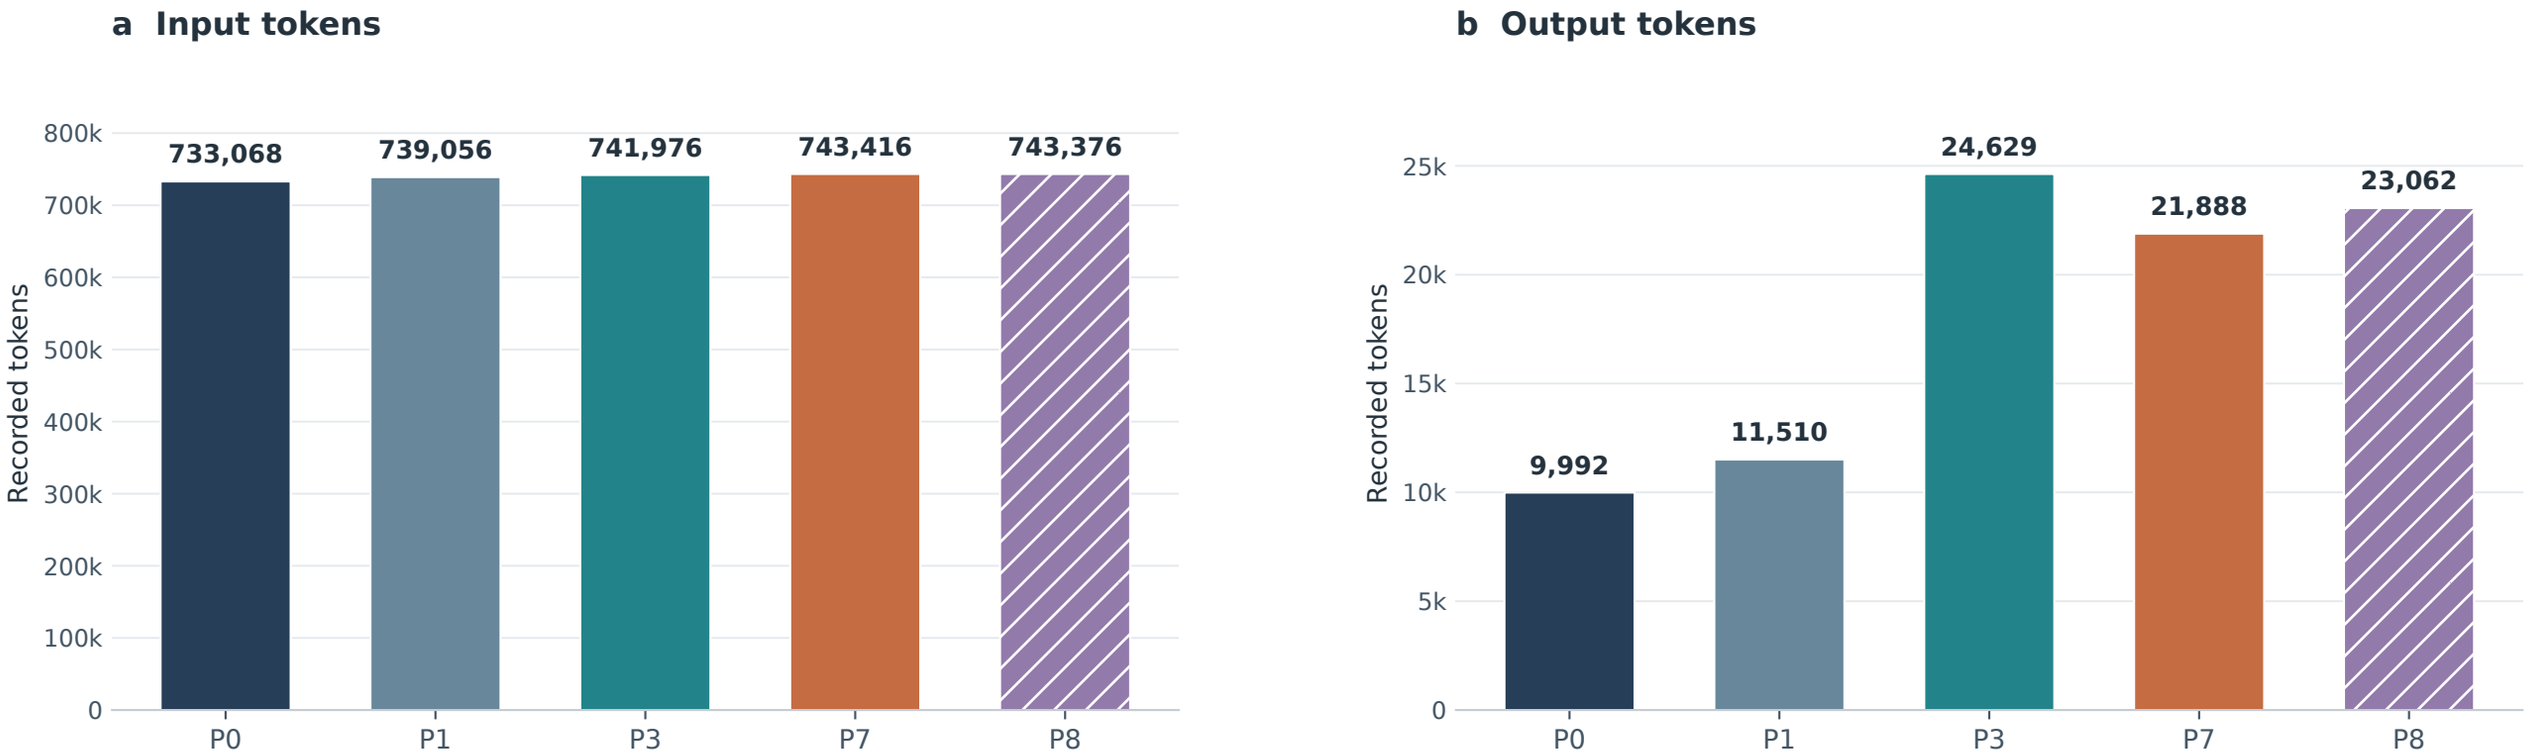

P0 records the first response once. P1/P3/P7/P8 bars contain review-task tokens only, including logged attempts.
These are recorded token counts, not FLOPs, monetary charges, or human workload. Missing usage is never treated as zero.