
sno	name	1	dept	1	age	1	DOB	1	Facno	1	gender
		T	cse	ï	19	T	2000	ï	7	ï	М
	virat		cse	1	19	1	2000	ı	71	н	M
3	l sindhu		cse	н	18		2001	ł	71	н	F
4	: UIJAY_DEVARAKONDA	-	cse	ı	21		1998	ı	3	н	M

```
mysql> select name from student where gender='f';
+----+
| name |
+----+
| nani |
| ram |
```

courseno	coursedesc	coursetype	semno	hallno	Facno
1	prgm	u	2000	201	2001

courseno	coursedesc	coursetype	semno	hallno	Facno
1	prgm	u	2000	201	2001

courseno	coursedesc	coursetype	semno	hallno	Facno
1	prgm	u	2000	201	2001

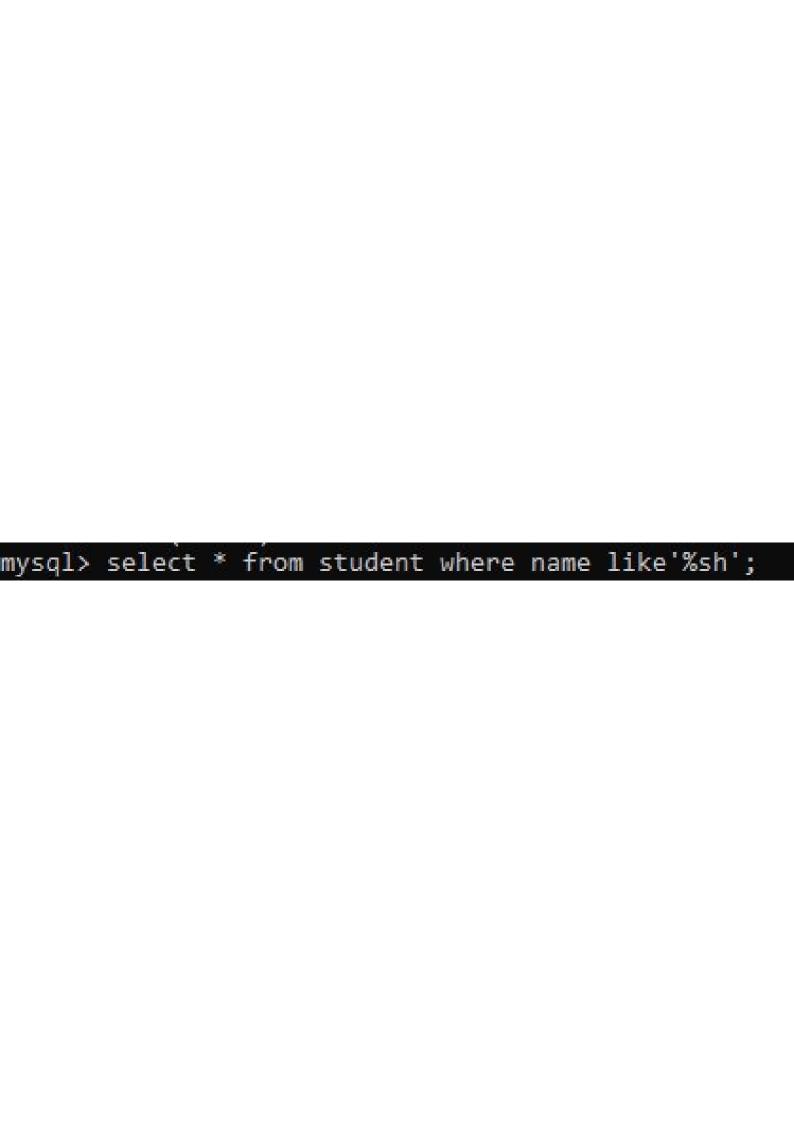

mysql> select \* from student where name like'ma%';

sno	name	1	dept	1	age	1	DOB	1	Facno	1	gender
		T	cse	ï	19	T	2000	ï	7	ï	М
	virat		cse	1	19	1	2000	ı	71	н	M
3	l sindhu		cse	н	18		2001	ł	71	н	F
4	: UIJAY_DEVARAKONDA	-	cse	ı	21		1998	ı	3	н	M

sno	name	1	dept	1	age	1	DOB	1	Facno	1	gender
		T	cse	ï	19	T	2000	ï	7	ï	М
	virat		cse	1	19	1	2000	ı	71	н	M
3	l sindhu		cse	н	18		2001	ł	71	н	F
4	: UIJAY_DEVARAKONDA	-	cse	ı	21		1998	ı	3	н	M

mysql> select \* from student where 'name' like '%h'; Empty set (0.00 sec)