INTERNET PROGRAMMING

LAB EXPRIMENTS

EXP-1:

CODE:

```
<!DOCTYPE html>
<html>
<head>
   <title>Library Management System</title>
</head>
<body>

   <h1 align="center">Library Management System</h1>
   <hr>

   <h2>Student Login</h2>
   <form>
      Email: <input type="email" placeholder="Enter email"><br><br>
      Password: <input type="password" placeholder="Enter password"><br><br>
      <input type="submit" value="Login">
   </form>

   <hr>

   <h2>Search Books</h2>
   <input type="text" id="search" placeholder="Enter book name">
   <button onclick="searchBook()">Search</button>

   <ul id="bookList">
      <li>Java Programming</li>
      <li>Database Management System</li>
      <li>Computer Networks</li>
      <li>Operating Systems</li>
   </ul>

   <hr>

   <h2>Admin - Add Book</h2>
   <input type="text" id="book" placeholder="Enter book name">
   <button onclick="addBook()">Add Book</button>

   <hr>

   <h2>Study Materials</h2>
   <p>Year: <select>
```

```
    <option>1st Year</option>
    <option>2nd Year</option>
    <option>3rd Year</option>
    <option>4th Year</option>
  </select></p>

  <p>Semester: <select>
    <option>Semester 1</option>
    <option>Semester 2</option>
    <option>Semester 3</option>
    <option>Semester 4</option>
    <option>Semester 5</option>
    <option>Semester 6</option>
    <option>Semester 7</option>
    <option>Semester 8</option>
  </select></p>

  <p><a href="notes.pdf" download>Download Study Material</a></p>

  <script>
    function addBook() {
      let book = document.getElementById("book").value;


      if (book != "") {
        let li = document.createElement("li");
        li.textContent = book;
        document.getElementById("bookList").appendChild(li);
        document.getElementById("book").value = "";
      }
    }


    function searchBook() {
      let search = document.getElementById("search").value.toLowerCase();
      let books = document.getElementById("bookList").getElementsByTagName("li");

      for (let i = 0; i < books.length; i++) {
        if (books[i].textContent.toLowerCase().includes(search)) {
          books[i].style.display = "";
        } else {
          books[i].style.display = "none";
        }
      }
    }
  </script>

</body>
</html>
```

OUT PUT:

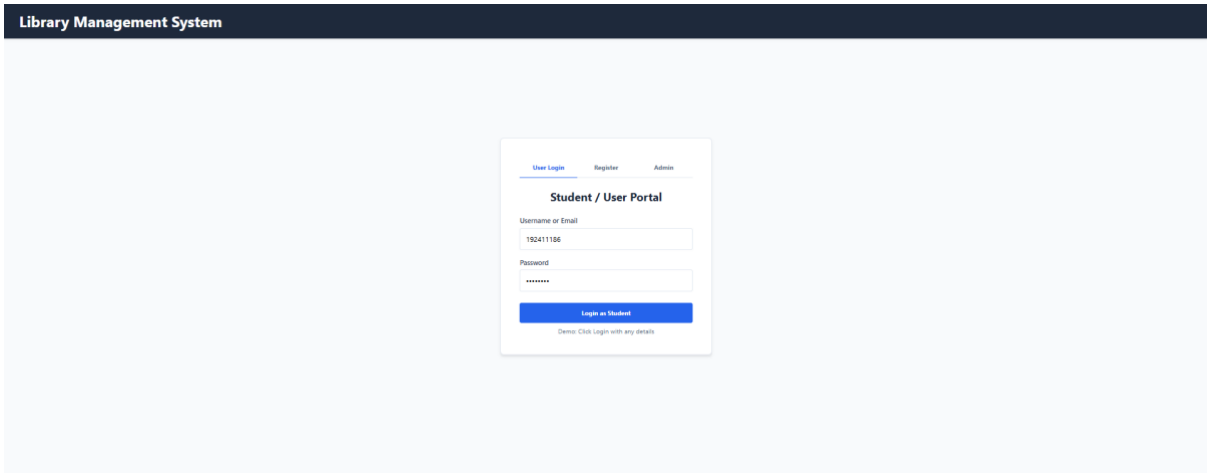

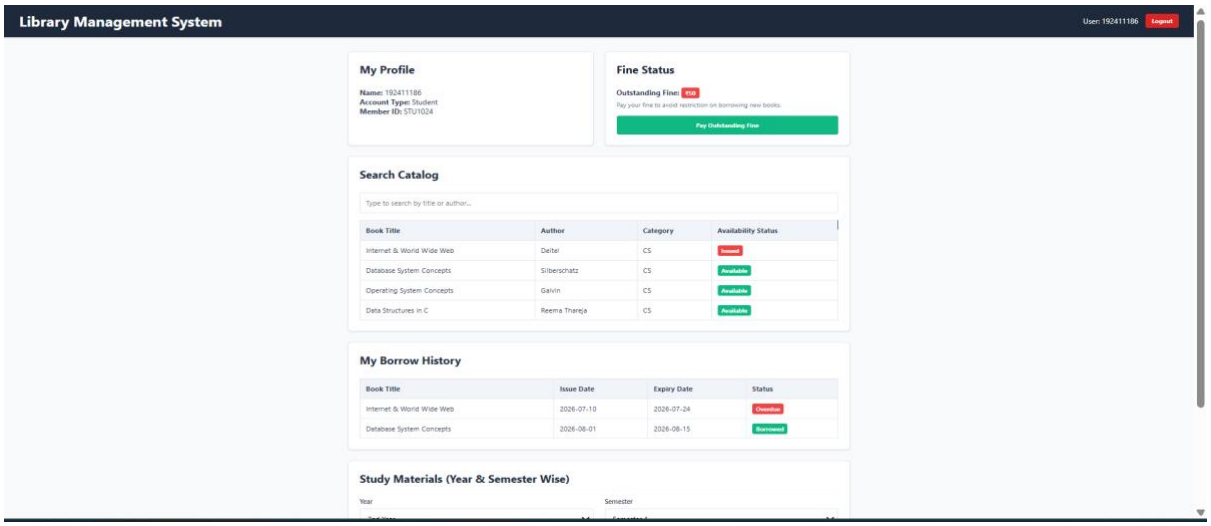

EXP-2:

CODE:

```
<!DOCTYPE html>
<html>
<head>
   <title>Hotel Room Booking</title>
</head>
<body>
   <h1 align="center">Hotel Room Booking System</h1>
   <hr>
   <h2>User Registration</h2>
   <form>
      Name: <input type="text"><br><br>
      Email: <input type="email"><br><br>
      Password: <input type="password"><br><br>
      <input type="submit" value="Register">
   </form>
   <hr>
   <h2>Book a Room</h2>
   Name: <input type="text" id="name"><br><br
```

```
Check-in Date: <input type="date" id="checkin"><br><br>
Check-out Date: <input type="date" id="checkout"><br><br>
Room Type:
<select id="room">
  <option>Standard Room - Rs.1000</option>
  <option>Deluxe Room - Rs.2000</option>
  <option>Suite Room - Rs.3000</option>
  <option>Family Room - Rs.4000</option>
</select><br><br>
<button onclick="bookRoom()">Book Now</button>
<h3>Booking Details</h3>
<p id="result"></p>
<hr>
<h2>Admin - Room Management</h2>
Room Name: <input type="text" id="roomname"><br><br>
Room Price: <input type="number" id="price"><br><br>
<button onclick="updateRoom()">Update Room</button>
<p id="admin"></p>
<hr>
<h2>Contact Us</h2>
<p>Email: hotel@example.com</p>
<p>Phone: 9876543210</p>
<h2>About Us</h2>
<p>Our hotel provides comfortable rooms at affordable prices.</p>
<h2>Privacy Policy</h2>
<p>Customer information is used for booking purposes.</p>
<script>
  function bookRoom() {
    let name = document.getElementById("name").value;
    let checkin = document.getElementById("checkin").value;
    let checkout = document.getElementById("checkout").value;
    let room = document.getElementById("room").value;

    if (name == "" || checkin == "" ||
      checkout == "" || checkout <= checkin) {
      alert("Enter valid booking details");
      return;
}
    document.getElementById("result").innerHTML =
      "Name: " + name + "<br>" +
      "Check-in: " + checkin + "<br>" +
      "Check-out: " + checkout + "<br>" +
      "Room: " + room;
  }


  function updateRoom() {
    let name = document.getElementById("roomname").value;
    let price = document.getElementById("price").value;


    document.getElementById("admin").innerHTML =
      name + " price updated to Rs." + price;
```

```
    }
  </script>

</body>
</html>
```

OUTPUT:

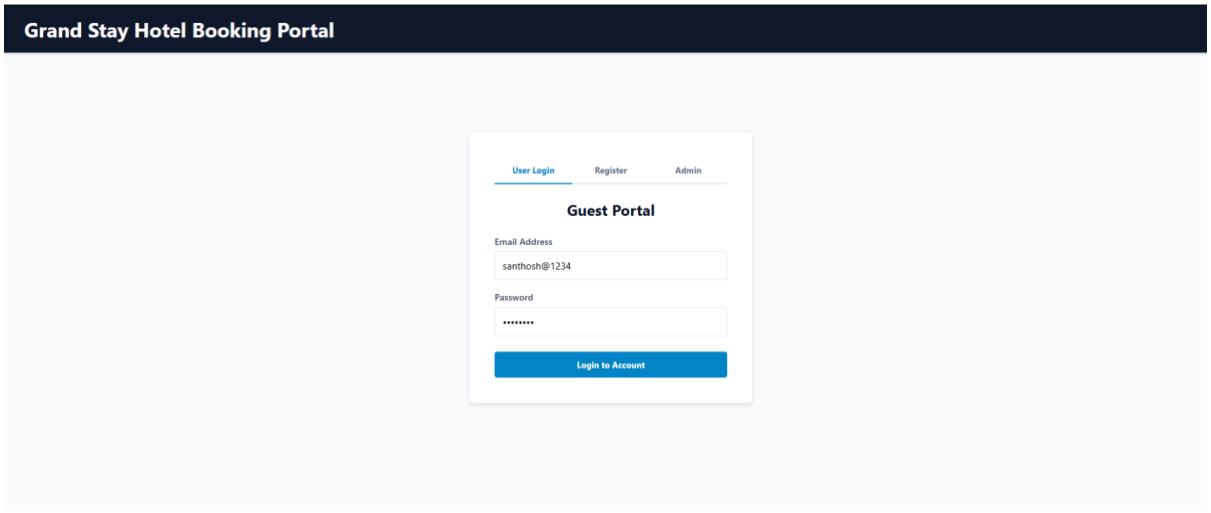

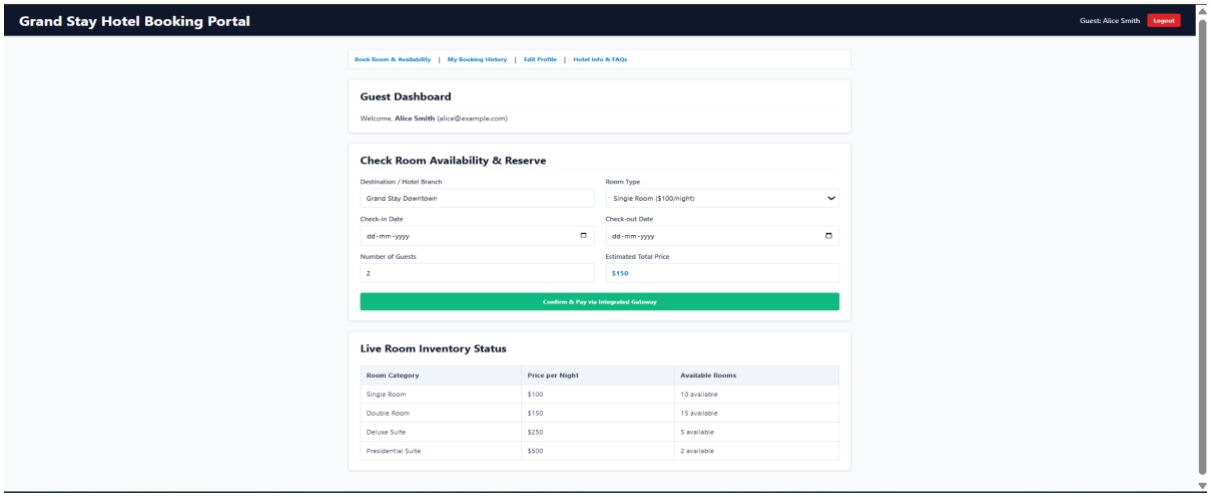

EXP-3:

CODE:

```
<!DOCTYPE html>
<html>
<head>
   <title>Bus Ticket Booking</title>
</head>
<body>

   <h1 align="center">Bus Ticket Booking System</h1>
```

```
<h2>User Registration</h2>
Name: <input type="text"><br><br>
Email: <input type="email"><br><br>
Password: <input type="password"><br><br>
<button>Register</button>

<hr>

<h2>Book Bus Ticket</h2>
From: <input type="text" id="from"><br><br>
To: <input type="text" id="to"><br><br>
Date: <input type="date" id="date"><br><br>

Bus Type:
<select id="bus">
   <option>Volvo</option>
   <option>Sleeper Coach</option>
   <option>AC Coach</option>
</select><br><br>

Passenger Name: <input type="text" id="name"><br><br>

<button onclick="book()">Book Ticket</button>
<button onclick="cancel()">Cancel Ticket</button>

<p id="result"></p>

<hr>

<h2>Admin - Add Bus</h2>
Bus Name: <input type="text" id="busname"><br><br>
Available Seats: <input type="number" id="seats"><br><br>
<button onclick="addBus()">Add Bus</button>

<p id="admin"></p>

<script>
   function book() {
      let from = document.getElementById("from").value;
      let to = document.getElementById("to").value;
      let date = document.getElementById("date").value;
      let name = document.getElementById("name").value;
      let bus = document.getElementById("bus").value;

      if (from == "" || to == "" || date == "" || name == "") {
         alert("Enter all details");
         return;
      }
```

```
        document.getElementById("result").innerHTML =
            "Passenger: " + name + "<br>" +
            "From: " + from + "<br>" +
            "To: " + to + "<br>" +
            "Date: " + date + "<br>" +
            "Bus: " + bus + "<br>" +
            "Ticket Booked Successfully!";
    }


    function cancel() {
        document.getElementById("result").innerHTML =
            "Ticket Cancelled Successfully";
    }


    function addBus() {
        let bus = document.getElementById("busname").value;
        let seats = document.getElementById("seats").value;

        document.getElementById("admin").innerHTML =
            "Bus: " + bus + "<br>Available Seats: " + seats;
    }
  </script>

</body>
</html>
```

OUTPUT:

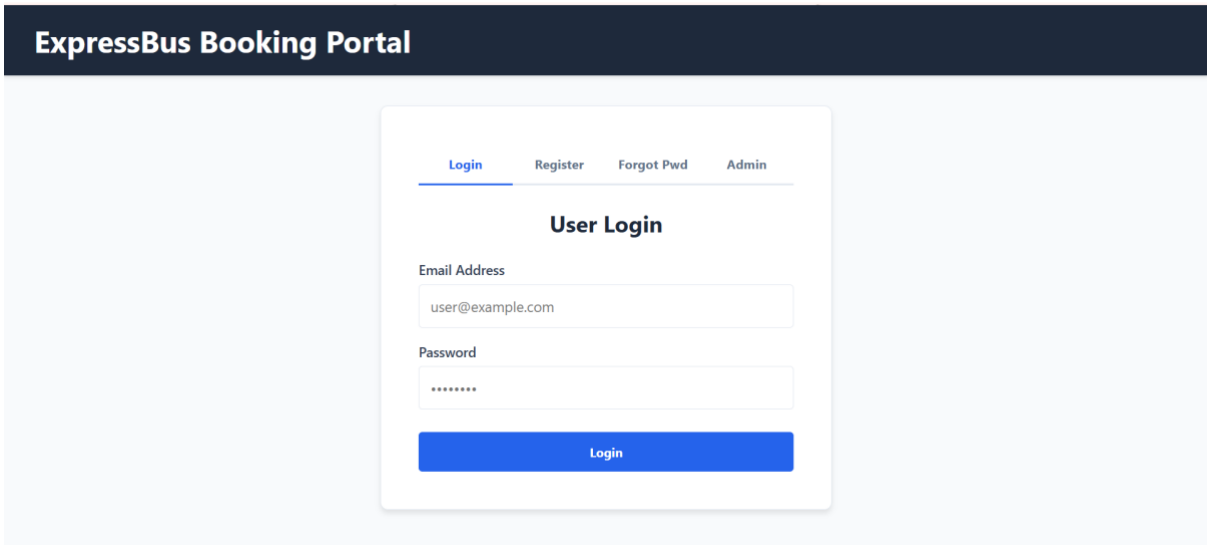

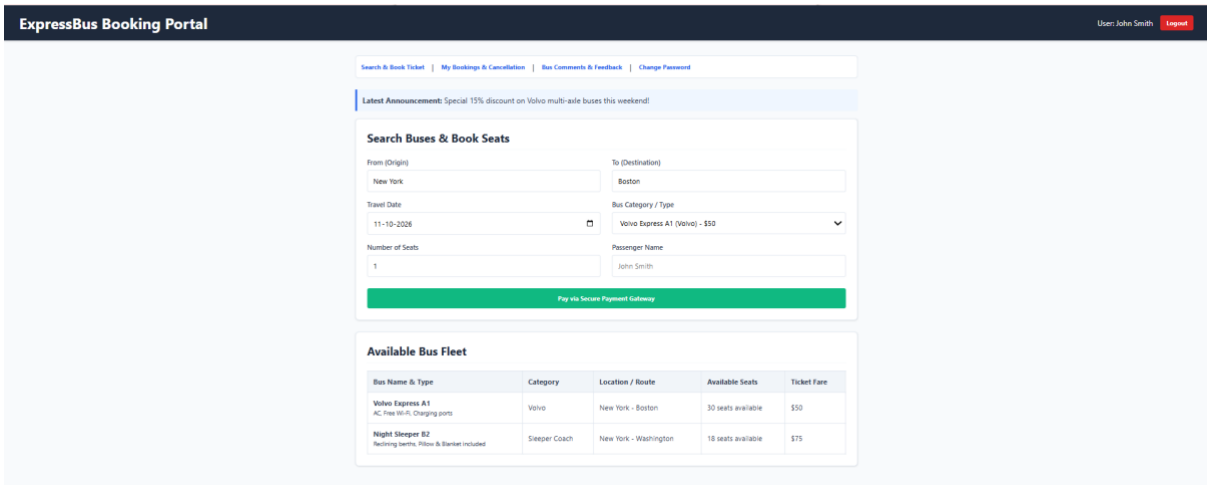

EXP-4:

CODE:

```
<!DOCTYPE html>
<html>
<head>
   <title>Train Reservation</title>
</head>
<body>

   <h1>Train Reservation System</h1>

   <h2>Passenger Login</h2>
   Username: <input type="text"><br><br>
   Password: <input type="password"><br><br>
   <button onclick="alert('Login Successful')">Login</button>

   <hr>

   <h2>Book Train Ticket</h2>
   Passenger Name: <input type="text" id="name"><br><br>
```

```
From: <input type="text" id="from"><br><br>
To: <input type="text" id="to"><br><br>
Journey Date: <input type="date" id="date"><br><br>

Train:
<select id="train">
   <option>Chennai Express</option>
   <option>Rajdhani Express</option>
   <option>Shatabdi Express</option>
</select><br><br>

Class:
<select id="class">
   <option>Sleeper</option>
   <option>AC 3 Tier</option>
   <option>AC 2 Tier</option>
</select><br><br>

<button onclick="book()">Book Ticket</button>
<p id="result"></p>

<h2>Check PNR</h2>
<input type="text" id="pnr" placeholder="Enter PNR number">
<button onclick="checkPNR()">Check</button>
<p id="status"></p>

<script>
   let pnrNumber = "";

   function book() {
      let name = document.getElementById("name").value;
      let from = document.getElementById("from").value;
      let to = document.getElementById("to").value;
      let date = document.getElementById("date").value;
      let train = document.getElementById("train").value;
      let cls = document.getElementById("class").value;

      if (name == "" || from == "" || to == "" || date == "") {
         alert("Enter all details");
         return;
      }

      pnrNumber = Math.floor(100000 + Math.random() * 900000);


      document.getElementById("result").innerHTML =
         "Passenger: " + name + "<br>" +
         "From: " + from + "<br>" +
         "To: " + to + "<br>" +
         "Date: " + date + "<br>" +
         "Train: " + train + "<br>" +
```

```
            "Class: " + cls + "<br>" +
            "PNR: " + pnrNumber + "<br>" +
            "Status: Confirmed";
        }

        function checkPNR() {
            if (document.getElementById("pnr").value == pnrNumber &&
                pnrNumber != "") {
                document.getElementById("status").innerHTML =
                    "Ticket Confirmed";
            } else {
                document.getElementById("status").innerHTML =
                    "PNR Not Found";
            }
        }
    </script>

</body>
</html>
```

OUTPUT:

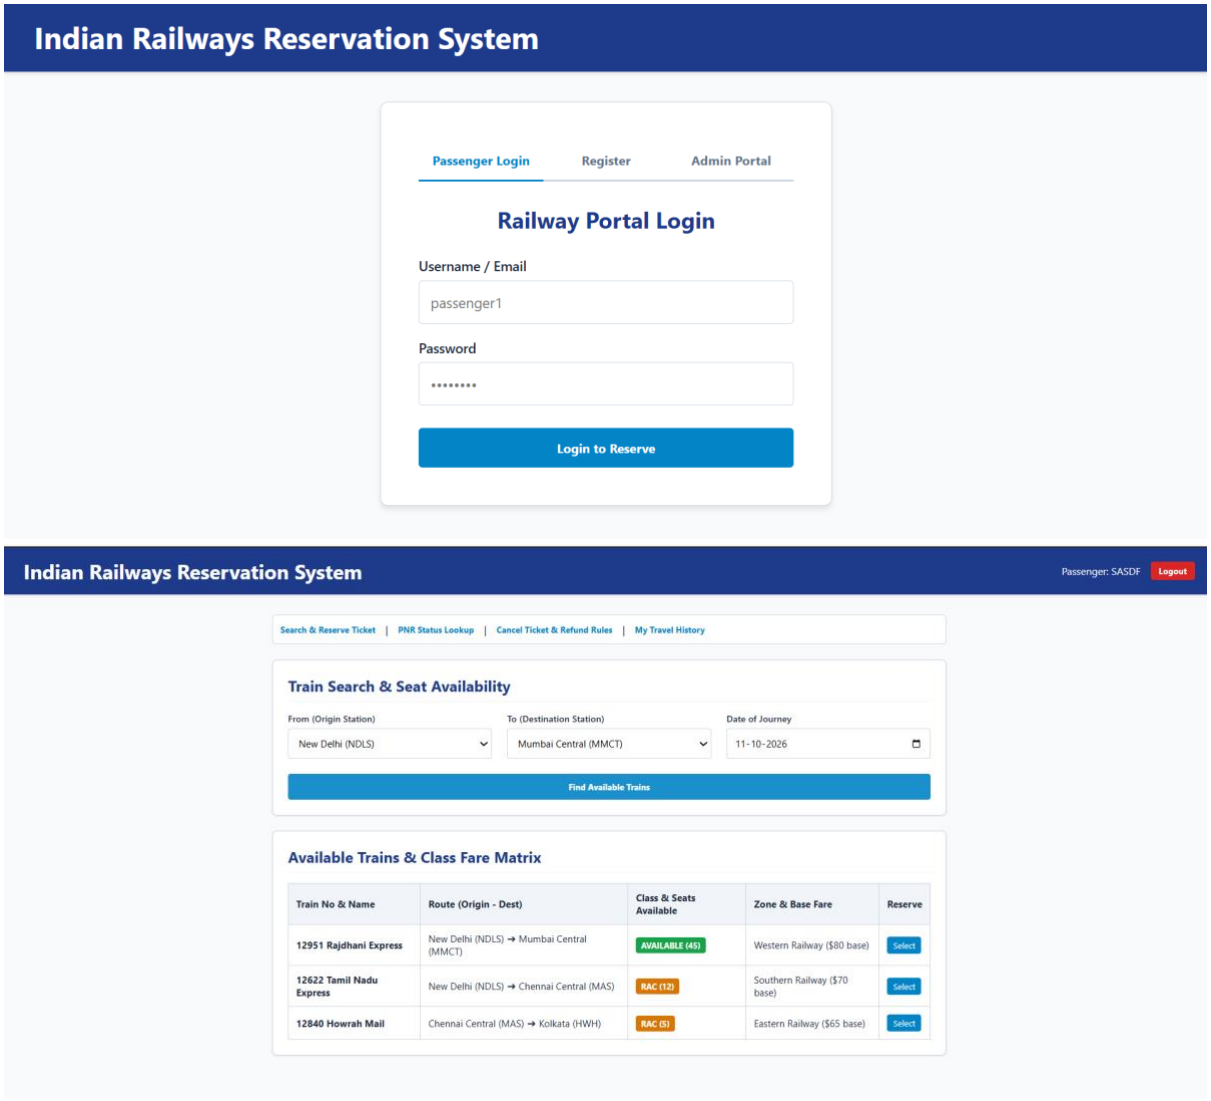

EXP-5

CODE:

```
<!DOCTYPE html>
<html>
<head>
   <title>Flight Reservation</title>
</head>
<body>

   <h1>Flight Reservation System</h1>

   <h2>Search Flight</h2>
   From: <input type="text" id="from"><br><br>
   To: <input type="text" id="to"><br><br>
   Date: <input type="date" id="date"><br><br>

   Class:
   <select id="class">
      <option>Economy</option>
```

```
    <option>Business</option>
    <option>First Class</option>
  </select><br><br>

  <button onclick="searchFlight()">Search Flight</button>
  <p id="result"></p>

  <h2>Book Ticket</h2>
  Passenger Name: <input type="text" id="name"><br><br>
  <button onclick="bookTicket()">Book Ticket</button>
  <p id="ticket"></p>

  <h2>Cancel Ticket</h2>
  <button onclick="cancelTicket()">Cancel Ticket</button>

  <h2>Customer Feedback</h2>
  <textarea id="feedback"></textarea><br><br>
  <button onclick="alert('Feedback submitted')">Submit</button>

  <script>
    function searchFlight() {
      let from = document.getElementById("from").value;
      let to = document.getElementById("to").value;
      let date = document.getElementById("date").value;

      document.getElementById("result").innerHTML =
        "Flight from " + from + " to " + to +
        "<br>Date: " + date +
        "<br>Available Seats: 20";
    }


    function bookTicket() {
      let name = document.getElementById("name").value;


      document.getElementById("ticket").innerHTML =
        "Passenger: " + name +
        "<br>Ticket Booked Successfully!";
    }

    function cancelTicket() {
      document.getElementById("ticket").innerHTML =
        "Ticket Cancelled Successfully";
    }
  </script>

</body>
</html>
```

OUTPUT:

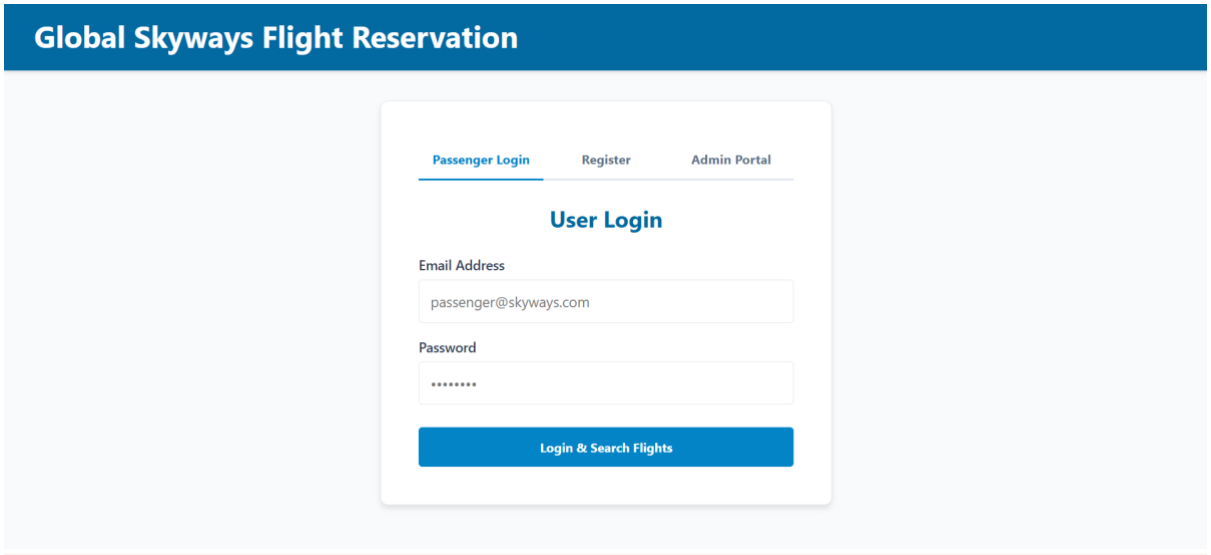
Global Skyways Flight Reservation
Passenger Login
Register
Admin Portal
User Login
Email Address
passenger@skyways.com
Password
••••••••
Login & Search Flights

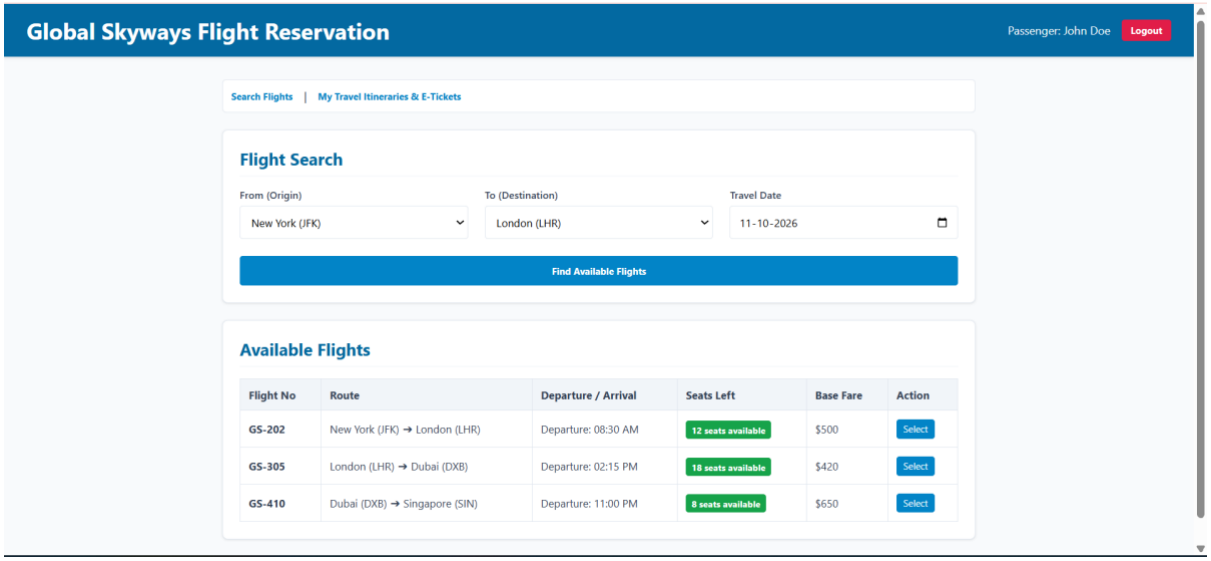
Global Skyways Flight Reservation
Passenger: John Doe
Logout
Search Flights | My Travel Itineraries & E-Tickets
Flight Search
From (Origin)
New York (JFK)
To (Destination)
London (LHR)
Travel Date
11-10-2026
Find Available Flights
Available Flights
Flight No
Route
Departure / Arrival
Seats Left
Base Fare
Action
GS-202
New York (JFK) → London (LHR)
Departure: 08:30 AM
12 seats available
$500
Select
GS-305
London (LHR) → Dubai (DXB)
Departure: 02:15 PM
18 seats available
$420
Select
GS-410
Dubai (DXB) → Singapore (SIN)
Departure: 11:00 PM
8 seats available
$650
Select