NAME :-B Dharanidaran

REG. NO. :-192412673

ECA5605- 5G/6G-COMMUNICATION

EXP 2

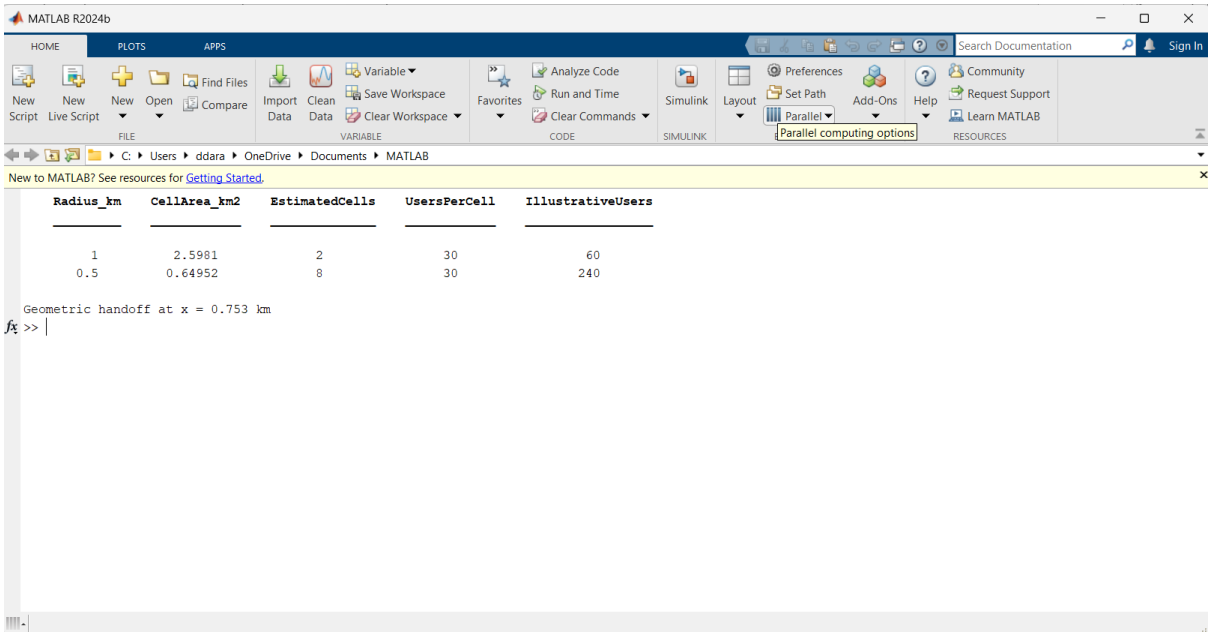
Program Code:

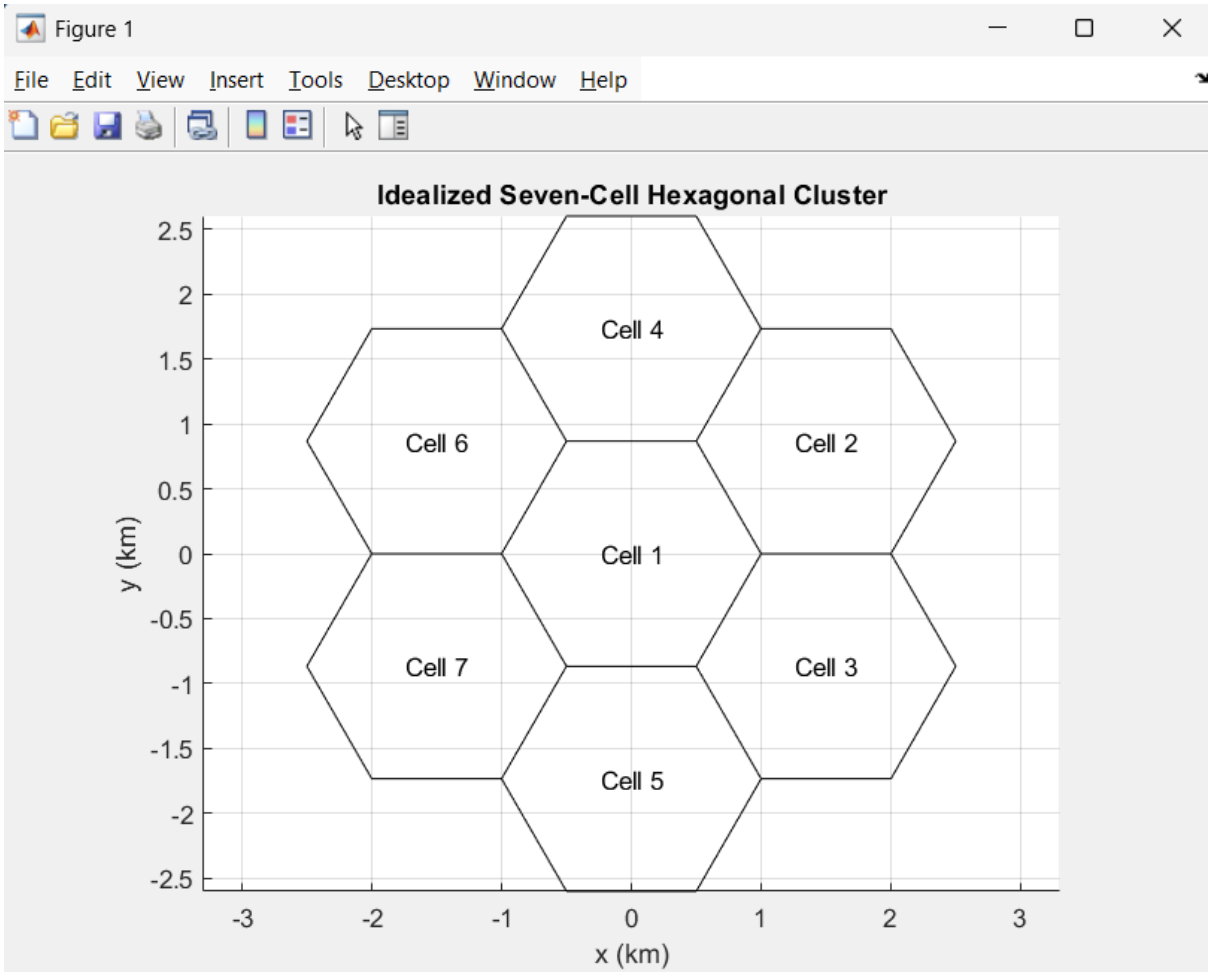
```
clear; clc; close all;
% Baseline assumptions
serviceAreaKm2 = 5;
radiiKm = [1.0 0.5];
usersPerCell = 30;
hexArea = @(R) (3*sqrt(3)/2) .* R.^2;
cellAreaKm2 = hexArea(radiiKm);
cellCount = ceil(serviceAreaKm2 ./ cellAreaKm2);
estimatedUsers = cellCount .* usersPerCell;
capacityTable = table(radiiKm(:), cellAreaKm2(:), cellCount(:), ...
 repmat(usersPerCell,numel(radiiKm),1), estimatedUsers(:), ...
 'VariableNames', {'Radius_km','CellArea_km2','EstimatedCells', ...
 'UsersPerCell','IllustrativeUsers'});
disp(capacityTable);
% Plot a 7-cell cluster: central cell plus six neighbors
R = radiiKm(1);
centers = [0 0; 1.5*R sqrt(3)*R/2; 1.5*R -sqrt(3)*R/2; ...
 0 sqrt(3)*R; 0 -sqrt(3)*R; -1.5*R sqrt(3)*R/2; ...
 -1.5*R -sqrt(3)*R/2];
theta = (0:6)*pi/3; % flat-top hexagon vertices
figure; hold on; axis equal; grid on;
for k = 1:size(centers,1)
 plot(centers(k,1)+R*cos(theta), centers(k,2)+R*sin(theta), 'k-');
```

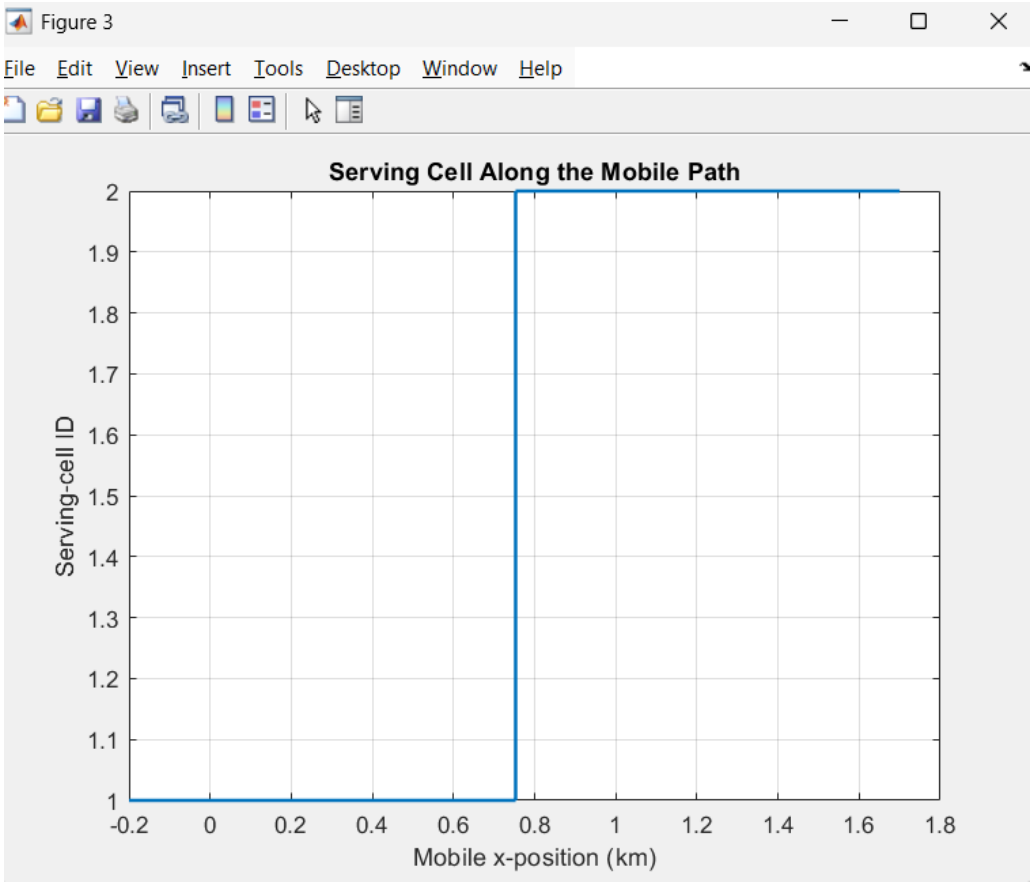
```
 text(centers(k,1),centers(k,2),sprintf('Cell %d',k), ...
 'HorizontalAlignment','center');
end
xlabel('x (km)'); ylabel('y (km)');
title('Idealized Seven-Cell Hexagonal Cluster');
hold off;
% Mobile moves across the boundary between centers at x=0 and x=1.5R
mobileX = linspace(-0.2*R,1.7*R,300);
mobileY = zeros(size(mobileX));
d1 = hypot(mobileX, mobileY);
d2 = hypot(mobileX-1.5*R, mobileY);
servingCell = ones(size(mobileX));
servingCell(d2 < d1) = 2;
handoffIndex = find(diff(servingCell) ~= 0,1,'first') + 1;
figure; hold on; grid on;
plot(mobileX,d1,'LineWidth',1.5);
plot(mobileX,d2,'LineWidth',1.5);
if ~isempty(handoffIndex)
 xline(mobileX(handoffIndex),'--r','Handoff decision');
end
xlabel('Mobile x-position (km)'); ylabel('Distance to cell center (km)');
legend('Cell 1','Cell 2','Location','best');
title('Nearest-Center Handoff Approximation');
hold off;
figure; stairs(mobileX,servingCell,'LineWidth',1.5); grid on;
xlabel('Mobile x-position (km)'); ylabel('Serving-cell ID');
title('Serving Cell Along the Mobile Path');
if ~isempty(handoffIndex)
 fprintf('Geometric handoff at x = %.3f km\n',mobileX(handoffIndex));
```

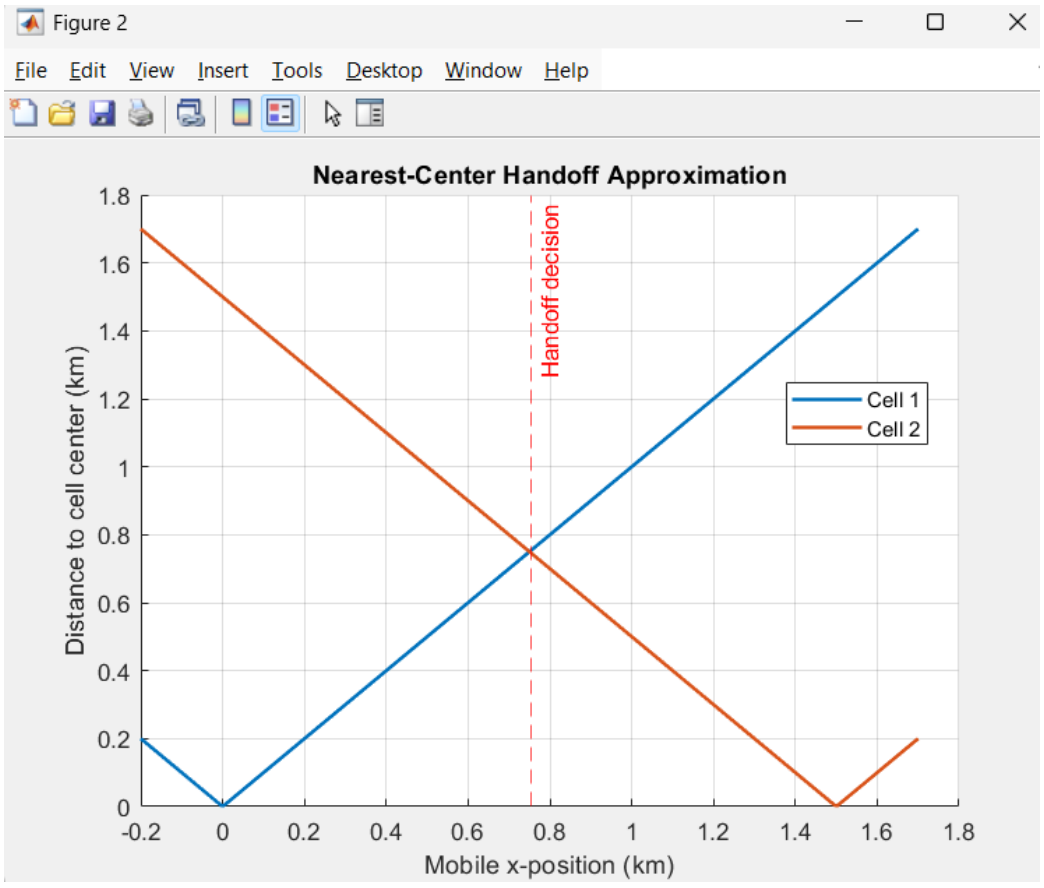
end

OUTPUT


MATLAB R2024b
HOME
PLOTS
APPS
Search Documentation
Sign In
New Script
New Live Script
New
Open
Find Files
Compare
Import Data
Clean Data
Variable
Save Workspace
Clear Workspace
Favorites
Analyze Code
Run and Time
Clear Commands
Simulink
Layout
Preferences
Set Path
Parallel
Parallel computing options
Add-Ons
Help
Community
Request Support
Learn MATLAB
FILE
VARIABLE
CODE
SIMULINK
RESOURCES
C: Users ddara OneDrive Documents MATLAB
New to MATLAB? See resources for Getting Started.
Radius_km CellArea_km2 EstimatedCells UsersPerCell IllustrativeUsers
1 2.5981 2 30 60
0.5 0.64952 8 30 240
Geometric handoff at x = 0.753 km
>>


Figure 1
File Edit View Insert Tools Desktop Window Help
Idealized Seven-Cell Hexagonal Cluster
Cell 4
Cell 6
Cell 2
Cell 1
Cell 7
Cell 3
Cell 5
y (km)
x (km)
2.5
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
-2.5
-3
-2
-1
0
1
2
3


Figure 3
File Edit View Insert Tools Desktop Window Help
Serving Cell Along the Mobile Path
Serving-cell ID
Mobile x-position (km)
2
1.9
1.8
1.7
1.6
1.5
1.4
1.3
1.2
1.1
1
-0.2
0
0.2
0.4
0.6
0.8
1
1.2
1.4
1.6
1.8


Figure 2
File Edit View Insert Tools Desktop Window Help
Nearest-Center Handoff Approximation
Handoff decision
Cell 1
Cell 2
Distance to cell center (km)
Mobile x-position (km)
1.8
1.6
1.4
1.2
1
0.8
0.6
0.4
0.2
0
-0.2
0
0.2
0.4
0.6
0.8
1
1.2
1.4
1.6
1.8